

### MBD4037-0805-2 Planar Tunnel Diode

## ECLIPSEMOI microwave devices, inc

#### **Technical Characteristics**

# 0805-2 (non-hermetic)





#### **Product Features**

Rugged Germanium Planar Construction

**Excellent Temperature Stability** 

No DC Bias Required

Wide Video Bandwidth

MIL-STD-190500 & 883 Qualified

#### **Product Description**


EclipseMDI MBD4037-0805-2, is a zero-bias, rugged Planar Tunnel Diode constructed with Germanium Planar. This tunnel diode exhibits excellent temperature stability, wide video bandwidth and is MIL STD-190500 & MIL-STD-883C qualified.

#### **Maximum Ratings**


Storage Temperature	
Operating Temperature	
Input Power Handling	+17dBm CW
or 3 ERG spike	
Soldering Temperature	+160° C

	Specifications Specification Specificatio					
Parameters	Conditions	MIN	Typical	MAX	UNITS	
lp		350		400	μΑ	
Cj	Vr=Vv, f=100MHz			.30	pF	
K[Y]	Pin=-20dBm		450		mV/mW	
Rv	R)Load)=10K, f=10GHz		75		Ω Ohms	
lp/lv		2.5				
Vr	If=500μA		400		mV	
Vf	If=3mA			125	mV	

#### Diode equivalent circuit

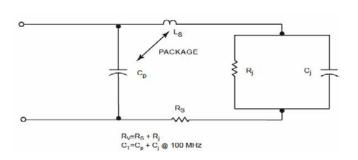

#### Back diode parameters



#### About EclipseMDI

ECLIPSE Microdevices is located in San Jose, California. ECLIPSE has been developing high performance analog semiconductors for use in wireless radio frequency (RF), microwave, and millimeter wave for commercial and industrial applications. ECLIPSE has formed a strategic alliances - with foundries that features leading state-of-the-art process technologies and with manufacturing facilities for high-volume production of innovative RFIC's.

Quality products that serve the industry. Today and tomorrow.

#### **Product Export Classificiation**

ECCN: EAR 99 (unless otherwise specified) HTS: 8542330000



