

LM111/LH2111

Voltage Comparators




Features

- Low input offset current — 4 nA
- Low input bias current — 60 nA
- Operates from a single +5V supply
- Response Time — 200 ns

Description

These low input current voltage comparators are designed to operate over a wide range of supply voltages, including +15V and single +5V supplies. Their outputs are compatible with DTL, RTL, TTL and MOS devices, and can be connected in “wire-OR” configuration. The LH2111 consists of two LM111 ICs packaged in a 16-lead DIP. The LH2111 is available with MIL-STD 883B screening.

Pin Assignments

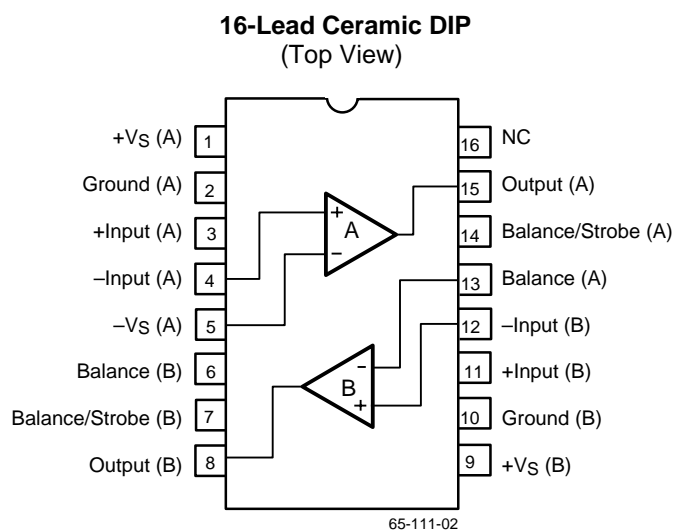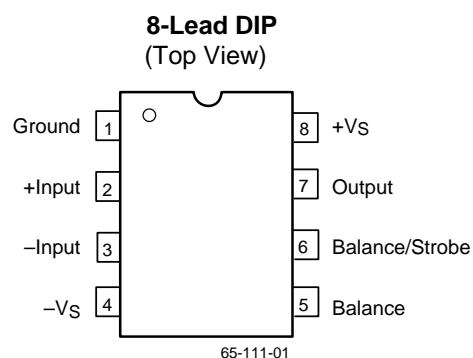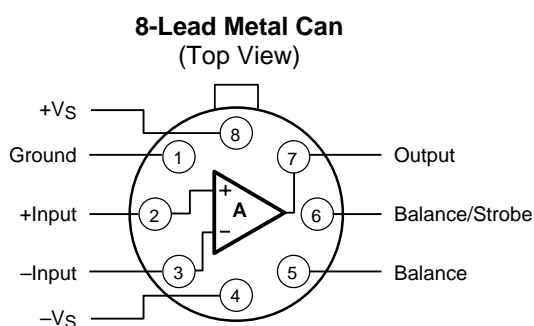

Absolute Maximum Ratings

Parameter	Min.	Max.	Unit
Supply Voltage	-18	+18	V
Output to -Vs		50	V
Ground to -Vs		30	V
Differential Input Voltage		30	V
Input Voltage ¹	-15	+15	V
Power Dissipation ²		500	mW
Output Short Circuit Duration		10	seconds
Storage Temperature Range	-65	+150	°C
Operating Temperature Range	-55	+125	•C
Voltage at Strobe Pin		+Vs-5	V
Lead Soldering Temperature (60 seconds)		+300	°C

Notes:

- For supply voltages other than $\pm 15\text{V}$, the maximum input is equal to the supply voltage.
- Observe package thermal characteristics.

Thermal Characteristics

Parameter	8-Lead Metal Can	8-Lead Ceramic DIP	16-Lead Ceramic DIP
Maximum Junction Temperature	+175°C	+175°C	+175°C
Maximum PD $T_A < 50^\circ\text{C}$	658 mW	833 mW	1042 mW
Thermal Resistance, θ_{JC}	50°C/W	45°C/W	60°C/W
Thermal Resistance, θ_{JA}	190°C/W	150°C/W	120°C/W
For $T_A > 50^\circ\text{C}$ Derate at	5.26 mW/°C	8.33 mW/°C	8.38 mW/°C

Electrical Characteristics


$V_S = \pm 15\text{V}^1$ and $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ unless otherwise noted.

Parameters	Test Conditions	Min.	Typ.	Max.	Units
Input Offset Voltage ²	$T_A = +25^\circ\text{C}$, $R_S = 50\text{ k}\Omega$		0.7	3.0	mV
Input Offset Current ²	$T_A = +25^\circ\text{C}$		4.0	10	nA
Input Bias Current	$T_A = +25^\circ\text{C}$		60	100	nA
Large Signal Voltage Gain	$T_A = +25^\circ\text{C}$	40	200		V/mV
Response Time	$T_A = +25^\circ\text{C}$, 100 mV step, 5 mV overdrive		200		ns
Output Voltage Low (VOL)	$V_{IN} \leq 5\text{ mV}$, $I_L = 50\text{ mA}$, $T_A = +25^\circ\text{C}$		3.0		mA
Output Leakage current	$V_{IN} = 25\text{ mV}$, $V_{OUT} = 35\text{V}$, $T_A = +25^\circ\text{C}$, $I_{STROBE} = 3\text{ mA}$		0.2	10	nA
Input Offset Voltage ²	$R_S \leq 50\text{ k}\Omega$		1.5	4.0	mV
Input Offset Current ²			5.0	20	nA
Input Bias Current			100	150	nA
Input Voltage Range	Pin 7 pull up may go to +5V	-14.5		13.0	V
Output Voltage Low (VOL)	$+V_S = 4.5\text{V}$, $-V_S = 0\text{V}$, $V_{IN} \leq -6\text{ mV}$, $I_{OUT} = 8.0\text{ mA}$		0.23	0.4	V
Output Leakage Current	$V_{IN} \geq 5\text{ mV}$, $V_{OUT} = 35\text{V}$		100	500	nA
Positive Supply Current	$T_A = +25^\circ\text{C}$, each amplifier		5.1	6.0	mA
Negative Supply Current	$T_A = +25^\circ\text{C}$, each amplifier		4.1	5.0	mA

Notes:


1. V_{OS} , I_{OS} and I_B specifications apply for $V_S = +5\text{V}$ to $V_S = \pm 15\text{V}$.
2. V_{OS} and I_{OS} are maximum values required to drive the output to within 1V of either supply with a 1 mA load.
3. Do not short circuit the strobe pin to ground—drive it with a 3 to 5 mA current. Instead.
4. If the strobe and balance pins are unused, short them together for maximum AC stability.

Typical Performance Characteristics

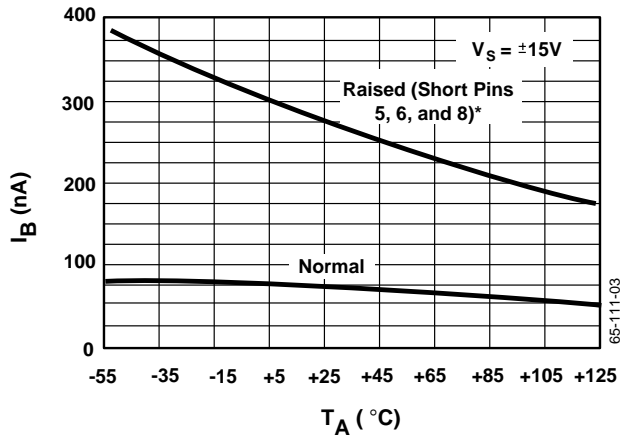

* Pin numbers are for 8-lead packages

Figure 1. Input Bias Current vs. Temperature

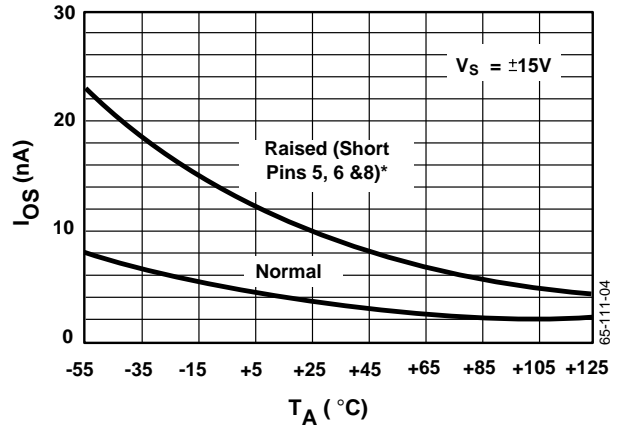

* Pin numbers are for 8-lead packages

Figure 2. Input Offset Current vs. Temperature

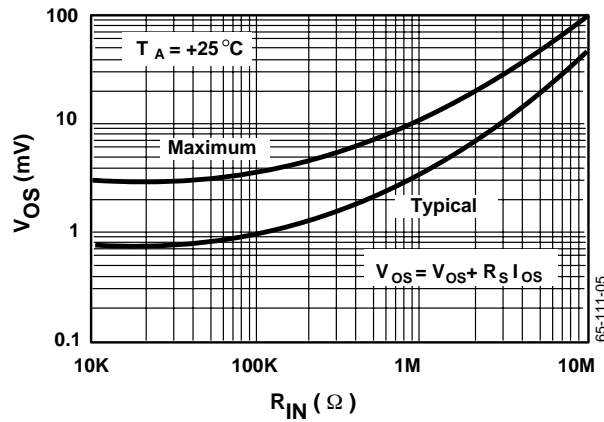


Figure 3. Equivalent Input Offset Voltage vs. Input Resistance

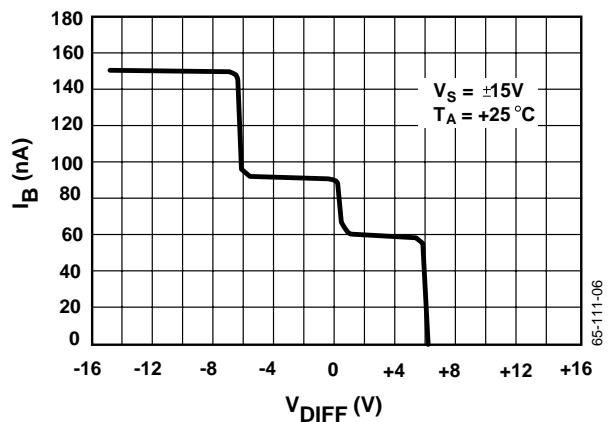


Figure 4. Input Bias Current vs. Differential Input Voltage

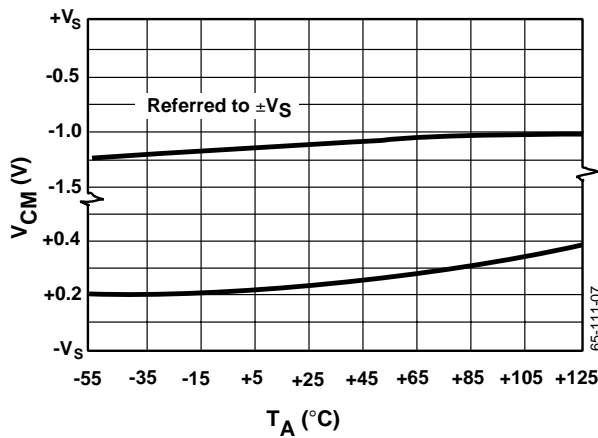


Figure 5. Common Mode Limits vs. Temperature

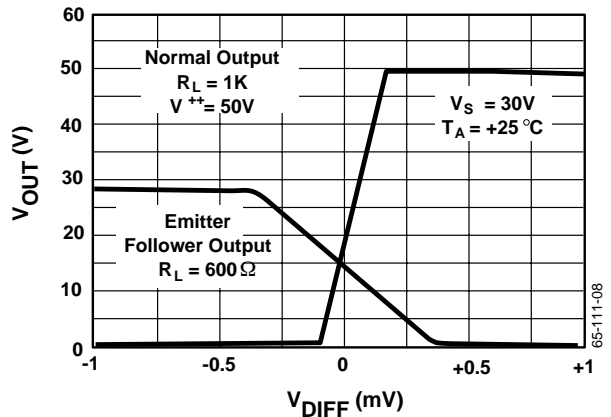


Figure 6. Output Voltage vs. Differential Input Voltage

Typical Performance Characteristics (continued)

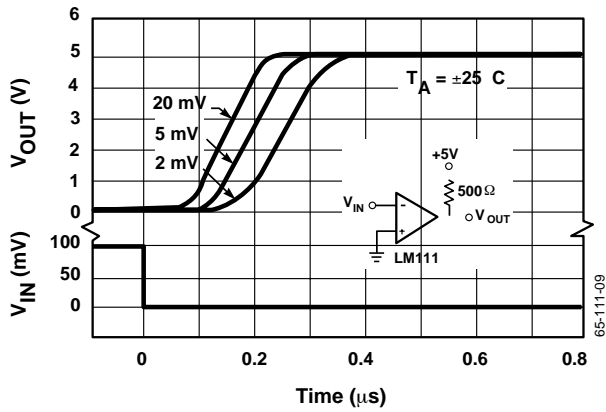


Figure 7. Input Overdrive vs. Response Times

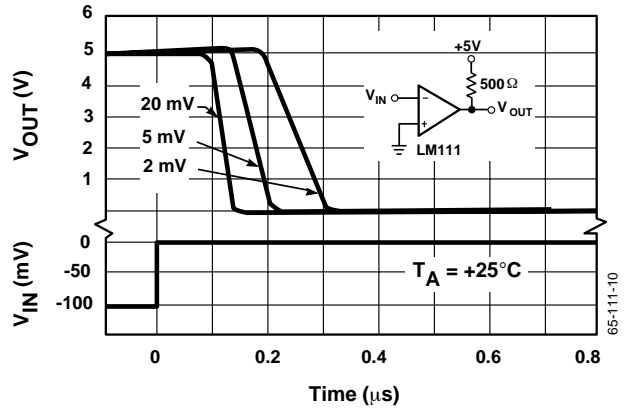


Figure 8. Input Overdrive vs. Response Times

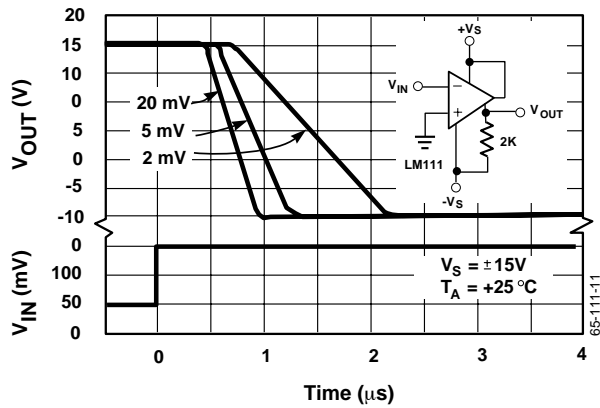


Figure 9. Input Overdrive vs. Response Times

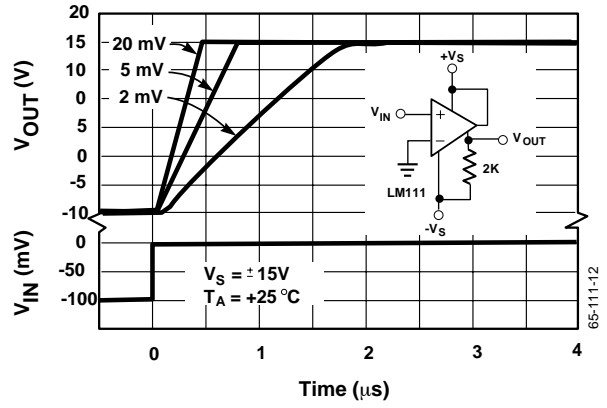


Figure 10. Input Overdrive vs. Response Times

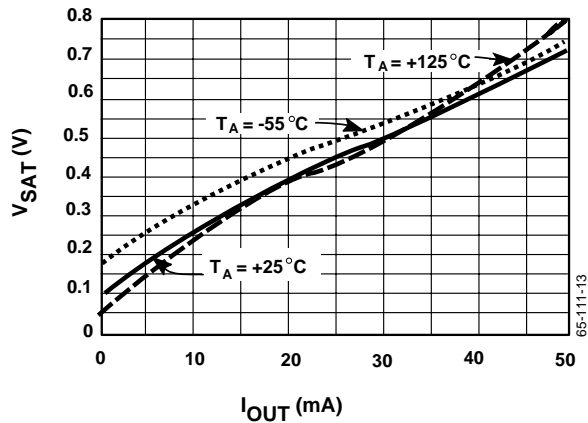


Figure 11. OpenSaturation Voltage vs. Output Current

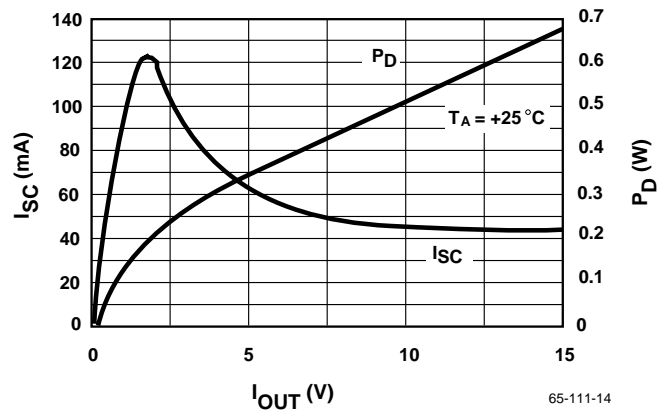


Figure 12. Short Circuit Current, Power Dissipation vs. Output Voltage

Typical Performance Characteristics (continued)

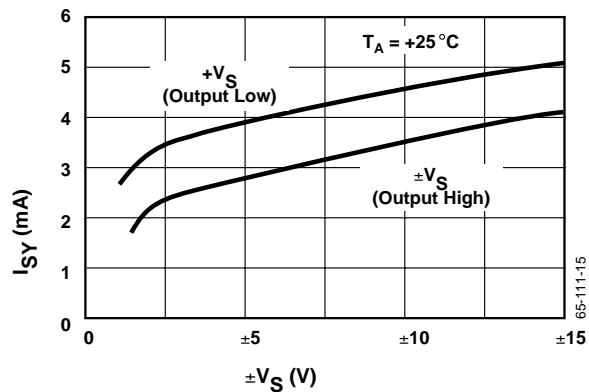


Figure 13. Supply Current vs. Supply Voltage

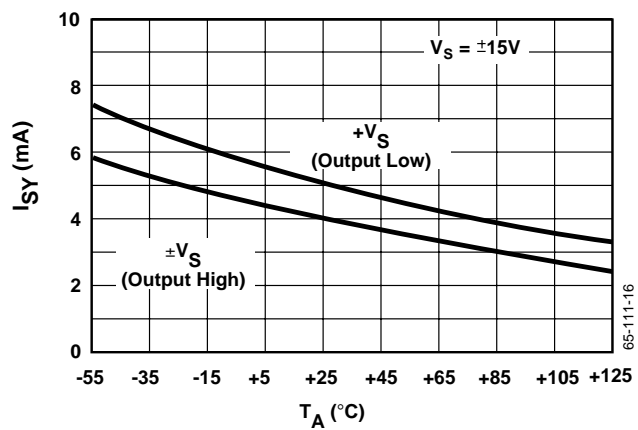


Figure 14. Supply Current vs. Temperature

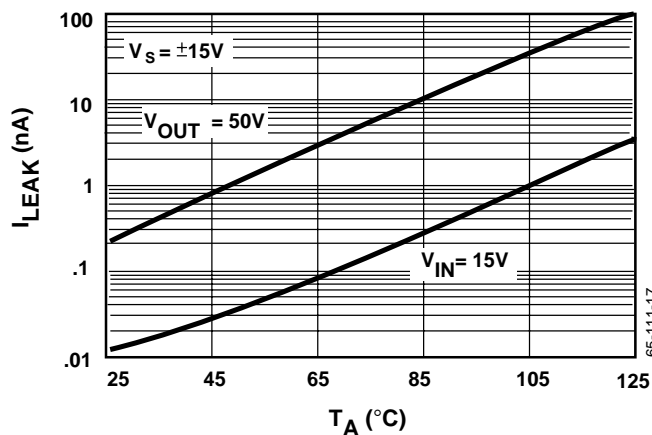


Figure 15. Leakage Current vs. Temperature

Notes:

Notes:


Mechanical Dimensions

8-Lead Ceramic DIP

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	—	.200	—	5.08	
b1	.014	.023	.36	.58	8
b2	.045	.065	1.14	1.65	2, 8
c1	.008	.015	.20	.38	8
D	—	.405	—	10.29	4
E	.220	.310	5.59	7.87	4
e	.100 BSC		2.54 BSC		5, 9
eA	.300 BSC		7.62 BSC		7
L	.125	.200	3.18	5.08	
Q	.015	.060	.38	1.52	3
s1	.005	—	.13	—	6
α	90°	105°	90°	105°	

Notes:

1. Index area: a notch or a pin one identification mark shall be located adjacent to pin one. The manufacturer's identification shall not be used as pin one identification mark.
2. The minimum limit for dimension "b2" may be .023 (.58mm) for leads number 1, 4, 5 and 8 only.
3. Dimension "Q" shall be measured from the seating plane to the base plane.
4. This dimension allows for off-center lid, meniscus and glass overrun.
5. The basic pin spacing is .100 (2.54mm) between centerlines. Each pin centerline shall be located within $\pm .010$ (.25mm) of its exact longitudinal position relative to pins 1 and 8.
6. Applies to all four corners (leads number 1, 4, 5, and 8).
7. "eA" shall be measured at the center of the lead bends or at the centerline of the leads when " α " is 90°.
8. All leads – Increase maximum limit by .003 (.08mm) measured at the center of the flat, when lead finish applied.
9. Six spaces.

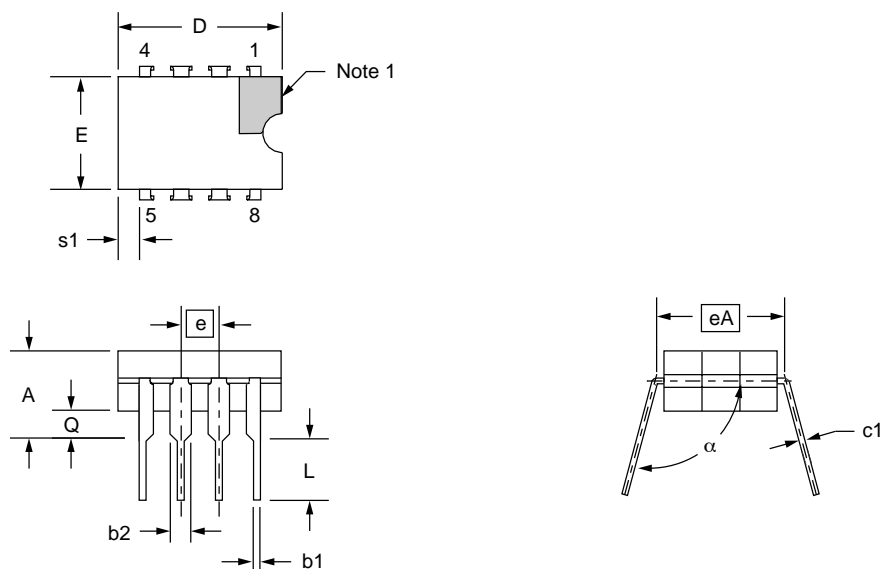


Mechanical Dimensions (continued)

16-Lead Ceramic DIP

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	—	.200	—	5.08	
b1	.014	.023	.36	.58	8
b2	.050	.065	1.27	1.65	2
c1	.008	.015	.20	.38	8
D	.745	.840	18.92	21.33	4
E	.220	.310	5.59	7.87	4
e	.100 BSC		2.54 BSC		5, 9
eA	.300 BSC		7.62 BSC		7
L	.115	.160	2.92	4.06	
Q	.015	.060	.38	1.52	3
s1	.005	—	.13	—	6
α	90°	105°	90°	105°	



Notes:

1. Index area: a notch or a pin one identification mark shall be located adjacent to pin one. The manufacturer's identification shall not be used as pin one identification mark.
2. The minimum limit for dimension "b2" may be .023 (.58mm) for leads number 1, 8, 9 and 16 only.
3. Dimension "Q" shall be measured from the seating plane to the base plane.
4. This dimension allows for off-center lid, meniscus and glass overrun.
5. The basic pin spacing is .100 (2.54mm) between centerlines. Each pin centerline shall be located within $\pm .010$ (.25mm) of its exact longitudinal position relative to pins 1 and 16.
6. Applies to all four corners (leads number 1, 8, 9, and 16).
7. "eA" shall be measured at the center of the lead bends or at the centerline of the leads when " α " is 90°.
8. All leads – Increase maximum limit by .003 (.08mm) measured at the center of the flat, when lead finish applied.
9. Fourteen spaces.

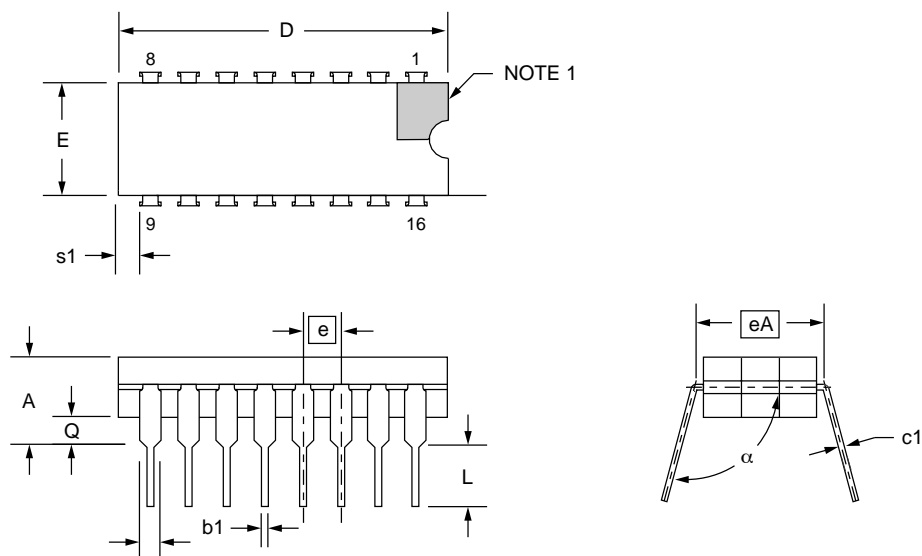

Mechanical Dimensions (continued)

8-Lead Metal Can (TO-99)

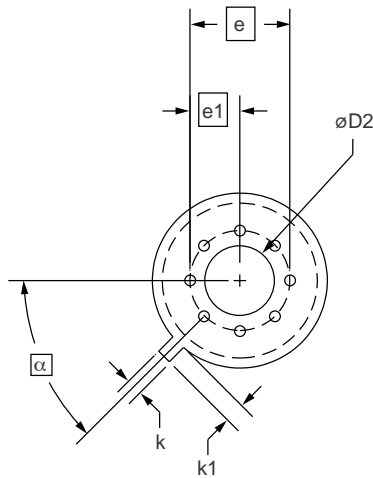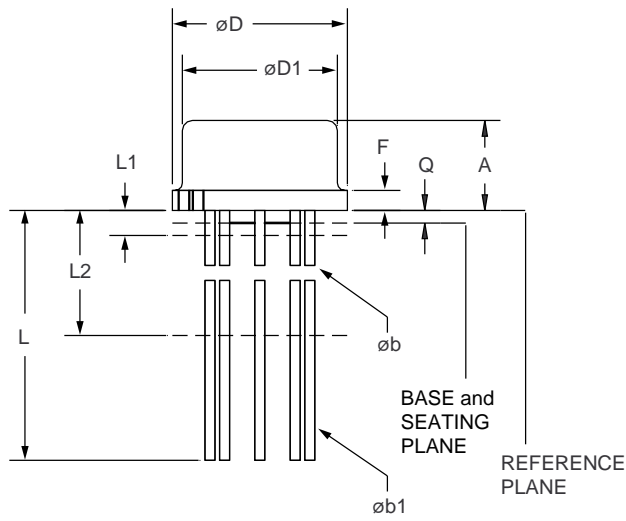

Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	.165	.185	4.19	4.70	
ϕb	.016	.019	.41	.48	1, 5
$\phi b1$.016	.021	.41	.53	1, 5
ϕD	.335	.375	8.51	9.52	
$\phi D1$.305	.335	7.75	8.51	
$\phi D2$.110	.160	2.79	4.06	
e	.200 BSC		5.08 BSC		
e1	.100 BSC		2.54 BSC		
F	—	.040	—	1.02	
k	.027	.034	.69	.86	
k1	.027	.045	.69	1.14	2
L	.500	.750	12.70	19.05	1
L1	—	.050	—	1.27	1
L2	.250	—	6.35	—	1
Q	.010	.045	.25	1.14	
α	45° BSC		45° BSC		

Notes:

1. (All leads) ϕb applies between L1 & L2. $\phi b1$ applies between L2 & .500 (12.70mm) from the reference plane. Diameter is uncontrolled in L1 & beyond .500 (12.70mm) from the reference plane.
2. Measured from the maximum diameter of the product.
3. Leads having a maximum diameter .019 (.48mm) measured in gauging plane, .054 (1.37mm) +.001 (.03mm) -.000 (.00mm) below the reference plane of the product shall be within .007 (.18mm) of their true position relative to a maximum width tab.
4. The product may be measured by direct methods or by gauge.
5. All leads – increase maximum limit by .003 (.08mm) when lead finish is applied.

Ordering Information

Part Number	Package	Operating Temperature Range
LM111T/883B	8-Lead Metal Can (TO-99)	-55°C to +125°C
LM111D/883B	8-Lead Ceramic DIP	-55°C to +125°C
LH2111D	16-Lead Ceramic DIP	-55°C to +125°C
LH2111D/883B	16-Lead Ceramic DIP	-55°C to +125°C

Note:

1. /883 B suffix denotes MIL-STD-883, Level B processing

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.