

# ASSP Communication Control

CMOS

# FAST-20 SCSI Protocol Controller

## MB86606

### ■ DESCRIPTION

The MB86606 is an intelligent SCSI protocol controller (SPC) conforming to the ANSI (FAST-20) standard and integrating a PCI local bus interface function. The specification of SCSI controller block is based on the MB86605's one which is a Wide SCSI protocol controller, but the device functions/features to achieve the FAST-20 data transfer rate of maximum 40 Mbyte/sec at 16-bit FAST-20 SCSI, such as the size of internal data register FIFO, are larged on the MB86606. As for the SCSI bus pins, a totem pole type single-ended driver/receiver is incorporated in the device so that it can drive the SCSI bus directly. Furthermore, the MB86606 is capable of connecting the external differential type driver/receiver.

The SCSI bus sequence is controlled by commands issued via the system interface. So, it supports sequential commands that perform the phase-to-phase sequences to reduce the overhead of system's sequence operations.


As another key feature to reduce the system overhead, the device has a 2 Kbytes user program memory to store the user program with the commands. Due to this, all the SCSI bus sequences including the data transfer can be performed automatically.

As the system interface block, it incorporates a 32-bit PCI local bus interface that easily realizes the SCSI interface on the motherboards of PCI bus based PCs and WSs, in addition to a 16-bit separate MPU and DMA buses. For the on-chip PCI bus interface, the MB86606 also incorporates a 32-bit DMA controller that is capable of supporting the scatter-gather function so that the data transfers can be controlled by both user program and the host system.

The device is fabricated by the advanced CMOS process and is housed in an 144-pin plastic Shrink Quad Flat Package (Suffix: -PMT).

### ■ PACKAGE

144 pin, Plastic SQFP



(FPT-144P-M05)

# MB86606

## ■ FEATURES

SCSI Protocol Controller Block:

- Operable as initiator and target
- WIDE and FAST-20 data transfers
  - Synchronous transfer (max. 40 Mbytes/s: Up to 256 offset values can be set.)
  - Asynchronous transfer (max. 10 Mbytes/s)
- 512-byte FIFO register for data phase
- Two types (send-only and receive-only) of 32-byte data buffers for message, command, and status phases (MCS Buffers)
- On-chip totem pole type SCSI single-ended driver/receiver
- Supports external SCSI differential driver/receiver connectivity
- On-chip memory to store transfer parameters for each ID (up to 15 connected devices)
- On-chip 16-bit transfer block counter and 24-bit transfer byte counter
  - Maximum Transfer Byte : 1 Tbyte at fixed length data transfer
  - : 16 Mbyte at variable length data transfer
- Supports various control commands:
  - Sequential Commands : can perform phase-to-phase sequential operations (functions only when issuing from a system side.)
  - Discrete Commands : can perform any desired sequence to program in the user program memory
  - Data Transfer Commands : can program the transfer data length at the user program operation.
- On-chip direct control register for SCAM (SCSI Configured AutoMatically) Level-1 Protocol
- Supports Multi Selection/Reselection Responses
  - Selection and Reselection responses can be done to plural IDs.
- On-chip 2 Kbyte User Program Memory
  - Two Modes : 2 Kbyte × 1 bank and 1 Kbyte × 2 banks
    - (While 1 Kbyte × 2 banks are selected, host system can access another bank even if the user program is executing.)
  - Access to User program : Burst transfer via I/O access port
    - : Direct access to 2 Kbyte user program memory (only for PCI bus I/F mode)
- User Selectable Interrupt Report
  - Unnecessary interrupt reports can be disabled depending on user's applications to reduce a system ISR overhead.
- Two automatic receive modes
  - Initiator : can automatically receive information for new phase to which target switched
  - Target : can automatically receive attention condition generated by initiator
- Automatic selection/reselection
  - For command issues : automatically performs to receive MSG/CMD to the selection/reselection request from partner device
  - For user program operation : pauses the program currently executed and automatically jumps to the specified selection /reselection routine in response to the selection/reselection request from partner device.
- Operation Clock
  - System Clock: Max. 40 MHz
  - Internal Processor Operating Clock: Max. 20 MHz

*(Continued)*

(Continued)

System Interface Block:

- Separate MPU and DMA buses called 16-bit Bus Mode
  - Directly connectable to 68-series or 80-series MPU
  - Two transfer modes (Program transfer and DMA transfer (slave mode))
- PCI Bus Interface Mode
  - Directly connectable to the 32-bit PCI local bus.
  - On-chip 32-bit DMAC for PCI bus master
  - Supports the PERR&SERR function
  - Supports the INTA# Interrupt Signals
  - Max. 64 bytes burst transfer
  - PCI system clock: Max. 33 MHz
- Data Bus Parity and Address Bus Parity (only for PCI bus interface mode) generation/check function


Others

- Compact 144-Pin Plastic Shrink Quad Flat Package (SQFP, Package Suffix: -PMT)
- Pin compatible with MB86605
- Supply Voltage: 5V ± 5%


# MB86606

## ■ PIN ASSIGNMENT

- 16-Bit Bus Mode

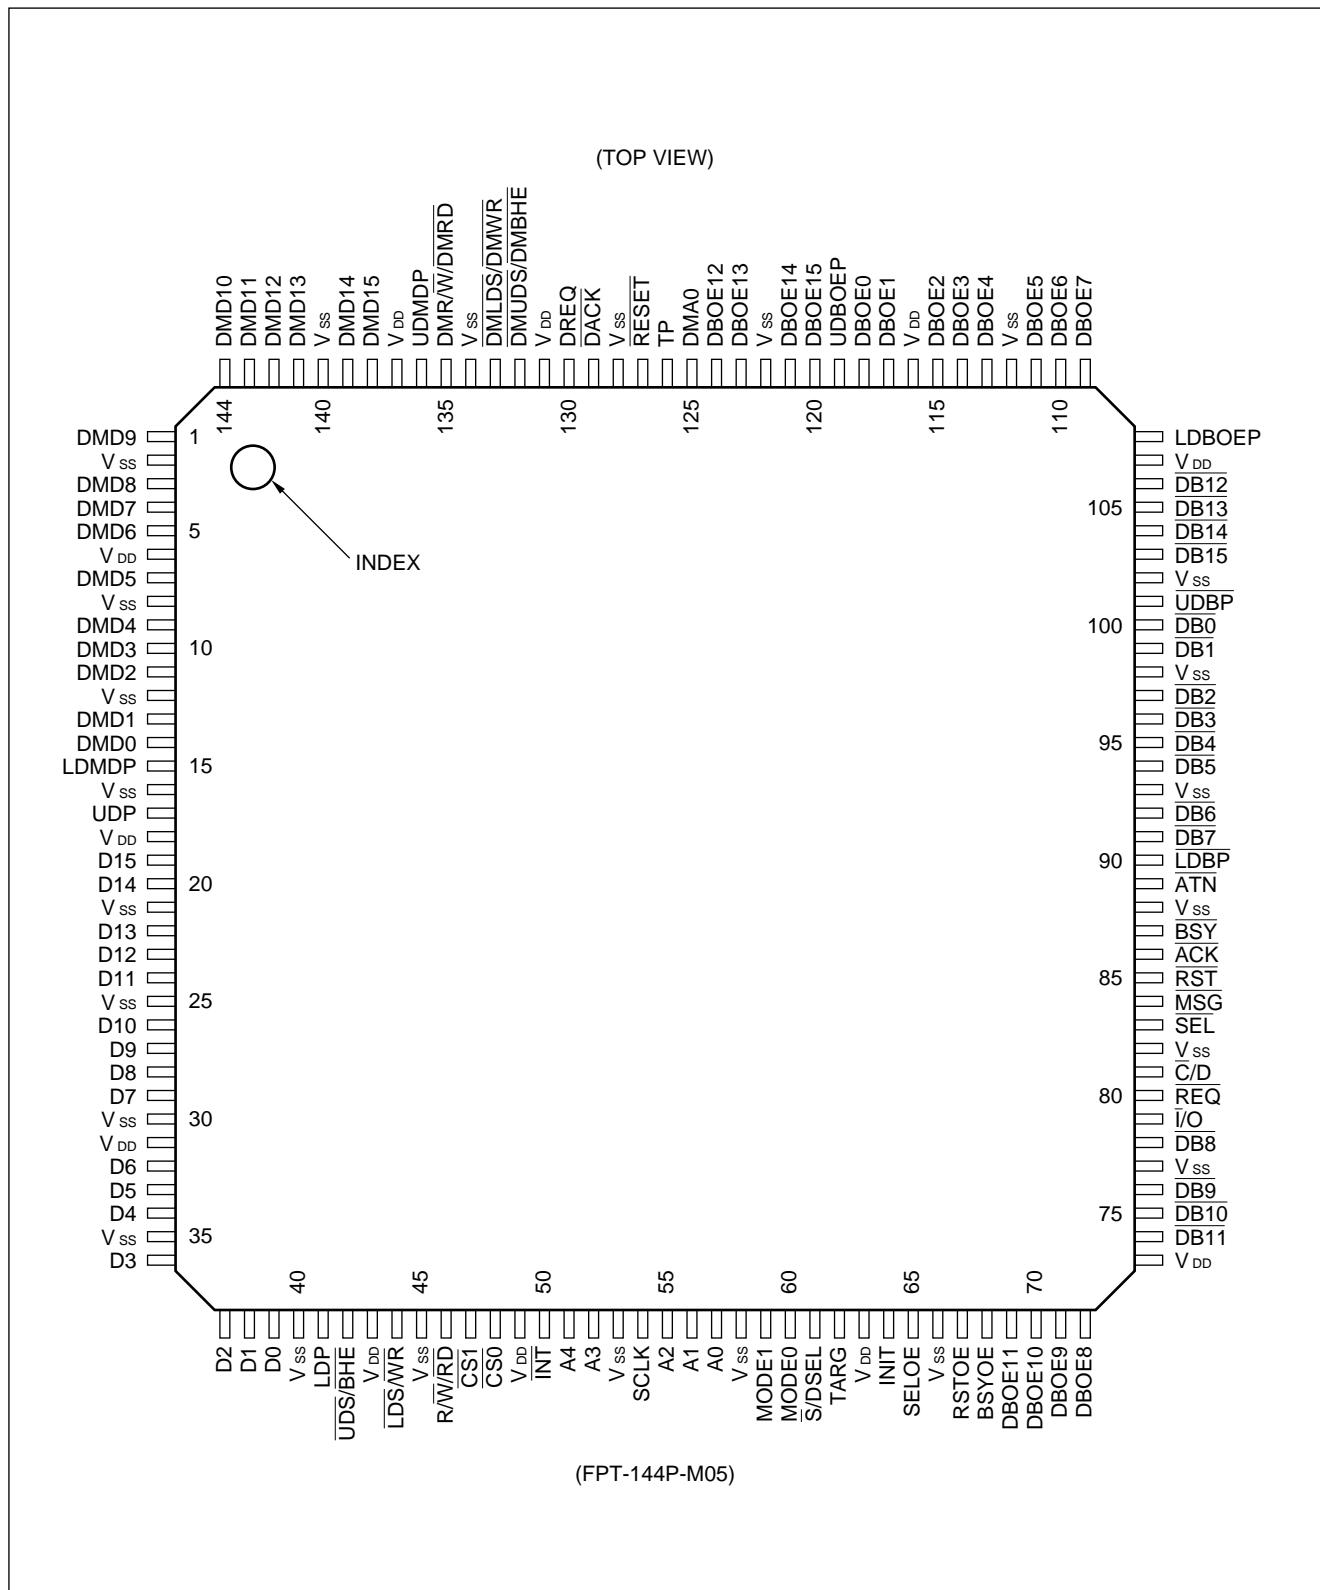

- PCI Bus Interface Mode

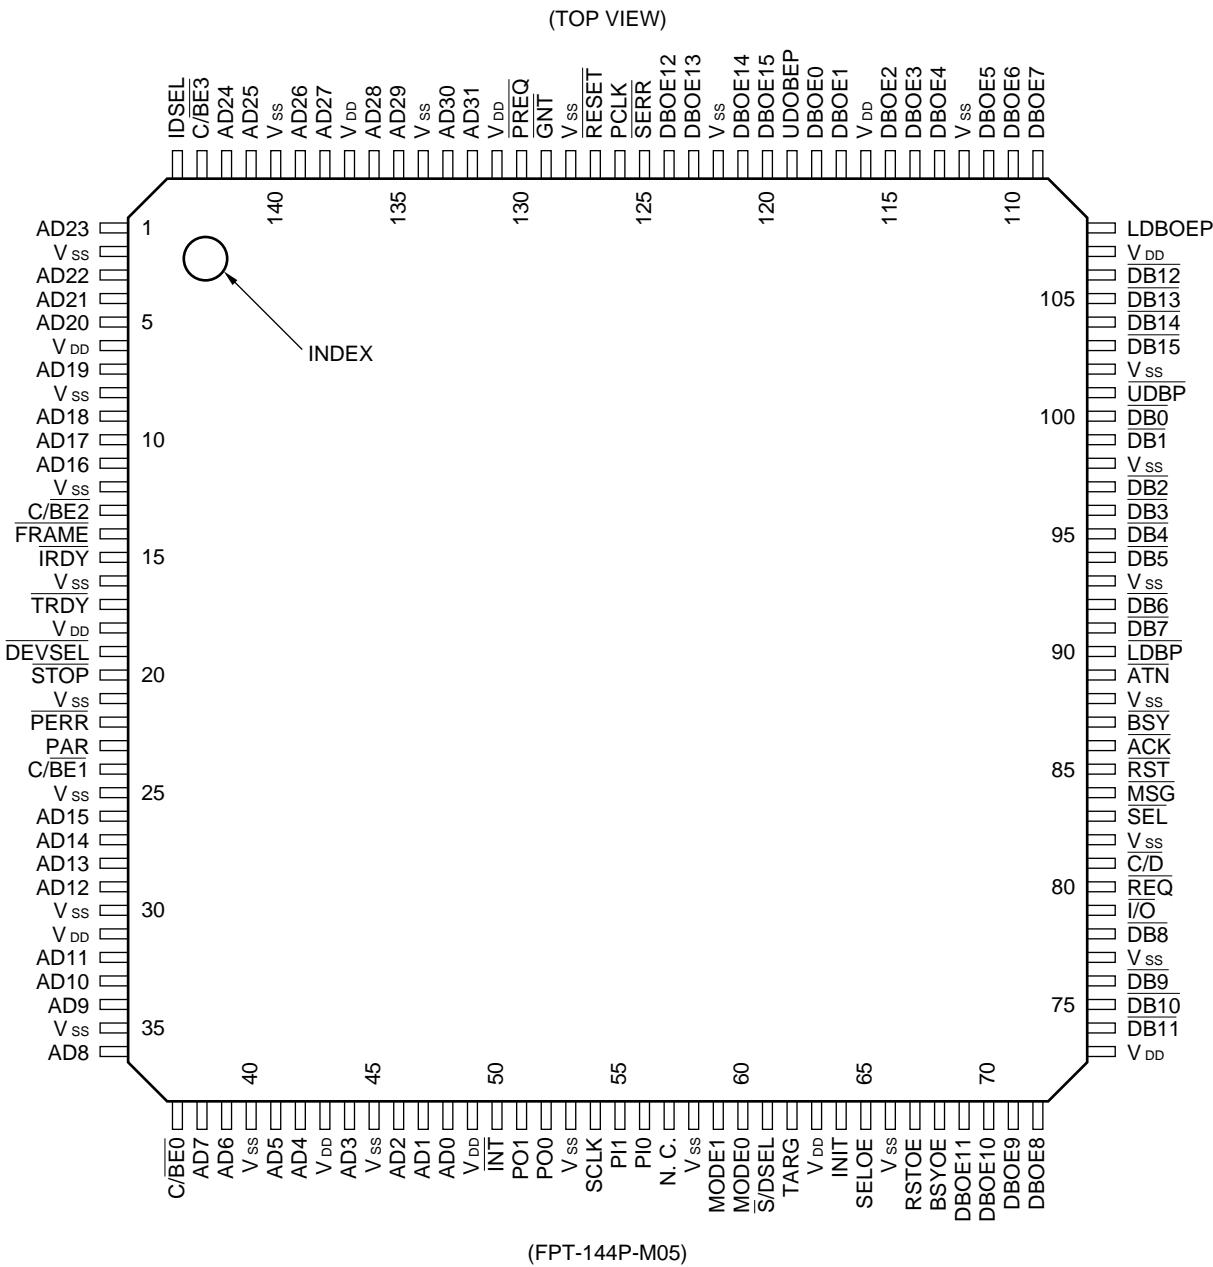

# MB86606

## ■ PIN LIST

Pin no.	16-bit bus mode				PCI bus I/F mode		Pin no.	16-bit bus mode				PCI bus I/F mode		
	Mode 0 (68 I/F)		Mode 1 (80 I/F)		Mode 3 (PCI I/F)			Mode 0 (68 I/F)		Mode 1 (80 I/F)		Mode 3 (PCI I/F)		
	I/O	Pin name	I/O	Pin name	I/O	Pin name		I/O	Pin name	I/O	Pin name	I/O	Pin name	
1	I/O	DMD9			I/O	AD23	31	—	VDD					
2	—	Vss					32	I/O	D6			I/O	AD11	
3	I/O	DMD8			I/O	AD22	33	I/O	D5			I/O	AD10	
4	I/O	DMD7			I/O	AD21	34	I/O	D4			I/O	AD9	
5	I/O	DMD6			I/O	AD20	35	—	Vss					
6	—	VDD					36	I/O	D3			I/O	AD8	
7	I/O	DMD5			I/O	AD19	37	I/O	D2			I/O	C/BE0	
8	—	Vss					38	I/O	D1			I/O	AD7	
9	I/O	DMD4			I/O	AD18	39	I/O	D0			I/O	AD6	
10	I/O	DMD3			I/O	AD17	40	—	Vss					
11	I/O	DMD2			I/O	AD16	41	I/O	LDP			I/O	AD5	
12	—	Vss					42	I	UDS	I	BHE	I/O	AD4	
13	I/O	DMD1			I/O	C/BE2	43	—	VDD					
14	I/O	DMD0			I/O	FRAME	44	I	LDS	I	WR	I/O	AD3	
15	I/O	LDMDP			I/O	IRDY	45	—	Vss					
16	—	Vss					46	I	R/W	I	RD	I/O	AD2	
17	I/O	UDP			I/O	TRDY	47	I	CS1			I/O	AD1	
18	—	VDD					48	I	CS0			I/O	AD0	
19	I/O	D15			I/O	DEVSEL	49	—	VDD					
20	I/O	D14			I/O	STOP	50	/OD	INT					
21	—	Vss					51	I	A4		O	PO1		
22	I/O	D13			I/O	PERR	52	I	A3		O	PO0		
23	I/O	D12			I/O	PAR	53	—	Vss					
24	I/O	D11			I/O	C/BE1	54	I	SCLK					
25	—	Vss					55	IU	A2		IU	PI1		
26	I/O	D10			I/O	AD15	56	IU	A1		IU	PI0		
27	I/O	D9			I/O	AD14	57	IU	A0		IU	N.C.		
28	I/O	D8			I/O	AD13	58	—	Vss					
29	I/O	D7			I/O	AD12	59	I	MODE1					
30	—	Vss					60	I	MODE2					

(Continued)

(Continued)

Pin no.	16-bit bus mode				PCI bus I/F mode		Pin no.	16-bit bus mode				PCI bus I/F mode		
	Mode 0 (68 I/F)		Mode 1 (80 I/F)		Mode 3 (PCI I/F)			Mode 0 (68 I/F)		Mode 1 (80 I/F)		Mode 3 (PCI I/F)		
	I/O	Pin name	I/O	Pin name	I/O	Pin name		I/O	Pin name	I/O	Pin name	I/O	Pin name	
61	I	SDSEL					91	I/O	DB7					
62	O	TARG					92	I/O	DB6					
63	—	VDD					93	—	Vss					
64	O	INIT					94	I/O	DB5					
65	O	SELOE					95	I/O	DB4					
66	—	Vss					96	I/O	DB3					
67	O	RSTOE					97	I/O	DB2					
68	O	BSYOE					98	—	Vss					
69	O	DBOE11					99	I/O	DB1					
70	O	DBOE10					100	I/O	DB0					
71	O	DBOE9					101	I/O	UDBP					
72	O	DBOE8					102	—	Vss					
73	—	VDD					103	I/O	DB15					
74	I/O	DB11					104	I/O	DB14					
75	I/O	DB10					105	I/O	DB13					
76	I/O	DB9					106	I/O	DB12					
77	—	Vss					107	—	VDD					
78	I/O	DB8					108	O	LDBOEP					
79	I/O	I/O					109	O	DBOE7					
80	I/O	REQ					110	O	DBOE6					
81	I/O	C/D					111	O	DBOE5					
82	—	Vss					112	—	Vss					
83	I/O	SEL					113	O	DBOE4					
84	I/O	MSG					114	O	DBOE3					
85	I/O	RST					115	O	DBOE2					
86	I/O	ACK					116	—	VDD					
87	I/O	BSY					117	O	DBOE1					
88	—	Vss					118	O	DBOE0					
89	I/O	ATN					119	O	UDBOEP					
90	I/O	LDBP					120	O	DBOE15					

(Continued)

# MB86606

(Continued)

Pin no.	16-bit bus mode				PCI bus I/F mode		Pin no.	16-bit bus mode				PCI bus I/F mode		
	Mode 0 (68 I/F)		Mode 1 (80 I/F)		Mode 3 (PCI I/F)			Mode 0 (68 I/F)		Mode 1 (80 I/F)		Mode 3 (PCI I/F)		
	I/O	Pin name	I/O	Pin name	I/O	Pin name		I/O	Pin name	I/O	Pin name	I/O	Pin name	
121	O	DBOE14				133	I	DMLDS	I	DMWR	I/O	AD30		
122	—	Vss				134	—	Vss						
123	O	DBOE13				135	I	DMR/W	I	DMRD	I/O	AD29		
124	O	DBOE12				136	I/O	UDMDP			I/O	AD28		
125	I	DMA0		OD	SERR	137	—	VDD						
126	I	TP		I	PCLK	138	I/O	DMD15			I/O	AD27		
127	I	RESET				139	I/O	DMD14			I/O	AD26		
128	—	Vss				140	—	Vss						
129	I	DACK		I	GNT	141	I/O	DMD13			I/O	AD25		
130	O	DREQ		O	PREQ	142	I/O	DMD12			I/O	AD24		
131	—	VDD				143	I/O	DMD11			I/O	C/BE3		
132	I	DMUDS	I	DMBHE	I/O	AD31	144	I/O	DMD10			I	IDSEL	

I : Input pin

O : Output pin

I/O : Input/Output pin

IU : Input pin with pull-up resistor

OD : Open-drain output pin

## ■ PIN DESCRIPTION

### 1. SCSI Interface

Pin no.	Pin name	I/O	Function
84, 81 89, 79	MSG, C/D ATN, I/O	I/O	<p>These are the SCSI control signal input and output pins.</p> <p>They can be connected directly to a single-ended SCSI connector.</p> <p>Either open-drain or totem pole output can be selected.</p>
80, 86	REQ, ACK	I/O	<p>These are the SCSI control signal input and output pins.</p> <p>They can be connected directly to a single-ended SCSI connector.</p> <p>The output buffer is the totem pole type.</p>
68 65 67	BSYOE SELOE RSTOE	O	<p>These are used for output control of SCSI control signals.</p> <p>They should be used as control signals for the external differential driver/receiver circuit.</p>
87 83 85	BSY SEL RST	I/O	<p>These are the SCSI control signal input and output pins.</p> <p>They can be connected directly to a single-ended SCSI connector.</p> <p>The output buffer is the open-drain type.</p>
120, 121, 123, 124, 69 to 72 119 109 to 111, 113 to 115, 117, 118 108	DBOE15 to DBOE8 UDBOEP DBOE7 to DBOE0 LDBOEP	O	<p>These are used for output control of SCSI data bus signals.</p> <p>They should be used as control signals for the external differential driver/receiver circuit.</p>
103 to 106, 74 to 76, 78 101 91, 92, 94 to 97, 99, 100 90	DB15 to DB8 UDBP DB7 to DB0 LDBP	I/O	<p>These are used to input and output SCSI data bus signals.</p> <p>They can be connected directly to a single-ended SCSI connector.</p> <p>Either open-drain or totem pole output buffer can be selected.</p>
64 62	INIT TARG	O	<p>These are used to output signals indicating the chip operating status.</p> <p>They should be used as control signals for the external differential driver/receiver circuit.</p>
61	/DESL	I	<p>This is used to input signal for selecting the chip operation mode.</p> <p>Single-ended: Input 0 Differential-ended: Input 1</p> <p>While 0 is input to this pin, all the SCSI control signals, data bus output control signals, INIT, and TARG signals are fixed with L level.</p>
54	SCLK	I	This pin is used for a system clock input for SCSI protocol controller block. (Max. 40 MHz)

# MB86606

## 2. 16-Bit Bus Mode-MPU Interface

Pin no.	Pin name	I/O	Function
48	$\overline{CS0}$	I	This is used to input signals for the MPU to select the SPC as the I/O device.
47	$\overline{CS1}$	I	This is used to input select signals (external circuit select signals) for the MPU to input and output the DMA data bus data via the SPC.
19, 20, 22 to 24, 26 to 28 17	D15 to D8 UDP	I/O	Upper byte and parity of data bus When $\overline{CS0}$ input valid: I/O ports for internal registers in SPC When $\overline{CS1}$ input valid: I/O ports for DMA bus data
29, 32 to 34, 36 to 39 41	D7 to D0 LDP	I/O	Lower byte and parity of data bus When $\overline{CS0}$ input valid: I/O ports for internal registers in SPC When $\overline{CS1}$ input valid: I/O ports for DMA bus data
51, 52, 55 to 57	A4 to A0	IU	These are used to input addresses for selecting the Internal registers.
46	$\overline{RD}$ (R/W)	I	In 80-series mode: This is used to input the read strobe signal for reading data from the SPC to the MPU. In 68-series mode: This is used to input the R/W control signal for reading and writing data from the MPU to the SPC.
44	$\overline{WR}$ (LDS)	I	In 80-series mode: This is used to input the write strobe signal for writing data from the MPU to the SPC. In 68-series mode: This is used to input the LDS signal output by the MPU when the lower byte of the data bus is valid.
42	$\overline{BHE}$ (UDS)	I	In 80-series mode: This is used to input the BHE signal output by the MPU when the upper byte of the data bus is valid. In 68-series mode: This is used to input the UDS signal output by the MPU when the upper byte of the data bus is valid.

### 3. 16-Bit Bus Mode – DMA Interface

Pin no.	Pin name	I/O	Function
130	DREQ	O	This is used to output DMA transfer request signals to the DMAC. DMA data transfer between the SPC and memory is requested.
129	DACK	I	This is used to input DMA-enabling signals from the DMAC. When the DMA enabling signal is active, DMA reading and writing are executed.
138, 139, 141 to 144, 1, 3 136	DMD15 to 8 UDMDP	I/O	Upper byte and parity of DMA data bus When CS1 input valid: The MPU data bus is directly connected. When 80-series mode: The 2nd data is input/output. When 68-series mode: The 1st data is input/output.
4, 5, 7, 9 to 11, 13, 14 15	DMD7 to 0 LDMDP	I/O	Lower byte and parity of DMA data bus When CS1 input valid: The MPU data bus is directly connected. When 80-series mode: The 1st data is input/output. When 68-series mode: The 2nd data is input/output.
135	DMRD (DMR/W)	I	In 80-series mode: This is used to input the <u>IORD</u> or <u>RD</u> signal for outputting data from the SPC to the DMA bus. In 68-series mode: This is used to input the <u>R/W</u> control signal for outputting and inputting data from the DMAC to the SPC.
133	DMWR (DMLDS)	I	In 80-series mode: This is used to input the <u>IOWR</u> or <u>WR</u> signal for inputting data from the DMA bus to the SPC. In 68-series mode: This is used to input the <u>LDS</u> signal output by the DMAC when the lower byte of the DMA data bus is valid.
132	DMBHE (DMUDS)	I	In 80-series mode: This is used to input the <u>BHE</u> signal output by the DMAC when the upper byte of the DMA data bus is valid. In 68-series mode: This is used to input the <u>UDS</u> signal output by the DMAC when the upper byte of the DMA data bus is valid.
125	DMA0	I	This is used to input the address data A0 signal output by the DMAC in the 80-series mode. In 68-series mode: Connect to power supply pin (VDD).
126	TP (Transfer permission)	I	This is used to input DMA-transfer-enabling signals. When the TP signal is active, the SPC performs the DMA transfer. When this signal becomes inactive during DMA transfer, the transfer stops temporarily at the block boundary.

# MB86606

## 4. PCI Bus Interface Mode

Pin no.	Pin name	I/O	Function
130	PREQ	O	This pin is used to request the bus arbiter for use of the bus.
129	GNTR	I	This is the response signal input pin to the REQ signal from the bus arbiter.
132, 133, 135, 136, 138, 139, 141, 142, 1, 3 to 5, 7, 9 to 11, 26 to 29, 32 to 34, 36, 38, 39, 41, 42, 44, 46 to 48	AD31 to AD0	I/O	PCI 32-bit address and data multiplexed pins
143, 13, 24, 37	C/BE3 to C/BE0	I/O	Bus command and Byte Enable signals multiplexed pins.
23	PAR	I/O	This is an even parity signal pin for the AD31 to AD0 and C/BE3 to C/BE0 signals. This PAR signal becomes valid after one clock.
14	FRAME	I/O	This is a frame signal pin that indicates data are transferring on the bus.
17	TRDY	I/O	Data Ready signal of Target side.
15	IRDY	I/O	Data Ready signal of Initiator (Bus master) side.
20	STOP	I/O	This is a stop request signal to stop the data transfer from target to master.
19	DEVSEL	I/O	Device select pin. While the device is a target, this pin outputs the select signal that indicates the self device is selected. While the device is a master this pin functions as an input pin to indicate that a device on the bus is selected.
144	IDSEL	I	This is a chip select signal that indicates the configuration access.
126	PCLK	I	PCI bus clock input pin. The maximum clock frequency is 33 MHz.
22	PERR	I/O	Data parity error input and output pin.
125	SERR	OD	Address parity error output pin.

## 5. Other Signals

Pin No.	Pin name	I/O	Function															
127	RESET	O	This pin is used to input system reset signals.															
59, 60	MODE1, MODE0	I	<p>These pins are used for setting the device operation mode as listed in the table below.</p> <table border="1"> <thead> <tr> <th>MODE1</th><th>MODE0</th><th>Operation Mode</th></tr> </thead> <tbody> <tr> <td>0</td><td>0</td><td>16-bit bus mode (68 series mode)</td></tr> <tr> <td>0</td><td>1</td><td>16-bit bus mode (80 series mode)</td></tr> <tr> <td>1</td><td>0</td><td>Reserved</td></tr> <tr> <td>1</td><td>1</td><td>PCI bus interface mode</td></tr> </tbody> </table>	MODE1	MODE0	Operation Mode	0	0	16-bit bus mode (68 series mode)	0	1	16-bit bus mode (80 series mode)	1	0	Reserved	1	1	PCI bus interface mode
MODE1	MODE0	Operation Mode																
0	0	16-bit bus mode (68 series mode)																
0	1	16-bit bus mode (80 series mode)																
1	0	Reserved																
1	1	PCI bus interface mode																
50	INT	O/ OD	Interrupt output pin. Either totem pole or open-drain output buffer can be selected. This pin has an internal pull-up resistor.															
6, 18, 31, 43, 49, 63, 73, 107, 116, 131, 137	V <sub>DD</sub>	—	Power supply pin															
2, 8, 12, 16, 21, 25, 30, 35, 40, 45, 53, 58, 66, 77, 82, 88, 93, 98, 102, 112, 122, 128, 134, 140	V <sub>SS</sub>	—	Ground pin															
51, 52	PO1, PO0	O	General purpose output ports that can control the external active SCSI bus terminator etc. Initial signal level on each pin is "L". Those pins are available only for PCI bus interface mode.															
55, 56	PI1, PI0	IU	General purpose input ports. Available only for PCI bus interface mode.															
57	N.C.	—	No connection and unused pins. These pins exist on the only PCI bus mode. These are internally pulled-up, and do not connect to the pins.															

I : Input pin

O : Output pin

I/O : Input and Output pin


OD : Open-drain output pin

IU : Input pin with pull-up resistor


# MB86606

## ■ BLOCK DIAGRAM

### 1. 16-Bit Bus Mode

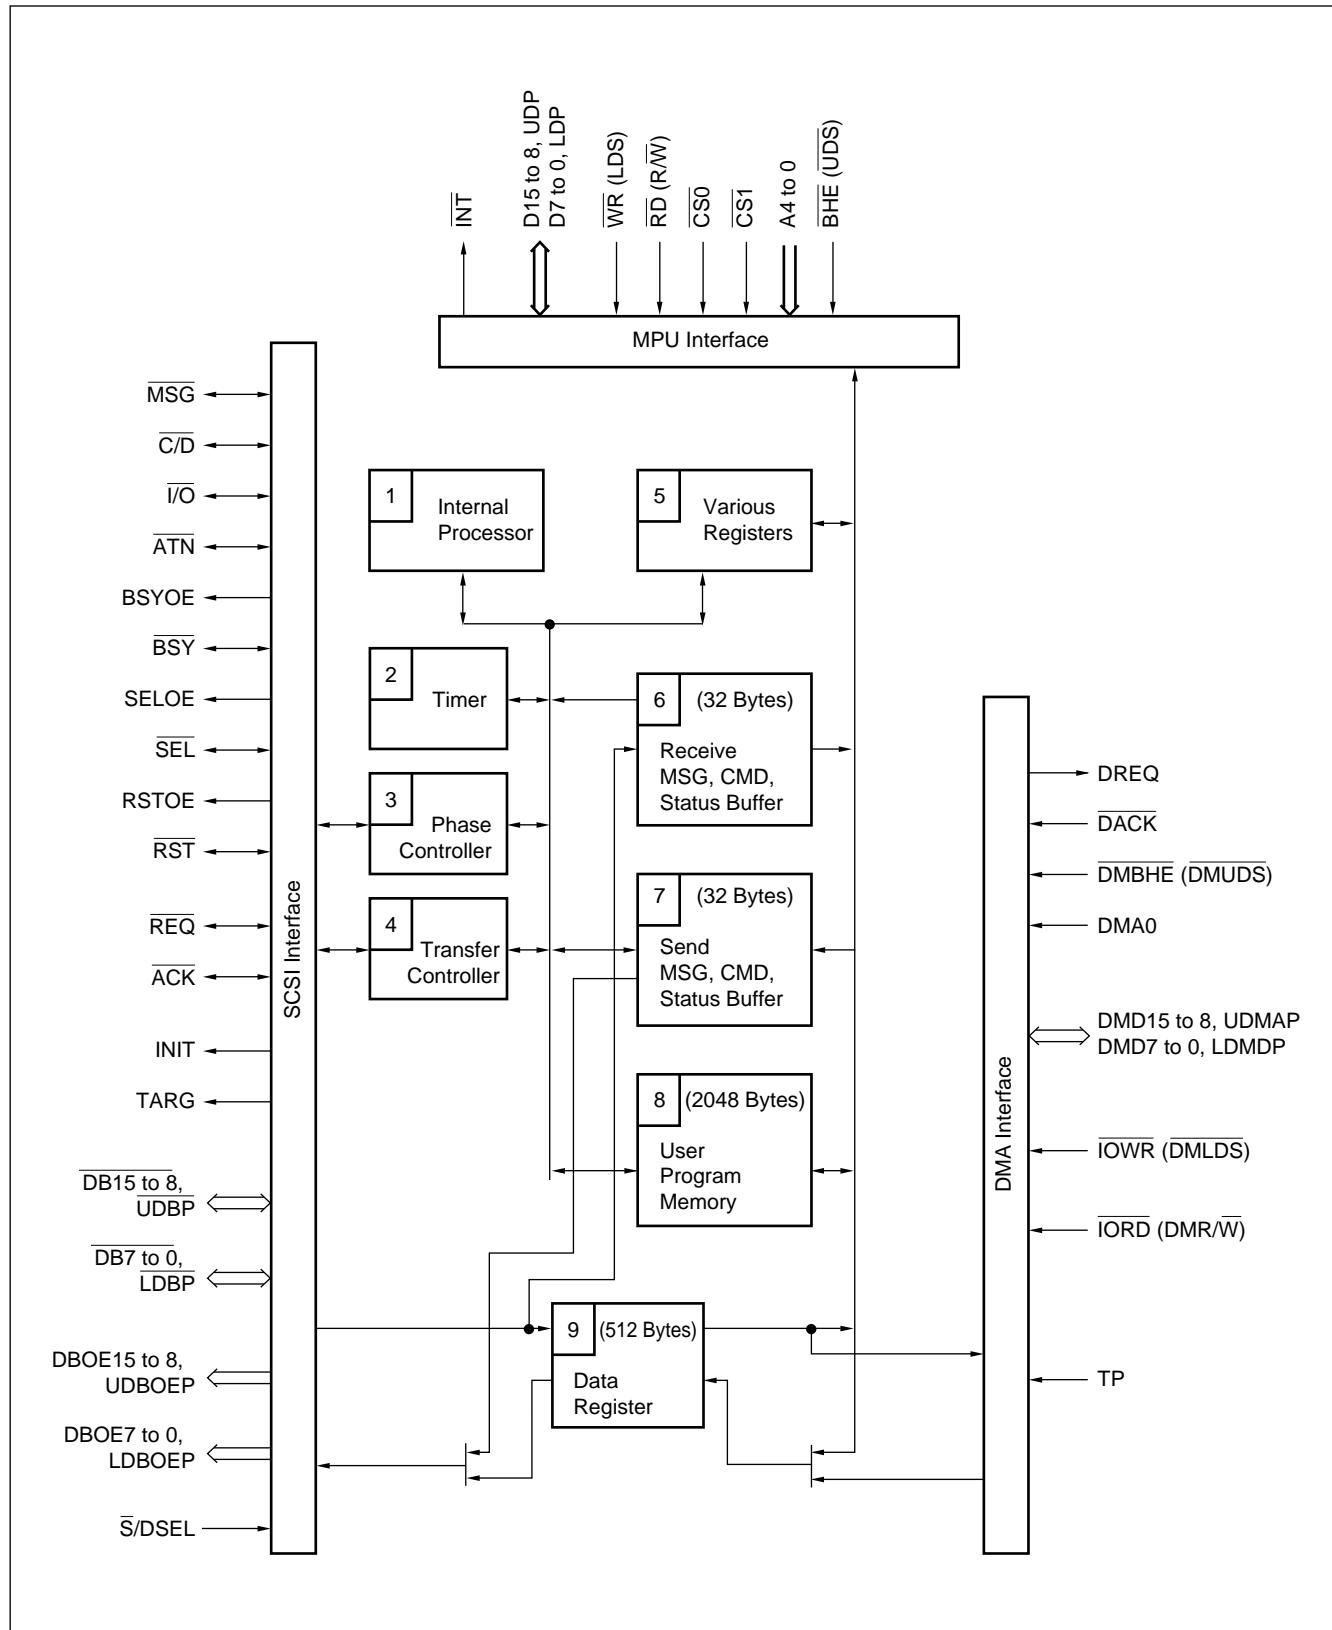

## 2. PCI Bus Interface Mode

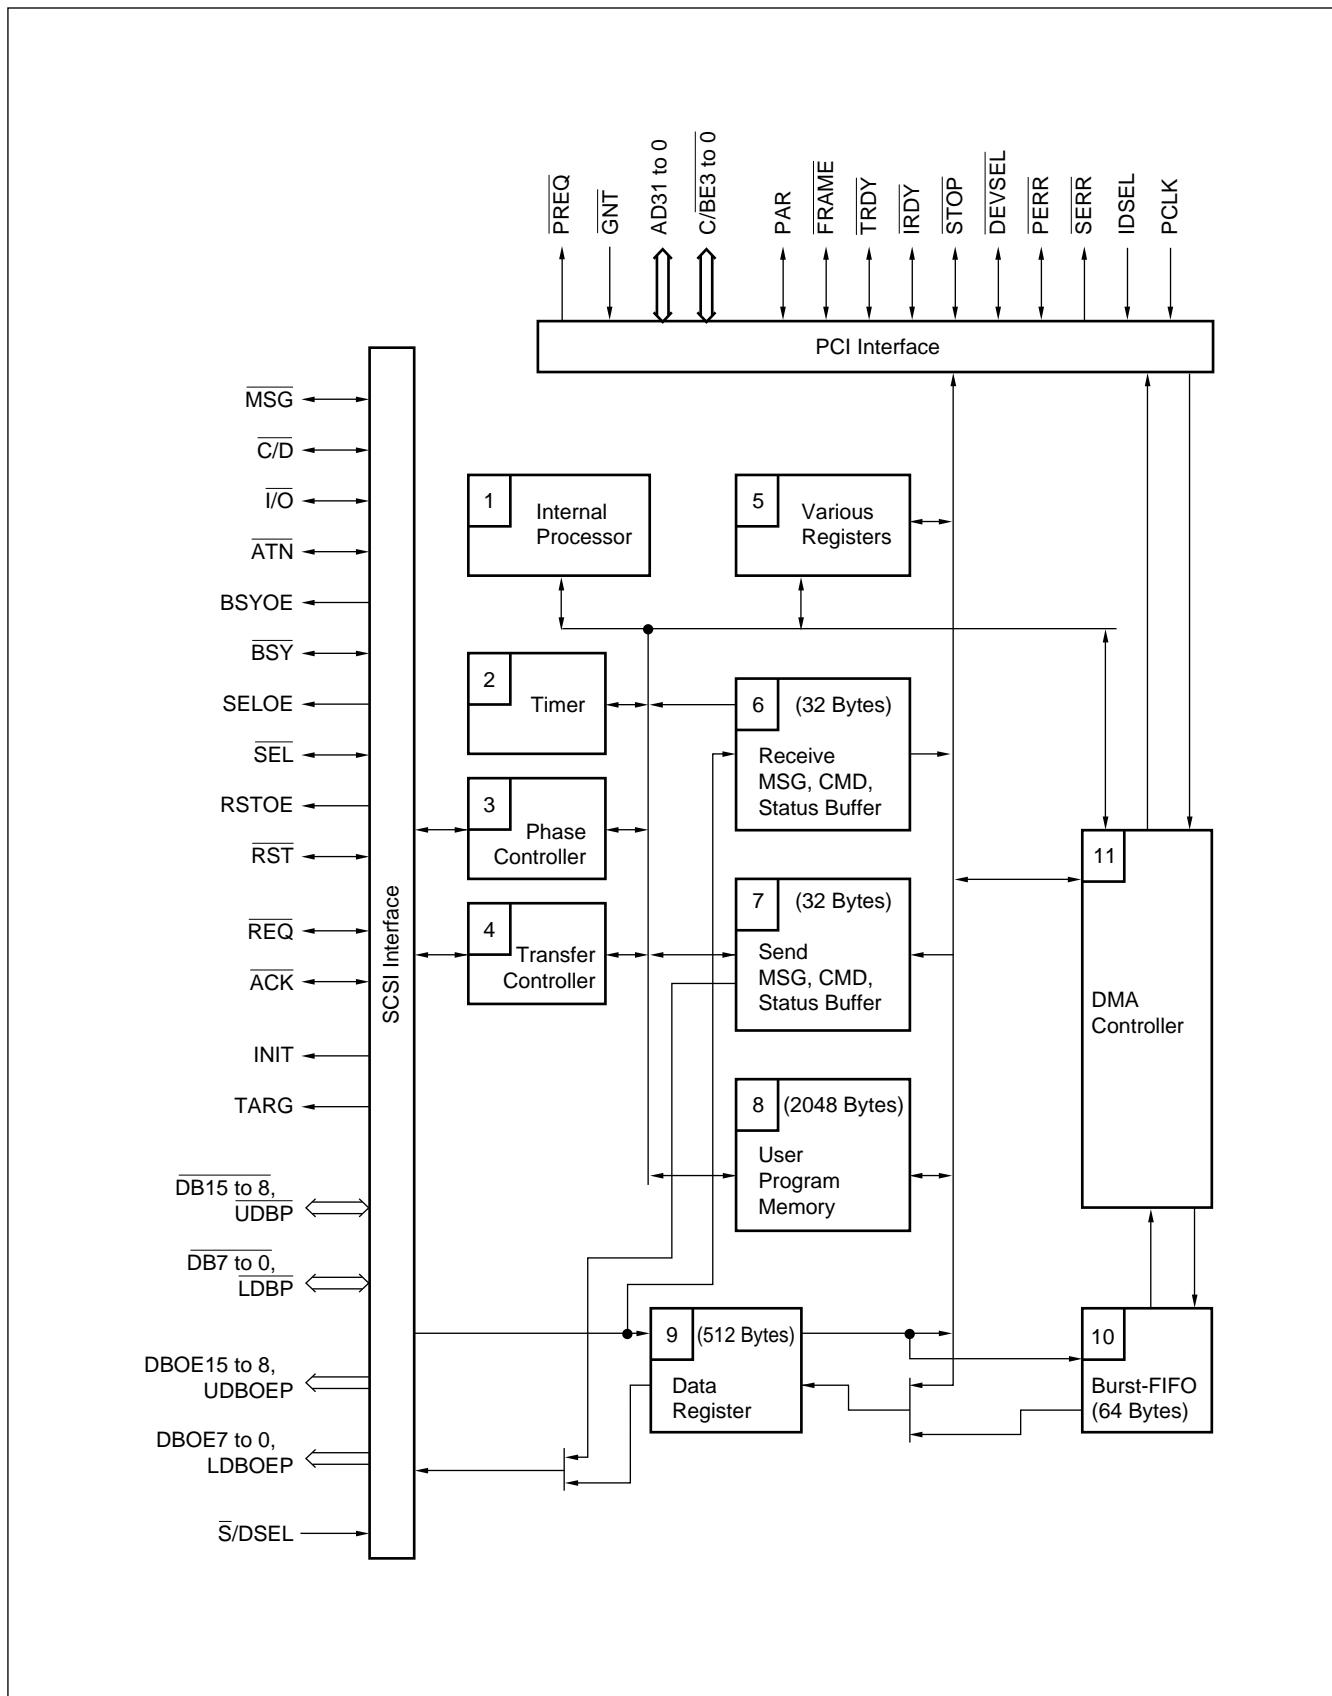

# MB86606

## ■ BLOCK FUNCTIONS

### 1. Internal Processor

This processor provides the sequence control between each phase.

### 2. Timer

This timer manages the time specified by SCSI and the following time:

- REQ/ACK assertion time for data at asynchronous transfer
- Selection/reselection retry time
- Selection/reselection timeout time
- REQ/ACK timeout time during transfer

Asynchronous transfer (target) : Time required for initiator to assert ACK signal after asserting REQ signal

Asynchronous transfer (initiator) : Time required for target to negate REQ signal after asserting ACK signal

Synchronous transfer (target only) : Time required for target to receive ACK signal for setting offset value to 0 from initiator after sending REQ signal

### 3. Phase Controller

This controller controls the arbitration, selection/reselection, data-in/out, command, status, and message-in/out phases executed on the SCSI bus.

### 4. Transfer Controller

This controller controls the information (data, command, status, message) transfer phases executed on the SCSI bus.

There are two types of transfer for executing the information transfer phases.

- Asynchronous transfer : Control by interlocking REQ and ACK signals
- Synchronous transfer : Control with maximum of 32-byte offset value in data-in/out phase

Depending on the data migration, there are the following two modes.

- Program transfer : Performed via MPU interface using data registers
- DMA transfer : Performed via DMA interface using DREQ and  $\overline{DACK}$  pins

At synchronous transfer, the transfer parameters (transfer mode, minimum cycle period of REQ or ACK signal sent from SPC in synchronous transfer, and maximum value between REQ and ACK signals in synchronous transfer) can be saved for each ID and are automatically set when the data phase is started. The transfer byte count is determined by block length  $\times$  number of blocks.

### 5. Various Registers

#### • Command register

This register specifies each command with an 8-bit code.

When using the user program, specify "1" at the Bit 7. The lower 7 bits (Bit 6 to Bit 0) are invalid.

#### • Nexus status register

This register indicates the chip's operating condition, the nexused partner's ID, and data register status.

#### • SCSI control signal status register

This register indicates the status of SCSI control signals.

- **Interrupt status register**

This register indicates the interrupt status with an 8-bit code.

- **Command step register**

This register indicates the execution status of each command with an 8-bit step code.

Error causes can be analyzed by referencing the interrupt status register and this register.

- **Group 6/7 command length setting register**

This register sets the group 6/7 command length not defined in the SCSI standard.

Setting this register determines the group 6/7 command length.

## **6. Receive MSG, CMD, Status Buffer (Receive MCS Buffer)**

This is a 32-byte receive-only information buffer that holds the information for the message, command, and status received from the SCSI bus.

## **7. Send MSG, CMD, Status Buffer (Send MCS Buffer)**

This is a 32-byte send-only information buffer that holds the information for the message, command, and status sent on the SCSI bus.

## **8. User Program Memory**

This is a 2048-byte program memory that stores programmable commands. It can consist of 1024-byte × 2 banks or 2048-byte × 1 bank.

## **9. Data Register**

This is a 512-byte FIFO data register that holds data in the data phase executed on the SCSI bus.

## **10.Burst FIFO**

64-byte FIFO type data buffer to perform burst transfer during the PCI bus interface mode. The device has total 576-byte FIFO with Data Register and Burst FIFO in the PCI bus interface mode.

## **11.DMA Controller**

This is a 32-bit DMA Controller that performs data transfer. This DMAC is a bus master during the PCI bus interface mode.

# MB86606

## ■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min.	Max.	
Supply voltage*	V <sub>DD</sub>	V <sub>SS</sub> -0.5	6.0	V
Input voltage*	V <sub>I</sub>	V <sub>SS</sub> -0.5	V <sub>DD</sub> +0.5	V
Output voltage*	V <sub>O</sub>	V <sub>SS</sub> -0.5	V <sub>DD</sub> +0.5	V
Operating ambient temperature	T <sub>OP</sub>	-25	+85	°C
Storage temperature	T <sub>STG</sub>	-40	+125	°C

\* : The voltages are based on V<sub>SS</sub> (= 0V)

Note: Permanent device damage may occur if the above Absolute Maximum Ratings are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ■ RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Supply voltage*	V <sub>DD</sub>	4.75	5.0	5.25	V
SCSI clock input frequency	f <sub>SCSI</sub>	20.0	—	40.0	MHz
PCI clock input frequency	f <sub>PCI</sub>	—	—	33.0	MHz
Operating temperature	T <sub>A</sub>	0	—	+70	°C

\* : The voltages are based on V<sub>SS</sub> (= 0V)

Note: The recommended operating conditions are the recommended values for assuring normal logic operation of the LSI. Requirements in electrical characteristics (DC and AC characteristics) are assured within the range of the recommended operating conditions.

## ■ ELECTRICAL CHARACTERISTICS

### 1. DC Characteristics

( $V_{DD} = +5 V \pm 5\%$ ,  $V_{SS} = 0 V$ ,  $T_a = 0$  to  $+70^\circ C$ )

Parameter				Symbol	Condition	Value		Unit				
						Min.	Max.					
Input voltage <sup>*1</sup>	SCSI pins			$V_{IH}$	—	1.9	—	V				
				$V_{IL}$	—	—	1.0	V				
	SCLK pins SDSEL pins			$V_{IH}$	—	2.4	—	V				
				$V_{IL}$	—	—	0.8	V				
	Other pins			$V_{IH}$	—	2.0	—	V				
				$V_{IL}$	—	—	0.8	V				
SCSI-pin input hysteresis <sup>*1</sup>				$V_{HW}$	—	0.3	—	V				
Output voltage <sup>*1</sup>	SCSI pins	In single-end mode	REQ, ACK	$V_{OH}$	$I_{OH} = -7.0 \text{ mA}$	2.0	3.24	V				
				$V_{OL}$	$I_{OL} = +48.0 \text{ mA}$	—	0.5	V				
			RST, BSY, SEL	$V_{OL}$	$I_{OL} = +48.0 \text{ mA}$	—	0.5	V				
		Others	Non-3ST.	$V_{OL}$	$I_{OL} = +48.0 \text{ mA}$	—	0.5	V				
			3ST.	$V_{OH}$	$I_{OH} = -7.0 \text{ mA}$	2.0	3.24	V				
				$V_{OL}$	$I_{OL} = +48.0 \text{ mA}$	—	0.5	V				
	In differential mode			$V_{OH}$	$I_{OH} = -7.0 \text{ mA}$	2.0	3.24	V				
				$V_{OL}$	$I_{OL} = +3.2 \text{ mA}$	—	0.4	V				
	PCI bus interface pins			$V_{OH}$	$I_{OH} = -2.0 \text{ mA}$	4.2	—	V				
				$V_{OL}$	$I_{OL} = +6.0 \text{ mA}$	—	0.55	V				
	Other pins			$V_{OH}$	$I_{OH} = -2.0 \text{ mA}$	4.2	—	V				
				$V_{OL}$	$I_{OL} = +3.2 \text{ mA}$	—	0.4	V				
Input leakage current				$I_{LI}$	$V_{IN} = 0 \text{ to } V_{DD}$	-10	+10	$\mu A$				
Input/output leakage current <sup>*2</sup>				$I_{LOZ}$	$V_{IN} = 0 \text{ to } V_{DD}$	-10	+10	$\mu A$				
Supply current				$I_{DD}$	—	—	150	mA				

3ST. : Three-state mode

\*1 : SCSI pins are;  $\overline{UDBP}$ ,  $\overline{DB15}$  to  $\overline{DB8}$ ,  $\overline{LDBP}$ ,  $\overline{DB7}$  to  $\overline{DB0}$ ,  $\overline{BSY}$ ,  $\overline{SEL}$ ,  $\overline{RST}$ ,  $\overline{ATN}$ ,  $\overline{REQ}$ ,  $\overline{ACK}$ ,  $\overline{MSG}$ ,  $\overline{C/D}$  and I/O. (Total 27 pins)

\*2 : Leak current when the three-state output pin output and the bidirectional bus pin output are in a high impedance state.

# MB86606

## 2. Input/Output Pin Capacitance


( $V_{DD} = V_{IN} = 0 \text{ V}$ ,  $f = 1 \text{ MHz}$ ,  $T_a = +25^\circ\text{C}$ )

Parameter	Pin name	Symbol	Conditions		Unit
			Min.	Max.	
Input-pin capacitance	SCLK, PCLK (TP)	$C_{IN}$	—	12	pF
	Other input pins		—	8	pF
Output-pin capacitance		$C_{OUT}$	—	10	pF
Input/output-pin capacitance	Non-SCSI pins	$C_{I/O}$	—	10	pF
	SCSI pins		—	25	pF

## 3. Load Conditions for Measurement of AC Characteristics


### (1) Non-SCSI pins

( $V_{DD} = +5 \text{ V} \pm 5\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 0 \text{ to } +70^\circ\text{C}$ )

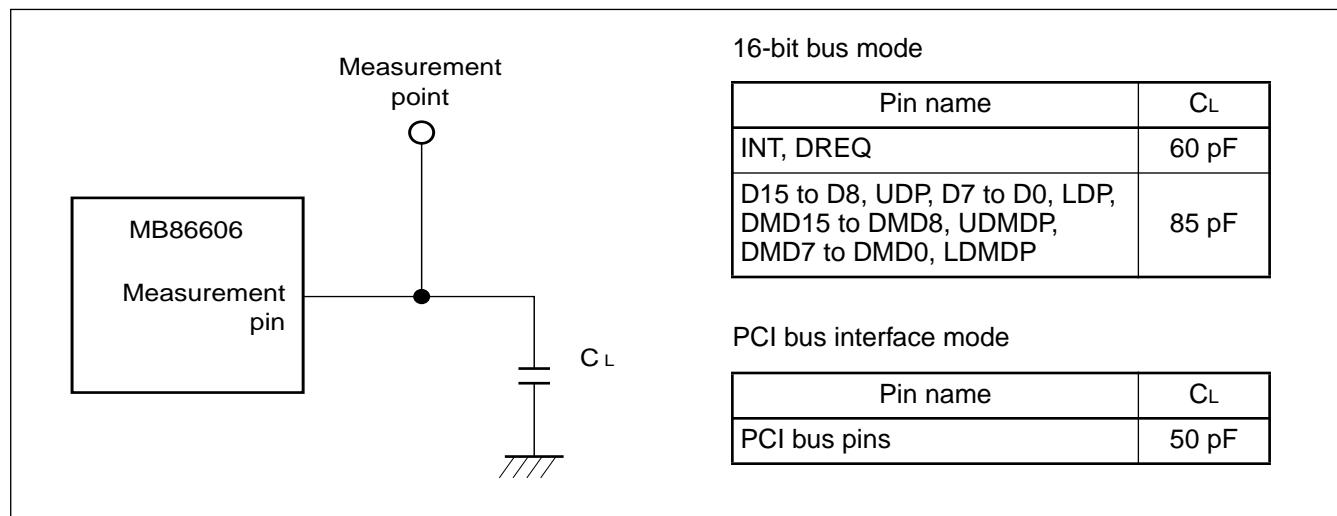

### (2) SCSI pins

( $V_{DD} = +5 \text{ V} \pm 5\%$ ,  $V_{SS} = 0 \text{ V}$ ,  $T_a = 0 \text{ to } +70^\circ\text{C}$ )

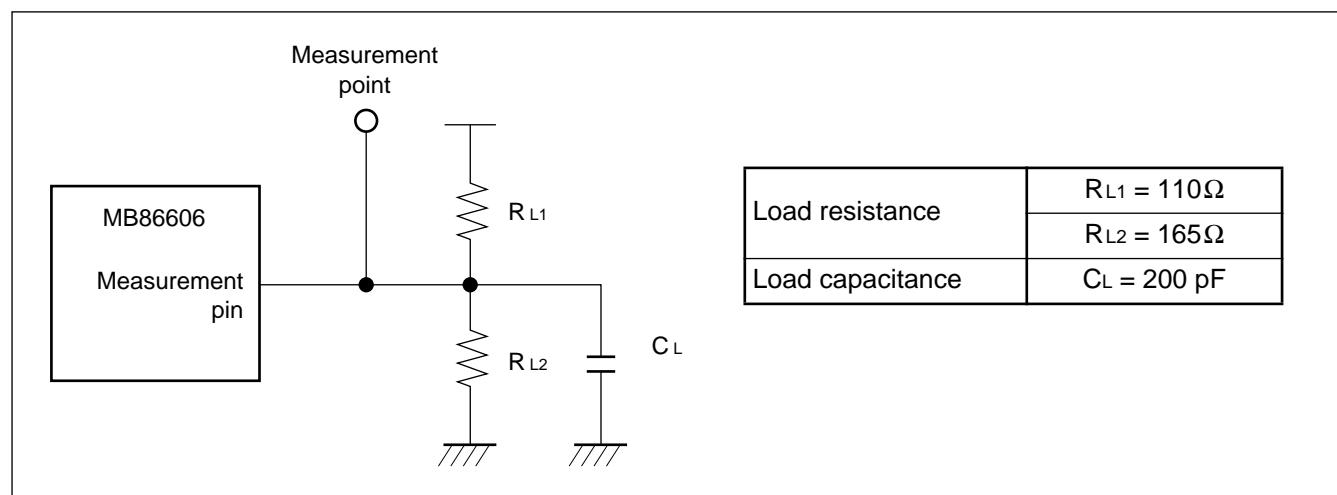

#### 4. AC Characteristics


##### (1) System clock

- SCSI clock (SCLK pin)

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Clock period	tCLF	25.0	—	50.0	ns
Clock pulse width (Low)	tCLCH	10.0	—	—	ns
Clock pulse width (High)	tCHCL	10.0	—	—	ns
Clock pulse rise time	tCR	—	—	5.0	ns
Clock pulse fall time	tCF	—	—	5.0	ns

Note: When the internal operating clock frequency is the same as the input clock frequency, (when using the device in divide-by-1 mode), the clock pulse width for L and H levels must have minimum 20.0 ns or longer.


(i.e. When the clock conversion register value is 0Bh (address: 10h in the initial setting registers) and input clock frequency = 20 MHz.)

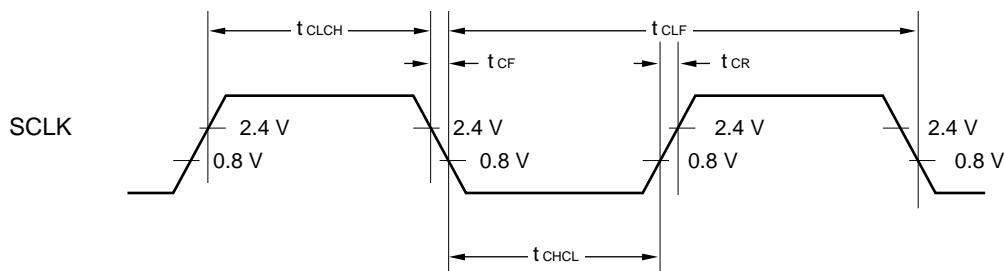

# MB86606


- PCI clock (PCLK pin)

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Clock frequency	t <sub>PCY</sub>	30.0	—	—	ns
Clock pulse width (Low)	t <sub>PLO</sub>	12.0	—	—	ns
Clock pulse width (High)	t <sub>PHI</sub>	12.0	—	—	ns
Clock slew rate	t <sub>PSR</sub>	1.0	—	4.0	V/ns
Clock amplitude	V <sub>IHP</sub> – V <sub>ILP</sub>	2.0	—	—	V

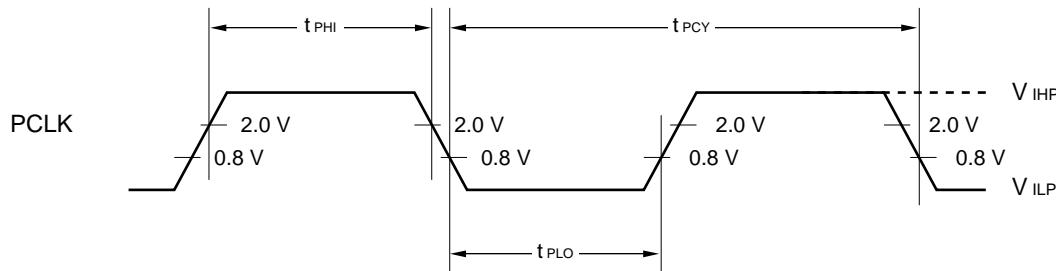

## (2) System reset


Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Reset ( $\overline{\text{RESET}}$ ) pulse “L” level pulse width	t <sub>WRSL</sub>	4 t <sub>CLF</sub>	—	—	ns

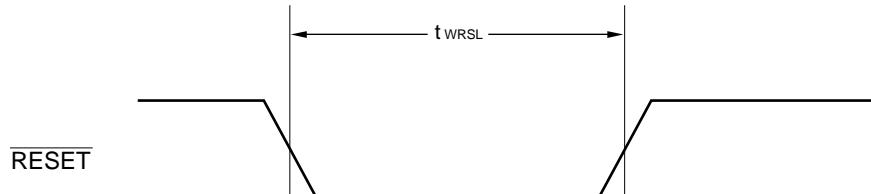

## 5. MPU Interface

### (1) Register write timing for 80 series


Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A4 to A0), BHE setup time	tAWS	20	—	ns
Address (A4 to A0) hold time	tAWH	10	—	ns
CS <sub>0</sub> setup time	tCWS	10	—	ns
CS <sub>0</sub> hold time	tCWH	5	—	ns
Data set up time	tDWS	25	—	ns
Data hold time	tDWH	10	—	ns
WR "L" level pulse width	tWR	70	—	ns

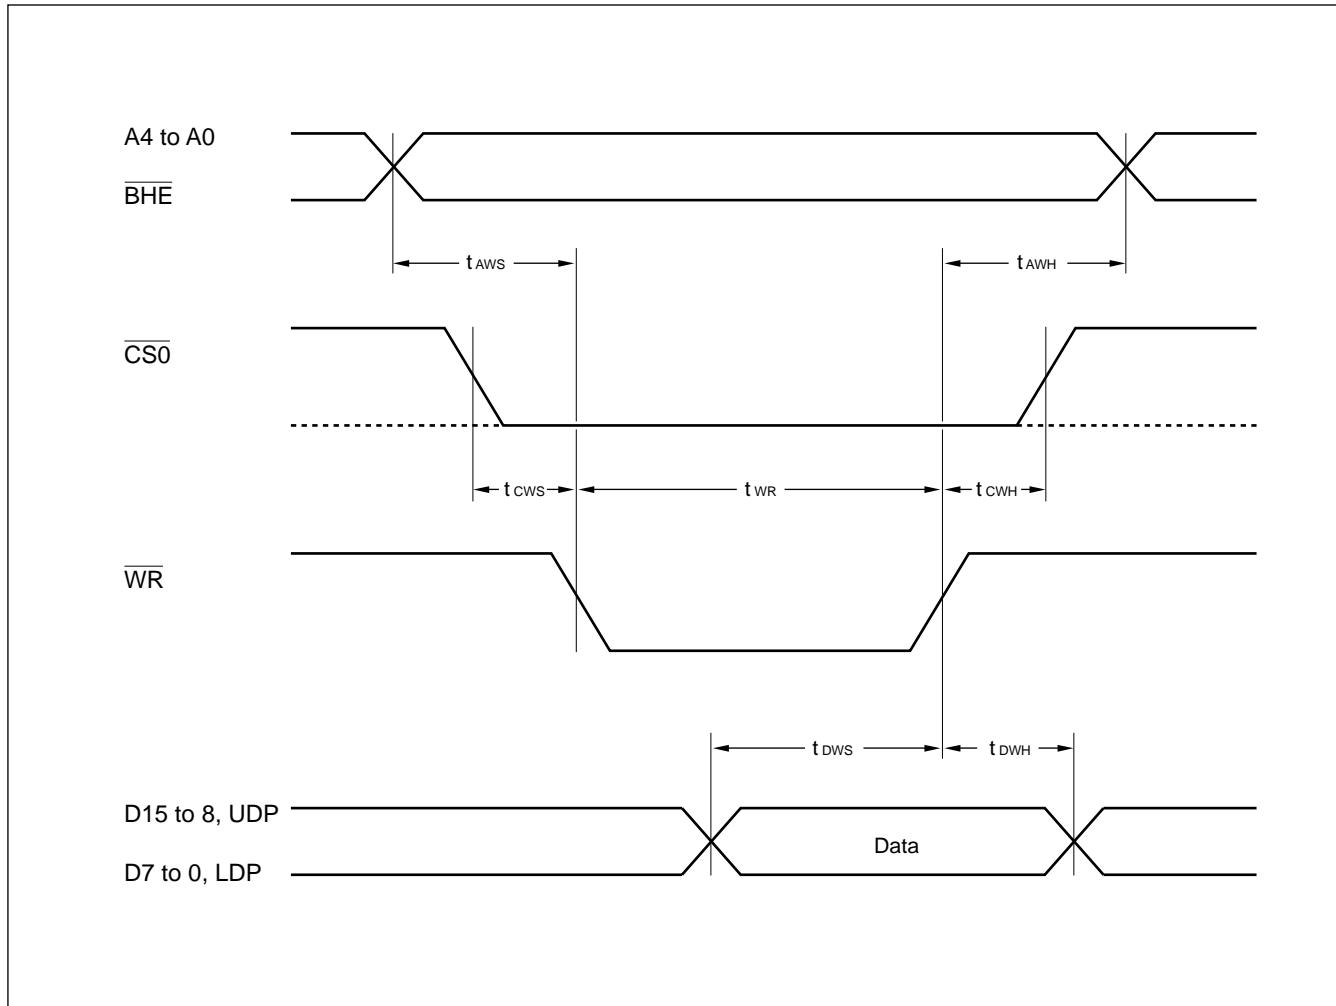

# MB86606


## (2) Resistor read timing for 80 series

Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A4 to A0), $\overline{BHE}$ setup time	$t_{ARS}$	20	—	ns
Address (A4 to A0) hold time	$t_{ARH}$	10	—	ns
$CS_0$ setup time	$t_{CRS}$	10	—	ns
$CS_0$ hold time	$t_{CRH}$	5	—	ns
$\overline{RD}$ set Low → data output defined time	$t_{RLD}$	—	40	ns
$\overline{RD}$ set High → data output defined time	$t_{RHD}$	5	—	ns
$\overline{RD}$ pulse duration at Low	$t_{RD}$	70	—	ns
INT signal clear time	Interrupt non-hold mode	$t_{DL}$	—	50 ns
	Interrupt hold mode	$t_{DL2}$	—	$n \cdot t_{CLF} + 50$ ns

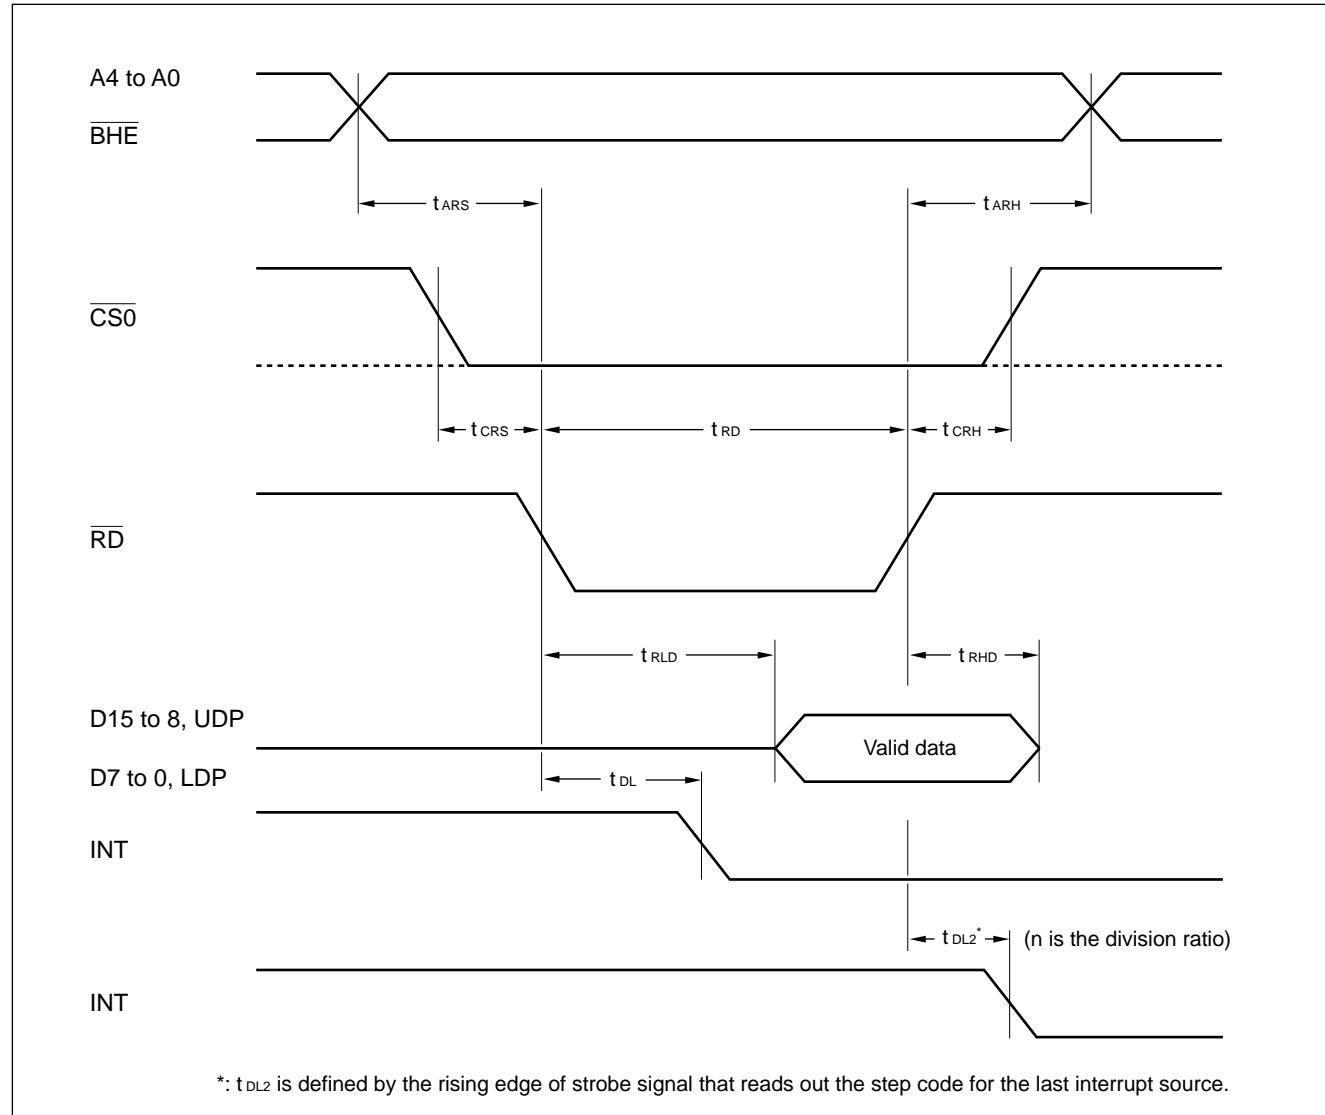

## (3) Register write timing for 80 series (for external access)


Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A0), BHE setup time	tAWSE	20	—	ns
Address (A0), BHE hold time	tAWHE	10	—	ns
CS1 setup time	tCWSE	10	—	ns
CS1 hold time	tCWHE	5	—	ns
WR set Low → DMA bus output delay time	tWLHD	—	40	ns
WR set High → DMA bus output undefined time	tWHHD	5	—	ns
MPU data bus → DMA bus output delay time	tDHD	—	20	ns

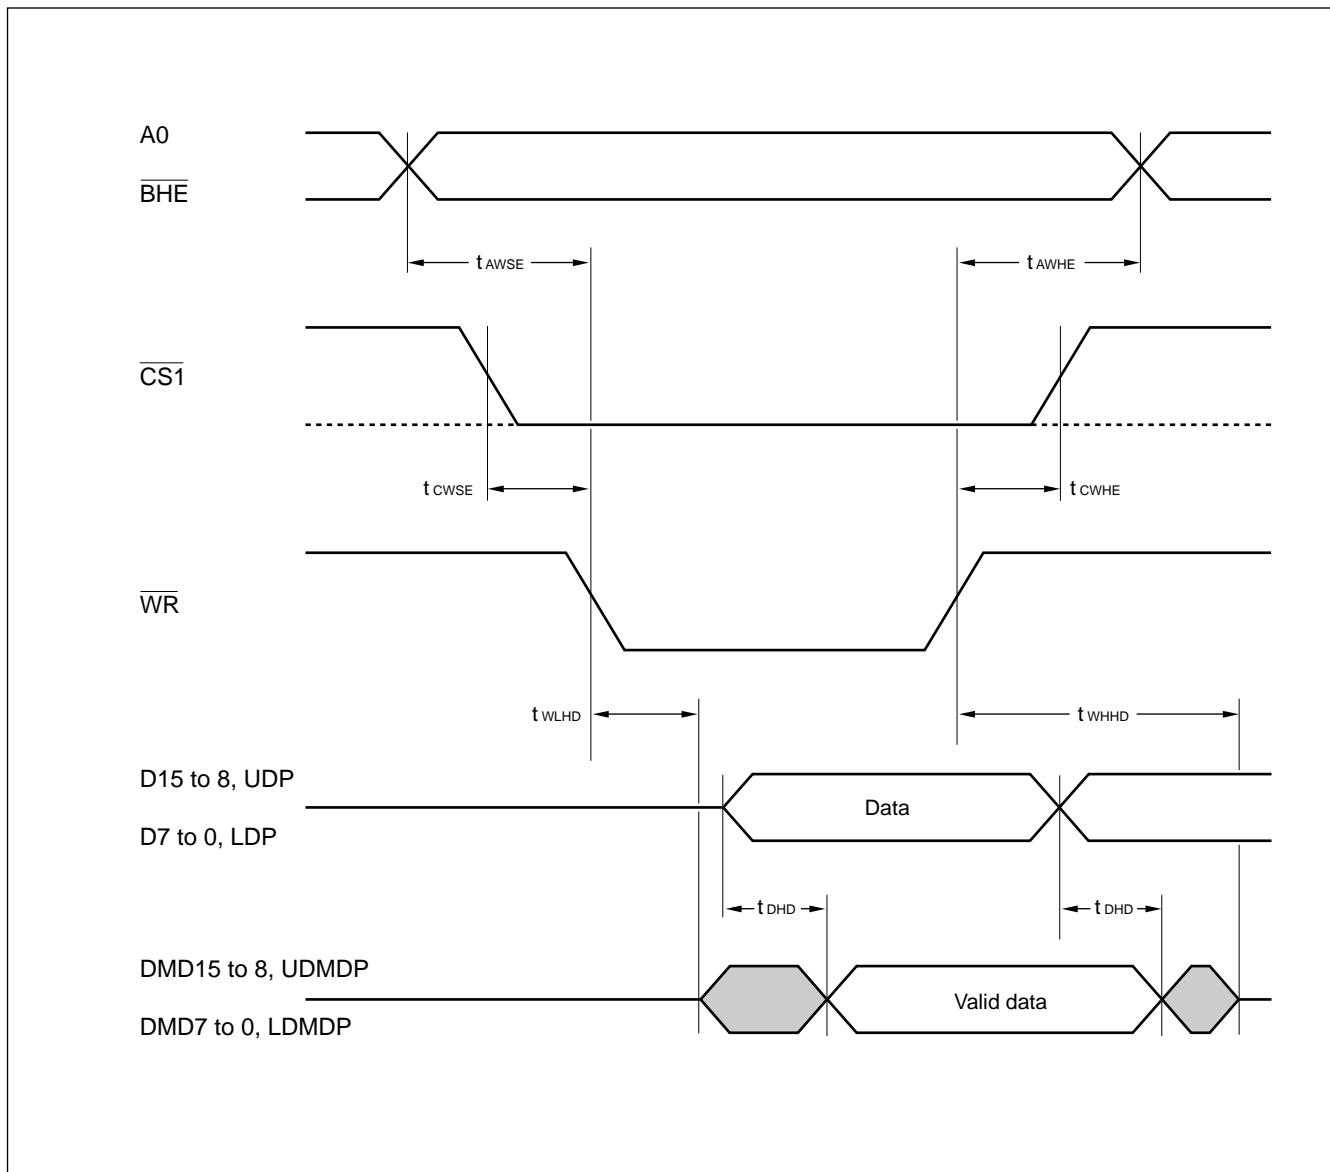

# MB86606


## (4) Register read timing for 80 series (for external access)

Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A0), BHE setup time	tARSE	20	—	ns
Address (A0), BHE hold time	tARHE	10	—	ns
CS1 setup time	tCRSE	10	—	ns
CS1 hold time	tCRHE	5	—	ns
RD set Low → MPU bus output enable time	tRLNZ	—	40	ns
RD set High → MPU bus output disable time	tRHZ	5	—	ns
DMA data bus → MPU bus output delay time	tHDD	—	20	ns

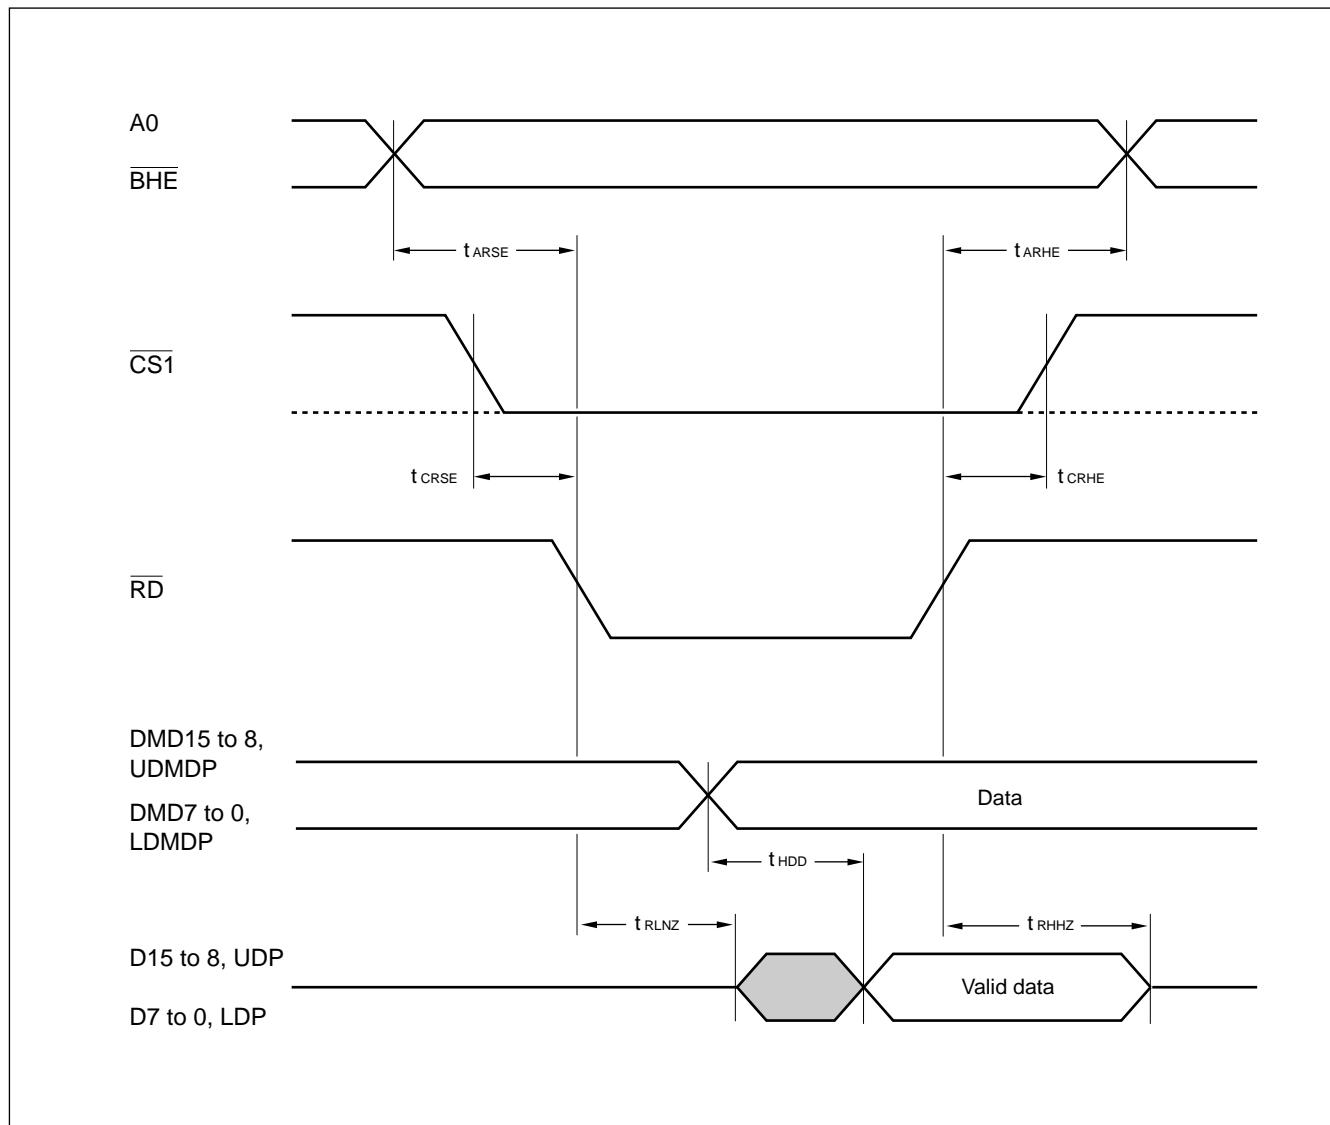

## (5) Register write timing for 68 series


Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A4 to A0) setup time	tAWS	20	—	ns
Address (A4 to A0) hold time	tAWH	10	—	ns
CS0 setup time	tcws	10	—	ns
CS0 hold time	tcwh	5	—	ns
Data setup time	tdws	25	—	ns
Data hold time	tdwh	10	—	ns
UDS/LDS "L" level pulse width	tds	70	—	ns
R/W setup time	trws	10	—	ns
R/W hold time	trwh	10	—	ns

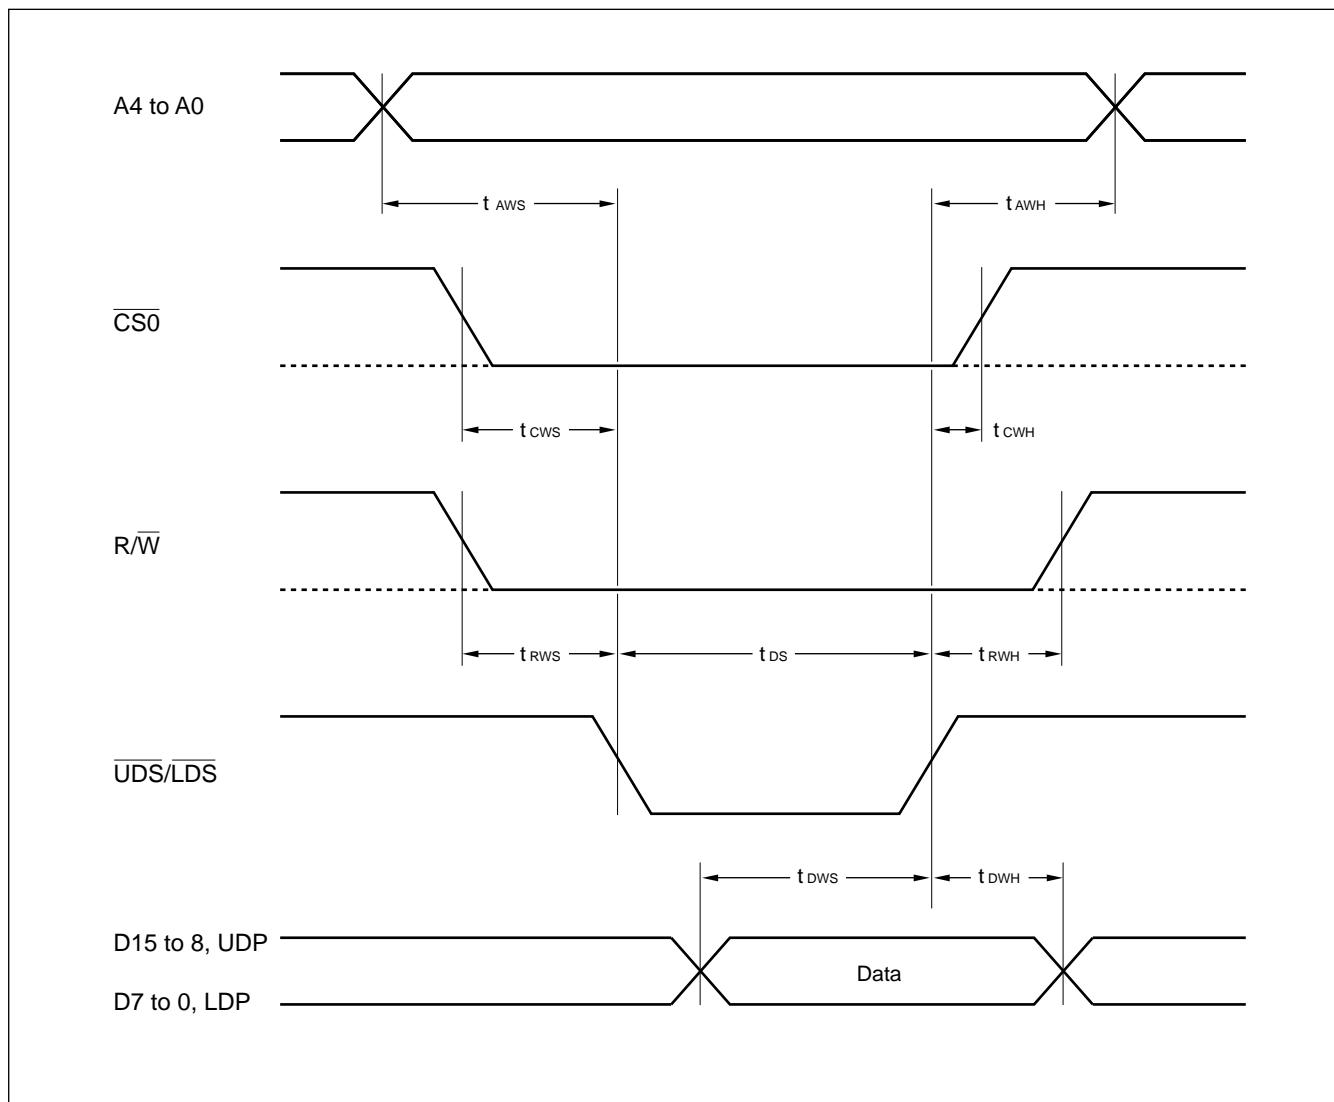

# MB86606


## (6) Register read timing for 68 series

Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A4 to A0) setup time	t <sub>A<sub>4</sub>RS</sub>	20	—	ns
Address (A4 to A0) hold time	t <sub>A<sub>4</sub>RH</sub>	10	—	ns
CS <sub>0</sub> setup time	t <sub>CRS</sub>	10	—	ns
CS <sub>0</sub> hold time	t <sub>CRH</sub>	5	—	ns
Data output defined time	t <sub>RLD</sub>	—	40	ns
Data output disable time	t <sub>RHD</sub>	5	—	ns
UDS/LDS “L” level pulse width	t <sub>DS</sub>	70	—	ns
R/W setup time	t <sub>RWS</sub>	10	—	ns
R/W hold time	t <sub>RWH</sub>	10	—	ns
INT signal clear time	t <sub>DH</sub>	—	50	ns
	t <sub>DH2</sub>	—	n•t <sub>CLK</sub> +50	

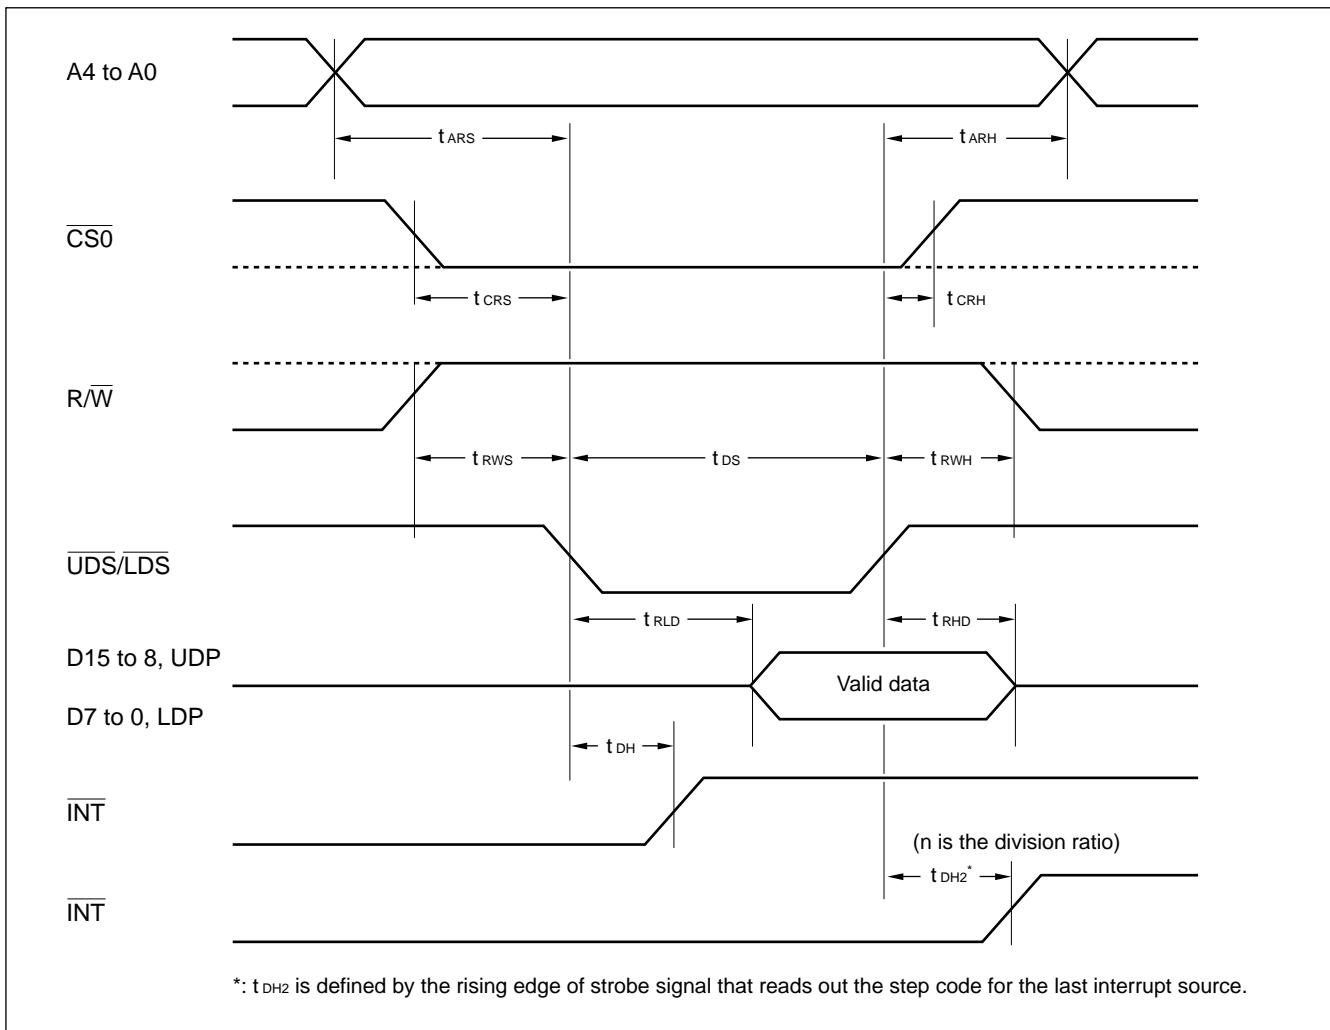

## (7) Register write timing for 68 series (for external access)


Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A0) setup time	tAWSE	20	—	ns
Address (A0) hold time	tAWHE	10	—	ns
CS1 setup time	tcwse	10	—	ns
CS1 hold time	tcwhe	5	—	ns
UDS/LDS set Low → DMA bus output delay time	twlhd	—	40	ns
UDS/LDS set High → DMA bus output undefined time	twhd	5	—	ns
MPU data bus → DMA bus output delay time	tdhd	—	20	ns
R/W setup time	trws	10	—	ns
R/W hold time	trwh	10	—	ns

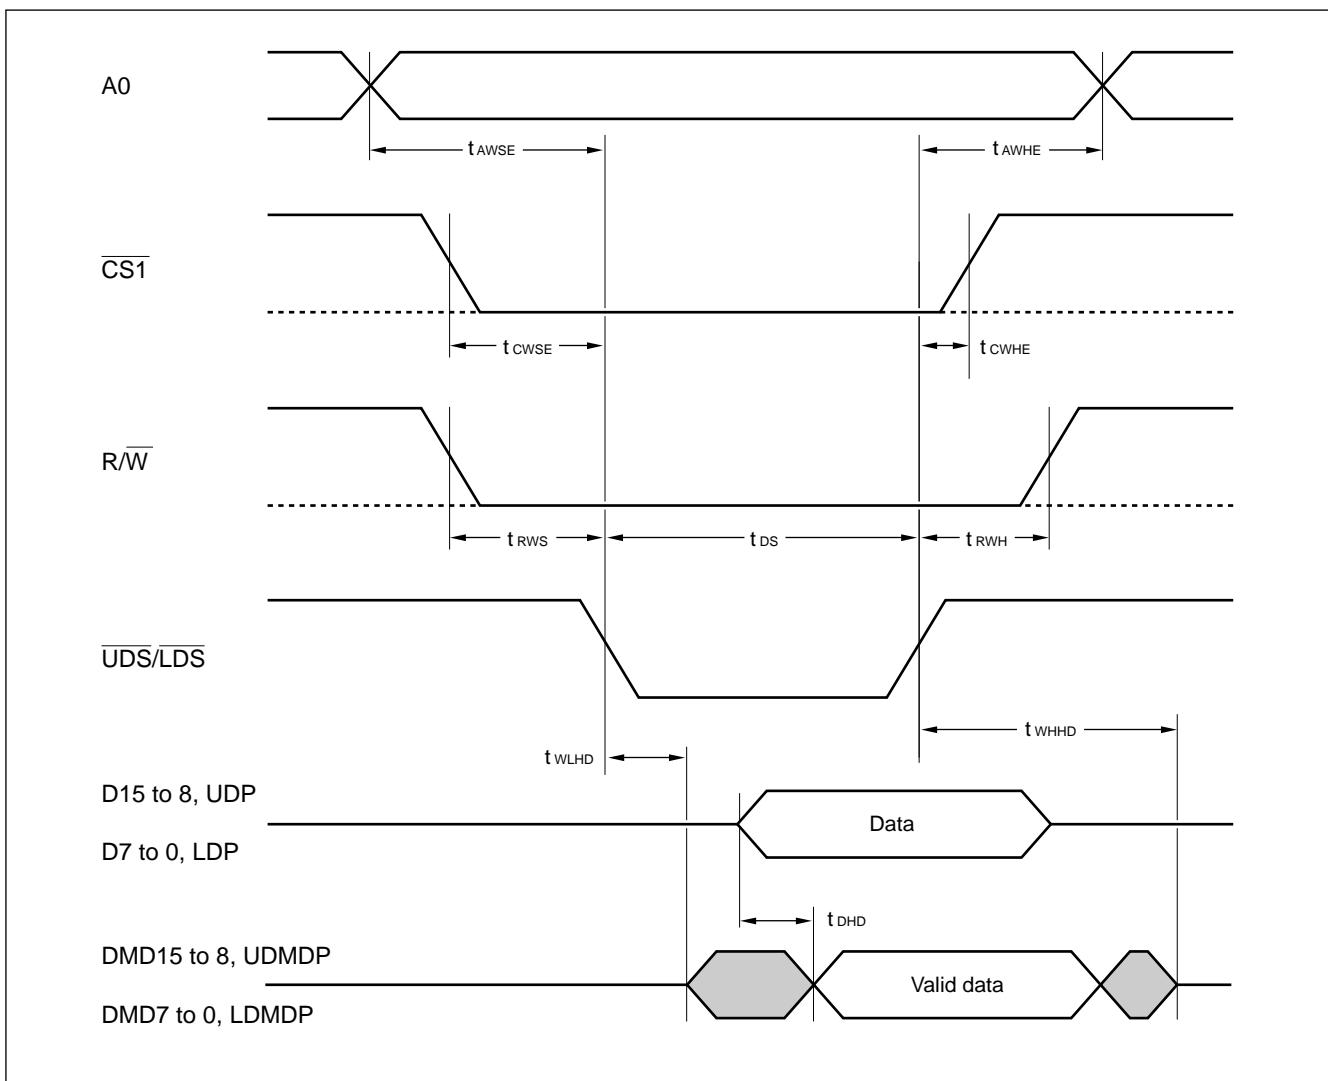

# MB86606

## (8) Register read timing for 68 series (for external access)

Parameter	Symbol	Value		Unit
		Min.	Max.	
Address (A0) setup time	$t_{ARSE}$	20	—	ns
Address (A0) hold time	$t_{ARHE}$	10	—	ns
$\overline{CS1}$ setup time	$t_{CRSE}$	10	—	ns
$\overline{CS1}$ hold time	$t_{CRHE}$	5	—	ns
UDS/LDS set Low → MPU data bus output enable time	$t_{RLNZ}$	—	40	ns
UDS/LDS set High → MPU data bus output disable time	$t_{RHZ}$	5	—	ns
DMA bus → MPU data bus output delay time	$t_{HDD}$	—	20	ns
R/W setup time	$t_{RWS}$	10	—	ns
R/W hold time	$t_{RWH}$	10	—	ns

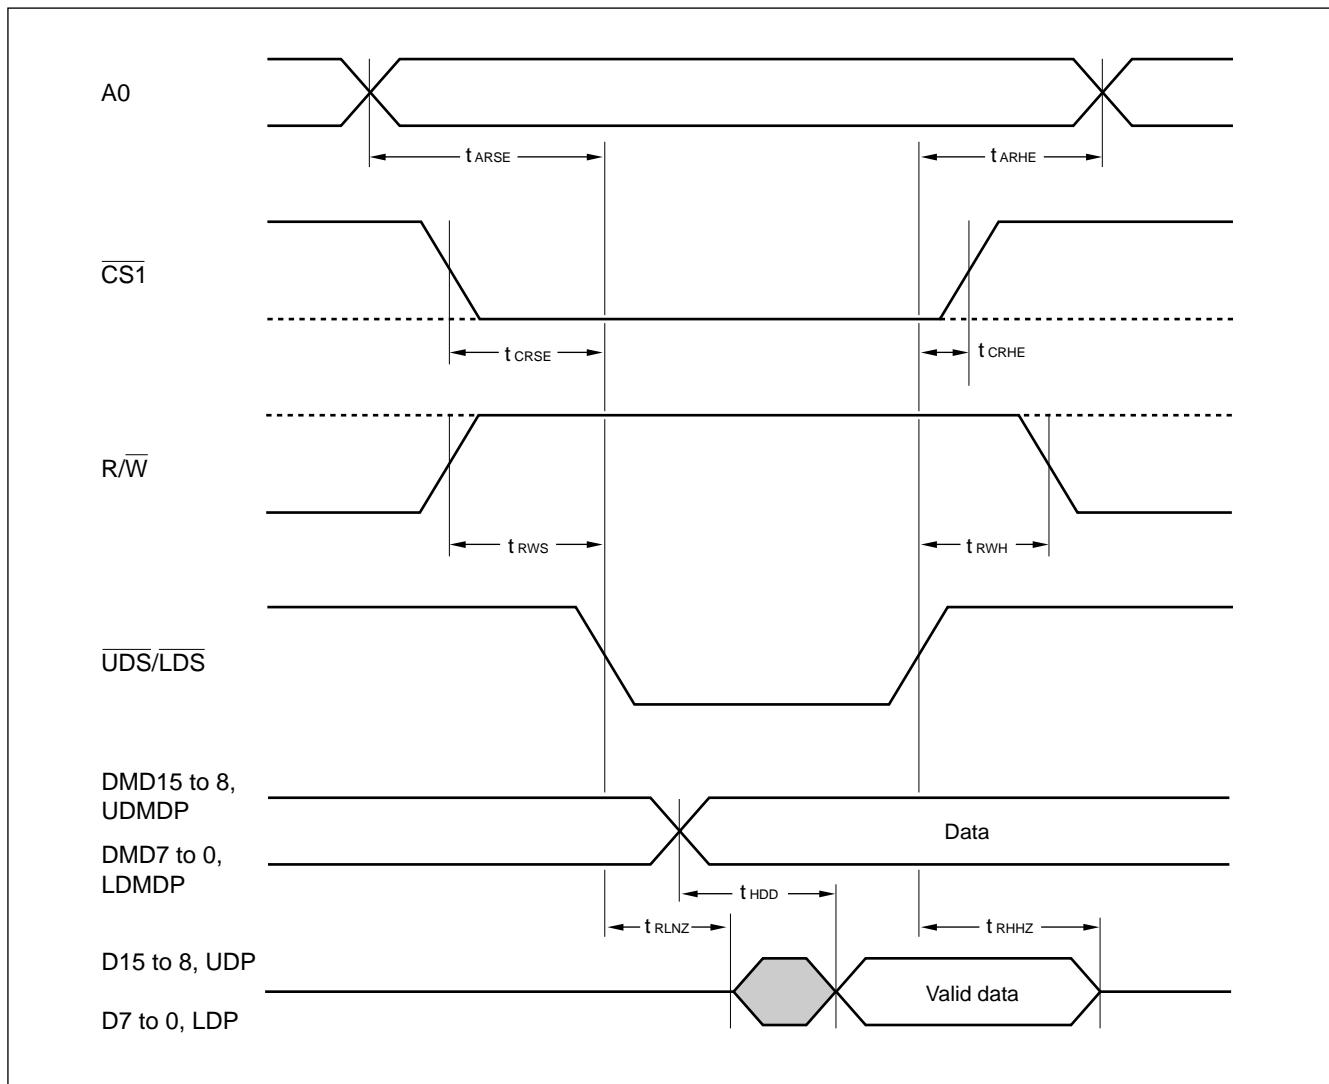

## 6. DMA Interface


### DMA access timing

The time regulations are not applicable in the following cases:

- During SCSI input and when data buffer EMPTY, or when one byte held
- During SCSI output and when data buffer FULL, or when 511 bytes held
- When parity error detected (target)
- When error stopping transfer occurs in SCSI interface

#### (1) Access cycle time (burst mode)


Parameter	Symbol	Value		Unit
		Min.	Max.	
Address cycle time	tDCY1	2 tCLF	—	ns
	tDCY2	3 tCLF	—	ns
	tDCY3	4 tCLF	—	ns
	tDCY4	1 tCLF	—	ns

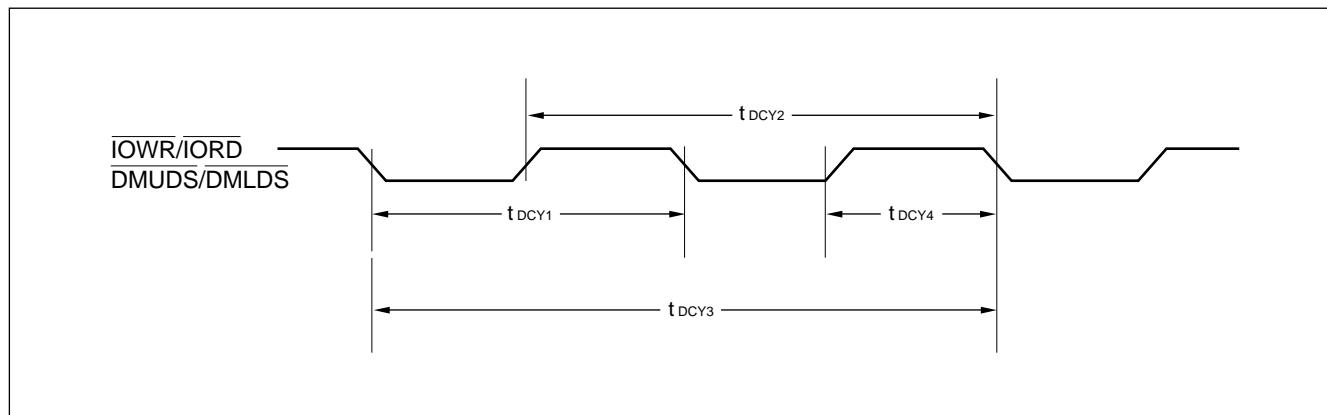

# MB86606


## (2) Write timing (burst mode for 80 series)

Parameter	Symbol	Value		Unit
		Min.	Max.	
DREQ set High → DACK set Low	$t_{DHAL}$	0	—	ns
IOWR set Low → DREQ set Low	$t_{ALDL}$	—	25	ns
DREQ set Low → DREQ set High	$t_{DLDH}$	0	—	ns
DACK set Low → IOWR set Low	$t_{ALWL}$	0	—	ns
DMBHE, DMA0 setup time	$t_{DAWS}$	10	—	ns
IOWR “L” level pulse width	$t_{DWR}$	25	—	ns
IOWR set High → DACK set High	$t_{WHAH}$	0	—	ns
DMBHE, DMA0 hold time	$t_{DAWH}$	10	—	ns
Input data setup time	$t_{DDWS}$	25	—	ns
Input data hold time	$t_{DDWH}$	5	—	ns

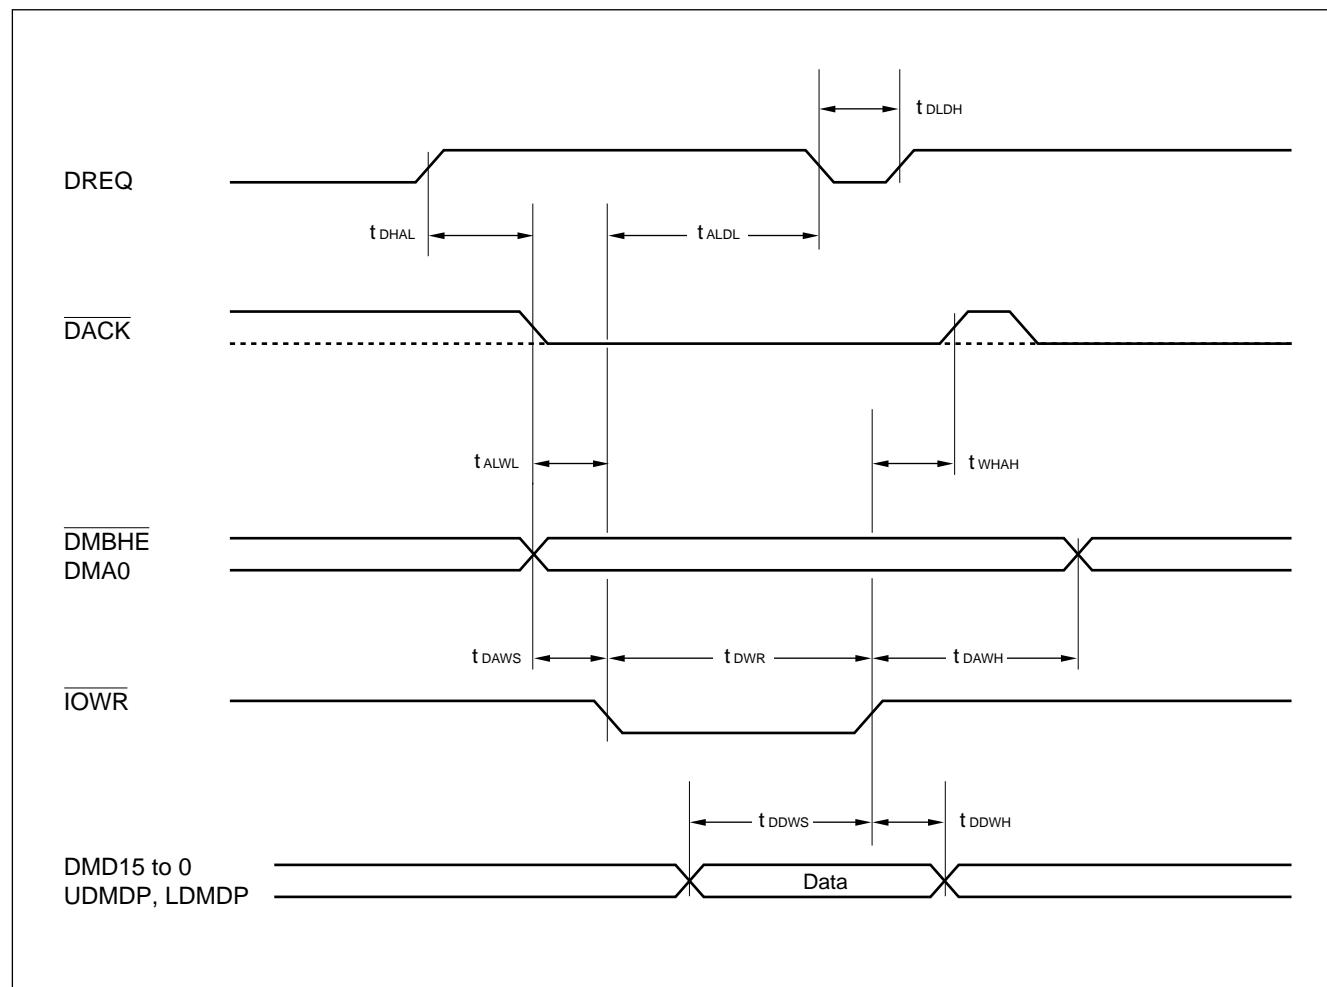

## (3) Read timing (burst mode for 80 series)


Parameter	Symbol	Value		Unit
		Min.	Max.	
DREQ set High → DACK set Low	$t_{DHAL}$	0	—	ns
IORD set Low → DREQ set Low	$t_{ALDL}$	—	25	ns
DREQ set Low → DREQ set High	$t_{DLDH}$	0	—	ns
DACK set Low → IORD set Low	$t_{ALRL}$	0	—	ns
DMBHE, DMA0 setup time	$t_{DARS}$	10	—	ns
IORD "L" level pulse width	$t_{DRD}$	25	—	ns
IORD set High → DACK set High	$t_{RHAH}$	0	—	ns
DMBHE, DMA0 hold time	$t_{DARH}$	10	—	ns
Data output defined time	$t_{DRLD}$	—	25	ns
Data output hold time	$t_{DRHD}$	10	—	ns

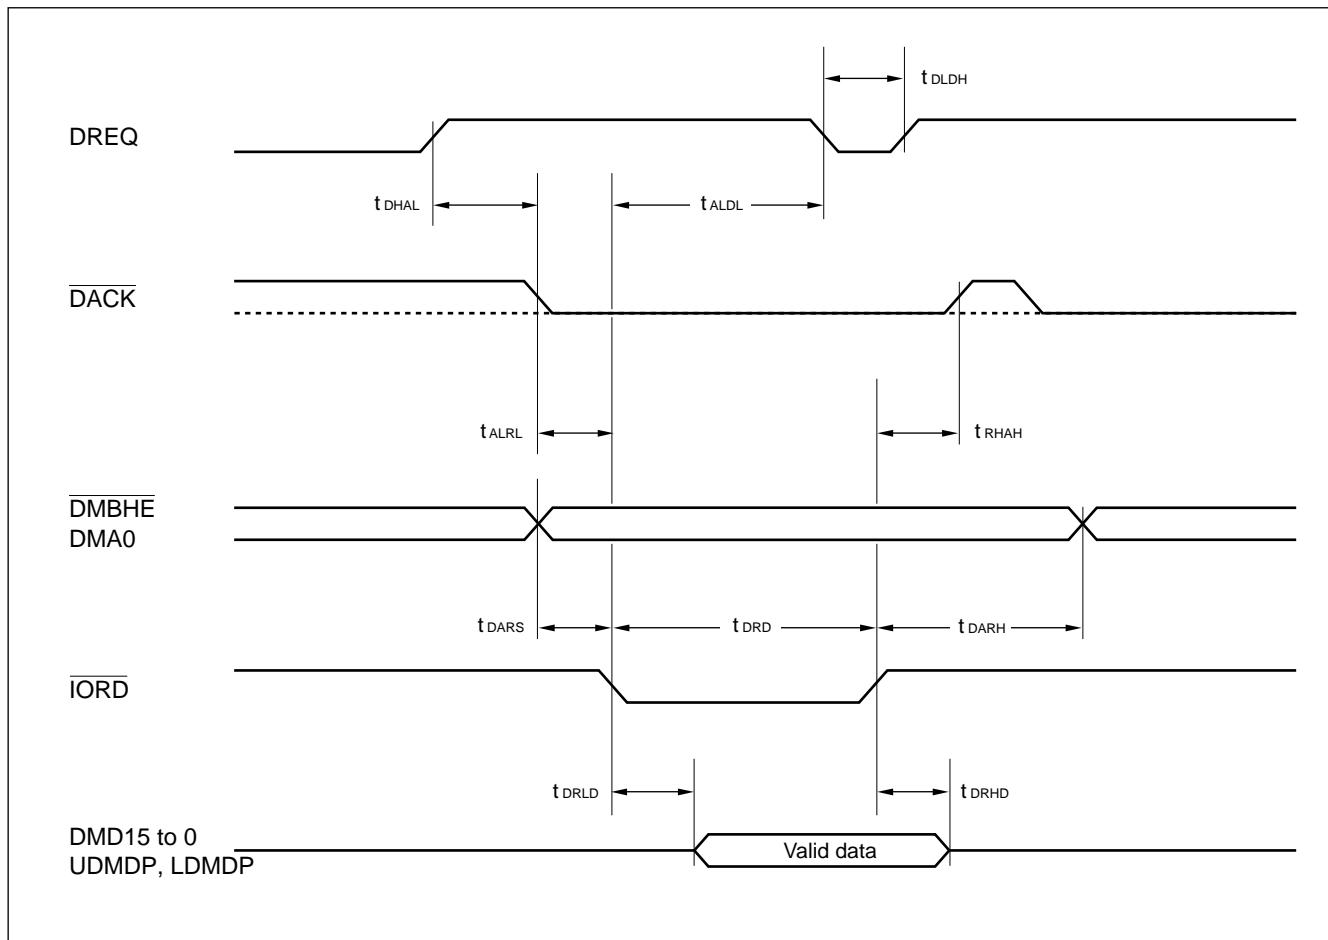

# MB86606


## (4) Write timing (burst mode for 68 series)

Parameter	Symbol	Value		Unit
		Min.	Max.	
DREQ set High → DACK set Low	$t_{DHAL}$	0	—	ns
DMUDS/DMLDS set Low → DREQ set Low	$t_{ALDL}$	—	25	ns
DREQ set Low → DREQ set High	$t_{DLDH}$	0	—	ns
DACK set Low → DMUDS/DMLDS set Low	$t_{ALDL}$	5	—	ns
R/W setup time	$t_{DRWS}$	10	—	ns
DMUDS/DMLDS "L" level pulse width	$t_{DDS}$	25	—	ns
DMUDS/DMLDS set High → DACK set High	$t_{DHAH}$	0	—	ns
R/W hold time	$t_{DRWH}$	10	—	ns
Input data setup time	$t_{DDWS}$	25	—	ns
Input data hold time	$t_{DDWH}$	5	—	ns

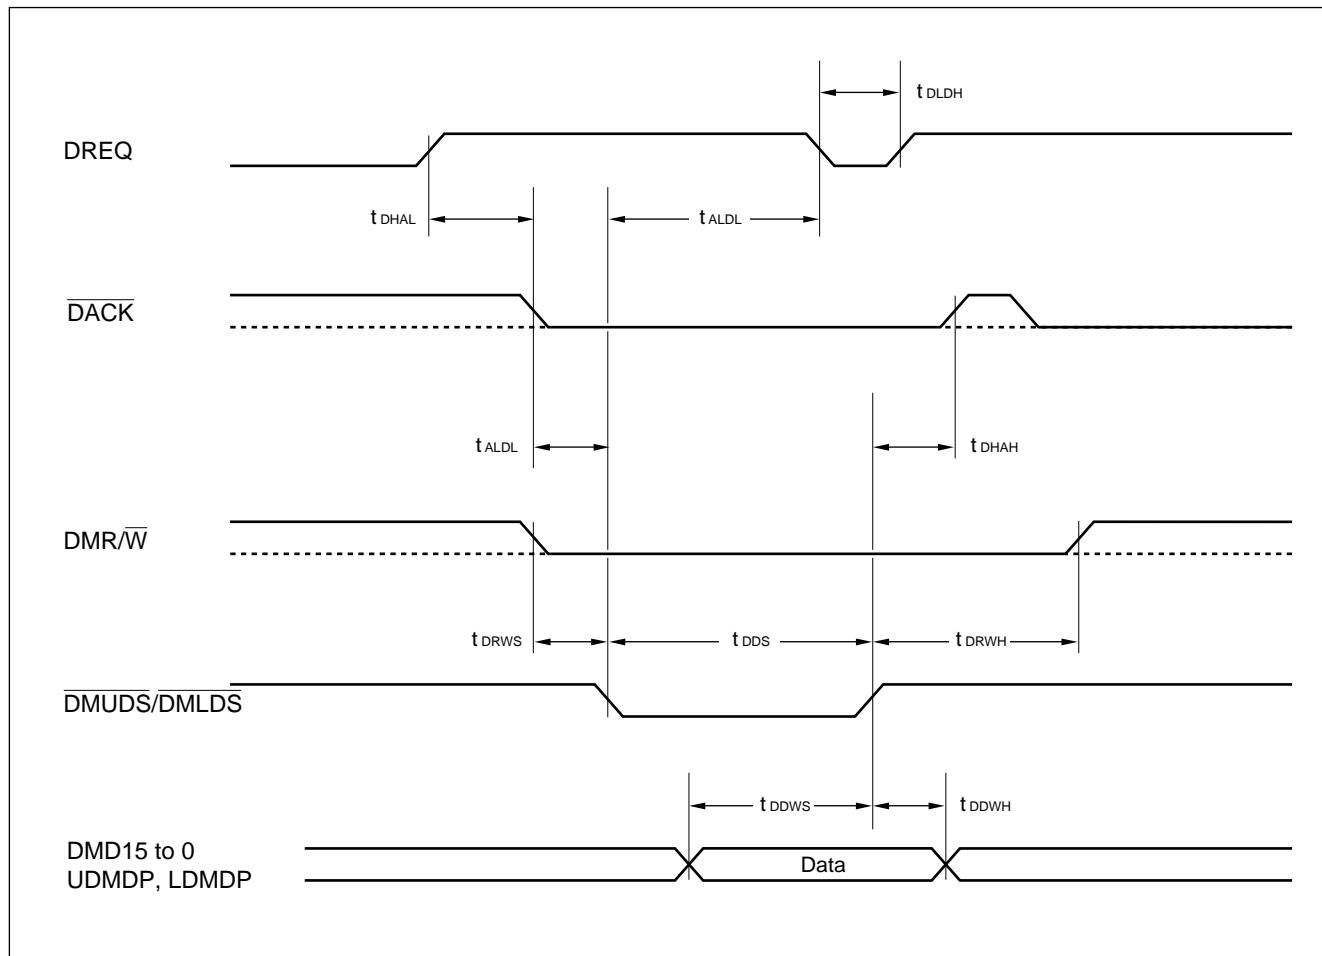

## (5) Read timing (burst mode for 68 series)

Parameter	Symbol	Value		Unit
		Min.	Max.	
DREQ set High → DACK set Low	$t_{DHAL}$	0	—	ns
DMUDS/DMLDS set Low → DREQ set Low	$t_{ALDL}$	—	25	ns
DREQ set Low → DREQ set High	$t_{DLDH}$	0	—	ns
DACK set Low → DMUDS/DMLDS set Low	$t_{ALDL}$	5	—	ns
R/W setup time	$t_{DRWS}$	10	—	ns
DMUDS/DMLDS "L" level pulse width	$t_{DDS}$	25	—	ns
DMUDS/DMLDS set High → DACK set High	$t_{DHAH}$	0	—	ns
R/W hold time	$t_{DRWH}$	10	—	ns
Output data valid time	$t_{DRLD}$	—	25	ns
Output data hold time	$t_{DRHD}$	10	—	ns

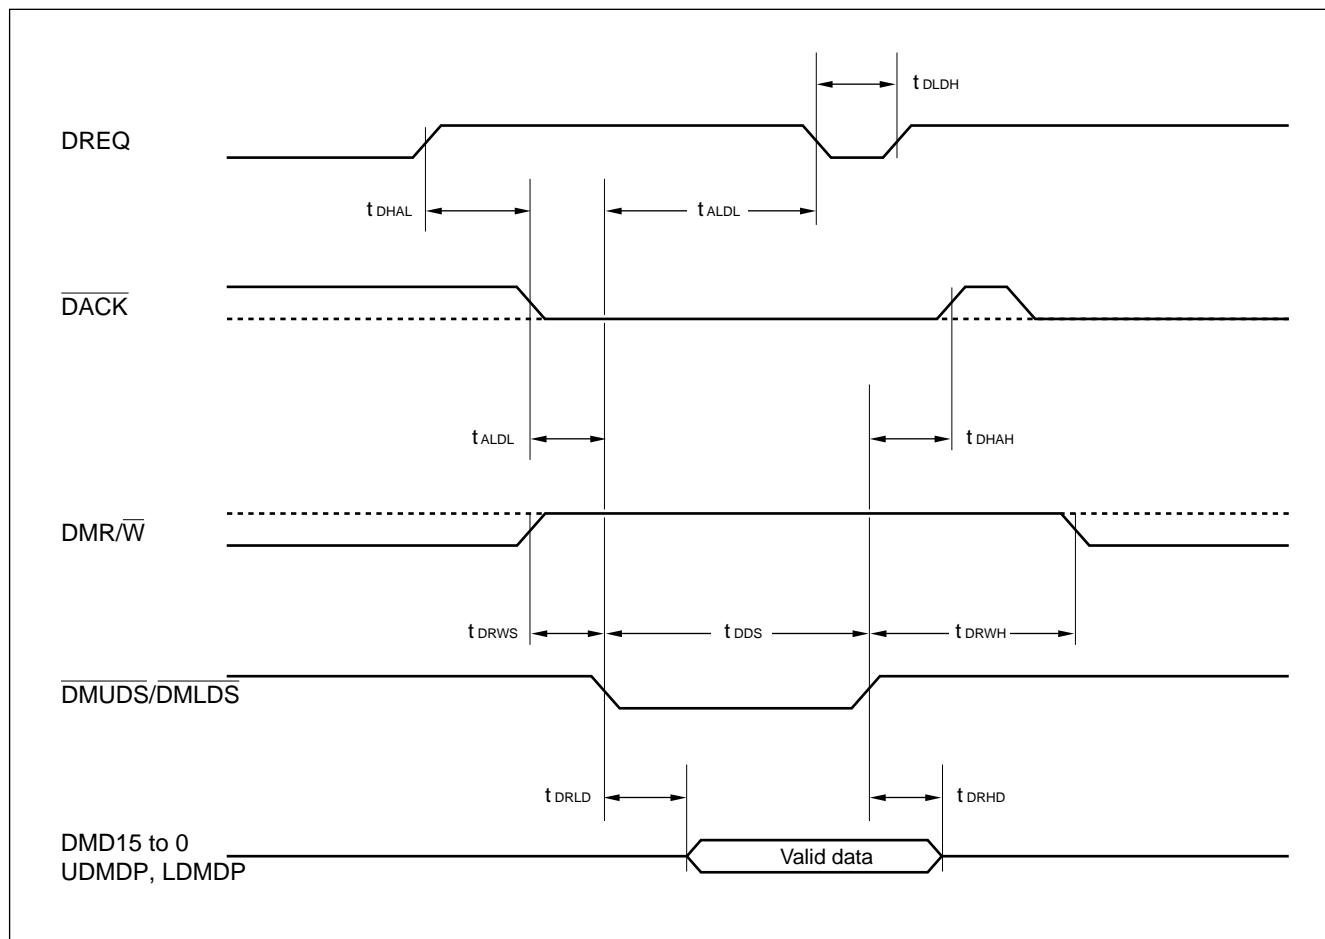

# MB86606


## 7. PCI Interface

### (1) PCI interface signal timing


Parameter	Symbol	Value		Unit
		Min.	Max.	
Output signal valid time	$t_{PVAL}$	2	11/12*1	ns
Output disable time	$t_{POFF}$	—	28	ns
Output enable time	$t_{PON}$	2	—	ns
Input setup time	$t_{PSU}$	7/10*2	—	ns
Input hold time	$t_{PHD}$	0	—	ns

\*1: Applicable to  $\overline{PREQ}$  pin


\*2: Applicable to  $\overline{GNT}$  pin

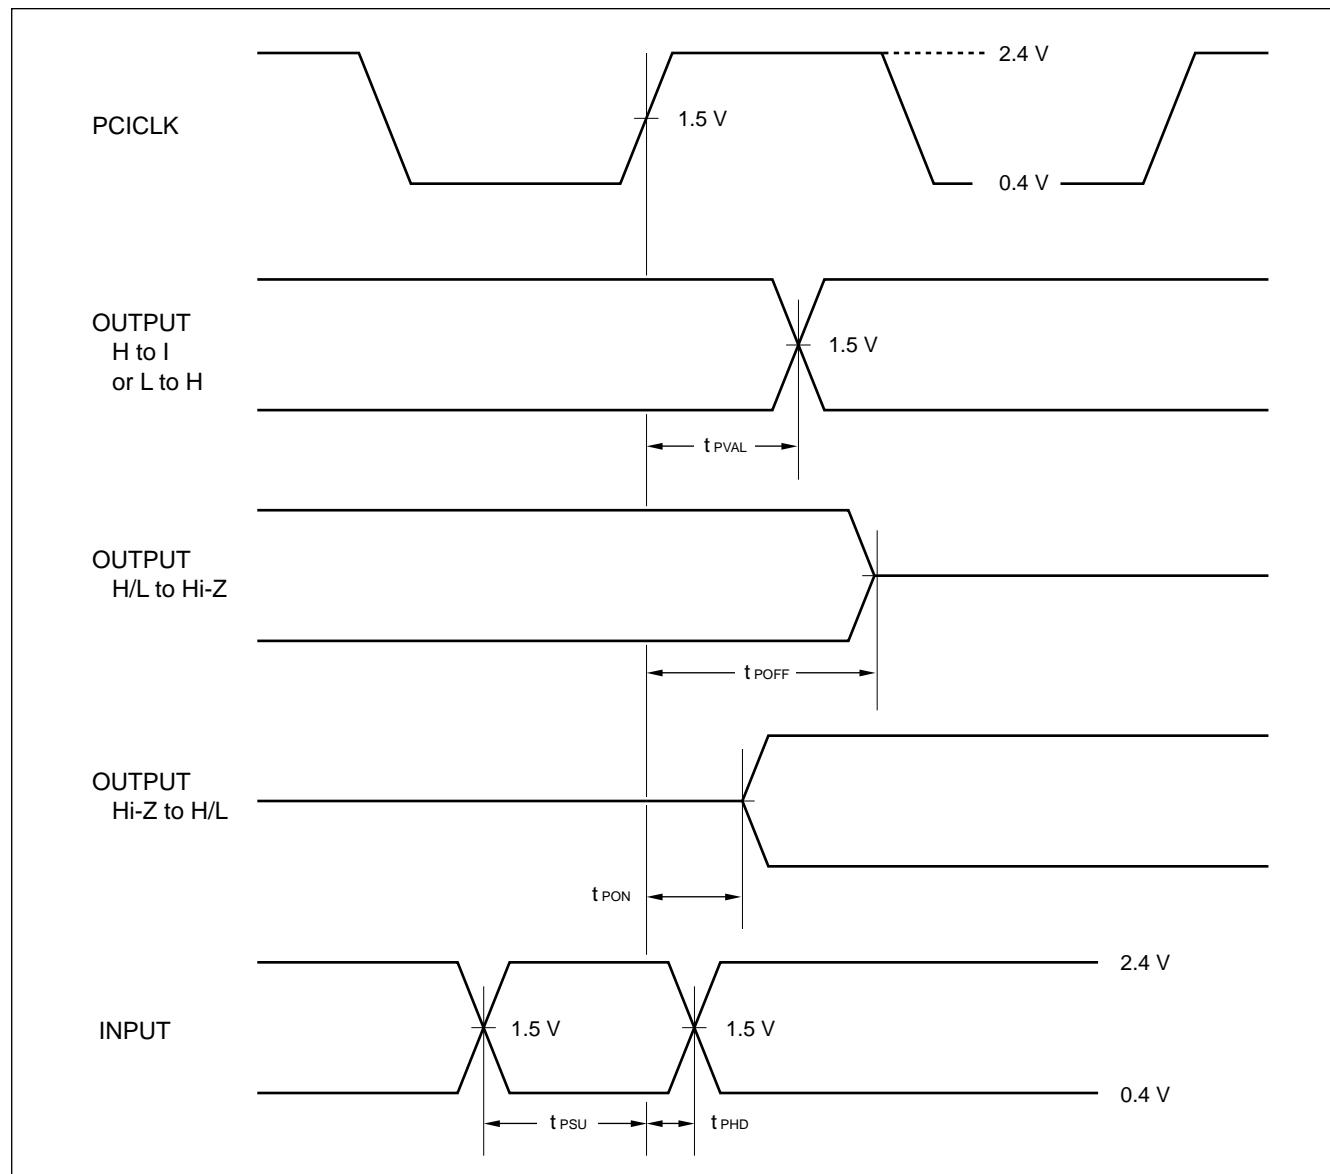

## (2) Configuration register read timing

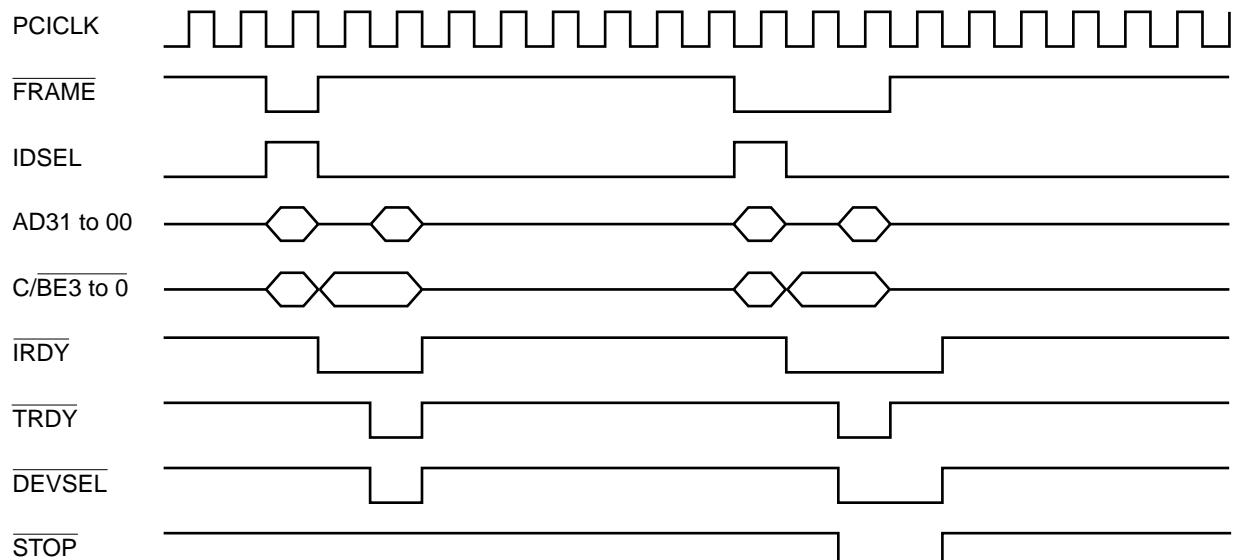

## (3) Configuration register write timing

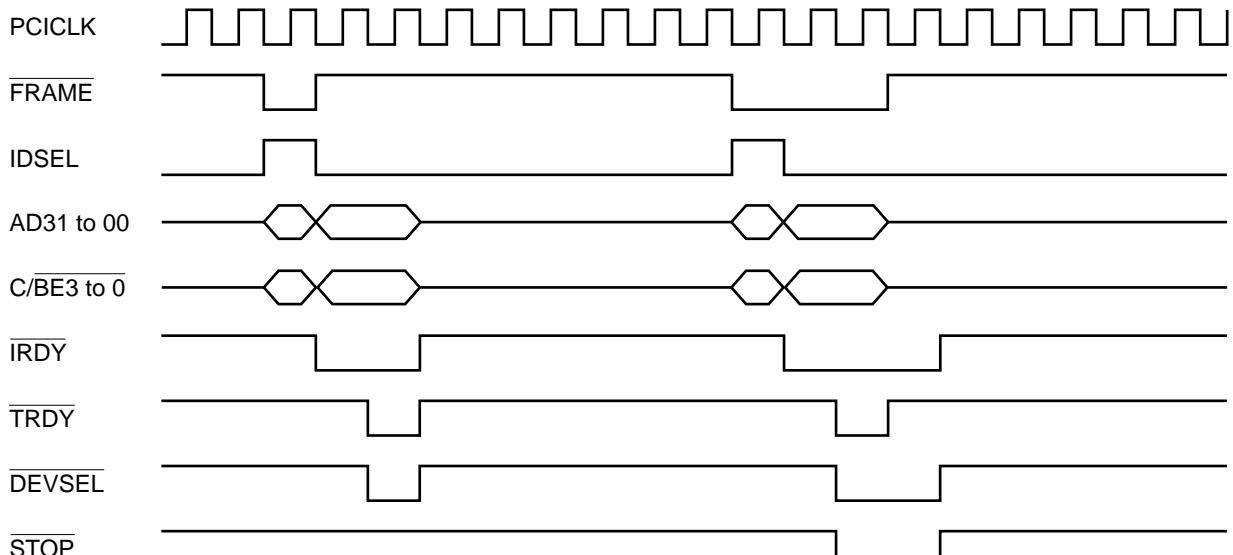


Note: For the access to the configuration register, only one data transfer possible.

When a master device executes the burst transfer, a target device asserts STOP signal, and performs the target termination.

# MB86606


## (4) BASIC control register read timing (target mode)

- Byte or word access

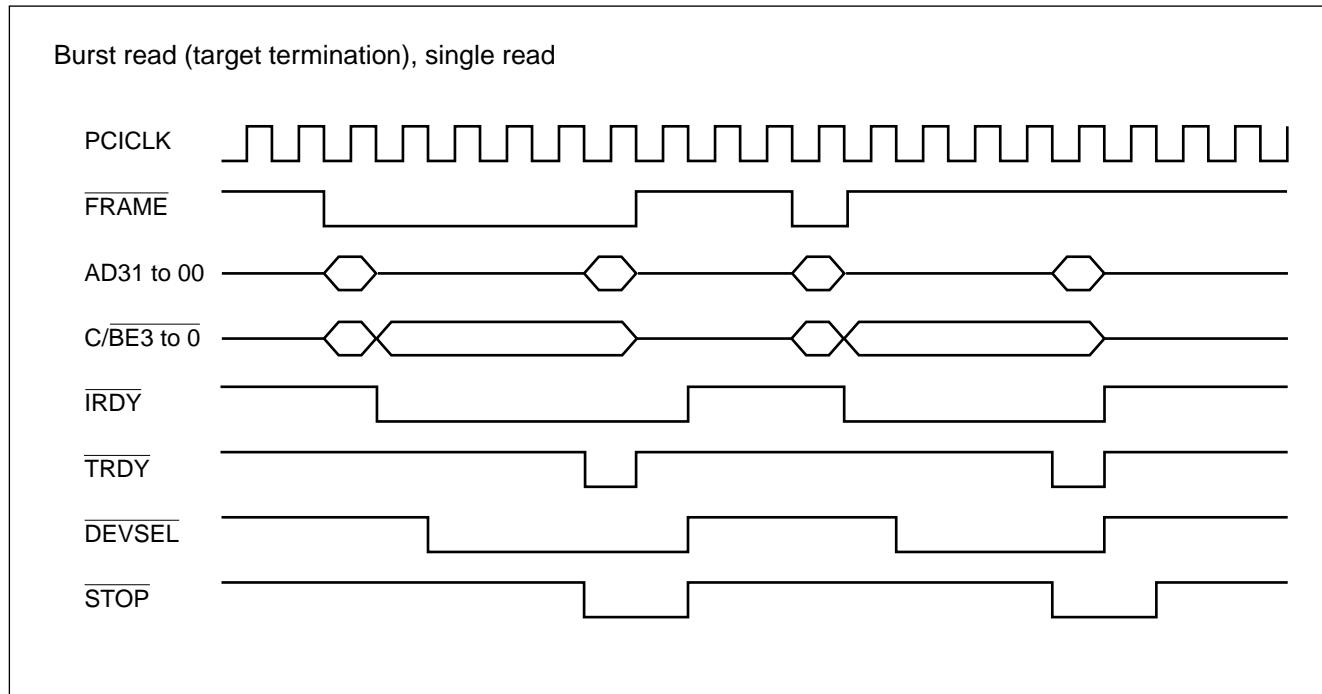


- Long-word access

Single read

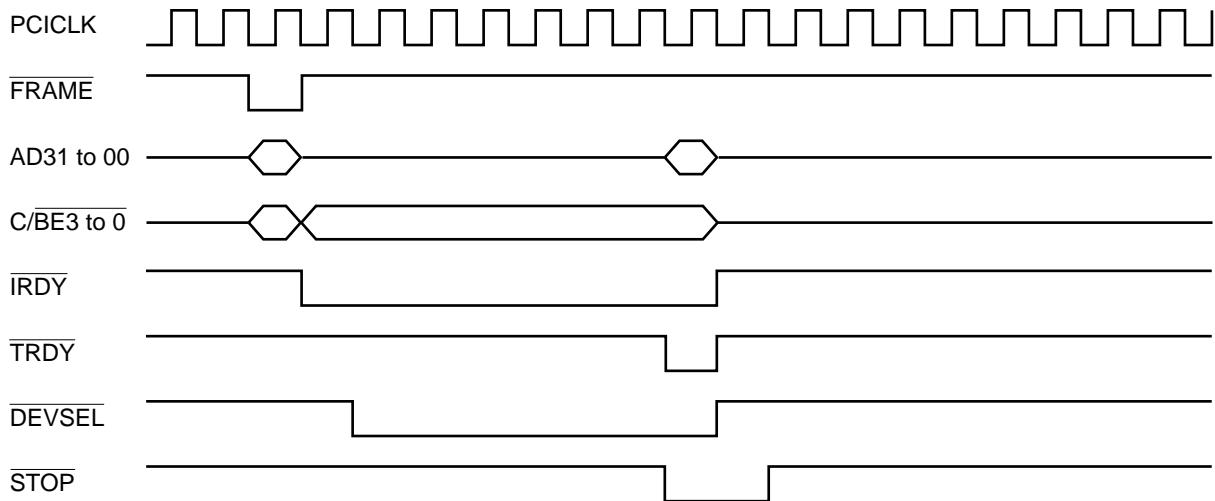

Burst read (target termination)

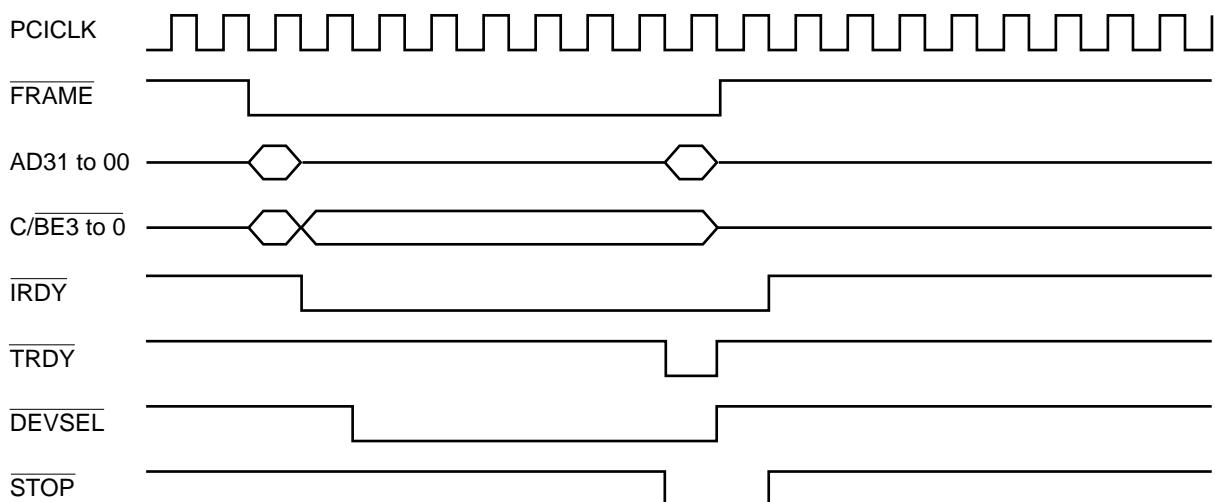


Note: For the read operation of BASIC control registers, only one data transfer possible.

When a master device executes the burst transfer, a target device asserts STOP signal and performs the target termination.

# MB86606


## (5) Target mode – I/O, memory read timing (except BASIC control registers)

- Byte, word access

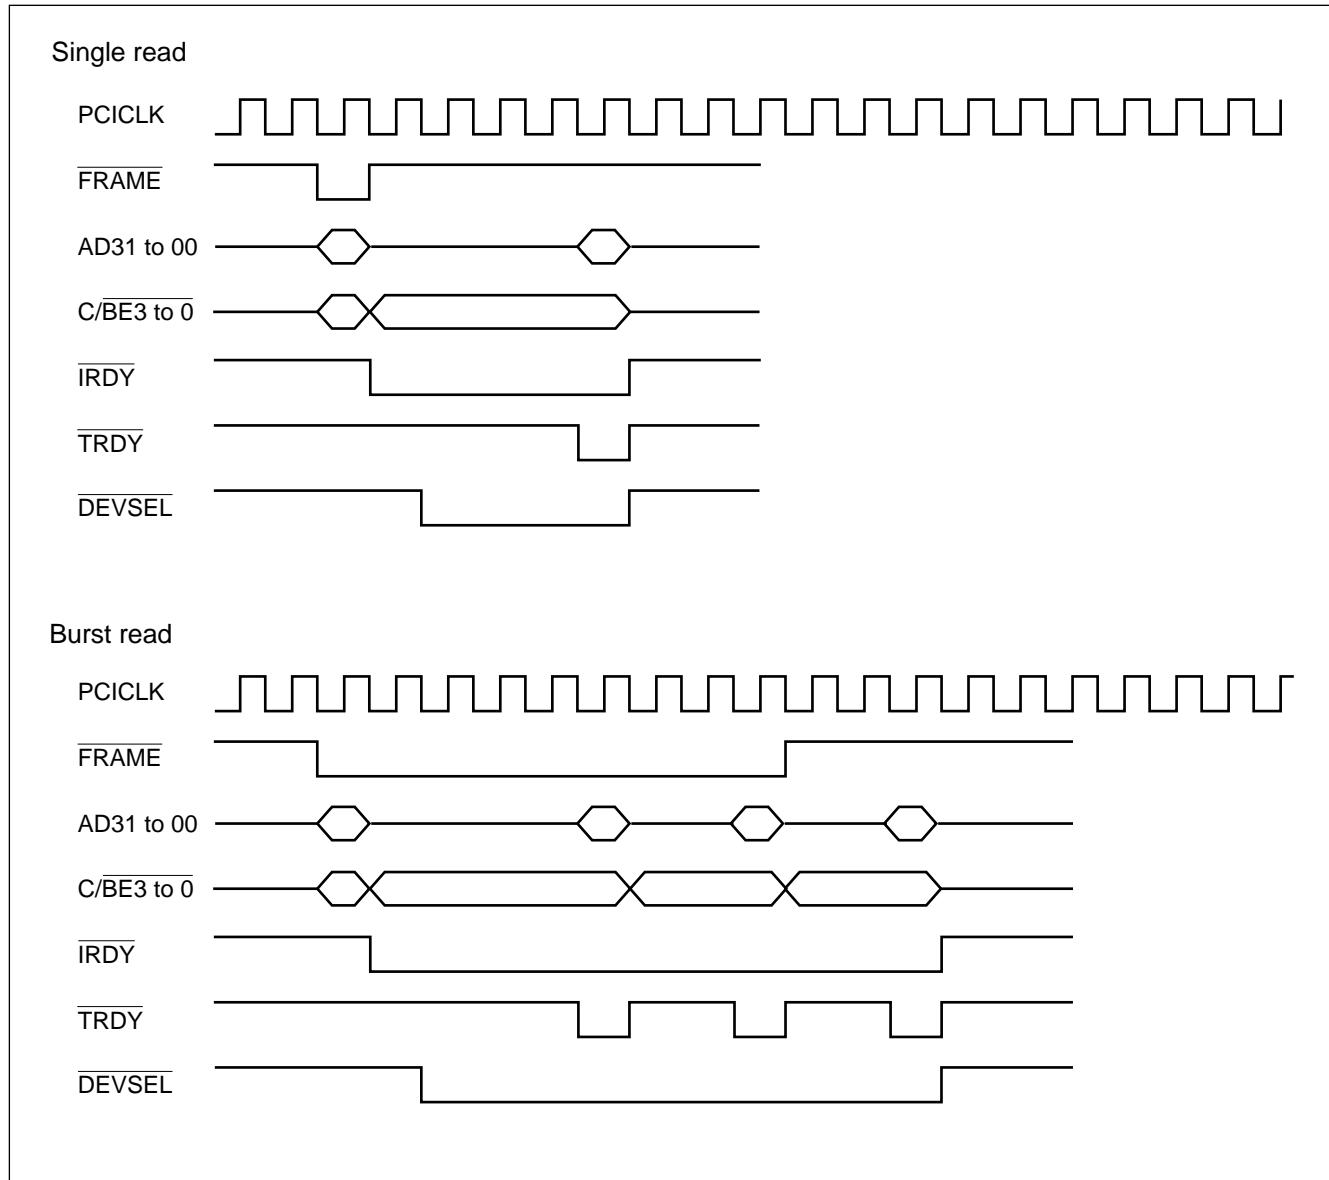


- Long-word access

Single read

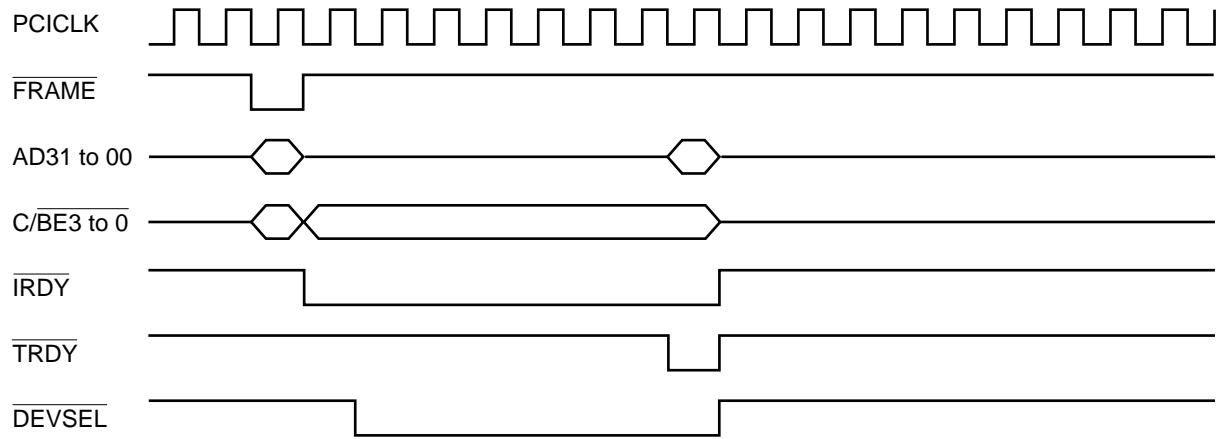


Burst read

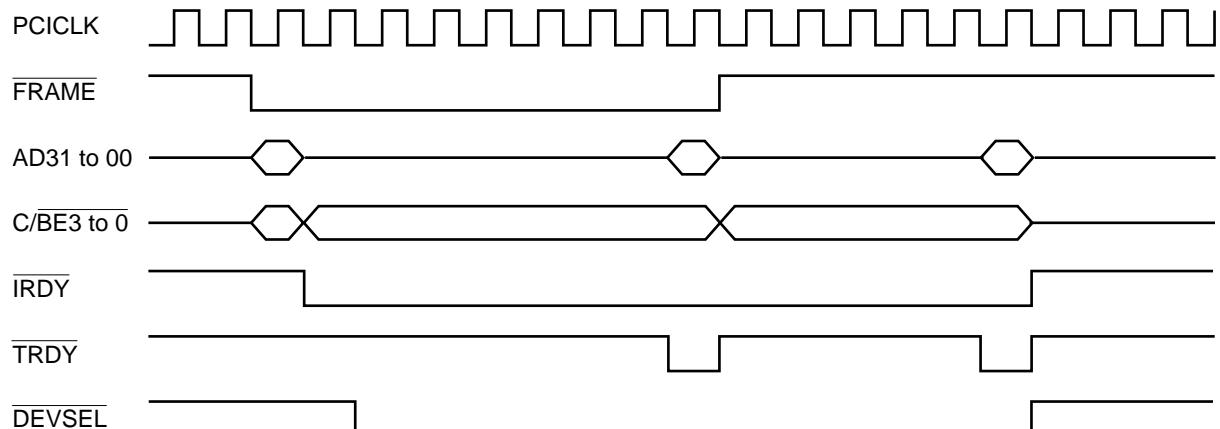

# MB86606


## (6) Target Mode – I/O, memory write timing

- Byte, word access

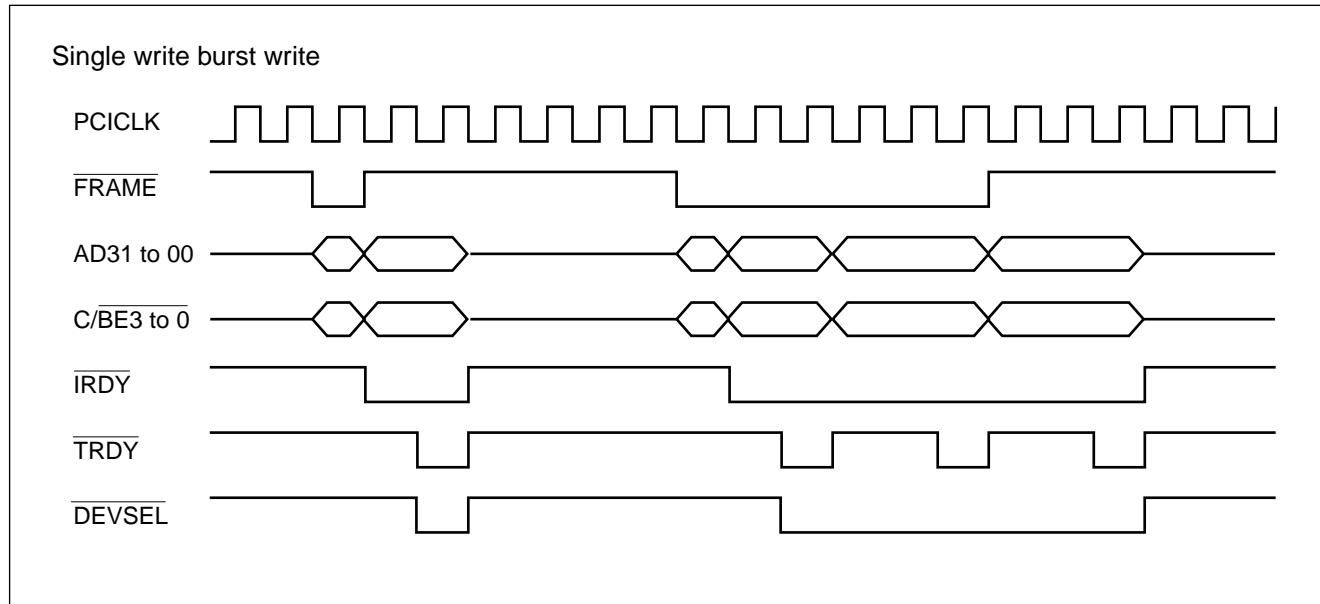


- Long-word access

Single write

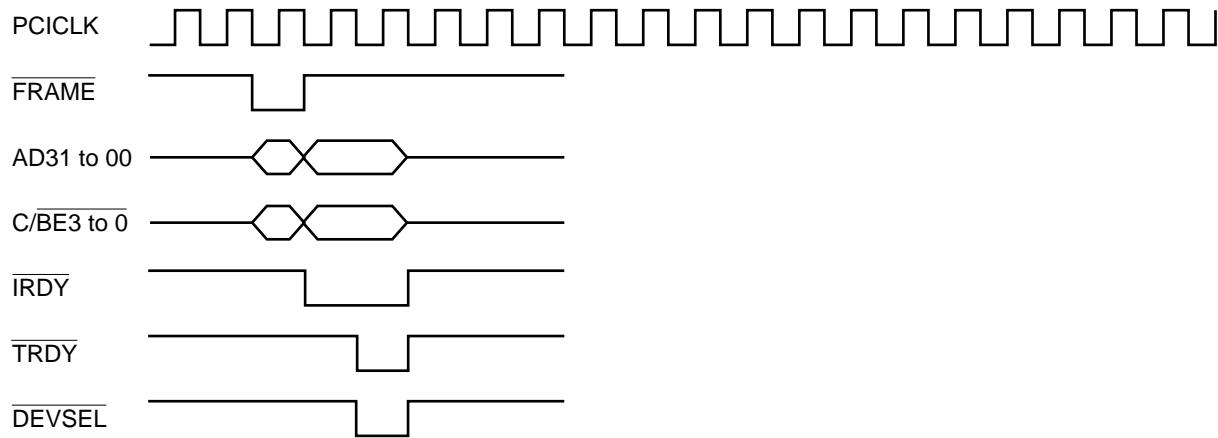


Burst write

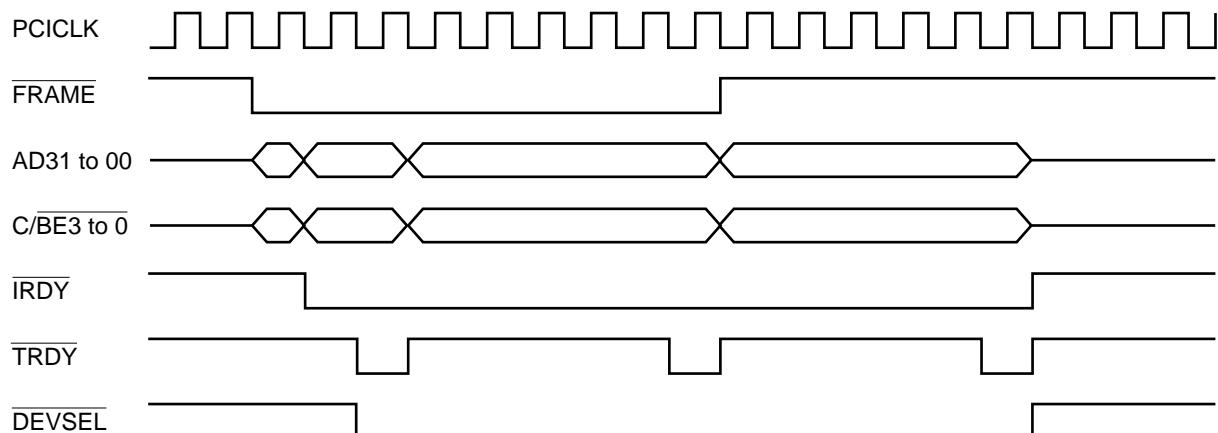


# MB86606

## (7) Data read timing (master mode)


- Burst length = 1 and 4

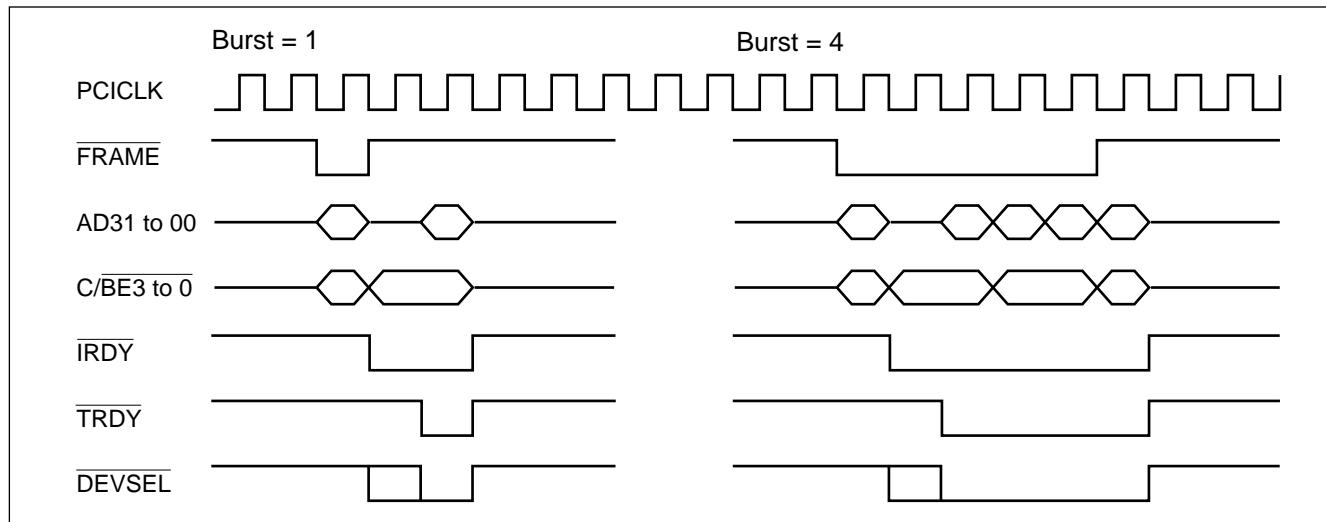

- Burst length = 8

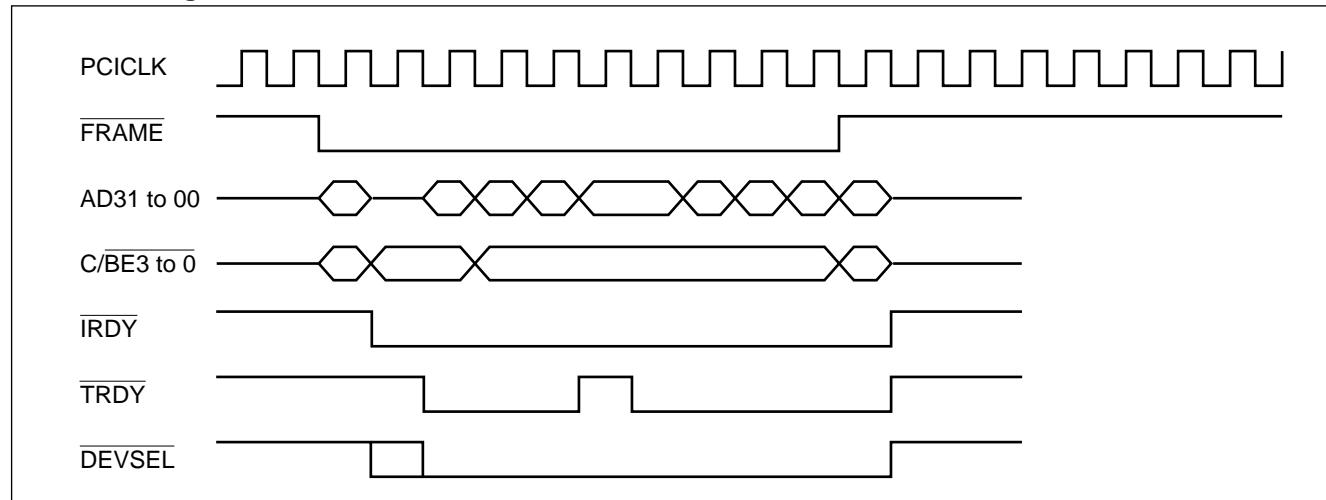


- Burst length = 16

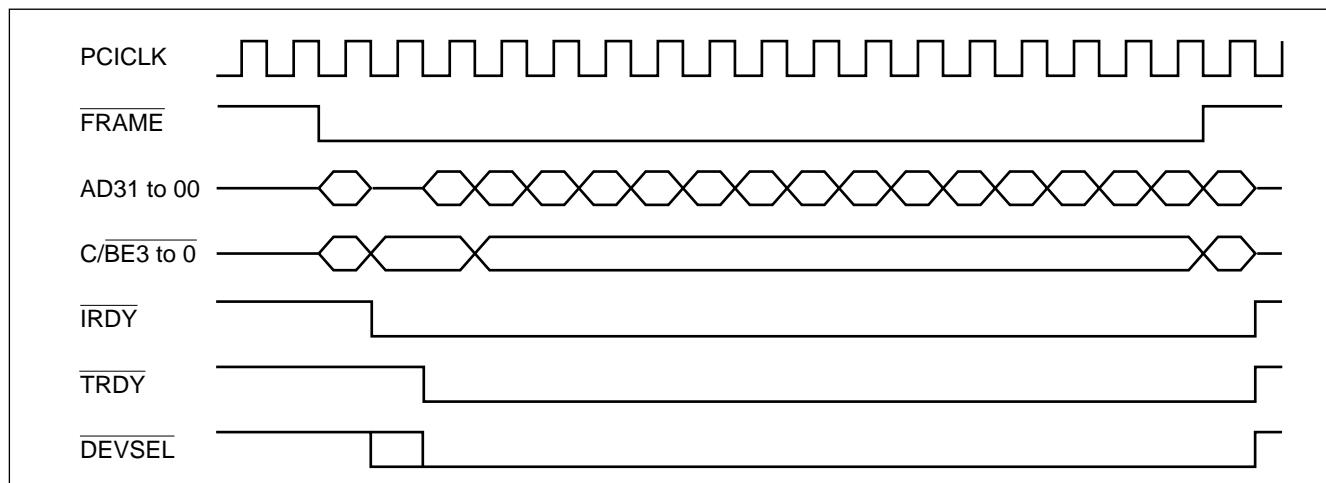


**(8) Data write timing (master mode)**


- **Burst length = 1 and 4**

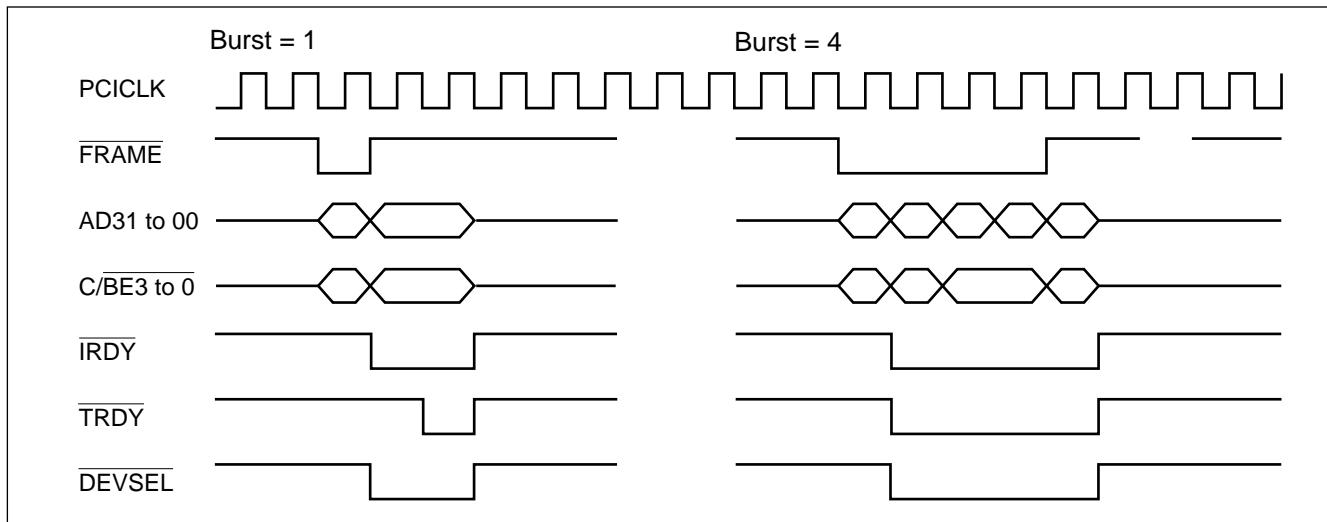

- **Burst length = 8**

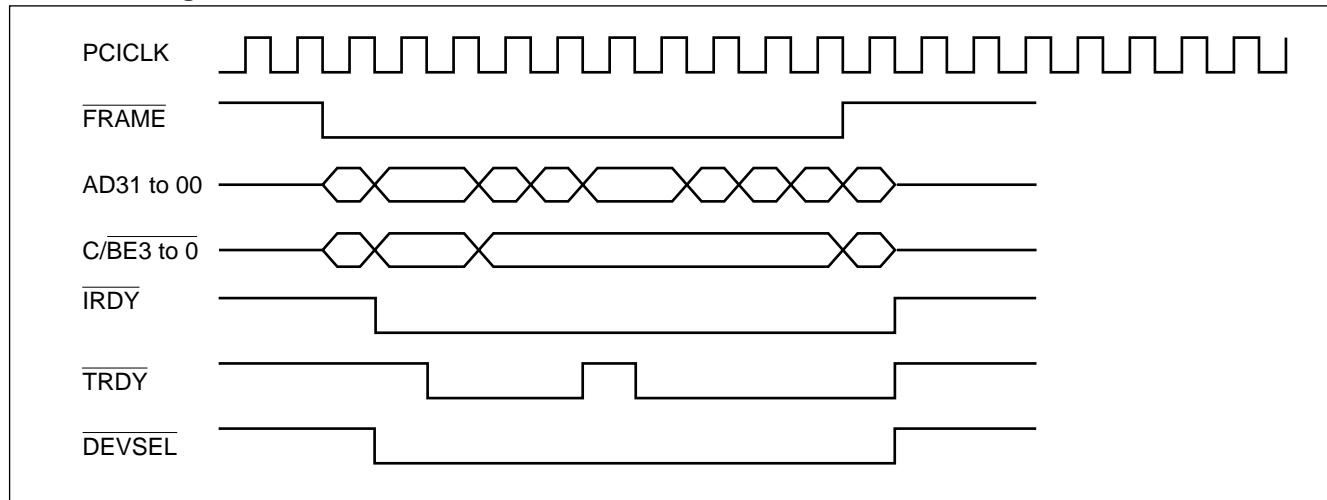

- **Burst length = 16**

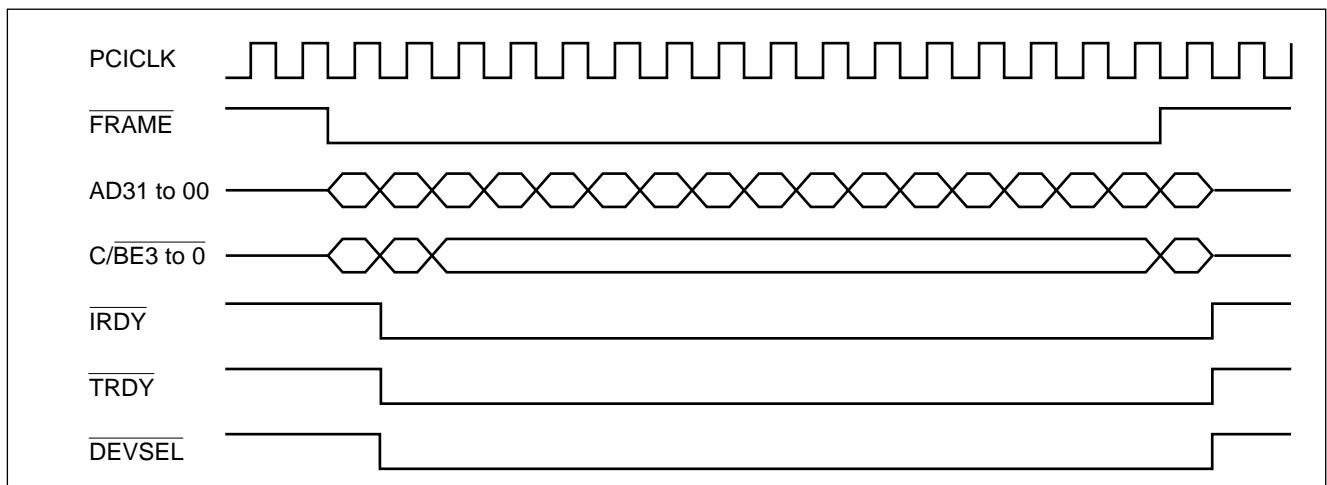

# MB86606

## 8. SCSI Interface


### (1) Initiator asynchronous input timing (target → initiator)

Parameter	Symbol	Value		Unit
		Min.	Max.	
ACK set Low → $\overline{\text{REQ}}$ set High	tAOLR	0	—	ns
$\overline{\text{REQ}}$ set High → ACK set High	tRAOH	—	60	ns
ACK set High → $\overline{\text{REQ}}$ set Low	tAOHR	10	—	ns
Data bus valid → $\overline{\text{REQ}}$ set Low	tDTSU	10	—	ns
$\overline{\text{REQ}}$ set Low → data bus hold time	tDHLD	20	—	ns
$\overline{\text{REQ}}$ set Low → ACK set Low	tRAOL	—	40	ns
$\overline{\text{REQ}}$ set High → ACK set Low*	tRACY	—	3 tCLF +40	ns

\* : tRACY ( $\overline{\text{REQ}}$  set High → ACK set Low) is defined as either longer time of (tRAOH + tAOHR + tRAOL) or tRACY itself

Note: Time requirements in this section do not apply in the following cases;

- When data register FULL in data phase
- When last byte transferred

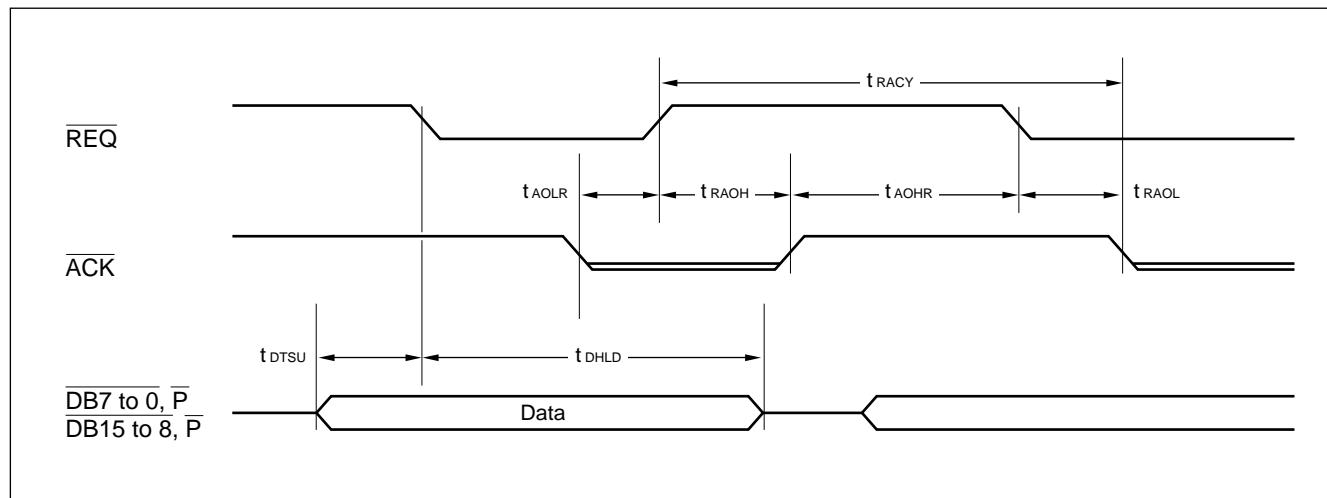


## (2) Initiator asynchronous output timing (initiator → target)

Parameter	Symbol	Value		Unit
		Min.	Max.	
ACK set Low → $\overline{\text{REQ}}$ set High	tAOLR	0	—	ns
$\overline{\text{REQ}}$ set High → ACK set High	tRAOH	—	60	ns
ACK set High → $\overline{\text{REQ}}$ set Low	tAOHR	10	—	ns
Data bus output defined → ACK set Low*	tDVLD	S•tCLF-10	—	ns
$\overline{\text{REQ}}$ set High → data bus hold time	tDIVD	2 tCLF	—	ns
$\overline{\text{REQ}}$ set Low → ACK set Low	tRAOL	—	40	ns

\* : The value of S varies with the setting condition of the asynchronous setup time register (address 17h).

Note: This output timing regulations are not applicable when the data register is EMPTY in the data phase.

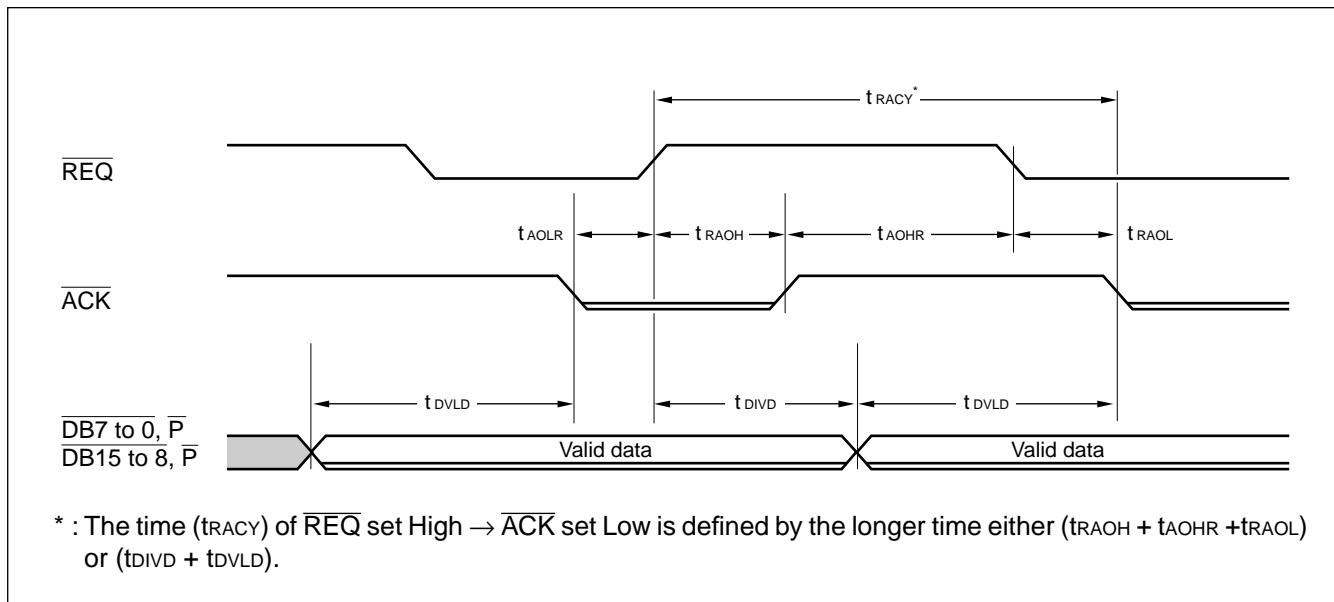


# MB86606

### (3) Initiator synchronous transfer $\overline{\text{REQ}}/\overline{\text{ACK}}$ timing


Parameter	Symbol	Value		Unit
		Min.	Max.	
ACK Assertion Period*	$t_{AKAP}$	$A \cdot t_{CLF} - 4$	—	ns
ACK Negation Period*	$t_{ANAP}$	$N \cdot t_{CLF} - 6$	—	ns
REQ Assertion Period	$t_{RQAP}$	20	—	ns
REQ Negation Period	$t_{RNAP}$	20	—	ns
REQ input cycle time (1)	$t_{RQF1}$	1 $t_{CLF}$	—	ns
REQ input cycle time (2)	$t_{RQF2}$	3 $t_{CLF}$	—	ns

\* : The values of A and N vary with the setting condition of the transfer period register (address 0Ch).

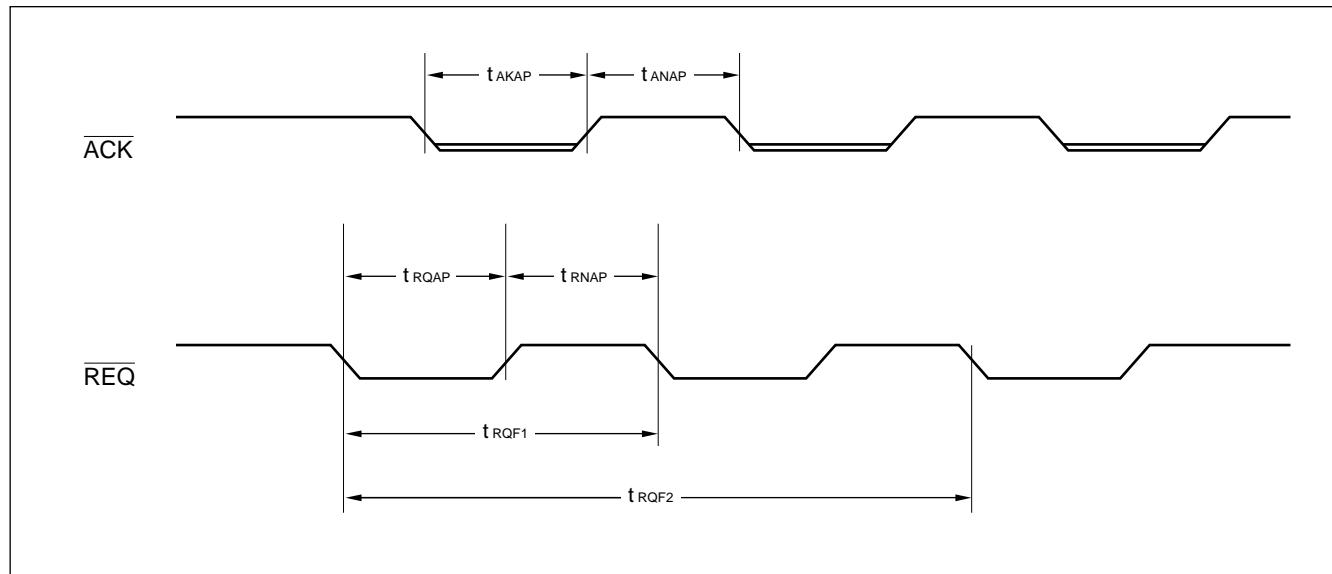

## (4) Initiator synchronous transfer input timing (target → initiator)


Parameter	Symbol	Value		Unit
		Min.	Max.	
Data bus defined → $\overline{\text{REQ}}$ set Low	$t_{DTSU}$	5	—	ns
$\overline{\text{REQ}}$ set Low → data bus hold time	$t_{DHLD}$	15	—	ns

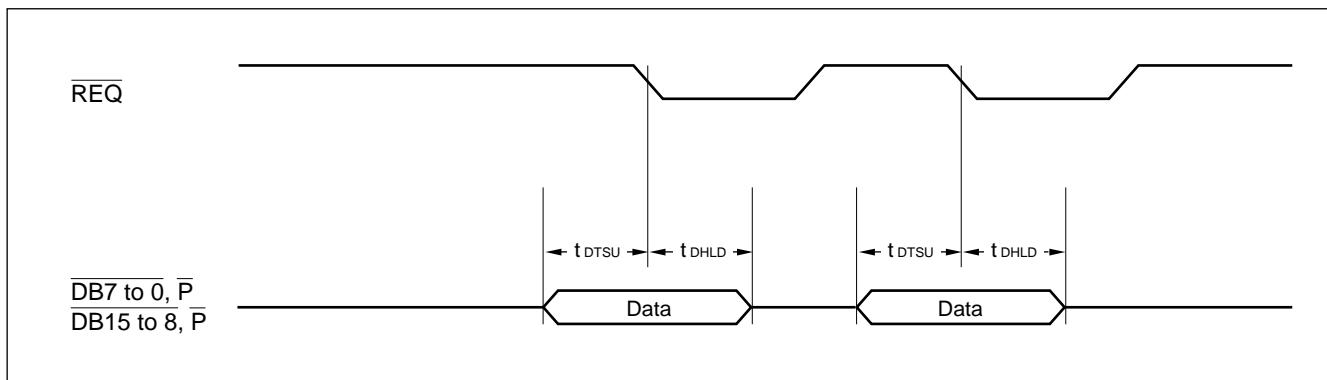

## (5) Initiator synchronous transfer output timing (initiator → target)

Parameter	Symbol	Value		Unit
		Min.	Max.	
Data bus defined → $\overline{\text{ACK}}$ set Low*	$t_{DVAK}$	$N \cdot t_{CLF} - 10$	—	ns
$\overline{\text{ACK}}$ set Low → data bus hold time*	$t_{AKDH}$	$A \cdot t_{CLF} - 5$	—	ns

\* : The values of A and N vary with the setting condition of the transfer period register (address 0Ch).

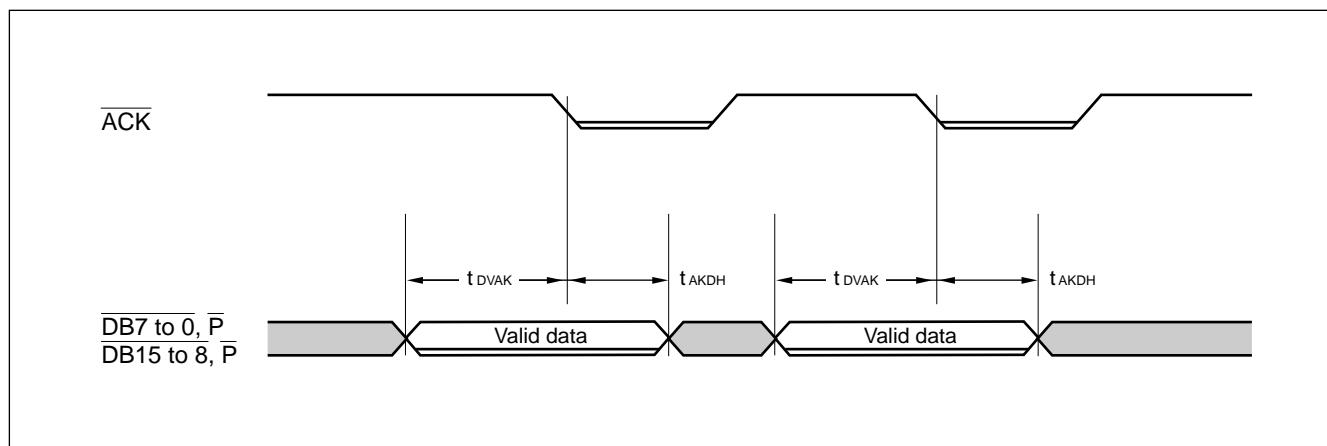


# MB86606

## (6) Target asynchronous input timing (initiator → target)

Parameter	Symbol	Value		Unit
		Min.	Max.	
REQ set Low → ACK set Low	tROLA	0	—	ns
ACK set Low → REQ set High	tAROH	—	60	ns
REQ set High → ACK set High	tROHA	0	—	ns
Data bus defined → ACK set Low	tDTSU	10	—	ns
ACK set Low → data bus hold time	tDHLD	20	—	ns
ACK set High → REQ set Low	tAROL	—	40	ns
ACK set Low → REQ set Low*	tRACY	—	3 tCLF + 40	ns

\* : tRACY (ACK set Low → REQ set Low) is defined as either longer time of (tAROH + tROHA + tAROL) or tRACY itself

Note: The input timing regulations are not applicable when the data register is FULL in the data phase.

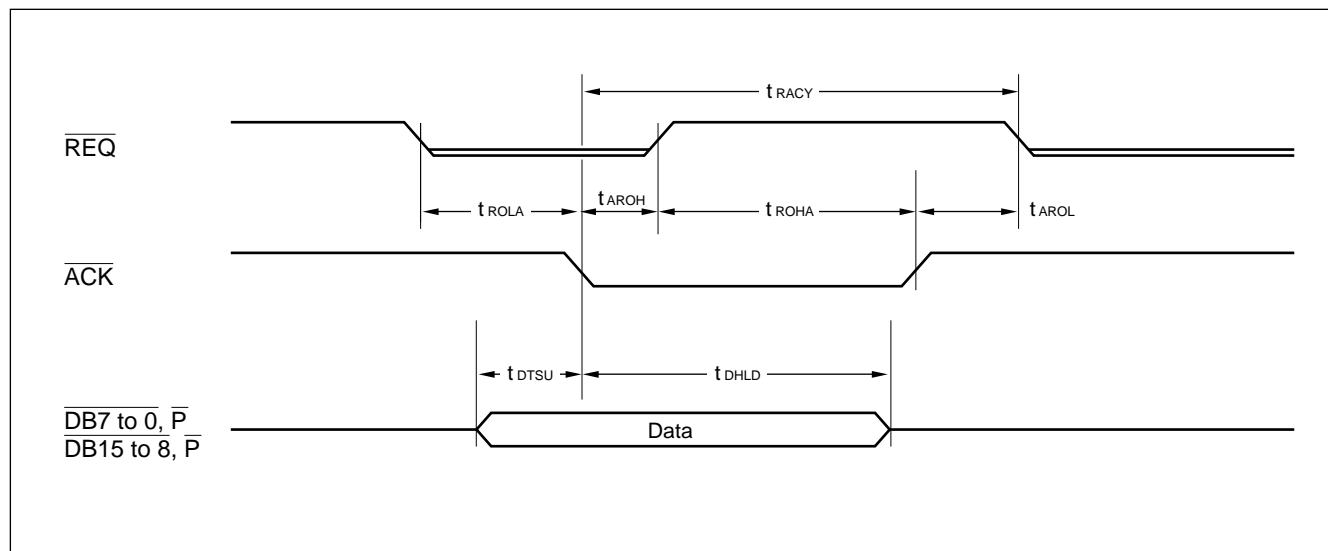


## (7) Target asynchronous input timing (target → initiator)

Parameter	Symbol	Value		Unit
		Min.	Max.	
REQ set Low → ACK set Low	tROLA	0	—	ns
ACK set Low → REQ set High	tAROH	—	60	ns
REQ set High → ACK set High	tROHA	0	—	ns
Data bus defined → REQ set Low*	tDVLD	S•tCLF - 10	—	ns
ACK set Low → data bus hold time	tDIVD	2 tCLF	—	ns
ACK set High → REQ set Low	tAROL	—	40	ns

\* : The value of S varies with the setting condition of the asynchronous setup time register (address 17h).

Note: The output timing regulations are not applicable when the data register is EMPTY in the data phase.

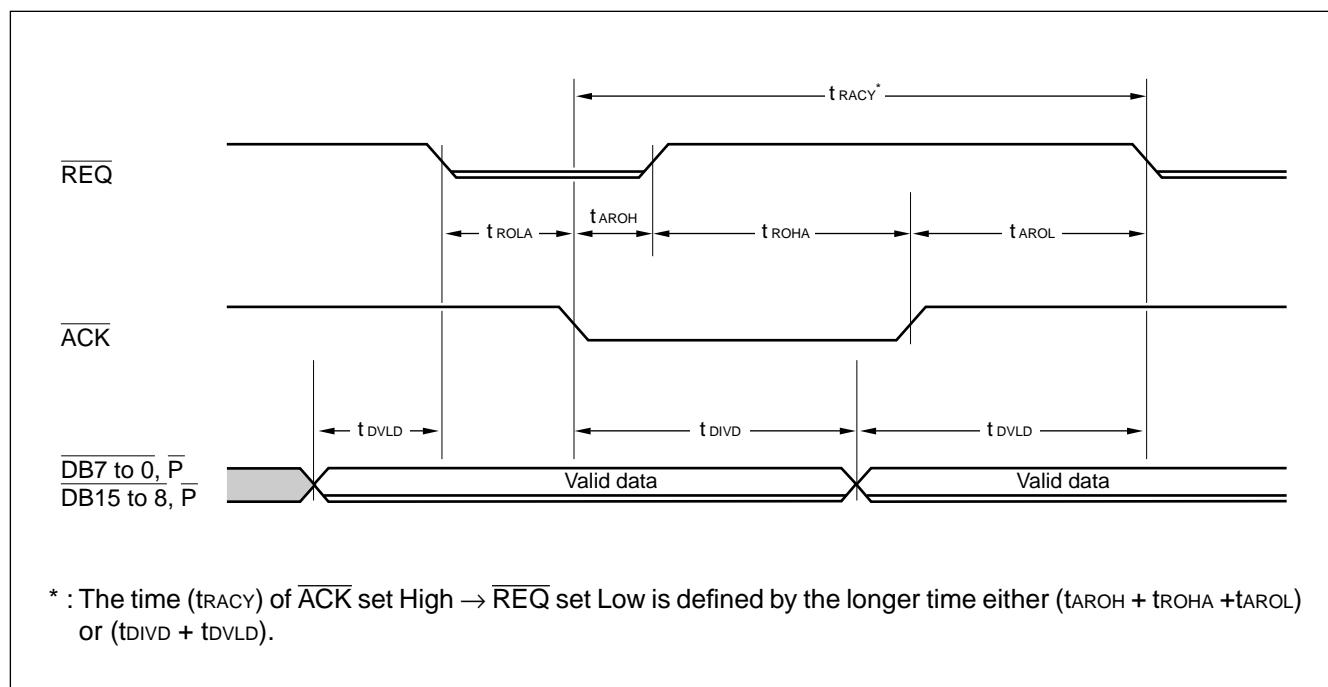


# MB86606

## (8) Target synchronous transfer REQ/ACK timing


Parameter	Symbol	Value		Unit
		Min.	Max.	
REQ Assertion Period*	$t_{RQAP}$	$A \cdot t_{CLF} - 4$	—	ns
REQ Negation Period*	$t_{RNAP}$	$N \cdot t_{CLF} - 6$	—	ns
ACK Assertion Period	$t_{AKAP}$	20	—	ns
ACK Negation Period	$t_{ANAP}$	20	—	ns
ACK input cycle time (1)	$t_{AKF1}$	$1 \cdot t_{CLF}$	—	ns
ACK input cycle time (2)	$t_{AKF2}$	$3 \cdot t_{CLF}$	—	ns

\* : The values of A and N vary with the setting condition of the transfer period register (address 0Ch).

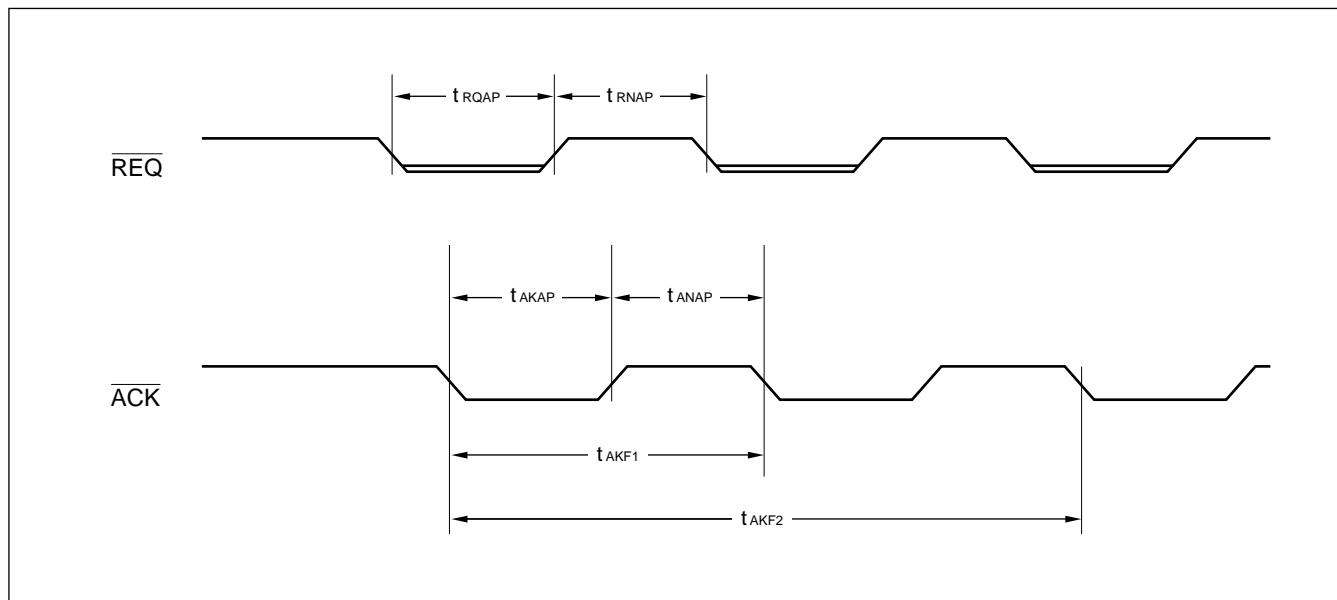

## (9) Target synchronous transfer input timing (initiator → target)


Parameter	Symbol	Value		Unit
		Min.	Max.	
Data bus defined → ACK set Low	tDTSU	5	—	ns
ACK set Low → data bus hold time	tDHLD	15	—	ns

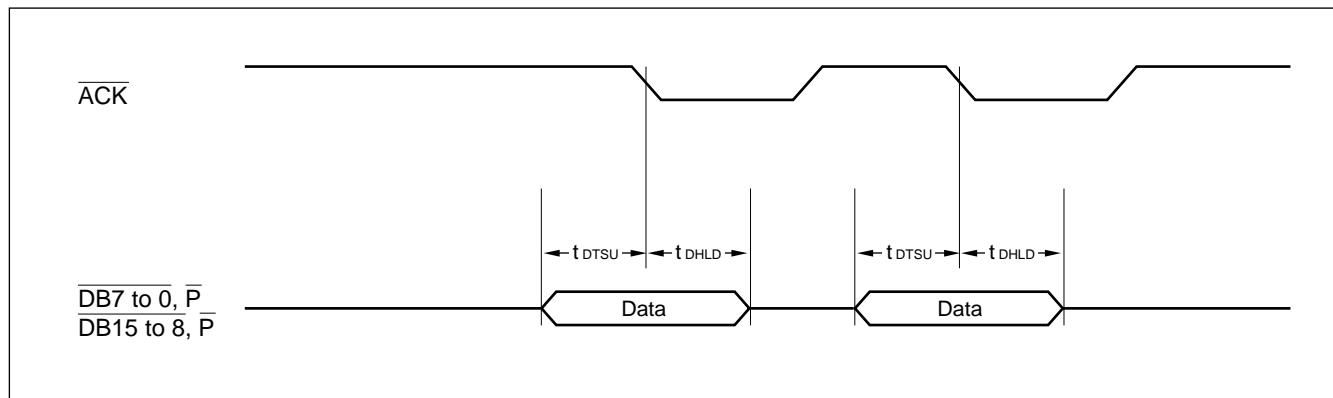

## (10) Target synchronous transfer output timing (target → initiator)

Parameter	Symbol	Value		Unit
		Min.	Max.	
Data bus defined → REQ set Low*	tDVRQ	N•tCLF – 10	—	ns
REQ set Low → data bus hold time*	tRQDH	A•tCLF – 5	—	ns

\* : The values of A and N vary with the setting condition of the transfer period register (address 0Ch).

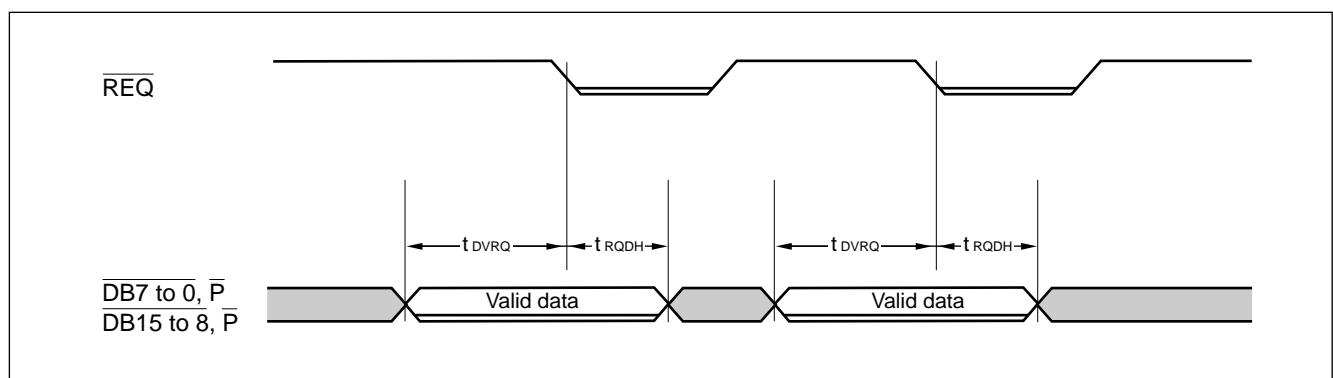

# MB86606

## (11) A, N, and S values in SCSI interface timing specifications

- Set value for transfer period register and A, N values

Transfer period register					A	N	Transfer period register					A	N
4	3	2	1	0			4	3	2	1	0		
0	0	0	0	1	(inhibited)	(inhibited)	1	0	0	0	1	9	8
0	0	0	1	0	1	1	1	0	0	1	0	9	9
0	0	0	1	1	2	1	1	0	0	1	1	10	9
0	0	1	0	0	2	2	1	0	1	0	0	10	10
0	0	1	0	1	3	2	1	0	1	0	1	11	10
0	0	1	1	0	3	3	1	0	1	1	0	11	11
0	0	1	1	1	4	3	1	0	1	1	1	12	11
0	1	0	0	0	4	4	1	1	0	0	0	12	12
0	1	0	0	1	5	4	1	1	0	0	1	13	12
0	1	0	1	0	5	5	1	1	0	1	0	13	13
0	1	0	1	1	6	5	1	1	0	1	1	14	13
0	1	1	0	0	6	6	1	1	1	0	0	14	14
0	1	1	0	1	7	6	1	1	1	0	1	15	14
0	1	1	1	0	7	7	1	1	1	1	0	15	15
0	1	1	1	1	8	7	1	1	1	1	1	16	15
1	0	0	0	0	8	8	0	0	0	0	0	16	16

Note: The A and N values in the register setting represent the assertion and negation periods (in clock-cycle units).  
The numerical value is applicable to the A and N values in AC characteristics.

- Set value for asynchronous setup time register and S value


Asynchronous setup time setting register				S
3	2	1	0	
0	0	0	1	1
0	0	1	0	2
0	0	1	1	3
0	1	0	0	4
0	1	0	1	5
0	1	1	0	6
0	1	1	1	7
1	0	0	0	8
1	0	0	1	9
1	0	1	0	10
1	0	1	1	11
1	1	0	0	12
1	1	0	1	13
1	1	1	0	14
1	1	1	1	15
0	0	0	0	16

Note: The S (setup time) value of the setup time setting register in asynchronous data transfer represents the time required to assert the REQ or ACK signal after setting data at the data bus (in clock-cycle units).  
The numerical value is applicable to the S value in AC characteristics.


# MB86606

## ■ SYSTEM CONFIGURATION

### 1. 80-Series Separate Bus Type

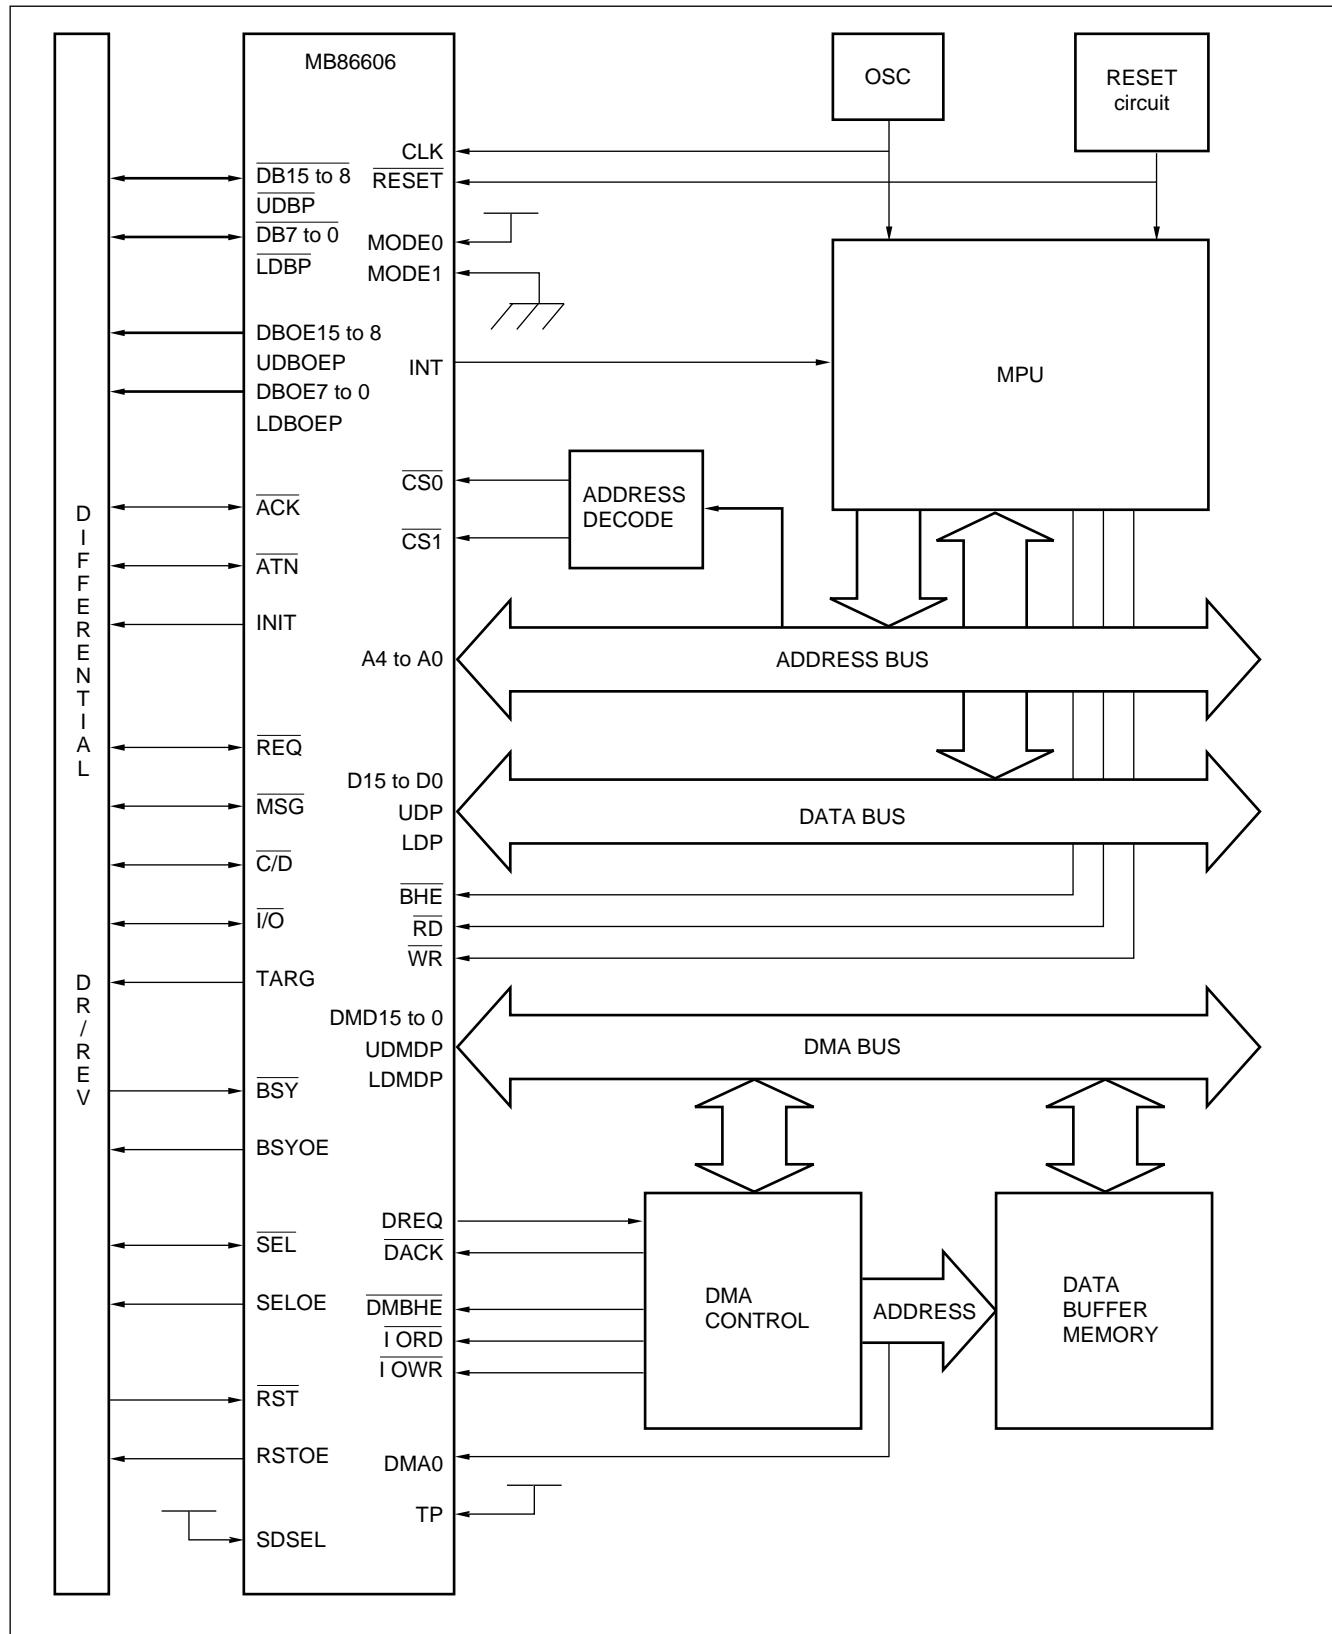


## 2. 68-Series Separate Bus Type

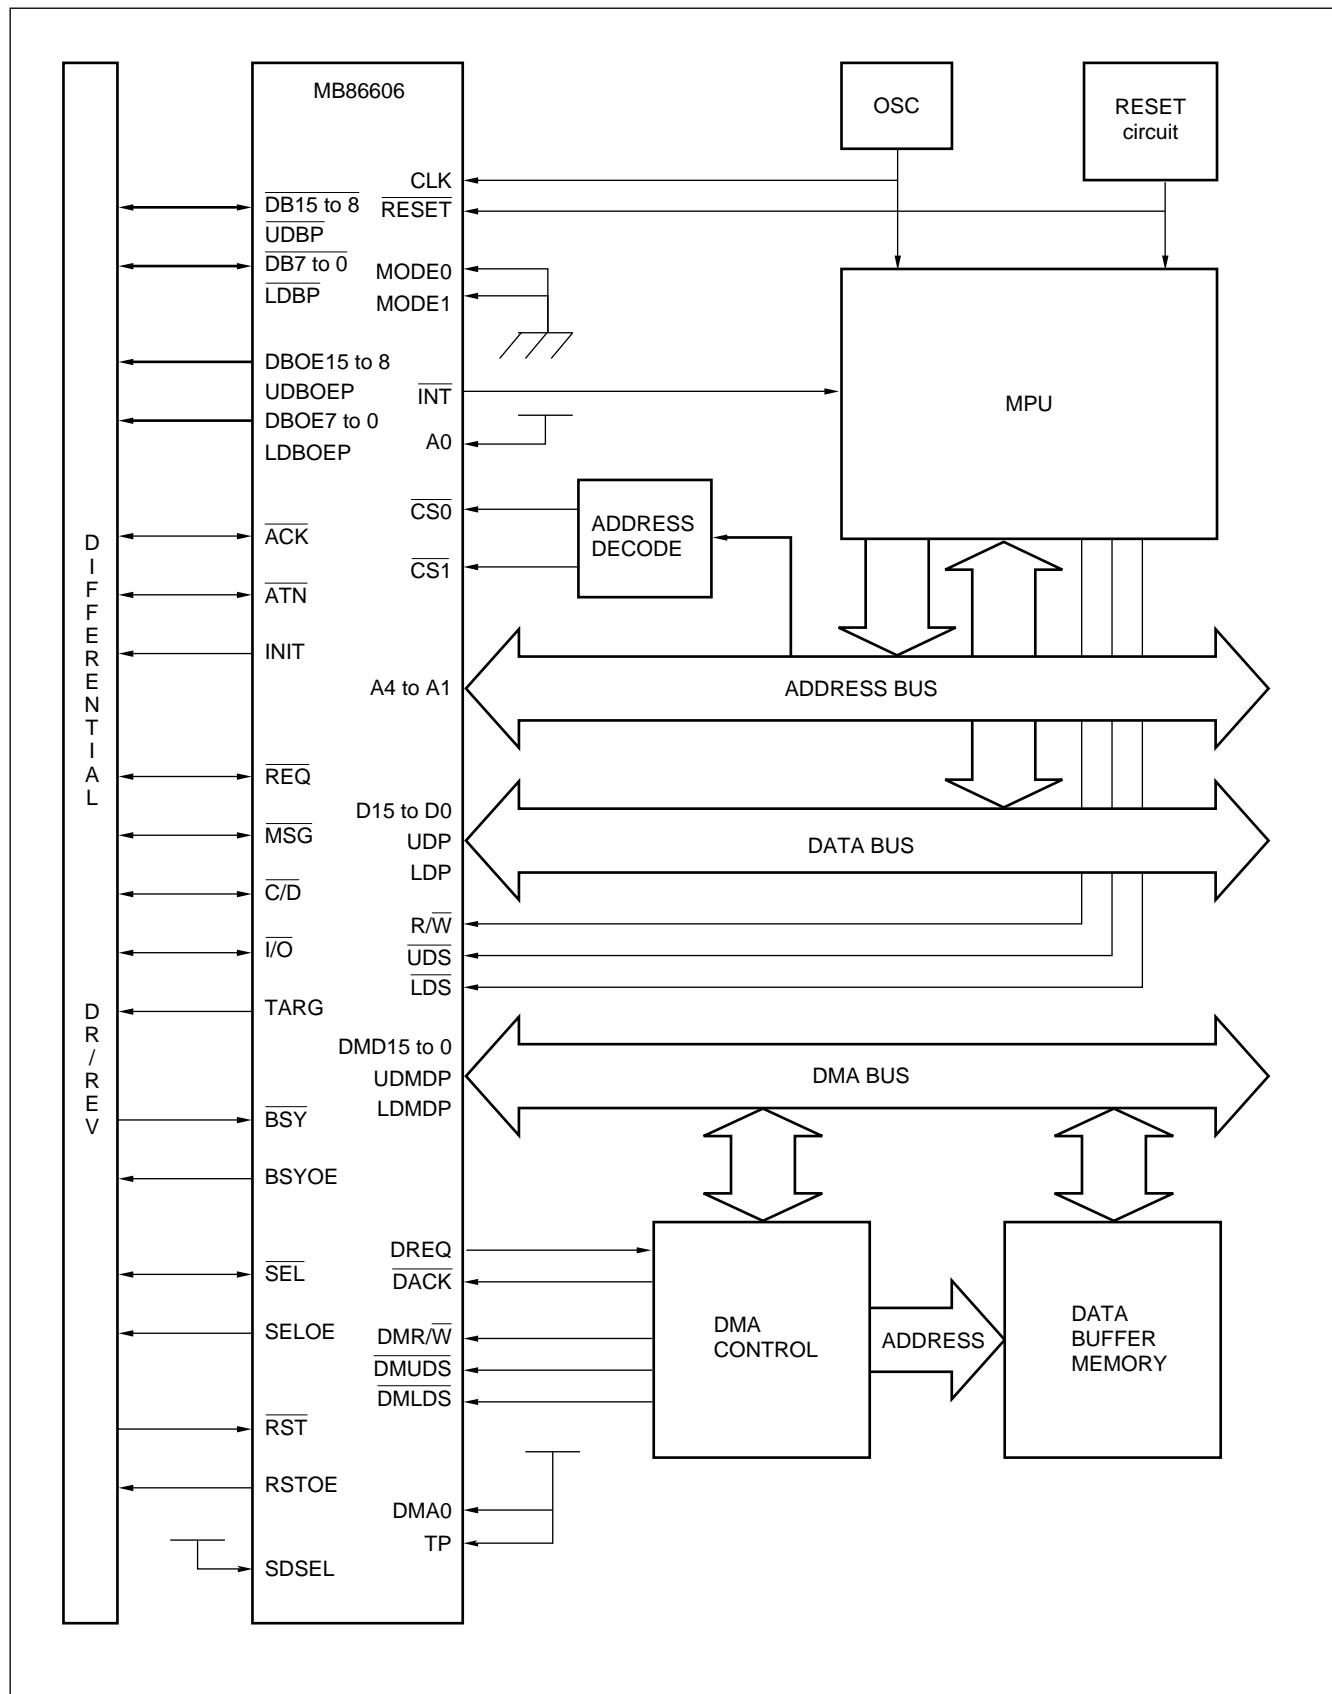


# MB86606

## 3. 80-Series Common Bus Type

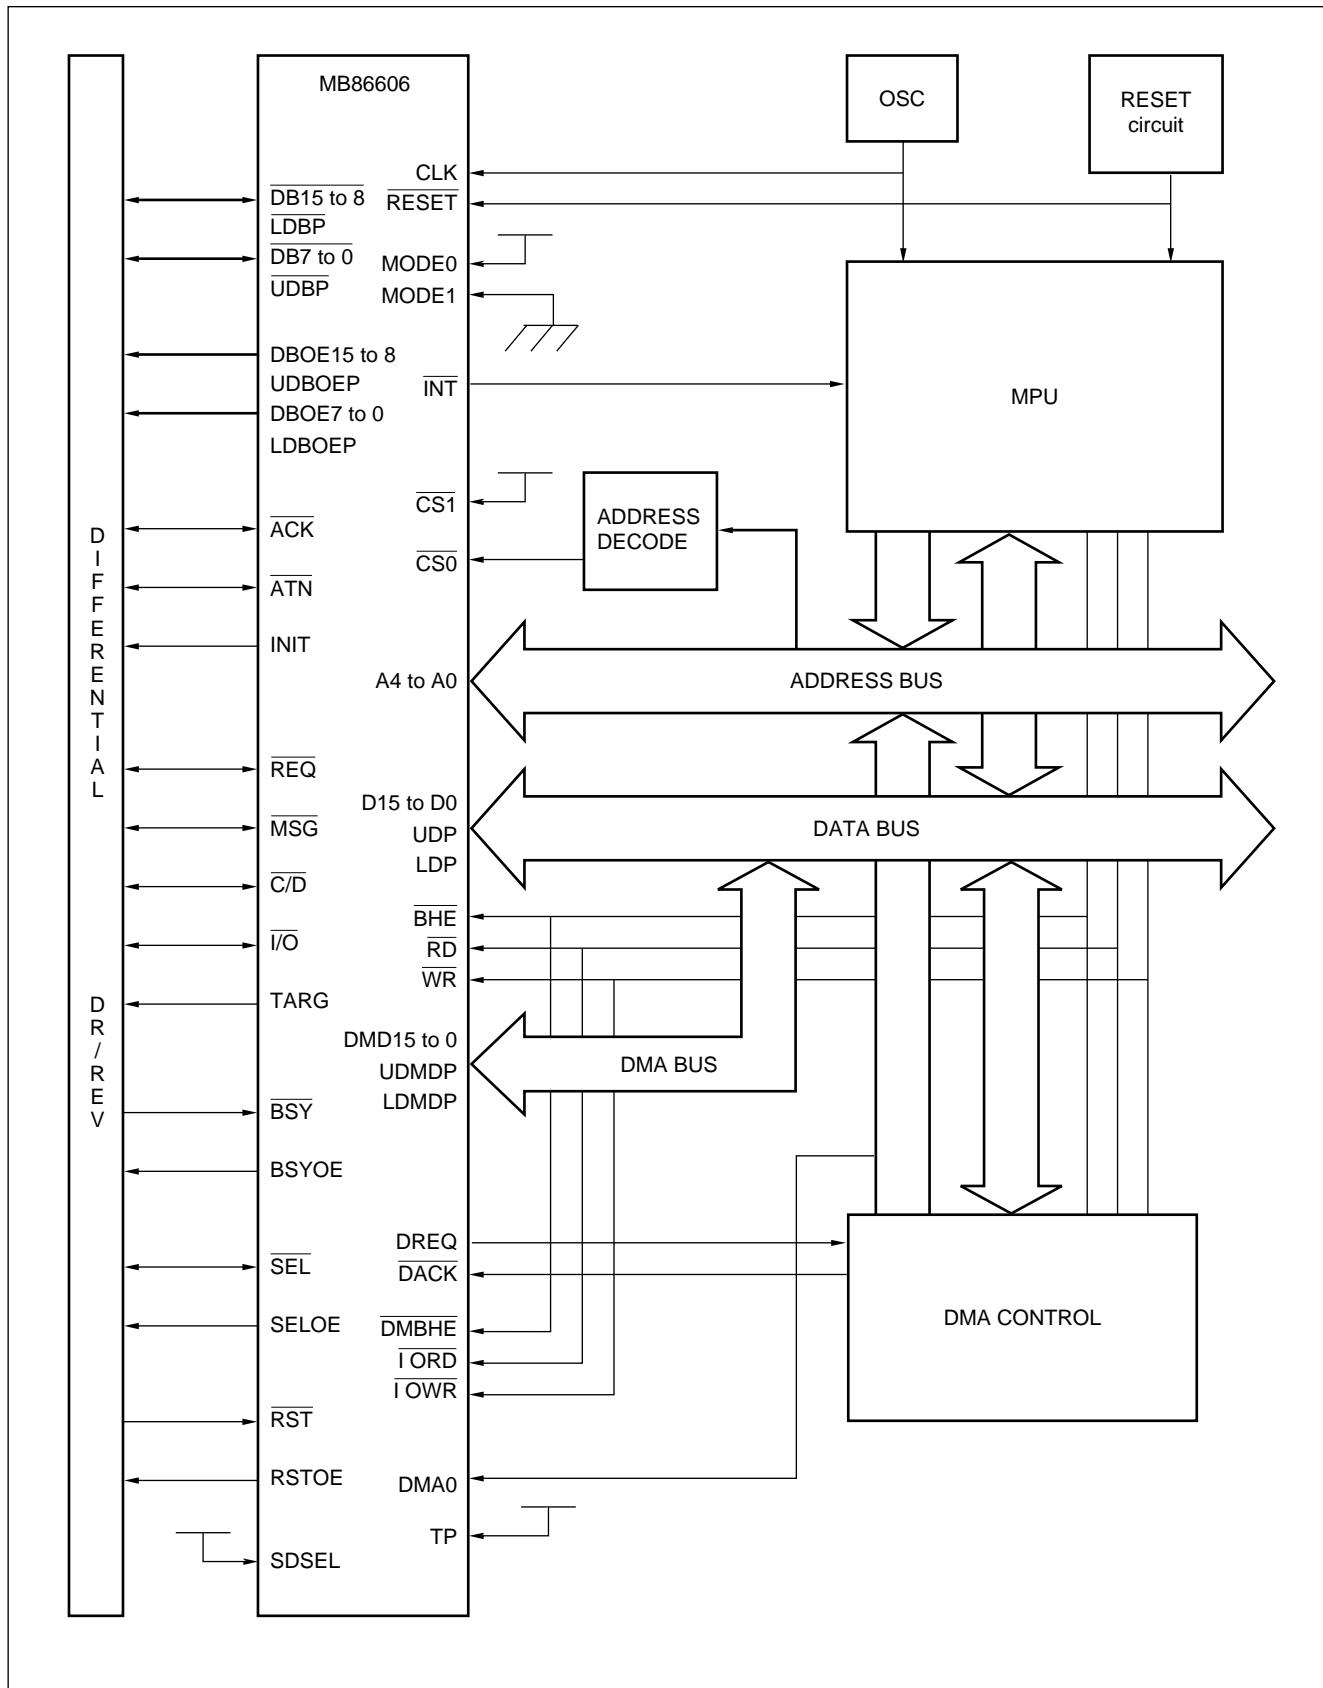



#### 4. 68-Series Common Bus Type

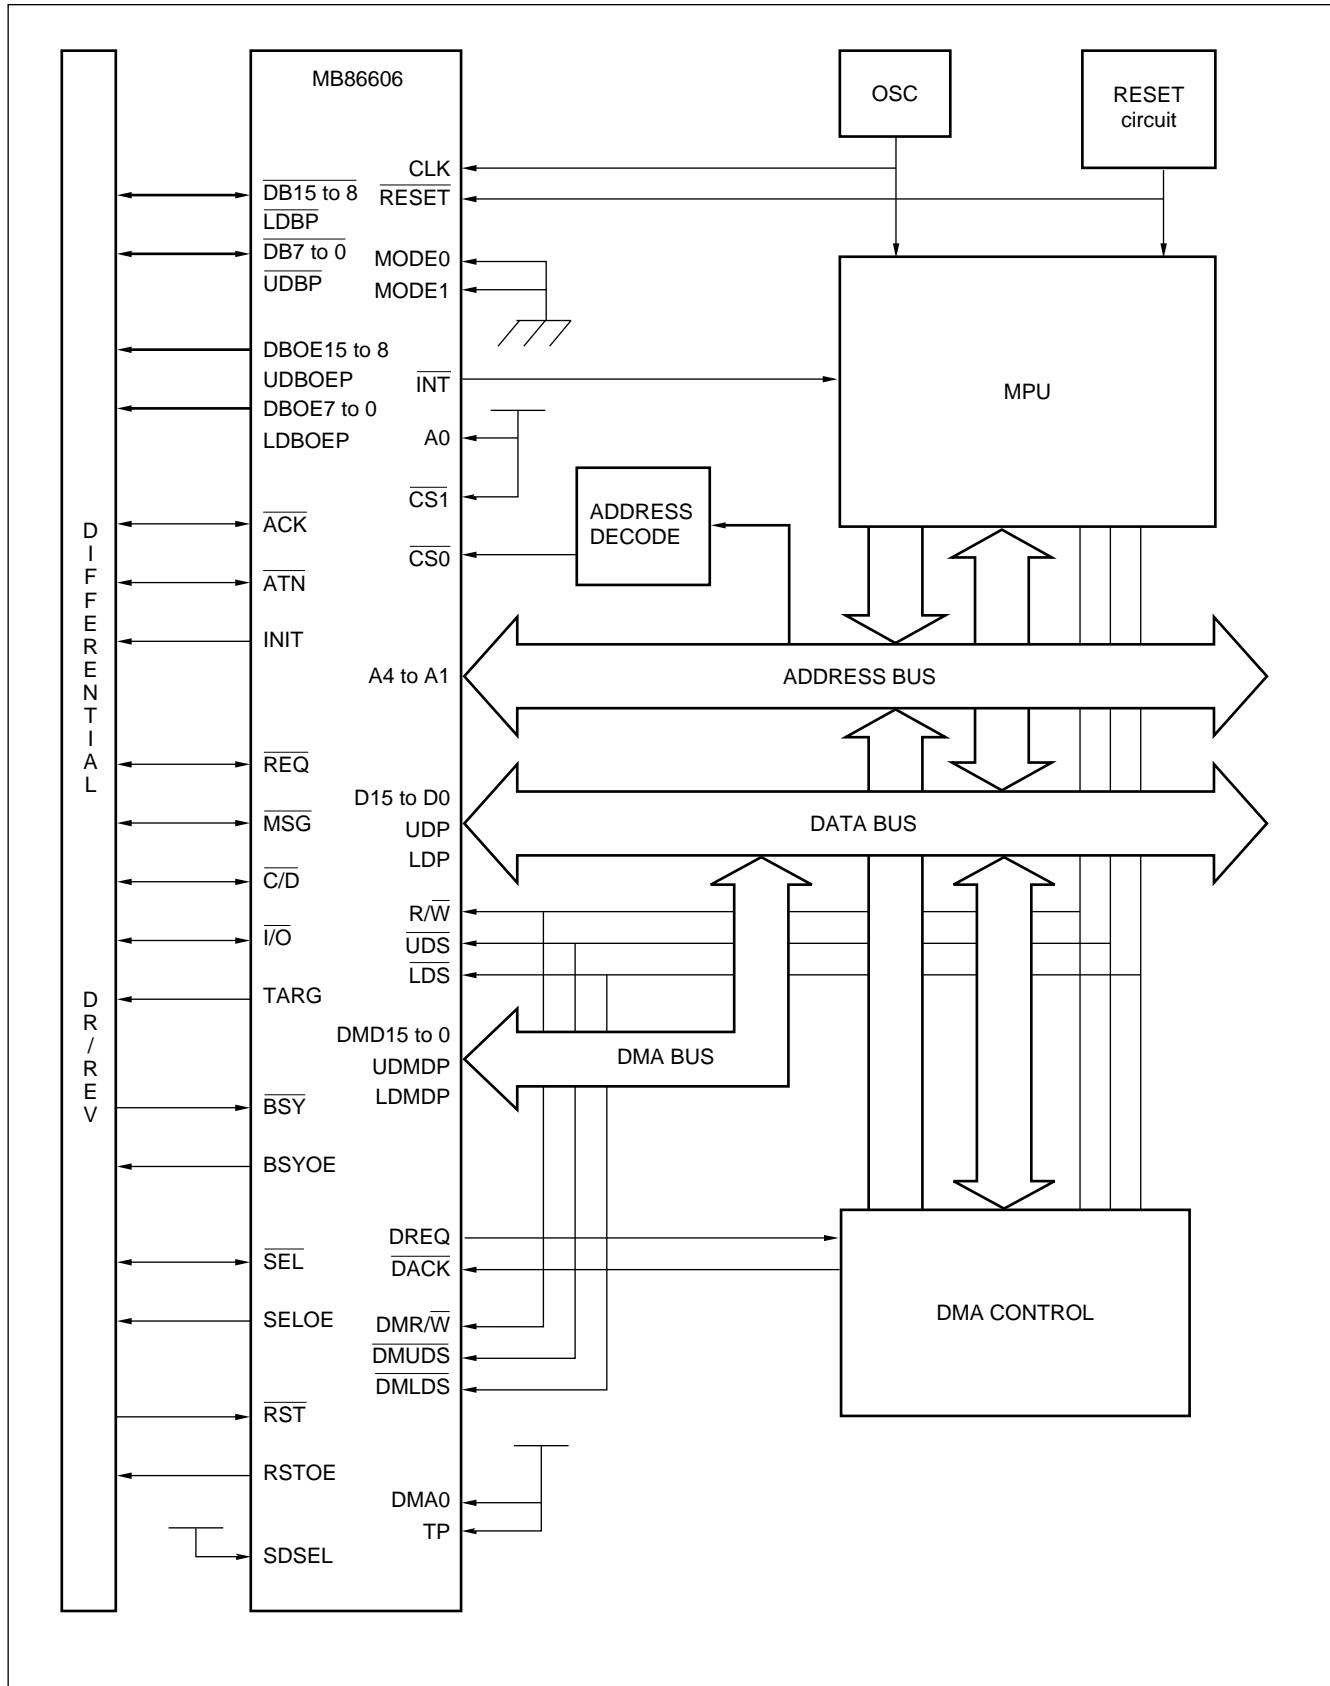

# MB86606

## 5. Example of Connection in Differential Mode (Example of Driver/Receiver Connection)

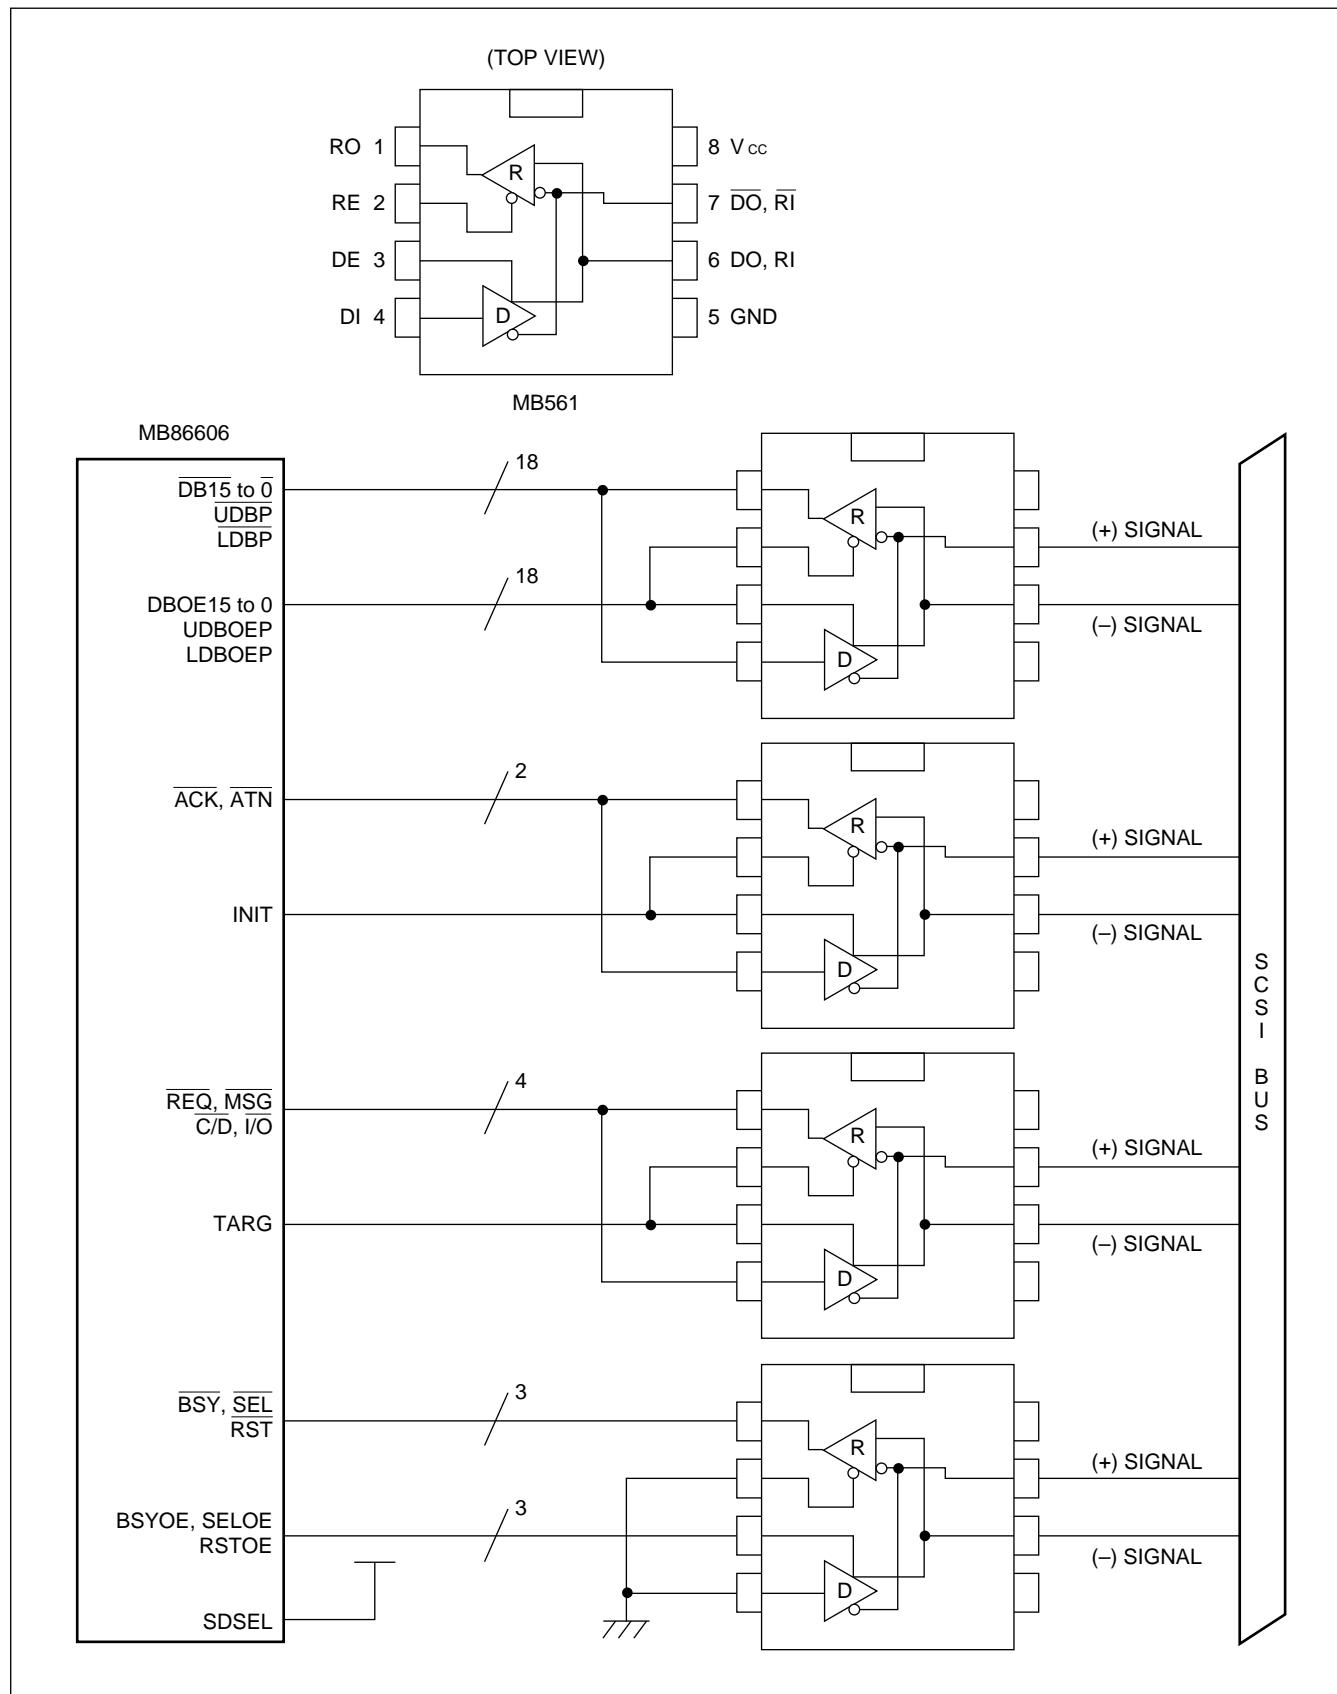

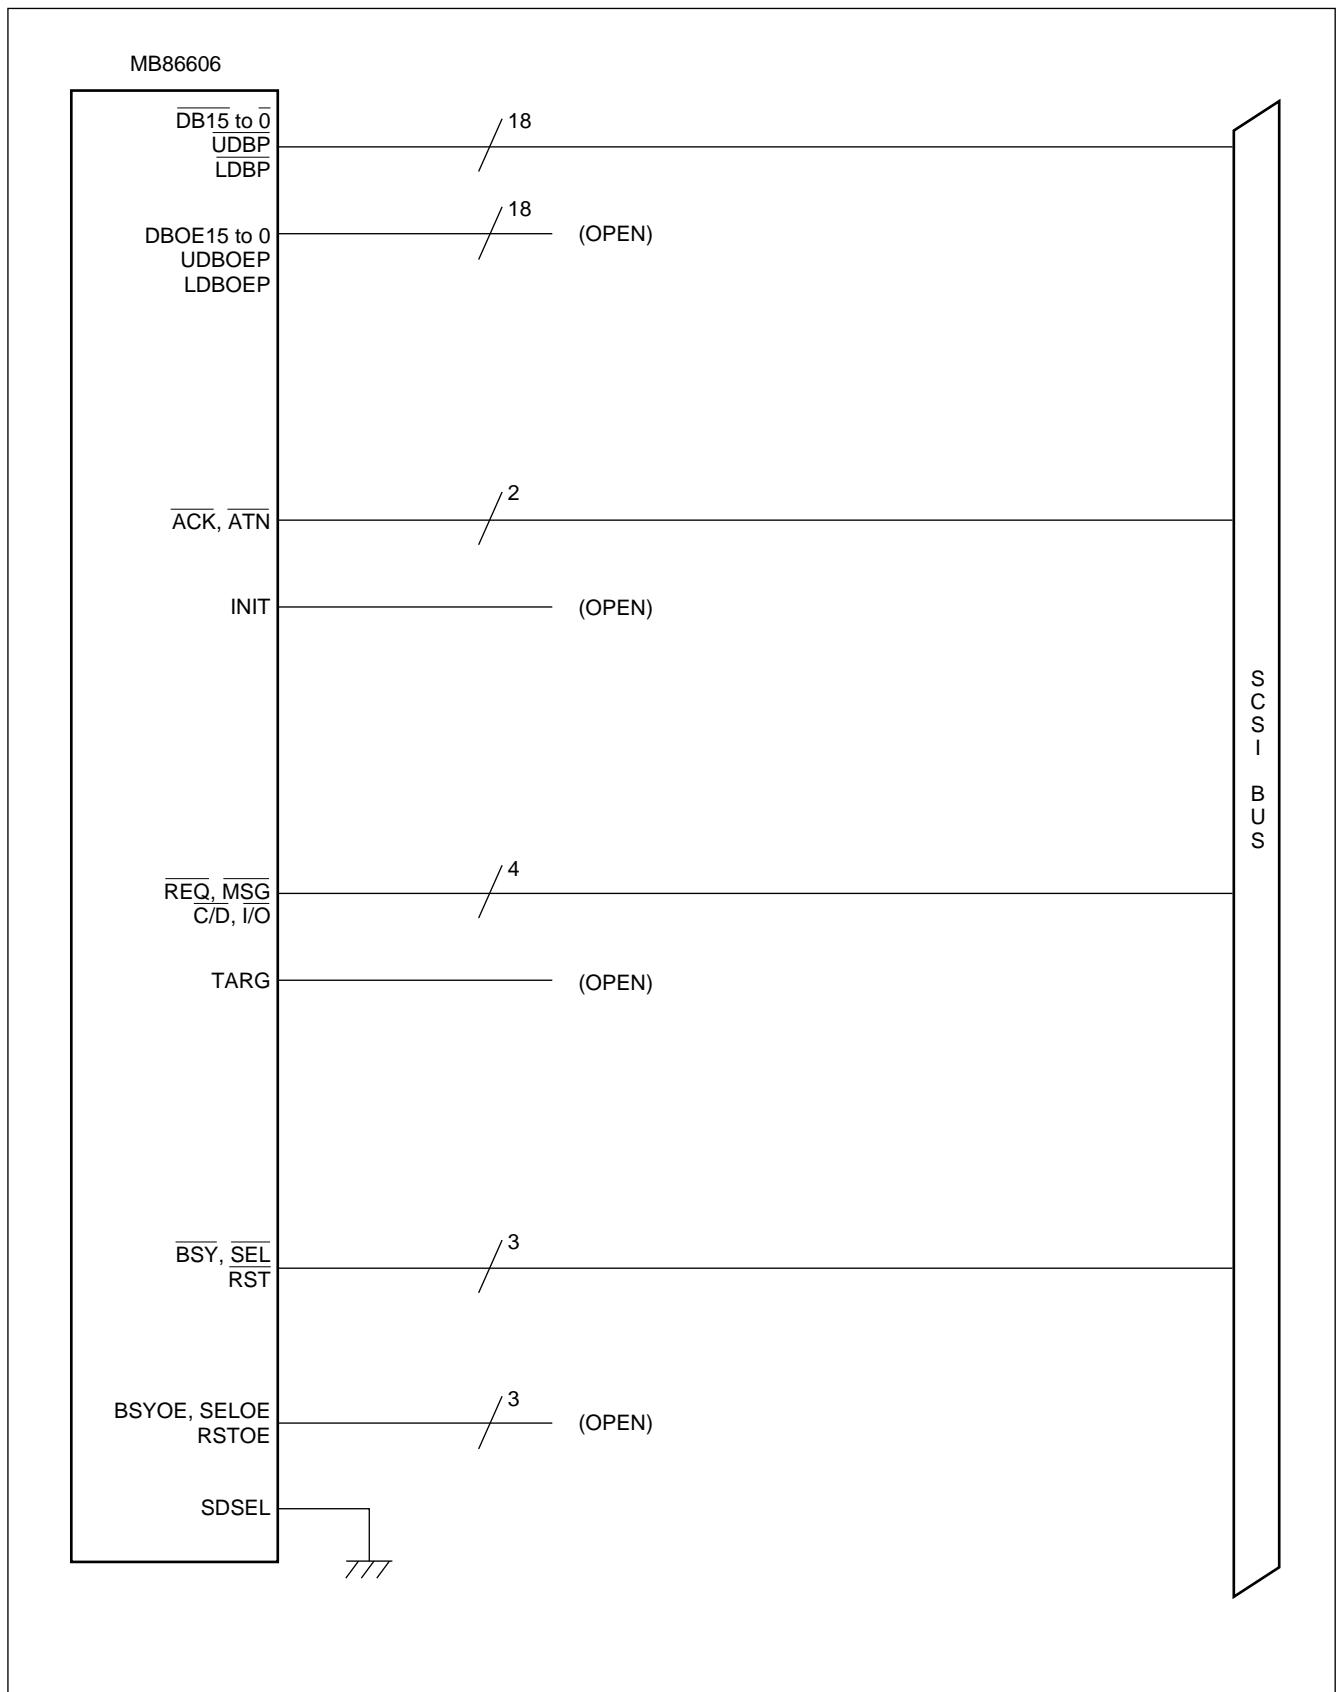**6. Example of Connection in Single-end Mode**


# MB86606

## ■ ORDERING INFORMATION

Part number	Package	Remarks
MB86606PMT	144-pins, Plastic SQFP (FPT-144P-M05)	

## ■ PACKAGE DIMENSION

144-pin, Plastic SQFP  
(FPT-144P-M05)

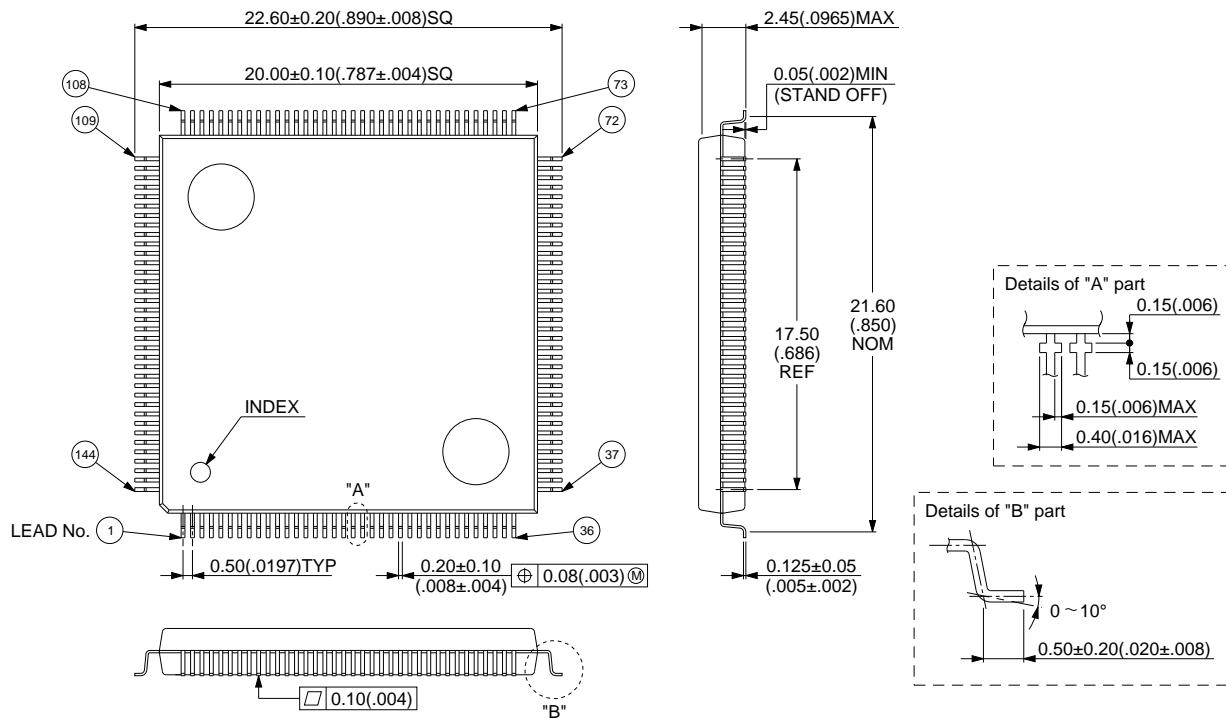

© 1994 FUJITSU LIMITED F144006S-2C-2

Dimensions in mm (inches)

# FUJITSU LIMITED

*For further information please contact:*

## **Japan**

FUJITSU LIMITED  
Corporate Global Business Support Division  
Electronic Devices  
KAWASAKI PLANT, 4-1-1, Kamikodanaka  
Nakahara-ku, Kawasaki-shi  
Kanagawa 211-88, Japan  
Tel: (044) 754-3763  
Fax: (044) 754-3329

## **North and South America**

FUJITSU MICROELECTRONICS, INC.  
Semiconductor Division  
3545 North First Street  
San Jose, CA 95134-1804, U.S.A.  
Tel: (408) 922-9000  
Fax: (408) 432-9044/9045

## **Europe**

FUJITSU MIKROELEKTRONIK GmbH  
Am Siebenstein 6-10  
63303 Dreieich-Buchschlag  
Germany  
Tel: (06103) 690-0  
Fax: (06103) 690-122

## **Asia Pacific**

FUJITSU MICROELECTRONICS ASIA PTE. LIMITED  
#05-08, 151 Lorong Chuan  
New Tech Park  
Singapore 556741  
Tel: (65) 281-0770  
Fax: (65) 281-0220

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

### **CAUTION:**

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.