

Errata

Title & Document Type: 1740A Oscilloscope Operating and Service Manual

Manual Part Number: 01740-90909

Revision Date: August 1976

HP References in this Manual

This manual may contain references to HP or Hewlett-Packard. Please note that Hewlett-Packard's former test and measurement, semiconductor products and chemical analysis businesses are now part of Agilent Technologies. We have made no changes to this manual copy. The HP XXXX referred to in this document is now the Agilent XXXX. For example, model number HP8648A is now model number Agilent 8648A.

About this Manual


We've added this manual to the Agilent website in an effort to help you support your product. This manual provides the best information we could find. It may be incomplete or contain dated information, and the scan quality may not be ideal. If we find a better copy in the future, we will add it to the Agilent website.

Support for Your Product

Agilent no longer sells or supports this product. You will find any other available product information on the Agilent Test & Measurement website:

www.tm.agilent.com

Search for the model number of this product, and the resulting product page will guide you to any available information. Our service centers may be able to perform calibration if no repair parts are needed, but no other support from Agilent is available.

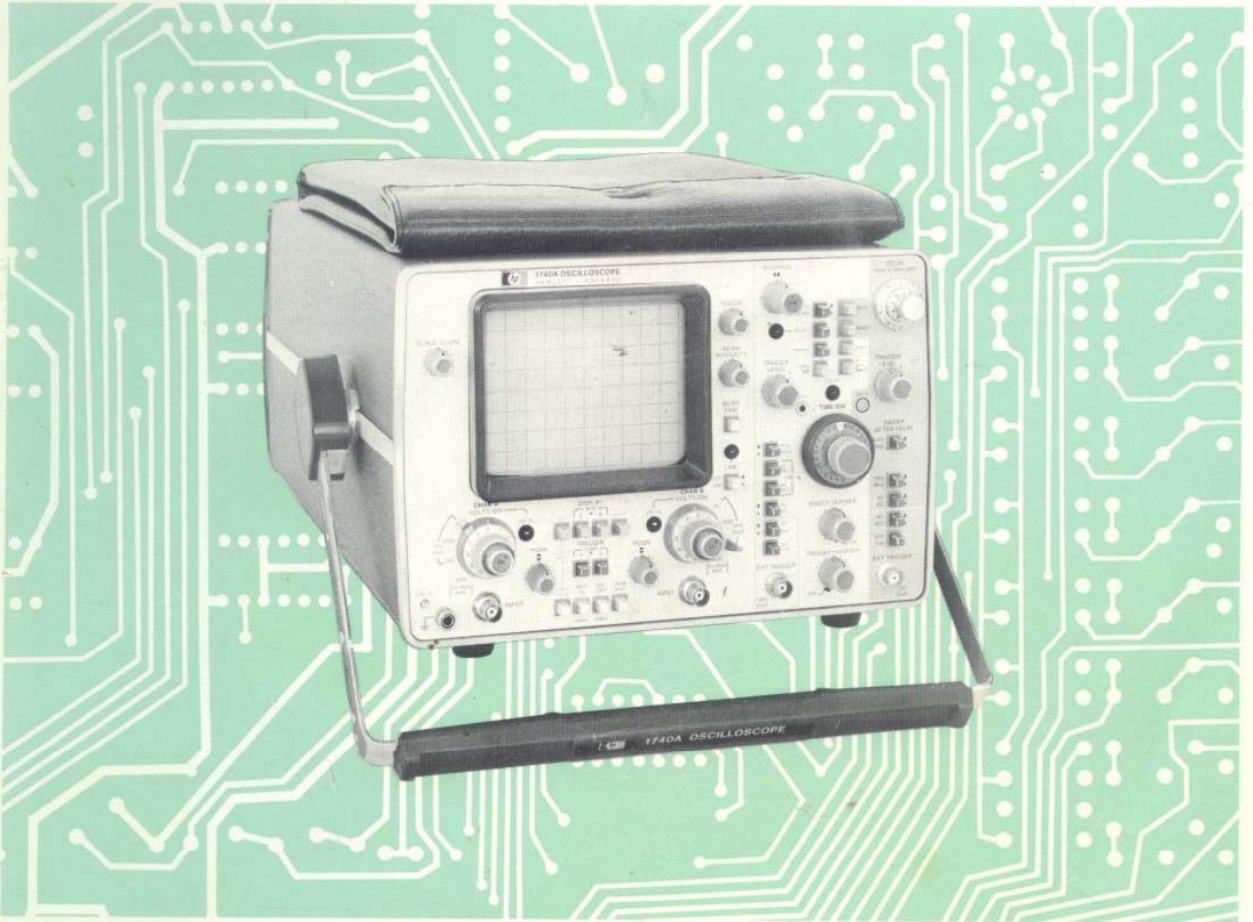

1740A OSCILLOSCOPE

PMEL-E MANUAL

PLEASE RETURN TO BUILDING 981,
 MAIL 282, PATRICK AFB FL 32925
 WHEN NO LONGER REQUIRED

OPERATING
 AND SERVICE
 MANUAL

HEWLETT  PACKARD
 COLORADO SPRINGS DIVISION



OPERATING AND SERVICE MANUAL

MODEL 1740A OSCILLOSCOPE

(Including Options 001, 090, 101, 102, 900, 901,
902, and 903)

SERIAL NUMBERS

This manual applies directly to instruments with serial numbers prefixed 1632A.

With changes described in Section VII, this manual also applies to instruments with serial numbers prefixed 1522A through 1616A.

For additional important information about serial numbers, see INSTRUMENT AND MANUAL IDENTIFICATION in Section I.

HEWLETT-PACKARD COMPANY/COLORADO SPRINGS DIVISION
1900 GARDEN OF THE GODS ROAD, COLORADO SPRINGS, COLORADO, U.S.A.

Manual Part Number 01740-90909
Microfiche Part Number 01740-90809

PRINTED: AUGUST 1976

SAFETY SUMMARY

The following general safety precautions must be observed during all phases of operation, service, and repair of this instrument. Failure to comply with these precautions or with specific warnings elsewhere in this manual violates safety standards of design, manufacture, and intended use of the instrument. Hewlett-Packard Company assumes no liability for the customer's failure to comply with these requirements.

GROUND THE INSTRUMENT.

To minimize shock hazard, the instrument chassis and cabinet must be connected to an electrical ground. The instrument is equipped with a three-conductor ac power cable. The power cable must either be plugged into an approved three-contact electrical outlet or used with a three-contact to two-contact adapter with the grounding wire (green) firmly connected to an electrical ground (safety ground) at the power outlet. The power jack and mating plug of the power cable meet International Electrotechnical Commission (IEC) safety standards.

DO NOT OPERATE IN AN EXPLOSIVE ATMOSPHERE.

Do not operate the instrument in the presence of flammable gases or fumes. Operation of any electrical instrument in such an environment constitutes a definite safety hazard.

KEEP AWAY FROM LIVE CIRCUITS.

Operating personnel must not remove instrument covers. Component replacement and internal adjustments must be made by qualified maintenance personnel. Do not replace components with power cable connected. Under certain conditions, dangerous voltages may exist even with the power cable removed. To avoid injuries, always disconnect power and discharge circuits before touching them.

DO NOT SERVICE OR ADJUST ALONE.

Do not attempt internal service or adjustment unless another person, capable of rendering first aid and resuscitation, is present.

USE CAUTION WHEN EXPOSING OR HANDLING THE CRT.

Breakage of the Cathode-ray Tube (CRT) causes a high-velocity scattering of glass fragments (implosion). To prevent CRT implosion, avoid rough handling or jarring of the instrument. Handling of the CRT shall be done only by qualified maintenance personnel using approved safety mask and gloves.

DO NOT SUBSTITUTE PARTS OR MODIFY INSTRUMENT.

Because of the danger of introducing additional hazards, do not install substitute parts or perform any unauthorized modification to the instrument. Return the instrument to a Hewlett-Packard Sales and Service Office for service and repair to ensure that safety features are maintained.

DANGEROUS PROCEDURE WARNINGS.

Warnings, such as the example below, precede potentially dangerous procedures throughout this manual. Instructions contained in the warnings must be followed.

WARNING

**Dangerous voltages, capable of causing death, are present in this instrument.
Use extreme caution when handling, testing, and adjusting.**

| |
|--------------------------|
| TABLE OF CONTENTS |
|--------------------------|

| Section | Page | Section | Page |
|---|------|--|------|
| I GENERAL INFORMATION | 1-1 | 4-33. Preamplifier Stage | 4-2 |
| 1-1. Introduction | 1-1 | 4-41. Preamplifier Controls | 4-4 |
| 1-5. Specifications | 1-1 | 4-53. Delay Line Assembly | 4-5 |
| 1-8. Accessories Supplied | 1-1 | 4-54. Vertical Output Amplifier | 4-5 |
| 1-10. Accessories Available | 1-1 | 4-56. Horizontal Section | 4-5 |
| 1-12. Options | 1-1 | 4-57. Main Trigger Circuitry | 4-5 |
| 1-14. Instrument and Manual Identification | 1-1 | 4-64. Main Sweep and Integrator | 4-6 |
| II INSTALLATION | 2-1 | 4-69. Delayed Trigger Operation | 4-7 |
| 2-1. Introduction | 2-1 | 4-70. Delayed Sweep | 4-7 |
| 2-3. Initial Inspection | 2-1 | 4-71. Horizontal Display Switch Assembly | 4-7 |
| 2-5. Power Cords and Receptacles | 2-1 | 4-76. Horizontal Preamplifier | 4-7 |
| 2-7. Power Requirements | 2-1 | 4-79. Horizontal Output | 4-8 |
| 2-10. Repacking for Shipment | 2-1 | 4-80. Gate Amplifier Assembly | 4-8 |
| III OPERATION | 3-1 | 4-88. High-voltage Power Supply | 4-8 |
| 3-1. Introduction | 3-1 | 4-96. Low-voltage Power Supply | 4-9 |
| 3-3. Turn-on Procedure | 3-1 | 4-98. ±15-volt Supplies | 4-9 |
| 3-5. Operator Checks | 3-1 | 4-101. +5-volt Supply | 4-9 |
| 3-12. Trigger Selection Table | 3-2 | 4-102. +120-volt and +43-volt Power Supplies | 4-9 |
| 3-13. Obtaining Basic Displays | 3-2 | 4-105. Floodgun Filament Voltage | 4-10 |
| 3-15. Normal Sweep Display | 3-2 | 4-106. Line Frequency | 4-10 |
| 3-16. Magnified Sweep Display | 3-3 | 4-107. Option 101 | 4-10 |
| 3-17. Delayed Sweep Display | 3-3 | V PERFORMANCE TESTS AND ADJUSTMENTS | 5-1 |
| 3-18. Mixed Sweep Display | 3-3 | 5-1. Introduction | 5-1 |
| 3-19. X-Y Display | 3-4 | 5-3. Recommended Test Equipment | 5-1 |
| 3-20. Single Sweep Operation | 3-4 | 5-5. Test Record | 5-1 |
| 3-23. Single Sweep Using Trigger View | 3-4 | 5-7. Performance Tests | 5-1 |
| IV PRINCIPLES OF OPERATION | 4-1 | 5-9. Initial Control Settings | 5-1 |
| 4-1. Introduction | 4-1 | 5-11. Performance Test Procedures | 5-1 |
| 4-3. Vertical Section Block Diagram | 4-1 | 5-12. Bandwidth | 5-1 |
| 4-4. Input Attenuators | 4-1 | 5-15. Common Mode Rejection Ratio | 5-3 |
| 4-5. Vertical Preamplifier | 4-1 | 5-17. Triggering | 5-4 |
| 4-6. Delay Line | 4-1 | 5-22. Sweep Time Accuracy | 5-5 |
| 4-7. Vertical Output Amplifier | 4-1 | 5-24. Differential Time Accuracy | 5-6 |
| 4-8. Horizontal Section Block Diagram | 4-1 | 5-26. Delay Jitter | 5-6 |
| 4-9. Trigger Circuit | 4-1 | 5-28. Rise Time | 5-7 |
| 4-11. Sweep and Integrator Circuit | 4-1 | 5-30. Z-axis Blanking | 5-7 |
| 4-13. Holdoff Circuit | 4-1 | 5-32. Deflection Factor | 5-7 |
| 4-14. Horizontal Preamplifier | 4-1 | 5-34. Calibrator | 5-8 |
| 4-15. Horizontal Output | 4-1 | 5-36. Adjustments | 5-8 |
| 4-16. Gate Circuitry | 4-1 | 5-40. Low-voltage Power Supply Adjustment | 5-8 |
| 4-18. High-voltage Power Supply | 4-2 | 5-41. Intensity Limit Adjustment | 5-9 |
| 4-22. Low-voltage Power Supply | 4-2 | 5-42. Astigmatism and Focus Adjustment | 5-9 |
| 4-25. Circuit Details | 4-2 | 5-43. Gate Response Adjustment | 5-9 |
| 4-27. Attenuator Assemblies | 4-2 | 5-44. Floodgun Grid Adjustment | 5-9 |
| 4-28. General Information | 4-2 | 5-45. Trace Align and Y-axis Align Adjustments | 5-9 |
| 4-29. Input | 4-2 | 5-46. Trace Align and Y-axis Align Adjustments - OPTION 101 | 5-9 |
| 4-30. Attenuator Stages | 4-2 | 5-47. Calibrator Amplitude Adjustment | 5-9 |
| 4-31. Vertical Section | 4-2 | 5-48. Trigger Sensitivity Adjustment | 5-10 |
| 4-32. General Information | 4-2 | 5-49. Sync Zero Adjustment | 5-10 |

TABLE OF CONTENTS (Cont'd)

| Section | | Page | Section | | Page |
|---------|---|------|---------|--|------|
| 5-50. | Trigger View Balance Adjustment | 5-10 | 8-14. | CRT Removal and Replacement .. | 8-2 |
| 5-51. | Delay Start Adjustment | 5-11 | 8-15. | HV Power Supply Assembly Removal and Replacement | 8-3 |
| 5-52. | Horizontal Amplifier Gain Adjustments | 5-11 | 8-16. | HV Multiplier Assembly Removal and Replacement | 8-3 |
| 5-53. | X10 Amplifier Balance Adjustment | 5-11 | 8-17. | LV Power Supply Assembly Removal and Replacement | 8-3 |
| 5-54. | Horizontal Linearity Adjustment | 5-11 | 8-18. | Gate Amplifier Assembly Removal and Replacement | 8-4 |
| 5-55. | Preliminary Main Sweep Calibration | 5-12 | 8-19. | Vertical Output Amplifier Assembly Removal and Replacement | 8-4 |
| 5-56. | Delayed Sweep Adjustment | 5-12 | 8-21. | Vertical Preamplifier Assembly A3, Delay Line Assembly A4, and Vertical Control Switching Assembly A13 Removal and Replacement | 8-6 |
| 5-57. | Main Sweep Fine Adjustment | 5-12 | 8-25. | Horizontal Output Assembly Removal and Replacement | 8-7 |
| 5-58. | Vertical Amplifier Balance Adjustment | 5-13 | 8-26. | Horizontal Sweep Assembly Removal and Replacement | 8-7 |
| 5-59. | Position and Sync Balance Adjustment | 5-13 | 8-27. | Delayed Trigger Assembly Removal and Replacement | 8-7 |
| 5-60. | Input Capacitance and Attenuator Compensation Adjustments | 5-14 | 8-28. | Circuit Board Repairs | 8-7 |
| 5-61. | Vertical Gain Adjustment | 5-14 | 8-30. | Board Connections | 8-7 |
| 5-62. | Pulse Response Adjustment | 5-14 | 8-31. | Soldering | 8-7 |
| 5-63. | X-Y Gain Adjustment | 5-15 | 8-32. | Integrated Circuit Removal and Replacement | 8-8 |
| VI | REPLACEABLE PARTS | 6-1 | 8-33. | Troubleshooting | 8-8 |
| 6-1. | Introduction | 6-1 | 8-36. | Initial Troubleshooting Procedure | 8-8 |
| 6-3. | Ordering Information | 6-1 | 8-37. | Dc Voltages and Waveforms | 8-8 |
| VII | MANUAL CHANGES | 7-1 | 8-38. | Trouble Diagnosis | 8-8 |
| 7-1. | Introduction | 7-1 | 8-39. | LV Power Supply | 8-9 |
| 7-3. | Manual Changes | 7-1 | 8-41. | HV Power Supply | 8-9 |
| VIII | SCHEMATICS AND TROUBLESHOOTING | 8-1 | 8-47. | Gate Amplifier | 8-9 |
| 8-1. | Introduction | 8-1 | 8-48. | Vertical Section | 8-10 |
| 8-3. | Preventive Maintenance | 8-1 | 8-51. | Horizontal Output Amplifier | 8-10 |
| 8-4. | Cleaning | 8-1 | 8-52. | Time Base | 8-10 |
| 8-6. | Switch Maintenance | 8-1 | | | |
| 8-12. | Removal and Replacement | 8-2 | | | |

LIST OF ILLUSTRATIONS

| Figure | Title | Page | Figure | Title | Page |
|--------|---|------|--------|---|------|
| 2-1. | Types of Power Source Receptacles and Applicable Input Power Cable Part Numbers | 2-1 | 4-1. | Vertical and Horizontal Block Diagram | 4-3 |
| 2-2. | Line Voltage Selection Switch Settings | 2-1 | 4-2. | LVPS, HVPS, and Gate Amplifier Block Diagram | 4-4 |
| 3-1. | Controls and Connectors | 3-0 | 4-3. | Gate Schmitt Simplified Block Diagram | 4-7 |
| 3-2. | Probe Compensation | 3-2 | 4-4. | Timing Relationship of the Gate and Sweep Waveforms | 4-7 |
| 3-3. | Normal Display | 3-3 | 4-5. | Gate Control Simplified Block Diagram | 4-8 |
| 3-4. | Magnified Display | 3-3 | 5-1. | Bandwidth Test Setup | 5-3 |
| 3-5. | Normal Display with Intensified Area .. | 3-3 | 5-2. | CMRR Test Setup | 5-3 |
| 3-6. | Delayed Sweep Display | 3-3 | 5-3. | External Triggering Test Setup | 5-4 |
| 3-7. | Normal Display with Intensified Area .. | 3-4 | 5-4. | Pulse Response Adjustments | 5-15 |
| 3-8. | Mixed Sweep Display | 3-4 | | | |

LIST OF ILLUSTRATIONS (Cont'd)

| Figure | Title | Page | Figure | Title | Page |
|--------|---|------|--------|--|------|
| 5-5. | Adjustment Locations | 5-23 | 8-11. | Service Information, High-voltage Power Supply Assembly A15 | 8-14 |
| 6-1. | Chassis Parts and Board Assembly Identification | 6-1 | 8-12. | Service Information, Gate Amplifier Assembly A12 | 8-16 |
| 7-1. | Replacement for Component Locator in Figure 8-16 | 7-2 | 8-13. | Service Information, Vertical Preamplifier Assembly A3 | 8-18 |
| 7-2. | Replacement for Component Locator in Figure 8-17 | 7-3 | 8-14. | Service Information, Vertical Output Assembly A5 | 8-20 |
| 7-3. | Replacement for Component Locator in Figure 8-19 | 7-4 | 8-15. | Service Information, Vertical Control Switching Assembly A13 and Vertical Preamplifier Assembly A3 | 8-22 |
| 7-4. | Replacement for Component Locator in Figure 8-10 | 7-6 | 8-16. | Service Information, Main Trigger, P/O Assembly A7 | 8-24 |
| 7-5. | Changes to Schematic 1 | 7-7 | 8-17. | Service Information, Main Sweep Assembly A8 | 8-26 |
| 7-6. | Rear-panel Changes | 7-7 | 8-18. | Service Information, Delayed Trigger Assembly A10 and Horizontal Sweep Assembly A7 | 8-28 |
| 8-1. | Switch Extender Shaft Removal | 8-1 | 8-19. | Service Information, Delayed Sweep Assembly A9 | 8-30 |
| 8-2. | CRT Removal | 8-2 | 8-20. | Service Information, Horizontal Output Assembly A11 and Horizontal Sweep Assembly A7 | 8-32 |
| 8-3. | Low-voltage Power Supply Removal | 8-4 | 8-21. | Service Information, Gate Schmitt, P/O Assembly A7 | 8-34 |
| 8-4. | Gate Amplifier Assembly Removal | 8-5 | 8-22. | Service Information, Interface Assembly A14 | 8-37 |
| 8-5. | Vertical Output Amplifier Removal | 8-5 | 8-23. | Service Information, OPTION 101 Interface Assembly A14 | 8-38 |
| 8-6. | A5A1 Removal | 8-5 | 8-24. | Interconnection Diagram | 8-40 |
| 8-7. | A3A1 Removal | 8-7 | | | |
| 8-8. | Location of A7 Attaching Screws | 8-7 | | | |
| 8-9. | Semiconductor Terminal Identification | 8-8 | | | |
| 8-10. | Service Information, Low-voltage Power Supply Assembly A16 | 8-12 | | | |

LIST OF TABLES

| Table | Title | Page | Table | Title | Page |
|-------|--|------|-------|---|------|
| 1-1. | Specifications | 1-2 | 5-8. | Main Sweep Fine Adjustment | 5-13 |
| 1-2. | General Information | 1-4 | 5-9. | Condensed Adjustment Procedure | 5-16 |
| 3-1. | Display and Trigger Selection Table | 3-2 | 6-1. | Abbreviations for Replaceable Parts List | 6-1 |
| 5-1. | Recommended Test Equipment | 5-2 | 6-2. | Replaceable Parts | 6-3 |
| 5-2. | Main TIME/DIV Accuracy | 5-5 | 6-3. | List of Manufacturer Codes | 6-21 |
| 5-3. | Delayed TIME/DIV Accuracy | 5-6 | 7-1. | Manual Changes | 7-1 |
| 5-4. | Deflection Factor Accuracy | 5-8 | 8-1. | Troubleshooting Sequence | 8-9 |
| 5-5. | Low-voltage Supply Limits | 5-8 | 8-2. | Time Base Troubleshooting | 8-10 |
| 5-6. | Preliminary Main Sweep Calibration | 5-12 | 8-3. | Schematic Notes | 8-11 |
| 5-7. | Delayed Sweep Calibration Adjustments | 5-12 | | | |

SECTION I

GENERAL INFORMATION

1-1. INTRODUCTION.

1-2. The Hewlett-Packard Model 1740A is a dual-channel, 100-MHz, delayed sweep oscilloscope designed for general-purpose bench or field use. The dual-channel vertical deflection system has 12 calibrated deflection factors from 5 mV/div to 20 V/div. Input impedance is selectable (50 ohms or 1 megohm) to meet various measurement requirements. The horizontal deflection system has calibrated sweep rates from 2 s/div to 0.05 μ s/div and delayed sweep rates from 20 ms/div to 0.05 μ s/div. A 10X magnifier expands all sweeps by a factor of 10 and extends the fastest sweep to 5 ns/div. In alternate or chop modes, the trigger-view control feature will display three signals: channel A, channel B, and trigger signal. This allows correlation of the time between the trigger signal and the channel A and channel B signals. With the A VS B control, an X-Y mode of operation is possible. The channel A input (Y-axis) is plotted versus the channel B input (X-axis).

1-3. This manual contains installation and operating instructions, as well as maintenance information for the Model 1740A. Instrument specifications and procedures for verifying proper operation are included. Procedures are also included for adjusting the instrument to its performance specifications. Schematic diagrams, the theory of operation, and troubleshooting information are provided for use in maintaining the instrument.

1-4. This section of the manual contains the performance specifications for the Model 1740A, and a list of the options available. It also lists the accessories supplied with the Model 1740A and other accessories that are available. Instrument and manual identification information are also included.

1-5. SPECIFICATIONS.

1-6. Table 1-1 is a complete list of the Model 1740A critical specifications that are controlled by tolerances. Table 1-2 contains general information that describes operating characteristics of the Model 1740A.

1-7. Any change in the specifications due to manufacturing, design, or traceability to the U.S. National Bureau of Standards will be listed on a manual change sheet included with this manual. The manual and manual change sheet supersede all previous information concerning specifications of the 1740A.

1-8. ACCESSORIES SUPPLIED.

1-9. The following accessories are supplied with the 1740A:

- One Blue Light Filter, HP Part No. 01740-02701
- One Front-panel Cover, HP Part No. 5040-0518
- One Accessory Storage Pouch, HP Part No. 1540-0292
- Two 10:1 Divider Probes, HP Model No. 10006D

1-10. ACCESSORIES AVAILABLE.

1-11. The following accessories are available for the 1740A:

- Model 10002A 50:1 Divider Probe
- Model 10004D 10:1 Divider Probe
- Model 10007B 1:1 Divider Probe
- Model 10020A Resistive Divider Probe Kit (Division ratios of 1:1, 5:1, 10:1, 20:1, 50:1, and 100:1)
- Model 10173A: RFI Metal Mesh Contrast Screen
- Model 10140A: Collapsible Viewing Hood
- Model 197A: Oscilloscope Camera (Requires a Model 10376A Adapter for mounting on 1740A)
- Models 1001A, 1002A, and 1114A: Testmobiles (All accept the Model 1740A and provide mobile stands for the oscilloscope)

1-12. OPTIONS.

1-13. The options listed below extend the usefulness of the Model 1740A.

OPTION 001. Option 001 replaces the standard detachable power cord with a captive power cord. There are two standard options available that install a special CRT in the standard instrument. The only difference between the optional CRT and the standard CRT is the phosphor used in the CRT. Option 007 uses P7 phosphor and Option 011 uses P11 phosphor.

OPTION 090. This option omits the two Model 10006D divider probes normally supplied as accessories. Other probes listed under Accessories Available, which are more suitable, may be specified.

OPTION 101. Option 101 is designed for optimum performance with the HP Model 1607A Logic State Analyzer to provide both digital logical state and analog electrical analysis. (Refer to Section IV for circuit details and Section VI for a list of replaceable parts in Option 101.)

OPTION 102. Option 102 is Option 101 with an additional special adapter plate (HP Part No. 5061-1213). The special adapter plate is used to attach the 1740A and 1607A instruments together as a single unit.

OPTIONS 900 - 903. Options 900 through 903 are special cord options. The connector configurations are shown in Section II of this manual.

1-14. INSTRUMENT AND MANUAL IDENTIFICATION.

1-15. Instrument identification by serial number is located on the rear panel. Hewlett-Packard uses a two-section serial number consisting of a four-digit prefix and a five-digit suffix, separated by a letter

designating the country in which the instrument was manufactured. (A = U.S.A; G = West Germany; J = Japan; U = Unit Kingdom.)

1-16. This manual applies to instruments with a serial prefix number as shown on the title page. If changes have been made in the instrument since this manual was printed, a "Manual Changes" supplement supplied with the manual will define these changes. Be sure to record these changes in your manual. Backdating information in Section VII adapts the manual to instruments with serial numbers lower than that shown on the title page. Part numbers for the manual and the microfiche copy of the manual are also shown on the title page.

Table 1-1. Specifications

VERTICAL DISPLAY MODES

Channel A; channel B; channels A and B displayed alternately on successive sweeps (ALT); channels A and B displayed by switching between channels at an approximate 250 kHz rate with blanking during switching (CHOP); channel A plus channel B (algebraic addition); and trigger view.

VERTICAL AMPLIFIERS (2)

Bandwidth and Rise Time at all deflection factors from 0°C to +55°C.

BANDWIDTH: 3 dB down from 6 div reference signal.
DC-Coupled: dc to 100 MHz in both 50Ω and 1 MΩ input modes.

AC-Coupled: approx 10 Hz to 100 MHz; 1 Hz with 10:1 divider probes.

BANDWIDTH LIMIT: limits upper bandwidth to approx 20 MHz.

RISE TIME: <3.5 ns, measured from 10% to 90% points of a 6 div input step.

DEFLECTION FACTOR

Ranges: 5 mV/div to 20 V/div (12 calibrated positions) in 1, 2, 5 sequence, accurate within 3%.

Vernier: continuously variable between all ranges, extends maximum deflection factor to at least 50 V/div. UNCAL light indicates when vernier is not in the CAL position.

POLARITY: channel B may be inverted, front panel pushbutton.

DELAY LINE: input signals are delayed sufficiently to view leading edge of input pulse without advanced trigger.

INPUT COUPLING: selectable AC or DC, 50Ω (dc), or ground. Ground position disconnects input connector and grounds amplifier input.

INPUT RC (selectable)

AC or DC: 1 MΩ ±2% shunted by approx 20 pF.

50 Ohm: 50Ω ±3%; SWR <1.4 at 100 MHz on all ranges.

MAXIMUM INPUT

AC or DC: 250 V (dc + peak ac) or 500 V p-p at 1 kHz or less.

50 Ohm: 5 V rms.

A+B OPERATION

Amplifier: bandwidth and deflection factors are un-

changed; channel B may be inverted for A-B operation.

Differential (A-B) Common Mode: CMRR is at least 20 dB from dc to 20 MHz. Common mode signal amplitude equivalent to 8 divisions with one vernier adjusted for optimum rejection.

VERTICAL MAGNIFICATION (X5)

BANDWIDTH: 3 dB down from 8 div reference signal.

DC-Coupled: dc to approx 40 MHz.

AC-Coupled: approx 10 Hz to 40 MHz.

RISE TIME: <9 ns (measured from 10% to 90% points of 8 div input step).

DEFLECTION FACTOR: increases sensitivity of each deflection factor setting by a factor of 5 with a maximum sensitivity of 1 mV on channels A and B.

TRIGGER SOURCE

Selectable from channel A, channel B, composite, or line frequency.

CHANNEL A: all display modes triggered by channel A signal.

CHANNEL B: all display modes triggered by channel B signal.

COMPOSITE: all display modes triggered by displayed signal except in Chop. In Chop mode, trigger signal is derived from channel A.

LINE FREQUENCY: trigger signal is derived from power line frequency.

TRIGGER VIEW

Display internal or external trigger signal in Alternate or Chop mode, channel A, channel B, and the trigger signals are displayed. In channel A or B mode, Trigger View overrides that channel. Internal trigger signal amplitude approximates vertical signal amplitude. Ext trigger signal deflection factor is approx 100 mV/div or 1 V/div in EXT ±10. Triggering point is approx center screen. With identically timed signals to a vertical input and the Ext trigger input, trigger signal delay is 2.5 ns ±1 ns.

HORIZONTAL DISPLAY MODES

Main, main intensified, mixed, delayed, mag X10, and A vs. B.

Table 1-1. Specifications (Cont'd)

MAIN AND DELAYED TIME BASES**RANGES**

Main: 50 ns/div to 2 s/div (24 ranges) in 1, 2, 5 sequence.

Delayed: 50 ns/div to 20 ms/div (18 ranges) in 1, 2, 5 sequence.

Accuracy

| Sweep Time/Div | *Accuracy | | Temp Range |
|----------------|-----------|-----|----------------|
| | X1 | X10 | |
| 50 ns to 20 ms | ±3% | ±4% | 0°C to +15°C |
| | ±2% | ±3% | +15°C to +35°C |
| | ±3% | ±4% | +35°C to +55°C |

*Add 1% for 50 ms to 2 s ranges.

MAIN SWEEP VERNIER: continuously variable between all ranges, extends slowest sweep to at least 5 s/div. UNCAL light indicates when vernier is not in CAL position.

MAGNIFIER (X10): expands all sweeps by a factor of 10, extends fastest sweep to 5 ns/div.

CALIBRATED SWEEP DELAY

DELAY TIME RANGE: 0.5 to 10 X Main Time/Div settings of 100 ns to 2 s (minimum delay 150 ns).

DIFFERENTIAL TIME MEASUREMENT ACCURACY

| Main Time Base Setting | *Accuracy (+15°C to +35°C) |
|-------------------------|-------------------------------|
| 100 ns/div to 20 ms/div | ±(0.5% + 0.1% of full scale) |
| 50 ms/div to 2 s/div | ±(1% + 0.1% of full scale) |

*Add 1% for temperatures from 0°C to +15°C and +35°C to +55°C.

DELAY JITTER: <0.002% (1 part in 50 000) of maximum delay in each step from +15°C to +35°C; <0.005% (1 part in 20 000) from 0°C to +15°C and +35°C to +55°C.

TRIGGERING**MAIN SWEEP**

Normal: Sweep is triggered by internal or external signal.

Automatic: bright baseline displayed in absence of input signal. Triggering is same as Normal above 40 Hz.

Single: sweep occurs once with same triggering as Normal; reset pushbutton arms sweep and lights indicator.

DELAYED SWEEP (SWEEP AFTER DELAY)

Auto: delayed sweep automatically starts at end of delay.

Trig: delayed sweep is armed and triggerable at end of delay period.

INTERNAL: dc to 25 MHz on signals causing 0.3 divisions or more vertical deflection, increasing to 1 division of vertical deflection at 100 MHz in all display modes (required signal level is increased by 2 when in Chop mode and by 5 when X5 vertical magnifier is used). Triggering on Line frequency is also selectable.

EXTERNAL: dc to 50 MHz on signals of 50 mV p-p or more increasing to 100 mV p-p at 100 MHz (required signal level is increased by 2 when in Chop mode).

EXTERNAL INPUT RC: approx 1 MΩ shunted by approx 20 pF.

MAXIMUM EXTERNAL INPUT: 250 V (dc + peak ac) or 500 V p-p ac at 1 kHz or less.

LEVEL and SLOPE

Internal: at any point on the positive or negative slope of the displayed waveform.

External: continuously variable from +1.5 V to -1.5 V on either slope of the trigger signal, +15 V to -15 V in divide by 10 mode (÷10).

COUPLING: AC, DC, Main LF REJ, or Main HF REJ.

AC: attenuates signals below approx 20 Hz.

LF Reject (Main Sweep): attenuates signals below approx 4 kHz.

HF Reject (Main Sweep): attenuates signals above approx 4 kHz.

TRIGGER HOLDOFF (Main Sweep): increases sweep holdoff time in all ranges.

CALIBRATED MIXED TIME BASE

Dual time base in which the main time base drives the first portion of sweep and the delayed time base completes the sweep at the faster delayed sweep. Also operates in single sweep mode. Accuracy, add 2% to main time base accuracy.

A vs. B OPERATION**BANDWIDTH**

Channel A (Y-axis): same as channel A.

Channel B (X-axis): dc to 5 MHz.

DEFLECTION FACTOR: 5 mV/div to 20 V/div (12 calibrated positions) in 1, 2, 5 sequence.

PHASE DIFFERENCE BETWEEN CHANNELS: <3°, dc to 100 kHz.

Table 1-2. General Information

CATHODE-RAY TUBE AND CONTROLS

TYPE: Hewlett-Packard, 12.7 cm (5 in.) rectangular CRT, post accelerator, approx 15 kV accelerating potential, aluminized P31 phosphor.

GRATICULE: 8 X 10 div (1 div = 1 cm) internal, non-parallax graticule with 0.2 subdivision markings on major horizontal and vertical axes and markings for rise time measurements. Internal floodgun graticule illumination.

BEAM FINDER: returns trace to CRT screen regardless of setting of horizontal, vertical, or intensity controls.

Z-AXIS INPUT (INTENSITY MODULATION): +4 V, >50 ns width pulse blanks trace of any intensity, usable to <10 MHz for normal intensity. Input R, 1 kΩ ±10%. Maximum input ±20 V (dc + peak ac).

REAR PANEL CONTROLS: astigmatism and trace align.

GENERAL

REAR PANEL OUTPUTS: main and delayed gates, 0 V to >+2.5 V capable of supplying approx 5 mA.

AMPLITUDE CALIBRATOR (0°C to +55°C)

| | | |
|-----------------------|--|-----|
| Output Voltage | 1 V p-p into ≥1 MΩ 0.1 V p-p into 50Ω | ±1% |
| Rise Time | ≤0.1 μs | |
| Frequency | approx 1.4 kHz | |

POWER: 100, 120, 220, 240 Vac, ±10%; 48 to 440 Hz; 100 VA max.

WEIGHT: net, 13 kg (28.6 lb); shipping, 15.7 kg (34.6 lb).

OPERATING ENVIRONMENT

Temperature: 0°C to +55°C.

Humidity: to 95% relative humidity at +40°C.

Altitude: to 4600 m (15 000 ft).




Vibration: vibrated in three planes for 15 min. each with 0.254 mm (0.010 in.) excursion, 10 to 55 Hz.

DIMENSIONS: see outline drawing.

NOTES:

1. DIMENSIONS ARE FOR GENERAL INFORMATION ONLY. IF DIMENSIONS ARE REQUIRED FOR BUILDING SPECIAL INCLOSURES, CONTACT YOUR HP FIELD ENGINEER.

2. DIMENSIONS ARE IN MILLIMETERS AND (INCHES).

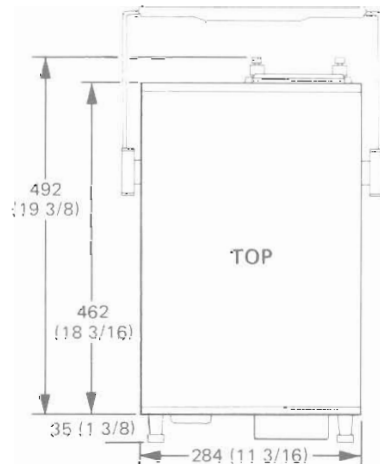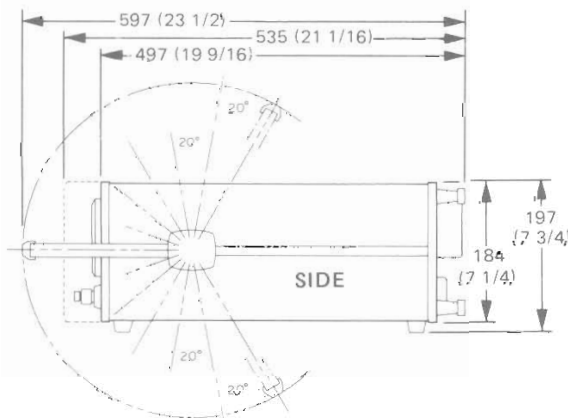




SECTION II INSTALLATION

2-1. INTRODUCTION.

2-2. This section contains information and instructions necessary for installing and interfacing the Model 1740A Oscilloscope. Included are initial inspection procedures, power and grounding requirements, installation instructions, and procedures for repackaging the instrument for shipment.

2-3. INITIAL INSPECTION.

2-4. This instrument was carefully inspected both mechanically and electrically before shipment. It should be free of marks or scratches and in perfect electrical order upon receipt. To confirm this, the instrument should be inspected for physical damage incurred in transit. If the instrument was damaged in transit, file a claim with the carrier. Check for supplied accessories (listed in Section I) and test the electrical performance of the instrument using the performance test procedures outlined in Section V. If there is damage or deficiency, see the warranty in the front of this manual.



Read the Safety Summary at the front of the manual before installing or operating the instrument.

2-5. POWER CORDS AND RECEPTACLES.

2-6. Figure 2-1 illustrates the standard configuration used for HP power cords. The HP part number directly above each drawing is the part number for an instrument power cord equipped with a connector of that configuration. If the appropriate power cord is not included with the instrument, notify the nearest HP Sales and Service Office and a replacement cord will be provided.

STD-002-07-76





| HP POWER CABLE PART NUMBERS | | | |
|---|---|---|---|
| 8120-1692 | 8120-0696 | 8120-1703 | 8120-1521 |
| Option 902 | Option 901 | Option 900 | Option 903 |
|  |  |  |  |
| INPUT POWER RECEPTACLE TYPES | | | |

Figure 2-1. Types of Power Source Receptacles and Applicable Input Power Cable Part Numbers

2-7. POWER REQUIREMENTS.


2-8. The 1740A can be operated from any power source supplying 100 V, 120 V, 220 V, or 240 V ($\pm 10\%$), single phase, 48 to 440 Hz. Power dissipation is 100 VA maximum.



Instrument damage may result if line-voltage selection switch is not correctly set for the input power source.

2-9. The instrument is normally set at the factory for 120-volt operation. To operate the instrument from any other ac power source, proceed as follows:

- a. Verify that Model 1740A power cable is not connected to any input power source.
- b. Stand instrument on rear legs. Use a blade-type screwdriver to position line-voltage selection switch through opening in bottom cover. (Figure 2-2 shows switches set for 120-V operation.)
- c. For 220-V or 240-V inputs, replace fuse F1 with 0.5 A slow-blow fuse supplied with instrument.
- d. Connect input power cable to power source.

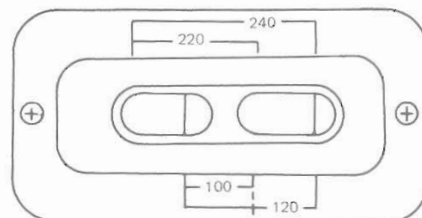


1740A-200-07-76

Figure 2-2. Line Voltage Selection Switch Settings


2-10. REPACKING FOR SHIPMENT.

2-11. If the instrument is to be shipped to a Hewlett-Packard Sales/Service Office for service or repair, attach a tag showing owner (with address), complete instrument serial number, and a description of the service required.

2-12. Use the original shipping carton and packing material. If the original packing material is not available, the Hewlett-Packard Sales/Service Office will provide information and recommendations on materials to be used.

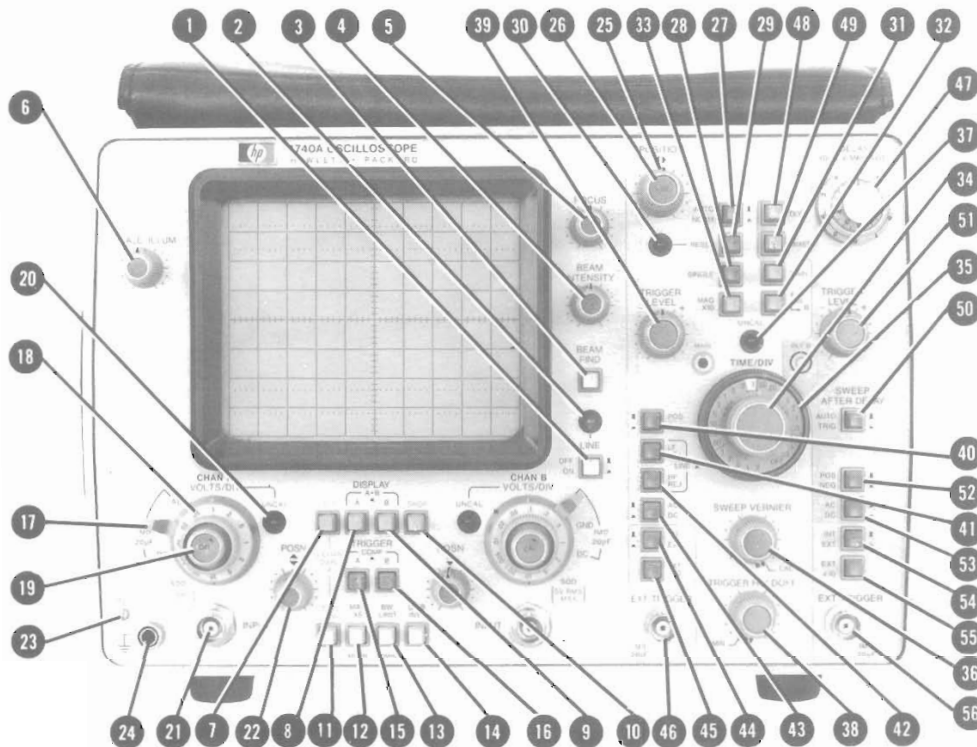

1740A-037

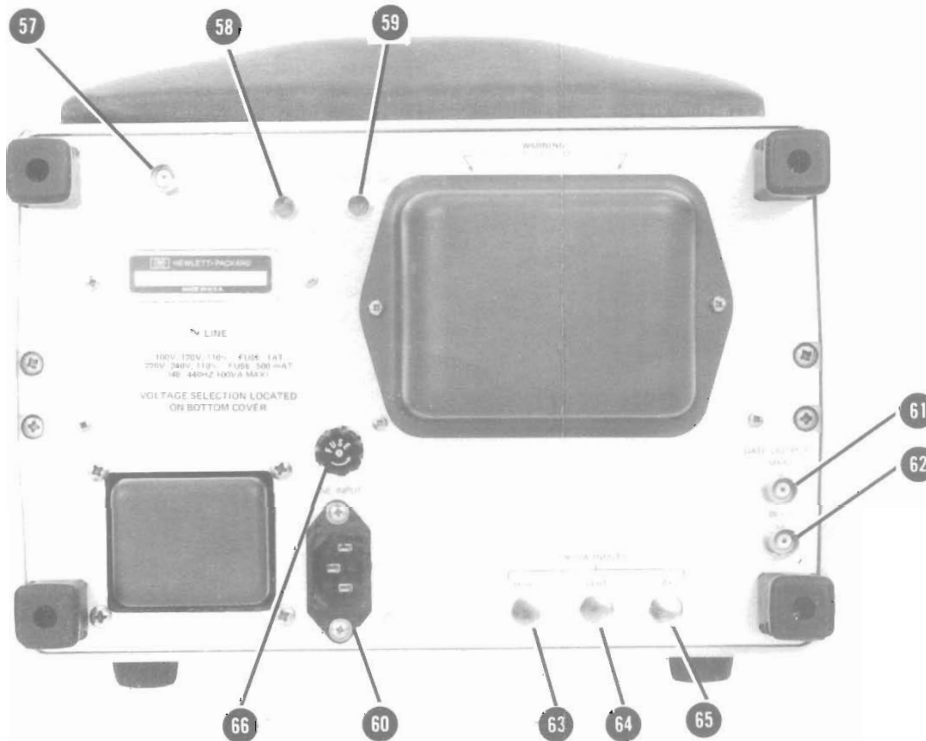

1740A-038-07-76

- 1 LINE. S and off.
- 2 LINE II the inst
- 3 BEAM I creases display
- 4 BEAM II of the C
- 5 FOCUS. sharpes focused ternally
- 6 SCALE illuminat backgro
- 7 ALT. Ch alternat
- 8 Channel signal.
- 9 Channel signal.
- 8 & 9 A+B. Pre nel B 9 channel the cha CH B I results.
- 10 CHOP. played ween ch
- 11 TRIG VI or exter tivity e 1 V/div LEVEL. Center hold lev If ALT signals ected tri channel
- 12 MAG X: tion five mum se width is

Figure 3-1.
Controls and Connectors
3-0

- 1 **LINE.** Switch turns instrument power on and off.
- 2 **LINE INDICATOR.** Indicator lights when the instrument power is on.
- 3 **BEAM FIND.** Pressing this pushbutton increases the intensity and compresses the display within the viewing area.
- 4 **BEAM INTENSITY.** Controls the brightness of the CRT display.
- 5 **FOCUS.** Adjusts the writing beam for the sharpest trace. Always keep this display focused to prevent damaging the CRT internally.
- 6 **SCALE ILLUM.** Adjust the CRT background illumination for good contrast between the background and the graticule.
- 7 **ALT.** Channel A and B signals are displayed alternately on consecutive sweeps.
- 8 **Channel A.** Displays the channel A input signal.
- 9 **Channel B.** Displays the channel B input signal.
- 8 & 9 **A+B.** Pressing both channel A 8 and channel B 9 displays the algebraic sum of the channel A and channel B input signals. If the channel B display is inverted (press CH B INVT 14), an A minus B display results.
- 10 **CHOP.** Channel A and B signals are displayed simultaneously by switching between channels at a 250-kHz rate.
- 11 **TRIG VIEW.** Displays the selected internal or external trigger signal at a fixed sensitivity of approximately 100 mV/div or 1 V/div with EXT + 10 15. TRIGGER LEVEL 39 positions the display vertically. Center screen indicates the trigger threshold level with respect to the trigger signal. If ALT 7 or CHOP 10 is selected, three signals are displayed: channel A, the selected trigger signal (at center screen), and channel B.
- 12 **MAG X5.** Magnifies the vertical presentation five times, and increases the maximum sensitivity to 1 mV/div. The bandwidth is decreased to 40 MHz.
- 13 **BW LIMIT.** Reduces the bandwidth of channel A and channel B to approximately 20 MHz.
- 14 **CH B INVT.** Inverts the polarity of the channel B signal. In A+B 8 & 9 mode, pressing CH B INVT 14 results in an A minus B display.
- 15 **TRIGGER A.** Selects a sample of the channel A signal as the trigger signal when INT/EXT 44 is in INT.
- 16 **TRIGGER B.** When in INT, a sample of the channel B signal is selected as the trigger signal.
- 15 & 16 **COMP.** When the display mode is set to channel A, channel B, ALT, or A+B, the sweep is triggered by the displayed signal. When in CHOP, the sweep is triggered by the channel A signal only.
- 17 **AC.** Selects the input coupling and impedance for the vertical amplifiers. In the AC position the dc component of the input signal is blocked. The lower 3-dB limit is approximately 10 Hz.
- GND.** The input signal is disconnected from the amplifier, and the amplifier input is grounded.
- DC.** All elements of the input signal are passed to the vertical amplifier. The input impedance is approximately 1 megohm shunted by 20 pF.
- 50Ω.** The input signal is dc coupled, and the input impedance is 50Ω. Pull the lever forward and down to select this position. Do not apply more than 5 V rms to the input connector.
- 18 **VOLTS/DIV.** Selects the vertical deflection factor in a 1, 2, 5 sequence from 0.005 V/div to 20 V/div, accurate within 3% with vernier 19 in the CAL position.
- 19 **Vernier.** Provides continuous control of the deflection factor between calibrated VOLTS/DIV ranges. Vernier range is at least 2.5 to 1.
- 20 **UNCAL.** Lights when the vernier control is out of detent position to indicate VOLTS/DIV is uncalibrated.

21 INPUT. BNC connector to apply external signals to the channel A (Y) and channel B (X) amplifier. Impedance and coupling are selectable by **17**. Do not apply more than 250 V (dc + peak ac) or more than 500 V p-p ac at 1 kHz or less.

22 POSN. Controls the vertical position of the display.

23 CAL 1 V. Provides a 1-V peak-to-peak (within 1%) square-wave voltage signal recurring at an approximate rate of 1.4 kHz (100 mV peak-to-peak when terminated in 50Ω).

24 GROUND POST. Convenient chassis ground connector. Useful to ensure a common ground with equipment under test.

25 & 26 POSITION. Coarse **25** and FINE **26** adjustments position the display horizontally.

27 AUTO/NORM. AUTO sweep mode (pushbutton out). A free running sweep provides a bright display in the absence of a trigger signal.

NORM sweep mode (pushbutton in) requires an internal or external signal to generate a sweep and must be used if the input frequency is less than 40 Hz.

28 SINGLE. Sweep occurs once with the same triggering as in NORM. After each sweep, the trigger circuit must be manually RESET **29**.

29 RESET. Momentary pushbutton that arms the trigger circuit in the single-sweep mode. After pressing RESET **29**, the sweep can be triggered by an internal or external trigger signal or by rotating the TRIGGER LEVEL control **39** through zero.

30 Reset Lamp. When lit, indicates the trigger circuit is armed. Lamp goes off at the end of the sweep and remains off until the trigger circuit is again armed by pressing the reset button.

31 MAIN. Selects main sweep for horizontal display. Sweep rate and triggering are selected by the main-sweep controls **25** - **34**, and **36** - **38**.

32 A VS B. Selects an X-Y mode of operation with channel A input (Y-axis) plotted versus channel B input (X-axis). Vertical positioning is adjusted by channel A POSN **22**, and horizontal positioning is adjusted by POSITION **25** and FINE **26**.

OPTION 101. Deletes the A VS B function and adds logic state display. When the Model 1740A is connected to a HP Model 1607A Logic State Analyzer, pressing STATE DSPL **32** displays a 16-word table of 16-bit words.

33 MAG X10. Magnifies the horizontal display 10 times, and expands the fastest sweep time to 5 ns/div, maintaining a sweep accuracy within 3% at room temperature.

34 MAIN TIME/DIV. The inner knob controls the main-sweep rate, which is indicated by the numbers displayed in the knob skirt opening. Sweep accuracy is within 2% (unmagnified) at room temperatures.

35 DLY'D TIME/DIV. The outer rotating section selects the delayed-sweep rate, which is indicated by the marker on the outer knob. Sweep accuracy is the same as with MAIN TIME/DIV. An interlock is incorporated so the delayed sweep is always faster than the main sweep. When rotated out of the off position in the MAIN mode **31**, a portion of the main sweep is intensified indicating the length and delay position of the delayed sweep with respect to the main sweep.

36 SWEEP VERNIER. Provides continuous adjustment of main sweep TIME/DIV between calibrated positions, extending the slowest sweep to 5 s/div.

37 UNCAL. Lights when SWEEP VERNIER **36** is out of the CAL detent position, and indicates that the sweep is not calibrated.

38 TRIGGER HOLDOFF. Increases the time between sweeps and aids triggering on complex displays such as digital words.

39 & 51 TRIGGER LEVEL. Selects the voltage level on the input trigger signal where the sweep is triggered. With external trigger signals, the trigger level is continuously variable from +1.5 V to -1.5 V on either slope of the input trigger signal; +15 V to -15 V in EXT $\times 10$ **45** mode. With internal trigger signals, the trigger level selects any point on the vertical waveform displayed.

- 40 & 52 POS/NEG.** Two-position pushbutton switch that selects the slope of the (EXT **44**) or INT **44**) trigger signal used to start the sweep.
- 41 LF REJ.** Attenuates internal or external trigger signals below approximately 4 kHz. This is useful to condition high-frequency signals for best synchronization by eliminating unwanted high-frequency signals such as power line interference.
- 42 HF REJ.** Attenuates internal or external trigger signals above approximately 4 kHz. This is useful to condition low-frequency signals for best synchronization by eliminating unwanted high-frequency signals such as RF.
- 41 & 42 LINE.** Selecting both LF REJ **41** and HF REJ **42** removes all EXT **44** input or INT **44** displayed signals from the trigger circuit and applies a power-line frequency signal for triggering.
- 43 & 53 AC/DC.** Selects ac or dc coupling of the input (EXT **44** or **54**) or displayed (INT **44** or **54**) signal to the trigger circuit. The DC position must be selected for signals below approximately 20 Hz.
- 44 & 54 INT/EXT.** INT selects a sample of the internal vertical signal chosen by the TRIGGER source **15** or **16**, while EXT selects the signal at the EXT TRIGGER **46** or **56** input for application to the main trigger circuit.
- 45 & 55 EXT × 10.** Attenuates EXT TRIGGER **46** or **56** input signal by a factor of 10.
- 46 & 56 EXT TRIGGER.** BNC connector for external trigger input. Input impedance is approximately one megohm shunted by approximately 20 pF. Do not apply more than 250 V (dc + peak ac) or 500 V p-p ac at 1 kHz or less.
- 47 DELAY.** The DELAY control provides a variable delay time from 0.5 to 10X the MAIN TIME/DIV settings of 100 ns to 2 s.
- 48 DLY'D.** Selects delayed sweep for horizontal display.
- 49 MIXED.** Selects main and delayed sweeps for the horizontal display. The first portion of the sweep is at the main sweep rate, and the second portion of the sweep (starting point chosen by DELAY **47**) is at the delayed-sweep rate.
- 50 SWEEP AFTER DELAY AUTO/TRIG.** Selects the method of starting the delayed-sweep when in main intensified, delayed, or mixed mode operation. In AUTO, delayed sweep starts immediately after the delay interval, which is the product of the DELAY **47** dial reading (div) and the main TIME/DIV **34** reading. In TRIG, the delayed-trigger circuit is armed after the delay interval and delayed sweep must be triggered by either an internal or external trigger signal.
- 57 Z-AXIS INPUT.** BNC connector for intensity modulation of the CRT display. A +4-volt, ≥50-ns width pulse blanks a trace of any intensity. Do not apply more than ±20 V (dc + peak ac).
- 58 TRACE ALIGN.** Screwdriver adjustment to align the horizontal trace with the graticule.
- 59 ASTIGMATISM.** Screwdriver adjustment used in conjunction with FOCUS **5** to achieve a clean, sharp spot or trace. Adjustment is easier with a stationary spot.
- 60 LINE INPUT.** Connector for the power cord.
- 61 MAIN GATE OUTPUT.** Provides a rectangular output of approximately +2.5 V coincident with the main gate.
- 62 DLY'D GATE OUTPUT.** Provides a rectangular output of approximately +2.5 V coincident with the delayed gate.
- 63 - 65 1607A INPUTS.** Option 101 only.
- 63 HORIZ.** X-axis input from HP Model 1607A.
- 64 VERT.** Y-axis input from HP Model 1607A.
- 65 Z-AXIS.** Intensity input from HP Model 1607A.
- 66 FUSE.** 1 A 250 V SLO-BLO for 100-V or 120-V operation. 0.5 A 250 V SLO-BLO for 220-V or 240-V operation.

SECTION III

OPERATION

3-1. INTRODUCTION.

3-2. This section provides general operating instructions for Model 1740A. Front- and rear-panel controls and connectors are identified and described in figure 3-1. An initial turn-on procedure, operators calibration, trigger selection table, and procedures for obtaining basic displays are also included. The index numbers after control and connector names in the text are keyed to figure 3-1.

3-3. TURN-ON PROCEDURE.

WARNING

Before turning on the oscilloscope, read the safety summary located at the front of this manual.

3-4. To turn on the Model 1740A, perform the following steps:

a. Turn all control knobs to the 12 o'clock position except verniers 19 and SWEEP VERNIER 36 should be in CAL position; TRIGGER HOLDOFF 38 on MIN. MAIN TIME/DIV 34 fully clockwise.

b. Verify pushbuttons out except A 8, A 15, and MAIN 31

c. Press LINE switch 1: LINE indicator 2 should light. After CRT warm up, a free-running trace should be observed near center screen.

d. Increase (or decrease) BEAM INTENSITY 4 to comfortable viewing level, and adjust FOCUS 5 as necessary for sharpest trace.

3-5. OPERATOR CHECKS.

3-6. A few checks and adjustments may be required to verify that the Model 1740A is operating properly. If the oscilloscope is moved from one electromagnetic environment to another, the trace alignment control may need adjustment to align the horizontal trace with the graticule. Astigmatism and focus controls may need adjustment to obtain the sharpest display. Probe compensation may be required, since total input resistance and capacitance can vary slightly from one oscilloscope to another.

3-7. Adjust trace alignment as follows:

a. Obtain a display as described in the turn-on procedure.

b. With vertical POSN control 22, align trace with center graticule line.

c. With a screwdriver, adjust TRACE ALIGN 58 (on rear panel) for best trace alignment with graticule line.

3-8. Adjust astigmatism and focus as follows:

a. Select A VS B 32 and lower BEAM INTENSITY 4 to a low level.

b. Position spot near center of CRT with POSN 22 and POSITION 25 controls.

c. Adjust FOCUS 5 and ASTIGMATISM 59 (on rear panel) for the smallest round spot.

3-9. Perform probe compensation adjustment as follows:

a. Connect probe to be compensated to appropriate vertical INPUT connector 21 and the CAL 1 V output 23.

b. Set VOLTS/DIV 18 to 0.1, MAIN TIME/DIV 34 to 0.2 mSEC, and input coupling 17 to DC.

c. Adjust main TRIGGER LEVEL 39 for a stable display of the calibrator square-wave voltage. Display should have flat tops. Any distortion in presentation is caused by incorrect probe compensation.

d. If overshoot or undershoot is present, turn screwdriver adjustment in probe for a flat-top presentation (see figure 3-2).

3-10. Perform vertical accuracy check as follows:

a. Set controls to positions indicated in turn-on procedure.

b. Apply CAL 1 V 23 signal to channel A INPUT 21 connector using a BNC to banana plug adapter and a test lead with alligator clips.

c. Adjust channel A VOLTS/DIV 16 to 0.2 V/div and MAIN TIME/DIV 34 to 0.2 mSEC/div. Square-

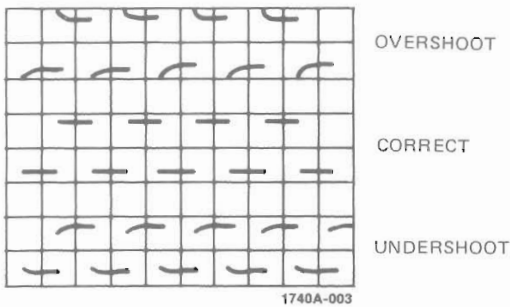


Figure 3-2. Probe Compensation

wave amplitude should be five major divisions within 4%. For complete calibration check, refer to Section V.

3-11. Perform timing accuracy check as follows:

- a. Apply an accurate calibration signal (such as from HP Model 226A Time-mark Generator) to the channel A INPUT (21) connector.
- b. Set controls to the positions indicated in the turn-on procedure except for MAIN TIME/DIV which should be adjusted to 0.5 μSEC/div.
- c. Set marker on graticule line at far left with horizontal position control. Markers should line up ap-

proximately with each graticule line across the CRT. The marker on the far right-hand side should be within 2 mm of the graticule line.

3-12. TRIGGER SELECTION TABLE.

Table 3-1 will aid in determining the best trigger mode for various signal conditions.

3-13. OBTAINING BASIC DISPLAYS.

3-14. These procedures will aid the operator in becoming familiar with the operation of the Model 1740A so commonly used displays can be obtained. Before performing the procedures, complete the turn-on procedure and adjust the following controls:

- Channel A TRIGGER..... A (15)
- Channel A coupling..... DC (17)
- Channel A VOLTS/DIV (18) 0.05
- MAIN TIME/DIV (34) 0.5 mSEC
- DELAY (47) fully CCW

3-15. NORMAL SWEEP DISPLAY.

- a. Connect a Model 10006D probe to channel A INPUT (21) connector, CAL 1 V (23) output, and ground post (24).

Table 3-1. Display and Trigger Selection Table

| SIGNAL CONDITIONS | DISPLAY MODE | TRIGGER SELECTION | | | | |
|--|---------------------------------------|-------------------|----|-----------------|-----------------|-----------------|
| | | A | B | COMP | EXT | |
| I. Single Signals Applied to Channel A or B | A or B | OK | or | OK | OK | OK ¹ |
| | ALT ⁵ or CHOP ⁵ | OK | or | OK | NG | OK ¹ |
| II. Time Related Signals Applied to Channels A & B | ALT | OK ² | | OK ² | NG ³ | OK ² |
| | CHOP | OK ² | | OK ² | NG ⁴ | OK ² |
| | A+B (A-B) | OK | | OK | OK ⁶ | OK |
| III. Nontime Related Signals Applied to Channels A & B | ALT | NG | | NG | OK | NG |

¹ Assume time related signal applied.
² Time relation displayed.
³ No time relation displayed.
⁴ If COMP is selected in CHOP, switching overrides and selects A.
⁵ Signal is only displayed on one channel.

⁶ Triggers on algebraic sum or difference of signals.
 OK Useable trigger mode.
 OK Good trigger mode.
 OK Best trigger mode.
 NG Unuseable trigger mode.

b. Adjust POSN **22** to align base of square wave on the center graticule line, and adjust TRIGGER LEVEL **39** for a stable display. A square wave with an amplitude of two divisions and approximately five to nine positive-going pulses will be displayed.

3-16. MAGNIFIED SWEEP DISPLAY.

a. Perform paragraph 3-15 to obtain Normal Sweep Display.

b. Adjust horizontal POSITION **25** to place waveform portion to be magnified on CRT center graticule (see figure 3-3).

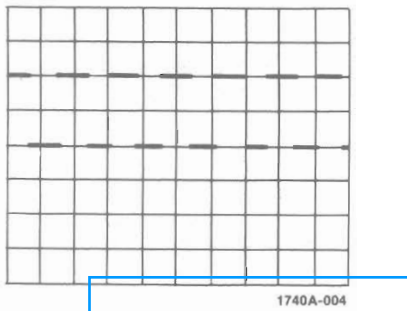


Figure 3-3. Normal Display

c. Press MAG X10 **33** and adjust horizontal FINE **26** for precise placement of magnified display (see figure 3-4).

3-17. DELAYED SWEEP DISPLAY.

a. Perform paragraph 3-15 to obtain Normal Sweep Display.

b. Adjust delayed TIME/DIV **35** for 50 μ SEC/div, and observe intensified portion of square wave. Set BEAM INTENSITY **4** control to a comfortable viewing level.

c. Set SWEEP AFTER DELAY to AUTO and turn DELAY **47** clockwise until intensified portion of

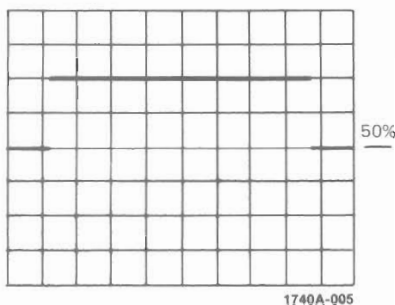


Figure 3-4. Magnified Display

trace is over trace area to be investigated. This is demonstrated in figure 3-5.

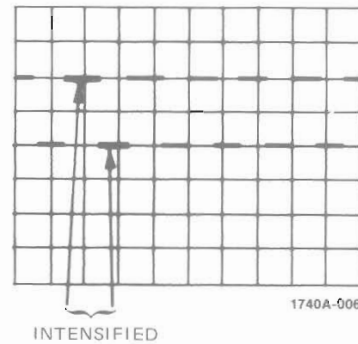


Figure 3-5. Normal Display with Intensified Area

d. Press DLY'D **48** and note that intensified portion of trace is now displayed across entire CRT (see figure 3-6).

e. DELAY **47** control may be adjusted to view other pulses in the pulse train.

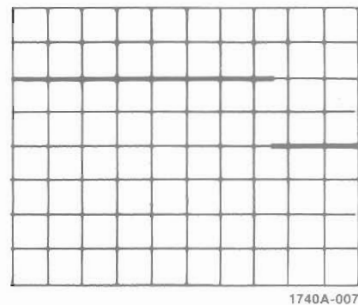


Figure 3-6. Delayed Sweep Display

3-18. MIXED SWEEP DISPLAY.

a. Perform paragraph 3-15 to obtain Normal Sweep Display.

b. Adjust delayed TIME/DIV **35** for 50 μ SEC and note intensified portion of square wave. Set BEAM INTENSITY **4** to comfortable viewing level.

c. Turn DELAY **47** clockwise until part of waveform in second half of CRT is intensified (see figure 3-7).

d. Press MIXED **49** and observe that first portion of the display is at main TIME/DIV **34** sweep rate and second portion is at delayed TIME/DIV **35** sweep rate (see figure 3-8). The transition point from main sweep to delayed sweep can be varied by adjusting DELAY control **47**.

SECTION IV

PRINCIPLES OF OPERATION

4-1. INTRODUCTION.

4-2. This section contains functional descriptions keyed to simplified block diagrams. The block diagrams are drawn for function and do not show circuit details. Schematics and an interconnection diagram are located in Section VIII.

4-3. VERTICAL SECTION BLOCK DIAGRAM. (Figure 4-1.)

4-4. INPUT ATTENUATORS. The attenuators have two functions: (1) they select the type of input coupling (50 Ω , DC, GND, or AC), and (2) they determine the vertical deflection factor (5 mV/div to 20 V/div) as selected by the front-panel VOLTS/DIV switches. Only contact strips and their actuating cams are contained in the attenuator assemblies. The major part of each attenuator is on the preamplifier substrate. The only passive attenuation is a X100 section preceding the discrete, dual-FET impedance converter in each channel.

4-5. VERTICAL PREAMPLIFIER. The preamplifier substrate (A3A1) performs the necessary control functions for both channels A and B, including six de-actuated ranges of attenuation per channel. Along with the X100 section, this configuration provides 12 calibrated levels of vertical sensitivity, ranging from 5 mV/div to 20 V/div. Peripheral circuitry includes control logic for the preamplifier substrate and a trigger-view amplifier, which routes signals from the external trigger input through the delay line and output amplifier.

4-6. DELAY LINE. The purpose of this assembly is to delay the vertical signal approximately 100 nanoseconds. This allows the sweep to trigger before the vertical signal reaches the CRT plates.

4-7. VERTICAL OUTPUT AMPLIFIER. The vertical output amplifier provides drive to the CRT vertical deflection plates.

4-8. HORIZONTAL SECTION BLOCK DIAGRAM. (Figure 4-1.)

4-9. TRIGGER CIRCUIT. The internal sync amplifier provides the signal for synchronization to the vertical signal. The set and trigger gates drive a current switch that starts the sweep. In the main AUTO mode, the bright-line auto circuit detects any absence of trigger signal and forces the main sweep to operate.

4-10. In delayed sweep, the main sweep and the DELAY potentiometer drive the delay comparator. When the comparator conducts, it enables the set and trigger gates for delayed sweep. In the AUTO SWEEP AFTER DELAY mode, the delayed sweep starts when the comparator conducts. In TRIG SWEEP AFTER DELAY, the delayed sweep will not conduct unless a trigger signal occurs after the trigger gates are enabled.

4-11. SWEEP AND INTEGRATOR CIRCUITS. The main and delayed sweep circuits initiate horizontal sweeps by the trigger signal applied to their inputs. Miller integrators produce the horizontal sweep ramps; their slopes are controlled by the front-panel TIME/DIV switches. The outputs from the Miller integrators are applied through the horizontal display mode switches to the horizontal preamplifier.

4-12. The horizontal sweep is also compared to a reference voltage by a ramp comparator that drives the reset circuit. The reset and holdoff circuits control the timing sequence of the sweep ramp.

4-13. HOLDOFF CIRCUIT. The holdoff circuit establishes a time interval at the end of the sweep that disables the trigger generator. The trigger generator is armed at the end of holdoff and is ready for the next trigger signal. The duration of holdoff is controlled by the TIME/DIV setting and the TRIGGER HOLD-OFF control.

4-14. HORIZONTAL PREAMPLIFIER. The horizontal preamplifier provides amplification for the sweep ramp. The horizontal POSITION control establishes a reference level for the horizontal sweep. Trace magnification (X10) is also accomplished in this stage. When the BEAM FIND switch is pressed, the emitter current in the output stage of the preamplifier is reduced and the horizontal output stage cannot drive the beam beyond the viewing area of the CRT.

4-15. HORIZONTAL OUTPUT. The horizontal output stage provides drive to the CRT horizontal deflection plates.

4-16. GATE CIRCUITRY. (Figure 4-2.)

4-17. The gate amplifier assembly contains the circuitry necessary to control brightness of the CRT display. An intensity control circuit is used for brightening or blanking the CRT when necessary. BEAM FIND, and BEAM INTENSITY controls are part of the gate amplifier assembly.

4-18. HIGH-VOLTAGE POWER SUPPLY. (Figure 4-2.)

4-19. The high-voltage power supply consists of a high-voltage oscillator, a high voltage transformer, and a rectifying circuit. The high-voltage oscillator produces cathode, grid, and focus voltages for the CRT. A secondary winding on the high-voltage transformer provides voltage for the CRT cathode heater.

4-20. The rectified CRT cathode voltage is sampled and fed back to the high-voltage oscillator. Changes in cathode voltage are fed back to the high-voltage oscillator, causing the amplitude of its oscillation to change. The change corrects the rectified cathode voltage returning it to the normal operating value.

4-21. The unrectified cathode voltage in the secondary of the high-voltage transformer is applied to a multiplier assembly where it is multiplied four times. The multiplier output is connected to the CRT post-accelerator.

4-22. LOW-VOLTAGE POWER SUPPLY. (Figure 4-2.)

4-23. The low-voltage power supply operates from an ac power source. The ac line is applied to the input power circuit (100-, 120-, 220-, or 240-Vac operation is selectable). The input power circuit contains the ac line protection fuse. The ac input is applied to a step-down power transformer.

4-24. Secondary outputs from the power transformer are applied to rectifiers and voltage regulator circuits, which convert input ac power to usable dc outputs of different voltage levels.

4-25. CIRCUIT DETAILS.

4-26. The following paragraphs provide a detailed explanation of individual circuits in the Model 1740A. Circuits that are identical for both channels are explained for channel A only.

4-27. ATTENUATOR ASSEMBLIES. (Schematic 4.)

4-28. **GENERAL INFORMATION.** The channel A attenuator is a cam-actuated switch assembly. Only contact strips and their actuating cams are contained in the switch assembly. The contacts short appropriate pads on the preamplifier circuit board and only the first five (A1S1A-E), controlling the input coupling modes (AC, GND, DC, and 50 Ω) and the X100 discrete attenuator, carry signal currents. The second five contacts (A1S1F-J) switch dc control voltages to the preamplifier substrate (A3A1) that switch attenuation on the substrate.

4-29. **INPUT.** The input signal applied to channel A INPUT connector J6 is routed through appropriate

contacts A1S1A-E. With input coupling in the AC position (A1S1B closed; A1S1A, C open), the input signal is applied through capacitor A3C1 to the 1-megohm input section in the preamplifier. The value of A3C1 is such that signals below 10 Hz will be attenuated. In GND position (A1S1C closed; A1S1A, B open) the input signal is disconnected and the attenuator input is grounded through A3R1. In DC position (A1S1A, B closed; A1S1C open) a straight-through connection applies the input signal directly to the high impedance circuit of the attenuator. When input coupling is in the 50 Ω position (A1S1A-C closed), the input signal is terminated in 50 ohms.


4-30. **ATTENUATOR STAGES.** The VOLTS/DIV switch activates various combinations of switch closures (A1S1D-J) to obtain the 12 calibrated ranges of vertical sensitivity from 5 mV/div to 20 V/div. The input attenuator has a X1 and a X100 position, and preamplifier substrate A3A1 has a X1 and X10 attenuator section followed by a second section providing a X1, X2, X4 attenuation sequence that repeats four times through the 12 ranges of vertical sensitivity. In the 5 mV/div VOLTS/DIV position, the input attenuator is in the X1 position and both attenuator sections in A3A1 are set to X1 attenuation. In the 10 mV/div and 20 mV/div positions, the second attenuator section in A3A1 steps to the X2 and X4 attenuation ranges respectively. In the 50 mV/div position, the second attenuator section reverts back to the initial X1 attenuation range, but the X10 attenuator in the first section of A3A1 is activated. For 100 mV/div and 200 mV/div, the second attenuator section again steps to the X2 and X4 attenuation ranges. The input attenuator is next switched to the X100 position for the remaining six ranges from 0.5 V/div to 20 V/div, and the sequence described for X1 input attenuation is repeated.


4-31. VERTICAL SECTION. (Schematics 4, 5, and 6.)

4-32. **GENERAL INFORMATION.** Signal conditioning is accomplished primarily by two substrates: preamplifier substrate (A3A1) and vertical output amplifier substrate (A5A1). The preamplifier substrate provides two pairs of differential outputs: the main vertical signal driving the delay line and the internal sync signal. The vertical output amplifier substrate provides the drive capability for the CRT vertical deflection plates.

4-33. **PREAMPLIFIER STAGE.** Since channels A and B are almost identical, only channel A will be described in detail. Where channel B differs from channel A, the difference will be discussed.

4-34. The input signal from the 1-megohm input section is applied to a high-to-low impedance converter stage consisting of a dual field-effect transistor (FET) A3Q2 connected in a source follower configuration. The second half of the FET, A3Q2B, provides a current bias for the source of A3Q2A. Because they

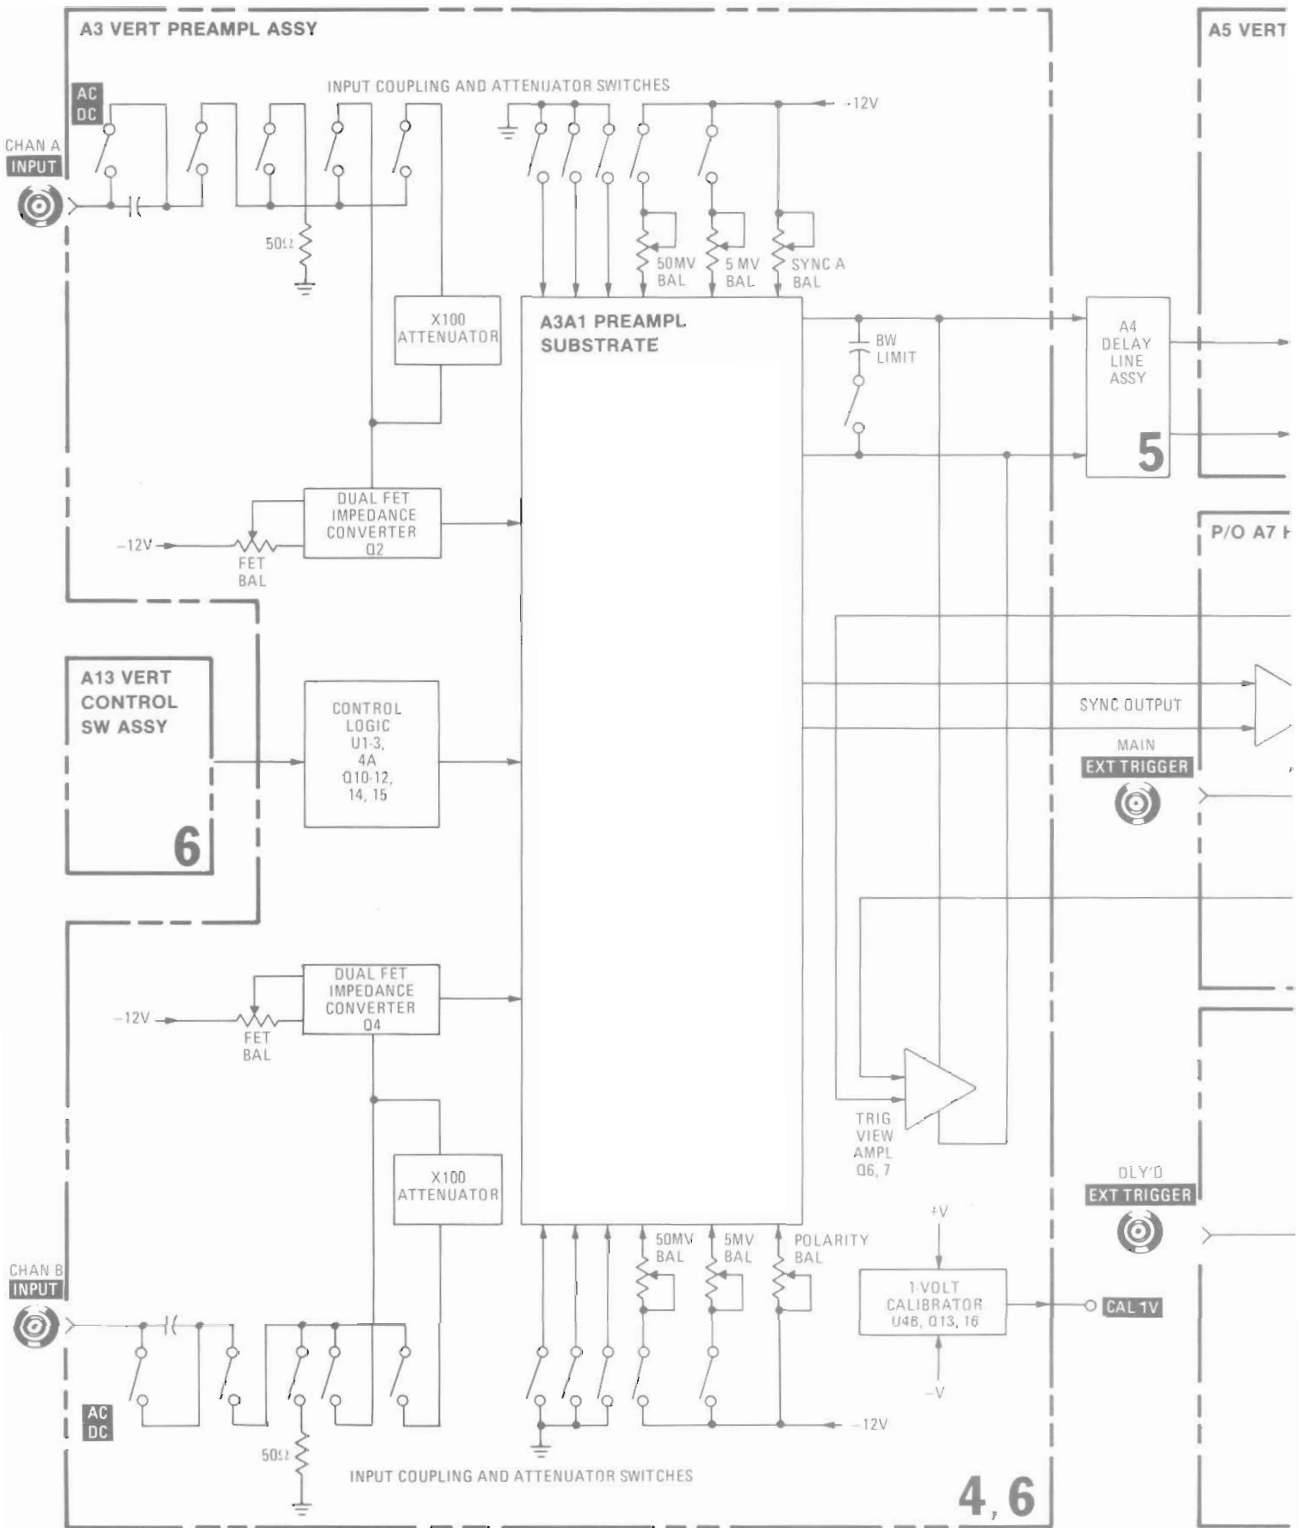

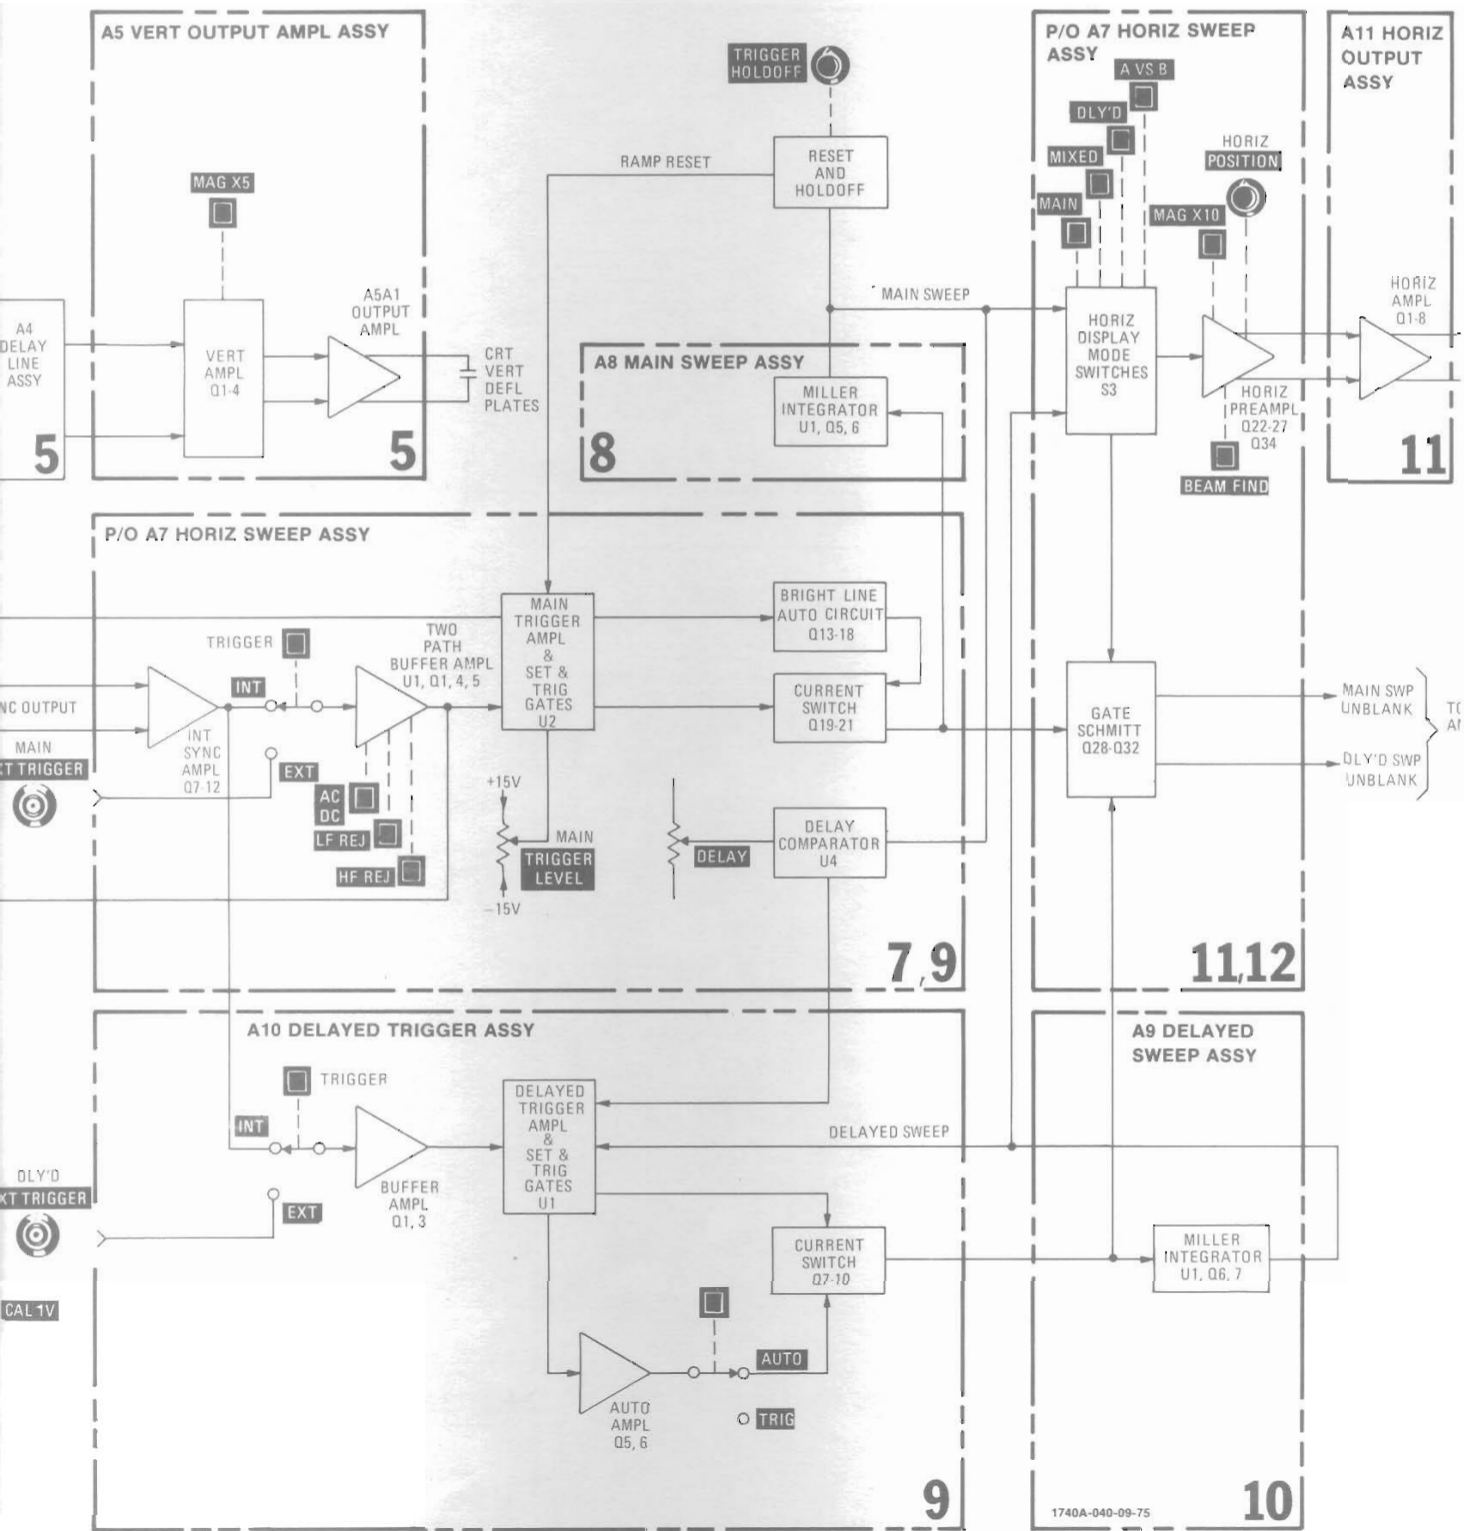

1740A-040-09-75

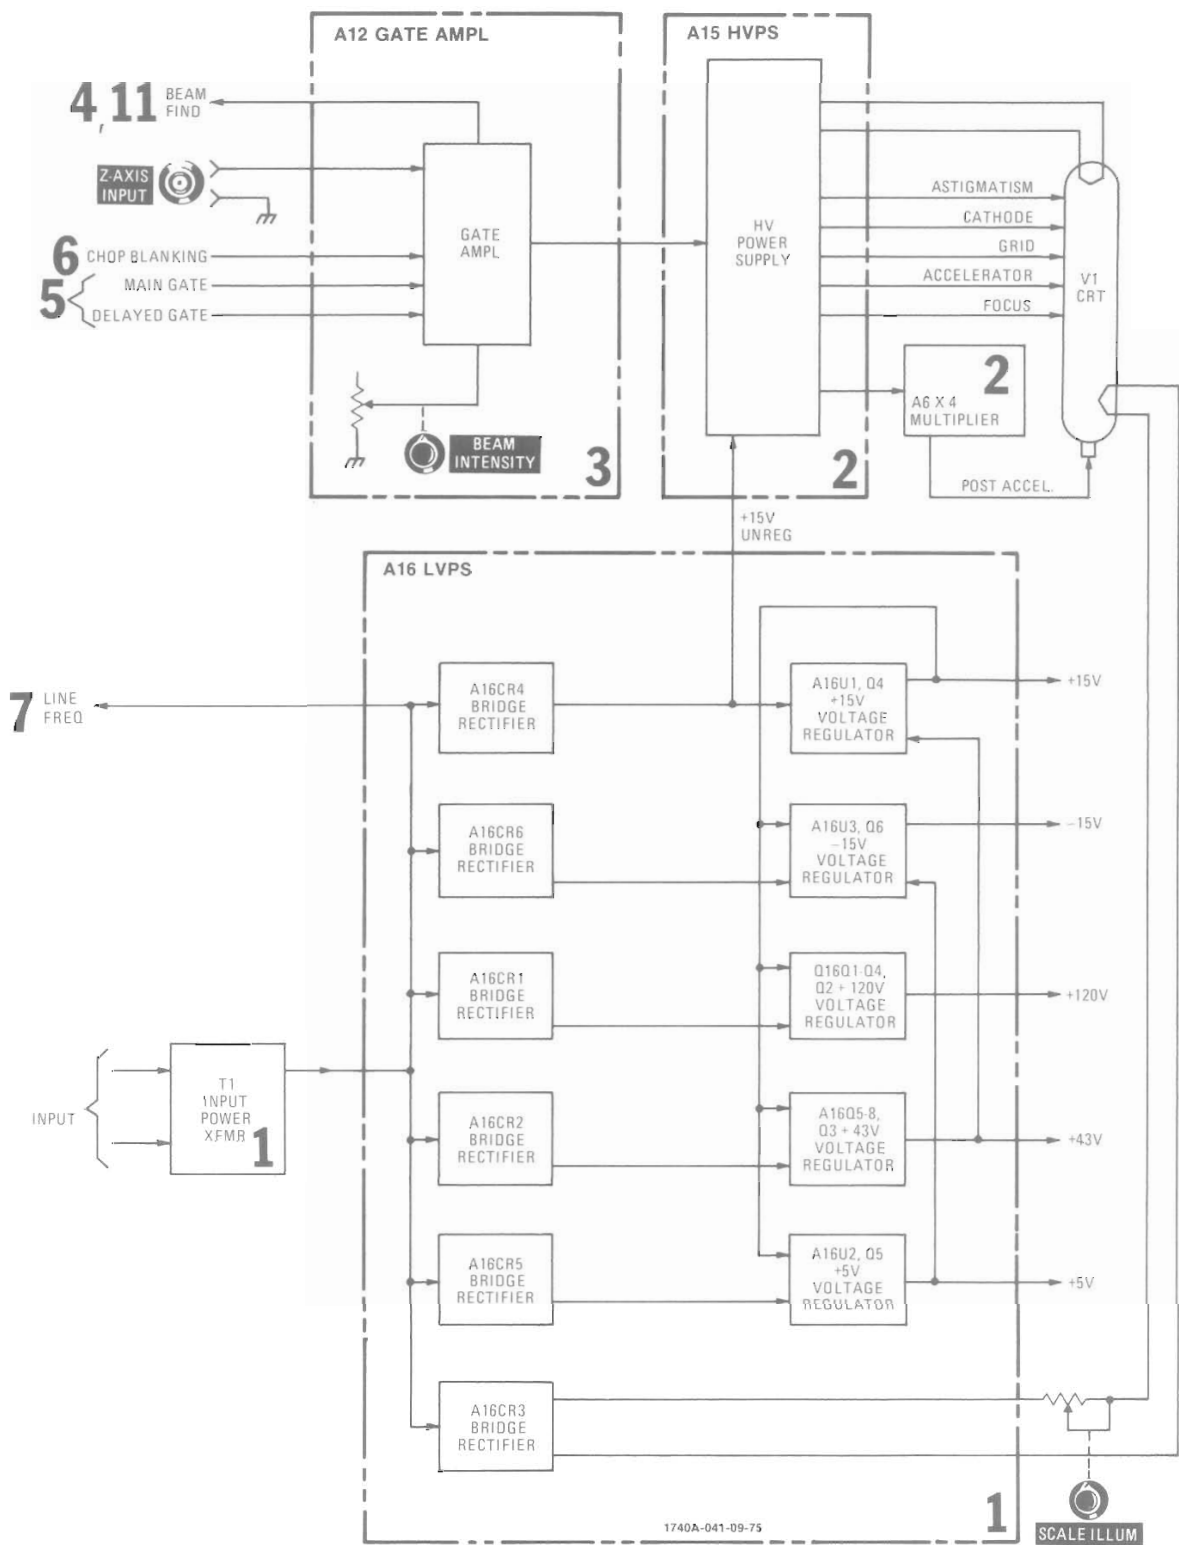


Figure 4-2. LVPS, HVPS, and Gate Amplifier Block Diagram

are a matched pair, the current changes due to temperature variation track. Therefore, the source voltage of A3Q2A will not vary substantially with temperature. The FET balance adjustment, A3R11, ensures a zero-volt input to pin 10 of A3A1, the channel A input.

4-35. The preamplifier substrate contains 31 thick-film resistors and three monolithic chips: channel A and B preamplifiers and a delay-line driver amplifier. Each of the preamplifier chips consists of 27 transistors, 23 diodes, and 34 monolithic resistors. These chips perform the conventional control functions of signal polarity, gain vernier, channel switching, and sync extraction; in addition, they control six ranges of vertical sensitivity. The gain chip is a four-transistor differential shunt-feedback amplifier that provides a current gain of eight and directly drives the balanced delay line.

4-36. The output of A3A1 is connected to delay line A4. The bandwidth limit circuit shunts the delay line input, and by switching the appropriate capacitance across the line limits the frequency response to approximately 20 MHz. Trigger view amplifier, A3Q6/A3Q7, also at the input of the delay line, routes signals from the external trigger input or from the vertical internal sync line through the delay line and Vertical Output Amplifier Assembly A5. In channel A or B DISPLAY, TRIG VIEW switch A3S1A replaces the main channel display with the triggering waveform. In ALT or CHOP, channel A, channel B, and the trigger signal are displayed.

4-37. When BEAM FIND switch A12S1 (schematic 3) is pressed, current is applied through A3CR4, A3CR5, A3CR6, and A3CR7 lowering sensitivity at the input to the delay line enough to return the trace to the viewing area of the CRT.

4-38. Each channel has a vertical POSN control (A3R61 and A3R36) operated from the front panel. Vertical positioning of the viewed display is accomplished in the appropriate preamplifier chip in A3A1 by differentially varying the bias current in the main signal path. This results in shifting the differential dc level of the vertical output plates and causes the trace on the CRT to move up or down.

4-39. The display of an input signal applied to channel B can be inverted by front-panel CH B INVT switch A3S1D. This function is accomplished by the channel B preamplifier chip in A3A1.

4-40. With front-panel vernier controls A1R1 and A2R1 out of the CAL position, the gain of each channel is continuously variable over at least a 2.5:1 range. These resistors control current ratios determining the gain of analog multiplier sections in each channel. The circuitry is contained on preamplifier chips in A3A1. Channel B has a vernier interface circuit, A3Q21, that allows A2R1 to control channel B gain in both normal and A VS B operation.

4-41. PREAMPLIFIER CONTROLS. (Schematic 6.) Vertical Control Switching Assembly A13 controls operation of substrate A3A1 on the vertical preamplifier as described in the following paragraphs.

4-42. Channel A Display. The channel A input signal is selected for display by pressing DISPLAY A switch A13S2B. Engaging A13S2B grounds the preset input (pin 4) of A3U2A, forcing Q high (pin 5). This state along with a high Q output (pin 5) from A3U4A Forces NAND gate A3U3C low (pin 8), which turns channel A on at pin 1 of A3A1. A voltage of 2.7 V at test point 7 indicates channel A is on; 4.7 V indicates channel A is off.

4-43. Channel B Display. The channel B input signal is selected for display by pressing DISPLAY B switch A13S2C. Engaging A13S2C grounds the clear input (pin 1) of A3U2A, forcing \bar{Q} high (pin 6). This state is inverted by A3U3A (pin 3) to turn channel B on at pin 20 of A3A1. A voltage of 2.7 V at test point 5 indicates channel B is on; 4.7 V indicates channel B is off.

4-44. Channel A+B Display. To algebraically display input signals applied to both channels, DISPLAY switches A13S2B and A13S2C are pressed simultaneously; preset (pin 4) and clear (pin 1) inputs of A3U2A are grounded, forcing Q (pin 5) and \bar{Q} (pin 6) outputs high. These states are inverted by A3U3A and A3U3C to force both channels on (2.7 V at test points 5 and 7).

4-45. ALT Mode Display. When ALT mode is selected by DISPLAY switch A13S2A, alternate control pulses correlated to the horizontal sweep are routed through the saturated transistor switch A3Q10 and emitter follower A3Q12 to the clock input (pin 3) of A3U2A. As A3U2A is switched by successive sweeps, channels A and B are turned on alternately.

4-46. CHOP Mode Display. When CHOP mode is selected by DISPLAY switch A13S1C, channels A and B are alternately switched on as they were for ALT display by A3U2A, except in CHOP mode the clock signal for A3U2A comes from chop oscillator A3U1B-D through saturated transistor switch A3Q11 and emitter follower A3Q12. The chop oscillator runs continuously at 500 kHz; therefore, a single channel cycles on and off at 250 kHz.

4-47. TRIG VIEW Mode Display. If either channel A or channel B display is chosen, pressing the TRIG VIEW switch A3S1A forces a low state on one input of NAND gates A3U3A and A3U3C. This condition ensures that both channels are off (4.7 V on test points 5 and 7). The Q output of A3U4A (pin 6) is forced high by a low input. This state switches on transistors A3Q8 and A3Q9, thereby turning on trigger view amplifier, A3Q6/A3Q7.

4-48. If ALT or CHOP modes are chosen, forced low states are removed from the inputs of A3U3A and

A3U3C and a divide by three counter, formed by A3U2A, A3U4A, and A3U3C, is switched by either the chop oscillator or alternate control line. In this manner, channel A, channel B, and the trigger signal are alternately switched on.

4-49. Channel A Sync Circuit. Vertical Control Switching Assembly A13 contains the sync control switches necessary for selective internal triggering.

4-50. Engaging TRIGGER A sync switch A13S1A grounds the preset input of A3U2B (pin 10), forcing Q high (pin 9). This state is inverted by A3U3D, placing a logic "0" on the channel A preamplifier sync control line (test point 8) through emitter follower A3Q14 to pin 13 on A3A1. Zero volts at test point 8 indicates sync A is on; 4.2 V indicates sync A is off.

4-51. Channel B Sync Circuit. Engaging the TRIGGER B Sync Switch, A13S1B, forces the clear input of A3U2B (pin 13) low causing \bar{Q} (pin 8) to go high. This state is inverted by A3U3B, placing a low on the channel B preamplifier sync control line (test point 6) through emitter follower A3Q15 to pin 32 on A3A1. Zero volts at test point 6 indicates sync B is on; 4.2 V indicates sync B is off.

4-52. Composite Trigger Circuit. When composite trigger is selected, channel A and B sync switches, A13S1A and A13S1B, are pressed simultaneously. In A+B display mode low states appear on both clear (pin 13) and preset (pin 10) inputs of A3U2B forcing both Q (pin 9) and \bar{Q} (pin 8) to their high states. This condition forces the sync control lines low through A3U3D, A3Q14, A3U3B, and A3Q15 to pins 13 and 32 on A3A1. With both sync paths on, the display is triggered by A+B. If channel B is inverted, sync B is also inverted. In ALT display mode, engaging A13S1A and A13S1B simultaneously removes preset and clear overrides from A3U2B and allows this flip-flop to switch from the alternate control signal generated in the horizontal section. This triggers channel A from the channel A signal and channel B from the channel B signal. If trigger view is also selected, triggering will change to channel A only. This is accomplished by grounding one input of A3U1A (pin 1). In CHOP mode, engaging A13S1A and A13S1B selects sync A only as the internal trigger source. Once again, pin 1 of A3U1A is grounded.

4-53. DELAY LINE ASSEMBLY. The output of preamplifier substrate A3A1 is applied to delay line assembly A4. The delay line has a differential impedance of approximately 180 ohms and provides a time delay of 100 nanoseconds which allows the internal sync signal to trigger the time base and start the horizontal sweep. Without the insertion of this time delay in the signal path, the sweep would start after the signal reached the vertical deflection plates of the CRT, and the leading edge of fast rise time signals would not be displayed.

4-54. VERTICAL OUTPUT AMPLIFIER. (Schematic 5.)

Vertical output assembly A5 consists of a vertical amplifier and output amplifier substrate A5A1. Vertical amplifier A5Q1/A5Q3, terminates the differential delay line assembly A4 and translates the common-mode bias level to ground for the output amplifier substrate. A X5 magnifier, A5Q2 and A5Q4, increases the vertical gain by a factor of five, but with the bandwidth limited to approximately 40 MHz. Engaging MAG X5 switch A3S1B turns off A5Q2 and A5Q4 (normally saturated). This increases system gain by a factor of five and complementary circuitry on the preamplifier simultaneously diminishes position range by the same factor to maintain a consistent position control range.

4-55. Substrate A5A1 contains nine thick-film resistors, one high-frequency monolithic chip, and two discrete transistor chips. It provides drive capability for the CRT vertical deflection plates and has a differential voltage gain in excess of 100. High frequency adjustments A5R24, A5R20, A5R19, and A5R22 control the shape of the pulse response.

4-56. HORIZONTAL SECTION.

4-57. MAIN TRIGGER CIRCUITRY. (Schematic 7.) The internal sync signal developed on vertical preamplifier A3 is connected to the base of A7Q9 and A7Q10 through a cable. Shunt feedback stage A7Q11 drives emitter followers A7Q7, A7Q8, and A7Q12. The output of A7Q12 goes to display switch A7S3D and is used in the A VS B display mode. Transistor A7Q7 provides internal sync drive for main sweep, and A7Q8 provides internal sync drive for delayed sweep. When EXT trigger mode is selected, the input is from EXT TRIGGER connector J1 of the front panel. This signal is applied to INT/EXT switch A7S2E through EXT + 10 switch A7S2F. When A7S2F is engaged, the external trigger signal is reduced by a factor of 10.

4-58. The sync signal (external or internal) is applied to a two-path amplifier. The high-frequency path through A7Q4 and A7Q5, passes frequencies above 4 kHz. The low-frequency path through A7U1, passes all frequencies below 4 kHz. Both the high- and low-frequency cutoffs are determined by A7R5 and A7C6. With the LF REJ switch A7S2B engaged, the input to A7U1 is disconnected and only the high-frequency path is enabled. With HF REJ switch A7S2C engaged, A7Q4 is biased off and only the low-frequency path is enabled. When AC/DC switch A7S2D is in its AC position, the dc component of the trigger signal is blocked. When both HF REJ and LF REJ are engaged, a line frequency signal from the power supply is applied to A7U1. The outputs of the two-path amplifier are summed at the base of A7Q1 and the emitter of A7Q1 drives the signal input (pin 14) of A7U2.

4-59. The trigger level signal is applied to the level input (pin 11) of A7U2 through A7Q6. Integrated circuit A7U2 contains a differential amplifier and three dual-input Schmitt triggers. The first Schmitt trigger

determines the end of sweep and disables the other two Schmitt triggers until the end of the holdoff period. At the end of holdoff, the holdoff comparator develops a reset signal that is applied to the first Schmitt trigger. This arms the second Schmitt trigger. The second Schmitt trigger conducts when the input trigger signal crosses the trigger level threshold. This arms the third Schmitt trigger that conducts when the input signal recrosses the trigger level threshold.

4-60. The input sensitivity on which A7U2 generates a trigger signal is controlled by A7R20 and input sync signal slope is controlled by main slope switch A7S2A. A7S2A applies a ground to pin 16 for positive-slope triggering and +5 V for negative-slope triggering.

4-61. The output of A7U2 (pin 1) is applied to a three-transistor current switch (A7Q19, A7Q20, and A7Q21). When AUTO/NORM switch A7S1A is in NORM, the base of A7Q21 stays at +5 V and A7Q21 stays off. The bases of A7Q19 and A7Q20 are differentially driven from A7U2. The collector of A7Q19 going low starts the sweep. The complementary signal at the collector of A7Q20 enables the gate Schmitt (schematic 12) and turns the gate on. Current switch A7Q13/A7Q14 drives the RESET light and the bright-line auto circuit.

4-62. The bright-line auto circuit consists of A7Q15, A7Q16, A7Q17, and A7Q18. When the AUTO/NORM switch is in NORM, no bias is applied to the emitters of A7Q15, A7Q16, and A7Q17, and the bright-line auto circuit is inoperative. In the AUTO position, a bias is applied to these transistors and the bright-line auto circuit is activated. As long as the trigger circuit is being switched at a rate above 40 Hz, A7C13 will stay high and A7Q17 will remain off. When the trigger signal is lost, A7C13 discharges and A7Q17 turns on. As long as the trigger signal is absent, the bright-line auto circuit loop operates as follows. When A7Q17 turns on, A7Q21 turns on and main sweep starts. When the sweep reaches +11 volts, the reset Schmitt trigger on A7U2 conducts forcing pin 6 low. This turns on A7Q14 and A7Q15; A7Q17 and A7Q21 turn off and the sweep resets. The sweep stays reset until the end of holdoff. At the end of holdoff, pin 6 of A7U2 goes high, A7Q15 turns off and A7Q17 turns on starting another sweep. This completes the cycle and sweep continues in this mode until a trigger signal is present.

4-63. For single-sweep operation, SINGLE switch A7S1C is engaged. The SINGLE mode overrides the AUTO switch and also applies a bias signal of +4.7 volts to pin 5 of A7U2. This bias on pin 5 prevents the input Schmitt of A7U2 from resetting at the end of holdoff, and no trigger signal can be developed. The Schmitt does not reset until the RESET switch, A7S1B, is pressed. Capacitor A7C14 is at ground potential and pressing RESET momentarily pulls pin 5 of A7U2 low and resets the input Schmitt. A trigger signal can now be developed.

4-64. MAIN SWEEP AND INTEGRATOR. (Schematics 7, 8, and 9.) The main integrator, in conjunction with the sweep time controls, generates the main sweep. The Miller integrator circuit is comprised of current source A8Q13, source follower A8Q5, common-emitter stage A8Q6, and the integrating capacitor between the gate of A8Q5 and the collector of A8Q6. In the reset condition, current for A8Q13 is supplied through A8Q3. The main-sweep output stays at +1 volt. When a trigger signal is received, the base of A8Q1 goes low and A8Q1 turns on. This turns A8Q3 off. Current in A8Q13 is now supplied through the integrating capacitor resulting in a linear ramp at the collector of A8Q6. This ramp drives emitter followers A8Q8, A8Q9, and A8Q10. When the ramp reaches +11 volts, the emitter of A8Q10 is at +5 volts and A7U2 is set. This turns off A8Q1. With A8Q1 off, current from A8R7 flows through A8Q3 and discharges the selected integrating capacitor. When the voltage level at the base of A8Q4 falls to the voltage applied at the base of A8Q2, both A8Q2 and A8Q4 are conducting and the sum of the currents at the gate of A8Q5 is zero. This is the reset condition for the ramp.

4-65. The output of constant-current source A8Q13 is controlled by operational amplifier A8U1. Different reference voltages are developed for different ranges on TIME/DIV switch A8S1. The reference voltage is applied to A8U1 (pin 3). When different ranges are selected on the TIME/DIV switch, values of the ramp capacitor, integrating resistor, and reference voltage are changed. This changes the ramp slope for various sweep speeds. The ramp slope can be varied for any sweep speed by SWEEP VERNIER potentiometer R8.

4-66. The emitter of A8Q9 drives a particular holdoff capacitor (A8C13 through A8C18) depending on the position of TIME/DIV switch A8S1. At the end of the sweep, the holdoff capacitor is discharged through A8R40 and TRIGGER HOLDOFF potentiometer R9. When the voltage at the base of A8Q11 decays to +0.7 volts, A8Q12 turns on and the reset line to A7U2 (pin 4) goes low. This resets A7U2 so it can accept another trigger.

4-67. The positive-going ramp of the main sweep is also applied to pin 9 of delay comparator A7U4, which controls arming of the delayed sweep. DELAY potentiometer R6 establishes a reference voltage that is applied to buffer amplifier A7U3. The output of A7U3 drives pin 6 of A7U4. When the main sweep ramp voltage slightly exceeds the level established by R6, the comparator changes states. Its output arms the delayed-trigger circuit. When the delayed sweep switch is in the off position, A7U4 is inhibited at pin 13 and no delayed sweep can be generated.

4-68. The gate Schmitt circuit (see figure 4-3 and schematic 12) provides Gate Amplifier Assembly A12 with the proper input for each display mode. Gate Schmitt A7Q28 - A7Q32 is controlled by horizontal mode switch A7S3. It is set by the first positive control

pulse and resets on the first negative control pulse. In main sweep operation, the gate follows the main sweep. In delayed operation, the gate follows the delayed sweep. In mixed operation, the gate is started by the main sweep and terminated by the end of delayed sweep. Figure 4-4 shows the timing relationship of the gate and sweep waveforms.

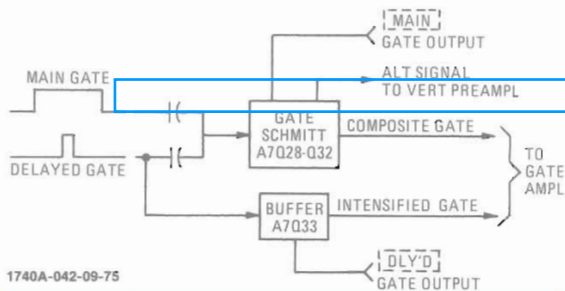


Figure 4-3. Gate Schmitt Simplified Block Diagram

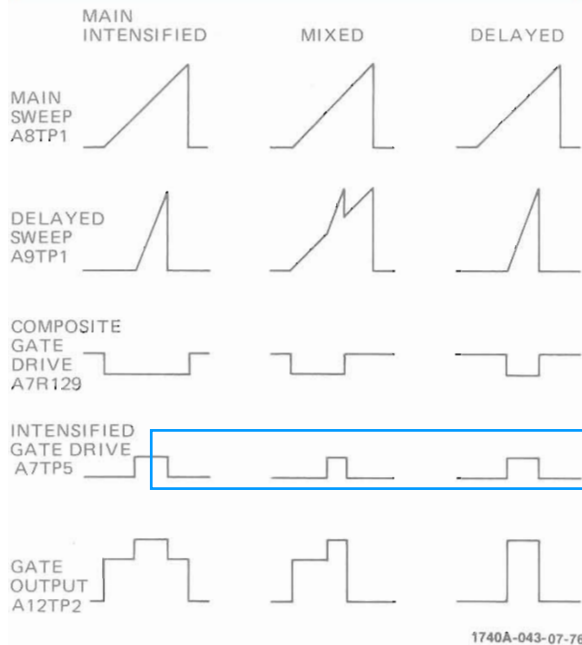


Figure 4-4. Timing Relationship of the Gate and Sweep Waveforms

4-69. DELAYED TRIGGER OPERATION. (Schematic 9.) Delayed trigger operation is similar to main trigger operation. The sync input to delayed trigger integrated circuit A10U1 is supplied through an impedance converter consisting of an FET matched pair (A10Q1 and emitter follower A10Q3). Delayed sweep is started by a negative-going pulse at the collector of A10Q10. When SWEEP AFTER DELAY switch A10S1D is in AUTO position, this will occur as soon as A10U1 is armed at pin 5 by a negative-going pulse from delay comparator A7U4. In TRIG position, the negative-going transition from the delay comparator does not

immediately cause delayed sweep to start. It arms A10U1 and a delayed trigger will be formed if a sync pulse occurs during the main sweep time.

4-70. DELAYED SWEEP. (Schematic 10). The operation of delayed sweep is similar to that of main sweep. One major difference is the delayed sweep reset level applied to the base of A9Q1. In the delayed mode of operation, this level is fixed at 1 volt, but in the mixed sweep mode of operation this reference is connected to the main sweep ramp. Output of the delayed integrator (TP1) follows the main sweep ramp until the delayed sweep start signal at the base of A9Q3 goes low. When this sweep start signal goes low, the delayed integrator no longer follows the reset level, but ramps up at a slope determined by the selected integrating capacitor and selected current source resistor.

4-71. HORIZONTAL DISPLAY SWITCH ASSEMBLY A7S3. (Schematics 7, 11, and 12.) The four switches in this assembly select the modes of horizontal display: delayed sweep, mixed sweep, main sweep, and A VS B display.

4-72. Delayed Sweep. The DLY'D sweep switch A7S3A performs two functions. When engaged, it reverse biases diode A7CR7 and prevents the main gate signal from driving the gate Schmitt. A7S3A also routes the delayed sweep ramp to the horizontal preamplifier.

4-73. Mixed Sweep. MIXED sweep switch A7S3B also performs two functions. When engaged, A7S3B applies the main sweep ramp as the reset reference to the delayed sweep integrator circuit. A7S3B also routes the delayed sweep ramp to the horizontal preamplifier.

4-74. Main Sweep. MAIN sweep switch A7S3C routes the main sweep ramp to the horizontal preamplifier.

4-75. A VS B Control. The A VS B switch A7S3D performs several functions. It sends a control signal to the vertical preamplifier which is used to select channel A vertical display and channel B sync. It biases the gate Schmitt to turn the gate on and forces the main trigger circuit to the single-shot mode. It also connects the sync amplifier output to the horizontal preamplifier.

4-76. HORIZONTAL PREAMPLIFIER. (Schematic 11.) The horizontal preamplifier converts the single-ended sweep or A VS B signal to a differential signal suitable for driving the horizontal output amplifier. The preamplifier provides sweep gain adjustment, sweep magnification adjustment (MAG X10), horizontal position, beam find control, and X10 magnification centering.

4-77. Transistor A7Q22 is a shunt feedback stage that level shifts the sweep ramp and drives differential

amplifier A7Q23/A7Q27. Transistor A7Q26 is a shunt feedback stage that is used to temperature compensate A7Q22. Horizontal POSITION control R11 drives this stage. When MAG X10 switch A7S1D is engaged, current from mag-center potentiometer A7R105 also drives this stage. Current source transistor A7Q24 provides bias for shunt feedback stage A7Q22. Current source transistors A7Q25 and A7Q34 provide bias for the differential amplifier. The X1 sweep speed is calibrated by emitter resistor A7R93. MAG X10 control is calibrated by A7R117.

4-78. When BEAM FIND switch A12S1 is engaged, voltage at the bases of A7Q25 and A7Q34 is lowered. This decreases the amount of current available to the output stage and prevents it from driving the trace off screen.

4-79. HORIZONTAL OUTPUT. (Schematic 11.) The horizontal output is a differential shunt feedback amplifier. Current required by A7Q23 is supplied through A11R4. This determines the voltage driving one horizontal plate through A11R7. Current required by A7Q27 is supplied through A11R23 which determines the voltage driving the other horizontal plate through A11R21. Transistors A11Q1, A11Q2, A11Q5, and A11Q6 are emitter followers that provide a high impedance for each side of the output amplifier. High-speed linearity is controlled by a lag network at the input of each amplifier. Resistor A11R10 controls one side and A11R15 the other side. Each side of the output amplifier can swing from approximately +8 volts to +110 volts.

4-80. GATE AMPLIFIER ASSEMBLY A12. (Schematic 3.)

4-81. The gate amplifier assembly controls trace intensity on the CRT. Gate preamplifier A12U1 sums all the desired functions necessary for control of trace intensity (see figure 4-5 for a simplified block diagram of the gate circuit).

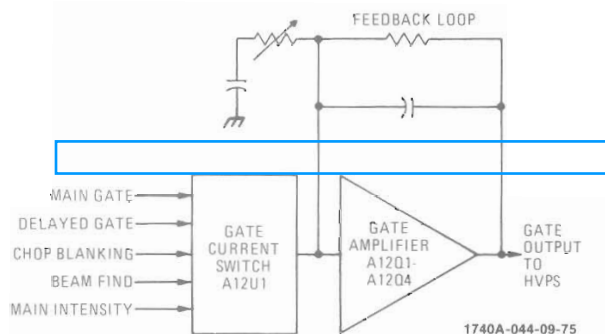


Figure 4-5. Gate Control Simplified Block Diagram

4-82. Front-panel BEAM INTENSITY control A12R3 establishes the level of current supplied to current

switch A12U1Q1/A12U1Q2. Output of the current switch is applied to a gate amplifier circuit consisting of A12Q1 through A12Q4. Intensity adjustment A15R2 on the high-voltage power supply establishes the minimum cut-off level for the CRT.

4-83. The main gate signal is applied to the base of A12U1Q1 controlling its operation. When the main gate signal is low, A12U1Q1 turns off and A12U1Q2 conducts. With A12U1Q2 conducting, the CRT is unblanked. The same applies for the delayed gate signal which is applied to the base of A12U1Q5. When the delayed gate signal is high, A12U1Q5 conducts, unblanking the CRT.

4-84. Chop blanking is accomplished through A12U1Q3. When CHOP mode of operation is selected, the chop blanking signal applied to the base of A12U1Q3 turns it on and off. The alternating action of A12U1Q3 turns A12U1Q2 on and off. This results in the blanking and unblanking of the CRT at the chop blanking repetition rate (≈ 250 kHz).

4-85. A Z-axis signal of +4 V, pulse width ≥ 50 nanoseconds, dc to ≤ 10 MHz will blank the CRT trace of normal intensity. A Z-axis signal of +5 V (dc + pk ac) will blank the CRT trace regardless of intensity setting.

4-86. When BEAM FIND switch A12S1 is engaged, the setting of BEAM INTENSITY control A12R3 is added to a fixed voltage and supplied through the gate amplifier to the CRT. This causes intensification of the CRT trace.

4-87. The gate amplifier output is a shunt feedback stage consisting of A12Q1 through A12Q4. Transistors A12Q1 and A12Q3 are emitter followers with A12Q1 providing the ac signal path. Network A12R13/A12C8 provides the feedback path.

4-88. HIGH-VOLTAGE POWER SUPPLY. (Schematic 2.)

4-89. The high-voltage power supply contains an oscillator and a rectifying circuit. When the instrument is turned on, +15 volts (unregulated) is applied to pin 3 of A15U1 causing the output to go high, turning on Q1. As Q1 conducts through the primary winding of A15T1 (pins 3 and 4), positive feedback to the base of Q1 occurs through another winding on the transformer (pins 1 and 2). The circuit oscillates at a rate determined by the inherent distributed inductance and capacitance of the transformer. The magnitude of the oscillations, and consequently the output of the power supply, is controlled by the voltage at the output of differential amplifier A15U1.

4-90. The voltage reference from the +15 V supply is established at the junction of A15R22 and A15R23. This reference voltage is applied to the inverting input of amplifier A15U1. A sample of the rectified cathode voltage is also applied to the junction of

A15R22 and A15R23 through A15R13/C8. Any change in cathode voltage is amplified by A15U1. The change is coupled through the primary winding on A15T1 to the base of Q1 and causes the amplitude of its oscillations to change. The change is in such a direction as to correct the original change in the rectified cathode voltage. Diode A15CR1 protects the oscillator transistor base from excess reverse voltage.

4-91. The CRT cathode and grid voltages are developed in the secondary of high-voltage transformer A15T1. The cathode voltage is rectified and filtered before application to the cathode of the CRT. It is also used as a feedback control to the high-voltage oscillator, as a reference for the CRT filament winding, the grid bias supply, and for the focus voltage divider network. The cathode voltage will vary between -2970 V to -3030 V, depending on component tolerances of A15R13 and A15R22 and is not adjustable.

4-92. The CRT grid voltage is supplied by a voltage tap (pin 5) on the secondary winding of A15T1. The voltage is developed and applied through a series RC network (A15C2/A15R3) to diodes that clamp the voltage swing between that established by intensity control A15R2 and the gate dc levels. The peak-to-peak voltage swing is rectified and applied to the CRT grid with reference to the cathode voltage. This controls brightness of the trace.

4-93. The unrectified cathode voltage in the secondary of A15T1 is applied to multiplier assembly A6 where the voltage is multiplied four times. Output of the multiplier (approximately 13 kV) is applied to the post-accelerator connector on the CRT.

4-94. Another secondary winding of transformer A15T1 furnishes the filament voltage for the CRT. This winding is referenced to the rectified cathode voltage through A15R14.

4-95. Transistors A15Q1 and A15Q2 sense the +120 V supply and if it is not above 100 volts, the high-voltage oscillator will not run. This protects the CRT from high-intensity burns.

4-96. LOW-VOLTAGE POWER SUPPLY. (Schematic 1.)

4-97. The low-voltage power supply provides regulated +5 V, +15 V, +43 V, +120 V, and -15 V for operation of the various circuits in the instrument. All low voltage supplies are referenced to the +15 V supply for regulation purposes.

4-98. **+15-VOLT SUPPLIES.** One of the secondary windings on input power transformer T1 is connected to bridge rectifier A16CR4. The rectified voltage (nominally +21 Vdc) is maintained at +15 volts by integrated circuit A16U1 and series regulator transis-

tor Q4. Regulator A16U1 contains a temperature compensation reference circuit (pin 4) and a differential amplifier with a Darlington output. The reference circuit is connected to the noninverting input of the differential amplifier (pin 3) through A16R23. The +15-volt output is attenuated through A16R25-R27. The wiper of A16R26 is connected to the inverting input of the differential amplifier. The Darlington output (pin 6) drives the base of series transistor Q4. A16R26 is adjusted to compensate for variations of the reference voltage so that with an output of +15 volts from the supply, the inverting and noninverting input voltages are equal.

4-99. The IC regulation includes an output current limiting circuit consisting of an NPN transistor whose collector is connected to the differential amplifier and first base of the Darlington pair (within the IC). The emitter and base connections for the NPN transistor are pins 10 and 6 on A16U1. When load current through A16R24 produces a sufficient voltage drop, the NPN transistor conducts, pulling the input to the Darlington pair toward the emitter potential of Q4. This limits the output current.

4-100. The -15 -volt supply, consisting of A16U3 and Q6, operates identically as the +15-volt supply except that the noninverting input to A16U3 (pin 3) is the sum of the +15 V and -15 V outputs (nominally zero volts).

4-101. +5-VOLT SUPPLY. The +5-volt regulator A16U2 functions identically to that of the +15 V regulator except that the reference voltage is provided by the output of the +15-volt supply and attenuated by A16R28 and A16R29.

4-102. +120-VOLT AND +43-VOLT POWER SUPPLIES. The +120-volt and +43-volt power supplies function identically; therefore, only the +120-volt supply will be discussed.

4-103. The ac input voltage from power transformer T1 is applied to bridge rectifier A16CR1. The dc output from the rectifier is filtered by A16C3. A +15-volt reference is applied through A16R1 to the base of A16Q1 which is part of differential amplifier A16Q1/Q2. The base of A16Q2 is connected to a voltage divider network across the output circuit. If the output falls below +120 V, the base of A16Q2 becomes less positive and A16Q2 conducts harder. A16Q2 is direct-coupled to Darlington pair A16Q4 and Q2. When A16Q2 current increases, conduction through A16Q4 and Q2 increases. This results in an increase in output voltage. When the output voltage reaches +120 volts, A16Q2 current reduces and equilibrium is reached. Transistor A16Q3 and resistor A16R2 form a current limiting circuit. As the current requirements increase towards the limit of the supply capability, the voltage drop across A16R2 is applied to the base of A16Q3 which conducts and limits the current drain from the Darlington pair.

4-104. The +43-volt power supply functions identically as the +120-volt supply. The Darlington pair consists of A16Q8 and Q3, and the current limiting circuit consists of A16Q7 and A16R10.

4-105. FLOODGUN FILAMENT VOLTAGE. Floodgun filament voltage is developed in a secondary winding of ac power transformer T1. The ac input voltage is rectified by A16CR3 and filtered by A16C7. The rectified voltage is applied through SCALE ILLUM potentiometer R12, (schematic 3) and dropping resistor A16R19 (schematic 1) to the floodgun filaments of the CRT. Potentiometer A16R20 adjusts the floodgun pattern.

4-106. LINE FREQUENCY. (Schematic 1.) The line frequency sync signal is developed in the same secondary winding of ac input power transformer T1 that is used for the +120-volt supply. The signal is applied through A16R40 to HF REJ switch A7S2C on assembly A7 (see schematic 7).

4-107. OPTION 101. (Schematic 14.)

4-108. Option 101 provides the capability of using the Model 1740A to present logic state display information from a logic state analyzer such as the HP Model 1607A. State display inputs are provided by input BNC connectors J8, J9, and J10 on the rear panel of the Model 1740A. With Option 101, the A VS B horizontal display mode is omitted and replaced by the state display mode pushbutton.

4-109. Option 101 incorporates the following changes to the standard Model 1740A:

a. The standard Interface Assembly A14 is replaced with Option 101 State Display Interface Assembly A14. Three wires from this assembly to the rear panel provide the inputs from the logic state analyzer. Two wires from A14 are soldered to the option inputs on Horizontal Sweep Assembly A7 (see schematic 11). Two more wires from A14 are soldered to Vertical Preamp Assembly A3 (see schematic 4).

b. Four diodes, A7CR17-A7CR20 are added to assembly A7.

c. Two resistors, A3R142 and A3R143, are added to assembly A3, and A3CR25 is moved to a new position on A3 (see schematic 4). Components A3C77, A3CR28, A3CR29, A3Q21, A3R139, and A3R140, which are associated with A VS B vernier control, are omitted from assembly A3 for Option 101.

4-110. When the STATE DSPL button is engaged, switch A7S3D (labeled A—B on schematics) performs the following functions. The main sweep is forced to single sweep. The horizontal preamplifier is disabled. Channels A and B of the vertical preamplifier are shut off. The trigger view amplifier is turned on. The gate Schmitt on assembly A7 is forced on, and control of the gate is from the rear panel Z-axis input J8.

4-111. Option 101 circuits on assembly A14 operate as follows. The gate is blanked by a positive signal on the rear-panel, Z-axis input from the Model 1607A Logic State Analyzer. When the state display mode is selected, the line labeled A—B control on the interface board is forced to ground, turning A14Q1 off. When the Z-axis input goes positive, the cathode of A14CR4, which drives the chop blanking line, goes positive and blanks the gate.

4-112. Differential amplifier A14Q4/A14Q5 amplifies the horizontal input from J10 on the rear panel and drives Horizontal Output Assembly A11 through diodes A7CR19 and A7CR20. The A—B ground level signal on the anodes of A14CR7 and A14CR8 back bias the diodes and permit the differential amplifier, A14Q4 and A14Q5, to drive the output stage.

4-113. Differential amplifier A14Q2/A14Q3 amplifies the vertical input from J10 on the rear panel. The A—B ground level signal turns off A14CR5 and A14CR6 and enables this differential amplifier. The collectors of A14Q2 and A14Q3 drive A3R142 and A3R143. The trigger view amplifier is enabled in this mode and the vertical state display signal drives the delay line through the trigger view amplifier. Gain and position of the vertical and horizontal sections are controlled from the logic state analyzer.

SECTION V

PERFORMANCE TESTS AND ADJUSTMENTS

5-1. INTRODUCTION.

5-2. This section contains performance tests and adjustment procedures for the Model 1740A Oscilloscope. The performance tests determine whether your instrument is operating within its published specifications. The adjustment procedures are provided to help you maintain your instrument within specification limits.

5-3. RECOMMENDED TEST EQUIPMENT.

5-4. Test equipment required for the performance tests and adjustment procedures is listed in table 5-1. Any equipment that satisfies the critical specifications given in the table may be substituted for the recommended model.

5-5. TEST RECORD.

5-6. A Performance Test Record is provided at the end of this section for the purpose of recording the results of the Performance Tests. This record lists all of the tested specifications and their acceptable limits. This record can be removed from the manual and retained as a permanent record of the incoming inspection or routine maintenance performed on the instrument. This record may be reproduced for your use without special permission.

5-7. PERFORMANCE TESTS.

5-8. Use the following test procedures to determine whether your instrument is operating within its published specifications. The test limits given in the accuracy tests and on the performance test record compare the instrument to the published specifications. The performance of the instrument should be tested upon receipt, and at regular intervals determined by your accuracy requirements. If the 1740A fails to meet one or more of its specifications, refer to the Adjustment Procedures, paragraph 5-36. The 1740A and test equipment should be operated at normal line voltage, with the 1740A line selector switch set to the correct positions for corresponding input line voltage.

5-9. INITIAL CONTROL SETTINGS.

5-10. The control settings listed below must be used for each performance check and adjustment procedure. Exceptions to these settings will be noted as they occur. After completing a check or adjustment, return the Model 1740A controls to the following settings:

| CONTROL | SETTING |
|--|------------------|
| All Pushbuttons (except as noted below) | out position |
| VOLTS/DIV (Channels A and B) | .1 |
| CAL (Channels A and B) | detent (full cw) |
| Coupling (Channels A and B) | DC |
| POSN (Channels A and B) | midrange |
| DISPLAY | A |
| TRIGGER | A |
| FOCUS | best trace |
| BEAM INTENSITY | 10 - 11 o'clock |
| LINE | ON |
| POSITION | midrange |
| TRIGGER LEVEL (Main and Delayed) | 3 o'clock |
| Sweep Mode | MAIN |
| DELAY | fully CCW |
| MAIN TIME/DIV | .1 mSEC |
| DLY'D TIME/DIV | OFF |
| SWEEP VERNIER | CAL |
| TRIGGER HOLDOFF | MIN |

5-11. PERFORMANCE TEST PROCEDURES.

5-12. **BANDWIDTH.** 3 dB down from an 6-division reference signal; dc to 100 MHz, dc coupled; and 10 Hz to 100 MHz, ac coupled. In the vertical MAG X5 mode, bandwidth is reduced to 40 MHz.

5-13. A signal generator is used to provide the reference signal. An rf voltmeter is used to monitor the signal level at the input connector to verify that the signal amplitude remains constant.

Equipment Required:

Signal Generator
RF Voltmeter
BNC Cable (48 inch)
BNC Tee
Adapter (GR874 to Male BNC)
Adapter (GR874 to Female BNC)

5-14. Perform bandwidth test as follows:

a. Connect signal generator and rf voltmeter as shown in figure 5-1.

b. Set Model 1740A controls as follows:

| | |
|--------------------------|--------|
| Coupling (both channels) | 50Ω |
| Channel A VOLTS/DIV | 0.01 |
| MAIN TIME/DIV | 1 μSEC |

Table 5-1. Recommended Test Equipment

| Instrument Type | Recommended Model | Required Characteristics | Required For |
|---------------------------|---|--|--------------|
| Digital Voltmeter | HP Model 3465A | Accuracy: 0.1% | A |
| Oscilloscope | HP Model 1707B | Bandwidth: 50 MHz 10:1 divider probe | A |
| Oscillator | HP Model 204C | 1 kHz to 500 kHz, 1 V p-p | A |
| Signal Generator | HP Model 3200B | 100 MHz, 30 mV p-p | P, A |
| Time-mark Generator | HP Model 226A | Time Marks 2 s to 5 ns | P, A |
| LCR Meter | HP Model 4332A | 20 pF range | A |
| Square-wave Generator | HP Model 211B | 10-kHz square wave 3 V pk | A |
| Fast-rise Pulse Generator | | Rise time: less than 500 ps 50-ohm output Variable amplitude Overshoot less than 3% | P, A |
| DC Standard | HP Model 740B | 40 mV to 160 V Accuracy: 0.1% | P, A |
| RF Voltmeter | HP Model 3406A with 11063A 50-ohm Tee | | P |
| Adapter | HP Part No. 1251-2277 | Male banana jack to female BNC adapter | P, A |
| Adapter (3) | HP Part No. 1250-0850 | GR874 to female BNC | P, A |
| 48-inch BNC Cable | HP Model 10503A | 50-ohm, BNC male to BNC male, approximately 48 inches long | P, A |
| 9-inch BNC Cables (2) | HP Model 10502A | 50-ohm, BNC male to BNC male, approximately 9 inches long (must be equal length) | P, A |
| Power Divider | General Radio Model 874-TPD | 50 ohms at all connections | P, A |
| BNC Tee | HP Part No. 1250-0781 | 1 male, 2 female | A |
| Adapter | HP Part No. 1250-1264 | Female banana jack to male BNC adapter | P |
| Adapter | HP Part No. 1250-0849 | GR874 to male BNC | P |

Table 5-1. Recommended Test Equipment (Cont'd)

| Instrument Type | Recommended Model | Required Characteristics | Required For |
|-------------------------|-------------------|--|--------------|
| Feedthrough Termination | HP Model 10100C | 50-ohm, male BNC at one end, female BNC at other end | P |
| Test Lead | | Alligator to male banana or alligator to alligator, approximately 12 inches long | A |

Note: P = Performance Tests, A= Adjustment Procedure.

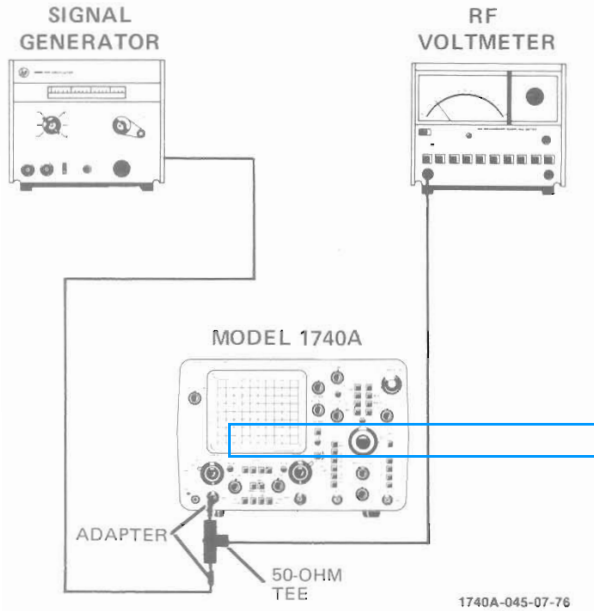


Figure 5-1. Bandwidth Test Setup

- c. Set signal generator frequency for approximately 10 MHz with exactly 6 divisions of vertical deflection on oscilloscope.
- d. Note rf voltmeter indication.
- e. Set signal generator frequency to 100 MHz.
- f. Adjust signal generator amplitude to obtain same indication as in step d. Amplitude of display should be equal to or greater than 4.24 divisions.
- g. Set Model 1740A controls as follows:

DISPLAY..... B
 TRIGGER..... B

- h. Connect signal generator to channel B INPUT and repeat steps b through f for channel B.

- i. Disconnect equipment and return Model 1740A controls to initial settings.

5-15. COMMON MODE REJECTION RATIO (CMRR). CMRR is at least 20 dB from dc to 20 MHz. Common mode signal amplitude is equivalent to 8 cm with one vernier adjusted for optimum rejection. Identical signals are applied to both channels with channel B operated in the inverted mode. The displayed signal is the common mode signal.

Equipment Required:

- Signal Generator
- 50-ohm, 44-inch BNC Cable
- Two 50-ohm, 9-inch BNC Cables
- Three GR874 to Female BNC Adapters
- 50-ohm Power Divider

5-16. Perform CMRR test as follows:

- a. Connect equipment as shown in figure 5-2.

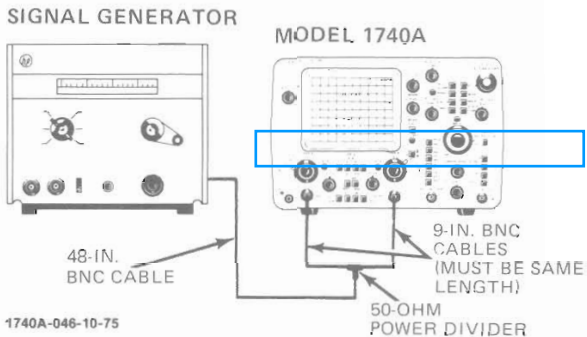


Figure 5-2. CMRR Test Setup

- b. Set Model 1740A controls as follows:

VOLTS/DIV (both channels)..... .1
 DISPLAY..... A
 MAIN TIME/DIV..... 1 μSEC
 Coupling (both channels)..... 50Ω

- c. Set signal generator controls to observe a 20-MHz signal, 8 divisions in amplitude.
- d. Set Model 1740A controls as follows:

| | |
|----------------|---------|
| CH B INVT..... | engaged |
| DISPLAY..... | A + B |
- e. Adjust either channel vernier (whichever is most effective) to achieve minimum deflection.
- f. Deflection should be less than 0.8 division (20 dB).
- g. Return Model 1740A controls to initial settings and disconnect equipment.

5-17. TRIGGERING.

5-18. Internal Triggering. DC to 25 MHz on signals causing 0.3 division vertical deflection increasing to 1 division at 100 MHz. The output of a signal generator is applied to the vertical input to check internal triggering.

Equipment Required:

Signal Generator
50-ohm, 48-inch BNC Cable

5-19. Perform the internal triggering check as follows:

- a. Connect signal generator to channel A INPUT.
- b. Set signal generator controls to obtain a 25-MHz signal with 0.3-division amplitude.
- c. Set Model 1740A controls as follows:

| | |
|-------------------------|----------|
| Channel A Coupling..... | 50Ω |
| MAIN TIME/DIV..... | .05 μSEC |
- d. Adjust main TRIGGER LEVEL to obtain stable display. Stable display confirms proper triggering.
- e. Change signal generator controls to obtain a 1-division signal at 100 MHz.
- f. Readjust main TRIGGER LEVEL to obtain stable display. Stable display confirms proper triggering.
- g. Change Model 1740A controls as follows:

| | |
|------------------------|----------|
| MAIN TIME/DIV..... | .1 μSEC |
| DELAYED TIME/DIV..... | .05 μSEC |
| SWEEP AFTER DELAY..... | TRIG |
| Sweep Display..... | DLY'D |

- h. Adjust delayed TRIGGER LEVEL to obtain stable display (slight readjustment of main TRIGGER LEVEL may be required).

- i. Change signal generator output to 0.3-division amplitude at 25 MHz.
- j. Readjust delayed TRIGGER LEVEL (and main TRIGGER LEVEL if necessary) to obtain stable display.
- k. Return Model 1740A controls to initial settings.

5-20. External Triggering. DC to 50 MHz on signals 50 mV p-p, increasing to 100 mV p-p at 100 MHz. The output of a signal generator is split using a power divider, and equal amplitude signals are applied to both channel A and the main EXT TRIGGER INPUT to check external triggering.

Equipment Required:

Signal Generator
50-ohm, 48-inch BNC Cable
Two 50-ohm, 9-inch BNC Cables
Three GR874 to Female BNC Adapters
50-ohm Feed through Termination
50-ohm Power Divider

5-21. Perform external triggering test as follows:

- a. Connect equipment as shown in figure 5-3.

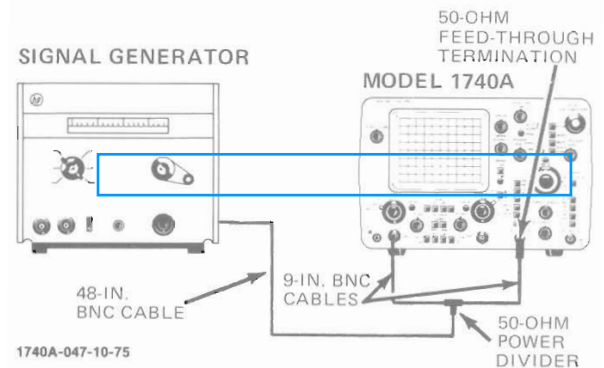


Figure 5-3. External Triggering Test Setup

- b. Set Model 1740A controls as follows:

| | |
|--------------------------|---------|
| Channel A VOLTS/DIV..... | .05 |
| Channel A Coupling..... | 50Ω |
| MAIN TIME/DIV..... | .1 μSEC |
| MAG X10..... | engaged |
| Main INT/EXT..... | EXT |

- c. Set signal generator controls to obtain a 50-MHz, 50-mV p-p signal (1. division).
- d. Adjust main TRIGGER LEVEL to obtain stable display.
- e. Set signal generator controls to obtain a 100-MHz, 100-mV p-p signal (2 divisions).

f. Adjust main TRIGGER LEVEL to obtain stable triggering.

g. Set Model 1740A controls as follows:

Main INT/EXT INT
 Delayed INT/EXT EXT
 SWEEP AFTER DELAY TRIG
 Delayed TIME/DIV05 μSEC
 Sweep Display DLY'D

h. Disconnect signal from main EXT TRIGGER and reconnect to delayed EXT TRIGGER input.

i. Adjust delayed TRIGGER LEVEL to obtain stable display (main TRIGGER LEVEL may also require adjustment).

j. Set signal generator controls to obtain a 50-MHz, 50-mV p-p signal.

k. Adjust TRIGGER LEVEL(S) as necessary to obtain stable triggering.

l. Return Model 1740A controls to initial settings and disconnect equipment.

5-22. SWEEP TIME ACCURACY. (+15°C to +35°C) ±2% in unmagnified mode and ±3% in MAG X10 mode. Refer to table 1-1 for other variations in ambient temperatures. In 50 ms to 2 s ranges, add 1% error.

Equipment Required:

- Time-mark Generator
- 50-ohm, 48-inch BNC Cable

5-23. Perform sweep time accuracy test as follows:

a. Connect time-mark generator to channel A INPUT.

b. Set time-mark generator and main TIME/DIV controls as shown in table 5-2 and check accuracy as indicated.

c. Change Model 1740A sweep display to DLY'D.

d. Set main and delayed TIME/DIV controls as indicated in table 5-3 and check accuracy. It may be necessary to make a minor adjustment of DELAY control to align markers with graticule lines.

e. Return Model 1740A controls to initial settings.

Table 5-2. Main TIME/DIV Accuracy

| Main TIME/DIV Setting | Time-mark Generator Settings | Accuracy | |
|-----------------------|------------------------------|----------------|-----|
| | | X1 | X10 |
| .05 μSEC | 50 nSEC | 1 mark/div ±2% | ±3% |
| .1 μSEC | .1 μSEC | 1 mark/div ±2% | ±3% |
| .2 μSEC | .2 μSEC | 1 mark/div ±2% | ±3% |
| .5 μSEC | .5 μSEC | 1 mark/div ±2% | ±3% |
| 1 μSEC | 1 μSEC | 1 mark/div ±2% | ±3% |
| 2 μSEC | 2 μSEC | 1 mark/div ±2% | ±3% |
| 5 μSEC | 5 μSEC | 1 mark/div ±2% | ±3% |
| 10 μSEC | 10 μSEC | 1 mark/div ±2% | ±3% |
| 20 μSEC | 20 μSEC | 1 mark/div ±2% | ±3% |
| 50 μSEC | 50 μSEC | 1 mark/div ±2% | ±3% |
| .1 mSEC | .1 mSEC | 1 mark/div ±2% | ±3% |
| .2 mSEC | .2 mSEC | 1 mark/div ±2% | ±3% |
| .5 mSEC | .5 mSEC | 1 mark/div ±2% | ±3% |
| 1 mSEC | 1 mSEC | 1 mark/div ±2% | ±3% |
| 2 mSEC | 2 mSEC | 1 mark/div ±2% | ±3% |
| 5 mSEC | 5 mSEC | 1 mark/div ±2% | ±3% |
| 10 mSEC | 10 mSEC | 1 mark/div ±2% | ±3% |
| 20 mSEC | 20 mSEC | 1 mark/div ±2% | ±3% |
| 50 mSEC | 50 mSEC | 1 mark/div ±3% | ±4% |
| .1 SEC | .1 SEC | 1 mark/div ±3% | ±4% |
| .2 SEC | .2 SEC | 1 mark/div ±3% | ±4% |
| .5 SEC | .5 SEC | 1 mark/div ±3% | ±4% |
| 1 SEC | 1 SEC | 1 mark/div ±3% | ±4% |
| 2 SEC | 2 SEC | 1 mark/div ±3% | ±4% |

Table 5-3. Delayed TIME/DIV Accuracy

| Main TIME/DIV Settings | Delayed TIME/DIV Settings | Time-mark Generator Settings | Accuracy | |
|------------------------------|---------------------------------|------------------------------------|----------------------|----------------------|
| | | | X1 | X10 |
| .1 μ SEC | .05 μ SEC | 50 nSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| .2 μ SEC | .1 μ SEC | .1 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| .5 μ SEC | .2 μ SEC | .2 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 1 μ SEC | .5 μ SEC | .5 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 2 μ SEC | 1 μ SEC | 1 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 5 μ SEC | 2 μ SEC | 2 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 10 μ SEC | 5 μ SEC | 5 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 20 μ SEC | 10 μ SEC | 10 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 50 μ SEC | 20 μ SEC | 20 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| .1 mSEC | 50 μ SEC | 50 μ SEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 2\%$ |
| .2 mSEC | .1 mSEC | .1 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| .5 mSEC | .2 mSEC | .2 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 1 mSEC | .5 mSEC | .5 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 2 mSEC | 1 mSEC | 1 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 5 mSEC | 2 mSEC | 2 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 10 mSEC | 5 mSEC | 5 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 20 mSEC | 10 mSEC | 10 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |
| 50 mSEC | 20 mSEC | 20 mSEC | 1 mark/div $\pm 2\%$ | 1 mark/div $\pm 3\%$ |

5-24. DIFFERENTIAL TIME ACCURACY. Main time base: 100 nSEC/div to 20 mSEC/div, $\pm(0.5\%$ of measurement + 0.1% of full scale) at ambient temperature of $+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$. Refer to table 1-1 for complete specifications. A time-mark generator is used in delayed sweep mode to check accuracy.

Equipment Required:

Time-mark Generator
50-ohm, 48-inch BNC Cable

5-25. Perform differential time accuracy test as follows:

a. Connect time-mark generator to Channel A INPUT.

b. Set Model 1740A controls as follows:

Main TIME/DIV 1 mSEC
Delayed TIME/DIV 10 μ SEC
Channel A Coupling 50 Ω

c. Set time-mark generator for 1 mSEC marker.

d. Adjust DELAY dial to intensify second time marker from left.

e. Set sweep display to DLY'D.

f. Adjust DELAY dial to place visible time markers exactly on center vertical graticule line.

g. Record DELAY dial reading _____.

h. Set sweep display to MAIN.

i. Adjust DELAY dial to intensity 10th time marker from left.

j. Set sweep display to DLY'D.

k. Adjust DELAY dial to place visible time marker exactly on center vertical graticule line.

l. Record DELAY dial reading _____.

m. Subtract DELAY dial reading obtained in step g from reading in step l, difference obtained should be 8 ± 0.05 .

n. Return Model 1740A controls to initial settings.

5-26. DELAY JITTER. $<0.002\%$ (1 part in 50 000) of maximum delay in each step from $+15^{\circ}\text{C}$ to $+35^{\circ}\text{C}$. Delay jitter is checked by expanding the sweep by 50 000 and visually monitoring the jitter.

Equipment Required:

Time-mark Generator
50-ohm, 48-inch BNC Cable

5-27. Perform delay jitter test as follows:

a. Connect time-mark generator to channel A INPUT (1 mSEC markers).

b. Set Model 1740A controls as follows:

Main TIME/DIV 1 mSEC
Delayed TIME/DIV 2 μ SEC
Channel A VOLTS/DIV5
Channel A Coupling 50 Ω

c. Adjust DELAY dial to position intensified portion of sweep on 11th time marker.

d. Set sweep display to DLY'D, and observe horizontal axis jitter on time marker. Jitter should be less than 1 division (corresponds to 1:50 000).

e. Return Model 1740A to initial settings and disconnect equipment.

5-28. RISE TIME. ≤ 3.5 ns, measured from 10% to 90% points of a 6-division input step, and ≤ 9 ns in X5 vertical magnification mode. A fast-rise pulse generator is applied to the vertical input; display rise time is then checked to see if it is less than 3.5 ns.

Equipment Required:

Fast-rise pulse generator
Adapter: GR874 to male BNC

5-29. Perform rise time test as follows:

a. Connect fast-rise pulse generator to channel A INPUT.

b. Set channel A VOLTS/DIV and pulse generator controls to obtain 6 divisions of vertical deflection.

c. Using channel A POSN control, center 6-division display on CRT.

d. Set Model 1740A controls as follows:

MAIN TIME/DIV05 μ SEC
MAG X10 engaged
Channel A Coupling 50%

e. Adjust horizontal POSITION as necessary to measure rise time between 10% and 90% points (inner set of dots across CRT face). Rise time should be equal to or less than 3.5 ns.

NOTE

If the fast-rise pulse generator has a rise time slower than the recommended 500 ps, the observed rise time will be slower also. To compensate for pulse generator rise time, use the following formula:

$$T_R(\text{observed}) = \sqrt{T_R^2(\text{oscilloscope}) + T_R^2(\text{pulse generator})}$$

or

$$T_R(\text{oscilloscope}) = \sqrt{T_R^2(\text{observed}) - T_R^2(\text{pulse generator})}$$

For example, a pulse generator with a 2 ns rise time would cause a properly operating oscilloscope with a rise time of 3.5 ns to display a rise time of 4.03 ns.

$$T_R(\text{observed}) = \sqrt{3.5^2 + 2^2} = 4.03 \text{ ns}$$

f. Depress vertical MAG X5 switch.

g. Reset channel A VOLTS/DIV and pulse generator controls to obtain an 8-division display.

h. Center display on CRT. Rise time should be equal to or less than 9 ns.

i. Connect the fast-rise pulse generator to channel B input and repeat steps b through h for channel B.

j. Return Model 1740A controls to initial settings and disconnect equipment.

5-30. Z-AXIS BLANKING. +4V, ≥ 50 -ns wide pulse blanks trace of any intensity, usable to 10 MHz for normal intensity. +4 V signal is applied to the Z-axis input and the CRT is monitored to verify blanking.

Equipment Required:

Dc Standard
50-ohm, 48-inch BNC Cable
Adapter: male banana jack to female BNC

5-31. Perform blanking test as follows:

a. Connect voltmeter calibrator to Z-AXIS INPUT on rear panel.

b. Set voltmeter for +4 Vdc.

c. Verify that the free-running baseline is blanked, regardless of INTENSITY setting.

5-32. DEFLECTION FACTOR. Accuracy $\pm 3\%$ on all ranges. A voltmeter calibrator or dc power supply is connected to the vertical inputs and deflection is checked on all ranges.

Equipment Required:

Dc Standard
50-ohm, 48-inch BNC Cable
Adapter: male banana jack to female BNC

5-33. Perform deflection factor test as follows:

a. Connect dc standard to channel A INPUT.

b. Set channel A VOLTS/DIV control and dc standard as indicated in table 5-4. Deflection should be 8 divisions $\pm 3\%$ for each checkpoint.

c. Change DISPLAY to B and repeat step b for channel B.

d. Return Model 1740A controls to initial settings.

Table 5-4. Deflection Factor Accuracy

| VOLTS/DIV Settings | Dc Standard Settings |
|--------------------|----------------------|
| 20 | 160 V |
| 10 | 80 V |
| 5 | 40 V |
| 2 | 16 V |
| 1 | 8 V |
| .5 | 4 V |
| .2 | 1.6 V |
| .1 | .8 V |
| .05 | .4 V |
| .02 | .16 V |
| .01 | .08 V |
| .005 | .04 V |

5-34. CALIBRATOR. Amplitude: 1 V p-p into 1 megohm, $\pm 1.0\%$; 0.1 V into 50 ohms with $< 0.1 \mu\text{s}$ rise time. Calibrator amplitude is checked against a known dc standard. Rise time is measured directly on CRT.

Equipment Required:

Dc Standard
 Adapter: male banana jack to female BNC
 50-ohm, 48-inch BNC Cable
 Test lead
 Adapter: female banana jack to male BNC

5-35. Perform calibrator test as follows:

- Set Channel A VOLTS/DIV to .2.
- Connect dc standard to channel A INPUT.
- Set dc standard for a +1 V output and carefully note vertical deflection.
- Disconnect dc standard and connect CAL 1V output to channel A INPUT using test lead and adapter. Deflection should be within $\pm 1.0\%$ of that noted in step c.
- Set channel A VOLTS/DIV to .02 and coupling to 50 ohms. Set MAIN TIME/DIV control to .05 μSEC and measure rise time. Rise time should be less than 0.1 μs .
- Disconnect equipment and return controls to initial settings.

Table 5-5. Low-voltage Supply Limits

| VOLTAGE | TEST POINT | LIMITS | RIPPLE |
|---------|------------|---|-------------------|
| -15 V | A16TP1 | $\pm 300 \text{ mV}$ | $< 10 \text{ mV}$ |
| +5 V | A16TP2 | $\pm 100 \text{ mV}$ | $< 5 \text{ mV}$ |
| +15 V | A16TP4 | previously set to $< \pm 10 \text{ mV}$ | $< 10 \text{ mV}$ |
| +43 V | A16TP5 | $\pm .8 \text{ V}$ | $< 5 \text{ mV}$ |
| +122 V | A16TP6 | $\pm 6 \text{ V}$ | $< 20 \text{ mV}$ |

5-36. ADJUSTMENTS.

5-37. The following paragraphs provide adjustment procedures to return the Model 1740A to peak operating condition when repairs are required. In addition to complete step-by-step procedures, a condensed adjustment procedure is included (table 5-9) for the convenience of technicians who have sufficient experience with the Model 1740A. For best results, adjustments should be performed at room temperature and in the sequence provided, since several adjustments are directly related to preceding adjustments. Adjustment location photographs are provided on a foldout page at the rear of this section. Schematics, troubleshooting information, and other service data are provided in Section VIII.

5-38. Although this instrument has been designed in accordance with international safety standards, this manual contains information and warnings which must be followed to ensure safe operation and to retain the instrument in safe condition. Service and adjustments should be performed only by qualified service personnel.

WARNING

Read the Safety Summary at the front of this manual before performing adjustment procedures.

NOTE

See figure 5-5 for adjustment locations.

5-39. Remove top and bottom covers from Model 1740A, set controls to initial settings, apply power, and allow fifteen minutes for instrument warmup.

5-40. LOW VOLTAGE POWER SUPPLY ADJUSTMENT.

Equipment Required:

Digital Voltmeter

- Connect digital voltmeter between A16TP4 and ground test point, A16TP3.
- Adjust A16R26, +15 V Adj., for +15 Vdc $\pm 10 \text{ mV}$.
- If desired, check other voltages as indicated in table 5-5. Supplies should remain within ripple specifications at both high- and low-line conditions.
- Disconnect equipment.

5-41. INTENSITY LIMIT ADJUSTMENT.

- a. Set Model 1740A controls as follows:
 - DLY'D TIME/DIV 10 μ SEC
 - BEAM INTENSITY minimum (CCW)
- b. Adjust A15R2, intensity limit adj. until intensified portion of sweep is just extinguished.
- c. Return controls to initial settings.

5-42. ASTIGMATISM AND FOCUS ADJUSTMENT.

- a. Set Model 1740A controls as follows:
 - MAIN TIME/DIV 1 SEC
 - SWEEP VERNIER fully CCW
 - BEAM INTENSITY barely visible spot
- b. While spot slowly moves across CRT, adjust FOCUS on front panel and ASTIGMATISM on rear panel for smallest and best-defined spot.
- c. Return controls to initial settings.

5-43. GATE RESPONSE ADJUSTMENT.**Equipment Required:**

Monitor Oscilloscope (HP Model 1707B with 10:1 divider probe)

- a. Using 10:1 divider probe and monitor oscilloscope, monitor gate output at A12TP1.
- b. Vary BEAM INTENSITY to set gate amplitude to 25 V peak.
- c. Set Model 1740A MAIN TIME/DIV to .5 μ SEC.
- d. Adjust A12R12 and A12C11, gate comp adj., for best response, \leq 3% overshoot.
- e. Disconnect equipment and return Model 1740A controls to initial settings.

5-44. FLOODGUN GRID ADJUSTMENT.

- a. Set SCALE ILLUM fully CW.
- b. Adjust A16R20, F.G. adj., for maximum brightness with uniform illumination.
- c. Decrease SCALE ILLUM and verify that CRT remains evenly illuminated.

5-45. TRACE ALIGN AND Y-AXIS ALIGN ADJUSTMENT. (Omit this paragraph for Option 101 instruments and proceed to paragraph 5-46.)**Equipment Required:**

Oscillator

- a. Obtain horizontal baseline.
- b. Adjust TRACE ALIGN on rear panel to make horizontal trace exactly parallel with the CRT graticule lines.
- c. Set display mode to A VS B.
- d. Connect oscillator to channel A INPUT.
- e. Adjust oscillator for approximately 1-kHz signal with 8 divisions of vertical deflection.
- f. Adjust A12R16, Y-align, so that vertical trace is parallel with the vertical graticule line.
- g. Disconnect equipment and return Model 1740A controls to initial settings.

5-46. TRACE ALIGN AND Y-AXIS ALIGN ADJUSTMENTS. (Option 101 instruments only.)**Equipment Required:**

Oscillator

- a. Obtain horizontal baseline.
- b. Adjust TRACE ALIGN on rear panel until horizontal trace is exactly parallel with the CRT graticule lines.
- c. Set main TIME/DIV to 1 mSEC.
- d. Connect oscillator to channel A INPUT.
- e. Adjust oscillator for approximately 500-kHz signal with 8 divisions of vertical deflection.
- f. With horizontal POSITION, place left side of raster at center screen.
- g. Adjust A12R16, Y-align, until left side of raster is parallel to vertical graticule lines.
- h. Disconnect equipment and return Model 1740A controls to initial settings.

5-47. CALIBRATOR AMPLITUDE ADJUSTMENT.**Equipment Required:**

Digital Voltmeter

- a. Connect digital voltmeter between CAL 1 V output and ground.
- b. Adjust A3R116, calibrator amp., for an indication of 0.500 V \pm 5 mV. Since the calibrator signal is a symmetrical square wave, by adjusting the amplitude for 0.5 V average value, the peak value of the calibrator pulse will be 1 V \pm 10 mV.

- c. Disconnect equipment.

5-48. TRIGGER SENSITIVITY ADJUSTMENT.

Equipment Required:

Oscillator
BNC Tee
Adapter, male banana to female BNC
50-ohm feedthrough termination
Two 50-ohm, 48-in. BNC Cables

- a. Set Model 1740A controls as follows:
- | | |
|-----------------------------|---------|
| VOLTS/DIV (channel A) | .005 |
| Coupling (channel A) | 50 ohms |
| Main INT/EXT | EXT |
- b. Connect oscillator to both channel A INPUT and main EXT TRIGGER input, using adapter and BNC Tee. Terminate the EXT TRIGGER input with the 50-ohm feedthrough termination.
- c. Set oscillator to obtain a 50-kHz, 15-mV p-p sine wave (3 div).
- d. Set main AUTO/NORM to NORM.
- e. Adjust main trig. sens. A7R20 fully CW.
- f. Slowly rotate main TRIGGER LEVEL from one extreme to the other. Note that one sweep occurs for each direction of rotation.
- g. While rotating TRIGGER LEVEL, slowly adjust main trig. sens. A7R20 CCW until sweep occurs for only one direction of rotation of TRIGGER LEVEL.
- h. Set main AUTO/NORM to AUTO.
- i. Increase oscillator amplitude to 20 mV p-p (4 div).
- j. Set main AUTO/NORM to NORM.
- k. Rotate main TRIGGER LEVEL. A sweep should occur for each direction of rotation.

- l. Change Model 1740A controls as follows:

| | |
|------------------------|--------------|
| Main AUTO/NORM | AUTO |
| Sweep mode | DLY'D |
| Main TIME/DIV | .1 mSEC |
| Delayed TIME/DIV | 50 μ SEC |
| Main INT/EXT | INT |
| Delayed INT/EXT | EXT |

- m. Disconnect oscillator from main EXT TRIGGER and connect to delayed EXT TRIGGER.

- n. Set oscillator for a 50-kHz, 15-mV p-p sine wave.

- o. Set SWEEP AFTER DELAY to TRIG.

- p. Adjust delayed trig. sens. A10R9 fully cw.

- q. While rotating delayed TRIGGER LEVEL from one extreme to the other, adjust A10R9 CCW until sweep occurs for only one direction of rotation or not at all.

- r. Set SWEEP AFTER DELAY to AUTO.

- s. Increase oscillator output to 20 mV p-p.

- t. Set SWEEP AFTER DELAY to TRIG.

- u. Rotate delayed TRIGGER LEVEL. A sweep should occur for each direction of rotation.

- v. Disconnect equipment and return controls to initial settings.

5-49. SYNC ZERO ADJUSTMENT.

Equipment Required:

Oscillator

- a. Connect oscillator to channel A INPUT.
- b. Set oscillator controls to obtain a 1-kHz sine wave at approximately six divisions.
- c. Adjust main TRIGGER LEVEL for a stable display.
- d. Change main trigger coupling between AC and DC and note shift in trigger point.
- e. Adjust A7R41, sync zero, until no shift occurs.
- f. Disconnect equipment and return Model 1740A controls to initial settings.

5-50. TRIGGER VIEW BALANCE ADJUSTMENT.

Equipment Required:

Oscillator

- a. Set Model 1740A controls as follows:

| | |
|----------------------|-----------|
| TRIGGER VIEW | depressed |
| Main AUTO/NORM | NORM |
| Main INT/EXT | EXT |

- b. Connect oscillator to main EXT TRIGGER input.

- c. Set oscillator for approximately 100-mV p-p, 10-kHz sine wave.

d. Adjust main TRIGGER LEVEL for stable display.

e. Decrease oscillator amplitude to lowest amplitude where stable triggering can be maintained.

f. Adjust A3R86, trig. view bal., until trigger view display is centered on middle horizontal graticule line.

g. Disconnect equipment and return Model 1740A controls to initial settings.

5-51. DELAY START ADJUSTMENT.

Equipment Required: None.

a. Set Model 1740A controls as follows:

MAIN TIME/DIV1 mSEC
 DLY'D TIME/DIV05 μSEC
 DELAY2

b. Set horizontal POSITION control so that sweep starts exactly on the far left graticule line.

c. Adjust A7R169, delay start, until intensified marker is 2 mm after sweep start point.

d. Return Model 1740A controls to initial settings.

5-52. HORIZONTAL AMPLIFIER GAIN ADJUSTMENTS.

Equipment Required:

Time-mark Generator

a. Set Model 1740A controls as follows:

Channel A Coupling 50Ω
 Channel A VOLTS/DIV5
 DLY'D TIME/DIV05 μSEC
 DELAY 1.00

b. Adjust horizontal POSITION control until intensified dot is exactly on second vertical graticule line.

NOTE

A slight reduction in intensity may be helpful.

c. Set DELAY control to 9.00 position.

d. Adjust A7R93, X1 gain, until intensified dot is on 10th vertical graticule line from left.

e. Set DELAY control to 1.00 position.

f. Repeat steps b through e until intensified dot is on second vertical graticule line when DELAY control is a 1.00 position and is on 10th vertical graticule line from left when DELAY control is at 9.00 position.

g. Connect time-mark generator to channel A INPUT connector.

h. Set time-mark generator for .5 μSEC time markers.

i. Set MAIN TIME/DIV to .5 μSEC.

j. Using horizontal POSITION control, align time markers with vertical graticule lines.

k. On main sweep assembly, A8, adjust .05 - 2 μSEC, A8R43, for exactly one time marker per division.

l. Set HORIZ DISPLAY control to MAG X10.

m. Using horizontal POSITION control, align one time marker with first left vertical graticule line.

n. On horizontal sweep assembly, A7, adjust A7R117, X10 gain, until one time marker coincides with first left vertical graticule line and one time marker coincides with last right vertical graticule line.

o. Disconnect equipment and return Model 1740A controls to initial settings.

5-53. X10 AMPLIFIER BALANCE ADJUSTMENT.

Equipment Required:

Time-mark Generator

a. Set Model 1740A controls as follows:

Coupling (channel A) 50Ω
 VOLTS/DIV (channel A)5
 MAIN TIME/DIV 1 μSEC

b. Connect time-mark generator to channel A INPUT connector.

c. Set time-mark generator for 5 μSEC time markers and observe three time marks.

d. Using horizontal POSITION control, center middle time marker on CRT screen.

e. Engage MAG X10 switch and adjust A7R105, mag. center, to center time mark.

f. Disconnect equipment and return Model 1740A controls to initial settings.

5-54. HORIZONTAL LINEARITY ADJUSTMENT.

Equipment Required:

Time-mark Generator

a. Connect time-mark generator to channel A INPUT.

b. Set Model 1740A controls as follows:

Coupling (channel A) 50Ω
 VOLTS/DIV2
 MAIN TIME/DIV05 μSEC
 MAG X10 engaged

c. Set time-mark generator for 10 ns markers.

d. Starting with A11R10 and A11R15, linearity adj. fully CW, adjust for best overall linearity in the center 8 divisions of unmagnified sweep (center 80 divisions of magnified sweep).

e. Disconnect equipment and return Model 1740A controls to initial settings.

5-55. PRELIMINARY MAIN SWEEP CALIBRATION.

Equipment Required:

Time-mark Generator

a. Set MAIN TIME/DIV and time-mark generator as indicated in table 5-6 and make adjustments to obtain one marker/division.

Table 5-6. Preliminary Main Sweep Calibration

| MAIN TIME/DIV Settings | Time-mark Generator Settings | Adjust |
|------------------------|------------------------------|--------|
| 1 μSEC | 1 μs | A8R43 |
| 10 μSEC | 10 μs | A8R12 |
| 1 mSEC | 1 ms | A8R13 |
| 50 mSEC | 50 ms | A8R14 |

5-56. DELAYED SWEEP ADJUSTMENT.

Equipment Required:

Time-mark Generator

a. Connect time-mark generator to channel A INPUT.

b. Set Model 1740A controls as follows:

Coupling (channel A) 50Ω
 VOLTS/DIV5
 Sweep Mode DLY'D

c. Set time-mark generator, MAIN TIME/DIV, and DLY'D TIME/DIV as indicated in table 5-7 and make necessary adjustments. If necessary, compromise so that all ranges controlled by a particular adjustment are in specified tolerance.

d. Disconnect equipment and return Model 1740A controls to initial settings.

5-57. MAIN SWEEP FINE ADJUSTMENTS. These adjustments utilize the accuracy of the DELAY dial to calibrate main sweep more accurately than is possible using the visual method (paragraph 5-54). These adjustments must be accomplished if the differential time accuracy specification is to be met.

Equipment Required:

Time-mark Generator

a. Connect time-mark generator to channel A INPUT connector.

b. Set Model 1740A front-panel controls as follows:

Coupling (channel A) 50Ω
 VOLTS/DIV (channel A)5
 MAIN TIME/DIV5 μSEC
 DLY'D TIME/DIV05 μSEC
 Horiz. Display DLY'D
 AUTO/NORM NORM

Table 5-7. Delayed Sweep Calibration Adjustments

| MAIN TIME/DIV Settings | DLY'D TIME/DIV Settings | Time-mark Generator Settings | Adjust | Tolerance |
|------------------------|-------------------------|------------------------------|--------|-----------|
| .1 μSEC | .05 μSEC | 50 ns | A9R28 | ±2% |
| .2 μSEC | .1 μSEC | .1 μs | | |
| .5 μSEC | .2 μSEC | .2 μs | | |
| 1 μSEC | .5 μSEC | .5 μs | | |
| 2 μSEC | 1 μSEC | 1 μs | | |
| 5 μSEC | 2 μSEC | 2 μs | | |
| 10 μSEC | 5 μSEC | 5 μs | A9R10 | ±2% |
| 20 μSEC | 10 μSEC | 10 μs | | |
| 50 μSEC | 20 μSEC | 20 μs | | |
| .1 mSEC | 50 μSEC | 50 μs | | |
| .2 mSEC | .1 mSEC | .1 mSEC | | |
| .5 mSEC | .2 mSEC | .2 mSEC | | |
| 1 mSEC | .5 mSEC | .5 mSEC | A9R11 | ±2% |
| 2 mSEC | 1 mSEC | 1 mSEC | | |
| 5 mSEC | 2 mSEC | 2 mSEC | | |
| 10 mSEC | 5 mSEC | 5 mSEC | | |
| 20 mSEC | 10 mSEC | 10 mSEC | | |
| 50 mSEC | 20 mSEC | 20 mSEC | | |

- c. Set time-mark generator for .5 μs markers.
- d. Set DELAY potentiometer to 1.00 position.
- e. Using channel A POSN control, center vertically time-mark display on CRT.
- f. Using horizontal POSITION control, set leading edge of time mark to center CRT graticule line.
- g. Set DELAY potentiometer to 9.00 position.
- h. Adjusting .05 - 2 μSEC, A8R43, set leading edge of time marker to center CRT graticule line.
- i. Repeat steps d through h until leading edge of time marker can be set to center CRT graticule line with DELAY dial set at 9.00.
- j. This completes step 1 in table 5-8. Complete remaining steps in table by repeating above procedure for each step.

k. Disconnect equipment and return Model 1740A controls to initial settings.

5-58. VERTICAL AMPLIFIER BALANCE ADJUSTMENT.

Equipment Required:

Digital Voltmeter

- a. Set channel A and B coupling to 50Ω and VOLTS/DIV (channels A and B) to .05.
- b. Connect digital voltmeter to A3TP9.
- c. Adjust A3R11, channel A FET balance, for 0 V ±0.5 mV.
- d. Change DISPLAY to B.
- e. Connect digital voltmeter to A3TP10.
- f. Adjust A3R31, channel B FET balance, for 0 V ±0.5 mV.
- g. Disconnect voltmeter.
- h. Change DISPLAY to A.
- i. Set channel A and B VOLTS/DIV switches to .005.

j. While changing channel A VOLTS/DIV between .005, .01, and .02, adjust A3R18, channel A 5-mV balance, for minimum trace shift between these three ranges.

k. Rotate channel A VOLTS/DIV between .005 and .05 and adjust A3R19, channel A 50-mV balance, for minimum trace shift between these two ranges.

l. Change DISPLAY to B.

m. Rotate channel B VOLTS/DIV between .005, .01, and .02, and adjust A3R77, channel B 5-mV balance, for minimum trace shift between these three ranges.

n. Rotate channel B VOLTS/DIV between .005 and .05 and adjust A3R76, channel B 50-mV balance, for minimum trace shift between these two ranges.

o. While switching CH B INVT selector between its engaged and disengaged position, adjust A3R90, polarity balance, until trace shift is minimal. If A3R90 is changed, recheck steps m and n for correct balance. If additional adjustments are made for m and n, recheck adjustment of A3R90 as described above.

p. Return controls to initial settings.

5-59. POSITION AND SYNC BALANCE ADJUSTMENT.

Equipment Required:

Oscillator
BNC Tee

a. Set Model 1740A controls as follows:

DISPLAY..... B
POSN (channel B) 12 o'clock

b. Switch between normal and MAG X5 and adjust A3R32, channel B posn for minimum trace shift.

c. Change Model 1740A controls as follows:

DISPLAY..... ALT
TRIGGER COMP
VOLTS/DIV (both channels)..... .01

Table 5-8. Main Sweep Fine Adjustment

| Step | Time-mark Generator Setting | MAIN TIME/DIV Setting | DLY'D TIME/DIV Setting | Adjust |
|------|-----------------------------|-----------------------|------------------------|--------|
| 1 | .5 μs | .5 μSEC | .05 μSEC | A8R43 |
| 2 | 10 μs | 10 μSEC | 1 μSEC | A8R12 |
| 3 | 1 ms | 1 mSEC | .1 mSEC | A8R13 |
| 4 | 50 ms | 50 mSEC | 5 mSEC | A8R14 |

d. Connect a 10-kHz sine wave to both channels. Cables between BNC tee and input connectors should be of equal length.

e. Adjust oscillator for 0.5 divisions of vertical deflection.

f. Adjust sync A bal. A3R79 until both channels trigger stably and are in phase. If A3R79 is changed, recheck steps j and k in paragraph 5-57 for correct balance. If additional adjustments are made for j and k, recheck adjustment of A3R79 as described above.

g. Disconnect oscillator.

h. Return Model 1740A controls to initial settings.

i. Switch between normal and MAG X5 and adjust A3R58, channel A POSN, for minimum trace shift.

j. Disengage MAG X5.

5-60. INPUT CAPACITANCE AND ATTENUATOR COMPENSATION ADJUSTMENTS.

Equipment Required:

Square-wave Generator
LCR Meter

a. Connect square-wave generator to channel A INPUT.

b. Set Model 1740A controls as follows:

Coupling (channel A) 50Ω
VOLTS/DIV (channel A)5
MAIN TIME/DIV 20 μSEC

c. Set square-wave generator controls to obtain a 3-V peak, 5-kHz square wave.

d. Adjust A3C2, .5 volt comp., with insulated adjusting tool for best square-wave response.

e. Disconnect square-wave generator.

f. Set Model 1740A controls as follows:

VOLTS/DIV (both channels)..... .2
Coupling (channel A) DC

g. Connect LCR Meter to channel A INPUT and observe reading (19.5 to 21.5 pF).

h. Set channel A VOLTS/DIV to .5.

i. Adjust A3C4, channel A input cap., to obtain same reading as noted on .2 range (step g).

j. Disconnect LCR meter.

k. Change DISPLAY to B and repeat steps a through j for channel B, adjusting A3C17, channel B .5 V input comp., and A3C19, channel B .5 V cap.

l. Disconnect equipment and return Model 1740A controls to initial settings.

5-61. VERTICAL GAIN ADJUSTMENT.

Equipment Required:

Test Lead

a. Connect CAL 1 V output to channel A INPUT using test lead and adapter.

b. Set Model 1740A controls and adjustments as follows:

VOLTS/DIV (both channels)..... .2
A3R49, channel A gain fully CW
A3R46, channel B gain..... fully CW

c. Note signal amplitude of channel A.

d. Change DISPLAY and TRIGGER to B and change CAL signal from A to B input.

e. If channel B amplitude is larger than channel A, turn A3R46, channel B gain, CCW until channel gains are equal. If channel A is larger than channel B, turn A3R49, channel A gain, CCW until gains are equal.

f. Adjust A3R65, overall gain, to display exactly 5 divisions vertically.

g. Disconnect equipment and return Model 1740A controls to initial settings.

5-62. PULSE RESPONSE ADJUSTMENT.

Equipment Required:

Fast-rise Pulse Generator

a. Connect fast-rise pulse generator to channel A INPUT.

b. Set Model 1740A controls as follows:

Coupling (both channels)..... 50Ω
MAIN TIME/DIV05 μSEC
A5R19..... fully CCW
A5R20..... fully CCW
A5R22..... fully CCW
A5R24 fully CCW

c. Set channel A VOLTS/DIV and pulse generator controls as necessary to obtain a 5-division display. If possible, make adjustments on the .01 VOLTS/DIV ranges.

d. Adjust A5R24, HF No. 1, CW to partially smooth front edge perturbation. Adjust A5R20, HF No. 2, CW to speed up front edge (see figure 5-4).

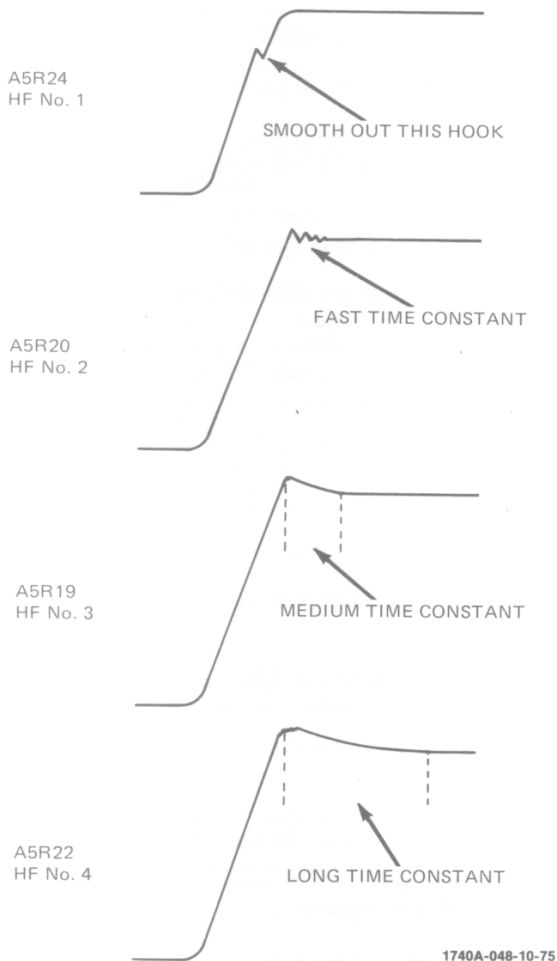


Figure 5-4. Pulse Response Adjustments

e. Alternately adjust A5R24 and A5R20 to set leading edge of pulse to most resemble its known characteristics.

NOTE

If pulse generator being used is specified for 3% overshoot, do not set adjustments for less than 3% since this is effectively detuning the vertical amplifier bandwidth.

f. Adjust A5R19, HF No. 3, for flattest pulse top (medium time constant).

g. Adjust A5R22, HF No. 4 for flattest pulse top (long time constant).

h. Check adjustment again since some interaction occurs (steps d through g).

i. Change DISPLAY to B.

j. Connect the fast-rise pulse generator to channel B INPUT.

k. Adjust A3R22, channel B HF adj., to make the channel B display as similar as possible to the channel A display.

l. Disconnect equipment and return Model 1740A controls to initial settings.

NOTE

Check bandwidth (paragraph 5-12) after making response adjustments. If bandwidth is low or marginal, adjust A5R24, HF No. 1, slightly CW to speed up response; then adjust A5R20, HF No. 2, slightly CW to optimize pulse response again.

5-63. X-Y GAIN ADJUSTMENT. (Not required on Option 101 instruments.)

Equipment Required:

Oscillator
Power Divider

a. Connect oscillator to both channels, using a 50-ohm power divider, two 9-inch 50-ohm cables, and a 48-inch 50-ohm cable.

b. Adjust oscillator and channel A VOLTS/DIV for exactly 6 divisions of vertical deflection. Oscillator should be set for a low frequency (<1 kHz).

c. Change sweep mode to A VS B.

d. With channel B VOLTS/DIV set to same setting as channel A, adjust A7R97, A-B cal., for exactly 6 divisions of horizontal deflection.

e. Disconnect equipment and return Model 1740A controls to initial settings.

Table 5-9. Condensed Adjustment Procedure

| Adjustment | Procedure |
|--|---|
| +15 V Adj., A16R26 | +15 Vdc \pm 10 mV. |
| Intensity Limit Adj., A15R2 | <ol style="list-style-type: none"> 1. Set main sweep to .1 mSEC. 2. Set delayed sweep to 10 μSEC. 3. Adjust so that intensified sweep is just extinguished with BEAM INTENSITY at minimum. |
| Gate Comp Adj., A12R12 and A12C11 | <ol style="list-style-type: none"> 1. Set BEAM INTENSITY to midrange. 2. Adjust for fastest rise time with <3% overshoot. Observe trace or adjust for even intensity, particularly at left edge. Check for less than 1 division of baseline loss at fastest sweep speed. |
| F. G. Adj., A16R20 | Adjust for uniform illumination at all settings of SCALE ILLUM. |
| TRACE ALIGN (rear panel) and Y-align (A12R16) | <ol style="list-style-type: none"> 1. Perform TRACE ALIGN first. 2. Apply 10-kHz sine wave to channel B while in A VS B mode. 3. Adjust for perpendicular line. |
| Calibrator Amp., A3R116 | Adjust for 1 V peak \pm 10 mV. |
| Main Trig. Sens. Adj., A7R20 Delayed Trig. Sens. Adj., A10R86 | Adjust so both main and delayed trigger circuit recognize a 10-MHz 30 mV sine wave. |
| Sync Zero, A7R41 | <ol style="list-style-type: none"> 1. Apply 1-kHz sine wave. 2. Adjust for no shift in trigger point while switching time base to AC/DC coupling. |
| Trig. View Bal., A3R86 | <ol style="list-style-type: none"> 1. Apply small sine wave to main EXT TRIGGER. 2. Select TRIG VIEW mode. 3. Adjust to position the triggered display to center screen. |
| HORIZ Amp Gain X1 Gain A7R93 | <ol style="list-style-type: none"> 1. Turn Delayed Sweep to .05 μSEC to obtain intensified dot on main sweep. 2. Set DELAY to 1.00 and position intensity spot to 2nd graticule line. |
| Delay Start Adj. A7R169 | With MAIN TIME/DIV set to .1 mSEC, DLY'D TIME/DIV set to .05 μ SEC, and DELAY to .2, set intensified spot 2 mm after sweep start point. |

Table 5-9. Condensed Adjustment Procedure (Cont'd)


| Adjustment | Procedure | | | | | | | | | | | | | | | |
|--|--|---------------|-----------------------------|---------------|-------|--------------|---------------|-------|--------------|-------------|-------|--------|---------|-------|---------|--------|
| .05 - 2 μ SEC A8R43 X10 Gain A7R117 | <ol style="list-style-type: none"> 3. Set DELAY to 9.00. Adjust A7R93 to position bright spot to 10th line. 4. Set for 1 marker/div. 5. Set for 1 marker/10 div. | | | | | | | | | | | | | | | |
| HORIZ Amp Balance Mag Center A7R105 | <ol style="list-style-type: none"> 1. Set so that display at center screen remains at center screen when MAG X10 is used. | | | | | | | | | | | | | | | |
| HORIZONTAL LINEARITY A11R10 A11R15 | <ol style="list-style-type: none"> 1. Adjust on .05 μSEC range, using MAG X10, observing a 10-ns sine wave. | | | | | | | | | | | | | | | |
| PRELIMINARY MAIN SWEEP CAL A8R43 A8R12 A8R13 A8R14 | <ol style="list-style-type: none"> 1. 1 μSEC range 2. 10 μSEC range 3. 1 mSEC range 4. 50 mSEC range | | | | | | | | | | | | | | | |
| DELAYED SWEEP CAL A9R28 A9R10 A9R11 | <ol style="list-style-type: none"> 1. .5 μSEC range 2. 5 μSEC range 3. .5 mSEC range | | | | | | | | | | | | | | | |
| MAIN SWEEP FINE ADJ A8R43 A8R12 A8R13 A8R14 | <p>Use DELAY dial at setting of 1.00 and 9.00 to adjust main sweep.</p> <table border="0" style="width: 100%; text-align: center;"> <thead> <tr> <th style="width: 30%;"></th> <th style="width: 35%;">Main Sweep and Time Mark</th> <th style="width: 35%;">Delayed Sweep</th> </tr> </thead> <tbody> <tr> <td>A8R43</td> <td>.5 μSEC</td> <td>.05 μSEC</td> </tr> <tr> <td>A8R12</td> <td>10 μSEC</td> <td>1 μSEC</td> </tr> <tr> <td>A8R13</td> <td>1 mSEC</td> <td>.1 mSEC</td> </tr> <tr> <td>A8R14</td> <td>50 mSEC</td> <td>5 mSEC</td> </tr> </tbody> </table> | | Main Sweep and Time Mark | Delayed Sweep | A8R43 | .5 μ SEC | .05 μ SEC | A8R12 | 10 μ SEC | 1 μ SEC | A8R13 | 1 mSEC | .1 mSEC | A8R14 | 50 mSEC | 5 mSEC |
| | Main Sweep and Time Mark | Delayed Sweep | | | | | | | | | | | | | | |
| A8R43 | .5 μ SEC | .05 μ SEC | | | | | | | | | | | | | | |
| A8R12 | 10 μ SEC | 1 μ SEC | | | | | | | | | | | | | | |
| A8R13 | 1 mSEC | .1 mSEC | | | | | | | | | | | | | | |
| A8R14 | 50 mSEC | 5 mSEC | | | | | | | | | | | | | | |
| Vertical Amplifier Balance A3R11 A3R31 | <ol style="list-style-type: none"> 1. Connect DVM to A3TP9 and adjust A FET balance for 0 V \pm.5 mV. Adjust on 50 mV range. 2. Connect DVM to A3TP10 and adjust B FET balance for 0 V \pm.5 mV. Adjust on 50 mV range. | | | | | | | | | | | | | | | |

Table 5-9. Condensed Adjustment Procedure (Cont'd)

| Adjustment | Procedure |
|--|---|
| Vertical Amplifier Balance (Cont'd) A3R18 A3R19 A3R77 A3R76 A3R90 | <ol style="list-style-type: none"> 3. Switch channel A VOLTS/DIV between .005 and .02 and adjust 5-mV balance for minimum trace shift. 4. Switch channel A VOLTS/DIV between .005 and .05 and adjust 50-mV balance for minimum trace shift. 5. Switch channel B VOLTS/DIV between .005 and .02 and adjust 5-mV balance for minimum trace shift. 6. Switch channel B VOLTS/DIV between .005 and .05, and adjust 50-mV balance for minimum trace shift. 7. Engage/disengage CH B INVT and adjust for minimum trace shift. Readjust A3R77 and A3R76 if necessary. |
| Position and Sync Balance A3R32 A3R79 A3R58 | <ol style="list-style-type: none"> 1. Select B DISPLAY; switch between normal and MAG X5, and adjust channel B POSN for minimum trace shift. 2. Apply 10-kHz sine wave to both channels. Select ALT mode and COMP TRIGGER, and adjust sync A balance for stable triggering and minimum phase shift. Readjust A3R18 and A3R19 if necessary. 3. Select A DISPLAY; switch between normal and MAG X5, and adjust channel A position for minimum trace shift. |
| Input C and Attenuator Compensation (Channel A) A3C2 A3C4 | <ol style="list-style-type: none"> 1. Apply 10-kHz square wave, and adjust .5 V comp for best response. 2. Adjust .5 V input cap to make .5 VOLTS/DIV range match reading on .2 range (19.5 to 21.5 pF). |
| Input C and Attenuator Compensation (Channel B) A3C17 | <ol style="list-style-type: none"> 1. Apply 10-kHz square wave, and adjust .5 V comp for best response. |

Table 5-9. Condensed Adjustment Procedure (Cont'd)

| Adjustment | Procedure |
|---|--|
| Input C and Attenuator Compensation (Cont'd) A3C19 | 2. Adjust .5 V input cap to make .5 VOLTS/ DIV range match reading on .2 range (19.5 to 21.5 pF). |
| Gain A3R49 A3R46 A3R65 | 1. Channel A fine gain. 2. Channel B fine gain. 3. Composite gain. |
| Pulse Response A5R24 A5R20 A5R19 A5R22 A3R22 | 1. Short time constant. 2. Short time constant 3. Medium time constant. 4. Long time constant. 5. Adjust to make channel B most resemble channel A. |
| X-Y Gain (Not applicable to Option 101) A7R97 | Adjust for same gain on X-axis as on Y-axis. |

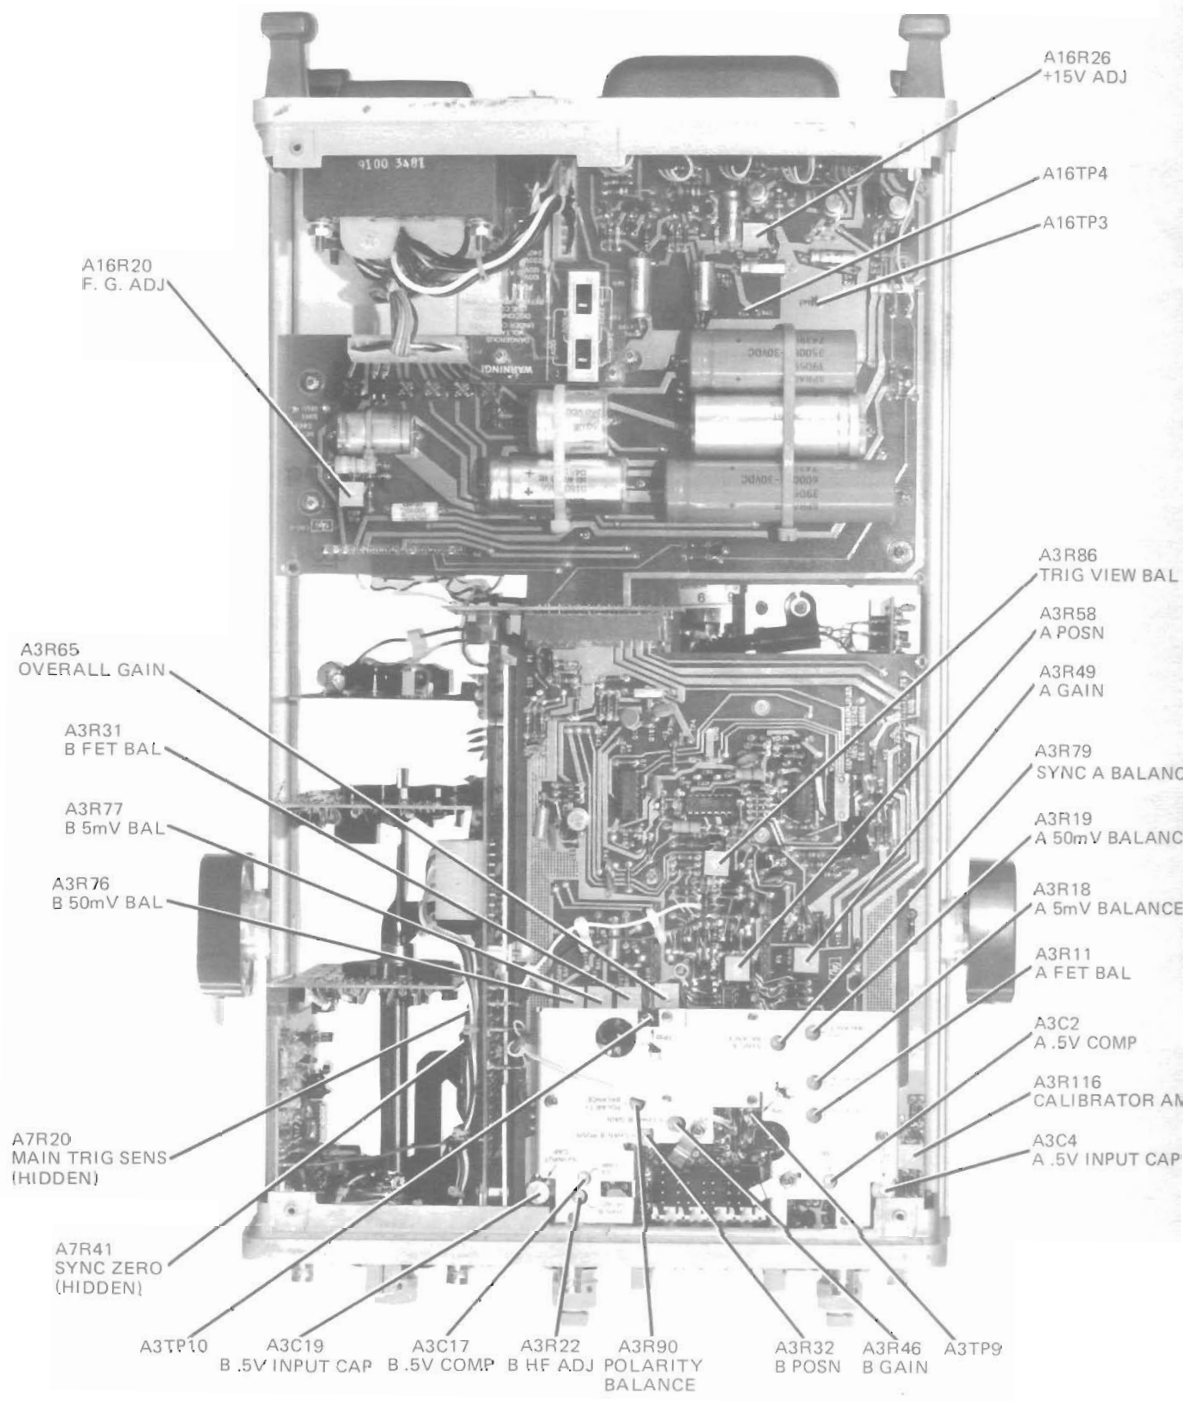

A16R26
+15V ADJ

A16TP4

A16TP3

A3R86
TRIG VIEW BAL

A3R58
A POSN

A3R49
A GAIN

A3R79
SYNC A BALANCE

A3R19
A 50mV BALANCE


A3R18
A 5mV BALANCE

A3R11
A FET BAL

A3C2
A .5V COMP

A3R116
CALIBRATOR AMP

A3C4
A .5V INPUT CAP

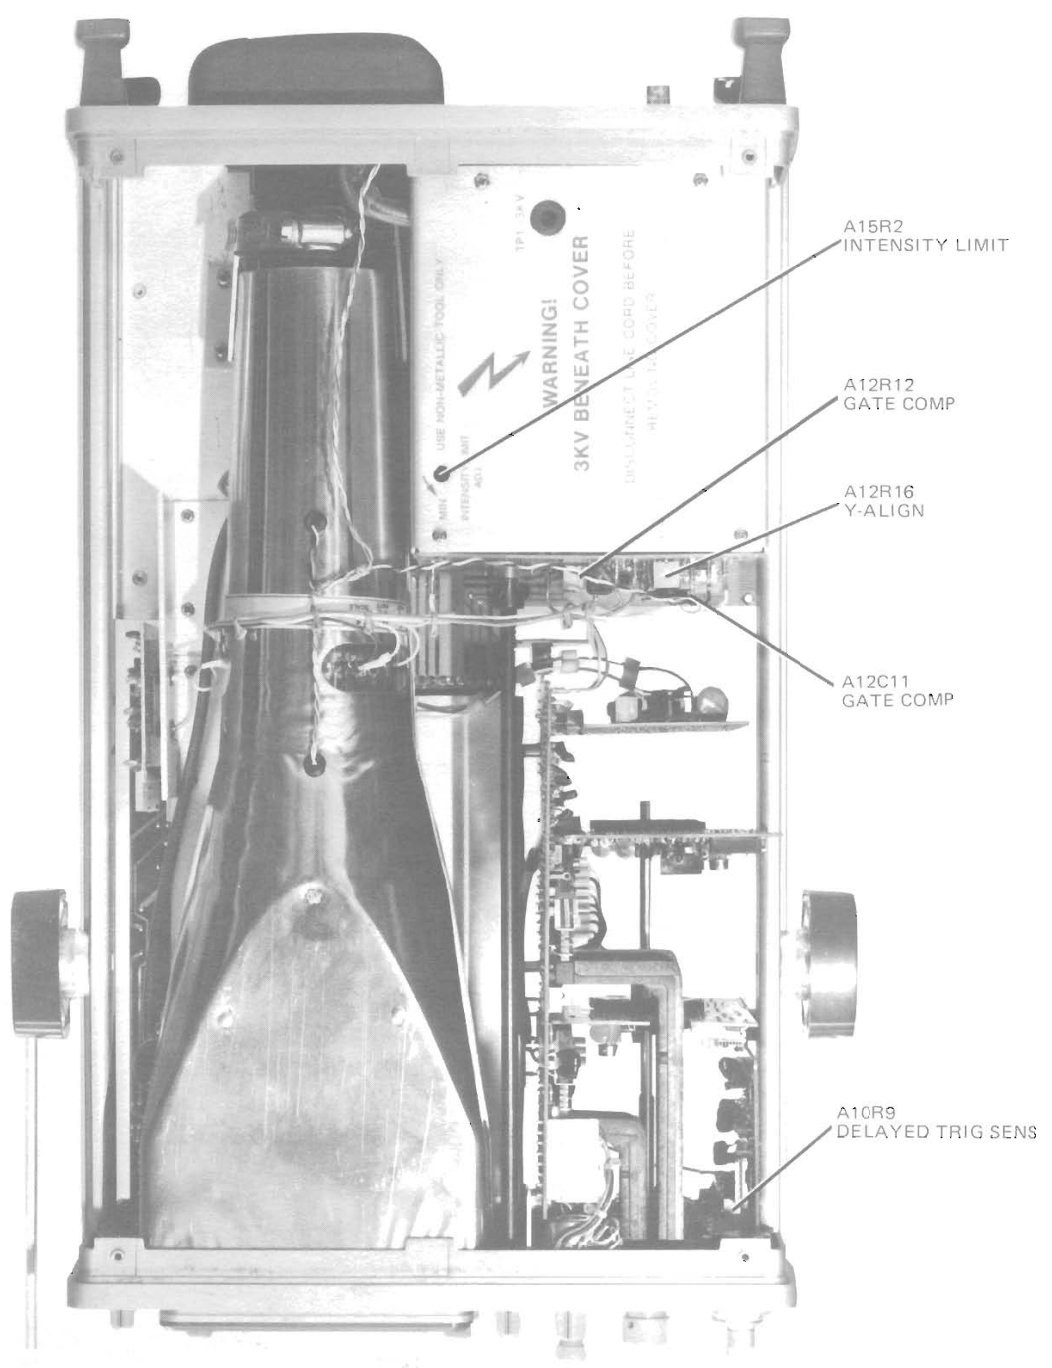



A15R2
INTENSITY LIMIT

A12R12
GATE COMP

A12R16
Y-ALIGN

A12C11
GATE COMP

A10R9
DELAYED TRIG SENS

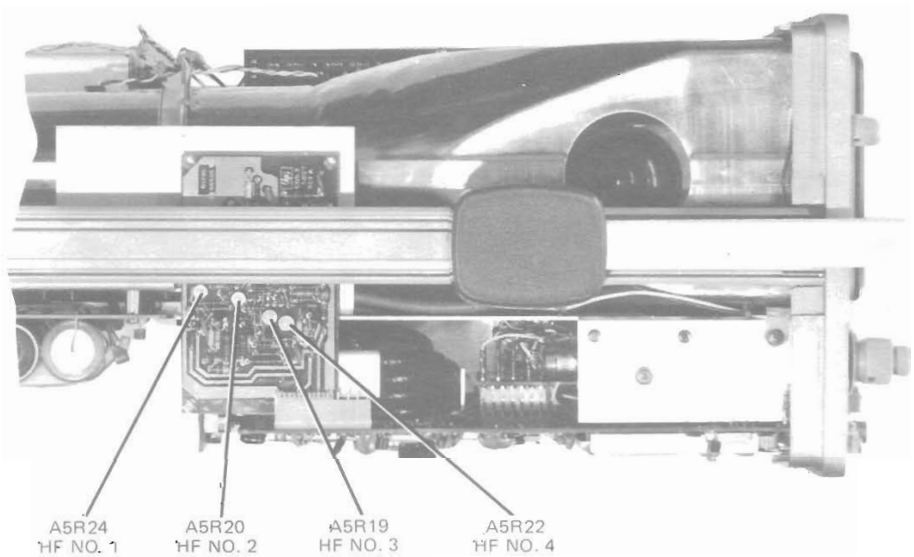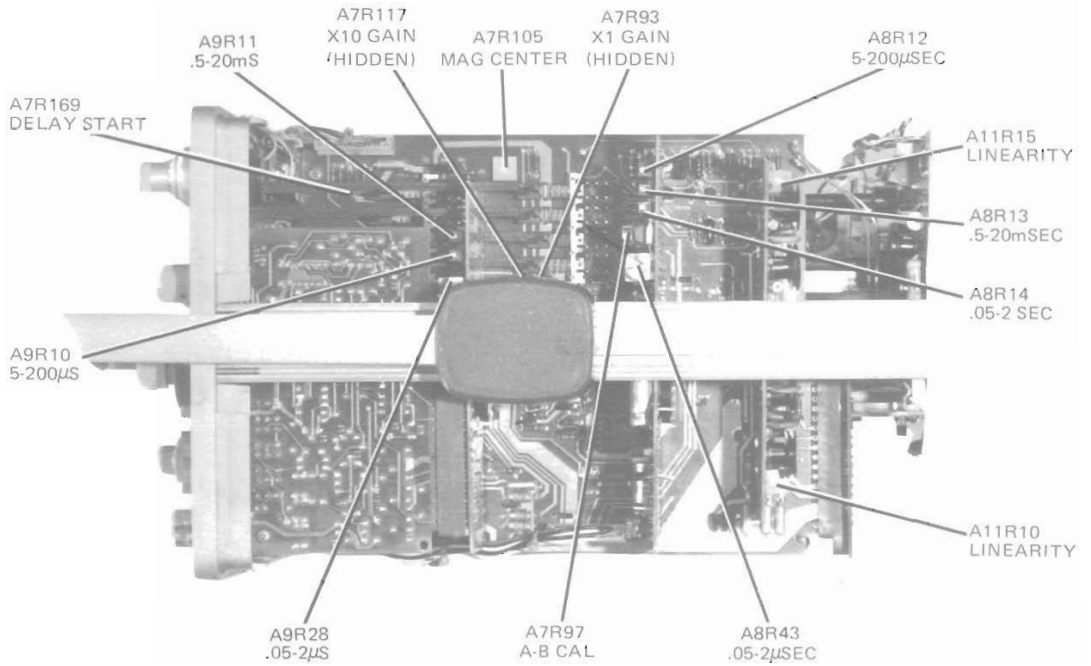

1740A-049-07-76

Figure 5-5.
Adjustment Locations
5-23/(5-24 blank)

SECTION VI REPLACEABLE PARTS

6-1. INTRODUCTION.

6-2. This section contains information for ordering replacement parts. The abbreviations used in the parts list are described in table 6-1. Table 6-2 lists the parts in alphanumeric order by reference designation and includes the manufacturer and manufacturer's part number. Table 6-3 contains the list of manufacturers' codes.

6-3. ORDERING INFORMATION.

6-4. To obtain replacement parts from Hewlett-Packard, address order or inquiry to the nearest Hewlett-Packard Sales Service Office and supply the following information:


- a. Instrument model and serial number.
- b. HP part number of item(s).
- c. Quantity of part(s) desired.
- d. Reference designation of part(s).

6-5. To order a part not listed in the table, provide the following information:

- a. Instrument model and serial number.
- b. Description of the part, including function and location in the instrument.
- c. Quantity desired.


Table 6-1. Abbreviations for Replaceable Parts List

| | | | | | | | |
|--------|---------------------------|----------|---------------------------|------|-------------------|--------|---------------------------|
| A | AMPERE(S) | H | HENRY(IES) | NPN | NEGATIVE POSITIVE | RWV | REVERSE WORKING |
| ASSY | ASSEMBLY | HG | MERCURY | | NEGATIVE | | VOLTAGE |
| | | HP | HEWLETT-PACKARD | NSR | NOT SEPARATELY | | |
| BD | BOARD(S) | HZ | HERTZ | | REPLACEABLE | S-B | SLOW BLOW |
| BH | BINDER HEAD | | | | | SCR | SILICON CONTROLLED |
| BP | BANDPASS | IF | INTERMEDIATE FREQ. | | | | RECTIFIER |
| | | IMPG | IMPREGNATED | OBD | ORDER BY | SE | SELENIUM |
| C | CENTI (10 ⁻²) | INCD | INCANDESCENT | | DESCRIPTION | SEC | SECOND(S) |
| CAR | CARBON | INCL | INCLUDE(S) | OH | OVAL HEAD | SECT | SECTION(S) |
| CCW | COUNTERCLOCKWISE | INS | INSULATION(ED) | OX | OXIDE | SI | SILICON |
| CER | CERAMIC | INT | INTERNAL | | | SIL | SILVER |
| CMO | CABINET MOUNT ONLY | | | P | PEAK | SL | SLIDE |
| COAX | COAXIAL | K | KILO (10 ³) | PC | PRINTED (ETCHED) | SP | SINGLE POLE |
| COEF | COEFFICIENT | KG | KILOGRAM | | CIRCUIT(S) | SPL | SPECIAL |
| COMP | COMPOSITION | | | PF | PICOFARADS | ST | SINGLE THROW |
| CONN | CONNECTOR(S) | LB | POUND(S) | PHL | PHILLIPS | STD | STANDARD |
| CRT | CATHODE RAY TUBE | LH | LEFT HAND | PIV | PEAK INVERSE | | |
| CW | CLOCKWISE | LIN | LINEAR TAPER | | VOLTAGE(S) | TA | TANTALUM |
| | | LOG | LOGARITHMIC TAPER | PNP | POSITIVE NEGATIVE | TD | TIME DELAY |
| D | DECI (10 ⁻¹) | LPF | LOW PASS FILTER(S) | | POSITIVE | TFL | TEFLON |
| DEPC | DEPOSITED CARBON | LVR | LEVER | P/O | PART OF | TGL | TOGGLE |
| DP | DOUBLE POLE | | | PORC | PORCELAIN | THYR | THYRISTOR |
| DT | DOUBLE THROW | M | MILLI (10 ⁻³) | POS | POSITION(S) | TI | TITANIUM |
| | | MEG | MEGA (10 ⁶) | POT | POTENTIOMETER(S) | TNLDIO | TUNNEL DIODE(S) |
| ELECT | ELECTROLYTIC | MET FILM | METAL FILM | P-P | PEAK TO PEAK | TOL | TOLERANCE |
| ENCAP | ENCAPSULATED | MET OX. | METAL OXIDE | PRGM | PROGRAM | TRIM | TRIMMER |
| EXT | EXTERNAL | MFR | MANUFACTURER | PS | POLYSTYRENE | | |
| | | MINAT | MINIATURE | PWV | PEAK WORKING | U | MICRO (10 ⁻⁶) |
| F | FARAD(S) | MOM | MOMENTARY | | VOLTAGE | | |
| FET | FIELD EFFECT | MTG | MOUNTING | RECT | RECTIFIER(S) | V | VOLTS |
| | TRANSISTOR(S) | MY | MYLAR | RF | RADIO FREQUENCY | VAR | VARIABLE |
| FH | FLAT HEAD | | | RFI | RADIO FREQUENCY | VDCW | DC WORKING VOLT(S) |
| FIL HI | FILLISTER HEAD | N | NANO (10 ⁻⁹) | | INTERFERENCE | | |
| FXD | FIXED | N/C | NORMALLY CLOSED | RH | ROUND HEAD | W | WATT(S) |
| | | NE | NEON | | OR | W/ | WITH |
| G | GIGA (10 ⁹) | N/O | NORMALLY OPEN | | RIGHT HAND | WIV | WORKING INVERSE |
| GE | GERMANIUM | NOP | NEGATIVE POSITIVE | RMO | RACK MOUNT ONLY | W/O | WITHOUT |
| GL | GLASS | | ZERO (ZERO TEMPER. | RMS | ROOT MEAN SQUARE | WW | WIREWOUND |
| GRD | GROUNDED | | ATURE COEFFICIENT) | | | | |

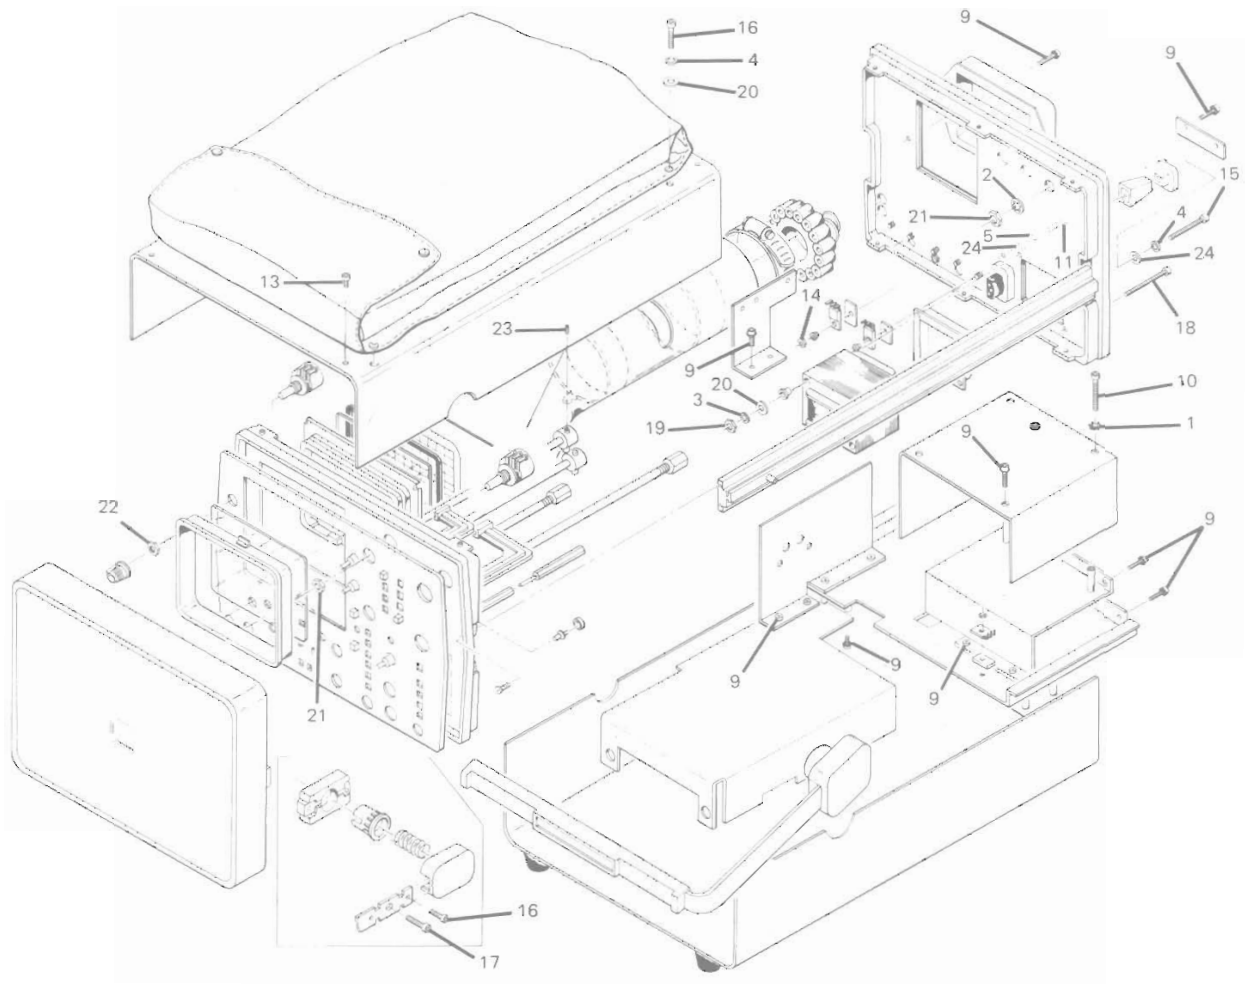

| ITEM | DESCRIPTION | QTY | HP PART NO. |
|------|---------------------------------------|-----|-------------|
| 1 | STAR WASHER | 11 | 2190-0005 |
| 2 | 3/8 LOCKWASHER | 13 | 2190-0016 |
| 3 | NO. 8 HELICAL LOCKWASHER | 4 | 2190-0017 |
| 4 | NO. 6 HELICAL LOCKWASHER | 8 | 2190-0018 |
| 5 | NO. 4 HELICAL LOCKWASHER | 9 | 2190-0019 |
| 6 | 1/4 LOCKWASHER (INTERNAL) | 1 | 2190-0084 |
| 7 | NO. 2 HELICAL LOCKWASHER | 6 | 2190-0112 |
| 8 | NO. 4-40 x .250 MACHINE SCREW | 4 | 2200-0103 |
| 9 | NO. 4-40 x .312 MACHINE SCREW | 44 | 2200-0105 |
| 10 | NO. 4-40 x 1.25 MACHINE SCREW | 2 | 2200-0123 |
| 11 | NO. 4-40 x .375 MACHINE SCREW | 8 | 2200-0143 |
| 12 | NO. 4-40 x .625 MACHINE SCREW | 3 | 2200-0149 |
| 13 | NO. 4-40 x .250 MACHINE SCREW (BLACK) | 8 | 2200-0762 |
| 14 | NO. 4-40 x .093 THK NUT | 11 | 2260-0002 |



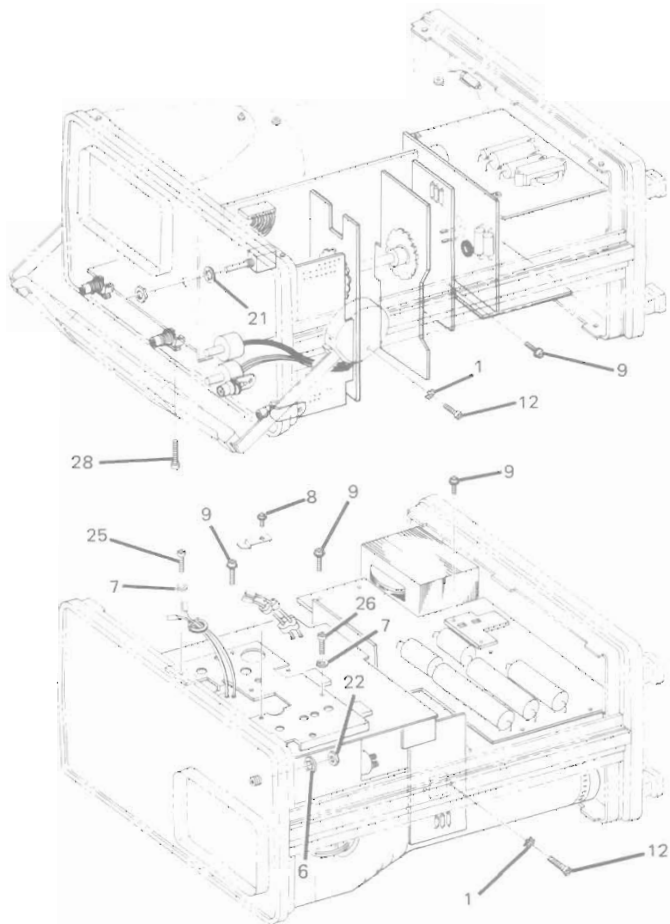



| ITEM | DESCRIPTION | QTY | HP PART NO. |
|------|--|-----|-------------|
| 15 | NO. 6-32 x 1.5 MACHINE SCREW | 4 | 2360-0135 |
| 16 | NO. 6-32 x .375 MACHINE SCREW | 9 | 2360-0197 |
| 17 | NO. 8-32 x .750 MACHINE SCREW | 2 | 2510-0111 |
| 18 | NO. 8-32 x 2.25 MACHINE SCREW | 4 | 2510-0135 |
| 19 | NO. 8-32 x .125 THK NUT | 4 | 2580-0004 |
| 20 | NO. 8 FLAT WASHER | 10 | 3050-0071 |
| 21 | 3/8-32 NUT | 15 | 2950-0043 |
| 22 | 1/4-32 NUT | 2 | 2950-0072 |
| 23 | NO. 4-40 x .188 SET SCREW | 4 | 3030-0196 |
| 24 | NO. 6 FLAT WASHER | 11 | 3050-0010 |
| 25 | NO. 2-56 x 3/16 | 2 | 0520-0127 |
| 26 | NO. 2-56 x 5/8 | 4 | 0520-0136 |
| 27 | NO. 2-28 x .500 TAPPING SCREW (HOLDS ATTENUATORS TO BOARD) | 8 | 0624-0306 |
| 28 | NO. 4-20 x 1.000 TAPPING SCREW | 4 | 0624-0313 |

1740A-050-01-10-75

Figure 6-1. Chassis Parts and Board Assy Identification (Sheet 1 of 2)

Replaceable Parts

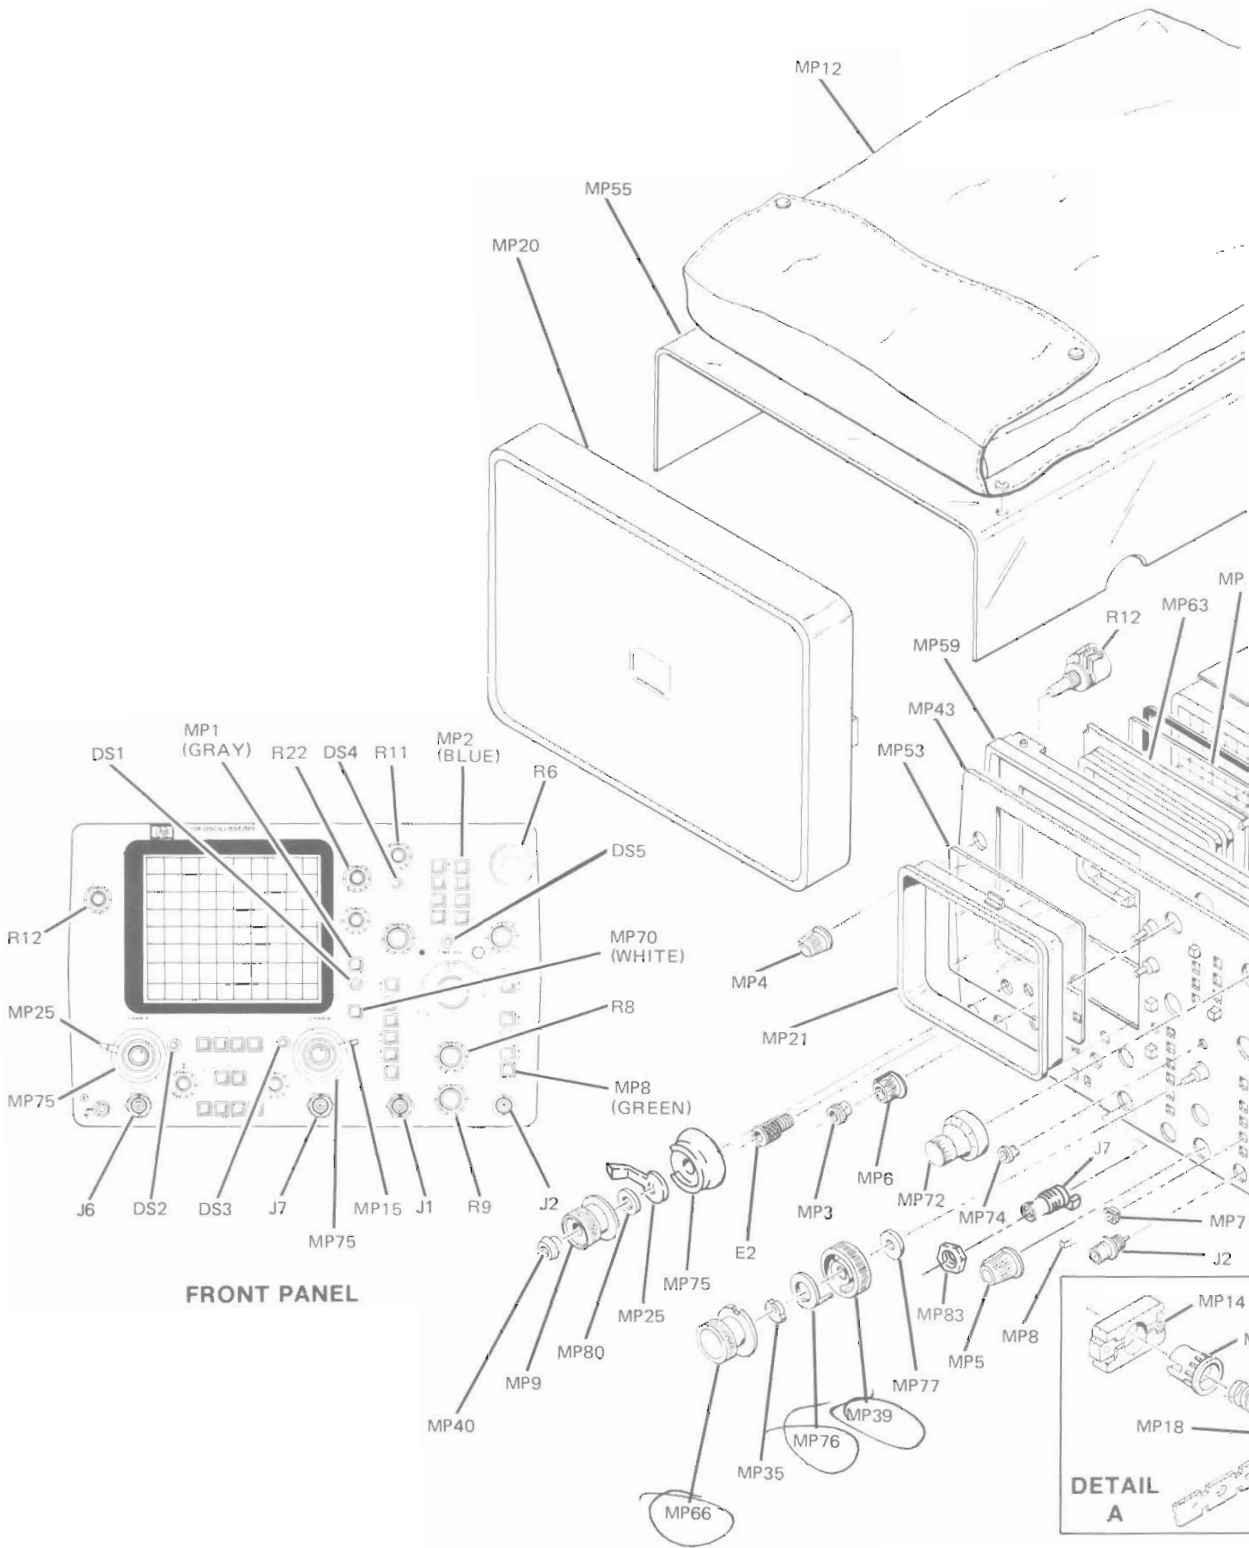

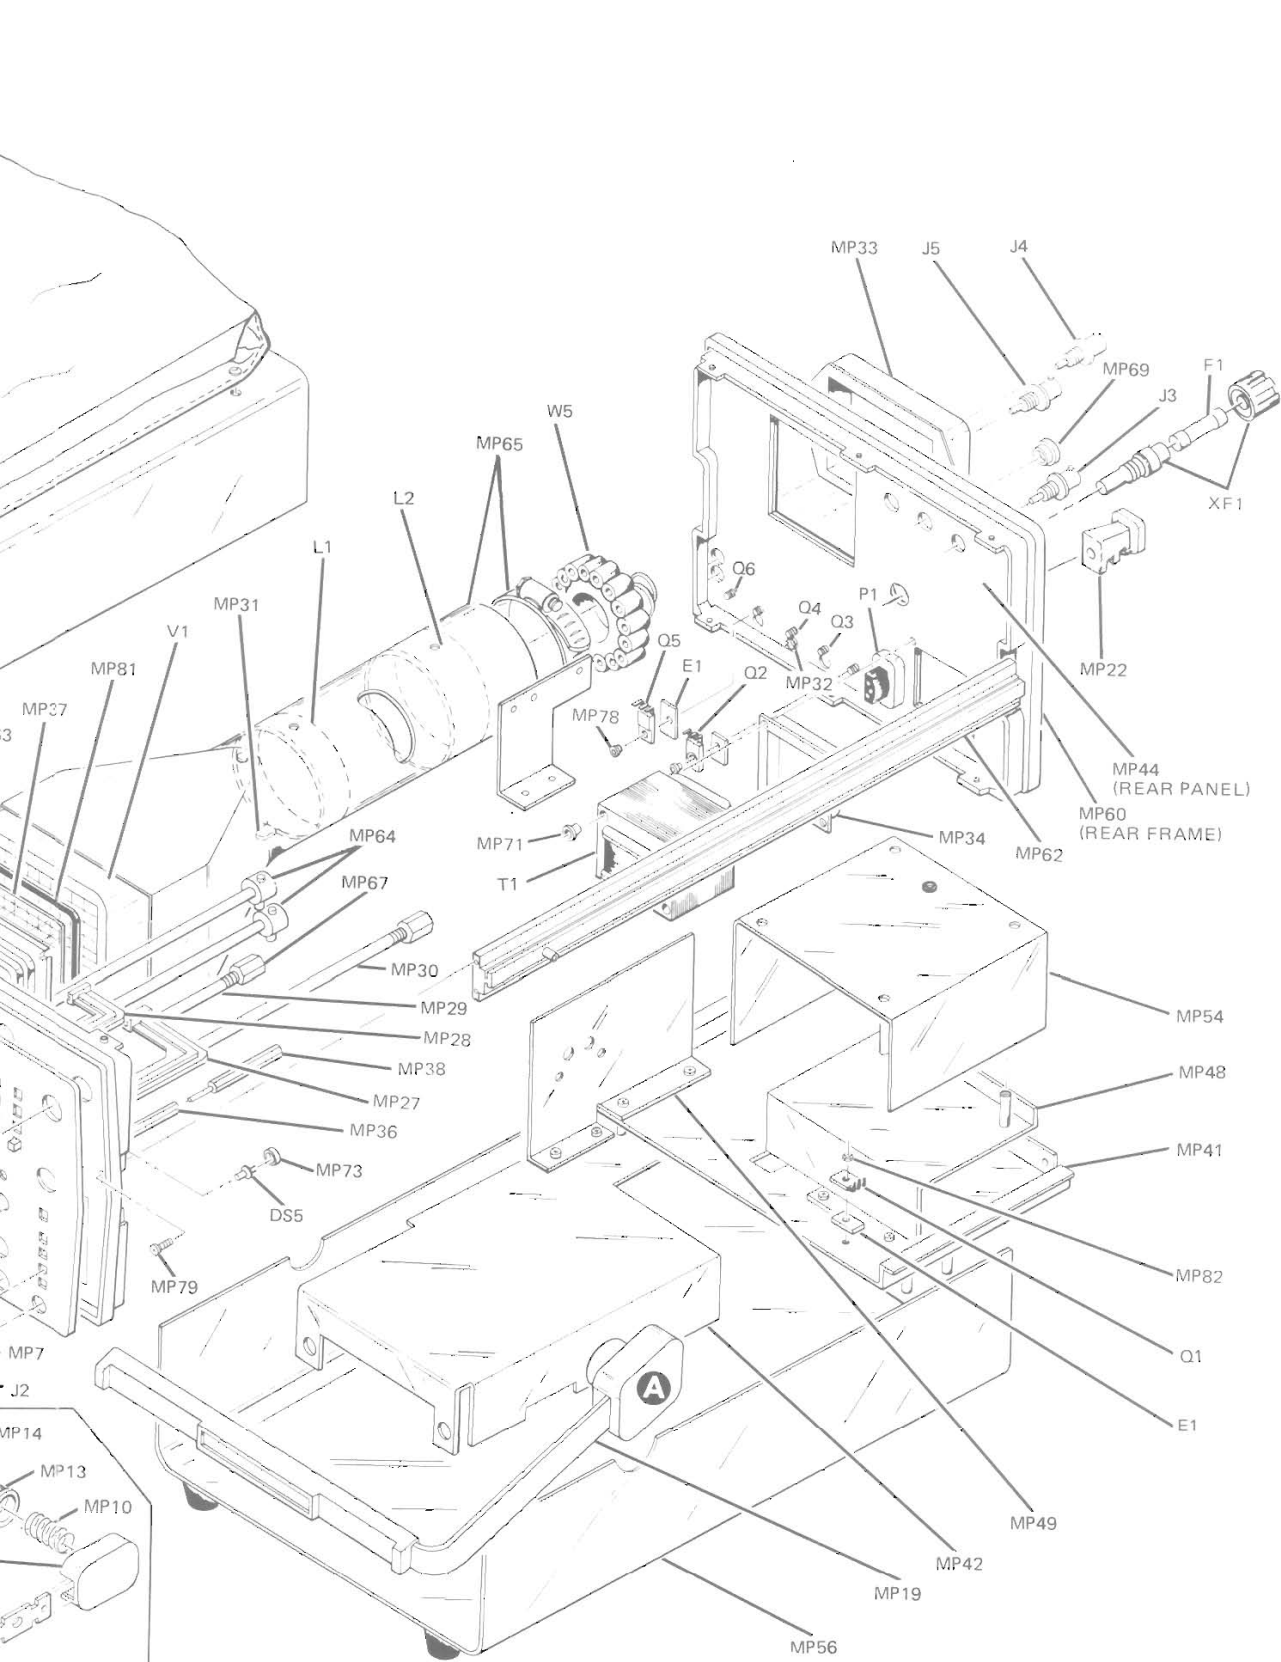

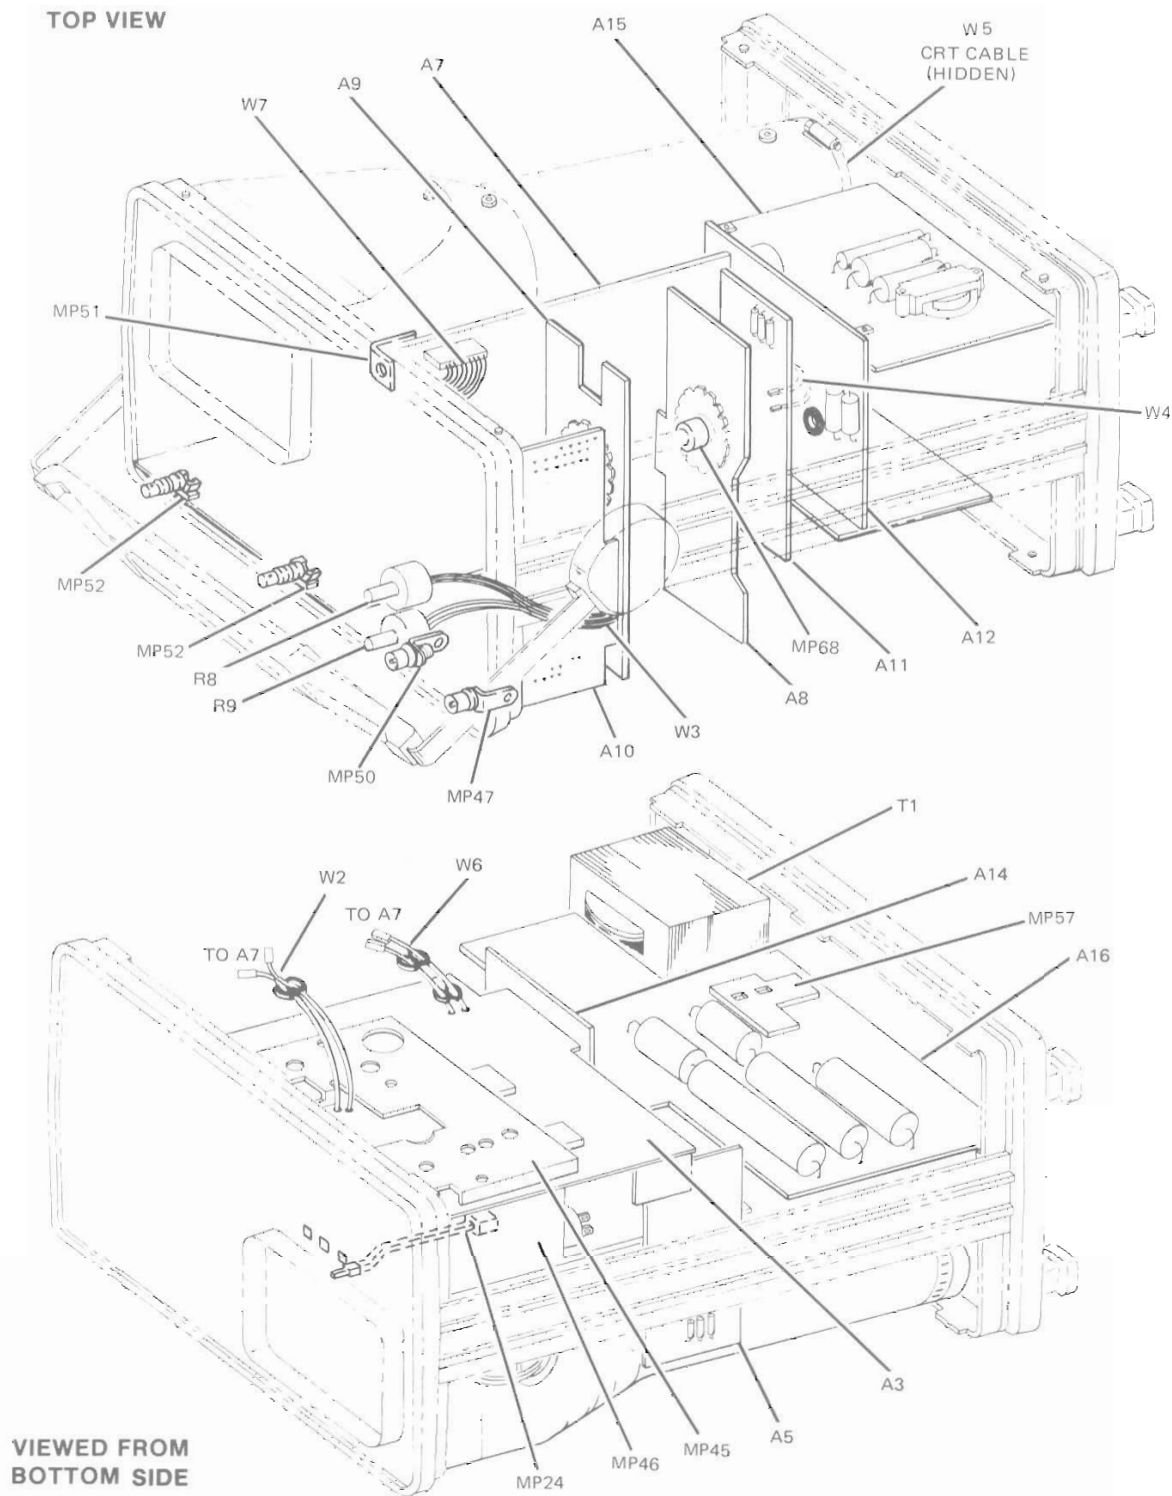


Figure 6-1. Chassis Parts and Board Assy Identification (Sheet 2 of 2)

Table 6-2. Replaceable Parts

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|-----------------|
| CHASSIS PARTS | | | | | |
| A1 | 01740-63401 | | ATTENUATOR ASSY, CHANNEL A | 28480 | 01740-63401 |
| A2 | 01740-63402 | | ATTENUATOR ASSY, CHANNEL B | 28480 | 01740-63402 |
| A3 | 01740-66515 | | VERTICAL PREAMPLIFIER ASSY | 28480 | 01740-66515 |
| A3 OPTION 101 | 01740-66517 | | VERTICAL PREAMPLIFIER ASSY - OPTION 101 ONLY | 28480 | 01740-66517 |
| A4 | 01740-61611 | | DELAY LINE ASSY | 28480 | 01740-61611 |
| A5 | 01740-66505 | | VERTICAL OUTPUT ASSY | 28480 | 01740-66505 |
| A6 | 0960-0429 | | HV MULTIPLIER ASSY | 28480 | 0960-0429 |
| A7 | 01740-66524 | | HORIZONTAL SWEEP ASSY | 28480 | 01740-66524 |
| A7 OPTION 101 | 01740-66525 | | HORIZONTAL SWEEP ASSY | 28480 | 01740-66525 |
| A8 | 01740-66523 | | MAIN SWEEP ASSY | 28480 | 01740-66523 |
| A9 | 01740-66522 | | DELAYED SWEEP ASSY | 28480 | 01740-66522 |
| A10 | 01740-66508 | | DELAYED TRIGGER ASSY | 28480 | 01740-66508 |
| A11 | 01740-66521 | | HORIZONTAL OUTPUT ASSY | 28480 | 01740-66521 |
| A12 | 01740-66503 | | GATE AMPLIFIER ASSY | 28480 | 01740-66503 |
| A13 | 01740-66516 | | VERTICAL CONTROL SWITCHING ASSY | 28480 | 01740-66516 |
| A14 | 01740-66504 | | INTERFACE ASSY | 28480 | 01740-66504 |
| A14 OPTION 101 | 01740-66514 | | INTERFACE ASSY.OPTION 101 ONLY | 28480 | 01740-66514 |
| A15 | 01740-66502 | | HV POWER SUPPLY ASSY | 28480 | 01740-66502 |
| A16 | 01740-66529 | | LV POWER SUPPLY ASSY | 28480 | 01740-66529 |
| DS1 | 1990-0524 | 1 | LED-VISIBLE | 28480 | 1990-0524 |
| DS2 | 1990-0324 | 4 | LED-VISIBLE | 28480 | 1990-0324 |
| DS3 | 1990-0324 | | LED-VISIBLE | 28480 | 1990-0324 |
| DS4 | 1990-0324 | | LED-VISIBLE | 28480 | 1990-0324 |
| DS5 | 1990-0324 | | LED-VISIBLE | 28480 | 1990-0324 |
| E1 | 0340-0511 | 1 | INSULATOR-XSTR PWR TRANSISTOR .125-ID | 13103 | 43-77-2 |
| E2 | 1510-0038 | 1 | BINDING POST-SGL 1/4-32 THD STUD | 28480 | 1510-0038 |
| F1 | 2110-0007 | 1 | FUSE 1A 250V SLO-BLO 1.25X .25 UL | 71400 | MDL-1 |
| F1 | 2110-0202 | 1 | FUSE .5A 250V SLO-BLO 1.25X .25 UL | 71400 | MDL-V2 |
| J1 | 1250-0118 | 8 | CONNECTOR-RF BNC FEM SGL HOLE FR | 9D949 | 31-2221-1022 |
| J2 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR | 9D949 | 31-2221-1022 |
| J3 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR | 9D949 | 31-2221-1022 |
| J4 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR | 9D949 | 31-2221-1022 |
| J5 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR | 9D949 | 31-2221-1022 |
| J6 | 1250-0524 | 2 | CONNECTOR | 28480 | 1250-0524 |
| J7 | 1250-0524 | | CONNECTOR | 28480 | 1250-0524 |
| J8 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR | 9D949 | 31-2221-1022 |
| J9 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR (USED IN OPTION 101 ONLY) | 9D949 | 31-2221-1022 |
| J10 | 1250-0118 | | CONNECTOR-RF BNC FEM SGL HOLE FR (USED IN OPTION 101 ONLY) | 9D949 | 31-2221-1022 |
| L1 | 5060-0435 | 1 | COIL-ALIGNMENT Z AXIS | 28480 | 5060-0435 |
| L2 | 00180-65601 | 1 | COIL | 28480 | 00180-65601 |
| L3 | 9170-0016 | 3 | CORE SHIELDING BEAD | 02114 | 56-590-65A1/3B |
| L4 | 9170-0016 | | CORE SHIELDING BEAD | 02114 | 56-590-65A1/3B |
| L5 | 9170-0016 | | CORE SHIELDING BEAD | 02114 | 56-590-65A1/3B |
| MP1 | 0370-0603 | 1 | PUSHBUTTON:SQUARE, MINT GRAY | 28480 | 0370-0603 |
| MP2 | 0370-0671 | 1 | KNOB | 28480 | 0370-0671 |
| MP3 | 0370-0963 | 1 | KNOB-CONC-RND .5 IN JGK SGI-DECAL | 28480 | 0370-0963 |
| MP4 | 0370-1005 | 1 | KNOB-BASE-PTR .375 IN JGK SGI-DECAL | 28480 | 0370-1005 |
| MP5 | 0370-1099 | 1 | KNOB-BASE-PTR .5 IN JGK SGI-DECAL | 28480 | 0370-1099 |
| MP6 | 0370-1100 | 1 | KNOB-BASE-CONC PTR .5 IN JGK | 28480 | 0370-1100 |
| MP7 | 0370-2626 | 1 | KNOB | 28480 | 0370-2626 |
| MP8 | 0370-2630 | 1 | KNOB | 28480 | 0370-2630 |
| MP9 | 0370-2783 | 1 | KNOB: VOLTS/DIV | 28480 | 0370-2783 |
| MP10 | 1460-0604 | 1 | SPRING-CPRNS .95-OD 1.185-LG MUW | 28480 | 1460-0604 |
| MP11 | 4324-0086 | 1 | SHOCK MOUNT(CRT) BLACK | 00000 | 08D |
| MP12 | 1540-0292 | 1 | CASE-ACCESSORY PVC 10.5LG 1.5WD 13.5DP | 28480 | 1540-0292 |
| MP13 | 5020-8733 | 1 | GEAR, HUB HANDLE | 28480 | 5020-8733 |
| MP14 | 5020-8734 | 1 | RING, HANDLE | 28480 | 5020-8734 |
| MP15 | 5020-8744 | 1 | SPACER-DIAL CHAN A | 28480 | 5020-8744 |
| MP16 | 5020-8745 | 1 | SPACER-DIAL CHAN B | 28480 | 5020-8745 |
| MP17 | 5040-0421 | 1 | INSULATOR COVER: POTENTIOMETER | 28480 | 5040-0421 |
| MP18 | 5040-0511 | 1 | CAP, TRIM | 28480 | 5040-0511 |
| MP19 | 5040-0515 | 1 | ASSY, HANDLE | 28480 | 5040-0515 |
| MP20 | 01740-64101 | 1 | COVER, PANEL | 28480 | 01740-64101 |
| MP21 | 5040-0521 | 1 | BEZEL, CRT | 28480 | 5040-0521 |
| MP22 | 5040-7829 | 1 | FOOT | 28480 | 5040-7829 |
| MP23 | | 1 | NOT ASSIGNED | | |
| MP24 | 5040-7023 | 1 | PUSH ROD | 28480 | 5040-7023 |
| MP25 | 5040-7598 | 1 | LEVER, COUPLING | 28480 | 5040-7598 |
| MP26 | | 1 | NOT ASSIGNED | | |
| MP27 | 5040-7705 | 4 | EXTENDER-PUSHBUTTON | 28480 | 5040-7705 |
| MP28 | 5040-7706 | 4 | EXTENDER-PUSHBUTTON | 28480 | 5040-7706 |
| MP29 | 5040-7755 | 1 | EXTENDER-PUSHBUTTON | 28480 | 5040-7755 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|-----------------|
| MP30 | 5040-7756 | 1 | EXTENDER-PUSHBUTTON | 28480 | 5040-7756 |
| MP31 | 00180-01218 | 2 | BRACKET-COIL | 28480 | 00180-01218 |
| MP32 | 6960-0001 | 1 | PLUG-HOLE FL-HD .375-DIA STL | 57771 | D-3005-LCS |
| MP33 | 01701-04108 | 1 | COVER-CRT | 28480 | 01701-04108 |
| MP34 | 01710-04103 | 1 | COVER-TRANSFORMER | 28480 | 01710-04103 |
| MP35 | 01720-22501 | 1 | RING-ANTIRUN | 28480 | 01720-22501 |
| MP36 | 01720-23705 | 1 | SHAFT-DELAYED SWEEP | 28480 | 01720-23705 |
| MP37 | 01740-20601 | 1 | SHIELD-CRT SAFETY | 28480 | 01740-20601 |
| MP38 | 01720-63703 | 1 | SHAFT ASSY, MAIN SWEEP | 28480 | 01720-63703 |
| MP39 | 01720-67403 | 1 | KNOB, DELAYED TIME/DIV | 28480 | 01720-67403 |
| MP40 | 01720-67405 | 2 | KNOB-VERNIER | 28480 | 01720-67405 |
| MP41 | 01740-00101 | 1 | DECK, MAIN | 28480 | 01740-00101 |
| MP42 | 01740-00102 | 1 | DECK, FRONT | 28480 | 01740-00102 |
| MP43 | 01740-00202 | 1 | PANEL, FRONT | 28480 | 01740-00202 |
| MP44 | 01740-00205 | 1 | PANEL, REAR | 28480 | 01740-00205 |
| MP45 | 01740-00601 | 1 | SHIELD, PREAMPLIFIER | 28480 | 01740-00601 |
| MP46 | 01740-00602 | 1 | SHIELD, CAL | 28480 | 01740-00602 |
| MP47 | 01740-01201 | 1 | BRACKET, DELAYED TRIGGER | 28480 | 01740-01201 |
| MP48 | 01740-01202 | 1 | BRACKET, HV | 28480 | 01740-01202 |
| MP49 | 01740-01203 | 1 | BRACKET, VERTICAL OUTPUT | 28480 | 01740-01203 |
| MP50 | 01740-01204 | 1 | BRACKET, HORIZONTAL SWEEP | 28480 | 01740-01204 |
| MP51 | 01740-01209 | 1 | BRACKET, HORIZONTAL TOP | 28480 | 01740-01209 |
| MP52 | 01740-01212 | 1 | BRACKET, BNC | 28480 | 01740-01212 |
| MP53 | 01740-02701 | 1 | FILTER, CONTRAST | 28480 | 01740-02701 |
| MP54 | 01740-04101 | 1 | COVER, HV | 28480 | 01740-04101 |
| MP55 | 01740-04102 | 1 | COVER, TOP | 28480 | 01740-04102 |
| MP56 | 01740-04108 | 1 | COVER, BOTTOM | 28480 | 01740-04108 |
| MP57 | 01740-04109 | 1 | COVER, LINE VOLTAGE (ON A16) | 28480 | 01740-04109 |
| MP58 | | | NOT ASSIGNED | | |
| MP59 | 01740-20501 | 1 | FRAME, FRONT | 28480 | 01740-20501 |
| MP60 | 01740-20507 | 1 | FRAME, REAR | 28480 | 01740-20507 |
| MP61 | 01740-20503 | 1 | HEAT SINK, PREAMPLIFIER | 28480 | 01740-20503 |
| MP62 | 01740-23701 | 1 | RAIL, SIDE | 28480 | 01740-23701 |
| MP63 | 01740-24702 | 1 | SUPPORT, CRT CAMERA | 28480 | 01740-24702 |
| MP64 | 01740-43901 | 1 | SHAFT, EXTENSION | 28480 | 01740-43901 |
| MP65 | 01740-60601 | 1 | SHIELD ASSY, CRT | 28480 | 01740-60601 |
| MP66 | 01740-67402 | 1 | KNOB, MAIN TIME/DIV | 28480 | 01740-67402 |
| MP67 | 01830-23201 | 1 | COUPLER, SWITCH EXTENSION | 28480 | 01830-23201 |
| MP68 | 0510-0641 | 3 | COLLAR SHAFT | 28480 | 0510-0641 |
| MP69 | 1410-0094 | 1 | BUSHING, PANEL | 28480 | 1410-0094 |
| MP70 | 0370-2862 | 1 | PUSHBUTTON-WHITE | 28480 | 0370-2862 |
| MP71 | | | NOT ASSIGNED | | |
| MP72 | 1140-0036 | 1 | DIAL, DELAY | 12697 | 461 |
| MP73 | 1400-0665 | 1 | BEZEL-LED | 28480 | 1400-0665 |
| MP74 | | | NOT ASSIGNED | | |
| MP75 | 0370-0684 | 1 | PUSHBUTTON-GOLD (USED IN OPTION 101 ONLY) | 28480 | 0370-0684 |
| MP76 | 5040-5952 | 1 | FLOATING CORE | 28480 | 5040-5952 |
| MP77 | 3050-0481 | 1 | WASHER | 28480 | 3050-0481 |
| MP78 | 3050-0791 | 1 | WASHER-SHOULDER | 28480 | 3050-0791 |
| MP79 | 0624-0279 | 1 | SCREW: SPECIAL | 28480 | 0624-0279 |
| MP80 | 3050-0655 | 1 | WASHER | 28480 | 3050-0655 |
| MP81 | 01740-24701 | 1 | SPACER | 28480 | 01740-24701 |
| MP82 | 2190-0910 | 1 | DOME WASHER | 28480 | 2190-0910 |
| MP83 | 2950-0035 | 1 | NUT-CONNECTOR | 28480 | 2950-0035 |
| MP84 (OPTION 101) | 01720-03201 | 2 | ADAPTER-POWER CORD | 28480 | 01720-03201 |
| P1 | 1251-2357 | 1 | CONNECTOR-AC PWR HP-9 MALE FLG MTG | 28480 | 1251-2357 |
| Q1 | 1854-0433 | 1 | TRANSISTOR NPN SI PD=90W FT=2MHZ | 28480 | 1854-0433 |
| Q2 | 1854-0573 | 1 | TRANSISTOR NPN SI PD=30W FT=10MHZ | 28480 | 1854-0573 |
| Q3 | 1854-0370 | 4 | TRANSISTOR NPN 2N5294 SI PD=1.8W | 02735 | 2N5294 |
| Q4 | 1854-0370 | 1 | TRANSISTOR NPN 2N5294 SI PD=1.8W | 02735 | 2N5294 |
| Q5 | 1854-0370 | 1 | TRANSISTOR NPN 2N5294 SI PD=1.8W | 02735 | 2N5294 |
| Q6 | 1854-0370 | 1 | TRANSISTOR NPN 2N5294 SI PD=1.8W | 02735 | 2N5294 |
| R1 | 0684-4711 | 1 | RESISTOR 470 10% .25W FC TC=-400/+600 (USED IN OPTION 101 ONLY) | 01121 | CB4711 |
| R2 | | | NOT ASSIGNED | | |
| R3 | 0683-4705 | 2 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| R4 | 0683-4705 | 1 | RESISTOR 47 5% .25W FC TC=-400/+500 | 01121 | CB4705 |
| R5 | 0683-1505 | 1 | RESISTOR 15 5% .25W FC TC=-400/+500 | 01121 | CB1505 |
| R6 | 2100-1443 | 1 | RESISTOR-VAR PREC WW 10-TRN 50K 3% | 28480 | 2100-1443 |
| R7 | 0684-1021 | 1 | RESISTOR 1K 10% .25W FC TC=-400/+600 | 28480 | CB1021 |
| RR | 2100-0657 | 1 | RESISTOR-VAR W/SW 100K 30% LIN | 28480 | 2100-0657 |
| RR | 2100-3397 | 1 | RESISTOR-VAR W/SW 200K 20% 10CW SPST-NC | 28480 | 2100-3397 |
| R10 | 0683-1505 | 1 | RESISTOR 15 5% .25W FC TC=-400/+500 | 01121 | CB1505 |
| R11 | 2100-3014 | 1 | RESISTOR VAR DUAL 20K-20% CC 20K-20%-C | 28480 | 2100-3014 |
| R12 | 2100-3471 | 1 | RESISTOR VAR 100 OHM 20% C | 11236 | 551 |
| T1 | 9100-3499 | 1 | TRANSFORMER POWER | 01121 | 9100-3499 |
| V1 | 5083-3552 | 1 | CRT-P31 ALIGNMENT | 28480 | 5083-3552 |
| W1 | 8120-1521 | 1 | CABLE ASSY 3-COND 18-AWG | 28480 | 8120-1521 |
| W1 (OPTION 101) | 8120-1202 | 1 | CABLE ASSY-POWER 7.5 FT. | 28480 | 8120-1202 |
| W2 | 01740-61602 | 1 | CABLE ASSY, SYNC | 28480 | 01740-61602 |
| W3 | 01740-61621 | 1 | CABLE ASSY, FRONT PANEL | 28480 | 01740-61621 |
| W4 | 01740-61603 | 1 | CABLE ASSY, HORIZONTAL OUTPUT | 28480 | 01740-61603 |
| W5 | 01740-61601 | 1 | CABLE ASSY, CRT (INCLUDES XV11) | 28480 | 01740-61601 |
| W6 | 01740-61609 | 1 | CABLE ASSY, TRIGGER VIEW | 28480 | 01740-61609 |
| W7 | 01740-61622 | 1 | CABLE ASSY-HORIZ POS/D | 28480 | 01740-61622 |
| W8 | 01740-61623 | 1 | CABLE ASSY-CRT/SCALE | 28480 | 01740-61623 |
| XF1 | 1400-0084 | 1 | FUSEHOLDER-EXTRACTION POST TYPE | 75915 | 34201A |

See introduction to this section for ordering information.



Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|-----------------------|
| A1 A1B A2 A3 | 01740-63401 | 1 | ATTENUATOR ASSEMBLY, CHANNEL A | 28480 | 01740-63401 |
| | 2100-3551 | 2 | RESISTOR-VAR W/SW 100 10% LIN SPST-NO | 28480 | 2100-3551 |
| | 01740-63402 | 1 | ATTENUATOR ASSEMBLY, CHANNEL B | 28480 | 01740-63402 |
| | 2100-3551 | 1 | RESISTOR-VAR W/SW 100 10% LIN SPST-NO | 28480 | 2100-3551 |
| | 01740-66515 | 1 | BOARD ASSY, VERTICAL PREAMPLIFIER (DOES NOT INCLUDE A3A1) | 28480 | 01740-66515 |
| A3 OPTION 101 | 01740-66517 | 1 | BOARD ASSEMBLY, VERTICAL PREAMPLIFIER (USES SAME PARTS AS 01740-66515 EXCEPT WHERE NOTED) | 28480 | 01740-66517 |
| A3A1 | 5081-3030 | 1 | ASSEMBLY, SUBSTRATE (NOT SUPPLIED WITH A3, ORDER SEPARATELY) | 28480 | 5081-3030 |
| A3C1 | 0160-4204 | 2 | CAPACITOR-FXD .033UF +-10% 500VDC CER | 72982 | 8131-M500-W5R-333K |
| A3C2 | 0121-0060 | 4 | CAPACITOR-V TRMR-CER 2/8PF 350V PC-MTG | 0086S | 304322-2/8PF NPO |
| A3C3 | 0150-0021 | 3 | CAPACITOR-FXD .47PF +-5% 500VDC TI DIOX | 95121 | TYPE QC |
| A3C4 | 0121-0060 | 3 | CAPACITOR-V TRMR-CER 2/8PF 350V PC-MTG | 0086S | 304322-2/8PF NPO |
| A3C5 | 0160-2150 | 1 | CAPACITOR-FXD 33PF +-5% 300VDC MICA | 28480 | 0160-2150 |
| A3C6 | 0160-3448 | 3 | CAPACITOR-FXD 1000PF +-10% 1000VDC CER | 28480 | 0160-3448 |
| A3C7 | 0160-3799 | 3 | CAPACITOR-FXD +-10% 100WVDC CER 18 PF | 28480 | 0160-3799 |
| A3C8 | 0160-3451 | 26 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C9 | 0180-2255 | 13 | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C10 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C11 | 0180-0648 | 2 | CAPACITOR-FXD 0.1UF 35WVDC | 28480 | 0180-0648 |
| A3C12 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C13 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C14 | 0160-4204 | | CAPACITOR-FXD .033UF +-10% 500WVDC CER | 72982 | 8131-M500-W5R-333K |
| A3C15 | 0160-3567 | 2 | CAPACITOR-FXD 10PF +-5% 100WVDC CER | 28480 | 0160-3567 |
| A3C16 | 0160-3448 | | CAPACITOR-FXD 1000PF +-10% 1000VDC CER | 28480 | 0160-3448 |
| A3C17 | 0121-0060 | | CAPACITOR-V TRMR-CER 2/8PF 350V PC-MTG | 0086S | 304322-2/8PF NPO |
| A3C18 | 0150-0021 | | CAPACITOR-FXD .47PF +-5% 500WVDC TI DIOX | 95121 | TYPE QC |
| A3C19 | 0121-0060 | | CAPACITOR-V TRMR-CER 2/8PF 350V PC-MTG | 0086S | 304322-2/8PF NPO |
| A3C20 | 0160-2198 | 4 | CAPACITOR-FXD 20PF +-5% 300WVDC MICA | 28480 | 0160-2198 |
| A3C21 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C22 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C23 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C24 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C25 | 0180-0648 | | CAPACITOR-FXD 0.1UF 35WVDC | 28480 | 0180-0648 |
| A3C26 | 0160-3443 | 4 | CAPACITOR-FXD .1UF +80-20% 50WVDC CER | 28480 | 0160-3443 |
| A3C27 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C28 | 0160-3451 | | CAPACITOR-FXD .01UF +80-10% 100WVDC CER | 28480 | 0160-3451 |
| A3C29 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C30 | 0160-3443 | | CAPACITOR-FXD .1UF +80-20% 50WVDC CER | 28480 | 0160-3443 |
| A3C31 | 0160-3567 | | CAPACITOR-FXD 10PF +-5% 100WVDC CER | 28480 | 0160-3567 |
| A3C32 | 0160-3470 | 3 | CAPACITOR-FXD .01UF +80-20% 50WVDC CER | 28480 | 0160-3470 |
| A3C33 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C34 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C35 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C36 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C37 | 0160-4324 | 2 | CAPACITOR-FXD 220PF +-10% 50WVDC CER | 6F364 | TYPE 100-100-X7R-221K |
| A3C38 | 0160-4324 | | CAPACITOR-FXD 220PF +-10% 50WVDC CER | 6F364 | TYPE 100-100-X7R-221K |
| A3C39 | 0150-0061 | 1 | CAPACITOR-FXD 20PF +-10% 100WVDC CER | 28480 | 0150-0061 |
| A3C40 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C41 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C42 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C43 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C44 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C45 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C46 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C47 | 0160-2217 | 1 | CAPACITOR-FXD 910PF +-5% 300WVDC MICA | 28480 | 0160-2217 |
| A3C48 | 0180-0228 | 4 | CAPACITOR-FXD 22UF +-10% 15VDC TA-SOLID | 56289 | 150D226X9015B2 |
| A3C49 | 0160-2207 | 1 | CAPACITOR-FXD 300PF +-5% 300WVDC MICA | 28480 | 0160-2207 |
| A3C50 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C51 | 0160-0820 | 4 | CAPACITOR-FXD .05UF +80-20% 25WVDC CER | 28480 | 0160-0820 |
| A3C52 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C53 | 0160-3466 | 3 | CAPACITOR-FXD 100PF +-10% 1000WVDC CER | 28480 | 0160-3466 |
| A3C54 | 0160-3466 | | CAPACITOR-FXD 100PF +-10% 1000WVDC CER | 28480 | 0160-3466 |
| A3C55 | 0160-3466 | | CAPACITOR-FXD 100PF +-10% 1000WVDC CER | 28480 | 0160-3466 |
| A3C56 | 0160-0820 | | CAPACITOR-FXD .05UF +80-20% 25WVDC CER | 28480 | 0160-0820 |
| A3C57 | 0180-0228 | | CAPACITOR-FXD 22UF +-10% 15VDC TA-SOLID | 56289 | 150D226X9015B2 |
| A3C58 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C59 | 0160-0820 | | CAPACITOR-FXD .05UF +80-20% 25WVDC CER | 28480 | 0160-0820 |
| A3C60 | 0180-0228 | | CAPACITOR-FXD 22UF +-10% 15VDC TA-SOLID | 56289 | 150D226X9015B2 |
| A3C61 | 0160-0820 | | CAPACITOR-FXD .05UF +80-20% 25WVDC CER | 28480 | 0160-0820 |
| A3C62 | 0180-0228 | | CAPACITOR-FXD 22UF +-10% 15VDC TA-SOLID | 56289 | 150D226X9015B2 |
| A3C63 | 0180-2255 | | C:FXD TA ELECT 22 UF 20% 20VDCW | 72982 | 301-000-COHO-829C |
| A3C64 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C65 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C66 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C67 | 0160-3448 | | CAPACITOR-FXD 1000PF +-10% 1000WVDC CER | 28480 | 0160-3448 |
| A3C68 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C69 | 0160-3470 | | CAPACITOR-FXD .01UF +80-20% 50WVDC CER | 28480 | 0160-3470 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|--------------------|
| A3C70 | 0160-3470 | | CAPACITOR-FXD .01UF +80-20% 50WVDC CER | 28480 | 0160-3470 |
| A3C71 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C72 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C73 | 0140-0192 | 3 | CAPACITOR-FXD 68PF +-5% 300WVDC MICA | 72136 | DM15E680J0300WV1CR |
| A3C74 | 0150-0031 | 1 | CAPACITOR-FXD 2PF +-5% 500WVDC T1 DIOX | 95121 | TYPE QC |
| A3C75 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C76 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3C77 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER (NOT USED IN OPTION 101) | 28480 | 0160-3451 |
| A3C78 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A3CR1 | 1901-0040 | 16 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR2 | | | NOT ASSIGNED | | |
| A3CR3 | | | NOT ASSIGNED | | |
| A3CR4 | 1901-0047 | 8 | DIODE-SWITCHING 20V 75NA 10NS | 28480 | 1901-0047 |
| A3CR5 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR6 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR7 | 1901-0047 | | DIODE-SWITCHING 20V 75NA 10NS | 28480 | 1901-0047 |
| A3CR8 | 1901-0047 | | DIODE-SWITCHING 20V 75NA 10NS | 28480 | 1901-0047 |
| A3CR9 | 1901-0047 | | DIODE-SWITCHING 20V 75NA 10NS | 28480 | 1901-0047 |
| A3CR10 | | | NOT ASSIGNED | | |
| A3CR11 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR12 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR13 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR14 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR15 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR16 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR17 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR18 | 1910-0016 | 1 | DIODE-SWITCHING 60V 60MA 1NS | 28480 | 1910-0016 |
| A3CR19 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR20 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR21 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR22 | | | NOT ASSIGNED | | |
| A3CR23 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR24 | | | NOT ASSIGNED | | |
| A3CR25 | 1901-0040 | 2 | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A3CR26 | 1901-0045 | | DIODE-PWR RECT 100V 750NA DO-29 | 28480 | 1901-0045 |
| A3CR27 | 1901-0045 | | DIODE PWR RECT 100V 750NA DO-29 | 28480 | 1901-0045 |
| A3CR28 | 1906-0042 | | DIODE-MULT (NOT USED IN OPTION 101) | 28480 | 1906-0042 |
| A3CR29 | | | NOT ASSIGNED | | |
| A3L1 | 9100-0670 | 2 | INDUCTOR | 28480 | 9100-0670 |
| A3L2 | 9100-0670 | | INDUCTOR | 28480 | 9100-0670 |
| A3L3 | 9100-2264 | 2 | COIL-FXD MOLDED RF CHOKE 6.8UH 10% | 24226 | 10/681 |
| A3L4 | 9100-2264 | | COIL-FXD MOLDED RF CHOKE 6.8UH 10% | 24226 | 10/681 |
| A3L5 | 9100-1650 | 2 | COIL-FXD MOLDED RF CHOKE 680UH 5% | 24226 | 19/683 |
| A3L6 | 9100-1650 | | COIL-FXD MOLDED RF CHOKE 680UH 5% | 24226 | 19/683 |
| A3L7 | 9170-0029 | 1 | CORE-SHIELDING BEAD | 02114 | 56-590-65A2/4A |
| A3MP1 | 01740-00603 | 1 | SHIELD-RESISTOR | 28480 | 01740-00603 |
| A3P2 | 1251-3750 | 3 | CONNECTOR 10-PIN M POST TYPE | 27264 | 09-65-1101 |
| A3P3 | 1251-3904 | 2 | CONNECTOR POST TYPE | 28480 | 1251-3904 |
| A3P4 | 1251-3904 | | CONNECTOR POST TYPE | 28480 | 1251-3904 |
| A3Q1 | 1853-0380 | 5 | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0380 |
| A3Q2 | 1855-0217 | 2 | TRANSISTOR-JFET DUAL N-CHAN D-MODE SI | 28480 | 1855-0217 |
| A3Q3 | 1853-0380 | | TRANSISTOR PNP SI TO-92 PD=350MW | 28480 | 1853-0380 |
| A3Q4 | 1855-0217 | | TRANSISTOR-JFET DUAL N-CHAN D-MODE SI | 28480 | 1855-0217 |
| A3Q5 | 1854-0092 | 11 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A3Q6 | 1854-0628 | 2 | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPS-H17 |
| A3Q7 | 1854-0628 | | TRANSISTOR NPN SI TO-92 PD=625MW | 04713 | MPS-H17 |
| A3Q8 | 1854-0215 | 19 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A3Q9 | 1853-0036 | 23 | TRANSISTOR NPN SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A3Q10 | 1854-0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A3Q11 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A3Q12 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A3Q13 | 1855-0367 | 1 | TRANSISTOR-UJT P ON N | 28480 | 1855-0367 |
| A3Q14 | 1854-0071 | 14 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A3Q15 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A3Q16 | 1853-0015 | 3 | TRANSISTOR PNP SI PD=200MW FT=500MHZ | 28480 | 1853-0015 |
| A3Q17 | 1853-0006 | 1 | TRANSISTOR PNP 2N3134 SI TO-5 PD=600MW | 04713 | 2N3134 |
| A3Q18 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A3Q19 | 1854-0213 | 1 | TRANSISTOR NPN 2N2538 SI TO-5 PD=800MW | 28480 | 1854-0213 |
| A3Q20 | 1853-0086 | 1 | TRANSISTOR NPN SI PD=310MW FT=40MHZ | 28480 | 1853-0086 |
| A3Q21 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ (NOT USED IN OPTION 101) | 28480 | 1853-0036 |
| A3R1 | 0698-8648 | 2 | RESISTOR 50 2% .5W MO TC=0+-150 | 28480 | 0698-8648 |
| A3R2 | 0698-7206 | 1 | RESISTOR 56.2 2% .05W F TC=0+-100 | 24546 | C3-1/8-T00-56R2-G |
| A3R3 | 0698-8622 | 4 | RESISTOR 990K 5% .12W | 28480 | 0698-8622 |
| A3R4 | 0698-3329 | 3 | RESISTOR 10K .5% .125W F TC=0+-100 | 03888 | PM55-1/8-T0-1002-D |
| A3R5 | 0698-8622 | | RESISTOR 990K 5% .12W | 28480 | 0698-8622 |
| A3R6 | 0675-1011 | 2 | RESISTOR 100 10% .125W CC TC=0+882 | 01121 | 881011 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|---------------------|
| A3R7 | 0698 7214 | 1 | RESISTOR 121 2% .05W F TC=0+—100 (FACTORY SELECTED VALUE) | 24546 | C3 1/8 TO 121R G |
| A3R8 | 0687 2241 | 2 | RESISTOR 220K 10% .5W CC TC=0+882 | 01121 | EB2241 |
| A3R9 | 0757 0401 | 10 | RESISTOR 100 1% .125W | 24546 | C4 1/8 TO 101 F |
| A3R10 | 0698-3157 | 4 | RESISTOR 19.6K 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 1962-F |
| A3R11 | 2100-0568 | 7 | RESISTOR VAR TRMR 100 OHM 10% C TOP ADJ | 73138 | 72PR100 |
| A3R12 | 0684 1001 | 2 | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A3R13 | 0683-0475 | 2 | RESISTOR 4.7 5% .25W FC TC=—400/+500 | 01121 | CB47G5 |
| A3R14 | 0757 0394 | 4 | RESISTOR 51.1 1% .12W F | 24546 | C4 1/8 TO 51R1 F |
| A3R15 | 0698 7926 | 2 | RESISTOR 470 10% .125W CC TC=0+—882 | 01121 | BB4711 |
| A3R16 | 0757 0394 | 2 | RESISTOR 51.1 1% .12W F | 24546 | C4 1/8 TO 51R1-F |
| A3R17 | 0698 3157 | | RESISTOR 19.6K 1% .125W F TC=+—100 | 16299 | C4 1/8 TO 1962 F |
| A3R18 | 2100 3531 | 2 | RESISTOR VAR TRMR 250 OHM 10% C | 73138 | 72 177 0 |
| A3R19 | 2100 3531 | 2 | RESISTOR VAR TRMR 250 OHM 10% C | 73138 | 72 177 0 |
| A3R20 | 0757 3438 | 2 | RESISTOR 147 1% .125W F | 28480 | 0757 3438 |
| A3R21 | 0698-8648 | 2 | RESISTOR 50 2% .5W MO TC=0+—150 | 28480 | 0698 8648 |
| A3R22 | 2100 2061 | 1 | RESISTOR TRMR 200 10% C TOP ADJ 1-TURN | 30983 | ET50W201 |
| A3R23 | 0698 8622 | | RESISTOR 990K 5% .12W F | 28480 | 0698 8622 |
| A3R24 | 0698 3329 | | RESISTOR 10K .5% .125W F TC=0+—100 | 03888 | PME55 1/8-T0-1002 D |
| A3R25 | 0698 8622 | | RESISTOR 990K 5% .12W F | 28480 | 0698-8622 |
| A3R26 | 0687 2241 | | RESISTOR 220K 10% .5W CC TC=0+882 | 01121 | EB2241 |
| A3R27 | 0675 1011 | | RESISTOR 100 10% .125W CC TC=0+882 | 01121 | BB1011 |
| A3R28 | 0698 7216 | 1 | RESISTOR 147 2% .05W F TC=0+—100 (FACTORY SELECTED VALUE) | 24546 | C3 1/8 TO 147R-G |
| A3R29 | 0757 0401 | | RESISTOR 100 1% .125W F | 24546 | C4 1/8 TO 101-F |
| A3R30 | 0698-3157 | | RESISTOR 19.6K 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 1962-F |
| A3R31 | 2100-0568 | | RESISTOR VAR TRMR 100 OHM 10% C TOP ADJ | 73138 | 72PR100 |
| A3R32 | 2100 3212 | 2 | RESISTOR VAR TRMR 200 OHM 10% C | 73138 | 72 PR200 |
| A3R33 | 0698 0082 | 3 | RESISTOR 464 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 4640-F |
| A3R34 | 0698 3495 | 2 | RESISTOR 866 1% .125W F | 16299 | C4 1/8 TO 866R F |
| A3R35 | 0757 0403 | | RESISTOR 121 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 121R F |
| A3R36 | 2100-3433 | 2 | RESISTOR VAR CONTROL CC 250 10% LIN | 01121 | 70M1G040R251U |
| A3R37 | 0698 0082 | | RESISTOR 464 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 4640-F |
| A3R38 | 0757 1098 | 2 | RESISTOR 945 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 945R-F |
| A3R39 | 0684 1001 | | RESISTOR 10 10% .25 CC | 01121 | CB1001 |
| A3R40 | 0757 0394 | 2 | RESISTOR 51.1 1% .125W F | 24546 | C4 1/8 TO 51R1-F |
| A3R41 | 0757-0284 | 2 | RESISTOR 150 1% .125W F | 24546 | C4 1/8 TO 151-F |
| A3R42 | 0757 0398 | | RESISTOR 75 1% .125W F | 24546 | 75R0 F |
| A3R43 | 0698 7926 | | RESISTOR 470 10% .125W CC TC=0+—882 | 01121 | BB4711 |
| A3R44 | 0684 0271 | 3 | RESISTOR 2.7 10% .25W CC | 01121 | CB27G1 |
| A3R45 | 0757 0433 | 14 | RESISTOR 3.32K 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 3321-F |
| A3R46 | 2100-0554 | 4 | RESISTOR VAR TRMR 500 OHM 10% C TOP ADJ | 73138 | 72PR500 |
| A3R47 | 0757 0394 | | RESISTOR 51.1 1% .125W F | 24546 | C4 1/8 TO 51R1-F |
| A3R48 | 0698-3157 | | RESISTOR 19.6K 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 1962 F |
| A3R49 | 2100-0554 | | RESISTOR VAR TRMR 500 OHM 10% C TOP ADJ | 73138 | 72PR500 |
| A3R50 | 0757 0398 | | RESISTOR 75 1% .125W F | 24546 | 75R0-F |
| A3R51 | 0757-0284 | | RESISTOR 150 1% .125W F | 24546 | C4 1/8 TO 151-F |
| A3R52 | 0684 0271 | | RESISTOR 2.7 10% .25W CC | 01121 | CB27G1 |
| A3R53 | 0757 0433 | | RESISTOR 3.32K 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 3321-F |
| A3R54 | 0698 7216 | 2 | RESISTOR 147 2% .05W F | 24546 | C3 1/8 TO 147R-G |
| A3R55 | 0698 7216 | | RESISTOR 147 2% .05W F | 24546 | C3 1/8 TO 147R-G |
| A3R56 | 0757-1098 | | RESISTOR 945 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 945R-F |
| A3R57 | 0698 3495 | | RESISTOR 866 1% .125W F | 16299 | C4 1/8 TO 866R-F |
| A3R58 | 2100 3212 | | RESISTOR VAR TRMR 200 OHM 10% C | 32997 | 3389P-1 201 |
| A3R59 | 0698 7228 | 2 | RESISTOR 464 2% .05W F TC=0+—100 | 24546 | C3 1/8 TO 464R-G |
| A3R60 | 0698 7228 | | RESISTOR 464 2% .05W F TC=0+—100 | 24546 | C3 1/8 TO 464R-G |
| A3R61 | 2100-3433 | | RESISTOR VAR CONTROL CC 250 10% LIN | 01121 | 70M1G040R251U |
| A3R62 | 0757 0403 | | RESISTOR 121 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 121R F |
| A3R63 | 0757 0411 | 6 | RESISTOR 332 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 332R F |
| A3R64 | 0757 0401 | | RESISTOR 100 1% .125W F TUBULAR | 24546 | C4 1/8 TO 101 F |
| A3R65 | 2100 0567 | 2 | RESISTOR VAR TRMR 2K OHM 10% C TOP ADJ | 73138 | 72PR2K |
| A3R66 | 0757 0401 | | RESISTOR 100 1% .125W F TUBULAR | 24546 | C4 1/8 TO 101 F |
| A3R67 | 0698-3455 | 2 | RESISTOR 261K 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 2613-F |
| A3R68 | 0684-4721 | 2 | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A3R69 | 0684 1031 | 9 | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R70 | 0757 0462 | 2 | RESISTOR 75K 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 7502-F |
| A3R71 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A3R72 | 0698 3161 | 3 | RESISTOR 38.3K 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 3832-F |
| A3R73 | 0684 1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R74 | 0757 0739 | 1 | RESISTOR 2K 1% .25W F (FACTORY SELECTED VALUE) | 24546 | C5 1/8 TO 2001 F |
| A3R75 | 0698 3161 | | RESISTOR 38.3K 1% .125W F TC=0+—100 | 16299 | C4 1/8 TO 3832-F |
| A3R76 | 2100 3531 | | RESISTOR VAR TRMR 250 OHM 10% C | 73138 | 72 177 0 |
| A3R77 | 2100 3531 | | RESISTOR VAR TRMR 250 OHM 10% C | 73138 | 72 177 0 |
| A3R78 | 0757 3438 | | RESISTOR 147 1% .125W F | 24546 | C4 1/8 TO 121R F |
| A3R79 | 2100 3212 | | RESISTOR VAR TRMR 200 OHM 10% C TOP ADJ | 73138 | 72PR200 |
| A3R80 | 0757 0290 | 2 | RESISTOR 6.19K 1% .125W F | 19701 | MF4C1/8-TD-6191 F |
| A3R81 | 0757 0417 | 2 | RESISTOR 562 1% .125W F TC=0+—100 | 24546 | C4 1/8 TO 562R F |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|-------------------|
| A3R82 | 0757-0443 | 3 | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A3R83 | 0698-4037 | 3 | RESISTOR 46.4 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-46R4-F |
| A3R84 | 0757-0317 | 1 | RESISTOR 1.33K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1331-F |
| A3R85 | 0698-4037 | | RESISTOR 46.4 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-46R4-F |
| A3R86 | 2100-0567 | | RESISTOR VAR TRMR 2K OHM 10% C TOP ADJ | 73138 | 72PR2K |
| A3R87 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A3R88 | 0757-0280 | 5 | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A3R89 | 0757-1094 | 3 | RESISTOR 1.47K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1471-F |
| A3R90 | 2100-3212 | | RESISTOR VAR TRMR 200 OHM 10% C TOP ADJ | 73138 | 72PR200 |
| A3R91 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R92 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R93 | 0698-3161 | | RESISTOR 38.3K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-3832-F |
| A3R94 | 0684-3321 | | RESISTOR 3.3K 10% .25W CC | 01121 | CB3321 |
| A3R95 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R96 | 0757-1094 | | RESISTOR 1.47K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1471-F |
| A3R97 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R98 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R99 | 0698-0082 | | RESISTOR 464 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-4640-F |
| A3R100 | 0698-3455 | | RESISTOR 261K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2613-F |
| A3R101 | 0757-0401 | | RESISTOR 100 1% .125W F | 24546 | C4-1/8-T0-101-F |
| A3R102 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R103 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A3R104 | 0757-0442 | | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-T0-1002-F |
| A3R105 | 0684-3321 | | RESISTOR 3.3K 10% .25W CC | 01121 | CB3321 |
| A3R106 | 0757-0283 | 3 | RESISTOR 2K 1% .125W F | 24546 | C4-1/8-T0-2001-F |
| A3R107 | 0684-3321 | | RESISTOR 3.3K 10% .25W CC | 01121 | CB3321 |
| A3R108 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A3R109 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A3R110 | 0757-0274 | 2 | RESISTOR 1.21K 1% .125W F | 24546 | C4-1/8-T0-1213-F |
| A3R111 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A3R112 | 0757-0274 | | RESISTOR 1.21K 1% .125W F | 24546 | C4-1/8-T0-1213-F |
| A3R113 | 0684-3321 | | RESISTOR 3.3K 10% .25W CC | 01121 | CB3321 |
| A3R114 | 0757-0290 | | RESISTOR 6.19K 1% .125W F | 19701 | MF4C1/8-T0-6191-F |
| A3R115 | 0757-0274 | | RESISTOR 1.21K 1% .125W F | 24546 | C4-1/8-T0-1213-F |
| A3R116 | 2100-0554 | | RESISTOR VAR TRMR 500 OHM 10% C TOP ADJ | 73138 | 72PR500 |
| A3R117 | 0757-0283 | | RESISTOR 2K 1% .125W F | 24546 | C4-1/8-T0-2001-F |
| A3R118 | 0757-0417 | | RESISTOR 562 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-562R-F |
| A3R119 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A3R120 | 0698-3150 | 3 | RESISTOR 2.37K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2371-F |
| A3R121 | 0757-0442 | | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-T0-1002-F |
| A3R122 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A3R123 | 0757-0462 | | RESISTOR 75K 1% .125W F | 24546 | C4-1/8-T0-7502-F |
| A3R124 | 0757-0442 | | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-T0-1002-F |
| A3R125 | 0698-7096 | 2 | RESISTOR 10 10% .125W CC TC=0+-588 | 01121 | BB1001 |
| A3R126 | 0698-7229 | 2 | RESISTOR 511 2% .05W F TC=0+-100 | 24546 | C3-1/8-T0-511R-G |
| A3R127 | 0698-7096 | | RESISTOR 10 10% .125W CC TC=0+-588 | 01121 | BB1001 |
| A3R128 | 0698-7229 | | RESISTOR 511 2% .05W F TC=0+-100 | 24546 | C3-1/8-T0-511R-G |
| A3R129 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A3R130 | 0757-0442 | | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-T0-1002-F |
| A3R131 | 0757-0411 | | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A3R132 | 0698-4037 | | RESISTOR 46.4 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-46R4-F |
| A3R133 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A3R134 | 0757-1094 | | RESISTOR 1.47K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1471-F |
| A3R136 | 0757-0453 | 4 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A3R137 | 0684-0271 | | RESISTOR 2.7 10% .25W F CC | 01121 | CB27G1 |
| A3R138 | 0757-0453 | | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A3R139 | 0757-0416 | 1 | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A3R140 | 0757-0453 | | RESISTOR 30.1K 1% .125W F (NOT USED IN OPTION 101) | 24546 | C4-1/8-T0-3012-F |
| A3R141 | 0757-0411 | | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A3R142 | 0698-7238 | 2 | RESISTOR 1.21K 2% .05W F TC=0+-100 (USED IN OPTION 101 ONLY) | 24546 | C3-1/8-T0-1211-G |
| A3R143 | 0698-7238 | | RESISTOR 1.21K 2% .05W F TC=0+-100 (USED IN OPTION 101 ONLY) | 24546 | C3-1/8-T0-1211-G |
| A3R144 | 0757-0440 | 1 | RESISTOR 7500 1% .125W F | 24546 | C4-1/8-T0-7501-F |
| A3RT1 | 0837-0035 | 2 | THERMISTOR NEG TC 5K DISC | 28480 | 0837-0035 |
| A3RT2 | 0837-0035 | | THERMISTOR NEG TC 5K DISC | 28480 | 0837-0035 |
| A3S1 | 3101-1905 | 1 | SWITCH-PB 45TA .394 IN-CTRS .45A 115 VAC | 28480 | 3101-1905 |
| A3U1 | 1820-1518 | 1 | IC DM74L 00N GATE | 27014 | DM74L00N |
| A3U2 | 1820-0596 | 2 | IC DM74L 74N FLIP-FLOP | 27014 | DM74L74N |
| A3U3 | 1820-0585 | 1 | IC DM74L 03N GATE | 27014 | DM74L03N |
| A3U4 | 1820-0596 | | IC DM74L 74N FLIP-FLOP | 27014 | DM74L74N |
| A3VR1 | 1902-3082 | 2 | DIODE ZNR 4.64V 5% DO-7 PD=4W TC=-.023% | 04713 | SZ10939-86 |
| A3VR2 | 1902-3234 | 1 | DIODE ZNR 19.6V 5% DO-7 PD=4W TC=-.073% | 04713 | SZ10939-266 |
| A3VR3 | 1902-0072 | 1 | DIODE ZNR 7.87V 2% DO-7 PD=4W TC=-.051% | 04713 | SZ10939-153 |
| A3VR4 | 1902-3137 | 1 | DIODE ZNR 8.06V 2% DO-7 PD=4W TC=-.052% | 04713 | SZ10939-156 |
| A3VR5 | 1902-0441 | 1 | DIODE ZENER 5.11V 5% 0.4W MAX PDI (NOT USED IN OPTION 101) | 04713 | SZ10939-98 |
| A3W1 | 01740-61617 | 1 | CABLE ASSEMBLY, COAX | 28480 | 01740-61617 |
| A3XU1 | 1200-0474 | 8 | SOCKET, ELEC, IC 14 CONT DIP SLDR TERM | 28480 | 1200-0474 |
| A3XU2 | 1200-0474 | | SOCKET, ELEC, IC 14 CONT DIP SLDR TERM | 28480 | 1200-0474 |
| A3XU3 | 1200-0474 | | SOCKET, ELEC, IC 14 CONT DIP SLDR TERM | 28480 | 1200-0474 |

See introduction to this section for ordering information



Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|--|----------|--------------------|
| A3XU4 | 1200-0474 | | SOCKET, ELEC; IC 14-CONT DIP SLDR TERM | 26480 | 1200-0474 |
| A4 | 01740-61611 | 1 | CABLE ASSEMBLY, DELAY LINE | 26480 | 01740-61611 |
| A5 | 01740-66505 | 1 | BOARD ASSEMBLY, VERTICAL OUTPUT (DOES NOT INCLUDE ASA1) | 26480 | 01740-66505 |
| A5A1 | 5081-3032 | 1 | ASSY, SUBSTRATE (NOT SUPPLIED W/A5, ORDER SEPARATELY) | 26480 | 5081-3032 |
| A5C1 | 0150-0029 | 1 | CAPACITOR-FXD 1PF +-10% 500VDC TI DIOX | 95121 | TYPE OC |
| A5C2 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A5C3 | 0160-3652 | 1 | CAPACITOR-FXD 4.7PF +-5-4.7PF 200WVDC (FACTORY SELECTED VALUE) | 26480 | 0160-3652 |
| A5C4 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A5C5 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A5C6 | 0180-2255 | | C-FXD TA ELECT 22UF 20% 20VDCW | 72982 | 301-000-COH0-829C |
| A5C7 | 0180-2255 | | C-FXD TA ELECT 22UF 20% 20VDCW | 72982 | 301-000-COH0-829C |
| A5C8 | 0160-3650 | 1 | CAPACITOR-FXD .018UF +-10% 50WVDC CER | 26480 | 0160-3650 |
| A5C9 | 0160-3799 | | CAPACITOR-FXD 18PF +-10% 100WVDC CER | 26480 | 0160-3799 |
| A5C10 | 0160-3569 | 2 | CAPACITOR-FXD 27PF +-5% 100WVDC CER | 26480 | 0160-3569 |
| A5C11 | 0160-3651 | 1 | CAPACITOR-FXD 68PF +-10% 200WVDC CER | 26480 | 0160-3651 |
| A5C12 | 0160-3694 | 1 | CAPACITOR-FXD 330PF +-10% 100WVDC CER | 26480 | 0160-3694 |
| A5C13 | 0180-0230 | 4 | CAPACITOR-FXD; 1UF +-20% 50VDC TA SOLID | 56289 | 1500105X0050A2 |
| A5C14 | 0160-3799 | 1 | CAPACITOR-FXD; 18PF +-10% 100WVDC CER | 26480 | 0160-3799 |
| A5C15 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A5C16 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A5C17 | 0160-3848 | 1 | CAPACITOR-FXD 3.3PF +-5PF 100WVDC CER | 26480 | 0160-3848 |
| A5L1 | 9100-2598 | 2 | COIL-FXD MOLDED RF CHOKE .075UH 10% | 06560 | 10150-14 |
| A5L2 | 9100-2258 | 3 | COIL-FXD MOLDED RF CHOKE 1.2UH 10% | 24226 | 10/121 |
| A5L3 | 9100-2258 | | COIL-FXD MOLDED RF CHOKE 1.2UH 10% | 24226 | 10/121 |
| A5L4 | 9100-2598 | | COIL-FXD MOLDED RF CHOKE .075UH 10% | 06560 | 10150-14 |
| A5L5 | 9100-2250 | 2 | COIL-FXD MOLDED RF CHOKE .18UH 10% | 24226 | 10/180 |
| A5L6 | 9100-2250 | | COIL-FXD MOLDED RF CHOKE .18UH 10% | 24226 | 10/180 |
| A5L7 | 9100-2252 | 2 | COIL-FXD MOLDED RF CHOKE .27UH 10% | 24226 | 10/270 |
| A5L8 | 9100-2252 | | COIL-FXD MOLDED RF CHOKE .27UH 10% | 24226 | 10/270 |
| A5L9 | 9100-2258 | | COIL-FXD MOLDED RF CHOKE 1.2UH 10% | 24226 | 10/121 |
| A5MP1 | 01740-20506 | 1 | HEAT SINK, V OUTPUT | 26480 | 01740-20506 |
| A5O1 | 1853-0354 | 8 | TRANSISTOR PNP SI T0-92 PD=350MW | 26480 | 1853-0354 |
| A5O2 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 26480 | 1853-0036 |
| A5O3 | 1853-0354 | | TRANSISTOR PNP SI T0-92 PD=350MW | 26480 | 1853-0354 |
| A5O4 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 26480 | 1853-0036 |
| A5R1 | 0698-4399 | 2 | RESISTOR 88.7 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-88R7-F |
| A5R2 | 0757-0734 | 2 | RESISTOR 1.21K 1% .25W F TC=0+-100 | 24546 | C5-1/4-T0-1211-F |
| A5R3 | 0757-0719 | 1 | RESISTOR 221 1% .25W F TC=0+-100 | 24546 | C5-1/4-T0-221R-F |
| A5R4 | 0757-0734 | | RESISTOR 1.21K 1% .25W F TC=0+-100 | 24546 | C5-1/4-T0-1211-F |
| A5R5 | 0698-4399 | | RESISTOR 88.7 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-88R7-F |
| A5R6 | 0698-7028 | 1 | RESISTOR 27 10% .125W CC TC=0+588 | 01121 | BB2701 |
| A5R7 | 0684-1011 | 13 | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A5R8 | 0757-0200 | 3 | RESISTOR 5.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5621-F |
| A5R9 | 0698-0083 | 2 | RESISTOR 1.96K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-1961-F |
| A5R10 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A5R11 | 0757-0200 | | RESISTOR 5.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5621-F |
| A5R12 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A5R13 | 0698-0083 | | RESISTOR 1.96K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-1961-F |
| A5R14 | 0757-0399 | 3 | RESISTOR 82.5 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-82R5-F |
| A5R15 | 0698-7386 | 2 | RESISTOR 490.9 5% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-490R9-D |
| A5R16 | 0698-7386 | | RESISTOR 490.9 5% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-490R9-D |
| A5R17 | 0757-0399 | | RESISTOR 82.5 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-82R5-F |
| A5R18 | 0757-0288 | 2 | RESISTOR 9.09K 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-9091-F |
| A5R19 | 2100-2216 | 2 | RESISTOR TRMR 5K 10% C TOP-ADJ 1-TURN | 30983 | ET50W502 |
| A5R20 | 2100-1788 | 3 | RESISTOR TRMR 500 10% C TOP-ADJ 1-TURN | 30983 | ET50W501 |
| A5R21 | 0757-0401 | 1 | RESISTOR 100 1% .125W F TC=0+-100 (FACTORY SELECTED VALUE) | 24546 | C4-1/8-T0-101-F |
| A5R22 | 2100-2216 | | RESISTOR TRMR 5K 10% C TOP-ADJ 1-TURN | 30983 | ET50W502 |
| A5R23 | 0698-7252 | 1 | RESISTOR 4.64K 2% .05W F TC=0+-100 | 24546 | C3-1/8-T0-4641-G |
| A5R24 | 2100-1986 | | RESISTOR TRMR 1K 10% C | 26480 | 2100-1986 |
| A5R25 | 0757-0416 | 1 | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A5R26 | 0757-0720 | 1 | RESISTOR 243 1% .25W F TC=0+-100 | 24546 | C5-1/4-T0-243R-F |
| A5VR1 | 1902-3082 | | DIODE ZNR 4.64V 5% D0-7 PD=4W TC= -.023% | 04713 | SZ10939-86 |
| A5XA3 | 1251-3903 | 1 | CONNECTOR 6-PIN F POST TYPE | 27264 | 09-52-3061 |
| A6 | 0960-0429 | 1 | ASSY, HV MULTIPLIER (NON-REPAIRABLE) | 26480 | 0960-0429 |
| A7 | 01740-66524 | 1 | BOARD ASSY, HORIZONTAL SWEEP | 26480 | 01740-66524 |
| A7 OPTION 101 | 01740-66525 | 1 | BOARD ASSY, HORIZONTAL SWEEP (USES SAME PARTS AS 01740-66524 EXCEPT WHERE NOTED) | 26480 | 01740-66525 |
| A7C1 | 0160-3569 | | CAPACITOR-FXD 27PF +-5% 100WVDC CER | 26480 | 0160-3569 |
| A7C2 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A7C3 | 0140-0202 | 1 | CAPACITOR-FXD 15PF +-5% 500WVDC MICA | 72136 | DM15C150J0500WV1CR |
| A7C4 | 0150-0070 | 2 | CAPACITOR-FXD .02UF +-20% 500WVDC CER | 26480 | 0150-0070 |
| A7C5 | 0140-0198 | 2 | CAPACITOR-FXD 150PF +-5% 300WVDC MICA | 72136 | DM15F151J0300WV1CR |
| A7C6 | 0160-3318 | 1 | CAPACITOR-FXD .047UF +-10% 100WVDC CER | 26480 | 0160-3318 |
| A7C7 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |
| A7C8 | 0150-0021 | | CAPACITOR-FXD 47PF +-5% 500WVDC TI DIOX | 95121 | TYPE OC |
| A7C9 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 26480 | 0160-3451 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|--|----------|---------------------|
| A7C10 | 0140 0193 | 2 | CAPACITOR FXD 82PF +-5% 300VDC MICA | 72136 | DM15E820J0300V1CR |
| A7C11 | 0160 3443 | | CAPACITOR FXD .1UF +80-20% 50WVDC CER | 28480 | 0160 3443 |
| A7C12 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C13 | 0160 4442 | | CAPACITOR FXD .15UF +80-20% | 28480 | 0160 4442 |
| A7C14 | 0160 2204 | 4 | CAPACITOR FXD 100PF +-5% 300WVDC MICA | 28480 | 0160 2204 |
| A7C15 | 0180 0374 | 1 | CAPACITOR FXD 10UF +-10% 20VDC TA-SOLID | 56289 | 150D106X9020B2 |
| A7C16 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C17 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C18 | 0180 0058 | | CAPACITOR FXD 50UF +75-10% 25VDC AL | 56289 | 30D506G025C2 |
| A7C19 | 0160 3451 | 2 | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C20 | 0160 3451 | 2 | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C21 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C22 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C23 | 0180 1746 | | CAPACITOR FXD 15UF +-10% 20VDC TA-SOLID | 56289 | 150D156X9020B2 |
| A7C24 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C25 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C26 | 0160 3451 | 1 | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C27 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C28 | 0180 0106 | | CAPACITOR-FXD 60UF +-20% 60VDC TA-SOLID | 56289 | 150D60X0006B2 |
| A7C29 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C30 | 0160 3451 | 1 | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C31 | 0180 0229 | | CAPACITOR FXD 33UF +-10% 10VDC TA-SOLID | 56289 | 150D336X9010B2 |
| A7C32 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C33 | 0180 1746 | | CAPACITOR FXD 15UF +-10% 20VDC TA-SOLID | 56289 | 150D156X9020B2 |
| A7C34 | 0160 3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C35 | 0160 3451 | 1 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C36 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C37 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C38 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C39 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C40 | 0160 2198 | | CAPACITOR-FXD 20PF +-5% 300WVDC MICA | 28480 | 0160 2198 |
| A7C41 | 0160 2198 | 1 | CAPACITOR-FXD 20PF +-5% 300WVDC MICA | 28480 | 0160 2198 |
| A7C42 | 0160 2197 | | CAPACITOR-FXD 10PF +-5% 300WVDC MICA | 28480 | 0160 2197 |
| A7C43 | | | NOT ASSIGNED | | |
| A7C44 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C45 | 0160 3451 | 1 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C46 | 0140 0204 | | CAPACITOR-FXD 47PF +-5% 500WVDC MICA | 72136 | DM15E470J0500V1CR |
| A7C47 | 0160 2204 | | CAPACITOR-FXD 100PF +-5% 300WVDC MICA | 28480 | 0160 2204 |
| A7C48 | 0160 3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160 3451 |
| A7C49 | 0140 0193 | | CAPACITOR-FXD 82PF +-5% 300WVDC MICA | 72136 | DM15E820J0300V1CR |
| A7CR1 | 1901 0376 | 1 | DIODE GEN PRP 35V 50NA D0-7 | 28480 | 1901 0376 |
| A7CR2 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR3 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR4 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR5 | 1901 0513 | | DIODE-MULT | 28480 | 1901 0513 |
| A7CR6 | 1901 0040 | 1 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR7 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR8 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR9 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR10 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR11 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR12 | 1901 0040 | 2 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR13 | 1901 0040 | | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR14 | | | NOT ASSIGNED | | |
| A7CR15 | 1910 0016 | | DIODE GE 60V 60NA 1US D0-7 | 28480 | 1910 0016 |
| A7CR16 | 1901 0040 | 1 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901 0040 |
| A7CR17 | 1901 0047 | | DIODE SWITCHING 20V 75NA 10NS CR17 20 (USED IN OPTION 101 ONLY) | 28480 | 1901 0047 |
| A7CR18 | 1901 0047 | 1 | DIODE SWITCHING 20V 75NA 10NS | 28480 | 1901 0047 |
| A7CR19 | 1901 0047 | | DIODE SWITCHING 20V 75NA 10NS | 28480 | 1901 0047 |
| A7CR20 | 1901 0047 | | DIODE SWITCHING 20V 75NA 10NS | 28480 | 1901 0047 |
| A7CR21 | 1901 0040 | 1 | DIODE SWITCHING 2NS 30V 50MA | 28480 | 1901 0040 |
| A7CR22 | 1901 0040 | | DIODE SWITCHING 2NS 30V 50MA | 28480 | 1901 0040 |
| A7CR23 | 1901 0040 | | DIODE SWITCHING 2NS 30V 50MA | 28480 | 1901 0040 |
| A7CR24 | 1910 0016 | | DIODE GE 60V 60NA 10S D0-7 | 28480 | 1910 0016 |
| A7L1 | 9140 0105 | 3 | COIL-FXD MOLDED RF CHOKE 8.2UH 10% | 24226 | 15/821 |
| A7L2 | 9140 0096 | | COIL-FXD MOLDED RF CHOKE 1UH 10% | 24226 | 15/101 |
| A7L3 | 9100 1613 | | COIL-FXD MOLDED RF CHOKE 47UH 20% | 24226 | 15/470 |
| A7L4 | 9140 0096 | | COIL-FXD MOLDED RF CHOKE 1UH 10% | 24226 | 15/101 |
| A7L5 | 9140 0105 | | COIL-FXD MOLDED RF CHOKE 8.2UH 10% | 24226 | 15/821 |
| A7L6 | 9140 0096 | | COIL-FXD MOLDED RF CHOKE 1UH 10% | 24226 | 15/101 |
| A7L7 | 9100 1613 | | COIL-FXD MOLDED RF CHOKE 47UH 20% | 24226 | 15/470 |
| A7L8 | 9170 0029 | 4 | CORE SHIELDING BEAD | 02114 | 56 590 65A2/4A |
| A7L9 | 9170 0029 | | CORE SHIELDING BEAD | 02114 | 56 590 65A2/4A |
| A7L10 | 9170 0029 | | CORE SHIELDING BEAD | 02114 | 56 590 65A2/4A |
| A7P1 | | 2 | NSR | | |
| A7P2 | 1251 3901 | | CONNECTOR 15-PIN M POST TYPE | 27264 | 09 65 1151 |
| A7P3 | 1251 3750 | 1 | CONNECTOR 10-PIN M POST TYPE | 27264 | 09 65 1101 |
| A7P4 | 1251 4238 | | CONNECTOR 9-PIN M POST TYPE | 28480 | 1251 4238 |
| A7P5 | 1251 3071 | | CONNECTOR 8-PIN M POST TYPE | 27264 | 09 56 1081(2183 8A) |
| A7Q1 | 1854 0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q2 | 1854 0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854 0092 |

See Introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--|--|-------------------------|---------------------|
| A7Q3 | 1854 0092 | 3 | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854 0092 |
| A7Q4 | 1855-0081 | | TRANSISTOR J FET 2N5245 N CHAN D MODE SI | 01296 | 2N5245 |
| A7Q5 | 1854 0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854 0092 |
| A7Q6 | 1854 0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q7 | 1853-0380 | | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0380 |
| A7Q8 | 1853-0380 | | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0380 |
| A7Q9 | 1853-0354 | | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0354 |
| A7Q10 | 1853-0354 | | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0354 |
| A7Q11 | 1853-0354 | | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0354 |
| A7Q12 | 1853-0380 | | TRANSISTOR PNP SI TO 92 PD=350MW | 28480 | 1853-0380 |
| A7Q13 | 1853-0036 | 3 | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q14 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q15 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A7Q16 | 1854-0691 | | TRANSISTOR NPN SI TO 92 PD=350MW | 28480 | 1854-0691 |
| A7Q17 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A7Q18 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A7Q19 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q20 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q21 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q22 | 1853-0015 | | TRANSISTOR PNP SI PD=200MW FT=500MHZ | 28480 | 1853-0015 |
| A7Q23 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q24 | 1854-0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A7Q25 | 1853-0036 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1853-0036 |
| A7Q26 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q27 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q28 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q29 | 1854-0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A7Q30 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A7Q31 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q32 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q33 | 1854-0215 | 3 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A7Q34 | 1854-0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A7R1 | 0698-3263 | | RESISTOR 500K 1% .125W F TC=0+-100 | 91637 | MFF 1/8 T 1 |
| A7R2 | 0698-3263 | | RESISTOR 500K 1% .125W F TC=0+-100 | 91637 | MFF 1/8 T 1 |
| A7R3 | 0757-0476 | | RESISTOR 301K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3013-F |
| A7R4 | 0757-0486 | 2 | RESISTOR 750K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A7R5 | 0757-0421 | | RESISTOR 825 1% .125W F | 24546 | C4-1/8-T0-825R-F |
| A7R6 | 0757-0283 | 3 | RESISTOR 2K 1% .125W F | 24546 | C4-1/8-T0-2001-F |
| A7R7 | 0757-0418 | | RESISTOR 619 1% .125W F | 24546 | C4-1/8-T0-619R-F |
| A7R8 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R9 | 0684-2711 | | RESISTOR 270 10% .25W FC TC=-400/+600 | 01121 | CB2711 |
| A7R10 | 0684-1061 | 3 | RESISTOR 10M 10% .25W CC | 01121 | CB1061 |
| A7R11 | 0698-3263 | | RESISTOR 500K 1% .125W F TC=0+-100 | 91637 | MFF 1/8 T 1 |
| A7R12 | 0683-1505 | | RESISTOR 15 5% .25W FC TC=-400/+500 | 01121 | CB1505 |
| A7R13 | 0757-0486 | | RESISTOR 750K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A7R14 | 0684-6811 | | RESISTOR 680 10% .25W FC TC=-400/+600 | 01121 | CB6811 |
| A7R15 | 0684-6811 | 5 | RESISTOR 680 10% .25W FC TC=-400/+600 | 01121 | CB6811 |
| A7R16 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R17 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R18 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A7R19 | 0684-2711 | | RESISTOR 270 10% .25W FC TC=-400/+600 | 01121 | CB2711 |
| A7R20 | 2100-3351 | 3 | RESISTOR-VAR TRMR 500 OHM 10% C SIDE ADJ | 73138 | 72XR500 |
| A7R21 | 2100-3434 | | RESISTOR-VAR CONTROL CC 50K 10% LIN | 01121 | 70MAN048P503U |
| A7R22 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A7R23 | 0698-3446 | 6 | RESISTOR 383 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-383R-F |
| A7R24 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R25 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A7R26 | 0698-3433 | | RESISTOR 28.7 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-28R7-F |
| A7R27 | 0698-3433 | | RESISTOR 28.7 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-28R7-F |
| A7R28 | 0757-0427 | 4 | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A7R29 | 0757-0281 | | RESISTOR 2.74K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2741-F |
| A7R30 | 0757-0466 | | RESISTOR 110K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1103-F |
| A7R31 | 0757-0488 | | RESISTOR 909K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A7R32 | 0684-4701 | 3 | RESISTOR 47 10% .25W CC | 01121 | CB4701 |
| A7R33 | 0684-2701 | | RESISTOR 27 10% .25W FC TC=-400/+500 | 01121 | CB2701 |
| A7R34 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A7R35 | 0757-0433 | 2 | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A7R36 | 0757-0410 | | RESISTOR 301 1% .125W F | 24546 | C4-1/8-T0-301R-F |
| A7R37 | 0757-0746 | | RESISTOR 4.75K 1% .25W F TC=0+-100 | 24546 | CS-1/4-T0-4751-F |
| A7R38 | 0757-0418 | | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A7R39 | 0757-0416 | | 1 | RESISTOR 511 1% .125W F | 24546 |
| A7R40 | 0757-0440 | RESISTOR 7.5K 1% .125W F TC=0+-100 | | 24546 | C4-1/8-T0-7501-F |
| A7R41 | 2100-3351 | RESISTOR-VAR TRMR 500 OHM 10% C SIDE ADJ | | 73138 | 72XR500 |
| A7R42 | 0757-0280 | RESISTOR 1K 1% .125W F | | 24546 | C4-1/8-T0-1001-F |
| A7R43 | 0684-1511 | RESISTOR 150 10% .25W FC TC=-400/+600 | | 01121 | CB1511 |
| A7R44 | 0684-1001 | 3 | RESISTOR 10 10% .25 CC | 01121 | CB1001 |
| A7R45 | 0757-0281 | | RESISTOR 2.74K 1% .125W F | 24546 | C4-1/8-T0-2741-F |
| A7R46 | 0757-0401 | | RESISTOR 100 1% .125W F | 24546 | C4-1/8-T0-101-F |
| A7R47 | 0684-4701 | | RESISTOR 47 10% .25W CC | 01121 | CB4701 |
| A7R48 | 0684-1521 | | RESISTOR 1.5K 10% .25W CC | 01121 | CB1521 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|---------------------|
| A7R49 | 0757-0399 | | RESISTOR 82.5 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-82R5 F |
| A7R50 | 0757-0284 | | RESISTOR 150 1% .125W F | 24546 | C4-1/8-T0-151 F |
| A7R51 | 0757-0284 | | RESISTOR 150 1% .125W F | 24546 | C4-1/8-T0-151-F |
| A7R52 | 0684-0271 | | RESISTOR 2.7 10% .25W CC | 01121 | CB27G1 |
| A7R53 | 0757-0408 | | RESISTOR 243 1% .125W F | 24546 | C4-1/8-T0-243R F |
| A7R54 | 0757-0435 | | RESISTOR 3.92K 1% .125W F | 24546 | C4-1/8-T0-3921-F |
| A7R55 | 0757-0416 | | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A7R56 | 0757-0442 | | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-T0-1002 F |
| A7R57 | 0698-3446 | | RESISTOR 383 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-383R-F |
| A7R58 | 0757-0421 | | RESISTOR 825 1% .125W F | 24546 | C4-1/8-T0-825R-F |
| A7R59 | 0684-4711 | | RESISTOR 470 10% .25W CC | 01121 | CB4711 |
| A7R60 | 0757-0412 | 2 | RESISTOR 365 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-365R-F |
| A7R61 | 0757-0422 | 2 | RESISTOR 909 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-909R-F |
| A7R62 | 0757-0406 | 1 | RESISTOR 182 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-182R-F |
| A7R63 | 0757-0434 | 6 | RESISTOR 3.66K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3651 F |
| A7R64 | 0757-0447 | 1 | RESISTOR 16.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1622-F |
| A7R65 | 0698-7926 | | RESISTOR 470 10% .125W CC | 01121 | BB4711 |
| A7R66 | 0698-7926 | | RESISTOR 470 10% .125W CC | 01121 | BB4711 |
| A7R67 | 0757-0427 | | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A7R68 | 0698-7926 | | RESISTOR 470 10% .125W CC | 01121 | BB4711 |
| A7R69 | 0757-0415 | 2 | RESISTOR 475 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-475R-F |
| A7R70 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4-1/8-T0-201 F |
| A7R71 | 0757-0439 | 7 | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| A7R72 | 0684-1221 | | RESISTOR 1.2K 10% .25W CC | 01121 | CB1221 |
| A7R73 | 0684-2221 | | RESISTOR 2.2K 10% .25W CC | 01121 | CB2221 |
| A7R74 | 0684-6821 | | RESISTOR 6.8K 10% .25W CC | 01121 | CB6821 |
| A7R75 | 0757-0415 | | RESISTOR 475 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-475R F |
| A7R76 | 0757-0124 | 2 | RESISTOR 39.2K 1% .125W F TC=0+-100 | 24546 | C5-1/4-T0-3922-F |
| A7R77 | 0757-0448 | 1 | RESISTOR 18.2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1822-F |
| A7R78 | 0757-0437 | | RESISTOR 4.75K 1% .125W F | 24546 | C4-1/8-T0-4751 |
| A7R79 | 0757-0401 | | RESISTOR 100 1% .125W F | 24546 | C4-1/8-T0-101-F |
| A7R80 | 0757-0401 | | RESISTOR 100 1% .125W F | 24546 | C4-1/8-T0-101-F |
| A7R81 | 0757-0409 | 1 | RESISTOR 274 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-274R-F |
| A7R82 | 0757-0401 | | RESISTOR 100 1% .125W F | 24546 | C4-1/8-T0-101 F |
| A7R83 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4-1/8-T0-201 F |
| A7R84 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4-1/8-T0-201-F |
| A7R85 | 0757-0435 | | RESISTOR 3.92K 1% .125W F | 24546 | C4-1/8-T0-3921-F |
| A7R86 | 0757-0439 | | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| A7R87 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001 F |
| A7R88 | 0757-0290 | | RESISTOR 6.19K 1% .125W F | 19701 | MF4C1/8-TQ-6191-F |
| A7R89 | 0757-0412 | | RESISTOR 365 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-365R F |
| A7R90 | 0698-0085 | 2 | RESISTOR 2.61K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2611-F |
| A7R91 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4-1/8-T0-201 F |
| A7R92 | 0698-3433 | | RESISTOR 28.7 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-28R7-F |
| A7R93 | 2100-3211 | 1 | RESISTOR-VAR TRMR 1K OHM 10% C TOP ADJ | 73138 | 72PR1K |
| A7R94 | 0757-0438 | 4 | RESISTOR 5.11K 1% .125W F | 24546 | C4-1/8-T0-5111-F |
| A7R95 | 0757-0444 | 2 | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A7R96 | 0757-0430 | 2 | RESISTOR 2.21K 1% .125W F | 24546 | C4-1/8-T0-2211-F |
| A7R97 | 2100-3350 | | RESISTOR-VAR TRMR 200 10% C SIDE ADJ | 73138 | 72XR201 |
| A7R98 | 0757-0410 | | RESISTOR 301 1% .125W F | 24546 | C4-1/8-T0-301R F |
| A7R99 | 0757-0283 | | RESISTOR 2K 1% .125W F | 24546 | C4-1/8-T0-2001-F |
| A7R100 | 0757-0404 | 1 | RESISTOR 130 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-131-F |
| A7R101 | 0757-0418 | | RESISTOR 619 1% .125W F | 24546 | C4-1/8-T0-619R-F |
| A7R102 | 0698-3446 | | RESISTOR 383 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-383R-F |
| A7R103 | 0698-3155 | 2 | RESISTOR 4.64K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-4641-F |
| A7R104 | 0684-3311 | 3 | RESISTOR 330 10% .25W CC | 01121 | CB3311 |
| A7R105 | 2100-3253 | 3 | RESISTOR VAR TRMR 50K OHM 10% C TOP ADJ | 73138 | 72PR50K |
| A7R106 | 0757-0416 | | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A7R107 | 0757-0457 | 3 | RESISTOR 47.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-4752-F |
| A7R108 | 0757-0437 | | RESISTOR 4.75K 1% .125W F | 24546 | C4-1/8-T0-4751-F |
| A7R109 | 0684-1021 | 5 | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A7R110 | 0684-2221 | | RESISTOR 2.2K 10% .25W CC | 01121 | CB2221 |
| A7R111 | 0757-0474 | 1 | RESISTOR 243K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2433-F |
| A7R112 | 0757-0444 | | RESISTOR 12.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1212-F |
| A7R113 | 0698-3158 | 2 | RESISTOR 23.7K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2372-F |
| A7R114 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A7R115 | 0757-0401 | | RESISTOR 100 1% .125W F | 24546 | C4-1/8-T0-101-F |
| A7R116 | | | NOT ASSIGNED | | |
| A7R117 | 2100-0568 | | RESISTOR VAR TRMR 100 OHM 10% C TOP ADJ | 73138 | 72PR100 |
| A7R118 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R119 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R120 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R121 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R122 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R123 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R124 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R125 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A7R126 | 0684-4711 | | RESISTOR 470 10% .25W CC | 01121 | CB4711 |
| A7R127 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R128 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|--|----------|--------------------|
| A7R129 | 0698-3446 | | RESISTOR 383 1% .125W F TC=0+/-100 | 16299 | C4 1/8-T0-383R-F |
| A7R130 | 0757-0435 | | RESISTOR 3.92K 1% .125W F | 24546 | C4-1/8-T0-3921-F |
| A7R131 | 0698-3446 | | RESISTOR 383 1% .125W F TC=0+/-100 | 16299 | C4-1/8-T0-383R-F |
| A7R132 | 0698-3446 | | RESISTOR 383 1% .125W F TC=0+/-100 | 16299 | C4-1/8-T0-383R-F |
| A7R133 | 0757-0434 | | RESISTOR 3.65K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-3651-F |
| A7R134 | 0757-0289 | 1 | RESISTOR 13.3K 1% .125W F TC=0+/-100 | 19701 | MF4C1/8-T0-1332-F |
| A7R135 | 0757-0427 | | RESISTOR 1.5K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1501-F |
| A7R136 | 0757-0408 | 4 | RESISTOR 243 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-243R-F |
| A7R137 | 0757-0280 | | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-T0-1001-F |
| A7R138 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R139 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A7R140 | 0757-0438 | | RESISTOR 5.11K 1% .125W F | 24546 | C4-1/8-T0-5111-F |
| A7R141 | 0757-0290 | | RESISTOR 6.19K 1% .125W F | 19701 | MF4C1/8-T0-6191-F |
| A7R142 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R143 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A7R144 | 0684-4711 | | RESISTOR 470 10% .25W CC | 01121 | CB4711 |
| A7R145 | 0757-0416 | | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A7R146 | 5081-7476 | | RESISTOR 0757-0416 PF .40 | 28480 | 5081-7476 |
| A7R147 | 0757-0439 | | RESISTOR 6.81K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-6811-F |
| A7R148 | 0757-0419 | 1 | RESISTOR 681 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-681R-F |
| A7R149 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A7R150 | 0757-0391 | 1 | RESISTOR 39.2 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-39R2-F |
| A7R151 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A7R152 | 0757-0466 | | RESISTOR 110K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1103-F |
| A7R153 | 0684-4701 | | RESISTOR 47 10% .25W CC | 01121 | CB4701 |
| A7R154 | 0684-4711 | | RESISTOR 470 10% .25W CC | 01121 | CB4711 |
| A7R155 | 0757-0283 | | RESISTOR 2K 1% .125W F | 24546 | C4-1/8-T0-2001-F |
| A7R156 | 0684-2701 | | RESISTOR 27 10% .25W FC TC=-400/+500 | 01121 | CB2701 |
| A7R157 | 0684-1811 | | RESISTOR 180 10% .25W CC | 01121 | CB1811 |
| A7R158 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A7R159 | 0757-0442 | | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-T0-1002-F |
| A7R160 | 0757-0428 | | RESISTOR 1.62K 1% .125W F TC=0+/-100 | 24546 | C4-1/8-T0-1621-F |
| A7R161 | 0684-1511 | 3 | RESISTOR 150 10% .25W FC TC=-400/+600 | 01121 | CB1511 |
| A7R162 | 0757-0416 | | RESISTOR 511 1% .125W F | 24546 | C4-1/8-T0-511R-F |
| A7R163 | 0684-1511 | | RESISTOR 150 10% .25W FC TC=-400/+600 | 01121 | CB1511 |
| A7R164 | 0684-3311 | | RESISTOR 330 10% .25W CC | 01121 | CB3311 |
| A7R165 | 0757-0465 | | RESISTOR 100K 1% .125W F | 24546 | C4-1/8-T0-1003-F |
| A7R166 | 0757-0433 | | RESISTOR 3.32K 1% .125W F | 24546 | C4-1/8-T0-3321-F |
| A7R167 | 0757-0465 | | RESISTOR 100K 1% .125W F | 24546 | C4-1/8-T0-1003-F |
| A7R168 | 0757-0433 | | RESISTOR 3.32K 1% .125W F | 24546 | C4-1/8-T0-3321-F |
| A7R169 | 2100-0567 | | RESISTOR VAR TRMR 2K 10% C | 73136 | 72PR2K |
| A7S1 | 3101-1906 | 1 | SWITCH-PB 45TA DPDT .394 IN-CTRS .45A | 28480 | 3101-1906 |
| A7S2 | 3101-1909 | 1 | SWITCH-PB 65TA DPDT P.P. .394 IN-CTRS | 28480 | 3101-1909 |
| A7S3 | 3101-1907 | 2 | SWITCH-PB 45TA INTLH .394 IN-CTRS .45A | 28480 | 3101-1907 |
| A7U1 | 1826-0045 | 3 | IC AMPL | 28480 | 1826-0045 |
| A7U2 | 5081-3019 | 2 | INTEGRATED CIRCUIT, SEALED PACKAGE | 28480 | 5081-3019 |
| A7U3 | 1826-0045 | | IC AMPL | 28480 | 1826-0045 |
| A7U4 | 1821-0001 | 2 | IC CA3046 XSTR ARRAY | 02735 | CA3046 |
| A7W1 | 01740-61605 | 1 | CABLE ASSEMBLY, GATE DRIVER | 28480 | 01740-61605 |
| A7XA9 | 1251-0588 | 1 | CONNECTOR 12-PIN F POST TYPE | 27254 | 09-52-3121 |
| A7XU1 | 1200-0763 | 4 | SOCKET-IC 8-CONT DIP SLDR TERM | 00779 | 583529-1 |
| A7XU2 | 1200-0438 | 1 | SOCKET-IC 16-CONT DIP SLDR TERMS | 0090A | A85G |
| A7XU3 | 1200-0763 | 1 | SOCKET-IC 8-CONT DIP SLDR TERMS | 00779 | 583527-1 |
| A7XU4 | 1200-0438 | 1 | SOCKET-IC 16-CONT DIP SLDR TERMS | 0090A | 583527-1 |
| ABC | 01740-66523 | 1 | BOARD ASSY, MAIN SWEEP | 28480 | 01740-66523 |
| ABC1 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| ABC2 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| ABC3 | 0180-0197 | 9 | CAPACITOR-FXD 2.2UF +/-10% 20VDC TA | 56289 | 150D225X9020A2 |
| ABC4 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| ABC5 | 0140-0218 | 2 | CAPACITOR-FXD 160PF +/-2% 300WVDC MICA | 72136 | DM15F161G0300WV1CR |
| ABC6 | 0160-2204 | 1 | CAPACITOR-FXD 100 PF 5% 300WVDC MICA | 28480 | 0160-2204 |
| ABC7 | | | NOT ASSIGNED | | |
| ABC8 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| ABC9 | 0160-3226 | 2 | CAPACITOR-FXD .01UF +/-10% 400WVDC MET | 28480 | 0160-3226 |
| ABC10 | 0160-3726 | 2 | CAPACITOR-FXD 1UF +/-10% 40WVDC MET POLY C | 28480 | 0160-3726 |
| ABC11 | 0180-0481 | 1 | CAPACITOR-FXD 100UF +/-10% 20VDC TA-WET | 28480 | 0180-0481 |
| ABC12 | 0140-0190 | 1 | CAPACITOR-FXD 39PF +/-5% 500WVDC MICA | 72136 | DM15E390J0300WV1CR |
| ABC13 | 0140-0207 | 1 | CAPACITOR-FXD 330 PF +/-5% 500WVDC MICA | 72136 | DM15F331J0500WV1CR |
| ABC14 | 0160-0155 | 1 | CAPACITOR-FXD 3300 PF +/-10% 200WVDC POLYE | 56289 | 292P33222 |
| ABC15 | 0160-0194 | 1 | CAPACITOR-FXD .015UF +/-10% 200WVDC POLYE | 56289 | 292P15392 |
| ABC16 | 0180-2079 | 1 | CAPACITOR-FXD .39UF +/-10% 35VDC TA | 56289 | 150D394X9035A2 |
| ABC17 | 0180-1745 | 1 | CAPACITOR-FXD 1.5UF +/-10% 20VDC TA | 56289 | 150D155X9020A2 |
| ABC18 | 0180-2111 | | CAPACITOR-FXD 33UF +/-10% 35 VDC TA SOLID | 56289 | 150D336X9035A |
| ABC19 | 0180-0197 | | CAPACITOR-FXD 2.2UF +/-10% 20VDC TA | 56289 | 150D225X9020A2 |
| ABC20 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| ABC21 | 0180-0197 | | CAPACITOR-FXD 2.2UF +/-10% 20VDC TA | 56289 | 150D225X9020A2 |
| ABC22 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| ABC23 | | | NOT ASSIGNED | | |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|--|----------|-------------------|
| A8CR1 | 1901-0040 | | DIODE SWITCHING 30V 50MA 2NS D0 35 | 28480 | 1901 0040 |
| A8CR2 | 1901-0040 | | DIODE SWITCHING 30V 50MA 2NS D0 35 | 28480 | 1901 0040 |
| A8CR3 | 1901-0040 | | DIODE SWITCHING 30V 50MA 2NS D0 35 | 28480 | 1901 0040 |
| A8CR4 | 1901-0040 | | DIODE SWITCHING 30V 50MA 2NS D0 35 | 28480 | 1901 0040 |
| A8L1 | 9140-0105 | | COIL FXD MOLDED RF CHOKE B.2UH 10% | 24226 | 15 821 |
| A8L2 | 9170-0029 | | CORE SHIELDING BEAD | 02114 | 56 590 65A2/4A |
| A8O1 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853 0036 |
| A8O2 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853 0036 |
| A8O3 | 1853-0244 | 2 | TRANSISTOR PNP SI PD=310MW FT=500MHZ | 28480 | 1853 0244 |
| A8O4 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A8O5 | 1855-0081 | | TRANSISTOR J FET 2N5245 N-CHAN D MODE SI | 01295 | 2N5245 |
| A8O6 | 1854-0019 | 4 | TRANSISTOR NPN SI T0 18 PD=360MW | 28480 | 1854 0019 |
| A8O7 | 1853-0354 | | TRANSISTOR NPN SI T0 92 PD=350MW | 28480 | 1853 0354 |
| A8O8 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A8O9 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854 0071 |
| A8O10 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A8O11 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A8O12 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A8O13 | 1854-0691 | | TRANSISTOR NPN SI T0 92 PD=350MW | 28480 | 1854 0691 |
| A8R1 | 0684-3901 | 1 | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A8R2 | 0698-3151 | | RESISTOR 2.87K 1% .125W F TC=0+ -100 | 16299 | C4 1/8 T0 2871 F |
| A8R3 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4 1/8 T0 201 F |
| A8R4 | 0684-3901 | | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A8R5 | 0757-0411 | | RESISTOR 332 1% .125W F TC=0+ -100 | 24546 | C4 1/8 T0 332R F |
| A8R6 | 0684-8201 | 2 | RESISTOR 82 10% .25W FC,TC=-400/+500 | 01121 | CB8201 |
| A8R7 | 0757-0428 | 1 | RESISTOR 1.62K 1% .125W F | 24546 | C4 1/8 T0 1621 F |
| A8R8 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A8R9 | 0684-2251 | 1 | RESISTOR 2.2M 10% .25W FC TC=-900/+1100 | 01121 | CB2251 |
| A8R10 | | | NOT ASSIGNED | | |
| A8R11 | | | NOT ASSIGNED | | |
| A8R12 | 2100-3056 | 5 | RESISTOR TRMR 5K 10% C SIDE-ADJ 17-TURN | 32997 | 3006P 1-502 |
| A8R13 | 2100-3056 | | RESISTOR TRMR 5K 10% C SIDE-ADJ 17-TURN | 32997 | 3006P 1-502 |
| A8R14 | 2100-3056 | | RESISTOR TRMR 5K 10% C SIDE-ADJ 17-TURN | 32997 | 3006P 1-502 |
| A8R15 | 0757-0434 | | RESISTOR 3.65K 1% .125W F TC=0+ -100 | 24546 | C4 1/8 T0 3651 F |
| A8R16 | 0757-0440 | 1 | RESISTOR 7.5K 1% .125W F | 24546 | C4 1/8 T0 7501 F |
| A8R17 | 0698-6450 | 2 | RESISTOR 2.5K 1% .125W F TC=0+ -50 | 24546 | NC55 |
| A8R18 | 0698-5449 | 2 | RESISTOR 5K .1% .125W F TC=0+ -50 | 19701 | MF4C1/8 T2 5001-B |
| A8R19 | 0698-4157 | 2 | RESISTOR 10K .1% .125W F TC=0+ -50 | 24546 | NC55 |
| A8R20 | 0698-6942 | 2 | RESISTOR 25K .1% .125W F TC=0+ -50 | 24546 | NC55 |
| A8R21 | 0698-5450 | 2 | RESISTOR 50K .1% .125W F TC=0+ -50 | 19701 | MF4C1/8 T2 5002 B |
| A8R22 | 0698-4158 | 2 | RESISTOR 100K .1% .125W F TC=0+ -50 | 24546 | NC55 |
| A8R23 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A8R24 | 0757-0284 | | RESISTOR 150 1% .125W F | 24546 | C4 1/8 T0 151 F |
| A8R25 | | | NOT ASSIGNED | | |
| A8R26 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A8R27 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A8R28 | 0684-3321 | | RESISTOR 3.3K 10% .25W CC | 01121 | CB3321 |
| A8R29 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1021 |
| A8R30 | 0757-0284 | | RESISTOR 150 1% .125W F | 24546 | C4 1/8 T0 151 F |
| A8R31 | 0757-0416 | | RESISTOR 511 1% .125W F | 24546 | C4 1/8 T0 511R F |
| A8R32 | 0757-1093 | 2 | RESISTOR 3K 1% .125W F TC=0+ -100 | 24546 | C4 1/8 T0 3001 F |
| A8R33 | 0698-3150 | | RESISTOR 2.37K 1% .125W F TC=0+ -100 | 16299 | C4 1/8 T0 2371 F |
| A8R34 | 0757-0283 | | RESISTOR 2K 1% .125W F | 24546 | C4 1/8 T0 2001 F |
| A8R35 | 0684-3311 | | RESISTOR 330 10% .25W CC | 01121 | CB3311 |
| A8R36 | 0684-3901 | | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A8R37 | 0684-6821 | | RESISTOR 6.8K 10% .25W CC | 01121 | CB6821 |
| A8R38 | 0757-0439 | | RESISTOR 6.81K 1% .125W F TC=0+ -100 | 24546 | C4 1/8 T0 6811 F |
| A8R39 | 0757-0420 | | RESISTOR 750 1% .125W F | 24546 | C4 1/8 T0 751 F |
| A8R40 | 0757-0454 | 1 | RESISTOR 33.2K 1% .125W F TC=0+ -100 | 24546 | C4 1/8 T0 3322 F |
| A8R41 | 0684-0271 | | RESISTOR 2.7 1% .25W CC | 01121 | CB27G1 |
| A8R42 | 0684-0271 | | RESISTOR 2.7 10% .25W CC | 01121 | CB27G1 |
| A8R43 | 2100-3056 | 2 | RESISTOR VAR TRMR 5K 10% C SIDE ADJ | 32997 | 3006P 1-502 |
| A8S1MP1 | 01740-61901 | 1 | SWITCH ASSY, ROTARY M | 28480 | 01740-61901 |
| A8S1MP2 | 01740-61902 | 1 | SWITCH ASSY, ROTARY F | 28480 | 01740-61902 |
| A8S1MP3 | 01840-22502 | 2 | ROLLER, DETENT | 28480 | 01840-22502 |
| A8S1MP4 | 1460-1148 | 2 | SPRING, TORSION | 00000 | 0BD |
| A8U1 | 1826-0086 | 1 | IC AMPL | 04713 | MC1776CG |
| A8XA7 | 1251-0589 | 2 | CONNECTOR 10-PIN F POST TYPE | 27264 | 09-52-3101 |
| A8XU1 | 1200-0475 | 1 | SOCKET | 22526 | 75060-005 |
| A8Y | 01740-66522 | 1 | BOARD ASSY, DELAYED SWEEP | 28480 | 01740-66522 |
| A9C1 | 0160-2250 | 1 | CAPACITOR FXD 5.1PF +- .25PF 500WVDC CER | 28480 | 0160-2250 |
| A9C2 | 0160-3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A9C3 | 0160-3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A9C4 | 0160-2204 | | CAPACITOR FXD 100PF +-5% 300WVDC | 28480 | 0160-2204 |
| A9C5 | | | NOT ASSIGNED | | |
| A9C6 | 0160-3451 | | CAPACITOR FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|--|--|-------------------|---------------------|
| A9C7 | 0140-0218 | 1 | CAPACITOR-FXD 180PF +-2% 300WVDC MICA | 72136 | DM15F 161G0300WV1CR |
| A9C8 | 0160-3226 | | CAPACITOR-FXD .01UF +-10% 400WVDC MET | 28480 | 0160-3226 |
| A9C9 | 0160-3726 | | CAPACITOR-FXD 1UF +-10% 40WVDC MET POLYC | 28480 | 0160-3726 |
| A9C10 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A9C11 | 0180-2148 | | CAPACITOR-FXD .47UF +-20% 50VDC TA | 56289 | 150D474X0050A2 |
| A9C12 | | | NOT ASSIGNED | | |
| A9C13 | | | NOT ASSIGNED | | |
| A9C14 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A9C15 | 0180-0197 | | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 150D225X9020A2 |
| A9CR1 | 1901-0040 | | DIODE-SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 |
| A9CR2 | 5081-7535 | | DIODE 1901-0040 PF .30 | 28480 | 5081-7535 |
| A9L1 | 9140-0105 | COIL-FXD MOLDED RF CHOKE 8.2UH 10% | 24226 | 15/8/21 | |
| A9P1 | 1251-3072 | CONNECTOR 12-PIN M POST TYPE | 27264 | 09-56-1121 | |
| A9Q1 | 1853-0036 | TRANSISTOR PNP SI PD-310MW FT-250MHZ | 28480 | 1853-0036 | |
| A9Q2 | 1853-0036 | TRANSISTOR PNP SI PD-310MW FT-250MHZ | 28480 | 1853-0036 | |
| A9Q3 | 1853-0036 | TRANSISTOR PNP SI PD-310MW FT-250MHZ | 28480 | 1853-0036 | |
| A9Q4 | 1853-0244 | TRANSISTOR PNP SI PD-310MW FT-500MHZ | 28480 | 1853-0244 | |
| A9Q5 | 1854-0691 | TRANSISTOR NPN SI TQ-92 PD-350MW | 28480 | 1854-0691 | |
| A9Q6 | 1855-0081 | TRANSISTOR J-FET 2N5245 N-CHAN D-MODE SI | 01295 | 2N5245 | |
| A9Q7 | 1854-0019 | TRANSISTOR NPN SI TQ 18 PD-360MW | 28480 | 1854-0019 | |
| A9R1 | 0684-1021 | RESISTOR-1K 10% .25W CC | 01121 | CB1021 | |
| A9R2 | 0757-0284 | RESISTOR 150 1% .125W F | 24546 | C4-1/8-TQ-151-F | |
| A9R3 | 0757-0834 | RESISTOR 5.62K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-TQ-5621-F | |
| A9R4 | 0684-1011 | RESISTOR 100 10% .25W CC | 01121 | CB1011 | |
| A9R5 | 0757-0193 | RESISTOR 3.32K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-TQ-3321-F | |
| A9R6 | 0757-0442 | RESISTOR 10K 1% .125W F | 24546 | C4-1/8-TQ-1002-F | |
| A9R7 | 0757-0280 | RESISTOR 1K 1% .125W F | 24546 | C4-1/8-TQ-1002-F | |
| A9R8 | | NOT ASSIGNED | | | |
| A9R9 | | NOT ASSIGNED | | | |
| A9R10 | 2100-3056 | RESISTOR-TRMR 5K 10% C SIDE-ADJ 17-TURN | 32997 | 3006P-1-502 | |
| A9R11 | 2100-3056 | RESISTOR TRMR 5K 10% C SIDE-ADJ 17-TURN | 32997 | 3006P-1-502 | |
| A9R12 | 0757-0433 | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-TQ-3321-F | |
| A9R13 | 0757-0440 | RESISTOR 7.5K 1% .125W F | 24546 | C4-1/8-TQ-7501-F | |
| A9R14 | 0698-6450 | RESISTOR 2.5K .1% .125W F TC=0+-50 | 24546 | NC55 | |
| A9R15 | 0698-5449 | RESISTOR 5K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-5001-B | |
| A9R16 | 0698-4157 | RESISTOR 10K .1% .125W F TC=0+-50 | 24546 | NC55 | |
| A9R17 | 0698-5942 | RESISTOR 25K .1% .125W F TC=0+-50 | 24546 | NC55 | |
| A9R18 | 0698-5450 | RESISTOR 50K .1% .125W F TC=0+-50 | 19701 | MF4C1/8-T2-5002-B | |
| A9R19 | 0698-4158 | RESISTOR 100K .1% .125W F TC=0+-50 | 24546 | NC55 | |
| A9R20 | 0757-0284 | RESISTOR 150 1% .125W F | 24546 | C4-1/8-TQ-151-F | |
| A9R21 | 0683-0475 | RESISTOR 4.7 5% .25W FC TC=-400/+500 | 01121 | CB47G5 | |
| A9R22 | 0684-1011 | RESISTOR 100 10% .25W CC | 01121 | CB1011 | |
| A9R23 | 0684-1031 | RESISTOR 10K 10% .25W CC | 01121 | CB1031 | |
| A9R24 | 0757-0400 | RESISTOR 90.9 1% .125W F TC=0+-100 | 24546 | C4-1/8-TQ-90R9-F | |
| A9R25 | 0684-1001 | RESISTOR 10 10% .25W CC | 01121 | CB1001 | |
| A9R26 | | NOT ASSIGNED | | | |
| A9R27 | 0683-0275 | RESISTOR 2.7 5% .25W FC TC=-400/+500 | 01121 | CB27G5 | |
| A9R28 | 2100-3056 | RESISTOR-VAR TRMR 5K 10% C SIDE ADJ | 32997 | 3006P-1-502 | |
| A9S1MP1 | 01740-61903 | SWITCH ASSY, ROTARY M | 28480 | 01740-61903 | |
| A9S1MP2 | 01740-61904 | SWITCH ASSY, ROTARY F | 28480 | 01740-61904 | |
| A9S1MP3 | 01840-22502 | ROLLER, DETENT | 28480 | 01840-22502 | |
| A9S1MP4 | 1460-1148 | SPRING: TORSION | 00000 | 0BD | |
| A9U1 | 1826-0045 | IC AMPL | 28480 | 1826-0045 | |
| A9XA10 | 1251-3352 | CONNECTOR-PC EDGE 12-CONT/ROW 1-ROW | 26742 | 91-6912-0702-00 | |
| A9XU1 | 1200-0475 | SOCKET | 22526 | 75060-005 | |
| A1U | 01740-66508 | BOARD ASSY, DELAYED TRIGGER | 28480 | 01740-66508 | |
| A10C1 | 0150-0070 | CAPACITOR-FXD .02UF +-20% 500WVDC CER | 28480 | 0150-0070 | |
| A10C2 | 0160-2204 | CAPACITOR-FXD 100PF +-5% 300WVDC MICA | 28480 | 0160-2204 | |
| A10C3 | 0160-3451 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 | |
| A10C4 | 0160-3451 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 | |
| A10C5 | | NOT ASSIGNED | | | |
| A10C6 | 0160-2204 | CAPACITOR-FXD 100PF +-5% 300WVDC MICA | 28480 | 0160-2204 | |
| A10C7 | 0160-3451 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 | |
| A10C8 | 0180-0197 | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 150D225X9020A2 | |
| A10C9 | 0160-3451 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 | |
| A10C10 | 0180-0197 | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 150D225X9020A2 | |
| A10C11 | 0160-3451 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 | |
| A10C12 | 0180-0197 | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 150D225X9020A2 | |
| A10C13 | 0150-0048 | CAPACITOR-FXD .22PF +-5% 500WVDC TI DIOX | 95121 | TYPE OC | |
| A10C14 | 0160-3451 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 | |
| A10CR1 | 1901-0040 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 | |
| A10CR2 | 1901-0040 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 | |
| A10CR3 | 1901-0040 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 | |
| A10CR4 | 1901-0040 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 | |
| A10CR5 | | NOT ASSIGNED | | | |
| A10CR6 | 1901-0040 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 | |
| A10CR7 | 1901-0040 | DIODE SWITCHING 30V 50MA 2NS DO-35 | 28480 | 1901-0040 | |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|--|----------|---------------------|
| A10CR8 | 1910-0016 | | DIODE-GE 60V 80NA 1US D0-7 | 28480 | 1920-0016 |
| A10L1 | 9140-0105 | | COIL-FXD MOLDED RF CHOKE 8.2UH 10% | 24226 | 15/821 |
| A10P1 | | | NSR | | |
| A10Q1 | 1855-0202 | 1 | TRANSISTOR-JFET DUAL N-CHAN D-MODE SI | 17856 | E421 |
| A10Q2 | | | NOT ASSIGNED | | |
| A10Q3 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A10Q4 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A10Q5 | 1854-0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A10Q6 | 1854-0092 | | TRANSISTOR NPN SI PD=200MW FT=600MHZ | 28480 | 1854-0092 |
| A10Q7 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A10Q8 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A10Q9 | 1854-0071 | | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A10Q10 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A10R1 | 0757-0485 | | RESISTOR 100K 1% .125W F | 24546 | C4-1/8-T0-1003-F |
| A10R2 | 0757-0488 | | RESISTOR 909K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A10R3 | 0684-3901 | | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A10R4 | 0684-3901 | | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A10R5 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4-1/8-T0-201-F |
| A10R6 | 0684-6811 | | RESISTOR 680 10% .25W FC TC=-400/+600 | 01121 | CB6811 |
| A10R7 | 0757-0407 | | RESISTOR 200 1% .125W F | 24546 | C4-1/8-T0-201-F |
| A10R8 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A10R9 | 2100-3351 | | RESISTOR-VAR TRMR 500 OHM 10% C SIDE ADJ | 73138 | 72XR500 |
| A10R10 | 2100-3434 | | RESISTOR-VAR CONTROL CC 50K 10% LIN | 01121 | 70M4N048P503U |
| A10R11 | 0757-0283 | 3 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A10R12 | | | NOT ASSIGNED | | |
| A10R13 | 0757-0408 | | RESISTOR 243 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-243R-F |
| A10R14 | 0684-4721 | | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A10R15 | 0757-0427 | | RESISTOR 1.5K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1501-F |
| A10R16 | 0698-3433 | | RESISTOR 28.7 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-28R7-F |
| A10R17 | 0698-3433 | | RESISTOR 28.7 1% .125W F TC=0+-100 | 03888 | PME55-1/8-T0-28R7-F |
| A10R18 | 0698-3152 | | RESISTOR 3.48K 1% .125W F | 16299 | C4-1/8-T0-3481-F |
| A10R19 | 0757-0438 | | RESISTOR 5.11K 1% .125W F | 24546 | C4-1/8-T0-5111-F |
| A10R20 | 0684-1531 | 1 | RESISTOR 15K 10% .25W FC TC=-400/+800 | 01121 | CB1531 |
| A10R21 | 5081-7482 | | RESISTOR .0757-0420 PF .40 | 28480 | 5081-7482 |
| A10R22 | 0757-0443 | | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A10R23 | 0757-0420 | | RESISTOR 750 1% .125W F | 24546 | C4-1/8-T0-751-F |
| A10R24 | 0757-0438 | | RESISTOR 5.11K 1% .125W F | 24546 | C4-1/8-T0-5111-F |
| A10R25 | 0684-6811 | | RESISTOR 680 10% .25W FC TC=-400/+600 | 01121 | CB6811 |
| A10R26 | 0684-6811 | | RESISTOR 680 10% .25W FC TC=-400/+600 | 01121 | CB6811 |
| A10R27 | 0757-0200 | | RESISTOR 5.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-5621-F |
| A10R28 | 0757-0420 | | RESISTOR 750 1% .125W F | 24546 | C4-1/8-T0-751-F |
| A10R29 | 0757-0418 | | RESISTOR 619 1% .125W F | 24546 | C4-1/8-T0-619R-F |
| A10R30 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A10R31 | 0757-0443 | | RESISTOR 11K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1102-F |
| A10R32 | 0757-0420 | | RESISTOR 750 1% .125W F | 24546 | C4-1/8-T0-751-F |
| A10R33 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A10R34 | 0684-1001 | | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A10R35 | 0684-3901 | | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A10R36 | 0698-0085 | | RESISTOR 2.61K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2611-F |
| A10R37 | 0757-0488 | | RESISTOR 909K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A10R38 | 0757-0465 | | RESISTOR 100K 1% .125W F | 24546 | C4-1/8-T0-1003-F |
| A10R39 | 0684-1011 | 3 | RESISTOR 100 10% .25W FC TC=-400/+500 | 01121 | CB1011 |
| A10R40 | 0684-1011 | | RESISTOR 100 10% .25W FC TC=-400/+500 | 01121 | CB1011 |
| A10R41 | 0757-0428 | | RESISTOR 1.62K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1621-F |
| A10S1 | 3101-1904 | 1 | SWITCH-PB 6STA .394 IN-CTRS .45A 115VAC | 28480 | 3101-1904 |
| A10U1 | 5081-3019 | | INTEGRATED CIRCUIT, SEALED PACKAGE | 28480 | 5081-3019 |
| A10VR1 | 1902-3082 | 1 | DIODE-ZENER 4.64V PD=4W | 04713 | SZ10939-86 |
| A11 | 01740-66521 | 1 | BOARD ASSY, HORIZONTAL OUTPUT | 28480 | 01740-66521 |
| A11C1 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A11C2 | 0160-3451 | | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A11C3 | 0160-3665 | 7 | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C4 | 0160-3502 | 1 | CAPACITOR-FXD .3PF +-5% 500WVDC TI DIOX | 95121 | TYPE QC |
| A11C5 | 0160-3665 | | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C6 | 0140-0192 | | CAPACITOR-FXD 68PF +-5% 300WVDC MICA | 72136 | DM15E680J0300WV1CR |
| A11C7 | 0160-3665 | | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C8 | 0160-3665 | | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C9 | 0140-0192 | | CAPACITOR-FXD 68PF +-5% 300WVDC MICA | 72136 | DM15E680J0300WV1CR |
| A11C10 | 0160-3665 | | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C11 | 0160-3665 | | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C12 | 0160-3665 | | CAPACITOR-FXD .01UF +80-20% 500WVDC CER | 28480 | 0160-3665 |
| A11C13 | 0160-3502 | | CAPACITOR-FXD .30PF +-5% 500WVDC | 95121 | TYPE QC |
| A11C14 | 0140-0192 | | CAPACITOR-FXD 68PF +-5% 300WVDC | 72136 | DM15E680J0300WV1CR |
| A11L1 | 9170-0029 | | CORE-SHIELDING BEAD | 02114 | 56-590-65A2/4A |
| A11L2 | 9170-0029 | | CORE-SHIELDING BEAD | 02114 | 56-590-65A2/4A |
| A11MP1 | 1205-0095 | 6 | HEAT-DISSIPATOR SGL T0.5/T0.39 PKG | 28480 | 1205-0095 |
| A11Q1 | 1854-0019 | | TRANSISTOR NPN SI T0-18 PD=360MW | 28480 | 1854-0019 |
| A11Q2 | 1853-0354 | | TRANSISTOR PNP SI T0-92 PD=350MW | 28480 | 1853-0354 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|-----------------------|
| A1103 | 1854-0419 | 1 | TRANSISTOR NPN SI T0-39 PD=1W FT=200MHZ | 28480 | 1854-0419 |
| A1104 | 1853-0038 | 1 | TRANSISTOR PNP SI T0-39 PD=1W FT=100MHZ | 28480 | 1853-0038 |
| A1105 | 1853-0354 | 1 | TRANSISTOR PNP SI T0-92 PD=.350MW | 28480 | 1853-0354 |
| A1106 | 1854-0019 | 1 | TRANSISTOR NPN SI T0-18 PD=360MW | 28480 | 1854-0019 |
| A1107 | 1853-0232 | 2 | TRANSISTOR PNP SI T0-39 PD=1W FT=200MHZ | 28480 | 1853-0232 |
| A1108 | 1854-0523 | 1 | TRANSISTOR NPN SI T0-39 PD=1W FT=150MHZ | 28480 | 1854-0523 |
| A11R1 | 0684-1001 | 1 | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A11R2 | 0684-1011 | 1 | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A11R3 | 0684-1001 | 1 | RESISTOR 10 10% .25W CC | 01121 | CB1001 |
| A11R4 | 0757-0845 | 4 | RESISTOR 18.2K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-T0-1822-F |
| A11R5 | 0684-4721 | 1 | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A11R6 | 0683-0685 | 2 | RESISTOR 6.8 5% .25W FC | 01121 | CB6855 |
| A11R7 | 0684-3901 | 1 | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A11R8 | 0683-6835 | 2 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A11R9 | 0757-0407 | 2 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A11R10 | 2100-3273 | 3 | RESISTOR-VAR TRMR 2K OHM 10% C SIDE ADJ | 73138 | 72XR2K |
| A11R11 | 0757-0768 | 2 | RESISTOR 47.5K 1% .25W F | 24546 | C5-1/4-T0-4752-F |
| A11R12 | 0757-0283 | 1 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A11R13 | 0757-0411 | 1 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A11R14 | 0683-6835 | 1 | RESISTOR 68K 5% .25W FC TC=-400/+800 | 01121 | CB6835 |
| A11R15 | 2100-3273 | 1 | RESISTOR-VAR TRMR 2K OHM 10% C SIDE ADJ | 73138 | 72XR2K |
| A11R16 | 0757-0407 | 1 | RESISTOR 200 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-201-F |
| A11R17 | 0757-0768 | 1 | RESISTOR 47.5K 1% .25W F | 24546 | C5-1/4-T0-4752-F |
| A11R18 | 0757-0283 | 1 | RESISTOR 2K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-2001-F |
| A11R19 | 0757-0411 | 1 | RESISTOR 332 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-332R-F |
| A11R20 | 0683-0685 | 1 | RESISTOR 6.8 5% .25W FC | 01121 | CB6855 |
| A11R21 | 0684-3901 | 1 | RESISTOR 39 10% .25W CC | 01121 | CB3901 |
| A11R22 | 0684-4721 | 1 | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A11R23 | 0757-0845 | 1 | RESISTOR 18.2K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-T0-1822-F |
| A11R24 | 0683-1825 | 1 | RESISTOR 1.8K 5% .25W FC TC=-400/+700 | 01121 | CB1825 |
| A11R25 | 0757-0845 | 1 | RESISTOR 18.2K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-T0-1822-F |
| A11R26 | 0757-0845 | 1 | RESISTOR 18.2K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-T0-1822-F |
| A11X47 | 1251-0649 | 2 | CONNECTOR 15-PIN F POST TYPE | 27264 | 09-52-3151 |
| A12 | 01740-66503 | 1 | BOARD ASSY, GATE AMPLIFIER | 28480 | 01740-66503 |
| A12C1 | 0180-0230 | 1 | CAPACITOR FXD 1UF +-20% 50VDC TA SOLID | 56289 | 150D105X0050A2 |
| A12C2 | 0160-0165 | 3 | CAPACITOR-FXD .056UF +-10% 200VDC POLYE | 56289 | 292P56392 |
| A12C3 | 0160-3665 | 1 | CAPACITOR-FXD .01UF +-20% 500VDC CER | 28480 | 0160-3665 |
| A12C4 | 0160-3665 | 1 | CAPACITOR-FXD .01UF +-20% 500VDC CER | 28480 | 0160-3665 |
| A12C5 | 0160-0165 | 1 | CAPACITOR-FXD .056UF +-10% 200VDC POLYE | 56289 | 292P56392 |
| A12C3 | 0160-3452 | 1 | CAPACITOR-FXD .02UF +-20% 100VDC CER | 28480 | 0160-3452 |
| A12C7 | 0140-0196 | 1 | CAPACITOR-FXD 150PF +-5% 300VDC MICA NOT ASSIGNED | 72136 | DM15F151J0300WV1CR |
| A12C8 | | | | | |
| A12C9 | 0160-3452 | 1 | CAPACITOR-FXD .02UF +-20% 100VDC CER | 28480 | 0160-3452 |
| A12C10 | 0160-3452 | 1 | CAPACITOR-FXD .02UF +-20% 100VDC CER | 28480 | 0160-3452 |
| A12C11 | 0121-0478 | 1 | CAPACITOR-VAR TE 0.25-1.5 PF | 28480 | 0121-0478 |
| A12CR1 | 1901-0040 | 1 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901-0040 |
| A12CR2 | 1901-0040 | 1 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901-0040 |
| A12CR3 | 1901-0040 | 1 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901-0040 |
| A12MP1 | 1205-0095 | 1 | HEAT DISSIPATOR SGL T0-5/T0-39 PKG | 28480 | 1205-0095 |
| A12MP2 | 01801-01206 | 2 | BRACKET, ANGLE | 28480 | 01801-01206 |
| A12P1 | 1251-3319 | 1 | CONNECTOR 10-PIN M POST TYPE | 27264 | 09-64-1101(A2402-10A) |
| A12O1 | 1853-0015 | 1 | TRANSISTOR PNP SI PD=200MW FT=500MHZ | 28480 | 1853-0015 |
| A12O2 | 1853-0232 | 1 | TRANSISTOR PNP SI T0-39 PD=1W FT=200MHZ | 28480 | 1853-0232 |
| A12O3 | 1854-0215 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A12O4 | 1854-0271 | 1 | TRANSISTOR NPN SI T0-39 PD=1W FT=150MHZ | 28480 | 1854-0271 |
| A12R1 | 0684-1231 | 2 | RESISTOR 12K 10% .25W FC TC=-400/+800 | 01121 | CB1231 |
| A12R2 | 0757-0422 | 1 | RESISTOR 909 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-909R-F |
| A12R3 | 2100-3423 | 1 | RESISTOR-VAR CONTROL CC 10K 20% LIN | 28480 | 2100-3423 |
| A12R4 | 0698-3152 | 1 | RESISTOR 3.48K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-3481-F |
| A12R5 | 0698-3159 | 1 | RESISTOR 26.1K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2612-F |
| A12R6 | 0698-3158 | 1 | RESISTOR 23.7K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-2372-F |
| A12R7 | 0757-0124 | 1 | RESISTOR 39.2K 1% .125W F TC=0+-100 | 24546 | C5-1/4-T0-3922-F |
| A12R8 | 0757-0440 | 1 | RESISTOR 75K 1% .125W F | 24546 | C4-1/8-T0-7501-F |
| A12R9 | 0757-0737 | 1 | RESISTOR 1.62K 1% .25W F TC=0+-100 | 24546 | C5-1/4-T0-1621-F |
| A12R10 | 0698-3646 | 1 | RESISTOR 12K 5% 2W MO TC=0+-200 | 16299 | FP42-T00-1202-J |
| A12R11 | 0757-0435 | 1 | RESISTOR 3.92K 1% .125W F | 24546 | C4-1/8-T0-3921-F |
| A12R12 | 2100-3273 | 1 | RESISTOR-VAR TRMR 2K OHM 10% C SIDE ADJ | 73138 | 72XR2K |
| A12R13 | 0757-0843 | 1 | RESISTOR 15K 1% .5W F TC=0+-100 | 19701 | MF7C1/2-T0-1502-F |
| A12R14 | 0687-1211 | 1 | RESISTOR 120 10% .5W CC TC=0+529 | 01121 | EB1211 |
| A12R15 | 0684-1021 | 1 | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A12R16 | 2100-3353 | 1 | RESISTOR-VAR TRMR 20K OHM 10% C SIDE ADJ | 73138 | 72XR20K |
| A12R17 | 0684-1021 | 1 | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A12R18 | 0684-4731 | 1 | RESISTOR 47K 10% .25W CC | 01121 | CB4731 |
| A12R19 | 0684-3931 | 2 | RESISTOR 39K 10% .25W FC TC=-400/+800 | 01121 | CB3931 |
| A12R20 | 0684-3331 | 1 | RESISTOR 33K 10% .25W CC | 01121 | CB3331 |
| A12R21 | 0684-2211 | 1 | RESISTOR 22K 10% .25W FC TC=-400/+600 | 01121 | CB2211 |
| A12R22 | 2100-3424 | 1 | RESISTOR-VAR TRMR 20K OHM 10% C SIDE ADJ | 73138 | 72XR20K |
| A12S1 | 3101-1767 | 1 | SWITCH-PB DPDT MOM 1A 300VAC | 28480 | 3101-1767 |
| A12U1 | 1821-0001 | 1 | IC CA3046 XSTR ARRAY | 02735 | CA3046 |
| A12VR1 | 1902-0025 | 2 | DIODE ZNR 10V 5% D0.7 PD=.4W TC=+.06% | 04713 | SZ 10939 182 |
| A12VR2 | 1902-3345 | 1 | DIODE ZNR 5V 1% D0.3 PD=.4W TC=+.081% | 04713 | SZ 10939 386 |

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|--------------------|
| A12XA16 | 1251-0649 | | CONNECTOR 15-PIN F POST TYPE | 27264 | 09-52-3151 |
| A12XU1 | 1200-0441 | | SOCKET-IC 14-CONT DIP-SLDR-TERMS | 00779 | 5835271 |
| A13 | 01740-66516 | 1 | BOARD ASSY, VERTICAL CONTROL SWITCHING | 28480 | 01740-66516 |
| A13R1 | 0757-0282 | 2 | RESISTOR 221 1% .125W F | 07716 | CEA-993 |
| A13R2 | 0757-0282 | | RESISTOR 221 1% .125W F | 07716 | CEA-993 |
| A13S1 | 3101-1908 | 1 | SWITCH-PB 2STA 4PDT INTLH .394 IN-CTRS | 28480 | 3101-1908 |
| A13S2 | 3101-1907 | | SWITCH-PB 4STA INTLH .394 IN-CTRS .45A | 28480 | 3101-1907 |
| A13XA3P3 | 1251-3900 | 2 | CONNECTOR 8-PIN F POST TYPE | 27264 | 09-52-3083 |
| A13XA3P4 | 1251-3900 | | CONNECTOR 8-PIN F POST TYPE | 27264 | 09-52-3083 |
| A14 | 01740-66504 | 1 | BOARD ASSY, INTERFACE | 28480 | 01740-66504 |
| A14 OPTION 101 | 01740-66514 | 1 | BOARD ASSY, INTERFACE; OPTION 101 STATE DISPLAY | 28480 | 01740-66514 |
| A14XA3 | 1251-0477 | | CONNECTOR-PC EDGE 12-CONT/ROW 1-ROW | 9D949 | 143-012-07-109 |
| A14XA7 | 1251-0213 | 2 | CONNECTOR-PC EDGE 15-CONT/ROW 1-ROW | 9D949 | 143-015-07-109 |
| A14XA16 | 1251-3852 | 2 | CONNECTOR 15-PIN F POST TYPE | 27264 | 09-52-3153 |
| A14C1 | 0140-0200 | 1 | CAPACITOR-FXD 390PF +-5% 300WVDC MICA | 72136 | DM15F391J0300WV1CR |
| A14C2 | 0140-0178 | | CAPACITOR-FXD 560PF +-2% 300WVDC MICA | 72136 | DM15F561G0300WV1CR |
| A14CR1 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR2 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR3 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR4 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR5 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR6 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR7 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14CR8 | 1901-0040 | | DIODE-SWITCHING 30V 50NA 2NS D0-35 | 28480 | 1901-0040 |
| A14Q1 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A14Q2 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A14Q3 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A14Q4 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A14Q5 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS 3611 |
| A14R1 | 0698-3155 | | RESISTOR 4.64K 1% .125W F TC=0+-100 | 16299 | C4-1/8-T0-4641-F |
| A14R2 | 0684-1031 | 1 | RESISTOR 10K 10% .25W FC TC=-400/+700 | 01121 | CB1031 |
| A14R3 | 0757-0290 | | RESISTOR 6.19K 1% .125W F TC=0+-100 | 19701 | MF4C1/8-T0-6191-F |
| A14R4 | 0757-0280 | 4 | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A14R5 | 0757-0394 | 2 | RESISTOR 51.1 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-51R1-F |
| A14R6 | 0757-0394 | | RESISTOR 51.1 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-51R1-F |
| A14R7 | 0757-0280 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A14R8 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A14R9 | 0757-0278 | 1 | RESISTOR 1.78K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1781-F |
| A14R10 | 0684-1011 | | RESISTOR 100 10% .25W FC TC=-400/+500 | 01121 | CB1011 |
| A14R11 | 0757-0280 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A14R12 | 0757-0439 | | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| A14R13 | 0757-0408 | | RESISTOR 243 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-243R-F |
| A14R14 | 0757-0434 | | RESISTOR 3.65K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3651-F |
| A14R15 | 0757-0408 | | RESISTOR 243 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-243R-F |
| A14R16 | 0757-0280 | | RESISTOR 1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1001-F |
| A14R17 | 0757-0439 | | RESISTOR 6.81K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-6811-F |
| A14R18 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3321-F |
| A14XA3 | 1251-0477 | | CONNECTOR-PC EDGE 12-CONT/ROW 1-ROW | 9D949 | 143-012-07-109 |
| A14XA7 | 1251-0213 | | CONNECTOR-PC EDGE 15-CONT/ROW 1-ROW | 9D949 | 143-015-07-109 |
| A14XA16 | 1251-3852 | | CONNECTOR 15-PIN F POST TYPE | 27264 | 09-52-3153 |
| A15 | 01740-66502 | 1 | BOARD ASSY, HV POWER SUPPLY | 28480 | 01740-66502 |
| A15C1 | 0180-1794 | 1 | CAPACITOR-FXD 22UF +-10% 35VDC TA-SOLID | 56289 | 1500225X9035R2 |
| A15C2 | 0160-2264 | 1 | CAPACITOR-FXD 20PF +-5% 500WVDC CER | 28480 | 0160-2264 |
| A15C3 | 0180-0269 | 1 | CAPACITOR-FXD 1UF +75-10% 150VDC AL | 56289 | 30D105G150B2 |
| A15C4 | 0160-0684 | 2 | CAPACITOR-FXD 1000PF +-20% 4000WVDC MET | 84411 | HEW337 |
| A15C5 | 0160-4051 | 1 | CAPACITOR-FXD .01UF +-20% 4000WVDC MET | 84411 | HEW-337 |
| A15C6 | 0160-0544 | 1 | CAPACITOR-FXD .022UF +-20% 4000WVDC MET | 84411 | HEW-337 |
| A15C7 | 0160-0584 | 1 | CAPACITOR-FXD .068UF +-20% 4000WVDC MET | 56289 | 430P683040 |
| A15C8 | 0160-0684 | 1 | CAPACITOR-FXD 1000PF +-20% 4000WVDC MET | 84411 | HEW-337 |
| A15C9 | 0160-4079 | 1 | CAPACITOR-FXD 1500PF +-20% 4000WVDC MET | 28480 | 0160-4079 |
| A15C10 | 0180-0197 | | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 1500225X9020A2 |
| A15C11 | 0180-0197 | | CAPACITOR-FXD 2.2UF +-10% 20VDC TA | 56289 | 1500225X9020A2 |
| A15C12 | 0170-0040 | | CAPACITOR-FXD .047UF +-10% 200WVDC POLYE | 56289 | 292P47392 |
| A15C13 | 0160-3443 | | CAPACITOR-FXD .1UF +80-20% 50WVDC POLYE | 28480 | 0160-3443 |
| A15C14 | 0160-0165 | | CAPACITOR-FXD .056UF +-10% 200WVDC POLYE | 56289 | 292P56392 |
| A15C15 | 0180-0230 | | CAPACITOR-FXD 1UF +-20% 50VDC TA-SOLID | 56289 | 1500105X0050A2 |
| A15C16 | 0160-0168 | | CAPACITOR-FXD .1UF +-10% 200WVDC POLYE | 56289 | 292P10482 |
| A15C17 | 0180-0230 | | CAPACITOR-FXD 1UF +-20% 50VDC TA-SOLID | 56289 | 1500105X0050A2 |
| A15CR1 | 1901-0028 | 6 | DIODE-PWR RECT 400V 750NA D0-29 | 04713 | SR1358-9 |
| A15CR2 | 1901-0028 | | DIODE-PWR RECT 400V 750NA D0-29 | 04713 | SR1358-9 |
| A15CR3 | 1901-0028 | | DIODE-PWR RECT 400V 750NA D0-29 | 04713 | SR1358-9 |
| A15CR4 | 1901-0028 | | DIODE-PWR RECT 400V 750NA D0-29 | 04713 | SR1358-9 |
| A15CR5 | 1901-0028 | | DIODE-PWR RECT 400V 750NA D0-29 | 04713 | SR1358-9 |
| A15CR6 | 1901-0028 | | DIODE-PWR RECT 400V 750NA D0-29 | 04713 | SR1358-9 |
| A15CR7 | 1901-0683 | 1 | DIODE-HV RECT 10KV 5NA 250NS | 28480 | 1901-0683 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|---|----------|--------------------|
| A15D51 | 2140-0013 | 2 | LAMP-GLOW T 2 BULB 57V | 74276 | NE23A |
| A15D52 | 2140-0013 | 2 | LAMP-GLOW T 2 BULB 57V | 74276 | NE23A |
| A15E1 | 2110-0269 | 4 | FUSEHOLDER, CLIP TYPE .25 FUSE | 91506 | 6008-32CN |
| A15F1 | 2110-0007 | 2 | FUSE 1A 250V SLO BLO 1.25X.25UL | 71400 | MDL |
| A15L1 | 9140-0171 | 1 | COIL-FXD MOLDED RF CHOKE 40UH 10% | 06560 | 10608-1 |
| A15L2 | 9140-0210 | 1 | COIL-FXD MOLDED RF CHOKE 100UH 5% | 24226 | 15/103 |
| A15L3 | 9140-0129 | 1 | COIL FXD MOLDED RF CHOKE 220UH 5% | 24226 | 15/223 |
| A15MP1 | 5040-0402 | 1 | MOUNT: TRANSFORMER | 28480 | 5040-0402 |
| A15MP2 | 5040-0430 | 1 | MOUNT: TRANSFORMER | 28480 | 5040-0430 |
| A15Q1 | 1854-0071 | 1 | TRANSISTOR NPN SI PD=300MW FT=200MHZ | 28480 | 1854-0071 |
| A15Q2 | 1853-0066 | 1 | TRANSISTOR PNP SI T0-92 PD=200MW | 28480 | 1853-0066 |
| A15R1 | 0684-1021 | 1 | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A15R2 | 2100-3253 | 1 | RESISTOR-VAR TRMR 50K OHM 10% C TOP ADJ | 73138 | 72PR50K |
| A15R3 | 0757-0485 | 1 | RESISTOR 681K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A15R4 | 0684-1031 | 1 | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A15R5 | 0684-2221 | 1 | RESISTOR 2.2K 10% .25W CC | 01121 | CB2221 |
| A15R6 | 0684-2221 | 1 | RESISTOR 2.2K 10% .25W CC | 01121 | CB2221 |
| A15R7 | 0698-0061 | 1 | RESISTOR 55.5 1% .25W F TC=0+-100 | 91637 | CMF/1/4-T1-55R5-F |
| A15R8 | 0684-2221 | 1 | RESISTOR 2.2K 10% .25W CC | 01121 | CB2221 |
| A15R9 | 0684-4721 | 1 | RESISTOR 4.7K 10% .25W CC | 01121 | CB4721 |
| A15R10 | 0683-1065 | 1 | RESISTOR 10M 5% .25W FC TC=-900/+1100 | 01121 | CB1065 |
| A15R11 | 0687-1531 | 1 | RESISTOR 15K 10% .5W CC TC=0+765 | 01121 | EB1531 |
| A15R12 | 0687-3301 | 1 | RESISTOR 33 10% .5W CC TC=0+412 | 01121 | EB3301 |
| A15R13 | 0698-8018 | 1 | RESISTOR 30M 1% .3W CP TC=0+-100 | 03888 | PVC175 3-T0-3004-F |
| A15R14 | 0684-6831 | 1 | RESISTOR 68K 10% .25W FC TC=-400/+800 | 01121 | CB6831 |
| A15R15 | 0698-5353 | 1 | RESISTOR 8.25M 5% 1W CF TC=-360/-700 | 28480 | 0698-5353 |
| A15R16 | 0698-6580 | 1 | RESISTOR 16.25M 5% 1W CF TC=-360/-700 | 28480 | 0698-6580 |
| A15R17 | 0687-1011 | 1 | RESISTOR 100 10% .5W CC TC=0+529 | 01121 | EB1011 |
| A15R18 | 0687-5611 | 1 | RESISTOR 560 10% .5W CC TC=0+529 | 01121 | EB5611 |
| A15R19 | | | NOT ASSIGNED | | |
| A15R20 | 0683-2265 | 1 | RESISTOR 22M 5% .25W FC TC=-900/+1200 | 01121 | CB2265 |
| A15R21 | 0757-0488 | 1 | RESISTOR 909K 1% .125W F TC=0+-100 | 24546 | NA4 |
| A15R22 | 0757-0469 | 1 | RESISTOR 150K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1503-F |
| A15R23 | 0684-1041 | 1 | RESISTOR 100K 10% .25W CC | 01121 | CB1041 |
| A15R24 | 0684-1041 | 1 | RESISTOR 100K 10% .25W CC | 01121 | CB1041 |
| A15R25 | 0684-3931 | 1 | RESISTOR 39K 10% .25W FC TC=-400/+800 | 01121 | CB3931 |
| A15R26 | 2100-3355 | 1 | RESISTOR-VAR TRMR 100K OHM 10% C SIDE ADJ | 73138 | 72XR100K |
| A15R27 | 2100-3207 | 1 | RESISTOR-TRMR 5K 10% C SIDE-ADJ 1-TURN | 32997 | 86X-1-502 |
| A15R28 | 0684-1011 | 1 | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A15R29 | 0757-0914 | 1 | RESISTOR 390 2% .125W F TC=0+-100 | 24546 | C4-1/8-T0-391-G |
| A15R30 | 0684-4721 | 1 | RESISTOR 4.7K 10% .25W FC TC=-400/+700 | 01121 | CB4721 |
| A15R31 | 0757-0453 | 1 | RESISTOR 30.1K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-3012-F |
| A15R32 | 0757-0471 | 1 | RESISTOR 182K 1% .125W F TC=0+-100 | 24546 | C4-1/8-T0-1823-F |
| A15T1 | 01740-61101 | 1 | TRANSFORMER ASSY, H.V. | 28480 | 01740-61101 |
| A15U1 | 1826-0167 | 1 | IC CA3094AT SWITCH | 02735 | CA3094AT |
| A15VR1 | 1902-3256 | 1 | DIODE-ZNR 23.7V 5% D0-7 PD=4W TC=+.076% | 04713 | SZ 10939-290 |
| A15XA12 | 1251-0589 | 1 | CONNECTOR 10-PIN F POST TYPE | 27264 | 09-52-3101 |
| A16 | 01740-66529 | 1 | BOARD ASSY, LV POWER SUPPLY | 28480 | 01740-66529 |
| A16C1 | 0140-0208 | 1 | CAPACITOR-FXD 680PF +-5% 300WVDC MICA | 72136 | DM15F68J0300WV1CR |
| A16C2 | 0160-0168 | 1 | CAPACITOR-FXD .1UF +-10% 200WVDC POLYE | 56289 | 292P10492 |
| A16C3 | 0180-1827 | 1 | CAPACITOR-FXD 50UF +50-10% 255VDC AL | 56289 | 39D506F250JE4 |
| A16C4 | 0180-0089 | 1 | CAPACITOR-FXD 10UF +50-10% 150VDC AL | 56289 | 30D106F150DD2 |
| A16C5 | 0180-1886 | 1 | CAPACITOR-FXD 500UF +75-10% 75VDC AL | 56289 | 39D507G075HL4 |
| A16C6 | 0180-0091 | 1 | CAPACITOR-FXD 10UF +50-10% 100VDC AL | 56289 | 30D106F100DC2 |
| A16C7 | 0180-2500 | 1 | CAPACITOR-FXD 1500UF +50-10% 16VDC AL | 28480 | 0180-2500 |
| A16C8 | 0180-0583 | 1 | CAPACITOR-FXD 6000UF +75-10% 30VDC AL | 28480 | 0180-0583 |
| A16C9 | 0160-2211 | 3 | CAPACITOR-FXD 510PF +-5% 300WVDC MICA | 28480 | 0160-2211 |
| A16C10 | 0180-0059 | 2 | CAPACITOR-FXD 10UF +75-10% 25VDC AL | 56289 | 30D106G025BB2 |
| A16C11 | 0180-0443 | 1 | CAPACITOR-FXD 5300UF +75-10% 15VDC AL | 28480 | 0180-0443 |
| A16C12 | 0160-2211 | 1 | CAPACITOR-FXD 510PF +-5% 300WVDC MICA | 28480 | 0160-2211 |
| A16C13 | 0180-0341 | 1 | CAPACITOR-FXD 25UF +75-10% 12VDC AL | 56289 | 30D256G012BB2 |
| A16C14 | 0180-0576 | 1 | CAPACITOR-FXD 3500UF +75-10% 30VDC AL | 56289 | 39D596 |
| A16C15 | 0160-2211 | 1 | CAPACITOR-FXD 510PF +-5% 300WVDC MICA | 28480 | 0160-2211 |
| A16C16 | 0180-0059 | 1 | CAPACITOR-FXD 10UF +75-10% 25VDC AL | 56289 | 30D106G025BB2 |
| A16C17 | 0180-0039 | 1 | CAPACITOR-FXD 100UF +75-10% 12VDC AL | 56289 | 30D107G012CC2 |
| A16C18 | 0160-3451 | 1 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A16C19 | 0160-3451 | 1 | CAPACITOR-FXD .01UF +80-20% 100WVDC CER | 28480 | 0160-3451 |
| A16C20 | 0190-0106 | 1 | CAPACITOR-FXD 60UF +-20% 50VDC TA SOLID | 56289 | 150D60X0006B2 |
| A16CR1 | 1906-0006 | 5 | DIODE-MULT FULL WAVE BRIDGE RECTIFIER | 28480 | 1906-0006 |
| A16CR2 | 1906-0006 | 1 | DIODE-MULT FULL WAVE BRIDGE RECTIFIER | 28480 | 1906-0006 |
| A16CR3 | 1906-0006 | 1 | DIODE-MULT FULL WAVE BRIDGE RECTIFIER | 28480 | 1906-0006 |
| A16CR4 | 1906-0048 | 1 | DIODE-FULL WAVE BRIDGE 100V 5A | 83701 | PE 10 |
| A16CR5 | 1906-0006 | 1 | DIODE-MULT FULL WAVE BRIDGE RECTIFIER | 28480 | 1906-0006 |
| A16CR6 | 1906-0006 | 1 | DIODE-MULT FULL WAVE BRIDGE RECTIFIER | 28480 | 1906-0006 |
| A16CR7 | 1901-0040 | 1 | DIODE SWITCHING 30V 50MA 2NS D0-35 | 28480 | 1901-0040 |
| A16E1 | 2110-0269 | 1 | FUSEHOLDER, CLIP TYPE .25 FUSE | 91506 | 6008-32CN |
| A16P1 | 1251-3902 | 1 | CONNECTOR 12-PIN M POST TYPE | 27264 | 09-65-1121 |
| A16P2 | 1251-3401 | 1 | CONNECTOR 15-PIN M POST TYPE | 27264 | 09-66-1151 |
| A16P3 | 1251-3901 | 1 | CONNECTOR 15-PIN M POST TYPE | 27264 | 09-65-1151 |
| A16P4 | 1251-3750 | 1 | CONNECTOR 10-PIN M POST TYPE | 27264 | 09-65-1101 |
| A16Q1 | 1853-0336 | 2 | TRANSISTOR PNP SI PD=625MW FT=50MHZ | 04713 | MPSA92 |

See introduction to this section for ordering information

Table 6-2. Replaceable Parts (Cont'd)

| Reference Designation | HP Part Number | Qty | Description | Mfr Code | Mfr Part Number |
|-----------------------|----------------|-----|--|----------|---------------------|
| A16Q2 | 1853-0336 | | TRANSISTOR PNP SI PD=625MW FT=50MHZ | 04713 | MPSA92 |
| A16Q3 | 1854-0215 | 1 | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS3611 |
| A16Q4 | 1854-0575 | | TRANSISTOR NPN SI PD=625MW FT=50MHZ | 04713 | MPS-A42 |
| A16Q5 | 1853-0080 | 2 | TRANSISTOR PNP SI PD=300MW FT=30MHZ | 28480 | 1853-0080 |
| A16Q6 | 1853-0080 | | TRANSISTOR PNP SI PD=300MW FT=30MHZ | 28480 | 1853-0080 |
| A16Q7 | 1854-0215 | | TRANSISTOR NPN SI PD=350MW FT=300MHZ | 04713 | SPS3611 |
| A16Q8 | 1854-0358 | 1 | TRANSISTOR NPN SI PD=310MW FT=60MHZ | 28480 | 1854-0358 |
| A16Q9 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 28480 | 1853-0036 |
| A16Q10 | 1853-0036 | | TRANSISTOR PNP SI PD=310MW FT=250MHZ | 24880 | 1853-0036 |
| A16Q11 | 1853-0049 | | TRANSISTOR PNP SI CHIP PD=310MW | 28480 | 1853-0049 |
| A16Q12 | 1853-0084 | | TRANSISTOR PNP 2N4918 SI PD=30W FT=3MHZ | 28480 | 1853-0084 |
| A16R1 | 0757-0454 | | RESISTOR 33.2K 1% .125W F | 24546 | C4-1/8-T0-3322-F |
| A16R2 | 0698-0003 | 1 | RESISTOR 8.2 10% .5W CC TC=0+412 | 01121 | EB82G1 |
| A16R3 | 0684-1241 | | RESISTOR 120K 10% .25W F C TC=-800/900 | 01121 | CB1241 |
| A16R4 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A16R5 | 0698-3455 | | RESISTOR 261K 1% .125W F | 16299 | C4-1/8-T0-2613-F |
| A16R6 | 0698-4495 | | RESISTOR 37.4K 1% .125W F | 24546 | C4-1/8-T0-3742-F |
| A16R7 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A16R8 | 0684-1041 | | RESISTOR 100K 10% .25W CC | 01121 | CB1041 |
| A16R9 | 0757-0431 | | RESISTOR 2.43K 1% .125W F | 24546 | C4-1/8-T0-2431-F |
| A16R10 | 0811-1668 | 2 | RESISTOR 1.5 5% 2W PW TC=0+400 | 75042 | BWH2-1R5-J |
| A16R11 | 0684-1231 | | RESISTOR 12K 10% .25W FC TC=-400/+800 | 01121 | CB1231 |
| A16R12 | 0684-1031 | | RESISTOR 10K 10% .25W CC | 01121 | CB1031 |
| A16R13 | 0757-0450 | 1 | RESISTOR 22.1K 1% .125W F TC=0+100 | 24546 | C4-1/8-T0-2212-F |
| A16R14 | 0698-5437 | 1 | RESISTOR 12K .1% .125W F TC=0+50 | 24546 | NC55 |
| A16R15 | 0684-1021 | | RESISTOR 1K 10% .25W CC | 01121 | CB1021 |
| A16R16 | 0684-4731 | | RESISTOR 47K 10% .25W CC | 01121 | CB4731 |
| A16R17 | | | NOT ASSIGNED | | |
| A16R18 | | | NOT ASSIGNED | | |
| A16R19 | | | NOT ASSIGNED | | |
| A16R20 | 2100-3253 | | RESISTOR-VAR TRMR 50K OHM 10% C TOP ADJ | 73138 | 72PR50K |
| A16R21 | 0684-8231 | 1 | RESISTOR 82K 10% .25W FC TC=-400/+800 | 01121 | CB8231 |
| A16R22 | 0687-4721 | 1 | RESISTOR 4.7K 10% .5W CC TC=0+647 | 01121 | EB4721 |
| A16R23 | 0757-0428 | | RESISTOR 1.62K 1% .125W F TC=0+100 | 24546 | C4-1/8-T0-1621-F |
| A16R24 | 0811-1668 | | RESISTOR 1.5 5% 2W PW TC=0+400 | 75042 | BWH2-1R5-J |
| A16R25 | 0757-0433 | | RESISTOR 3.32K 1% .125W F TC=0+100 | 24546 | C4-1/8-T0-3321-F |
| A16R26 | 2100-0554 | | RESISTOR-VAR TRMR 500 OHM 10% C TOP ADJ | 73138 | 72PR500 |
| A16R27 | 0757-1093 | | RESISTOR 3K 1% .125W F TC=0+100 | 24546 | C4-1/8-T0-3001-F |
| A16R28 | 0698-3329 | | RESISTOR 10K .5% .125W F TC=0+100 | 03888 | PME55-1/8-T0-1002-D |
| A16R29 | 0698-5579 | 3 | RESISTOR 5K .5% .125W F TC=0+100 | 24546 | C4-1/8-T0-5001-D |
| A16R30 | 0811-1666 | 1 | RESISTOR 1.5 5% 2W PW TC=0+800 | 75042 | BWH2-1R0-J |
| A16R31 | 0684-3321 | | RESISTOR 3.3K 10% .25W CC | 01121 | CB3321 |
| A16R32 | 0698-5579 | | RESISTOR 5K .5% .125W F TC=0+100 | 24546 | C4-1/8-T0-5001-D |
| A16R33 | 0698-5579 | | RESISTOR 5K .5% .125W F TC=0+100 | 24546 | C4-1/8-T0-5001-D |
| A16R34 | 0757-0431 | | RESISTOR 47K 10% .25W CC | 01121 | CB4731 |
| A16R35 | 0811-1667 | 1 | RESISTOR 1.2 5% 2W PW TC=0+400 | 75042 | BWH2-1R2-J |
| A16R36 | 0683-4715 | 2 | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A16R37 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A16R38 | 0683-4715 | | RESISTOR 470 5% .25W FC TC=-400/+600 | 01121 | CB4715 |
| A16R39 | 0684-1011 | | RESISTOR 100 10% .25W CC | 01121 | CB1011 |
| A16R40 | 0684-1041 | | RESISTOR 100K 10% .25W CC | 01121 | CB1041 |
| A16R41 | 0757-0457 | | RESISTOR 47.5K 1% .125W F | 24546 | C4-1/8-T0-4752-F |
| A16R42 | 0684-1811 | | RESISTOR 180 10% .25W FC TC=-400/+600 | 01121 | CB1811 |
| A16R43 | 0757-0001 | | RESISTOR 13.3 1% .5W F TC=0+100 | 19701 | MFC-1/2-T0-13R3-F |
| A16S1 | 3101-0555 | 1 | SWITCH-PB DPDT ALTN 4A 250VAC | 28480 | 3101-0555 |
| A16S2 | 3101-1914 | 1 | SWITCH-SL 2-DPDT-NS STD 1.5A 250VAC PC | 28480 | 3101-1914 |
| A16U1 | 1820-0196 | 3 | IC RGLTR | 07263 | 723HC |
| A16U2 | 1820-0196 | | IC RGLTR | 07263 | 723HC |
| A16U3 | 1820-0196 | | IC RGLTR | 07263 | 723HC |
| A16VR1 | 1902-3048 | 1 | DIODE-ZNR 3.48V 5% D0-7 PD=.4W TC=-.058% | 04713 | SZ 10939-50 |
| A16VR2 | 1902-0025 | | DIODE-ZNR 10V 5% D0-7 PD=.4W TC=.06% | 04713 | SZ 10939-182 |
| A16VR3 | 1902-3036 | | DIODE-ZNR 3.16V 5% .4W MAX PD | 04713 | SZ 10939-38 |
| A16VR4 | 1902-3082 | | DIODE-ZNR 4.64V 5% .4W MAX PD | 04713 | SZ 10939-86 |
| A16XU1 | 1200-0475 | | SOCKET | 22526 | 75060-005 |
| A16XU2 | 1200-0475 | | SOCKET | 22526 | 75060-005 |
| A16XU3 | 1200-0475 | | SOCKET | 22526 | 75060-005 |

See introduction to this section for ordering information

Table 6-3. List of Manufacturer Codes

| MFR NO. | MANUFACTURER NAME | ADDRESS | ZIP CODE |
|---------|-------------------------------------|----------------------|----------|
| 00000 | U.S.A. COMMON | ANY SUPPLIER OF USA | |
| 00779 | AMP INC | HARRISBURG PA | 17105 |
| 0080A | ASSMAWN | | |
| 0086S | STETTNER-TRUSH INC | CAZENOVIA NY | 13035 |
| 01121 | ALLEN BRADLEY CO | MILWAUKEE WI | 53212 |
| 01295 | TEXAS INSTR INC SEMICOND CMPNT DIV | DALLAS TX | 75231 |
| 02114 | FERROXCUBE CORP | SAUGERTIES NY | 12477 |
| 02735 | RCA CORP SOLID STATE DIV | SOMMERSVILLE NJ | 08876 |
| 03888 | PYROFILM CORP | WHIPPANY NJ | 07981 |
| 04713 | MOTOROLA SEMICONDUCTOR PRODUCTS | PHOENIX AZ | 85008 |
| 06560 | AIRCO SPEER ELEK DIV AIR RDCN CO | NOGALES AZ | 85621 |
| 07263 | FAIRCHILD SEMICONDUCTOR DIV | MOUNTAIN VIEW CA | 94040 |
| 11236 | CTS OF BERNE INC | BERNE IN | 46711 |
| 12697 | CLAROSTAT MFG CO INC | DOVER NH | 03820 |
| 13103 | THERMALLOY CO | DALLAS TX | 75247 |
| 16299 | CORNING GL WK ELEC CMPNT DIV | RALEIGH NC | 27604 |
| 17856 | SILICONIX INC | SANTA CLARA CA | 95050 |
| 19701 | MEPCO/ELECTRA CORP | MINERAL WELLS TX | 76067 |
| 24226 | GOWANDA ELECTRONICS CORP | GOWANDA NY | 14070 |
| 24546 | CORNING GLASS WORKS (BRADFORD) | BRADFORD PA | 16701 |
| 27014 | NATIONAL SEMICONDUCTOR CORP | SANTA CLARA CA | 95051 |
| 27264 | MOLEX PRODUCTS CO | DOWNERS GROVE IL | 60515 |
| 28480 | HEWLETT-PACKARD CO CORPORATE HQ | PALO ALTO CA | 94304 |
| 30983 | MEPCO/ELECTRA CORP | SAN DIEGO CA | 92121 |
| 32997 | BOURNS INC TRIMPOT PROD DIV | RIVERSIDE CA | 92507 |
| 56289 | SPRAGUE ELECTRIC CO | NORTH ADAMS MA | 01247 |
| 57771 | STIMPSON EDWIN B CO INC | BROOKLYN NY | 11205 |
| 6F364 | CENTRE ENGINEERING INC | STATE COLLEGE PA | 16801 |
| 71400 | BUSSMAN MFG DIV OF MCGRAW-EDISON CO | ST LOUIS MO | 63017 |
| 71785 | TRW ELEK COMPONENTS CINCH DIV | ELK GROVE VILLAGE IL | 60007 |
| 72136 | ELECTRO MOTIVE MFG CO INC | WILLIMANTIC CT | 06226 |
| 72982 | ERIE TECHNOLOGICAL PRODUCTS INC | ERIE PA | 16512 |
| 73138 | BECKMAN INSTRUMENTS INC HELIPOT DIV | FULLERTON CA | 92634 |
| 74276 | SIGNALITE INC | NEPTUNE NJ | 07753 |
| 74970 | JOHNSON E F CO | WASECA MN | 56093 |
| 75042 | TRW INC PHILADELPHIA DIV | PHILADELPHIA PA | 19108 |
| 84411 | TRW CAPACITOR DIV | OGALLALA NE | 69153 |
| 90949 | AMPHENOL SALES DIV OF BUNKER-RAMO | HAZELWOOD MO | 63042 |
| 91506 | AUGAT INC | ATTLEBORO MA | 02703 |
| 91637 | DALE ELECTRONICS INC | COLUMBUS NE | 68601 |
| 95121 | QUALITY COMPONENTS INC | ST MARYS PA | 15857 |

SECTION VII MANUAL CHANGES

7-1. INTRODUCTION.

7-2. This section contains information required to backdate or update this manual for a specific instrument. Descriptions of special and standard options are also provided in this section.

7-3. MANUAL CHANGES.

7-4. This manual applies directly to instruments having the same serial prefix shown on the manual title page. If the serial prefix of your instrument is not the same as the one on the title page, find your serial prefix in table 7-1 and make all changes to the manual that are listed for that serial prefix. When making changes listed in table 7-1, make the change with the highest number first. For example, if backdating changes 1, 2, and 3 are required for your serial prefix, do change 3 first, then change 2, and finally change 1. If the serial prefix of your instrument is not listed either on the title page or in table 7-1, refer to the enclosed MANUAL CHANGES sheet for updating information. Also, if a MANUAL CHANGES sheet is supplied, make all indicated ERRATA corrections.

Table 7-1. Manual Changes

| Serial Prefix | Make Changes |
|---------------|--------------|
| 1522A | 7-4, 2, 1 |
| 1526A | 7-2 |
| 1533A | 7-3 |
| 1541A | 7-4 |
| 1551A | 7-5 |
| 1612A | 7, 6 |
| 1616A | 7 |

CHANGE 1

Table 6-2,

A7 Option 101: Change to HP Part No. 01740-66518; BOARD ASSY:HORIZONTAL SWEEP; Mfr Code 28480; Mfr Part No. 01740-66518.

A7C39: Change to HP Part No. 0160-2198; CAPACITOR-FXD 20 PF +—5% 300 WVDC MICA; Mfr Code 28480; Mfr Part No. 0160-2198.

Delete: A7C49.

A7L3 and A7L7: Change to HP Part No. 9140-0105; COIL-FXD MOLDED RF CHOKE 8.2 UH 10%; Mfr Code 24226; Mfr Part No. 15/821.

A7R155: Change to HP Part No. 0684-1021; RESISTOR 1K 10% .25W CC TUBULAR; Mfr Code 01121; Mfr Part No. CB1021.

Schematic 7,
Delete: A7C49.

Figure 8-16,
Replace component locator in figure 8-16 with figure 7-1.

Schematic 12,
Move A7C39 from present position, and insert between base of A7Q30 and ground. Change value to 20 pF.
Change A7L3 and A7L7 to 8.2 μ H.
Change A7R155 to 1K.

CHANGE 2

Paragraph 5-51k and 5-56h; tables 5-6, 5-8, and 5-9,
Change A8R43 to A8C7.

Table 5-7 and 5-9,
Change A9R28 to A9C5.

Figure 5-5,
Change A8R43 to A8C7 and A9R28 to A9C5.

Table 6-2,
Add: A3C79; HP Part No. 0150-0021; CAPACITOR-FXD .47 PF \pm 5% 500 WVDC TI DIOX; Mfr Code 95121, Mfr Part No. Type QC.

A3R54 and A3R55: Change to HP Part No. 0757-0284; RESISTOR 150 1% .12 WF TUBULAR; Mfr Code 24546; Mfr Part No. C4-1/8-T0-151F.

A8: Change to HP Part No. 01740-66510; BOARD ASSY, MAIN SWEEP; Mfr Code 28480; Mfr Part No. 01740-66510.

A8C6: Change to HP Part No. 0160-3987; CAPACITOR-FXD 86 PF +—2% 500 WVDC MICA; Mfr Code 28480; Mfr Part No. 0160-3987.

Add: A8C7; HP Part No. 0121-0434; CAPACITOR-V TRMR-AIR 2-19.3 PF 350 V; Mfr Code 74970; Mfr Part No. 189-0507-125.

A8C13: Change to HP Part No. 0140-0149; CAPACITOR-FXD 470 PF +—5% 300 WVDC MICA; Mfr Code 72136; Mfr Part No. DM15F471J0300WV1CR.


A8C14: Change to HP Part No. 0160-0157; CAPACITOR-FXD 4700 PF +—10% 200 WVDC POLYE; Mfr Code 56289; Mfr Part No. 292P47292.

A8C15: Change to HP Part No. 0170-0040; CAPACITOR-FXD .047 UF +—10% 200 WVDC; Mfr Code 56289; Mfr Part No. 292P47392.

A8C16: Change to HP Part No. 0180-0376; CAPACITOR-FXD .47 UF +—10% 35 VDC TA; Mfr Code 56289; Mfr Part No. 150D474X9035A2.

A8C17: Change to HP Part No. 0180-0100; CAPACITOR-FXD 4.7 UF +—10% 35 VDC TA; Mfr Code 56289; Mfr Part No. 150D475X9035B2.


A8C18: Change to HP Part No. 0180-0058; CAPACITOR-FXD 50 UF +—10% 25 VDC AL; Mfr Code 56289; Mfr Part No. 30D506G025CC2.

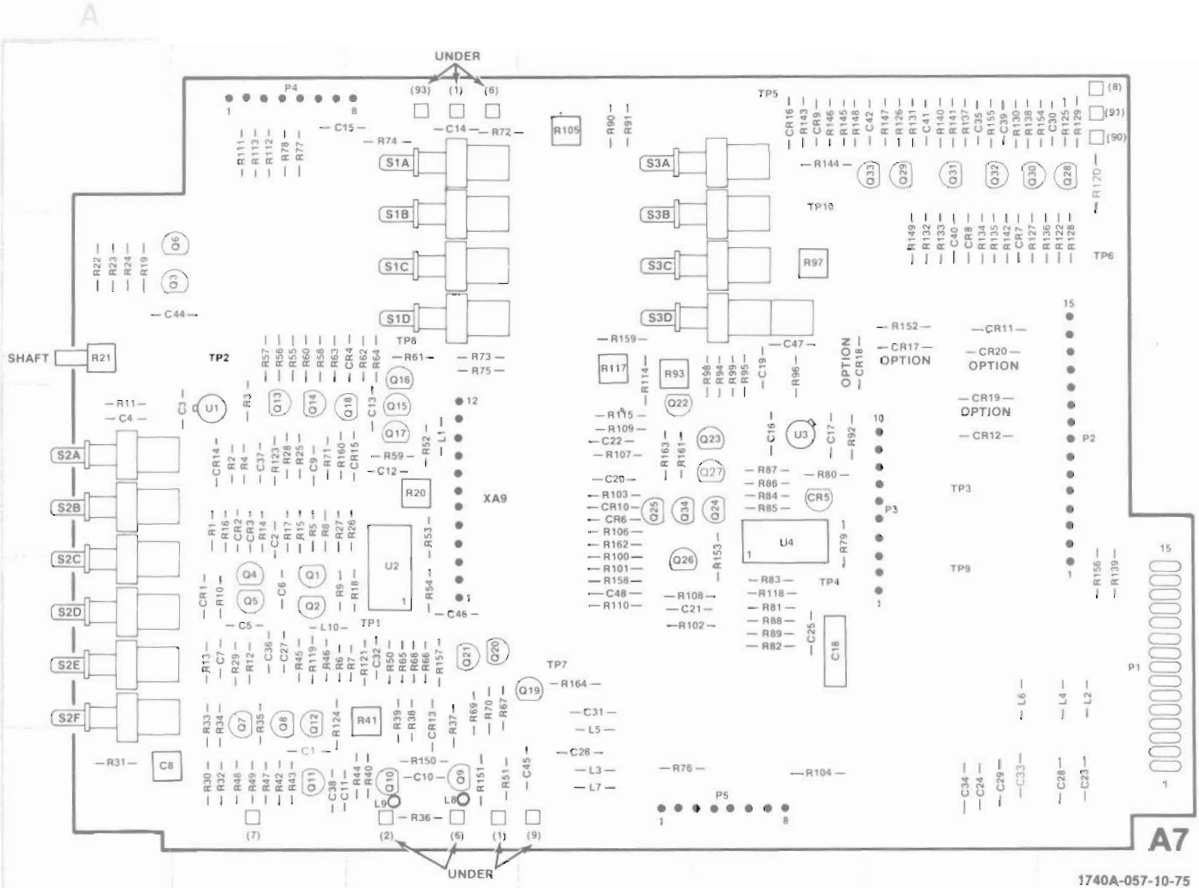

1740A-057-10-75

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | B-5 | C40 | F-2 | P2 | G-3 | R2 | B-3 | R40 | C-5 | R78 | B-1 | R117 | D-2 | R155 | F-1 |
| C2 | B-3 | C41 | F-1 | P3 | F-3 | R3 | B-3 | R41 | C-4 | R79 | E-3 | R118 | E-4 | R156 | G-4 |
| C3 | B-3 | C42 | F-1 | P4 | B-1 | R4 | B-3 | R42 | B-5 | R80 | E-3 | R119 | B-4 | R157 | C-4 |
| C4 | A-3 | C44 | B-2 | P5 | E-5 | R5 | B-3 | R43 | B-5 | R81 | E-4 | R120 | G-1 | R158 | D-4 |
| C5 | B-4 | C45 | D-5 | O1 | B-4 | R6 | C-4 | R44 | C-5 | R82 | E-4 | R121 | C-4 | R159 | O-2 |
| C6 | B-4 | C46 | C-4 | O2 | B-4 | R7 | C-4 | R45 | B-4 | R83 | E-4 | R122 | G-2 | R160 | B-3 |
| C7 | B-4 | C47 | E-2 | O3 | B-2 | R8 | B-3 | R46 | B-4 | R84 | E-3 | R123 | B-3 | R161 | D-3 |
| C8 | A-1 | C48 | D-4 | O4 | B-4 | R9 | C-4 | R47 | B-5 | R85 | E-3 | R124 | B-4 | R162 | D-3 |
| C9 | B-3 | CR11 | B-4 | O5 | B-4 | R10 | B-4 | R48 | B-5 | R86 | E-3 | R125 | G-1 | R163 | D-3 |
| C10 | C-5 | CR2 | B-3 | O6 | B-2 | R11 | A-3 | R49 | B-5 | R87 | E-3 | R126 | F-1 | R164 | D-4 |
| C11 | B-5 | CR3 | B-3 | O7 | B-4 | R12 | B-4 | R50 | C-4 | R88 | E-4 | R127 | F-2 | S1A | C-1 |
| C12 | C-3 | CR4 | C-2 | O8 | B-4 | R13 | B-4 | R51 | C-5 | R89 | E-4 | R128 | G-2 | S1B | C-2 |
| C13 | C-3 | CR5 | E-3 | O9 | C-5 | R14 | B-3 | R52 | C-3 | R90 | D-1 | R129 | G-1 | S1C | C-2 |
| C14 | C-1 | CR6 | D-3 | Q10 | C-5 | R15 | B-3 | R53 | C-3 | R91 | D-1 | R130 | F-1 | S1D | C-2 |
| C15 | C-1 | CR7 | F-2 | Q11 | B-5 | R16 | B-3 | R54 | C-4 | R92 | E-3 | R131 | F-1 | S2A | A-3 |
| C16 | E-3 | CR8 | F-2 | Q12 | B-4 | R17 | B-3 | R55 | B-2 | R93 | D-2 | R132 | F-2 | S2B | A-3 |
| C17 | E-3 | CR9 | E-1 | Q13 | B-3 | R18 | C-4 | R56 | B-2 | R94 | E-2 | R133 | F-2 | S2C | A-4 |
| C18 | E-4 | CR10 | D-3 | Q14 | B-3 | R19 | A-2 | R57 | B-2 | R95 | E-2 | R134 | F-2 | S2D | A-4 |
| C19 | E-2 | CR11 | F-2 | Q15 | C-3 | R20 | C-3 | R58 | B-2 | R96 | E-2 | R135 | F-2 | S2E | A-4 |
| C20 | D-3 | CR12 | F-3 | Q16 | C-2 | R21 | A-2 | R59 | C-3 | R97 | E-2 | R136 | G-2 | S2F | A-4 |
| C21 | D-4 | CR13 | C-4 | Q17 | C-3 | R22 | A-2 | R60 | B-2 | R98 | E-2 | R137 | F-1 | S3A | D-1 |
| C22 | D-3 | CR14 | B-3 | Q18 | C-3 | R23 | A-2 | R61 | C-2 | R99 | E-2 | R138 | F-1 | S3B | D-2 |
| C23 | G-5 | CR15 | C-3 | Q19 | D-4 | R24 | A-2 | R62 | C-2 | R100 | D-4 | R139 | G-4 | S3C | D-2 |
| C24 | F-5 | CR16 | E-1 | Q20 | C-4 | R25 | B-3 | R63 | B-2 | R101 | D-4 | R140 | F-1 | S3D | D-2 |
| C25 | E-4 | CR17 | F-2 | Q21 | C-4 | R26 | C-3 | R64 | C-2 | R102 | D-4 | R141 | F-1 | TP1 | C-4 |
| C26 | D-5 | CR18 | E-2 | Q22 | D-3 | R27 | C-3 | R65 | C-4 | R103 | D-3 | R142 | F-2 | TP2 | B-2 |
| C27 | B-4 | CR19 | F-3 | Q23 | E-3 | R28 | B-3 | R66 | C-4 | R104 | E-5 | R143 | E-1 | TP3 | F-3 |
| C28 | G-5 | CR20 | F-2 | Q24 | E-3 | R29 | B-4 | R67 | C-4 | R105 | D-1 | R144 | E-1 | TP4 | E-4 |
| C29 | F-5 | L1 | C-3 | Q25 | D-3 | R30 | B-5 | R68 | C-4 | R106 | D-3 | R145 | E-1 | TP5 | E-1 |
| C30 | G-1 | L2 | G-4 | Q26 | D-4 | R31 | A-5 | R69 | C-4 | R107 | D-3 | R146 | E-1 | TP7 | D-4 |
| C31 | D-4 | L3 | D-5 | Q27 | E-3 | R32 | B-5 | R70 | C-4 | R108 | D-4 | R147 | F-1 | TP8 | C-2 |
| C32 | C-4 | L4 | G-4 | Q28 | G-1 | R33 | B-4 | R71 | B-3 | R109 | D-3 | R148 | E-1 | TP9 | F-4 |
| C33 | F-5 | L5 | D-5 | Q29 | F-1 | R34 | B-4 | R72 | C-1 | R110 | D-4 | R149 | F-2 | TP10 | E-1 |
| C34 | F-5 | L6 | F-4 | Q30 | F-1 | R35 | B-4 | R73 | D-2 | R111 | B-1 | R150 | C-5 | U1 | B-3 |
| C35 | F-1 | L7 | D-5 | Q31 | F-1 | R36 | C-5 | R74 | C-1 | R112 | B-1 | R151 | C-5 | U2 | C-4 |
| C36 | B-4 | L8 | C-5 | Q32 | F-1 | R37 | C-4 | R75 | D-2 | R113 | B-1 | R152 | F-2 | U3 | E-3 |
| C37 | B-3 | L9 | C-5 | Q33 | F-1 | R38 | C-4 | R76 | D-5 | R114 | D-2 | R153 | E-4 | U4 | E-3 |
| C38 | B-5 | L10 | B-4 | Q34 | D-3 | R39 | C-4 | R77 | B-1 | R115 | D-3 | R154 | G-1 | XA9 | C-3 |
| C39 | F-1 | P1 | G-4 | R1 | B-3 | | | | | | | | | | |

Figure 7-1. Replacement for Component Locator in Figure 8-16

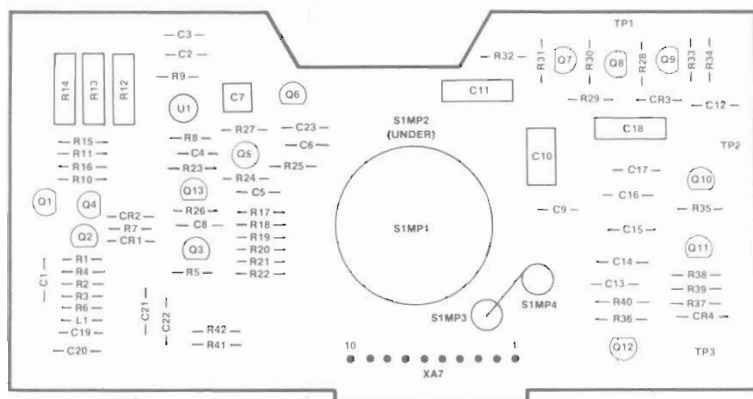

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|
| C1 | A 2 | Q3 | B 2 | R21 | B 2 |
| C2 | B 1 | Q4 | A 2 | R22 | B 2 |
| C3 | B 1 | Q5 | B 2 | R23 | B 2 |
| C4 | B 2 | Q6 | B 1 | R24 | B 2 |
| C5 | B 2 | Q7 | D 1 | R25 | B 2 |
| C6 | B 2 | Q8 | B 1 | R26 | B 2 |
| C7 | B 1 | Q9 | E 1 | R27 | B 1 |
| C8 | B 2 | Q10 | E 2 | R28 | D 1 |
| C9 | D 2 | Q11 | E 2 | R29 | D 1 |
| C10 | D 2 | Q12 | D 3 | R30 | D 1 |
| C11 | C 1 | Q13 | B 2 | R31 | D 1 |
| C12 | E 1 | R1 | A 2 | R32 | D 1 |
| C13 | D 2 | R2 | A 2 | R33 | E 1 |
| C14 | D 2 | R3 | A 2 | R34 | E 1 |
| C15 | D 2 | R4 | A 2 | R35 | E 2 |
| C16 | D 2 | R5 | B 2 | R36 | D 3 |
| C17 | D 2 | R6 | A 3 | R37 | E 2 |
| C18 | D 2 | R7 | A 2 | R38 | E 2 |
| C19 | A 3 | R8 | B 2 | R39 | E 2 |
| C20 | A 3 | R9 | B 1 | R40 | D 2 |
| C21 | B 3 | R10 | A 2 | R41 | B 3 |
| C22 | B 3 | R11 | A 2 | R42 | B 3 |
| C23 | B 2 | R12 | A 1 | S1MP1 | C 2 |
| CR1 | A 2 | R13 | A 1 | S1MP2 | C 2 |
| CR2 | A 2 | R14 | A 1 | S1MP3 | D 3 |
| CR3 | E 1 | R15 | A 2 | S1MP4 | D 2 |
| CR4 | A 3 | R16 | A 2 | TP1 | D 1 |
| L1 | A 3 | R17 | B 2 | TP2 | F 2 |
| Q1 | A 2 | R18 | B 2 | TP3 | E 3 |
| Q2 | A 2 | R19 | B 2 | U1 | B 1 |
| | | R20 | B 2 | XA7 | C 2 |

A8

1740A-059-10-75

Figure 7-2. Replacement for Component Locator in Figure 8-17

A8R7: Change to HP Part No. 0757-0429; RESISTOR 1.82K 1% .125 WF; Mfr Code 24546; Mfr Part No. C4-1/8-T0-1821-F.

Add: A8R10 and A8R11; HP Part No. 0757-0431; RESISTOR 2.43K 1% .12 WF; Mfr Code 24546; Mfr Part No. C4-1/8-T0-2431-F.

A8R25: Change to HP Part No. 0684-6801; RESISTOR 68 ohm 10% .25 WF; Mfr Code 01121; Mfr Part No. CB5801.

Delete: A8R43.

A9: Change to HP Part No. 01740-66509; BOARD ASSY, DELAYED SWEEP; Mfr Code 28480; Mfr Part No. 01740-66509.


A9C4: Change to HP Part No. 0140-0193; CAPACITOR-FXD 82 PF +5% 300 WVDC MICA; Mfr Code 72136; Mfr Part No. DM15E820J0300WV1CR. Add: A9C5; HP Part No. 0121-0434; CAPACITOR-V TRMR-AIR 2-19.3 PF 350 V; Mfr Code 74970; Mfr Part No. 189-0507-125.

Add: A9R8 and A9R9; HP Part No. 0757-0431; RESISTOR 2.43K 1% .12 WF; Mfr Code 24546; Mfr Part No. C4-1/8-T0-2431-F.

Delete: A9R28.

Figure 8-13, Component Locator, Add: A3C79 between A3R54 and A3R55.

Schematic 4,

Add: A3C79 between point  and junction of A3C11 and A3L3.

Change: A3R54 and A3R55 to 150 ohms.

Figure 8-17,

Replace component locator in figure 8-17 with figure 7-2.

Schematic 8,

Change: A8C6 to 86 PF.

Add: A8C7 2.0 - 19.3 PF capacitor, .05 - 2 μSEC, in parallel with A8C6.

Change: A8C13 to 470 PF.
Change: A8C14 to 4700 PF.
Change: A8C15 to 0.047 UF.
Change: A8C16 to 0.47 UF.
Change: A8C17 to 4.7 UF.
Change: A8C18 to 50 UF.
Change: A8R7 to 1.82K.

Add: A8R10 2.43K in series with A8R11 2.43K to replace A8R43. The junction of A8R10 and A8R11 is connected to the same contact on A8S1 as the wiper of A8R43.

Change: A8R25 to 68 ohms.

Figure 8-19,

Replace component locator in figure 8-19 with figure 7-3.

Schematic 10,

Change: A9C4 to 82 PF.

Add: A9C5 2.0 - 19.3 PF capacitor, .05 - 2 μSEC, in parallel with A9C4.

Add: A9R8 2.43K in series with A9R9 2.43K to replace A9R28. The junction of A9R8 and A9R9 is connected to the same contact on A8S1 as the wiper of A9R28.

CHANGE 3


Table 6-2,

A7: Change to HP Part No. 01740-66519; BOARD ASSY:HORIZONTAL SWEEP; Mfr Code 28480; Mfr Part No. 01740-66519.

A7 Option 101: Change to HP Part No. 01740-66520; BOARD ASSY:HORIZONTAL SWEEP; Mfr Code 28480; Mfr Part No. 01740-66520.

Add: A7CR14; HP Part No. 1901-0376; DIODE-GEN PRP 35 V MAX VRM 50 MA; Mfr Code 28480; Mfr Part No. 1901-0376.

Delete: A7CR21, A7CR22, A7CR23, A7R165, A7R166, A7R167, and A7R168.

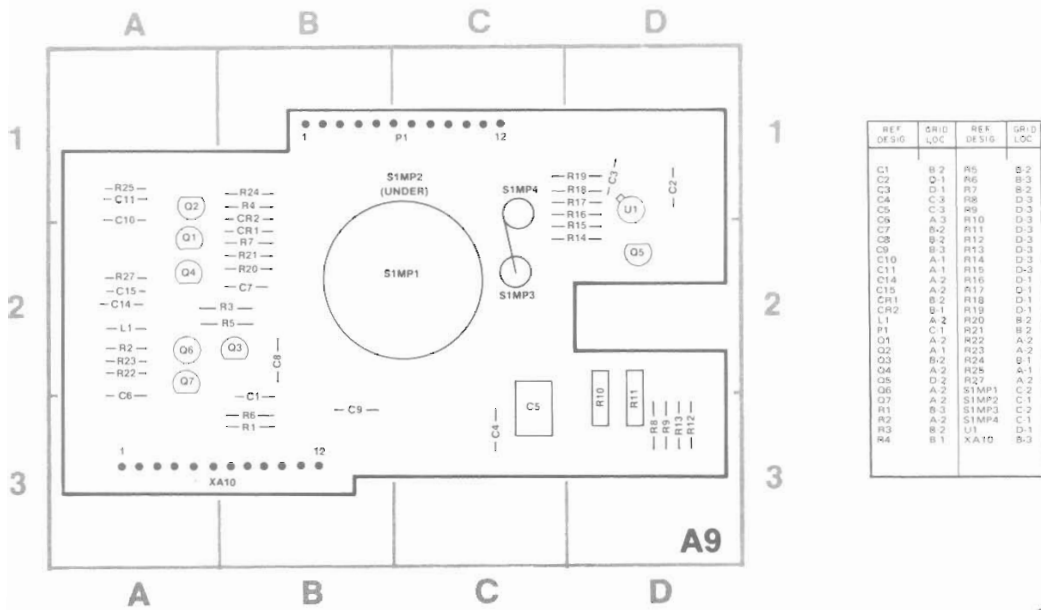

1740A-058-10-75

Figure 7-3. Replacement for Component Locator in Figure 8-19

A7P4: Change to HP Part No. 1251-3071; CONNECTOR 8-PIN POST TYPE; Mfr Code 27264; Mfr Part No. 09-56-1081 (2183-8A).

A7R65, A7R66, and A7R68: Change to HP Part No. 0684-4711; RESISTOR 470 ohms 10% .25 W CC; Mfr Code 01121; Mfr Part No. CB4711.

A7R74: Change to HP Part No. 0684-8221; RESISTOR 8.2K 10% .25W CC; Mfr Code 01121; Mfr Part No. CB8221.

A7R97: Change to HP Part No. 2100-1788; RESISTOR-TRMR 500 10% C TOP-ADJ 1-TURN; Mfr Code 30983; Mfr Part No. ET50W501.

Schematic 7,

Add: A7CR14 between pins 3 and 4 of A7U1 (cathode to pin 3).

Delete: A7CR21, A7CR22, and A7CR23.

Delete: Pin 1 on A7P4, Change pin 2 to pin 1, and show cathode of DS4 to chassis ground through (0) wire.

Change: A7R74 to 8.2K.

Delete: A7R97, A7R165, A7R166, A7R167, and A7R168.

Figure 8-16,

Replace component locator in figure 8-16 with figure 7-1, and add A7C49 between A7R53 and A7XA9. Add following note to figure 7-1: "Option 101: BOARD NUMBER CHANGES TO 01740-66520 AND CR17-20 ARE ADDED." Change board number from 66518 to 66519.

Schematic 9,

Change: Pin 7 to 6, pin 8 to 7, and pin 9 to 8 on A7P4.

Schematic 11,

Add: A7R97 500 ohm variable resistor, A VS B CAL, between A7C47 and A7R98.

Change: Pin 6 to 5, pin 5 to 4, pin 4 to 3, and pin 3 to 2 on A7P4.

CHANGE 4

Table 6-2,

A11C13: Change to HP Part No. 0150-0048, CAPACITOR-FXD .22 PF \pm 5% 500WVDC TI DIOX, Mfr Code 95121, Mfr Part No. Type QC.

Delete: A11C14.

A11R6: Change to HP Part No. 0683-0395, RESISTOR 3.9 5% .25W CC, Mfr Code 01121, Mfr Part No. CB39G5.

A11R11: Change to HP Part No. 0757-0457, RESISTOR 47.5K 1% .125WF TC=0 \pm 100, Mfr Code 24546, Mfr Part No. C4-1/8-T0-4752-F.

A11R17: Change to HP Part No. 0757-0457, RESISTOR 47.5K 1% .125WF TC=0 \pm 100, Mfr Code 24546, Mfr Part No. C4-1/8-T0-4752-F.

A11R20: Change to HP Part No. 0683-0395, RESISTOR 3.9 5% .25W FC TC= \pm 400/+500, Mfr Code 01121, Mfr Part No. CB39G5.

Schematic 11,

A11C13: Change value to 0.22 PF.

Delete: A11C14.

A11R6: Change value to 3.9 ohms.

A11R20: Change value to 3.9 ohms.

CHANGE 5

Table 6-2,

A5MP1: Change HP Part No. and Mfr Part No. to 01740-20504.

CHANGE 6

Table 6-2,

W8: Change HP Part No. and Mfr Part No. to 01740-61612.

A16: Change HP Part No. and Mfr Part No. to 01740-66501.

Delete: A16C20, A16Q11, and A16Q12.

Add: A16R17, HP Part No. 0684-1021, RESISTOR 1K 10% .25W CC, Mfr Code 01121, Mfr Part No. CB1021.

Add: A16R18, HP Part No. 0684-1021, RESISTOR 1K 10% .25W CC, Mfr Code 01121, Mfr Part No. CB1021.

Add: A16R19, HP Part No. 0764-0033, RESISTOR 33 5% 2W MO TC=0+—200, Mfr Code 24546, Mfr Part No. FP42-Z-T00-3302-J.

Delete: A16R41, A16R42, A16R43, A16VR3, and A16VR4.

Figure 8-10,

Replace figure 8-10 with figure 7-4.

Schematic 1,

Make changes shown in figure 7-5.

CHANGE 7

Paragraph 2-9,

Replace existing paragraph with the following paragraph and delete figure 2-2.

2-9. The instrument is normally set at the factory for 120-volt operation. To operate the instrument from any other ac power source, proceed as follows:

a. Verify that Model 1740A power cable is not connected to any input power source.

b. Remove bottom cover from the Model 1740A.

c. On Low-voltage Power Supply A16, set Line Selector Switch A16S2, to required positions for input ac power source.

d. For 220-V inputs, replace fuse A16F1 with 0.5 A slow-blow fuse supplied with instrument.

e. Replace bottom cover.

f. Connect Model 1740A input power cable to input power source.

g. After changing the line voltage selection switch setting, remove Line-voltage Plate if applicable and reinstall it so proper line voltage is visible.

Figure 3-1,

Replace rear-panel photo with figure 7-6 and delete item 66, FUSE.

Table 6-2,

Delete F1, HP Part No. 2110-0007, and F1, HP Part No. 2110-0202.

MP44: Change HP Part No. and Mfr Part No. to 01740-00204.

MP56: Change HP Part No. and Mfr Part No. to 01740-04103.

MP57: Change HP Part No. and Mfr Part No. to 01740-04104.

MP60: Change HP Part No. and Mfr Part No. to 01740-20502.

Delete: A7CR24 and A7R169.

A7R78: Change to HP Part No. 0757-0439, RESISTOR 6.81K 1% .125WF, Mfr Code 24546, Mfr Part No. C4-1/8-T0-6811-F.

Add: A16E1, HP Part No. 2110-0269, FUSE HOLDER, CLIP TYPE .25 FUSE, Mfr Code 91506, Mfr Part No. 6008-32CN.

Add: A16F1, HP Part No. 2110-0007, FUSE 1A 250 V SLO-BLO 1.25 x .25 UL, Mfr Code 71400, Mfr Part No. MDL-1.

Add: A16F1, HP Part No. 2110-0202, FUSE .5A 250 V SLO-BLO 1.25 x .25 UL, Mfr Code 71400, Mfr Part No. MDL-1/2.


Figure 5-5,

Delete adjustment A7R169, DELAY START.

Figure 6-1,

Delete: F1 and XF1.

Add: MP58 as shown below.



Schematic 1,

Change line input as shown below.


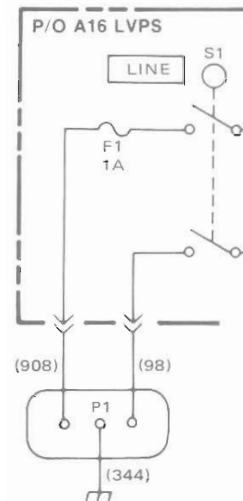


Figure 8-10,

Add A16F1 (location E-4) directly below A16S1.

Schematic 7,


Delete A7CR24 and change SINGLE switch wiring as shown below.



Schematic 9,

Delete: A7R169.

Change A7R78 to 6810 ohms and show connection to ground.

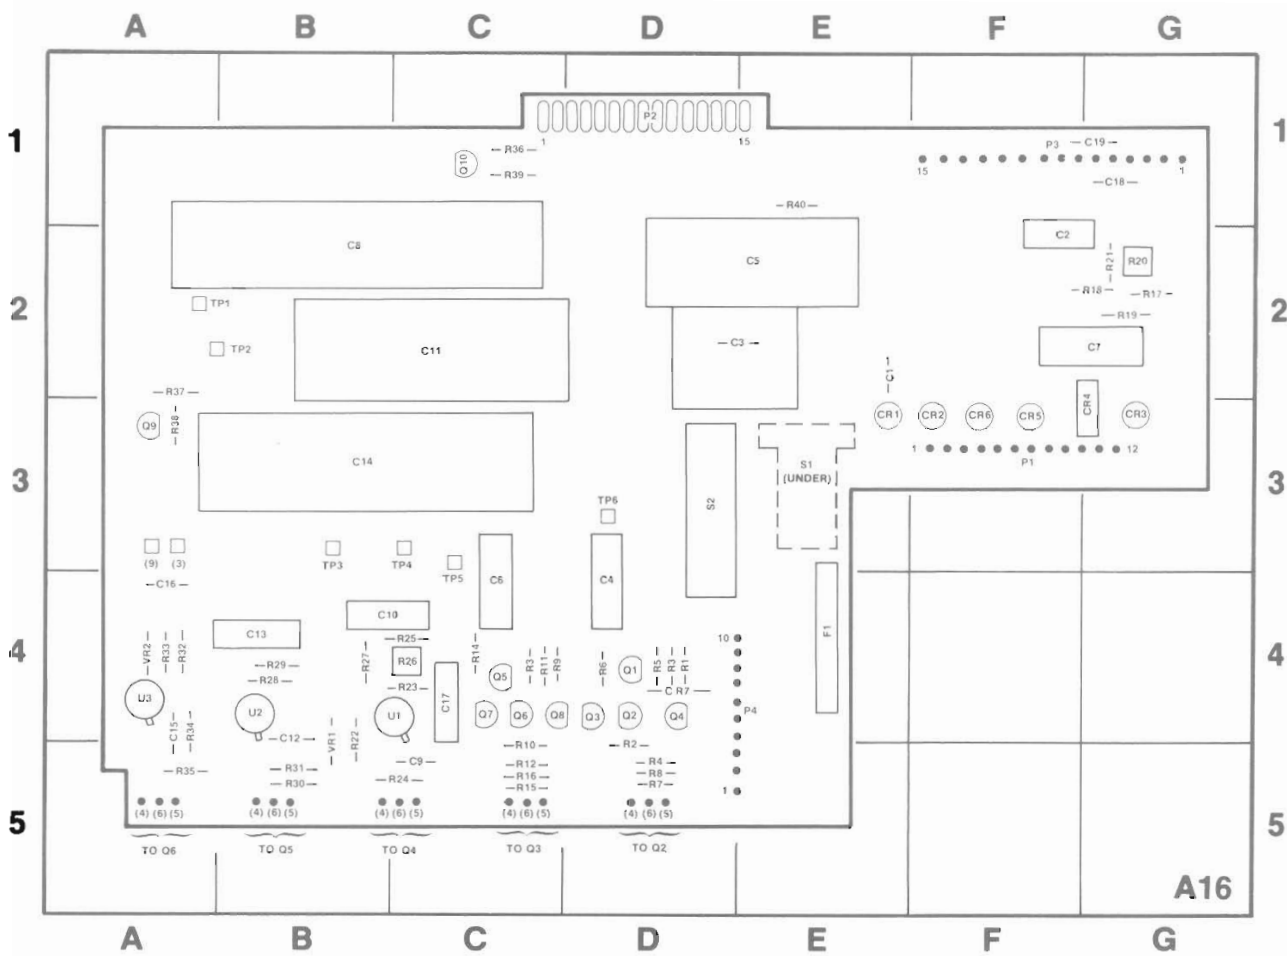

1740A-068-07-76

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | E-2 | C15 | A-4 | P1 | F-3 | Q10 | C-1 | R13 | C-4 | R26 | C-4 | R40 | C-1 |
| C2 | F-2 | C16 | A-4 | P2 | D-1 | R1 | D-4 | R14 | C-4 | R27 | C-4 | S1 | E-3 |
| C3 | E-2 | C17 | C-4 | P3 | F-1 | R2 | D-4 | R15 | C-5 | R28 | B-4 | S2 | D-3 |
| C4 | D-3 | C18 | G-1 | P4 | E-4 | R3 | D-4 | R16 | C-5 | R29 | B-4 | TP1 | A-2 |
| C5 | E-2 | C19 | G-1 | Q1 | D-4 | R4 | D-5 | R17 | G-2 | R30 | B-5 | TP2 | B-2 |
| C6 | C-3 | CR1 | E-3 | Q2 | D-4 | R5 | D-4 | R18 | G-2 | R31 | B-5 | TP3 | B-3 |
| C7 | G-2 | CR2 | F-3 | Q3 | D-4 | R6 | D-4 | R19 | G-2 | R32 | A-4 | TP4 | C-3 |
| C8 | B-2 | CR3 | G-3 | Q4 | D-4 | R7 | D-5 | R20 | G-2 | R33 | A-4 | TP5 | C-3 |
| C9 | C-5 | CR4 | G-3 | Q5 | C-4 | R8 | D-5 | R21 | G-2 | R34 | A-4 | TP6 | D-3 |
| C10 | C-4 | CR5 | F-3 | Q6 | C-4 | R9 | D-4 | R22 | B-5 | R35 | A-5 | U1 | C-4 |
| C11 | C-2 | CR6 | F-3 | Q7 | C-4 | R10 | C-5 | R23 | C-4 | R36 | C-1 | U2 | B-4 |
| C12 | B-4 | CR7 | D-4 | Q8 | D-4 | R11 | C-4 | R24 | C-5 | R37 | A-2 | U3 | A-4 |
| C13 | B-4 | F1 | E-4 | Q9 | A-3 | R12 | C-5 | R25 | C-4 | R38 | A-3 | VR1 | B-5 |
| C14 | B-3 | | | | | | | | | | | VR2 | A-4 |

Figure 7-4. Replacement for Component Locator in Figure 8-10

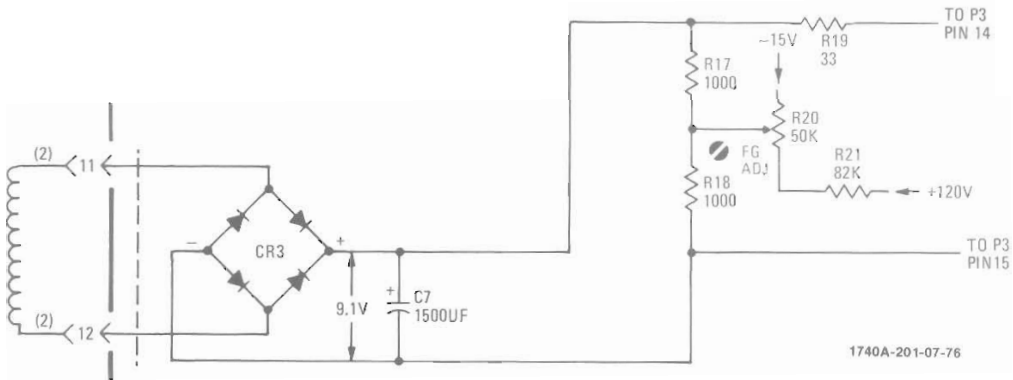


Figure 7-5. Changes to Schematic 1

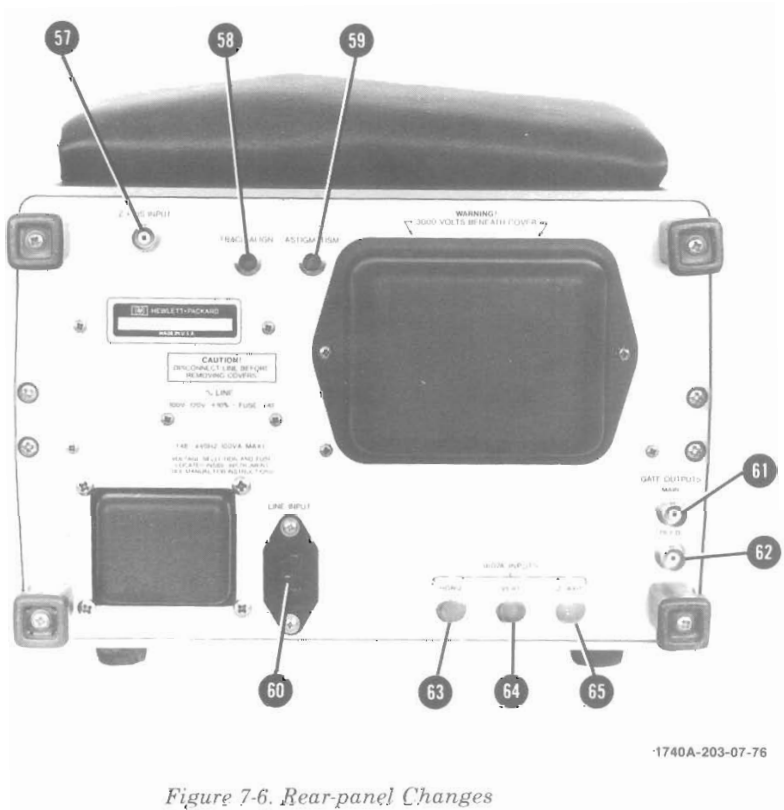


Figure 7-6. Rear-panel Changes

SECTION VIII

SCHEMATICS AND TROUBLESHOOTING

8-1. INTRODUCTION.

8-2. This section contains schematics, troubleshooting data, repair information, and component-identification illustrations. An interconnection diagram is also provided.

8-3. PREVENTIVE MAINTENANCE.

8-4. CLEANING. Painted surfaces can be cleaned with a commercial, spray-type window cleaner or with a mild soap and water solution.

CAUTION

Avoid the use of chemical cleaning agents which might damage the plastics used in this instrument. Recommended cleaning agents are isopropyl alcohol, kelite (1 part kelite, 20 parts water), or a solution of 1% mild detergent and 99% water.

8-5. Corroded spots are best removed with soap and water. Stubborn residues can be removed with a fine abrasive. Protect such areas from further corrosion with an application of silicone resin such as GE DRI-FILM 88.

8-6. SWITCH MAINTENANCE. The pushbutton switches in this instrument were designed for long, trouble-free service. If one of these switches should become defective, replacement rather than repair is recommended.

8-7. Rotary switches can easily be serviced after removal from the instrument. For example, to remove the TIME/DIV switch, the TIME/DIV switch shaft must also be removed. Refer to the paragraphs on repair in this section for disassembly instructions.

8-8. Conventional rotary switches are serviced by cleaning the contacts with a degreaser such as M-180 FREON TF DEGREASER. Contact surfaces should be lubricated with a lubricant comparable to LUBRIPLATE FML produced by the Fiske Brothers Refining Company. LUBRIPLATE FML is available from the Hewlett-Packard Company (HP Part No. 6040-0305).

8-9. To service the rotary switches on assemblies A8 and A9, proceed as follows:

a. Remove TIME/DIV knob and shaft (refer to paragraph 8-24).

b. Remove plug-in assembly (A8 or A9) from assembly A7.

c. Note orientation of slot in rotor section of switch.

d. Remove metal retainer ring from rotor switch and separate two sections.

e. Check contact area on etched circuit board. If contact area shows excessive wear, replace circuit board.

f. Check contact on both rotor sections. If contacts show excessive wear, replace rotor section.


g. Clean and lubricate contacts on etched circuit board and rotors as described in paragraph 8-8.

h. Place rotor sections on etched circuit board and reinstall retainer ring.

i. Position slotted portion of open rotor section as noted in step c.

j. Reinstall assembly in instrument.

k. Reinstall TIME/DIV shaft and knob assembly.

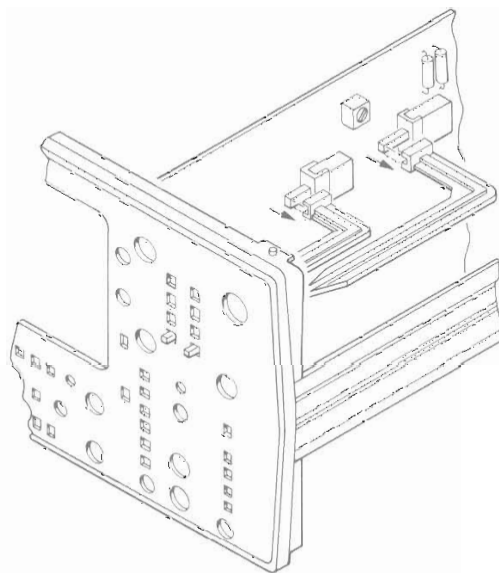

1740A-060-10-75

Figure 8-1. Switch Extender Shaft Removal

8-10. Switches in the vertical attenuators require no lubrication, cleaning, or maintenance.

8-11. To remove the horizontal right-angle switch extender shafts, depress the switch connected to the extender shaft to be removed. While supporting switch shaft with finger, gently pull extender shaft away from circuit board (90° from the switch axis). To reinstall, reverse removal procedure (see figure 8-1).

8-12. REMOVAL AND REPLACEMENT.

8-13. Instructions for removing major assemblies are contained in the following paragraphs. Instructions for repairing circuit board assemblies are provided in paragraph 8-28. A replaceable parts list is provided in Section VI.

8-14. CRT REMOVAL AND REPLACEMENT. To remove and replace the CRT, see figures 6-1 and 8-2, and proceed as follows:

WARNING

To prevent personal injury, wear a face mask or goggles when handling the CRT. Wear protective gloves and handle the CRT carefully.

- a. Disconnect line cord and remove top and bottom covers from instrument.
- b. Disconnect the post-accelerator lead and immediately discharge lead to ground.

WARNING

Failure to discharge high voltage can result in severe electrical shock to personnel and damage to the instrument.

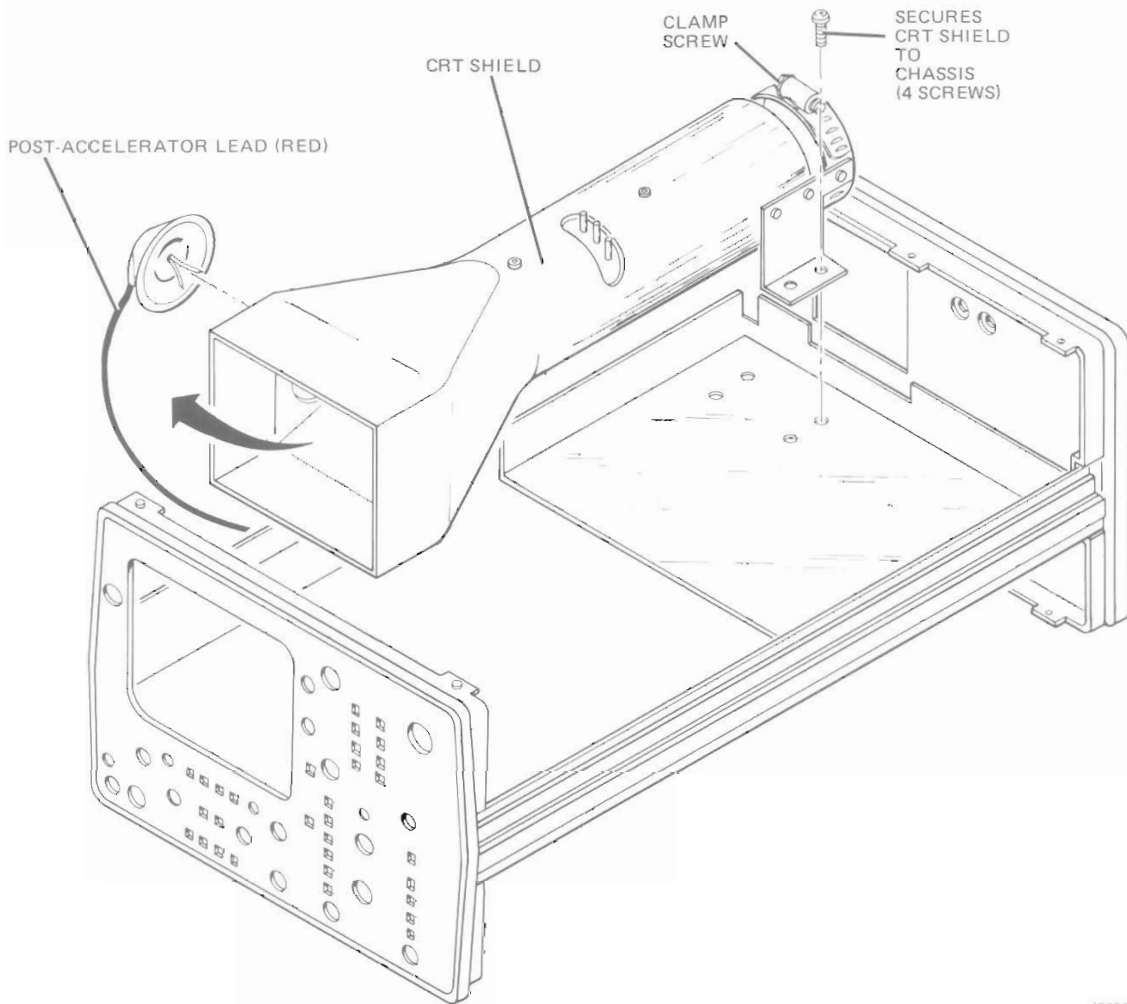


Figure 8-2. CRT Removal

1740A-061-10-75

- c. Remove rear-panel CRT socket cover (MP33); then disconnect socket.
- d. Remove HVPS cover (MP54).
- e. Disconnect (956) and (957) wires from rear of HV Power Supply Assembly A15.
- f. Disconnect all neck-pin leads.
- g. Disconnect seven CRT cable wires from top of gate amplifier A12, and lay this cable to outside of instrument.
- h. Remove four screws (two per side) that secure rear of CRT shield (MP65) to chassis.
- i. Gently move CRT and shield about two inches toward rear of instrument.
- j. Tilt shield up and gently lift CRT and shield out of the instrument.
- k. Loosen clamp screw at rear of shield and remove CRT from shield.

CAUTION

When removing or installing CRT, be careful not to bend CRT neck pins.

l. To reinstall CRT, reverse removal procedure; however, do not tighten clamp screw until after shield is secured with four screws and CRT is positioned against front mount. The shield does not have to press completely onto front mount.

8-15. HIGH-VOLTAGE POWER SUPPLY ASSEMBLY REMOVAL AND REPLACEMENT. To remove High-voltage Power Supply Assembly A15, see figure 6-1 and proceed as follows:

- a. Remove HV cover (MP54).
- b. Discharge high voltage by shorting test point A15TP1 to chassis.

WARNING

Failure to discharge high voltage can result in severe electrical shock to personnel and damage to the instrument.

- c. Disconnect two (6) wires and one (2) wire on FOCUS potentiometer A12R22 from A15.
- d. Disconnect (956) and (957) wires from rear of A15.

- e. Remove CRT socket cover (MP33).
- f. Disconnect CRT socket.
- g. Remove plug to HV oscillator, Q1. Note plug orientation (wires remain parallel from board to device).
- h. Disconnect Gate Amplifier Assembly A12 from Low-voltage Power Supply Assembly A16.
- i. Disconnect A15 from A12.
- j. Lift A15 and disconnect the (0) wire and the large wire from HV Multiplier Assembly A6.
- k. Remove A15.
- l. To reinstall A15, reverse removal procedure; remembering to again short (0) wire and large wire from HV multiplier as in step j.

WARNING

When performing next step, discharge high voltage by holding insulated part of wires and touching the two leads together.

8-16. HV MULTIPLIER ASSEMBLY REMOVAL AND REPLACEMENT. To remove HV Multiplier Assembly A6, see figure 6-1 and proceed as follows:

- a. Disconnect post-accelerator lead from CRT and immediately discharge lead to ground.

WARNING

Failure to discharge high voltage can result in severe electrical shock to personnel and damage to the instrument.

- b. Remove High-voltage Power Supply Assembly A15 (see paragraph 8-15).
- c. Remove bracket over A6 (two screws to chassis and two screws to rear panel).
- d. Lift bracket off large wire to A6.
- e. Disconnect post-accelerator lead cable clamp.
- f. Remove two screws securing A6 to chassis and remove A6.
- g. To reinstall A6, reverse removal procedure.

8-17. LOW-VOLTAGE POWER SUPPLY ASSEMBLY REMOVAL AND REPLACEMENT. To remove Low-voltage Power Supply Assembly A16, see figures 6-1 and 8-3 and proceed as follows:

NOTE

Removal of A16 is not necessary unless it must be replaced; all work can be performed with A16 in place except for repair or replacement of line selection and on-off switches.

- a. Remove Interface Assembly A14.
- b. Disconnect gate output wires (9) and (3).
- c. Disconnect two plugs to power transformer.
- d. Remove line cover (MP57) by removing two screws.
- e. Disconnect ac input leads (90) and (908).
- f. Disconnect five plugs to series regulators (Q2-6).
- g. Remove five screws holding A16 to chassis.
- h. Disconnect plug to Gate Amplifier Assembly A12.

i. Carefully lift A16 and move toward front of instrument. LINE switch shaft will protrude through front panel.

j. Unscrew LINE switch shaft and extract it.

k. Remove button from shaft; A16 can now be removed.

l. To reinstall A16, reverse removal procedure, except after A16 is secured in place, screw LINE switch shaft into switch (switch must be in "out" position) until slot is halfway through bezel, then press button onto shaft (refer to paragraph 8-18, figure 8-4).

8-18. GATE AMPLIFIER ASSEMBLY REMOVAL AND REPLACEMENT. To remove Gate Amplifier Assembly A12, see figures 6-1 and 8-4 and proceed as follows:

a. Remove HVPS cover (MP54).

b. Disconnect nine wires on component side of A12.

c. Disconnect two (6) wires and one (2) wire from FOCUS potentiometer to A15 (HVPS).

d. Disconnect (9) Z-axis wire on rear of A12.

e. Remove FOCUS and INTENSITY shafts from potentiometers using small hex wrench (Allen 050).

f. Disconnect A12 from A16 (LVPS).

g. Disconnect A12 from A15 (HVPS).

h. Remove BEAM FIND shaft by pushing A12 forward so that button clears front panel and unscrew shaft.

i. Remove button from shaft.

j. Remove A12.

k. To reinstall A12, reverse the removal procedure, except install BEAM FIND shaft and adjust so slot is halfway through bezel after HVPS cover (MP54) is secured; then install button.

8-19. VERTICAL OUTPUT AMPLIFIER ASSEMBLY REMOVAL AND REPLACEMENT. To remove Vertical Output Amplifier Assembly A5, see figure 8-5 and proceed as follows:

a. Disconnect delay line wires (4), (6), and (0) from back of A5.

b. Disconnect CRT leads (3) and (9).

c. Disconnect plug to Vertical Preamplifier Assembly A3 (push down gently on A3).

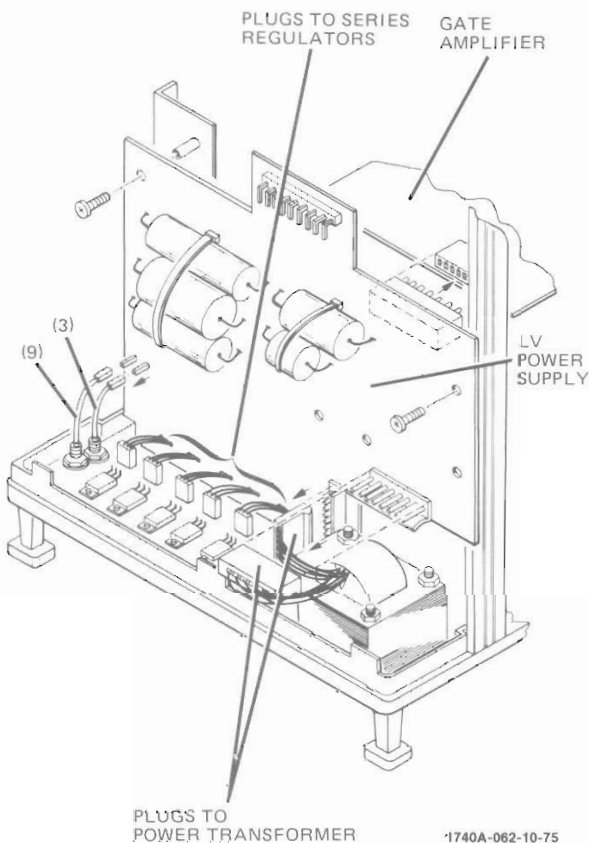


Figure 8-3. LV Power Supply Removal

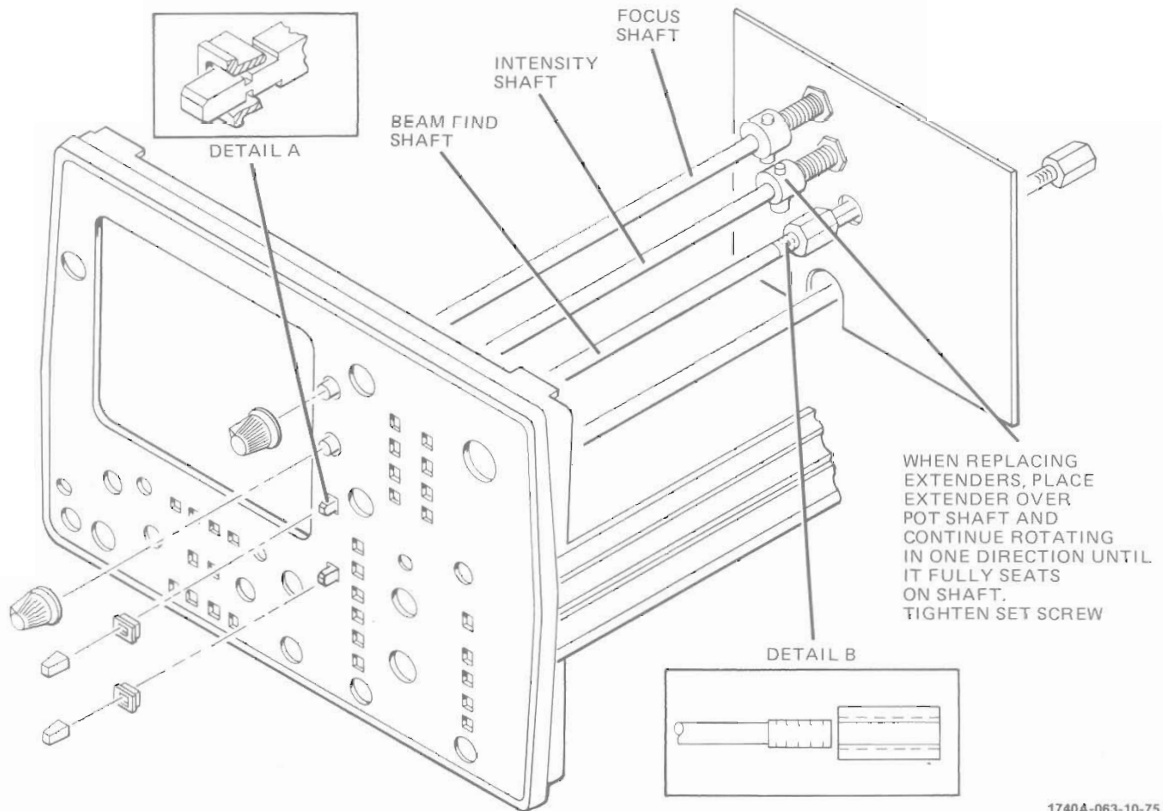


Figure 8-4. Gate Amplifier Assembly Removal

1740A-063-10-75

- d. Remove four screws that hold A5 and bracket to chassis, and remove assembly.
- e. Remove two screws holding A5 to bracket and heat sink, and remove board.
- f. To reinstall A5, reverse removal procedure.

8-20. Vertical Output Amplifier IC A5A1 Removal and Replacement. To remove A5A1, see figure 8-6 and proceed as follows:

- a. Remove Vertical Output Amplifier A5 as described in paragraph 8-19.
- b. A5A1 can be removed from heat sink. (Heat sink can remain on bracket or be removed.)
- c. To reinstall A5A1, reverse the removal procedure, being certain to note orientation of parts as shown in figure 8-6.

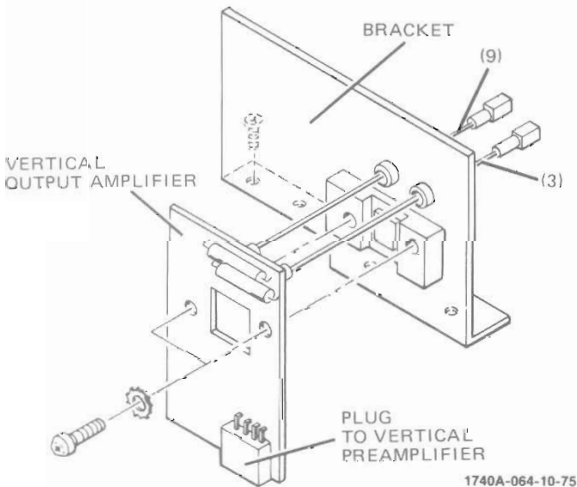


Figure 8-5. Vertical Output Amplifier Removal

1740A-064-10-75

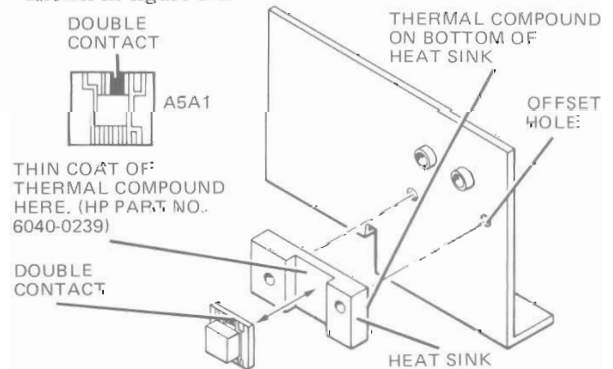


Figure 8-6. A5A1 Removal

1740A-065-10-75

8-21. VERTICAL PREAMPLIFIER ASSEMBLY A3, DELAY LINE ASSEMBLY A4, AND VERTICAL CONTROL SWITCHING ASSEMBLY A13 REMOVAL AND REPLACEMENT. To remove A3, A4, and A13 Assemblies, proceed as follows:

- a. Disconnect Interface Assembly A14.
- b. Remove channel A and B POS, vernier, coupling, and VOLTS/DIV knobs.
- c. Remove nuts and washers from both input BNC connectors.
- d. Disconnect (9) wire from calibrator output.
- e. Disconnect delay line wires (4), (6), and (0) from rear of Vertical Output Amplifier A5.
- f. Remove delay line clamp screw from chassis.
- g. Disconnect twin leads (3, 4) and (1, 9) at Horizontal Sweep Assembly A7.
- h. Remove channel A attenuator shield by removing three screws.
- i. Remove screw that connects Horizontal Sweep Assembly A7, shield, and A3 together. This screw is close to point where (1, 9) twin lead attaches to A7.
- j. Disconnect plug to A5.
- k. Carefully tilt A3 outward and extract toward rear.
- l. Disconnect vernier UNCAL light cable (95), (96), and two (0) wires.
- m. To reinstall, reverse removal procedure.

8-22. Vertical Control Switching Assembly A13 Removal and Replacement. To remove A13 assembly, proceed as follows:

- a. Remove A3 assembly as described in paragraph 8-21.
- b. Disconnect wires (4) and (9) from channel A and B vernier potentiometers (total of four wires).
- c. Disconnect wires (3), (93), (913), (7), and (8) from front of A13.
- d. Remove screw on component side of A3 that screws into standoff on A13 near delay line.
- e. Disconnect two plugs to Vertical Preamplifier Assembly A3.
- f. To reinstall A13, reverse removal procedure.

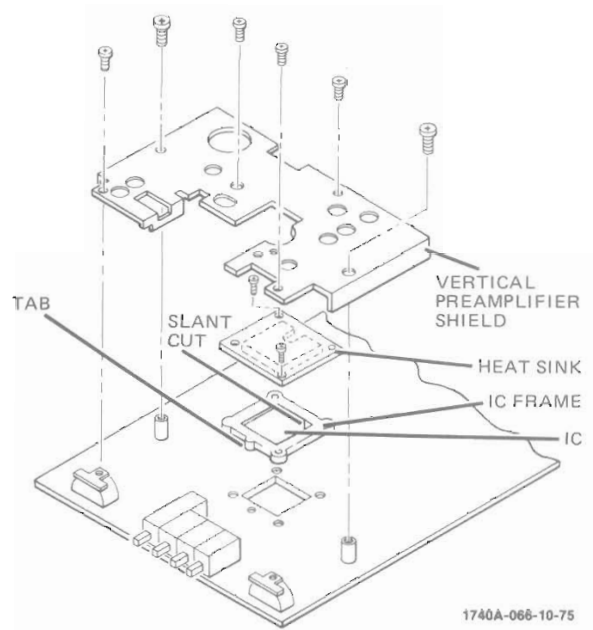


Figure 8-7. A3A1 Removal

8-23. Vertical Preamplifier IC A3A1 Removal and Replacement. To remove assembly A3A1, see figure 8-7 and proceed as follows:

- a. Disconnect twin lead (2, 6).
- b. Remove six screws that hold vertical preamplifier shield (MP45) to vertical preamplifier A3, and remove shield.
- c. Remove two remaining screws that hold heat sink (MP61) to A3.
- d. Lift heat sink off IC frame (MP26).
- e. Lift IC frame and IC off A3.
- f. To reinstall IC, reverse removal procedure; be certain that orientation of parts is as shown in figure 8-7.

8-24. MAIN SWEEP ASSEMBLY AND DELAYED SWEEP ASSEMBLY REMOVAL AND REPLACEMENT. To remove Main Sweep Assembly A8 and Delayed Sweep Assembly A9, proceed as follows:

- a. Loosen hex screws on the three shaft collars.
- b. Set MAIN TIME/DIV to 1 μ SEC and DLY'D TIME/DIV to OFF.
- c. Sweep time shaft can now be removed.

d. Remove A8 by pulling from socket.

e. Remove A9 by gently rocking board toward rear of instrument to disconnect it from the two connectors.

8-25. HORIZONTAL OUTPUT ASSEMBLY REMOVAL AND REPLACEMENT. To remove Horizontal Output Assembly A11, proceed as follows:

a. Disconnect (2) and (9) wires from A11.

b. Remove A11 from connector by first pulling top of A11 away from Horizontal Sweep Assembly A7 and then pulling bottom of A11.

c. To reinstall A11, reverse the removal procedure.

8-26. HORIZONTAL SWEEP ASSEMBLY REMOVAL AND REPLACEMENT. To remove Horizontal Sweep Assembly A7, proceed as follows:

a. Remove assemblies A8 and A9 (paragraph 8-24).

b. Remove assembly A11 as explained in paragraph 8-25.

c. Unsolder resistor from main EXT TRIGGER BNC connector J1.

d. Remove two cable connector plugs.

e. Remove twin leads (3, 4) and (1, 9).

f. Remove main TRIGGER LEVEL knob and nut from potentiometer.

g. Remove Interface Assembly A14.

h. Remove four screws holding A7 to sheet metal (figure 8-8).

i. Remove A7 by pulling it toward rear and tilting away from sheet metal deck. Save lockwasher on trigger level potentiometer for reinstallation.

j. To reinstall, reverse the removal procedure, except install four screws (step h) without tightening them until nut on TRIGGER LEVEL potentiometer (step f) is tightened. Lockwasher must be in place on TRIGGER LEVEL potentiometer before inserting in panel.

8-27. DELAYED TRIGGER ASSEMBLY REMOVAL AND REPLACEMENT. To remove the Delayed Trigger Assembly A10, proceed as follows:

a. Remove Delayed Sweep Assembly A9 (paragraph 8-24).

b. Unsolder resistor from delayed EXT TRIGGER BNC connector.

c. Remove delayed TRIGGER LEVEL knob and nut underneath.

d. Remove screw from A10 (corner next to delayed EXT TRIGGER BNC connector).

e. Gently pull A10 to rear and remove from instrument. Save lockwasher on TRIGGER LEVEL potentiometer for reinstallation.

f. To reinstall A10, reverse removal procedure; lockwasher must be in place on TRIGGER LEVEL potentiometer before inserting it in front panel.

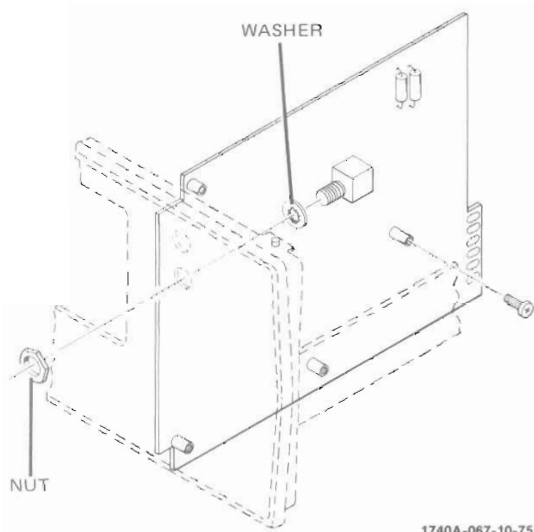


Figure 8-8. Location of A7 Attaching Screws

8-28. CIRCUIT BOARD REPAIRS.

8-29. The following paragraphs provide information for repairing etched circuit boards.

8-30. BOARD CONNECTIONS. Square-pin connectors are identified on circuit boards by color code of connecting wire or by the signal name. Each connector pin on plugs and jacks are identified by either a numeral of a letter; letters G, I, O, and Q are not used.

8-31. SOLDERING. All the etched circuit boards have plated-through component holes. This allows soldered-in components to be removed or replaced from either side of the board. When removing or replacing a semiconductor, use long-nosed pliers as a heat sink between the device and the soldering iron. See figure 8-9 for more information on semiconductors. HP Service Note M-20E contains additional information for repair of etched circuit boards.

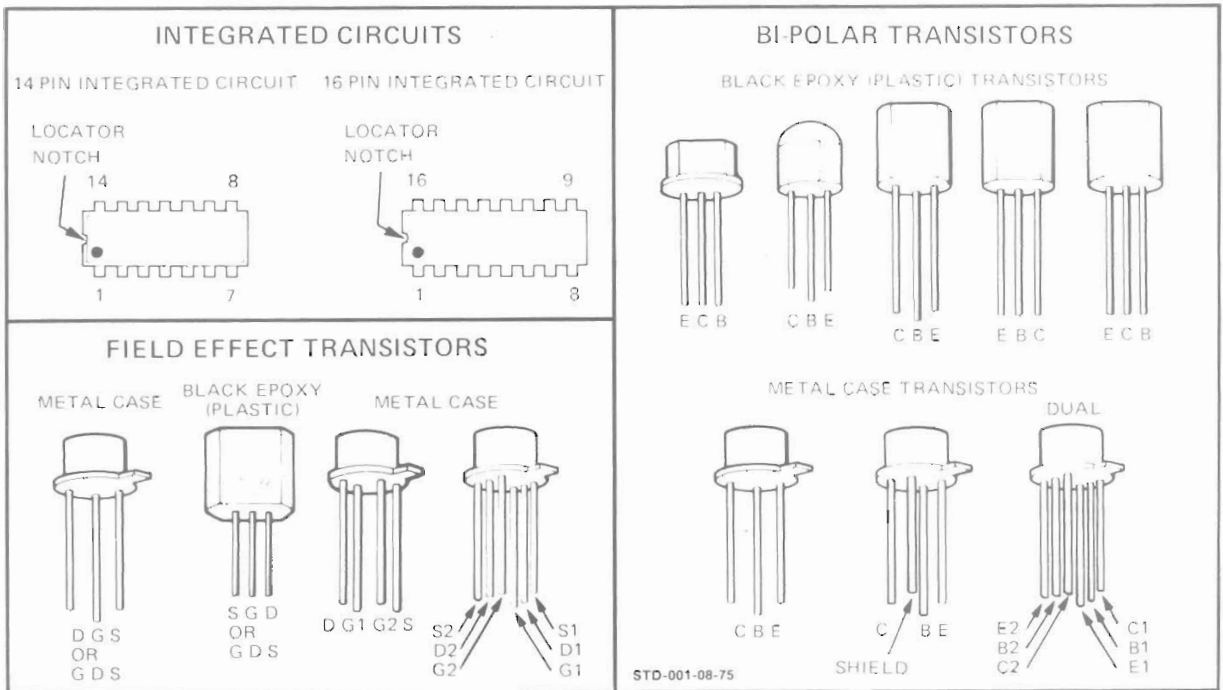


Figure 8-9. Semiconductor Terminal Identification

8-32. INTEGRATED CIRCUIT REMOVAL AND REPLACEMENT. The integrated circuits (IC's) in this instrument are plug-in types. Remove a plug-in integrated circuit with a straight pull away from the board. When replacing an integrated circuit, note the mark or notch used for pin number identification (see figure 8-9).

CAUTION

Unless an integrated circuit has definitely failed, be careful to prevent damage when removing or replacing it.

8-33. TROUBLESHOOTING.

WARNING

Read the Safety Summary at the front of this manual before troubleshooting the instrument.

8-34. Two important prerequisites for successful troubleshooting are: (1) understanding how the instrument is designed to operate and (2) knowing the correct use of front-panel controls. Improper control settings or circuit connections can cause apparent malfunctions. Read Section III for an explanation of controls, connectors, and general operating considerations. Read Section IV for circuit theory and principles of operation.

8-35. If trouble is suspected, visually inspect the instrument. Look for loose or burned components that

may suggest a source of trouble. Verify that all circuit board connections are making good contact and are not shorting to an adjacent circuit. If no obvious trouble is found, check power supply voltages in the instrument; also check the external power source.

8-36. INITIAL TROUBLESHOOTING PROCEDURE. Before troubleshooting the Model 1740A in detail, try to perform the adjustment procedures listed in Section V of this manual. Some apparent malfunctions may be corrected by these adjustments, or failure to obtain a correct adjustment will often reveal the source of trouble.

8-37. DC VOLTAGES AND WAVEFORMS. Dc voltages, waveforms, and conditions for making these measurements are given on or adjacent to the schematics. Since conditions for making the measurements may differ from one circuit to another, always check the specific conditions listed for each schematic.

8-38. TROUBLE DIAGNOSIS. By the use of front-panel controls, note as many symptoms of the malfunction as possible. From these symptoms it can usually be determined which section (vertical, horizontal, power supplies, or high voltage) is malfunctioning. But even if the problem is in the vertical or horizontal section, it is still good practice to check the low-voltage power supplies, since an out-of-tolerance supply can affect the operation of other circuits. Table 8-1 lists the sequence of checks that should be used when troubleshooting.

Table 8-1. Troubleshooting Sequence

| CHECK | COMMENT |
|--------------------------------|---|
| 1. LVPS | All other functions rely on LVPS for proper operation. |
| 2. CRT & HVPS | All high voltages and CRT must function to obtain a display. |
| 3. GATE AMPLIFIER | CRT must be unblanked to display signal. |
| 4. VERTICAL SECTION | After obtaining a visible beam, begin checking deflection circuitry. |
| 5. HORIZONTAL OUTPUT AMPLIFIER | To distinguish between time base and horizontal output amplifier problems, apply signal to channel B (in A VS B mode); if deflection occurs, horizontal output amplifier is operating properly. |
| 6. SWEEP | After checking horizontal output amplifier, check ramp generating circuitry (in AUTO mode). When auto sweep is operating properly, check trigger circuit. |

8-39. LOW-VOLTAGE POWER SUPPLY. All voltages: +5 V, +43 V, +120 V, -15 V, and the high voltage are referenced to the +15 V supply, so it must be made operational first. The supplies are current-limiting type, so any excessive loading from the vertical, horizontal, etc., will cause the supply to read 20 to 30% low.

8-40. To quickly check if an external load is causing Low-voltage Power Supply A16 to current-limit and read low, remove Interface Assembly A14 that connects the power supply to Vertical Preamplifier A3 and Horizontal Sweep Assembly A7. If the supplies return to normal, then an external short is definitely loading the supply. Assembly A3 can be flexed upward, so A14 can be connected between assemblies A16 and A7. This will help determine if the problem is on A3 or A7. It is also possible to disconnect the Gate Amplifier A12 and HV Power Supply A15, from assembly A16 by disconnecting A15 from the bottom of A16.

8-41. HIGH-VOLTAGE POWER SUPPLY AND CRT. To troubleshoot HV Power Supply A15, remove the HV cover and reinstall the two screws closest to the rear of the instrument. This provides the necessary ground connections for assembly A15.

WARNING

Use extreme care when working on an active high-voltage power supply.

8-42. The high-voltage oscillator, collector, and base waveform measurements are accessible directly on assembly A15, as well as control grid and cathode voltages. A high voltage disable circuit turns off the oscillator if the +120 V supply drops to less than +100 V.

This protects the CRT from high beam current and burns.

8-43. If grid and cathode voltages are present on A15, verify that voltages are present at the CRT socket; a faulty socket or wire can cause an open circuit.

CAUTION

When measuring high voltages, always use a 1000:1 probe with an impedance of 100 M Ω or greater.

8-44. Common CRT problems consists of open filaments, grid-cathode shorts (uncontrollable beam), and "hollow cathodes", sometimes referred to as "double-peaking". Hollow cathodes can be detected by increasing intensity. As the intensity knob is rotated clockwise, the beam will get brighter, up to a point; beyond this point it will decrease in brilliance and may defocus.

8-45. If the high voltage is low, and low voltages are correct, check for a faulty high-voltage transformer, leaky capacitors, or resistors that may have changed in value (typical problem with extremely large resistors - 30 M Ω , etc.).

8-46. Faulty high-voltage multipliers usually cause the display to be of low intensity and out of focus. Multipliers can sometimes be checked by measuring the output with a high-voltage probe.

8-47. GATE AMPLIFIER. Malfunctions in Gate Amplifier Assembly A12 will usually be transistor failures in output driver stages. At high intensity levels, these transistors are sometimes operating at fairly high voltages and are therefore subject to failure.

8-48. VERTICAL SECTION. Problems in the vertical amplifier may show up as a variety of symptoms. Low gain problems may be located by applying an input signal and monitoring it through the various stages (refer to waveforms adjacent to schematics). Attenuator problems may be either on the attenuator itself or within the vertical preamplifier substrate A3A1.

8-49. Problems can be isolated to either substrate A3A1 or to Vertical Output Assembly A5 by pressing TRIG VIEW on the front panel while applying a known signal to the main EXT TRIGGER input. If it is displayed properly (approximately 100 mV/div), this indicates that assembly A5 is operating properly and the problem is in substrate A3A1.

8-50. Bandwidth, rise time, or pulse response problems can be caused by dirty CRT neck pins or by a faulty delay line. However, they are most likely caused by defective amplifiers or improper adjustment.

8-51. HORIZONTAL OUTPUT AMPLIFIER. If no horizontal deflection can be obtained under normal sweep conditions, the problem may be either in the time base or Horizontal Output Assembly A11. To quickly determine which is at fault, put the oscilloscope in the A VS B mode and connect a 1-kHz sine wave to the channel B input. If horizontal deflection is present, the horizontal amplifier (and sync amplifier) are operating properly and the problem is in the time base. If no horizontal deflection occurs, then assembly A11 is probably defective.



8-52. TIME BASE. Troubleshooting the time base can be difficult since it is a closed loop circuit and waveforms may be nonexistent in any part of the loop. Table 8-2 will help analyze problems under a no-sweep condition. Select main sweep, set the main TIME/DIV control to .1 mSEC, and put all other time base push-buttons in the out position. This puts the time base in an auto sweep mode. Set INTENSITY to approximately midrange and set FOCUS fully CCW.

Table 8-2. Time Base Troubleshooting

| INDICATION | PROBLEM CAUSE |
|--|---|
| Is baseline present? | YES - Check input circuitry (HF/LF amplifiers or sync amplifier) NO - Proceed to next step |
| RESET Lamp OFF Beam OFF Beam position left (Using BEAM FIND) | Check reset/holdoff circuitry |
| RESET Lamp OFF Beam OFF Beam position right (Using BEAM FIND) | Check Miller integrator and associated circuitry |
| RESET Lamp OFF Beam ON | With RESET lamp OFF, beam should NEVER be ON. Check gate amplifier circuitry and CRT for grid-cathode short; then return to time base troubleshooting |
| RESET Lamp ON Beam OFF | With RESET lamp ON, beam should also be ON. Check gate amplifier and HVPS; then return to time base to repair second problem. |
| RESET Lamp ON Beam ON (Left side) | Check Miller integrator and associated circuitry |
| RESET Lamp ON Beam ON (Right side) | Check sweep reset circuitry |

Table 8-3. Schematic Notes

REFER TO ANSI Y 32.2 AND Y32.14 FOR SCHEMATIC SYMBOLS NOT LISTED IN THIS TABLE.

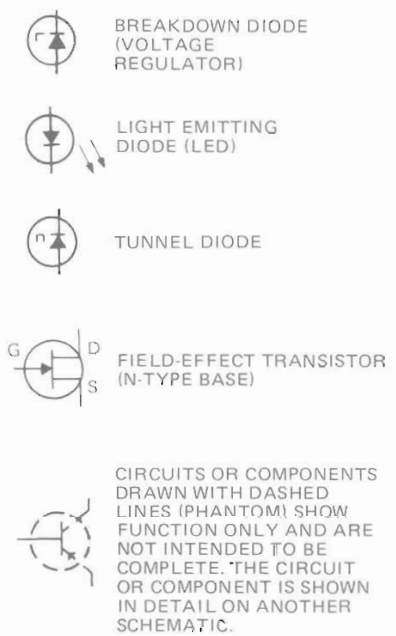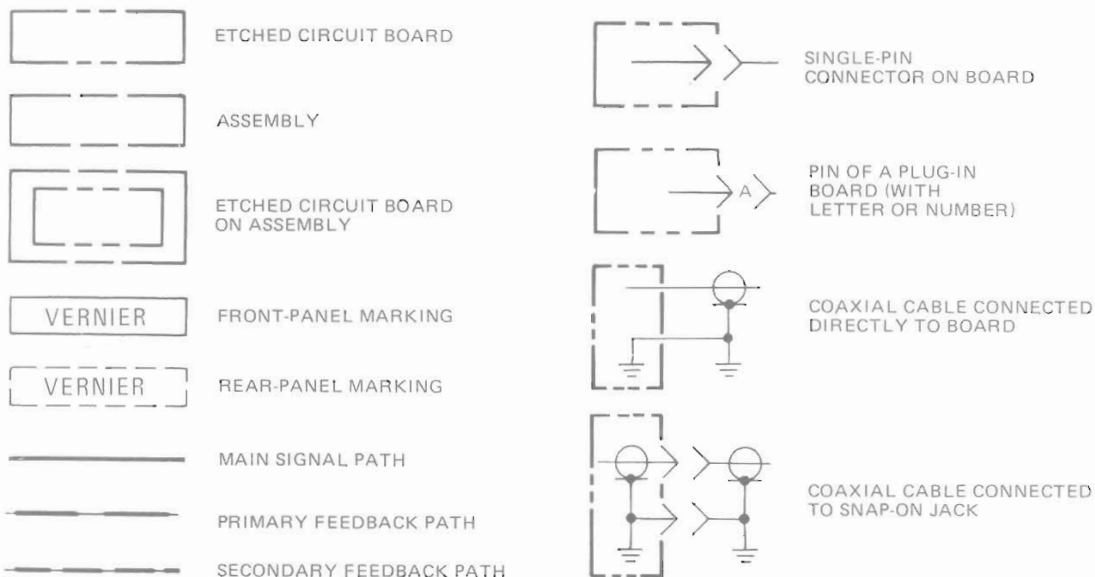

(925) WIRE COLORS ARE GIVEN BY NUMBERS IN PARENTHESIS USING THE RESISTOR COLOR CODE

(925) IS WHT-RED-GRN


| | |
|------------|------------|
| 0 - BLACK | 5 - GREEN |
| 1 - BROWN | 6 - BLUE |
| 2 - RED | 7 - VIOLET |
| 3 - ORANGE | 8 - GRAY |
| 4 - YELLOW | 9 - WHITE |

* OPTIMUM VALUE SELECTED AT FACTORY, TYPICAL VALUE SHOWN; PART MAY HAVE BEEN OMITTED.

UNLESS OTHERWISE INDICATED: RESISTANCE IN OHMS, CAPACITANCE IN PICOFARADS AND INDUCTANCE IN MICROHENRIES

CW CLOCKWISE END OF VARIABLE RESISTOR
 NC NO CONNECTION
 P/D PART OF


VF (A) V - VOLTAGE
 F - FILTERED
 (A) - FILTER SOURCE

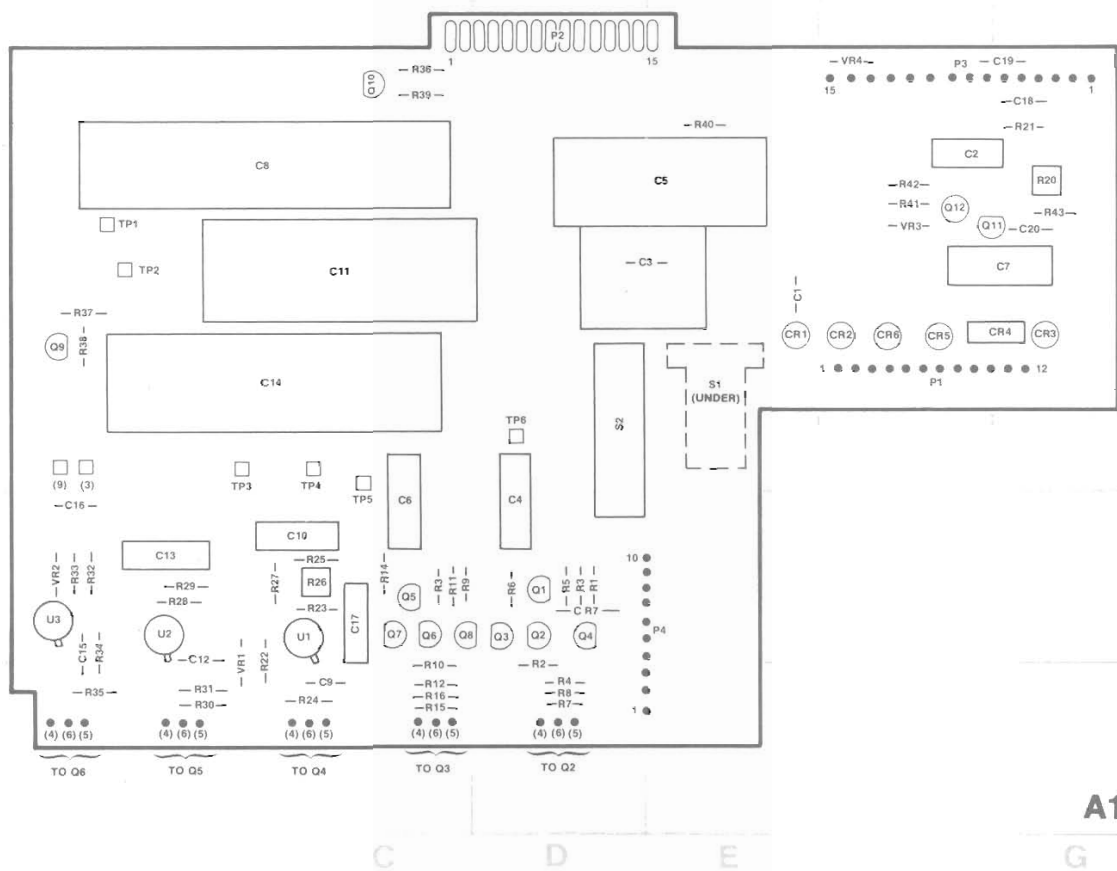

1740A-069-01-07-76

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | E-2 | C14 | B-3 | P1 | F-3 | Q11 | F-2 | R13 | C-4 | R30 | B-5 | S2 | D-3 |
| C2 | F-2 | C15 | A-4 | P2 | D-1 | Q12 | F-2 | R14 | C-4 | R31 | B-5 | TP1 | A-2 |
| C3 | E-2 | C16 | A-4 | P3 | F-1 | R1 | D-4 | R15 | C-5 | R32 | A-4 | TP2 | B-2 |
| C4 | D-3 | C17 | C-4 | P4 | E-4 | R2 | D-4 | R16 | C-5 | R33 | A-4 | TP3 | B-3 |
| C5 | E-2 | C18 | G-1 | Q1 | D-4 | R3 | D-4 | R20 | G-2 | R34 | A-4 | TP4 | C-3 |
| C6 | C-3 | C19 | G-1 | Q2 | D-4 | R4 | D-5 | R21 | G-1 | R35 | A-5 | TP5 | C-3 |
| C7 | G-2 | C20 | G-2 | Q3 | D-4 | R5 | D-4 | R22 | B-5 | R36 | C-1 | TP6 | D-3 |
| C8 | B-2 | CR1 | E-3 | Q4 | D-4 | R6 | D-4 | R23 | C-4 | R37 | A-2 | U1 | C-4 |
| C9 | C-5 | CR2 | F-3 | Q5 | C-4 | R7 | D-5 | R24 | C-5 | R38 | A-3 | U2 | B-4 |
| C10 | C-4 | CR3 | G-3 | Q6 | C-4 | R8 | D-5 | R25 | C-4 | R40 | C-1 | U3 | A-4 |
| C11 | C-2 | CR4 | G-3 | Q7 | C-4 | R9 | D-4 | R26 | C-4 | R41 | F-2 | VR1 | B-5 |
| C12 | B-4 | CR5 | F-3 | Q8 | D-4 | R10 | C-5 | R27 | C-4 | R42 | F-2 | VR2 | A-4 |
| C13 | B-4 | CR6 | F-3 | Q9 | A-3 | R11 | C-4 | R28 | B-4 | R43 | G-2 | VR3 | F-2 |
| | | CR7 | D-4 | Q10 | C-1 | R12 | C-5 | R29 | B-4 | S1 | E-3 | VR4 | F-1 |

Figure 8-10. Service Information, Low-voltage Power Supply Assembly A16 (Sheet 1 of 2)

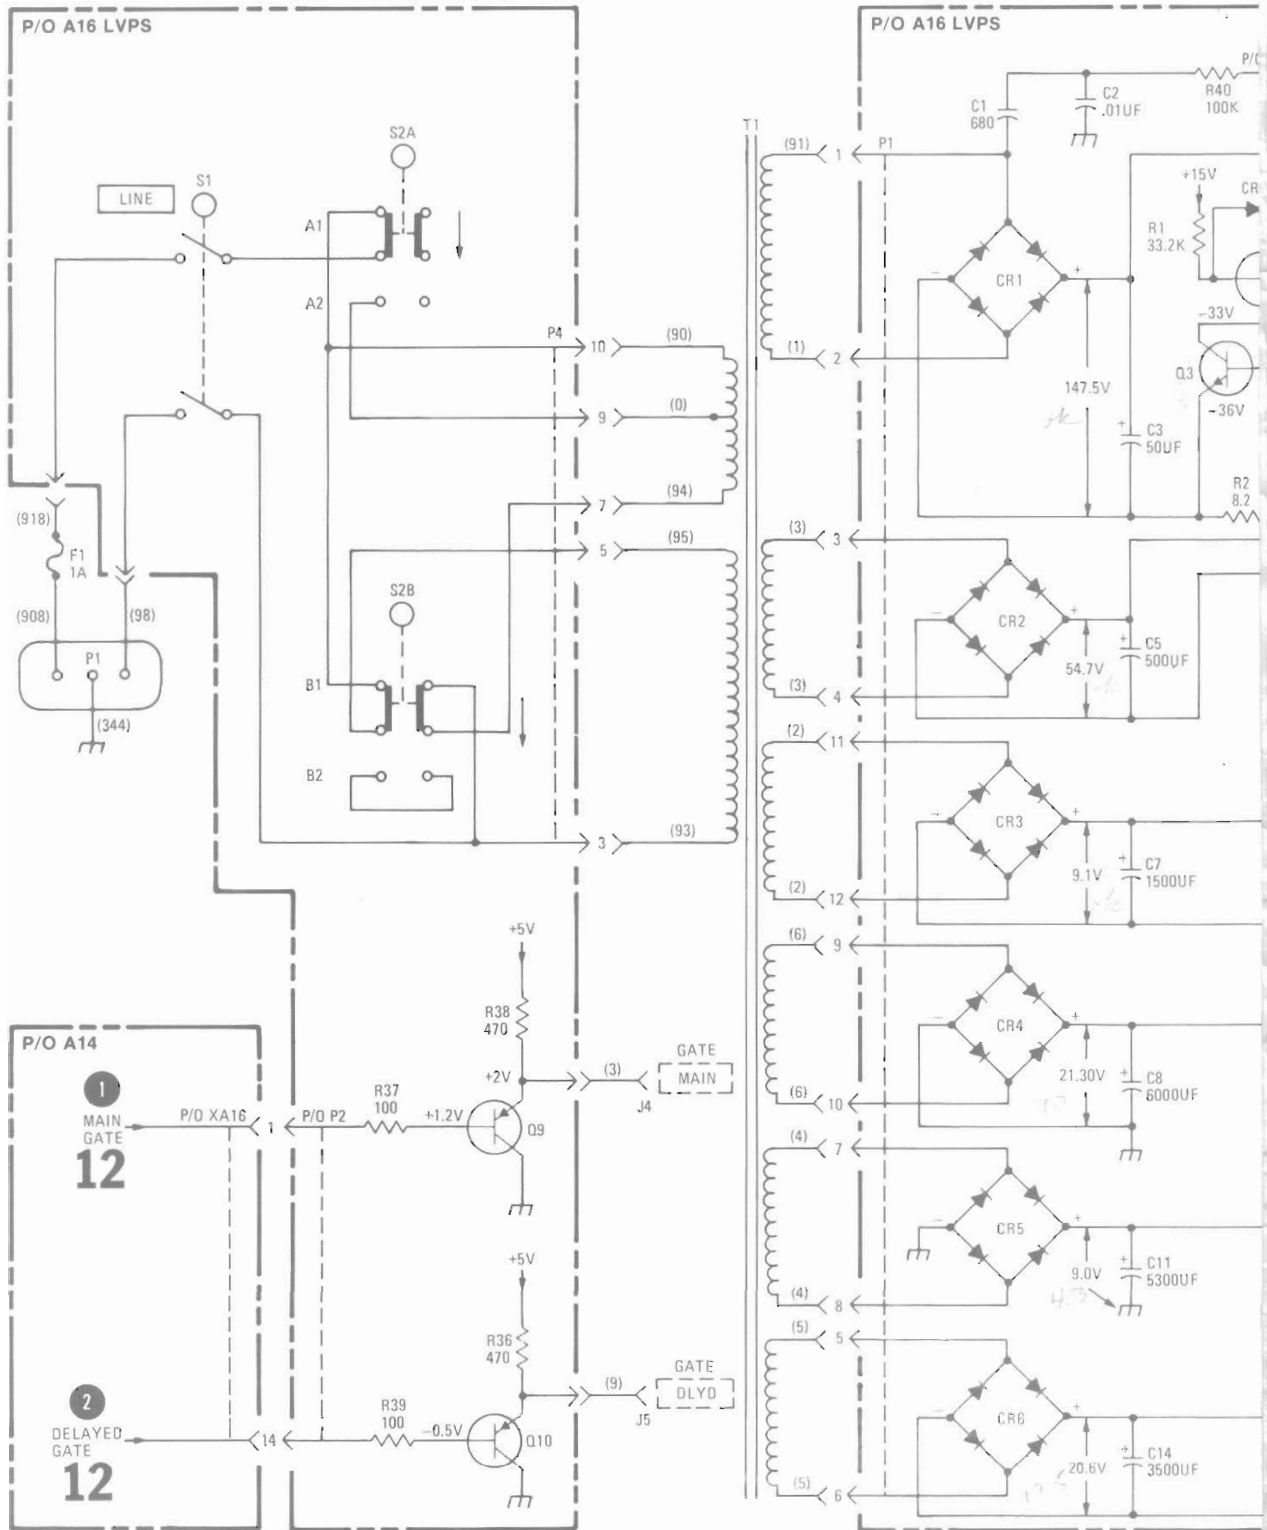


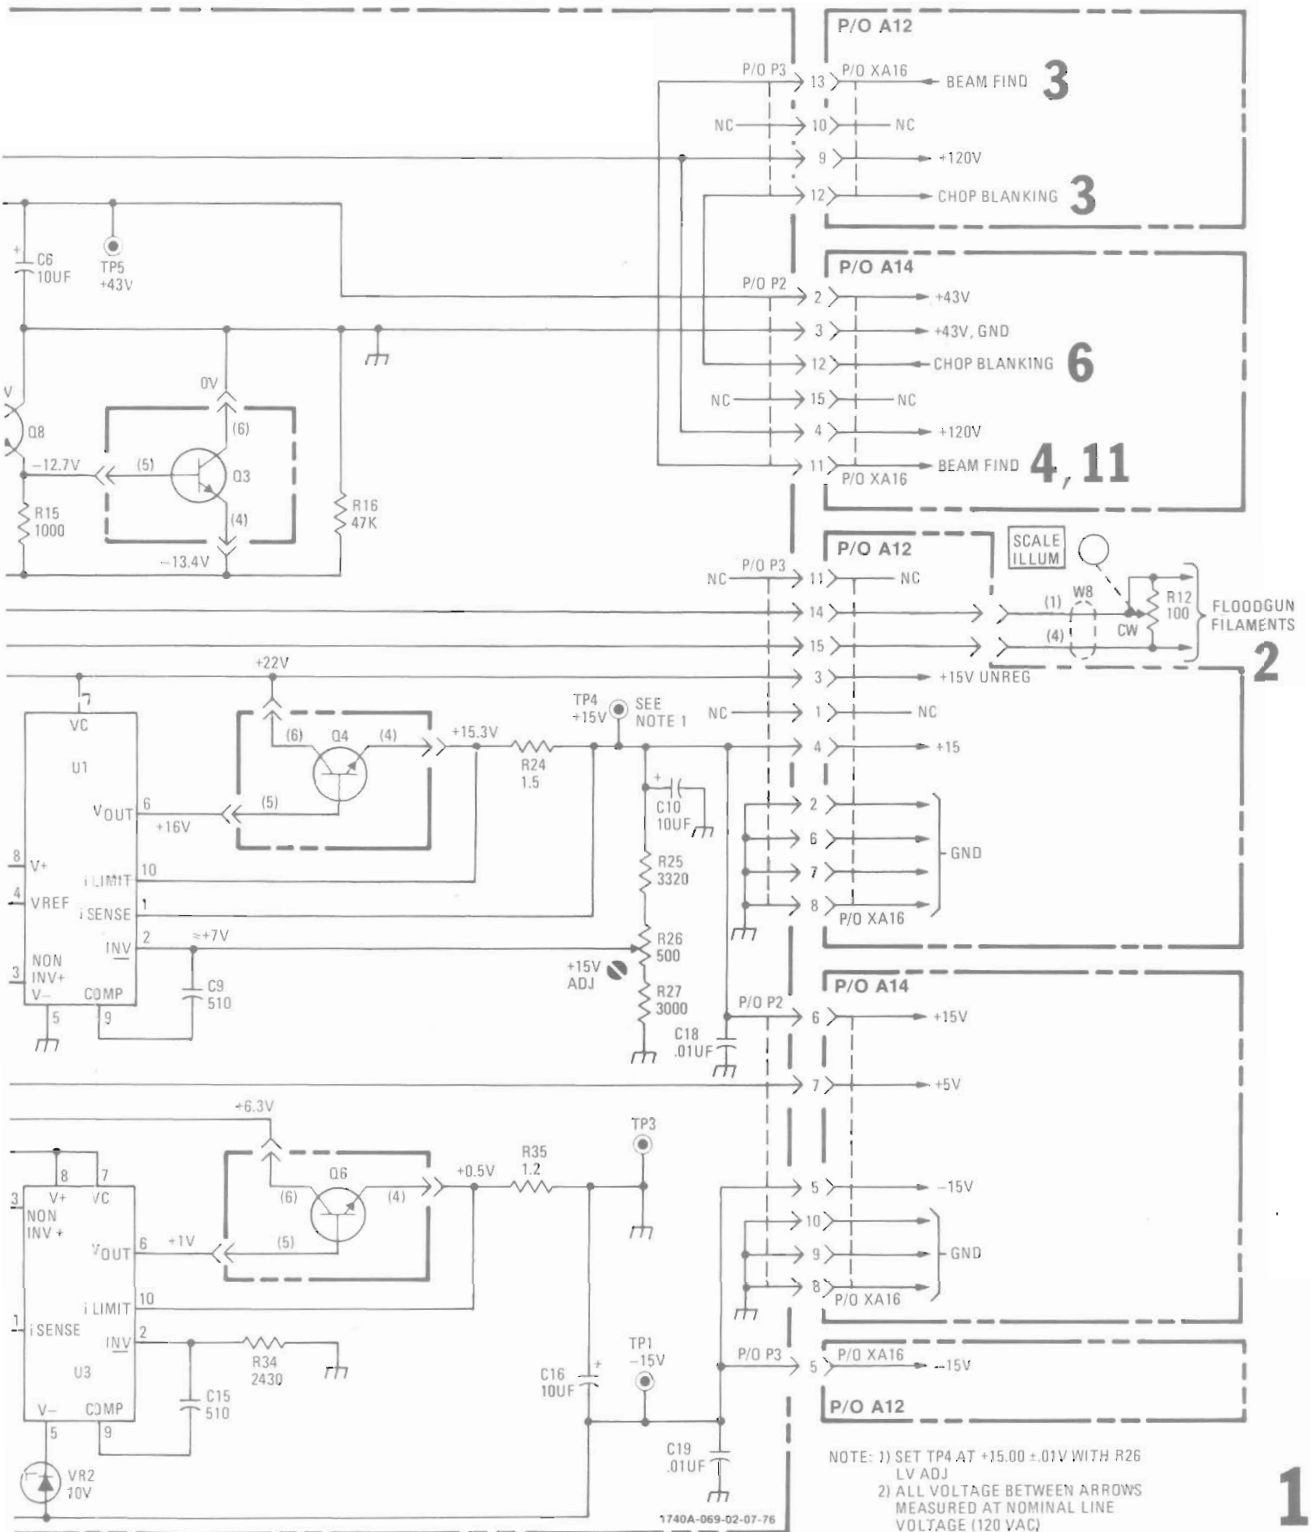


Figure 8-10.
 Service Information, Low-voltage Power Supply Assembly A16 (Sheet 2 of 2)
 8-13

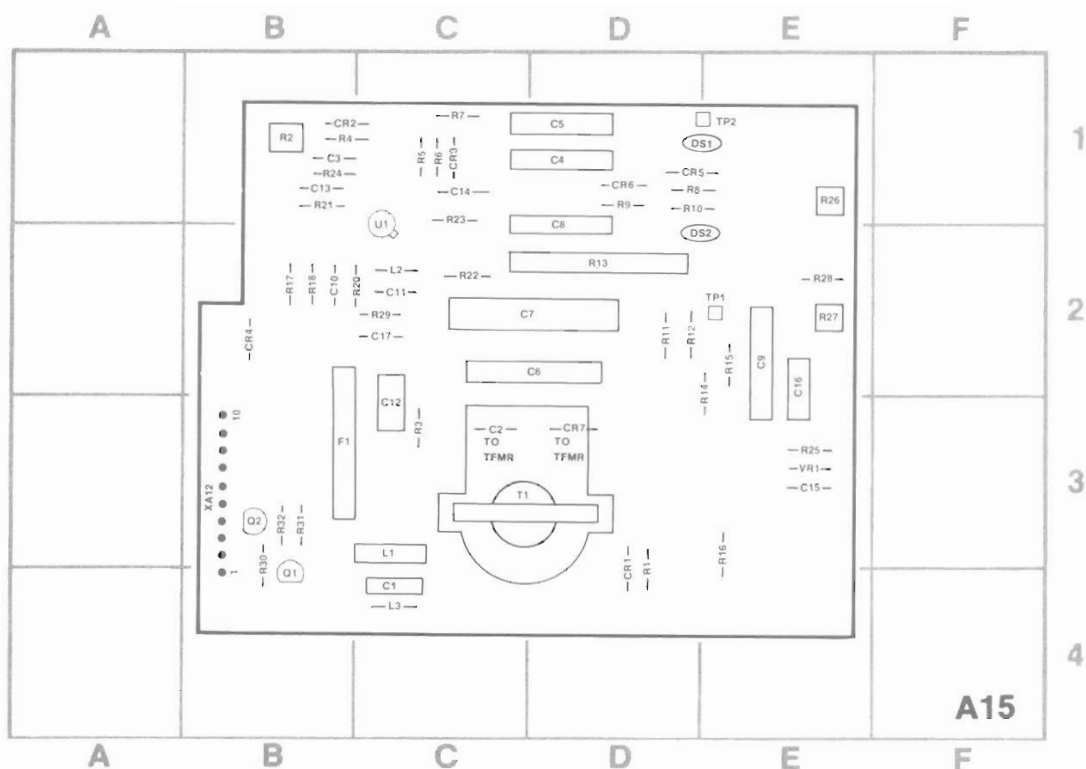

1740A-070-10-75

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | C-4 | C11 | C-2 | CR4 | B-2 | Q1 | B-4 | R9 | D-1 | R20 | B-2 | R30 | B-3 |
| C2 | C-3 | C12 | C-3 | CR5 | D-1 | Q2 | B-3 | R10 | D-1 | R21 | B-1 | R31 | B-3 |
| C3 | B-1 | C13 | B-1 | CR6 | D-1 | R1 | D-4 | R11 | D-2 | R22 | C-2 | R32 | B-3 |
| C4 | D-1 | C14 | C-1 | CR7 | D-3 | R2 | B-1 | R12 | D-2 | R23 | C-1 | T1 | C-3 |
| C5 | D-1 | C15 | E-3 | DS1 | E-1 | R3 | C-3 | R13 | D-2 | R24 | B-1 | TP1 | E-2 |
| C6 | D-2 | C16 | E-2 | DS2 | D-2 | R4 | B-1 | R14 | E-2 | R25 | E-3 | TP2 | E-1 |
| C7 | D-2 | C17 | C-2 | F1 | B-3 | R5 | C-1 | R15 | E-2 | R26 | E-1 | U1 | C-2 |
| C8 | D-2 | CR1 | D-4 | L1 | C-3 | R6 | C-1 | R16 | E-3 | R27 | E-2 | VR1 | E-3 |
| C9 | E-2 | CR2 | B-1 | L2 | C-2 | R7 | C-1 | R17 | B-2 | R28 | E-2 | XA12 | B-3 |
| C10 | B-2 | CR3 | C-1 | L3 | C-4 | R8 | D-1 | R18 | B-2 | R29 | C-2 | | |

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 2**


1. Set front-panel controls in accordance with initial control settings in Section V.
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variations from those indicated should be considered normal.

WARNING

Voltages in the HIGH VOLTAGE Area are dangerous to life. Use extreme care in making measurements and observe precautions listed in the SAFETY SUMMARY at the front of this manual.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 2**


1. Set front-panel controls in accordance with initial control settings in Section V.
2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).

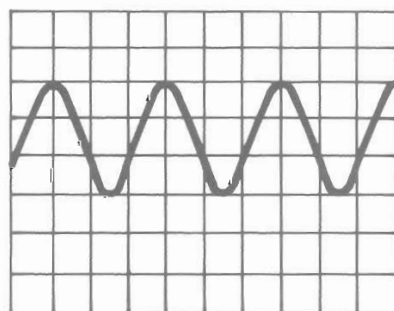

10 V/DIV
10 μ SEC/DIV

1740A-071-01-10-75

Figure 8-11. Service Information, High-voltage Power Supply Assembly A15 (Sheet 1 of 2)

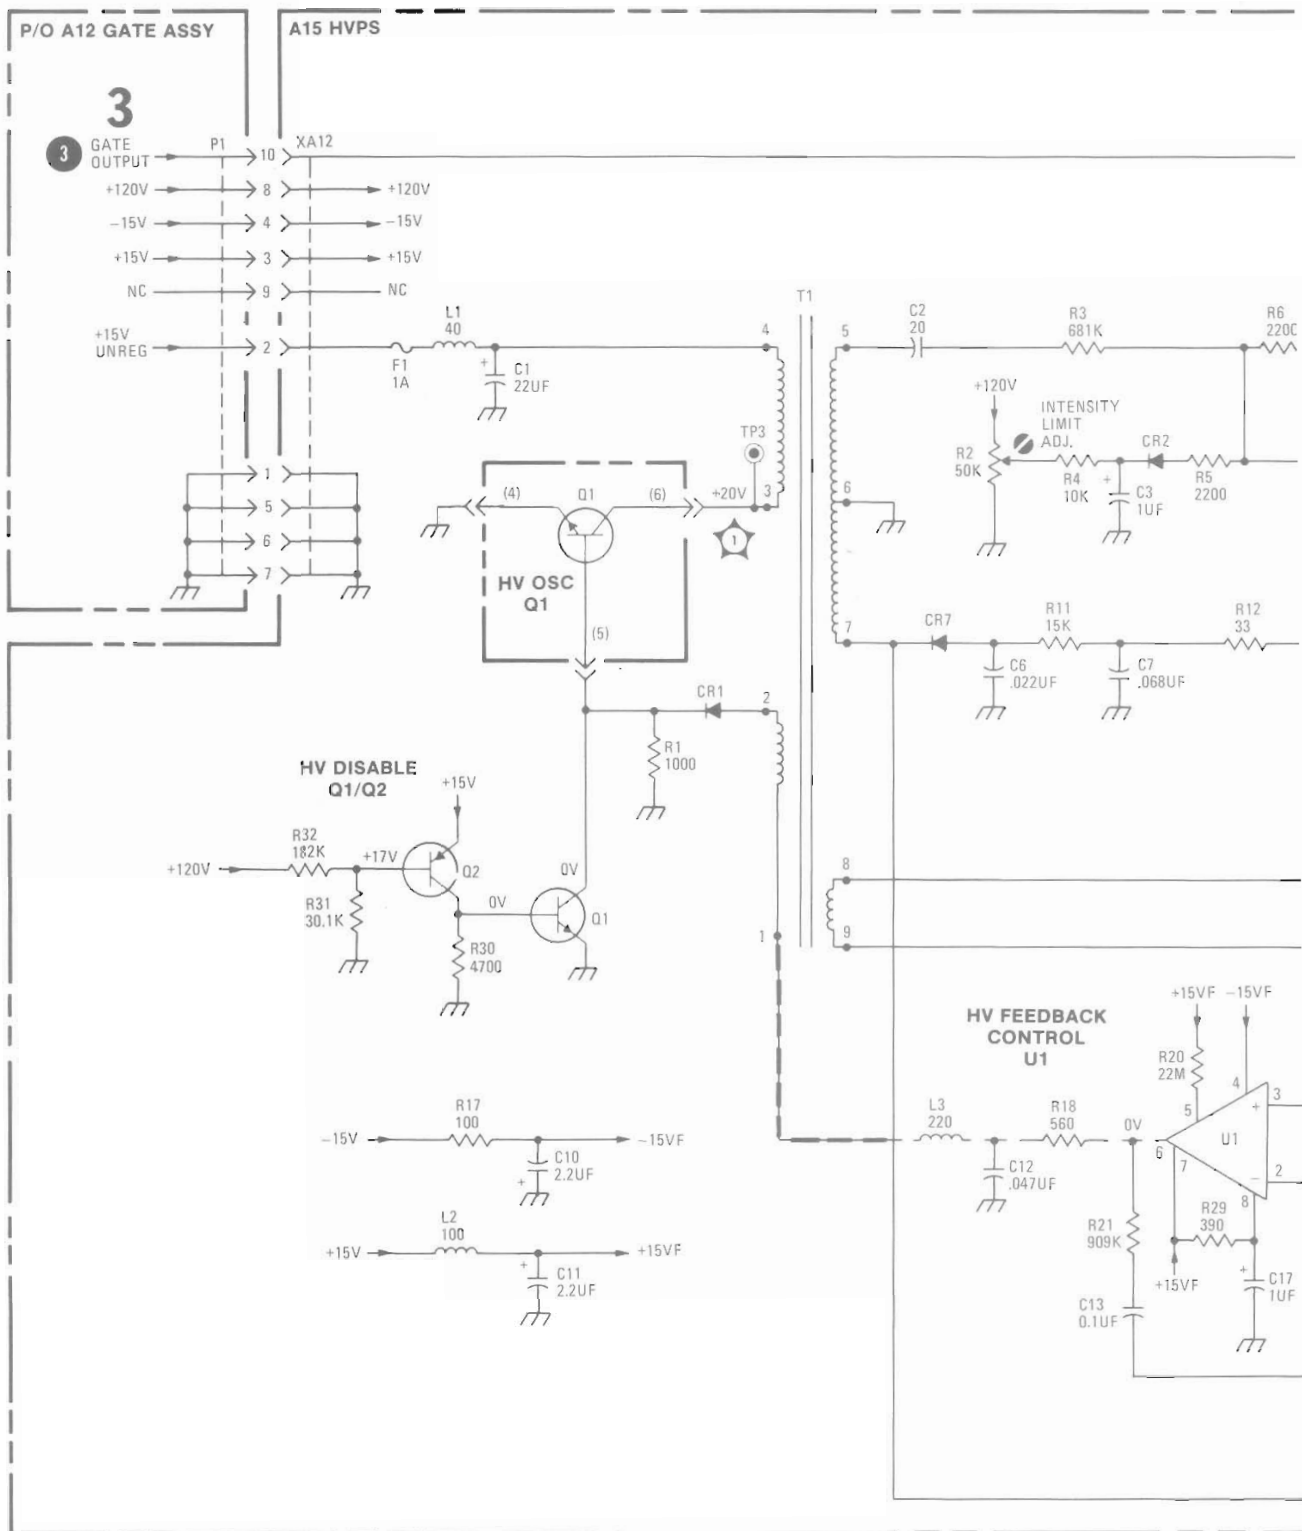


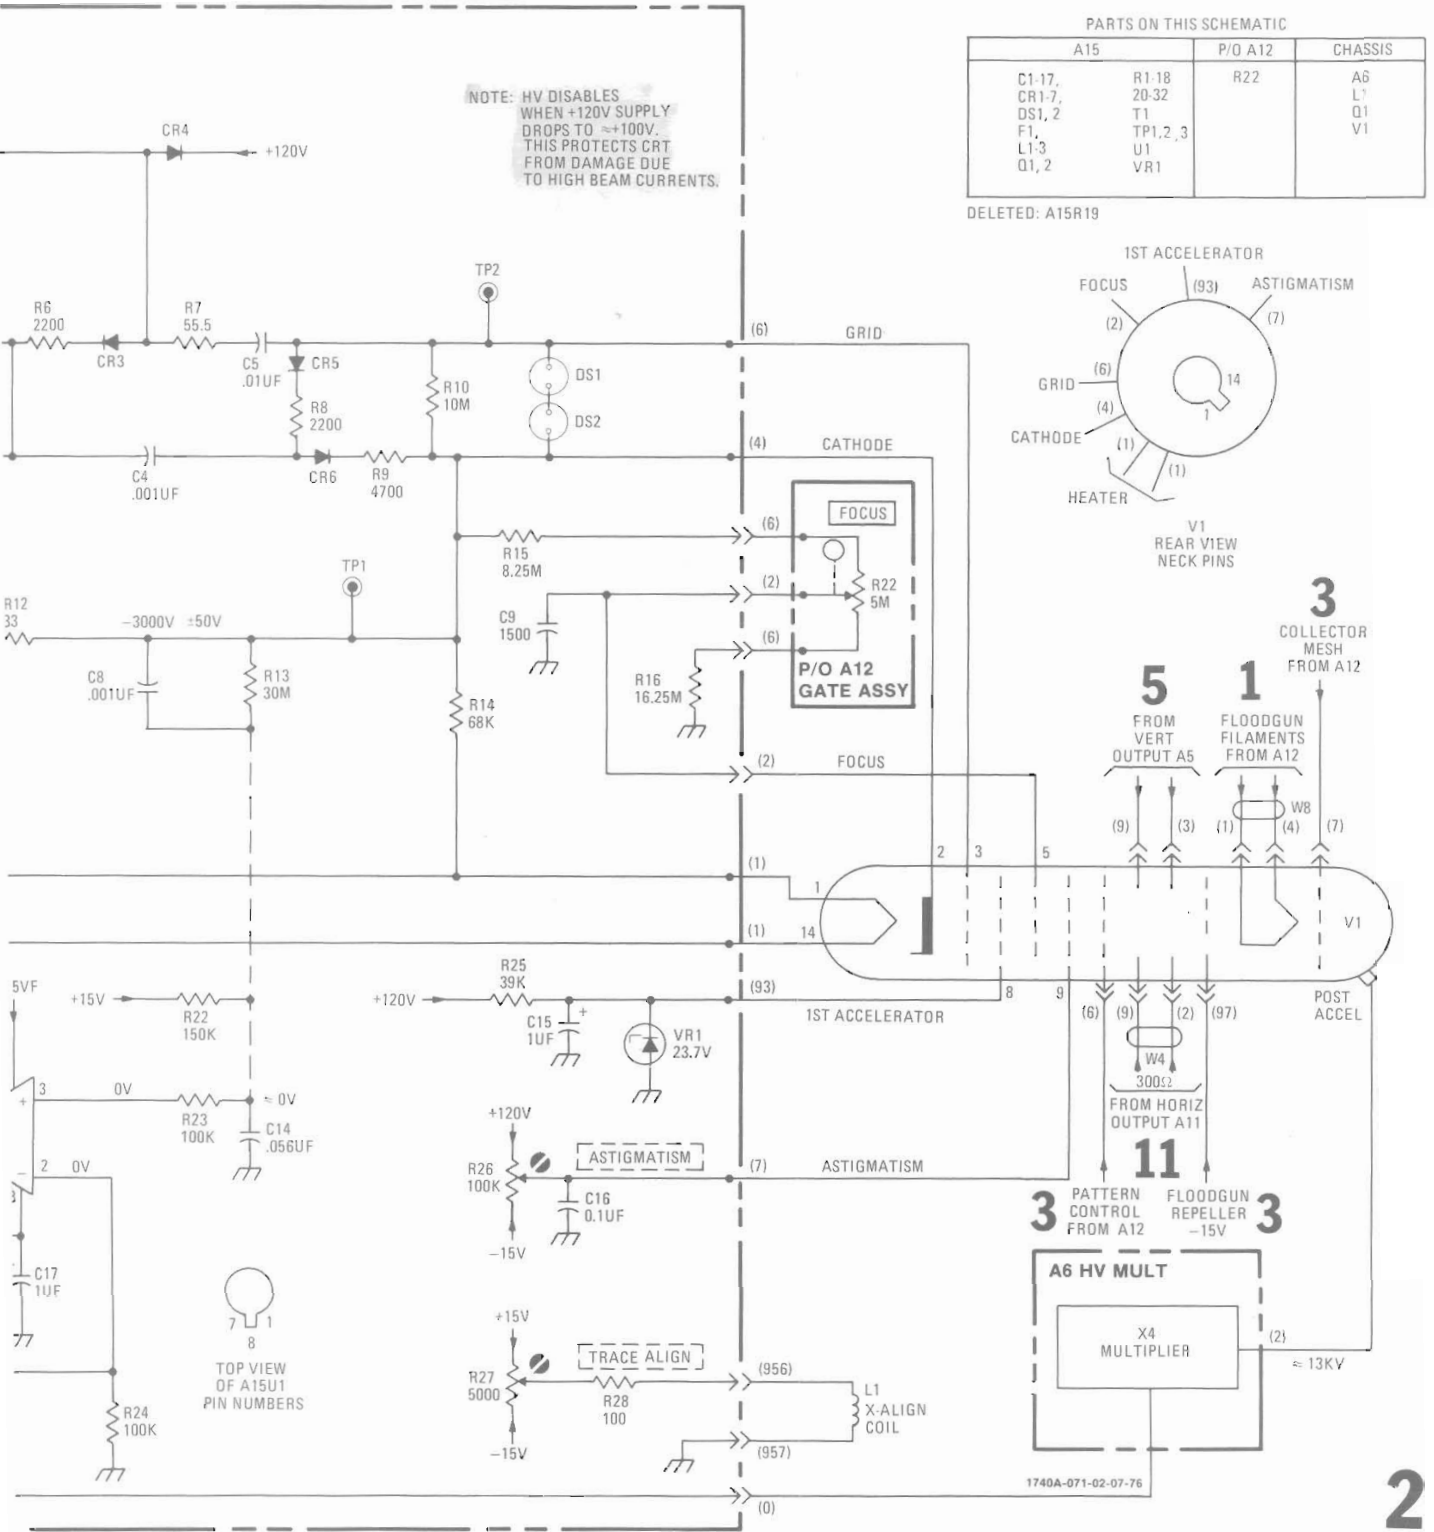


Figure 8-11. Service Information, High-voltage Power Supply Assembly A15 (Sheet 2 of 2) 8-15

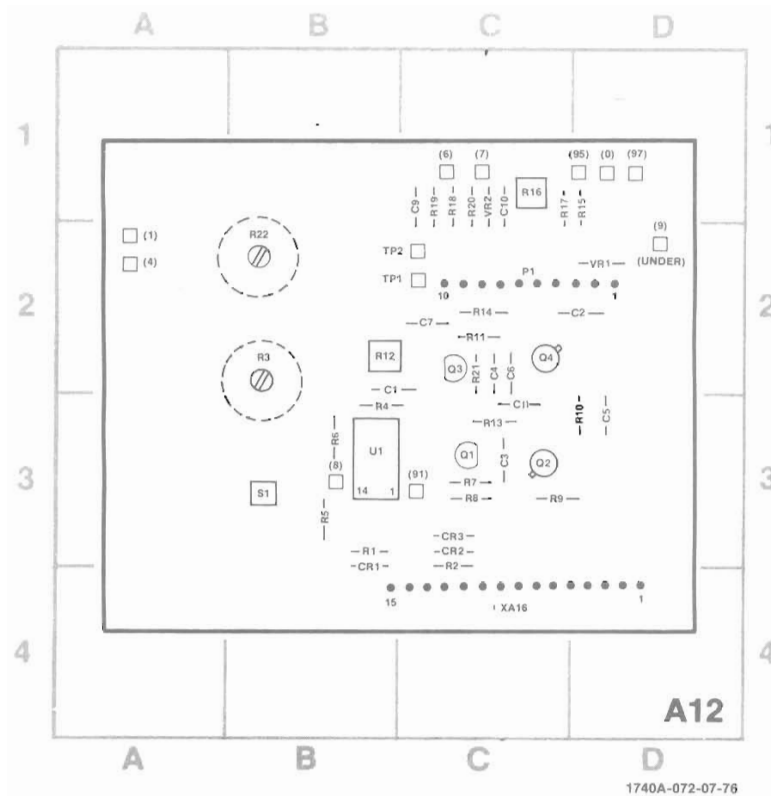

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | B-2 | CR1 | B-4 | R3 | B-2 | R13 | C-3 | S1 | B-3 |
| C2 | D-2 | CR2 | C-3 | R4 | B-3 | R14 | C-2 | TP1 | C-2 |
| C3 | C-3 | CR3 | C-3 | R5 | B-3 | R15 | D-1 | TP2 | C-2 |
| C4 | C-2 | P1 | C-2 | R6 | B-3 | R16 | C-1 | U1 | B-3 |
| C5 | D-3 | Q1 | C-3 | R7 | C-3 | R17 | C-1 | VR1 | D-2 |
| C6 | C-2 | Q2 | C-3 | R8 | C-3 | R18 | C-1 | VR2 | C-1 |
| C7 | C-2 | Q3 | C-2 | R9 | C-3 | R19 | C-1 | XA16 | C-4 |
| C9 | C-1 | Q4 | C-2 | R10 | D-3 | R20 | C-1 | | |
| C10 | C-1 | R1 | B-3 | R11 | C-2 | R21 | C-2 | | |
| C11 | C-3 | R2 | C-3 | R12 | B-2 | R22 | B-2 | | |

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 3**


1. Set front-panel controls in accordance with initial control settings in Section V.
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 3**


1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:

| | |
|----------------------------|----------------|
| Coupling (channel A) | 50Ω |
| TIME/DIV (delayed) | 1 μSEC |
| DELAY | 5.00 |
| Horiz display | MAIN |
| TRIGGER LEVEL (main) | stable display |


2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square-wave generator output for 6 divisions of signal amplitude (.6 Vpk) at 5 kHz.

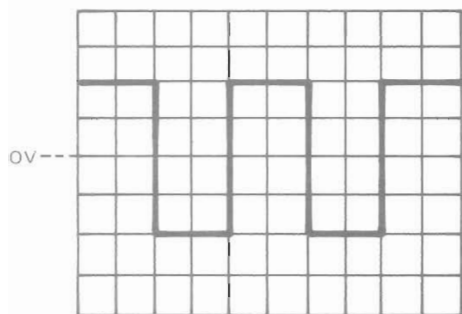

1 .2 V/DIV
.5 mSEC/DIV

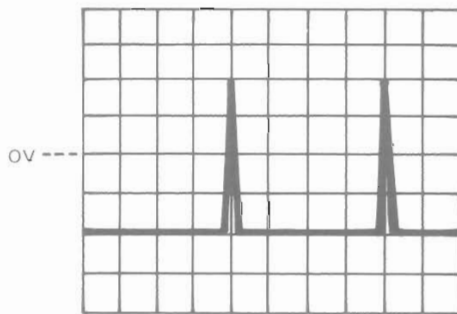


3 .2 V/DIV
.5 mSEC/DIV

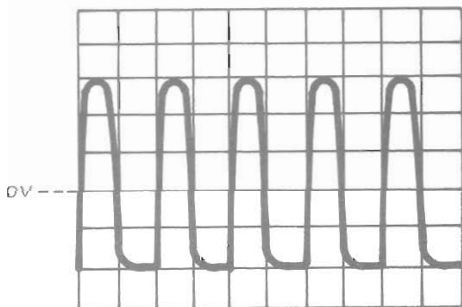

2 .2 V/DIV
1 μSEC/DIV

MODEL 1740A SELECT CHOP MODE

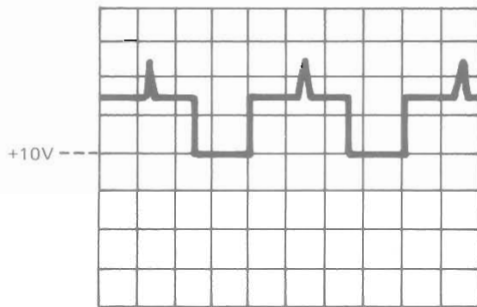


4 10 V/DIV
.5 mSEC/DIV

AMPLITUDE VARIES WITH INTENSITY

1740A-073-01-10-75

Figure 8-12. Service Information, Gate Amplifier Assembly A12 (Sheet 1 of 2)

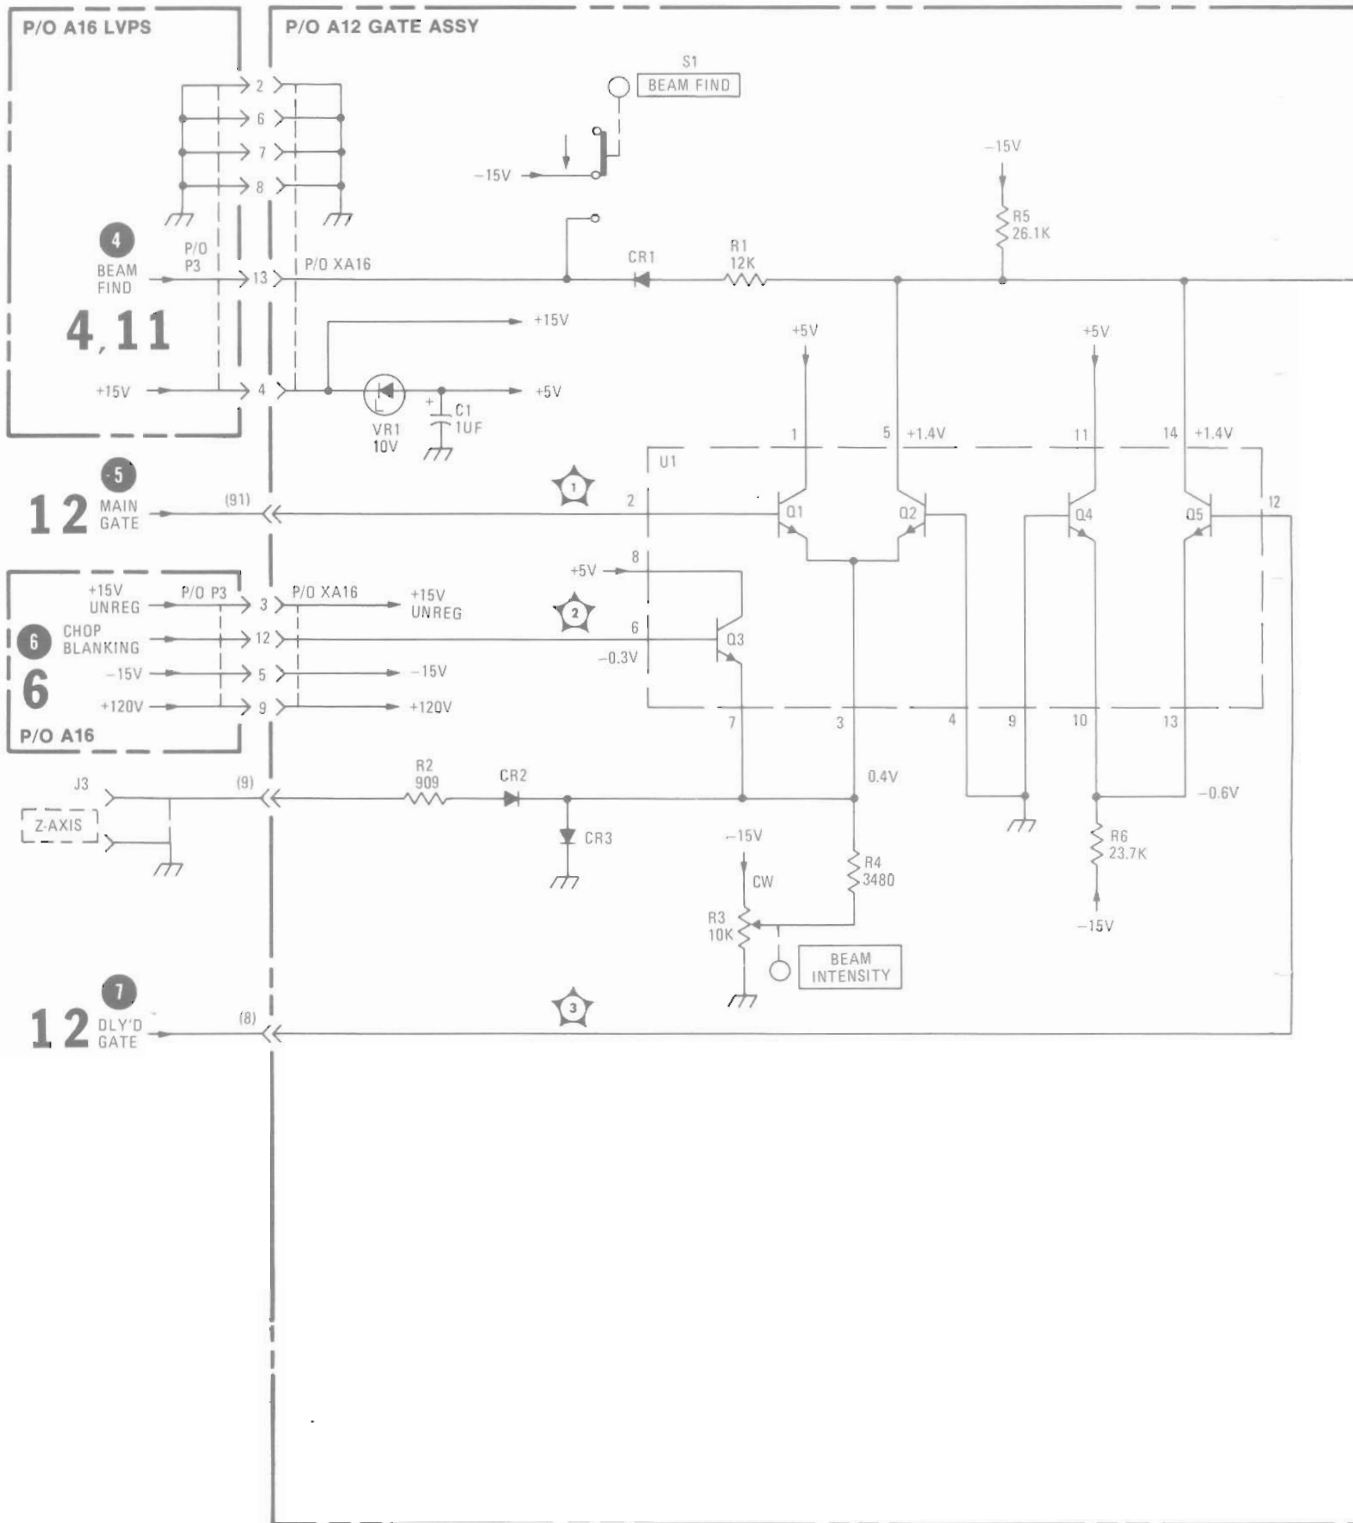


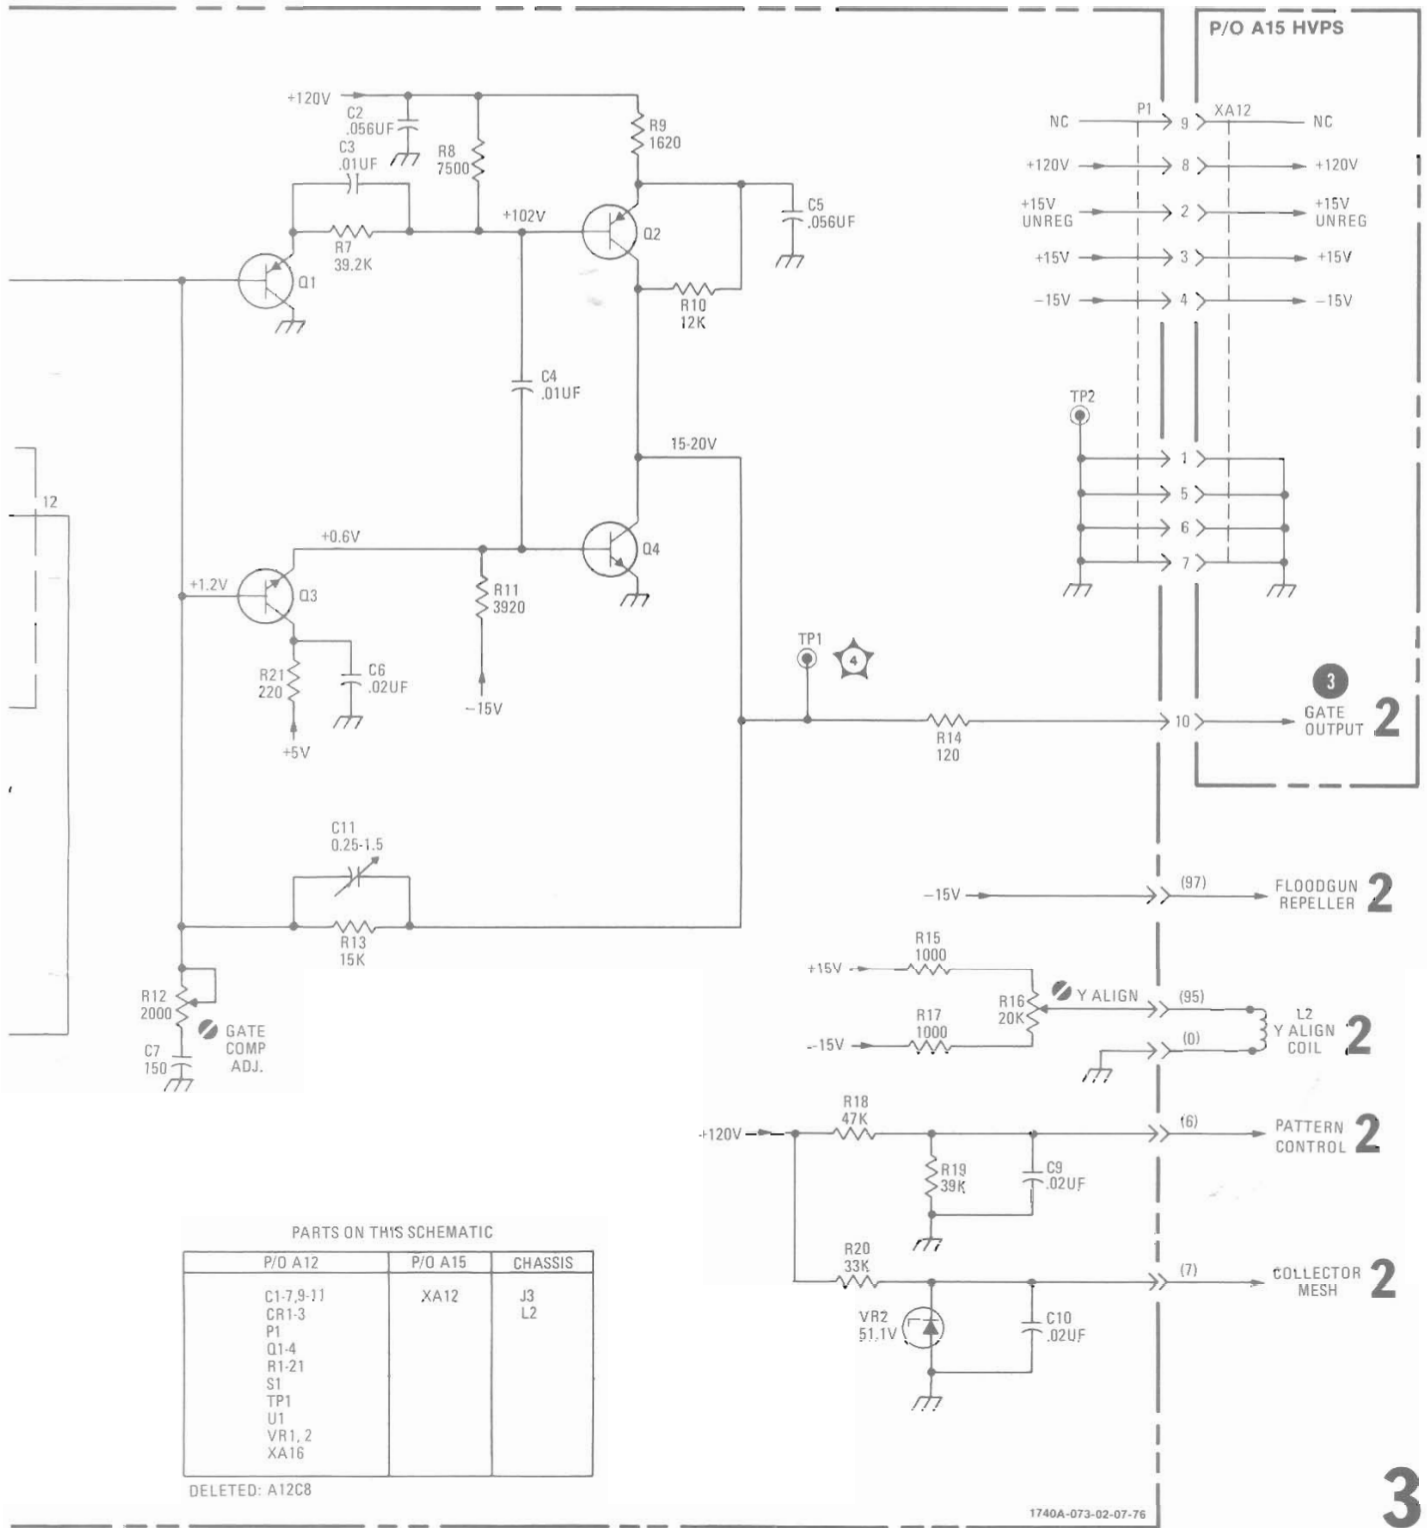


Figure 8-12.
Service Information, Gate Amplifier Assembly A12 (Sheet 2 of 2)
8-17

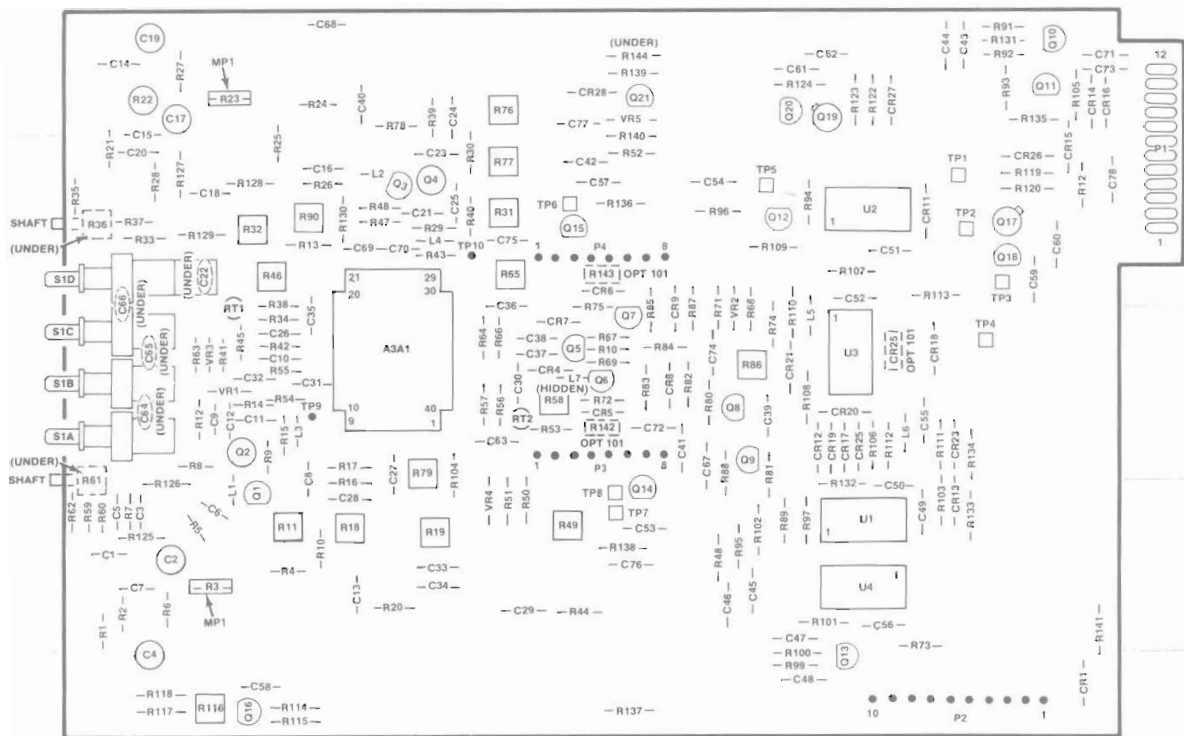

A3

1740A-074-07-76

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| A3A1 | C-3 | C38 | D-3 | C76 | D-4 | Q2 | B-3 | R19 | C-4 | R57 | C-3 | R95 | E-4 | R133 | F-4 |
| C1 | A-4 | C39 | E-3 | C77 | D-1 | Q3 | C-2 | R20 | C-4 | R58 | D-3 | R96 | E-2 | R134 | F-3 |
| C2 | A-4 | C40 | C-1 | C78 | G-2 | Q4 | C-2 | R21 | A-2 | R59 | A-4 | R97 | E-4 | R135 | G-1 |
| C3 | A-4 | C41 | D-3 | CR1 | G-5 | Q5 | D-3 | R22 | A-1 | R60 | A-4 | R98 | E-4 | R136 | D-2 |
| C4 | A-5 | C42 | D-2 | CR4 | D-3 | Q6 | D-3 | R23 | B-1 | R61 | A-3 | R99 | E-5 | R137 | D-5 |
| C5 | A-4 | C43 | F-1 | CR5 | D-3 | Q7 | D-3 | R24 | B-1 | R62 | A-4 | R100 | E-5 | R138 | D-4 |
| C6 | B-4 | C44 | F-1 | CR6 | D-2 | Q8 | E-3 | R25 | B-2 | R63 | B-3 | R101 | E-4 | R139 | D-1 |
| C7 | A-4 | C45 | E-4 | CR7 | D-3 | Q9 | E-3 | R26 | B-2 | R64 | C-3 | R102 | E-4 | R140 | D-2 |
| C8 | B-3 | C46 | E-4 | CR8 | D-3 | Q10 | G-1 | R27 | B-1 | R65 | D-2 | R103 | F-4 | R141 | G-4 |
| C9 | B-3 | C47 | E-4 | CR9 | D-3 | Q11 | G-1 | R28 | A-2 | R66 | C-3 | R104 | C-3 | R142 | D-3 |
| C10 | B-3 | C48 | E-5 | CR11 | F-2 | Q12 | E-2 | R29 | C-2 | R67 | D-3 | R105 | G-1 | R143 | D-2 |
| C11 | B-3 | C49 | F-4 | CR12 | E-3 | Q13 | E-5 | R30 | C-2 | R68 | E-3 | R106 | F-3 | R144 | D-1 |
| C12 | B-3 | C50 | F-4 | CR13 | F-4 | Q14 | D-5 | R31 | D-2 | R69 | D-3 | R107 | F-2 | RT1 | B-2 |
| C13 | C-4 | C51 | F-2 | CR14 | G-1 | Q15 | D-2 | R32 | B-2 | R70 | C-3 | R108 | F-3 | RT2 | D-3 |
| C14 | A-1 | C52 | F-2 | CR15 | G-2 | Q16 | B-5 | R33 | A-2 | R71 | E-3 | R109 | E-2 | S1A | A-3 |
| C15 | A11 | C53 | D-4 | CR16 | G-1 | Q17 | F-2 | R34 | B-3 | R72 | D-3 | R110 | E-3 | S1B | A-3 |
| C16 | B-2 | C54 | E-2 | CR17 | E-3 | Q18 | F-2 | R35 | A-2 | R73 | F-4 | R111 | F-3 | S1C | A-3 |
| C17 | B-1 | C55 | F-3 | CR18 | F-3 | Q19 | E-1 | R36 | A-2 | R74 | E-3 | R112 | F-3 | S1D | A-2 |
| C18 | B-2 | C56 | F-4 | CR19 | E-2 | Q20 | E-1 | R37 | A-2 | R75 | D-2 | R113 | F-2 | TP1 | F-2 |
| C19 | A-1 | C57 | D-2 | CR20 | E-3 | Q21 | D-1 | R38 | B-2 | R76 | C-1 | R114 | B-5 | TP2 | F-2 |
| C20 | A-2 | C58 | B-5 | CR21 | E-3 | R1 | A-4 | R39 | C-1 | R77 | D-2 | R115 | B-5 | TP3 | F-2 |
| C21 | C-2 | C59 | E-2 | CR23 | F-3 | R2 | A-4 | R40 | C-2 | R78 | C-1 | R116 | B-5 | TP4 | F-3 |
| C22 | B-2 | C60 | E-2 | CR25 | F-3 | R3 | B-4 | R41 | B-3 | R79 | C-3 | R117 | A-5 | TP5 | E-2 |
| C23 | C-2 | C61 | E-1 | CR26 | G-2 | R4 | B-4 | R42 | B-3 | R80 | E-3 | R118 | A-5 | TP6 | D-2 |
| C24 | C-1 | C62 | E-1 | CR27 | F-1 | R5 | B-4 | R43 | C-2 | R81 | E-3 | R119 | B-2 | TP7 | D-4 |
| C25 | C-2 | C63 | C-3 | CR28 | D-1 | R6 | A-4 | R44 | D-4 | R82 | E-3 | R120 | G-2 | TP8 | D-4 |
| C26 | B-3 | C64 | A-3 | L1 | B-4 | R7 | A-4 | R45 | B-3 | R83 | D-3 | R121 | B-2 | TP9 | B-3 |
| C27 | C-3 | C65 | A-3 | L2 | C-2 | R8 | B-3 | R46 | B-2 | R84 | D-3 | R122 | F-1 | TP10 | C-2 |
| C28 | D-4 | C66 | A-2 | L3 | B-3 | R9 | B-3 | R47 | C-2 | R85 | D-3 | R123 | F-1 | U1 | F-4 |
| C29 | C-4 | C67 | E-3 | L4 | C-2 | R10 | D-5 | R48 | C-2 | R86 | C-3 | R124 | E-1 | U2 | F-2 |
| C30 | D-3 | C68 | B-1 | L5 | E-3 | R11 | B-4 | R49 | D-4 | R87 | E-3 | R125 | A-4 | U3 | F-3 |
| C31 | B-3 | C69 | C-2 | L6 | F-3 | R12 | B-3 | R50 | D-4 | R88 | E-3 | R126 | A-3 | U4 | F-4 |
| C32 | B-3 | C70 | C-2 | L7 | D-3 | R13 | B-2 | R51 | D-4 | R89 | E-4 | R127 | B-2 | VR1 | B-3 |
| C33 | C-4 | C71 | G-1 | P1 | G-1 | R14 | B-3 | R52 | D-2 | R90 | B-2 | R128 | B-2 | VR2 | E-3 |
| C34 | C-4 | C72 | D-3 | P2 | F-5 | R15 | B-3 | R53 | D-3 | R91 | F-1 | R129 | B-2 | VR3 | B-3 |
| C35 | B-3 | C73 | G-1 | P3 | C-3 | R16 | C-3 | R54 | B-3 | R92 | F-1 | R130 | C-2 | VR4 | C-4 |
| C36 | D-2 | C74 | E-3 | P4 | D-3 | R17 | C-3 | R55 | B-3 | R93 | F-1 | R131 | F-1 | VR5 | D-1 |
| C37 | D-3 | C75 | C-2 | Q1 | B-4 | R18 | C-4 | R56 | C-3 | R94 | E-2 | R132 | E-4 | | |

DC VOLTAGE MEASUREMENT CONDITIONS SCHEMATIC 4



1. Set front-panel controls in accordance with initial control settings in Section V.
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

WAVEFORM MEASUREMENT CONDITIONS SCHEMATIC 4

1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:

Coupling (channel A) 50 Ω
TRIGGER LEVEL (main) stable display

2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square-wave generator output for 6 divisions of signal amplitude (.6 V) at 5 kHz.

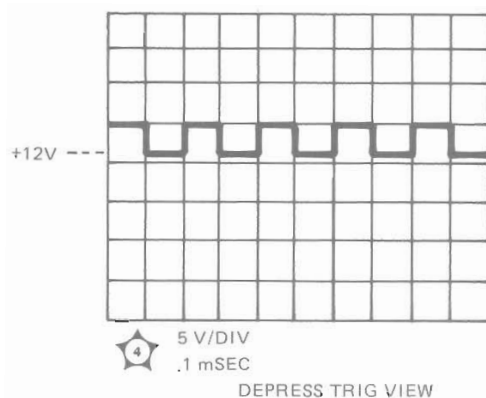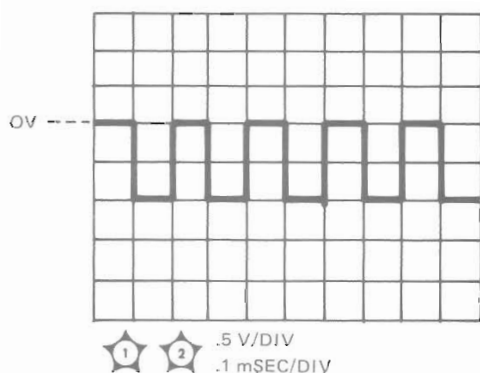


NOTE:

1. OPTION 101: BD. NO. CHANGES TO 01740-66517 AND THE FOLLOWING COMPONENTS ARE DELETED: C77, CR28, 29, Q21, R139 AND R140.


R142 AND R143 ARE ADDED, AND CR25 IS MOVED TO OPT 101 POSITION.
2. P2 PIN NUMBERS DO NOT AGREE WITH MARKING ON CIRCUIT BD.

C22, C64, C65 AND C66 ARE LOADED ON BACK.

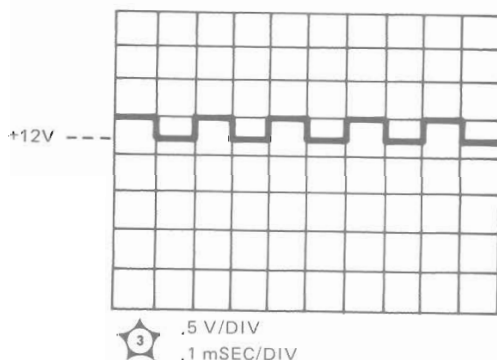

1740A-075-01-10-73


Figure 8-13. Service Information, Vertical Preamplifier Assembly A3 (Sheet 1 of 2)

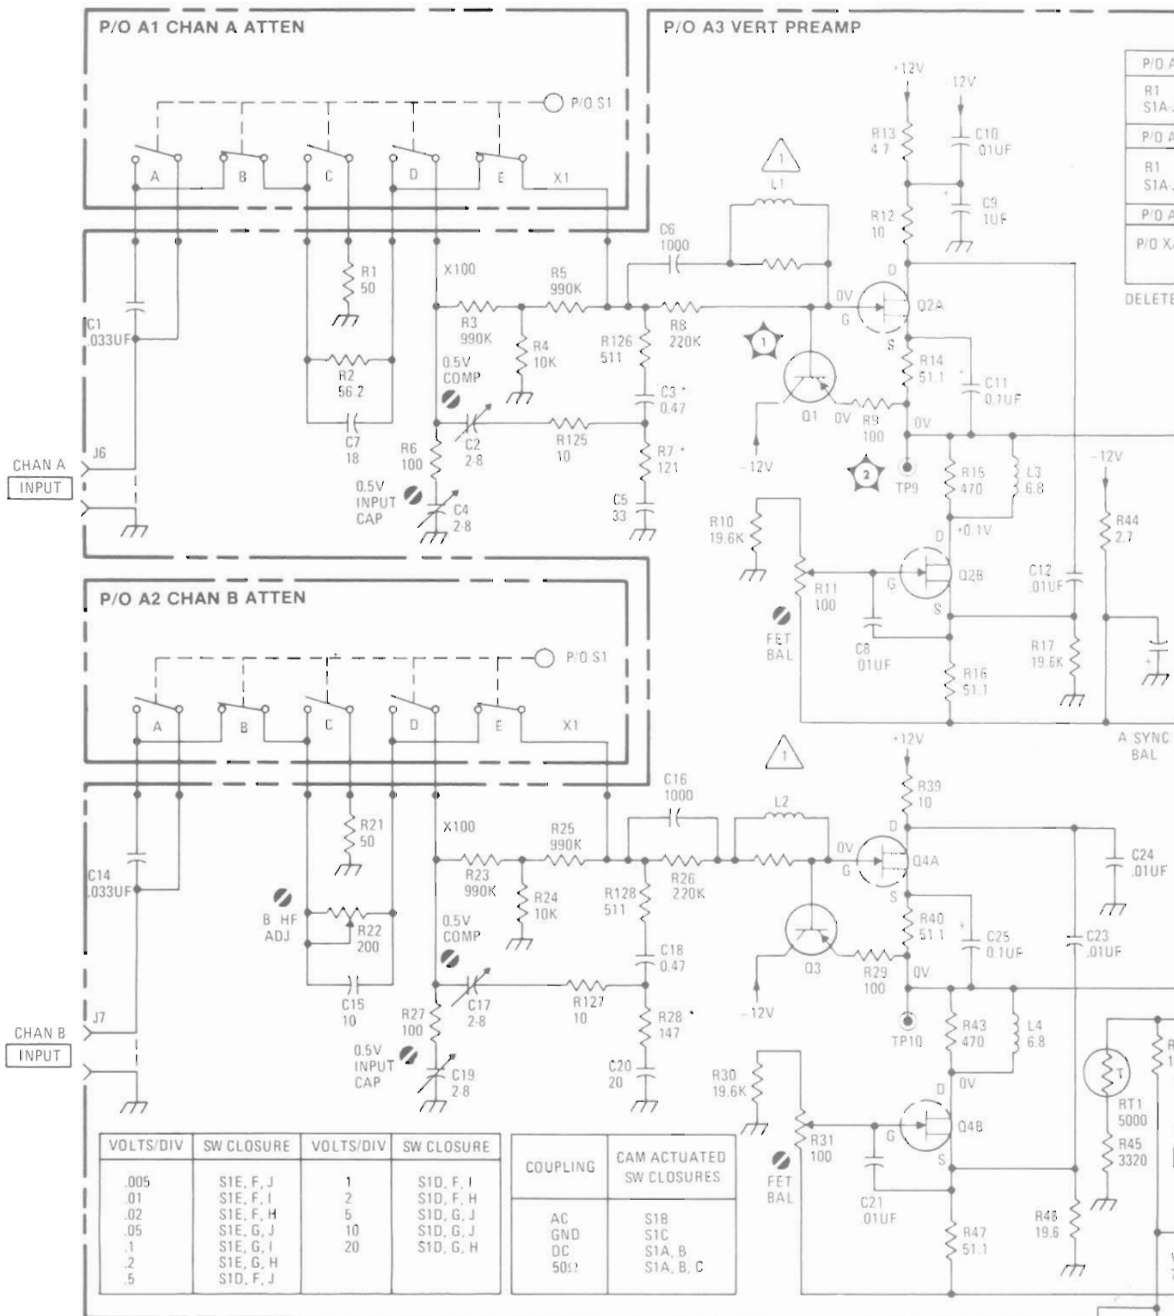

NOTES: (1) A3L1 & L2 INCLUDE RESISTORS SHOWN.

(2) OPTION 101: A3 BOARD NO. CHANGES TO 01740.66517 AND RESISTORS A3R142 & 143 ARE ADDED AT (3)

*OPTIMUM VALUE SELECTED AT FACTORY TYPICAL VALUE SHOWN

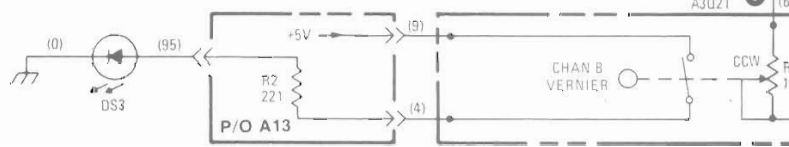


| |
|--------|
| P/O A |
| R1 |
| S1A-J |
| P/O A |
| R1 |
| S1A-J |
| P/O A |
| R1 |
| S1A-J |
| P/O X |
| DELETE |

FROM A3Q21 (6)

PARTS ON THIS SCHEMATIC

| P/O A1 | P/O A3 | P/O A13 |
|-------------|---------------------------------------|---------|
| R1 S1A J | C1 42, 63, 70, 74, 75, 79 CR1 4, 9 | R1, 2 |
| P/O A2 | L1 4, 7 | P/O A14 |
| R1 S1A J | P/O P1, 2 | P/O XA3 |
| | O1 9 | |
| P/O A5 | R1 90, 104, 125, 130, 141-143 | CHASSIS |
| P/O XA3 | RT1 2 | DS2, 3 |
| | P/OS1D | J6, 7 |
| | S1B, C | L3 5 |
| | VR1 4 | W2, 6 |

DELETED: A3CR2, 3

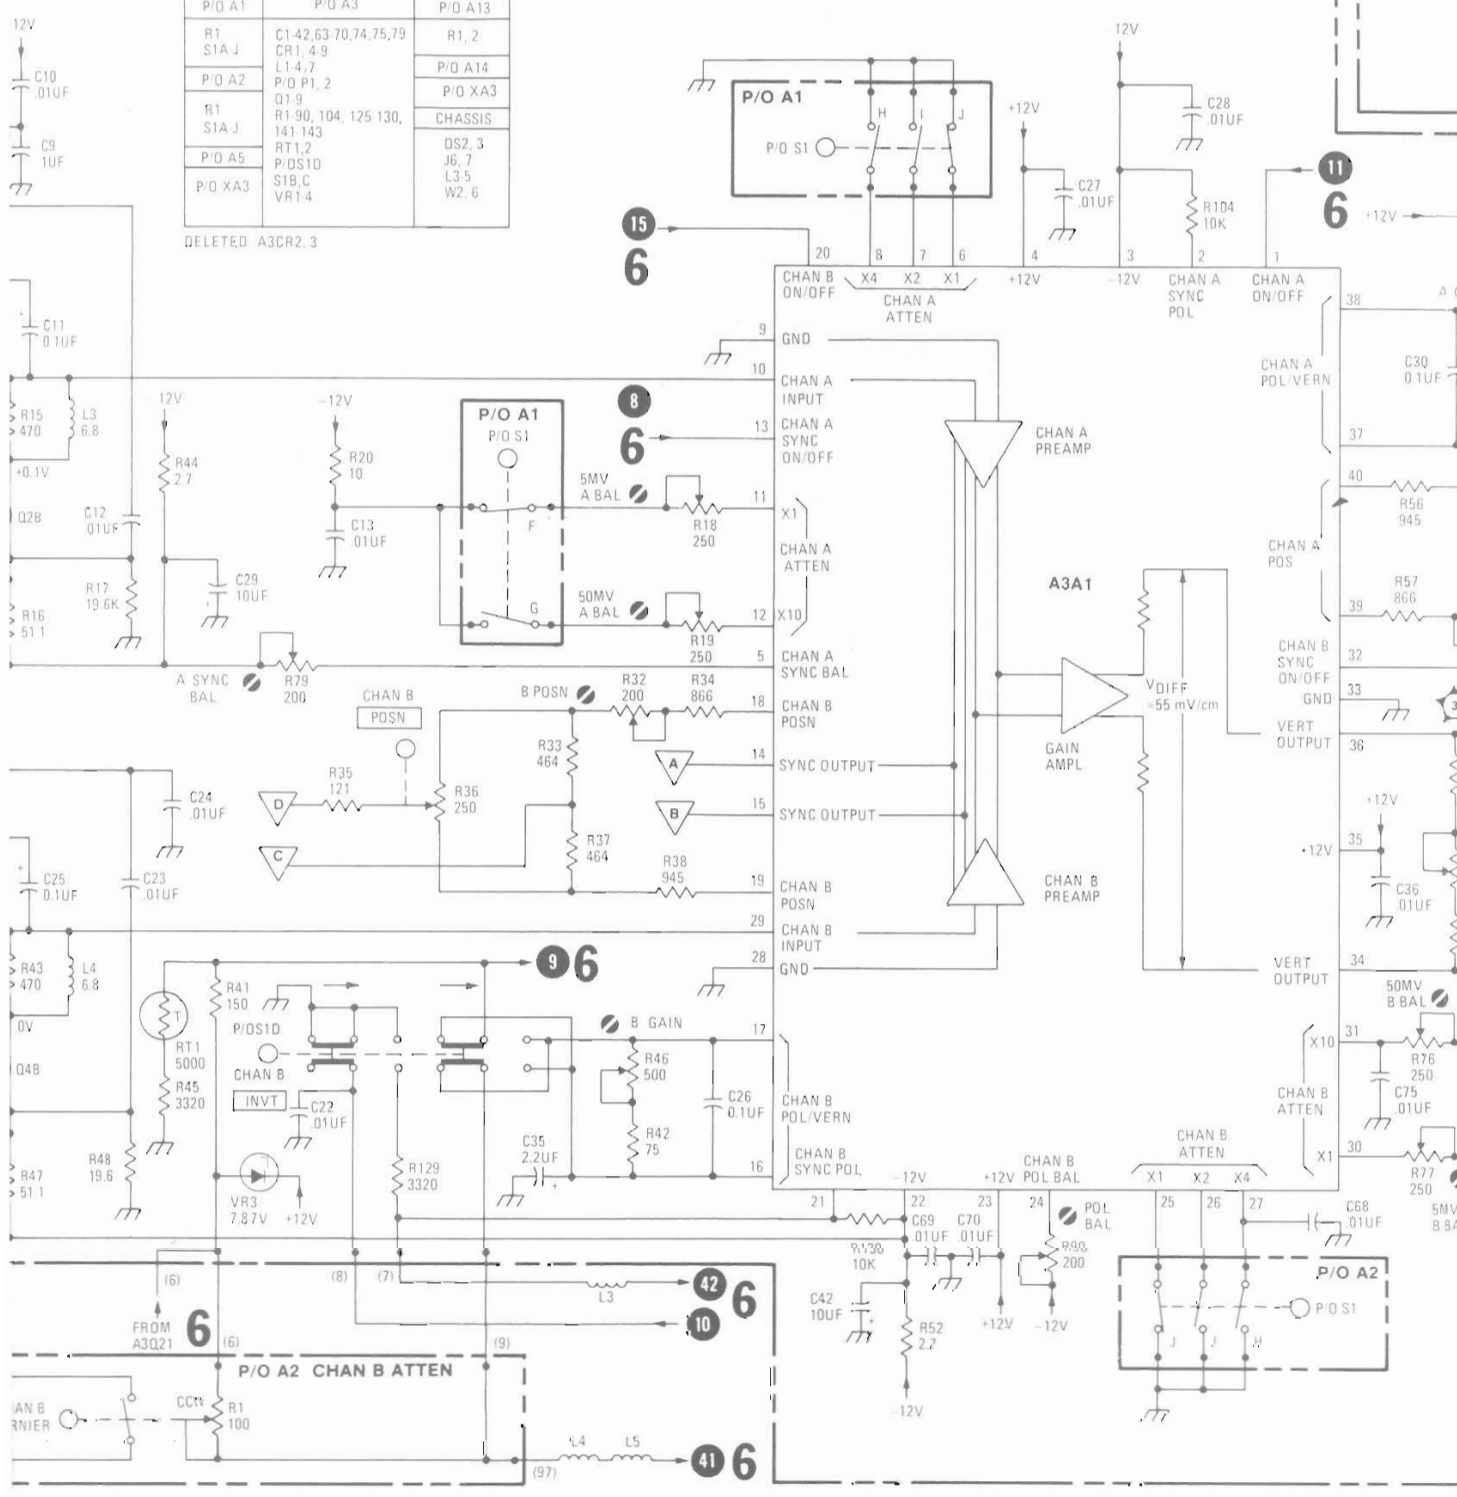

P/O A1 CH

11 6 +12V









15 6

8 6

9 6

42 6

41 6

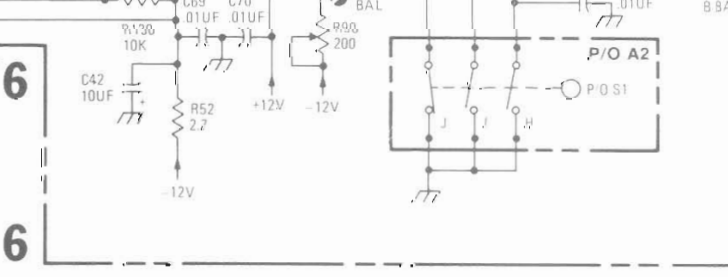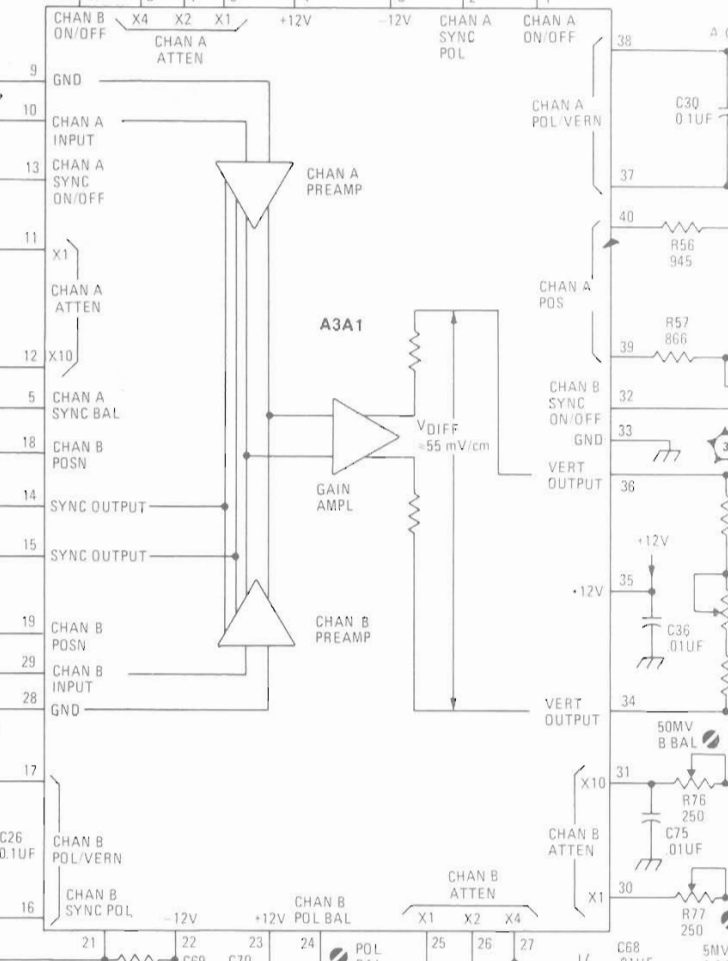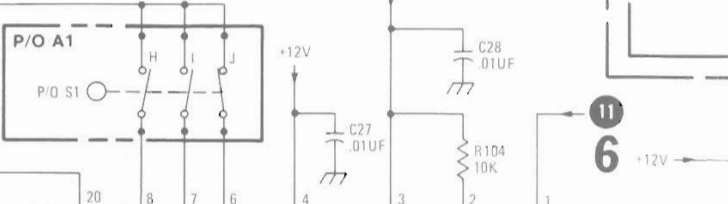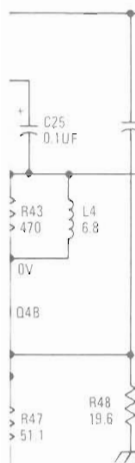


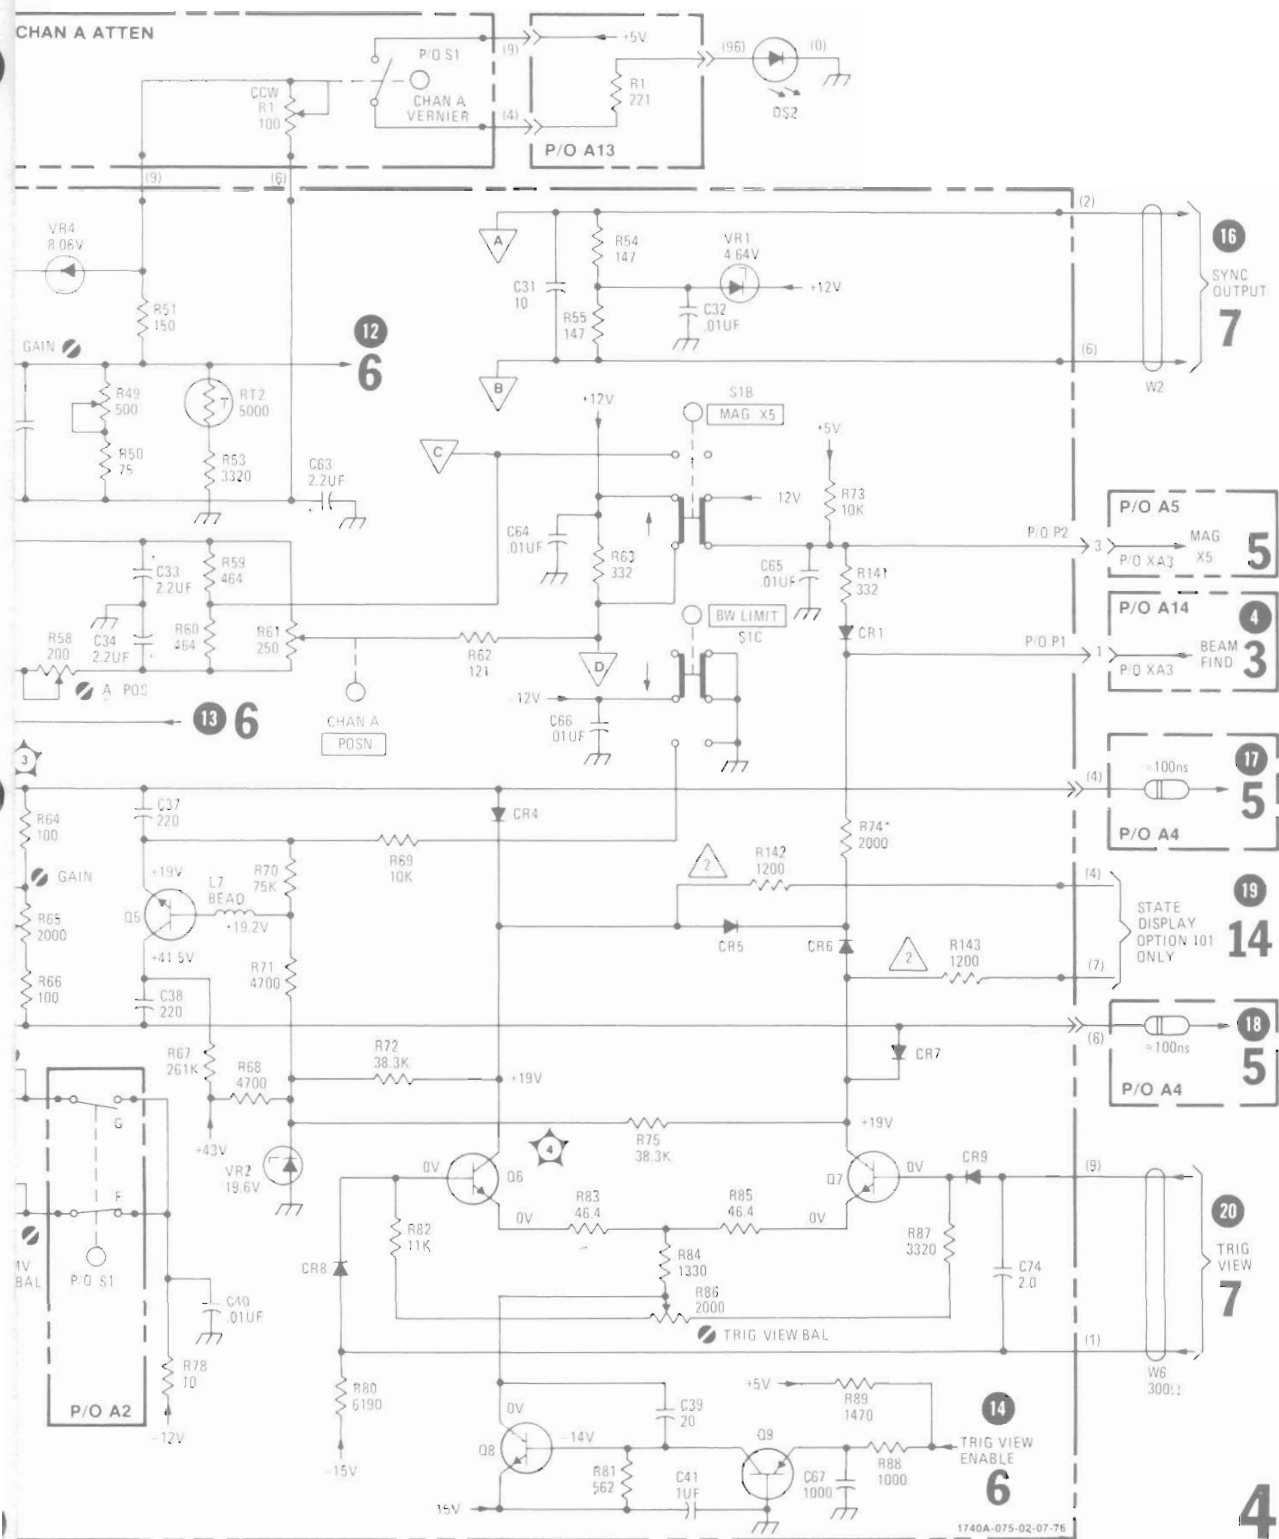


Figure 8-13. Service Information, Vertical Preamp Assembly A3 (Sheet 2 of 2)

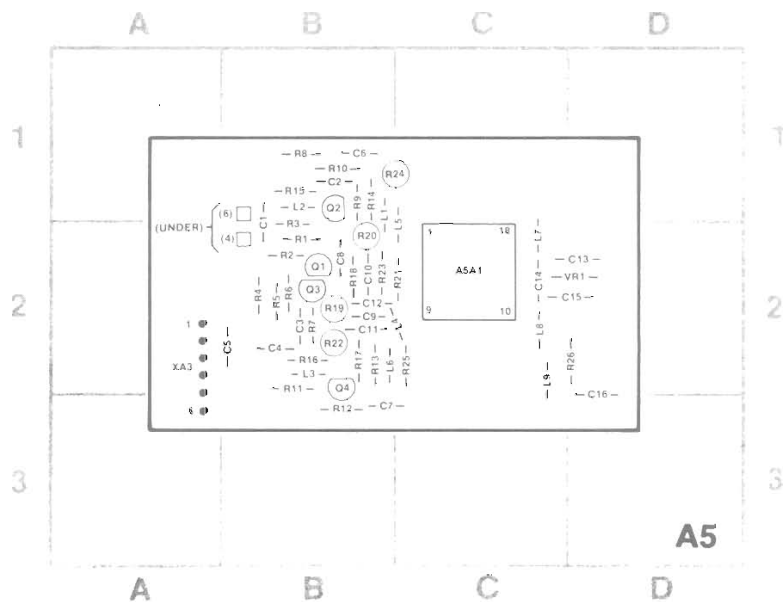

1740A-076-10-75

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| A5A1 | C-2 | C10 | B-2 | L4 | C-2 | R1 | B-2 | R11 | B-2 | R21 | C-2 |
| C1 | B-1 | C11 | B-2 | L5 | C-2 | R2 | B-2 | R12 | B-3 | R22 | B-2 |
| C2 | B-1 | C12 | B-2 | L6 | B-2 | R3 | B-2 | R13 | B-2 | R23 | B-2 |
| C3 | B-2 | C13 | D-2 | L7 | C-2 | R4 | B-2 | R14 | B-1 | R24 | B-1 |
| C4 | B-2 | C14 | C-2 | L8 | C-2 | R5 | B-2 | R15 | B-1 | R25 | C-2 |
| C5 | B-2 | C15 | D-2 | L9 | C-2 | R6 | B-2 | R16 | B-2 | R26 | D-2 |
| C6 | B-1 | C16 | D-2 | Q1 | B-2 | R7 | B-2 | R17 | B-2 | VR1 | D-2 |
| C7 | B-3 | L1 | B-1 | Q2 | B-1 | R8 | B-1 | R18 | B-2 | XA3 | A-2 |
| C8 | B-2 | L2 | B-1 | Q3 | B-2 | R9 | B-1 | R19 | B-2 | | |
| C9 | B-2 | L3 | B-2 | Q4 | B-2 | R10 | B-1 | R20 | B-2 | | |

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 5**




1. Set front-panel controls in accordance with initial control settings in Section V.
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 5**

1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:

Coupling (channel A) 50Ω

2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square-wave generator output for 6 divisions of signal amplitude (.6 V) at 5 kHz.

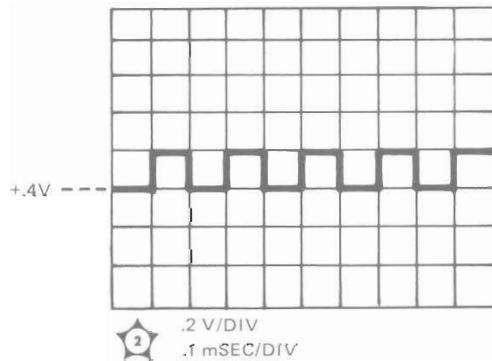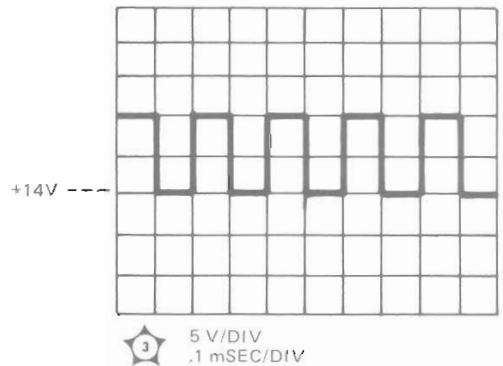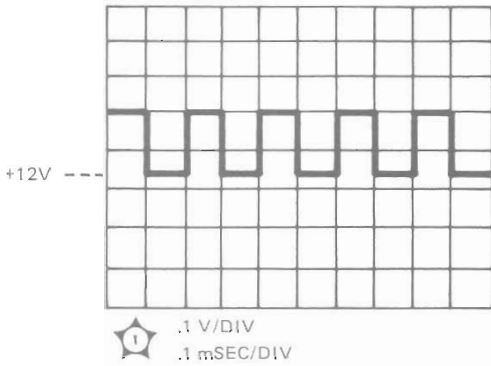

1740A-077-01-10-75

Figure 8-14. Service Information, Vertical Output Assembly A5 (Sheet 1 of 2)

A5 VERTICAL OUTPUT



18 4

DELAY LINE




17 4


DELAY LINE




P/O A3 VERTICAL PREAMP

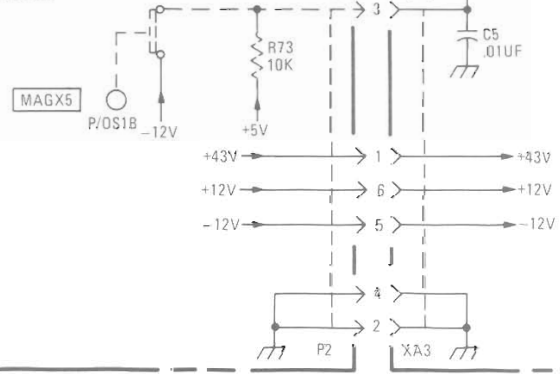


NOTE: * OPTIMUM VALUE SELECTED AT FACTORY, TYPICAL VALUE SHOWN.

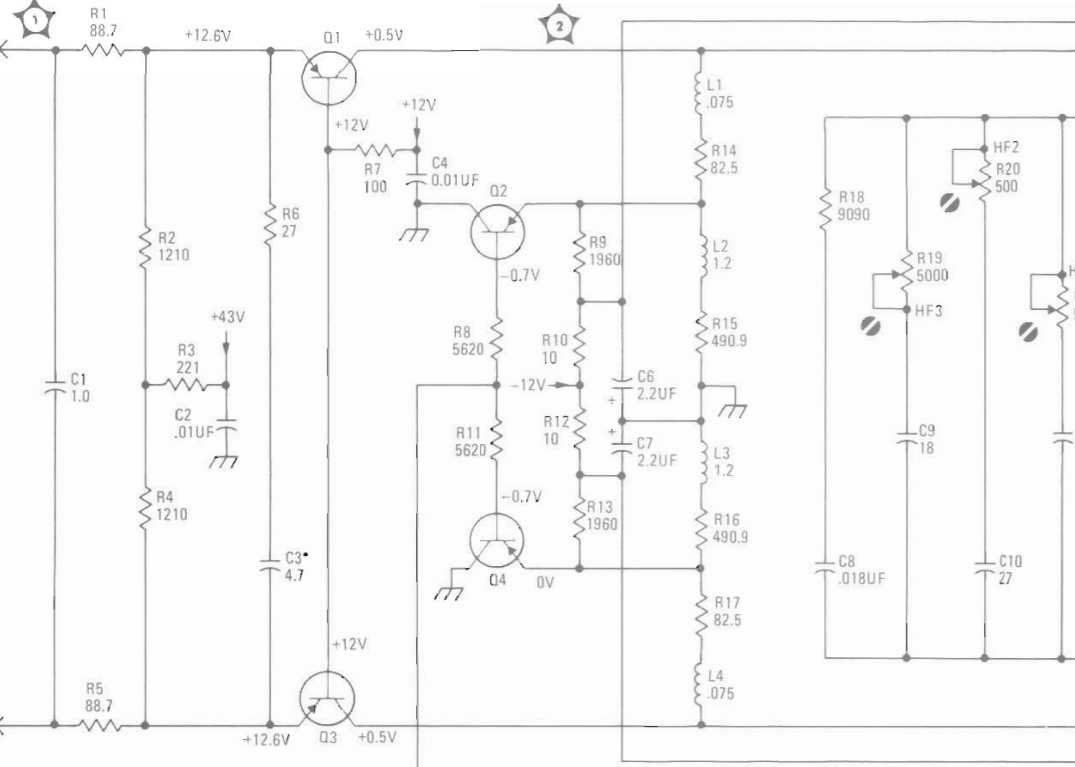

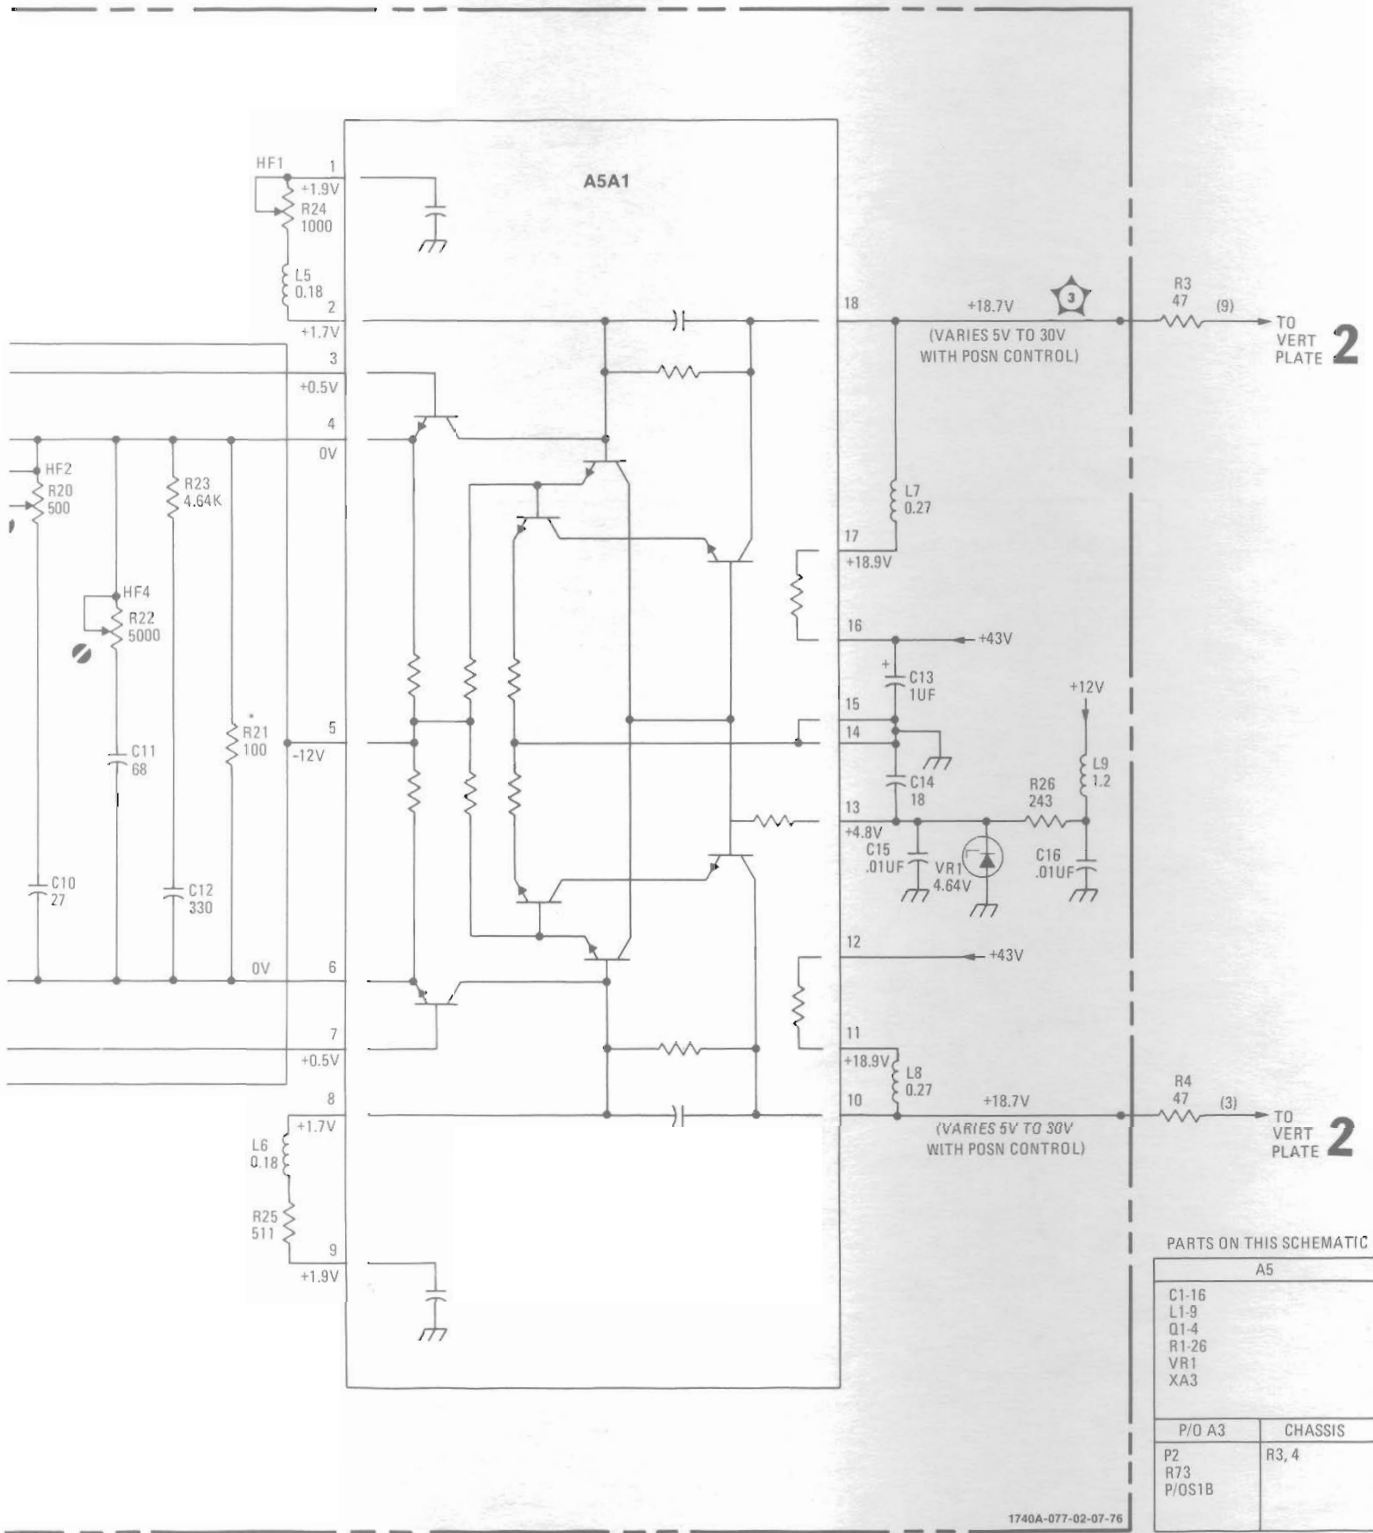

1740A-077-02-07-76

Figure 8-14.
Service Information, Vertical Output Assembly A5 (Sheet 2 of 2)
8-21

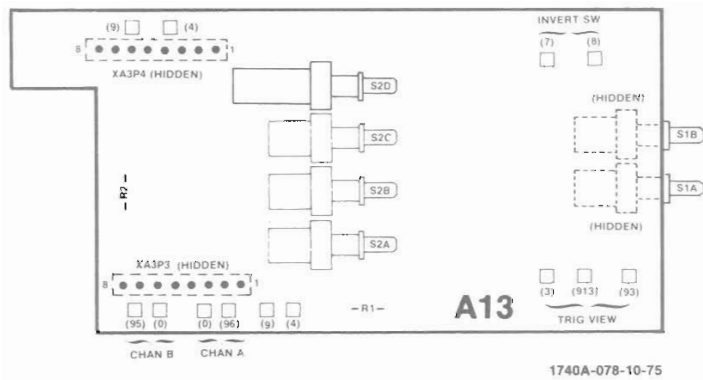

NOTE
 See Figure 8-13
 for Assembly A3
 Component Identification

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 6**





1. Set front-panel controls in accordance with initial control settings in Section V.
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 6**

1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:


| | |
|----------------------------|----------------|
| Coupling (channel A) | 50Ω |
| TRIGGER LEVEL (main)..... | stable display |
| DISPLAY..... | ALT |
| TRIG VIEW | engaged |

2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square-wave generator output for 6 divisions of signal amplitude (.6V) at 5 kHz.

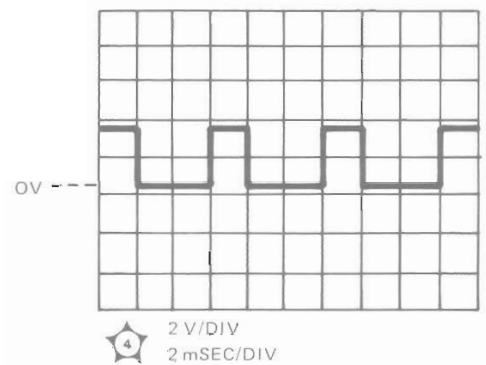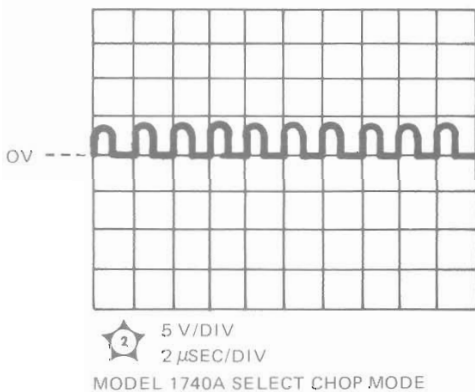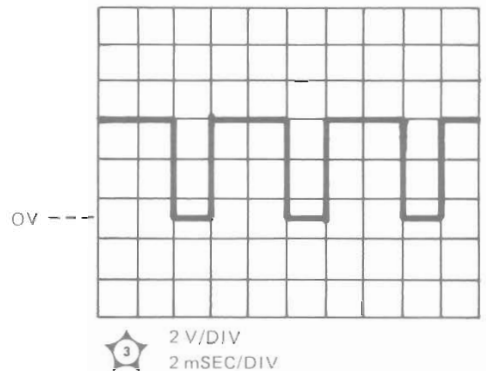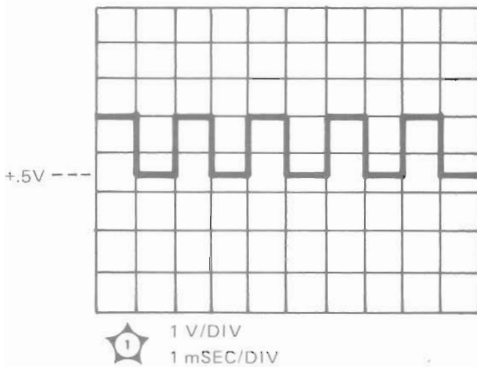

1740A-079-01-10-75

Figure 8-15. Service Information, Vertical Control Switching Assembly A13 and Vertical Preamplifier Assembly A3 (Sheet 1 of 2)

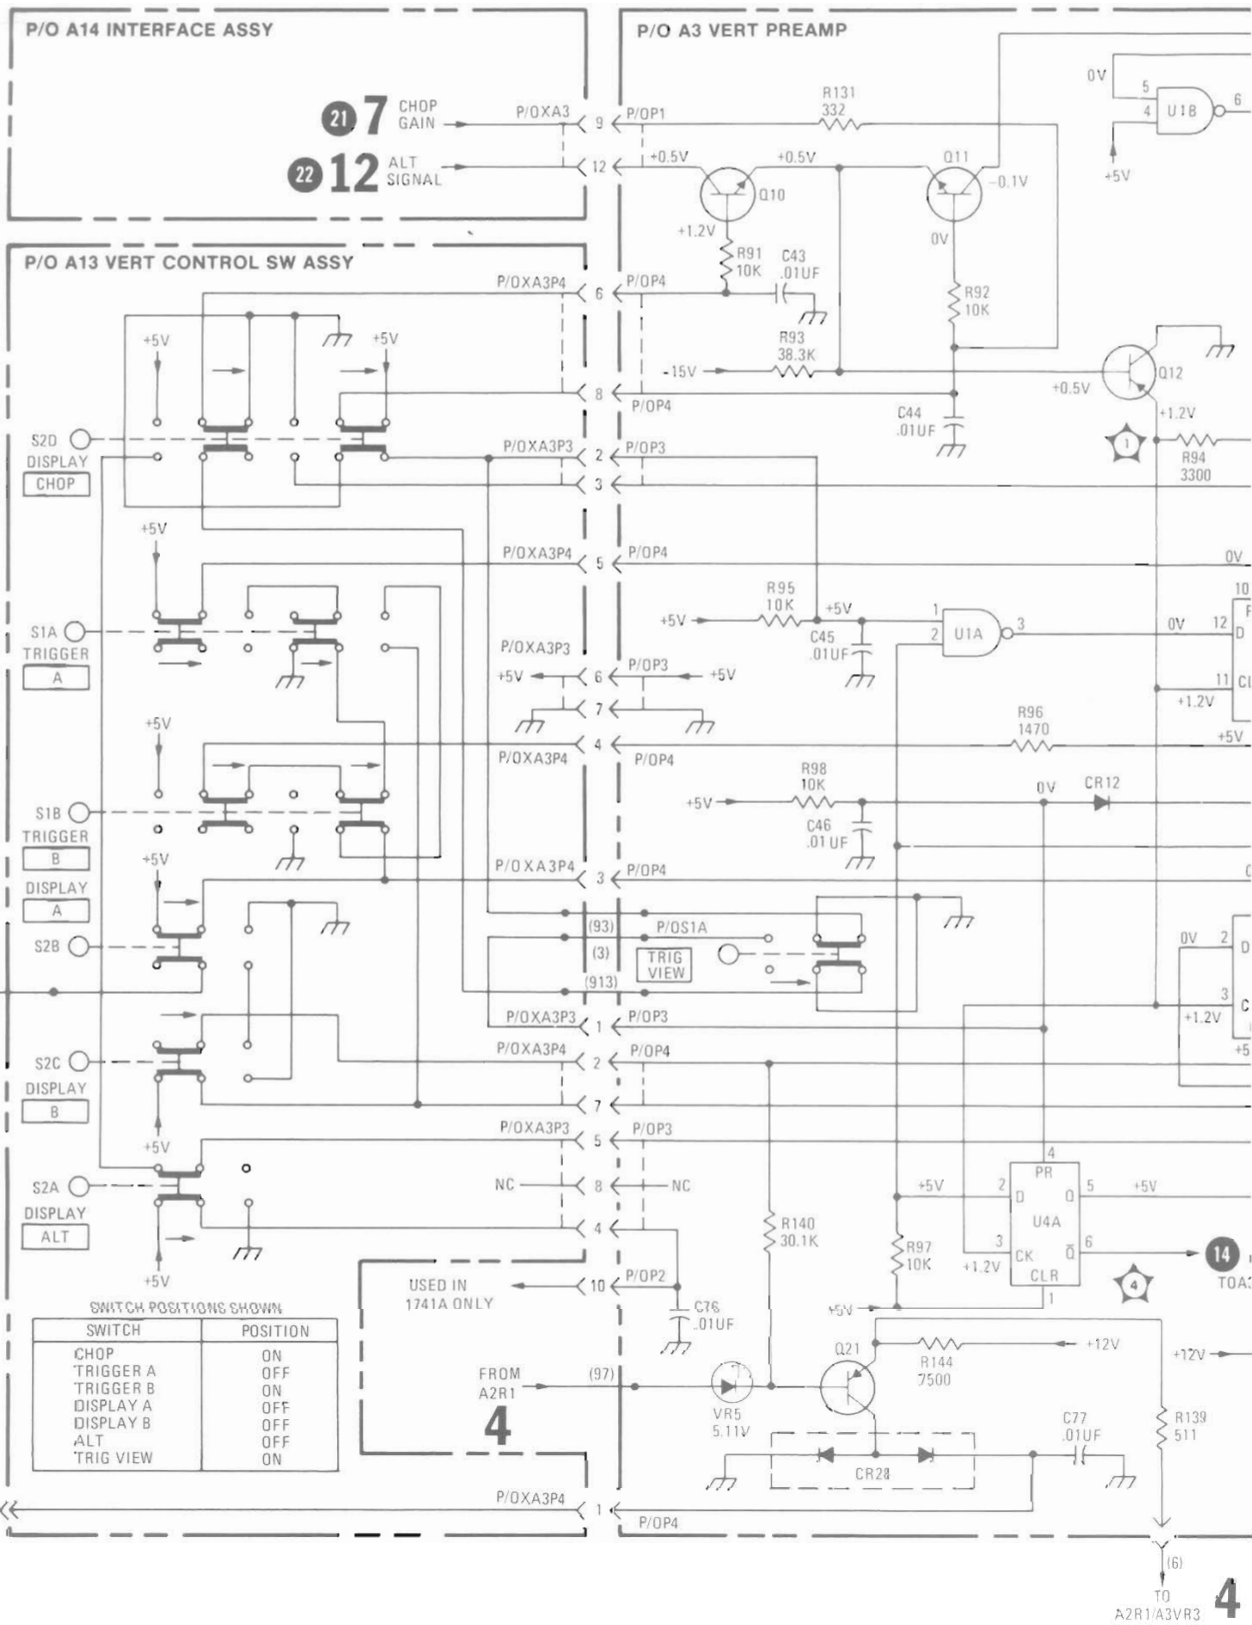

10
4

4

4

4

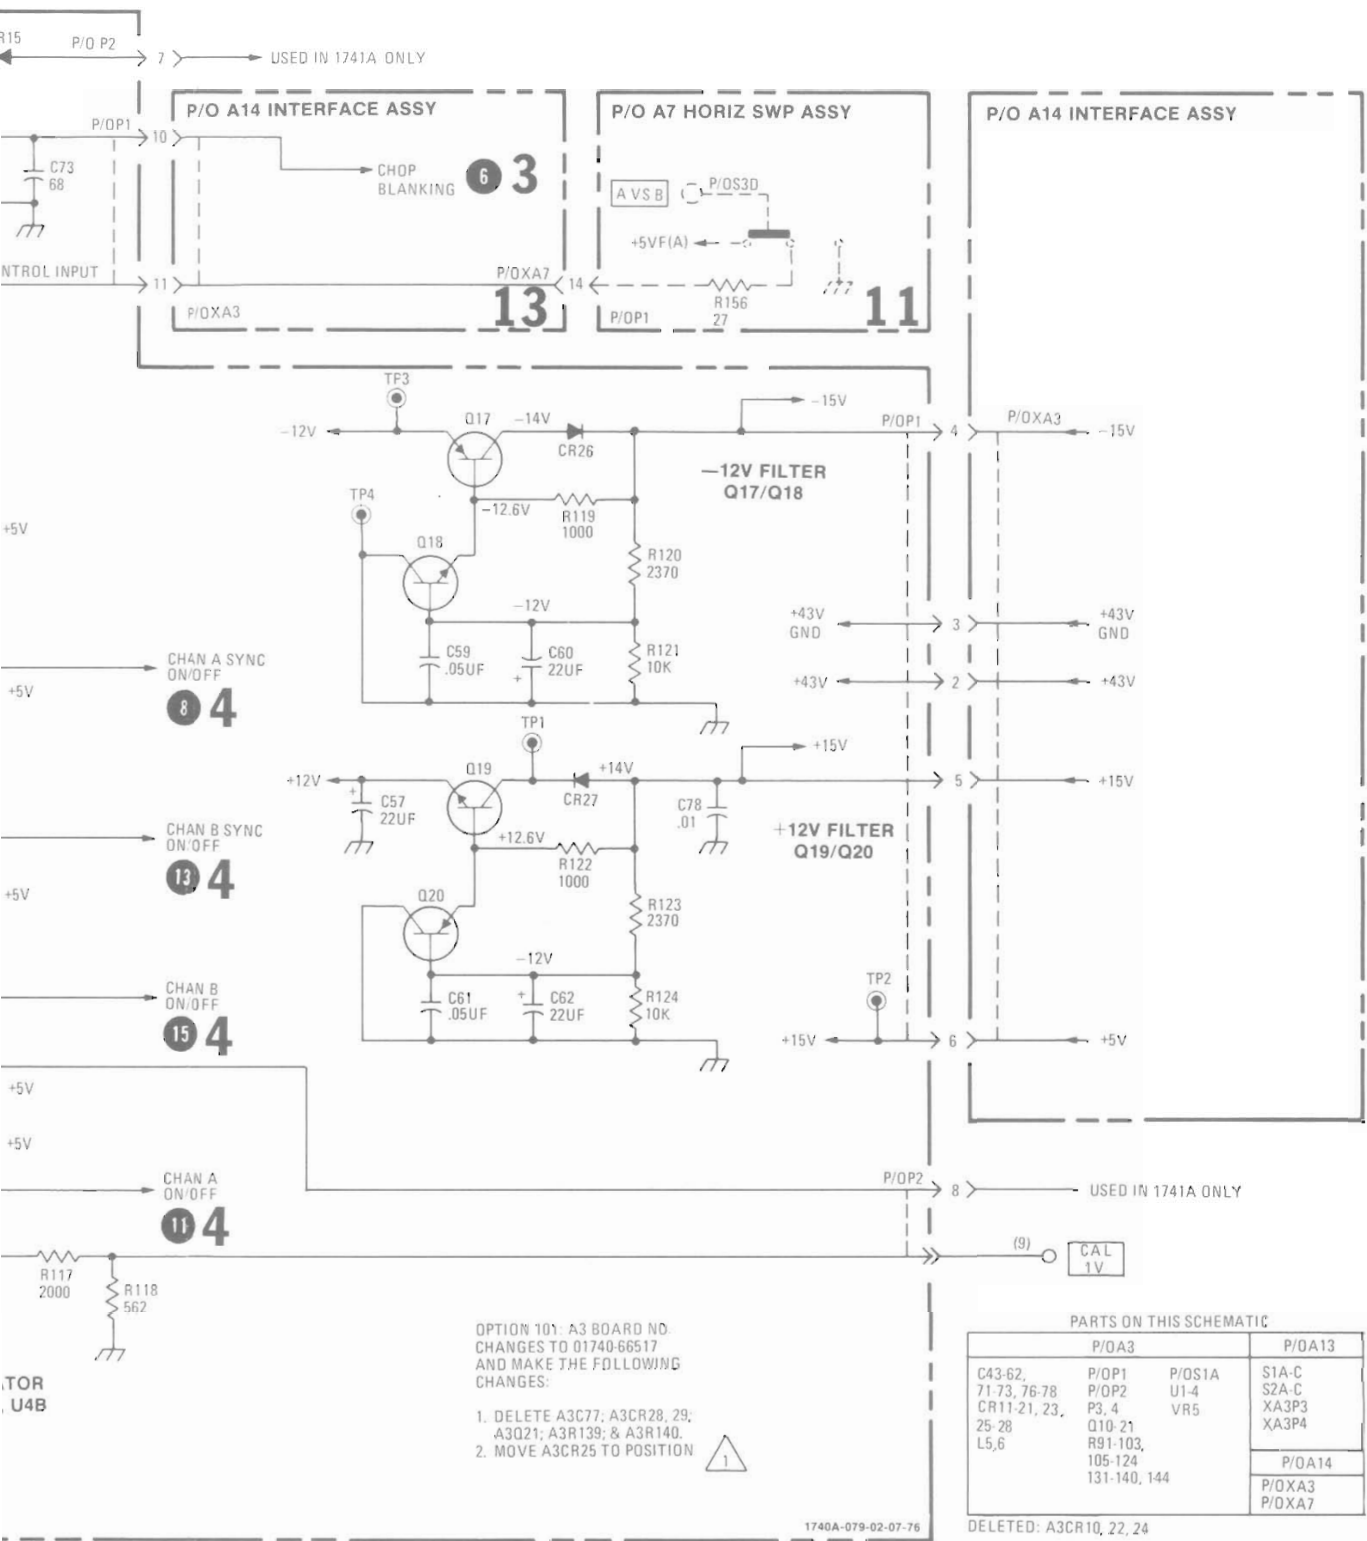


Figure 8-15. Service Information, Vertical Control Switching Assembly A13 and Vertical Preamp Assembly A3 (Sheet 2 of 2) 8-23





**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 7**

1. Set front-panel controls in accordance with initial control settings in Section V.
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 7**



1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:


| | |
|----------------------------|----------------|
| Coupling (channel A) | 50Ω |
| TRIGGER LEVEL (main) | stable display |
2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square-wave generator output for 6 divisions of signal amplitude (.6 V) at 5 kHz.

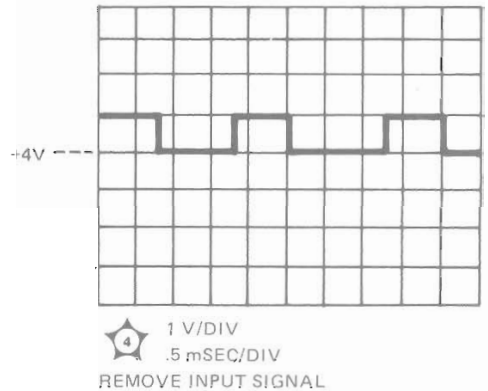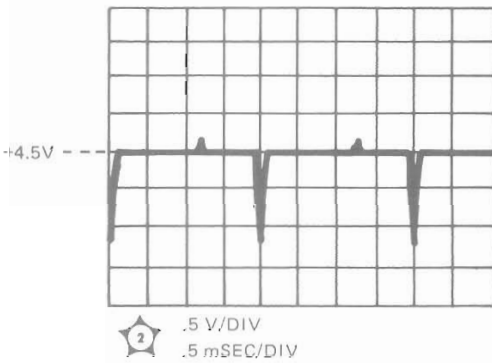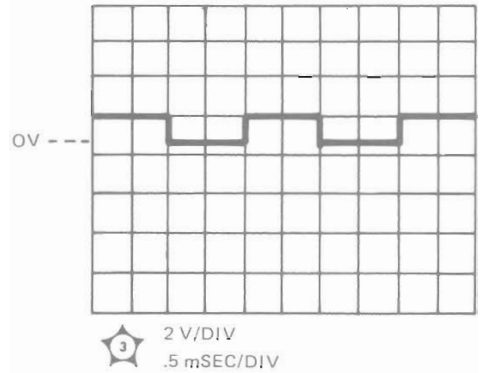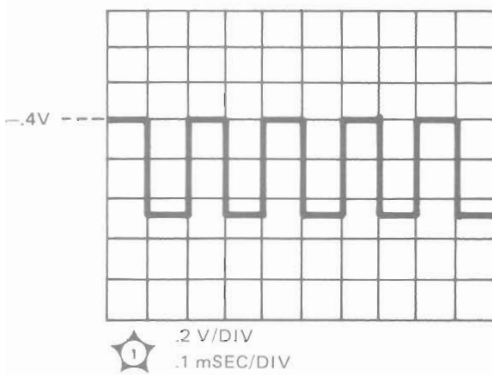


1740A-081-01-10-75

Figure 8-16. Service Information, Main Trigger, P/O Assembly A7 (Sheet 1 of 2)

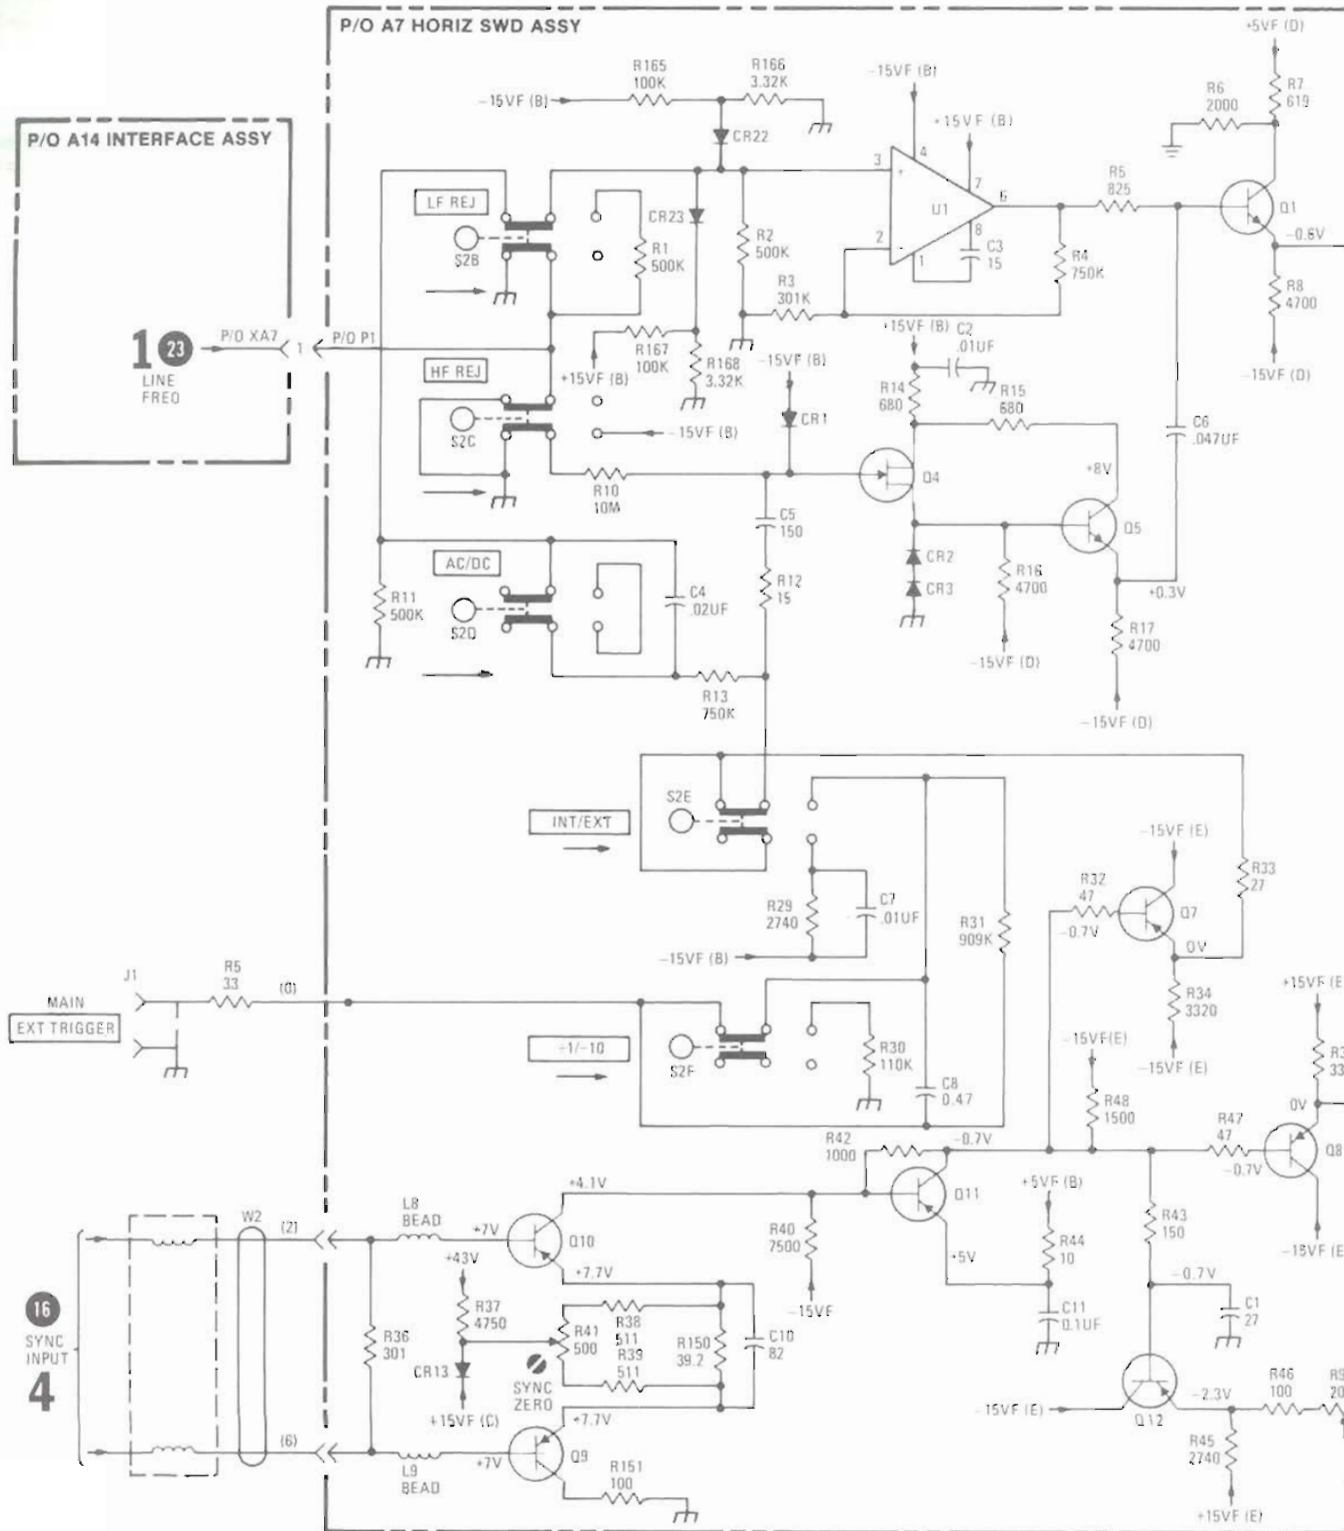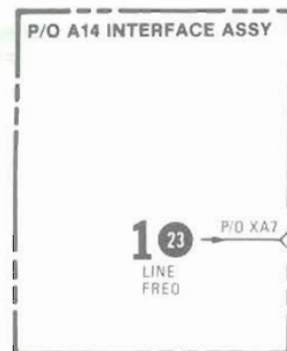


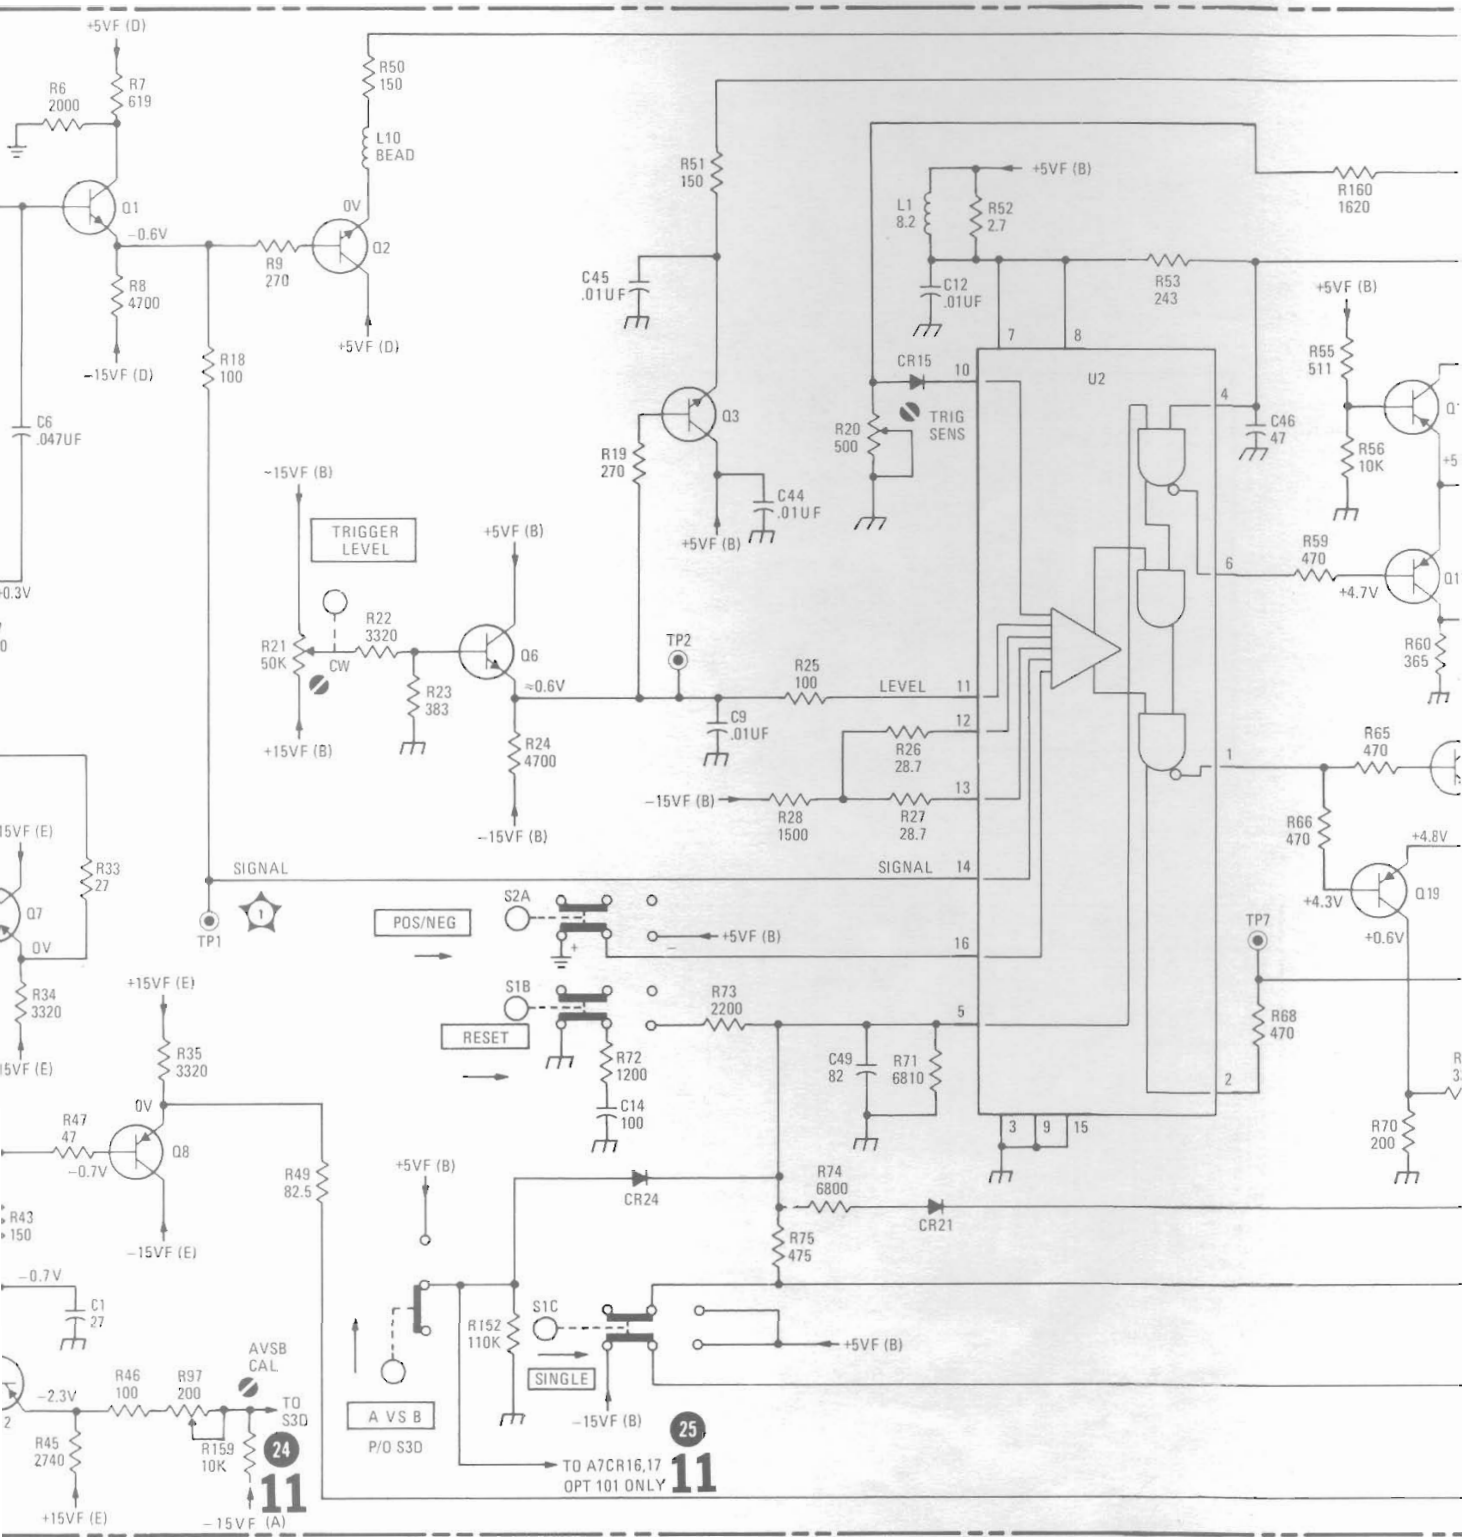

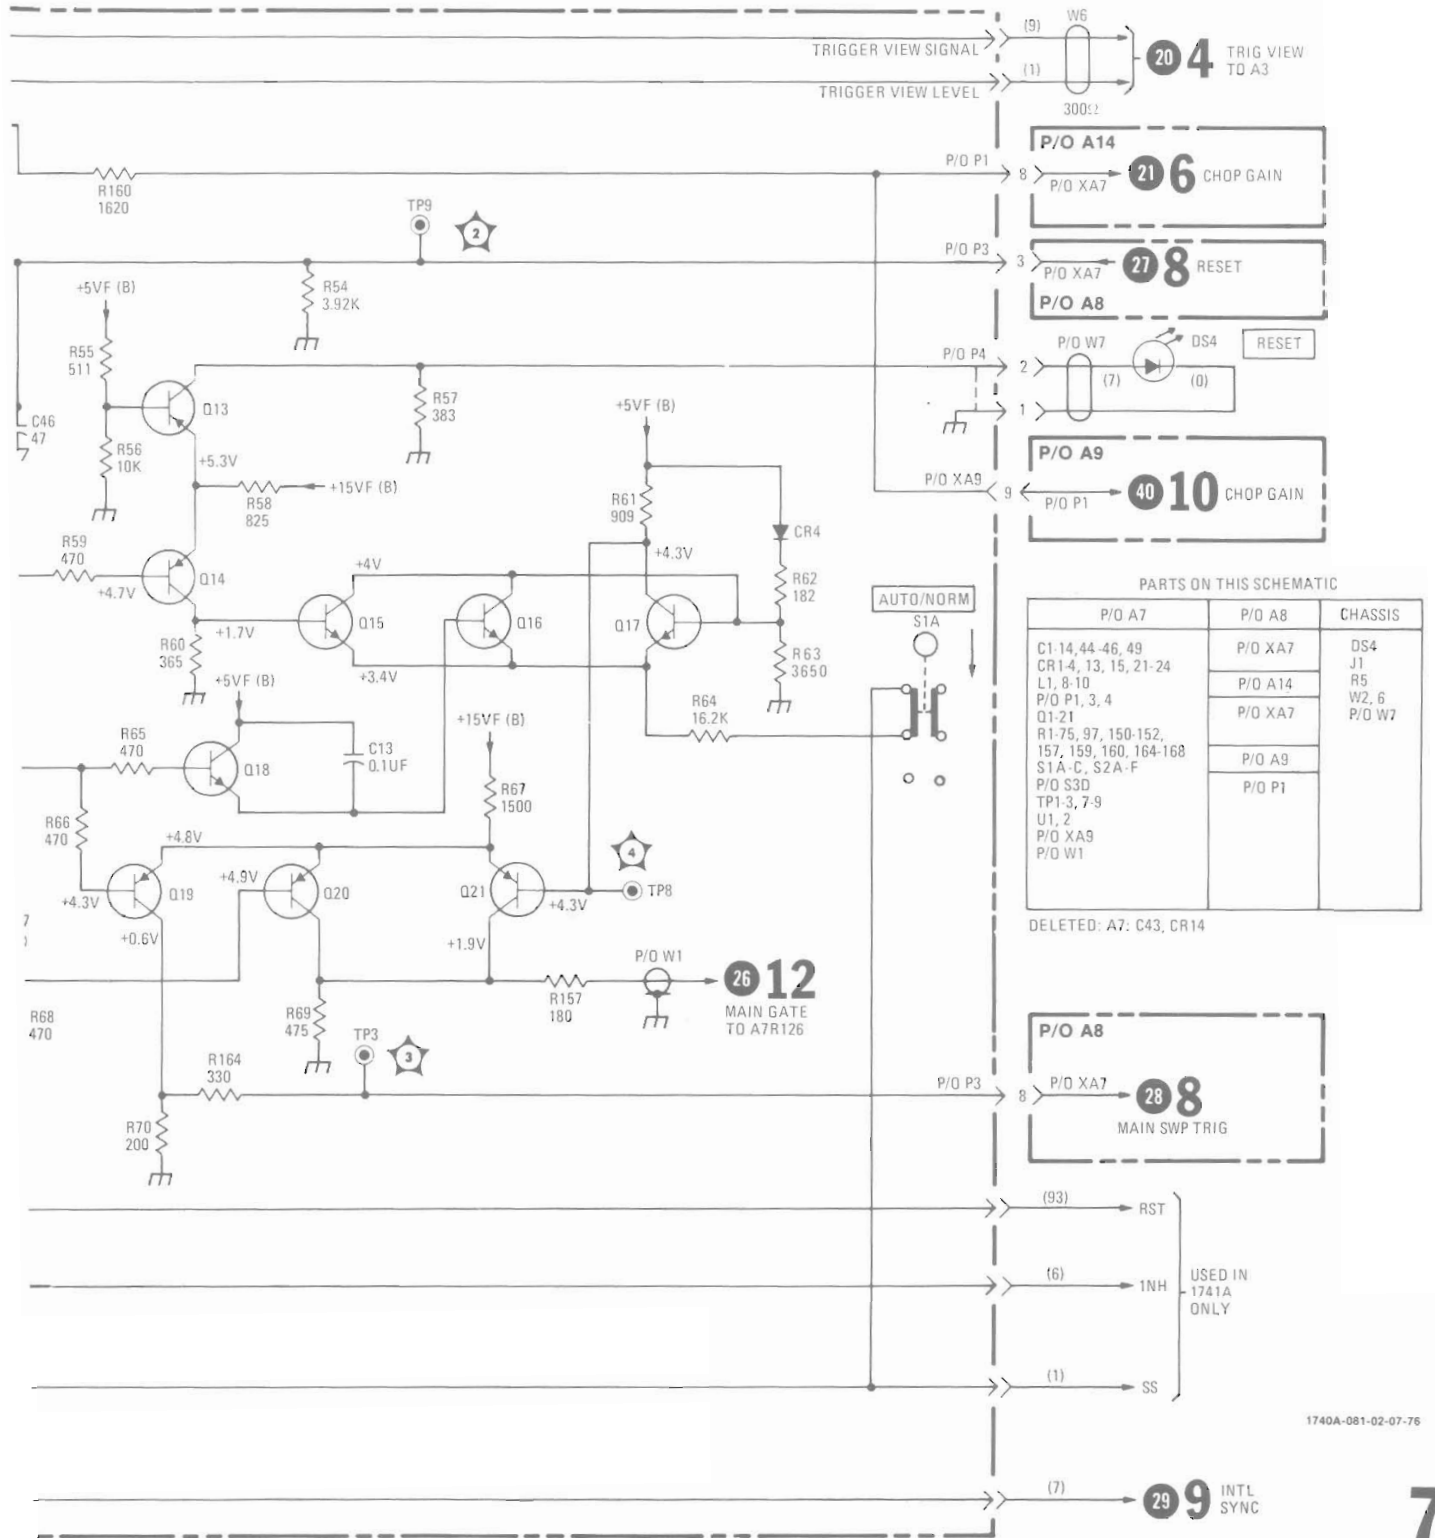

1740A-081-02-07-76

Figure 8-16.
Service Information, Main Trigger, P/O Assembly A7 (Sheet 2 of 2)
8-25

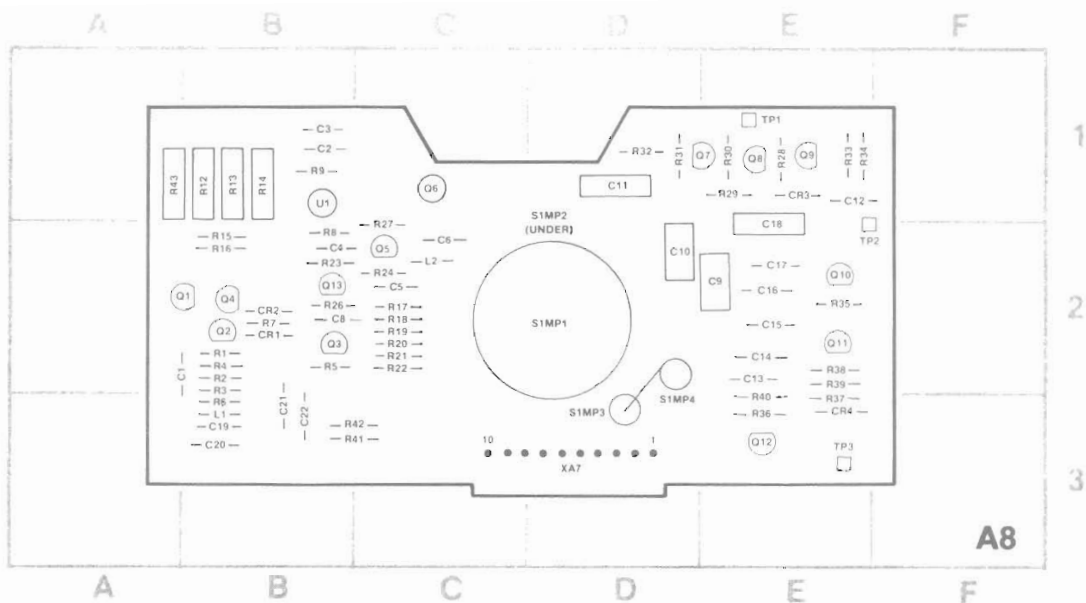

1740A-082-07-76

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | A-2 | C17 | E-2 | Q4 | B-2 | R5 | B-2 | R22 | C-2 | R38 | E-2 |
| C2 | B-1 | C18 | E-2 | Q5 | C-2 | R6 | B-3 | R23 | B-2 | R39 | E-2 |
| C3 | B-1 | C19 | B-3 | Q6 | C-1 | R7 | B-2 | R24 | C-2 | R40 | E-2 |
| C4 | B-2 | C20 | B-3 | Q7 | E-1 | R8 | B-2 | R26 | B-2 | R41 | B-3 |
| C5 | C-2 | C21 | B-3 | Q8 | E-1 | R9 | B-1 | R27 | C-2 | R42 | B-3 |
| C6 | C-2 | C22 | B-3 | Q9 | E-1 | R12 | B-1 | R28 | E-1 | R43 | A-1 |
| C8 | B-2 | CR1 | B-2 | Q9 | E-1 | R13 | B-1 | R29 | E-1 | SIMP1 | D-2 |
| C9 | E-2 | CR2 | B-2 | Q10 | E-2 | R14 | B-1 | R30 | E-1 | SIMP2 | D-1 |
| C10 | D-2 | CR3 | E-1 | Q11 | E-2 | R15 | B-2 | R31 | D-1 | SIMP3 | D-3 |
| C11 | D-1 | CR4 | E-3 | Q12 | E-3 | R16 | B-2 | R32 | D-1 | SIMP4 | D-3 |
| C12 | E-1 | L1 | B-3 | Q13 | B-2 | R17 | C-2 | R33 | E-1 | TP1 | E-1 |
| C13 | E-2 | L2 | C-2 | R1 | B-2 | R18 | C-2 | R34 | E-1 | TP2 | E-2 |
| C14 | E-2 | Q1 | B-2 | R2 | B-2 | R19 | C-2 | R35 | E-2 | TP3 | E-3 |
| C15 | E-2 | Q2 | B-2 | R3 | B-2 | R20 | C-2 | R36 | E-3 | U1 | B-1 |
| C16 | E-2 | Q3 | B-2 | R4 | B-2 | R21 | C-2 | R37 | E-3 | XA7 | D-3 |

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 8**

1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:

| | |
|---------------------------|----------|
| Main TRIGGER LEVEL | fully cw |
| AUTO/NORM | NORM |
| SINGLE | engaged |
| RESET light should be off | |

2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 8**




1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:

| | |
|----------------------------|----------------|
| Coupling (channel A) | 50Ω |
| TRIGGER LEVEL (main) | stable display |

2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).






3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.

4. Adjust square-wave generator output for 6 divisions of signal amplitude (.6 V) at 5 kHz.

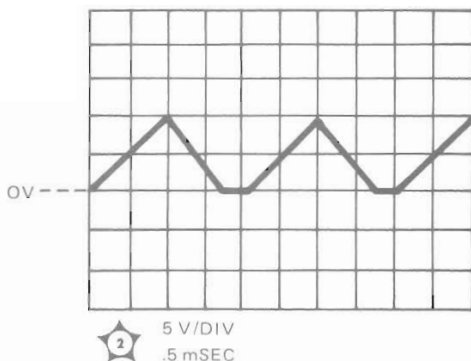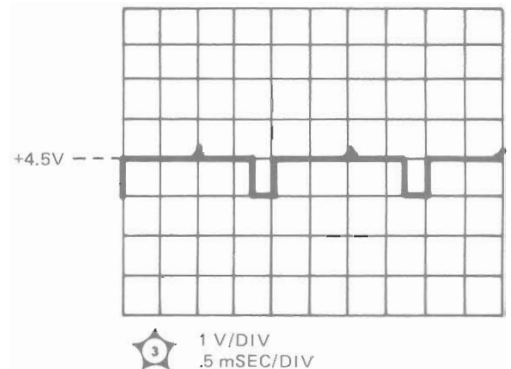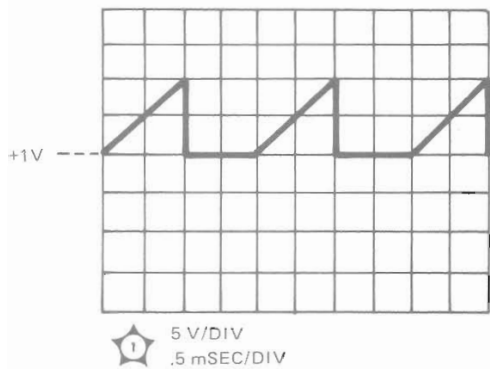

NOTE: WAVEFORMS ARE TIME RELATED

Figure 8-17. Service Information, Main Sweep Assembly A8 (Sheet 1 of 2)

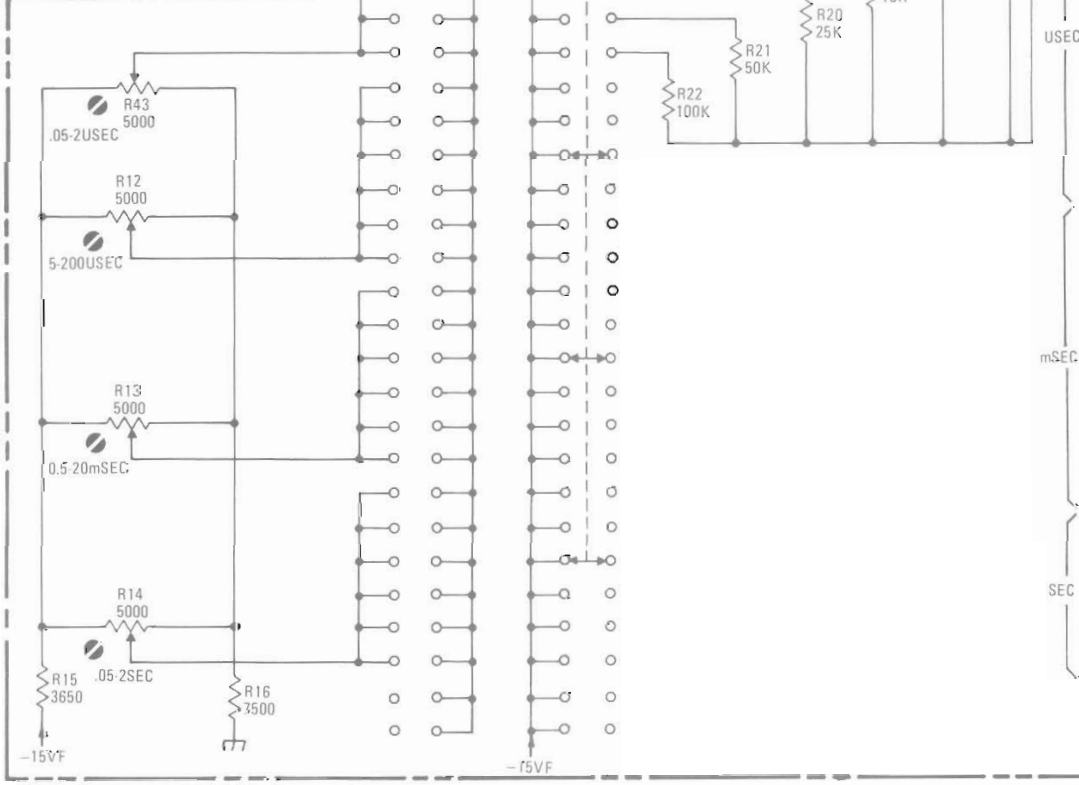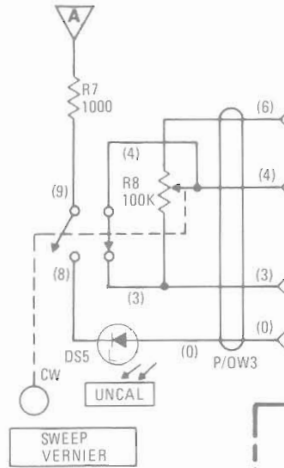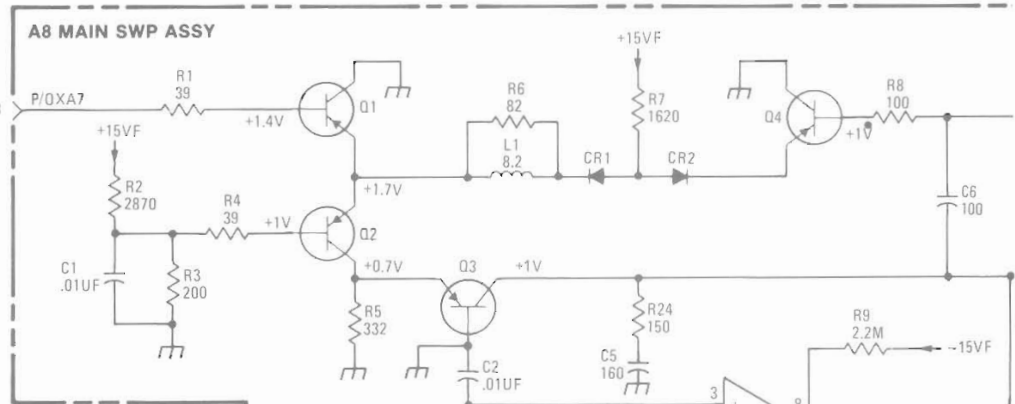

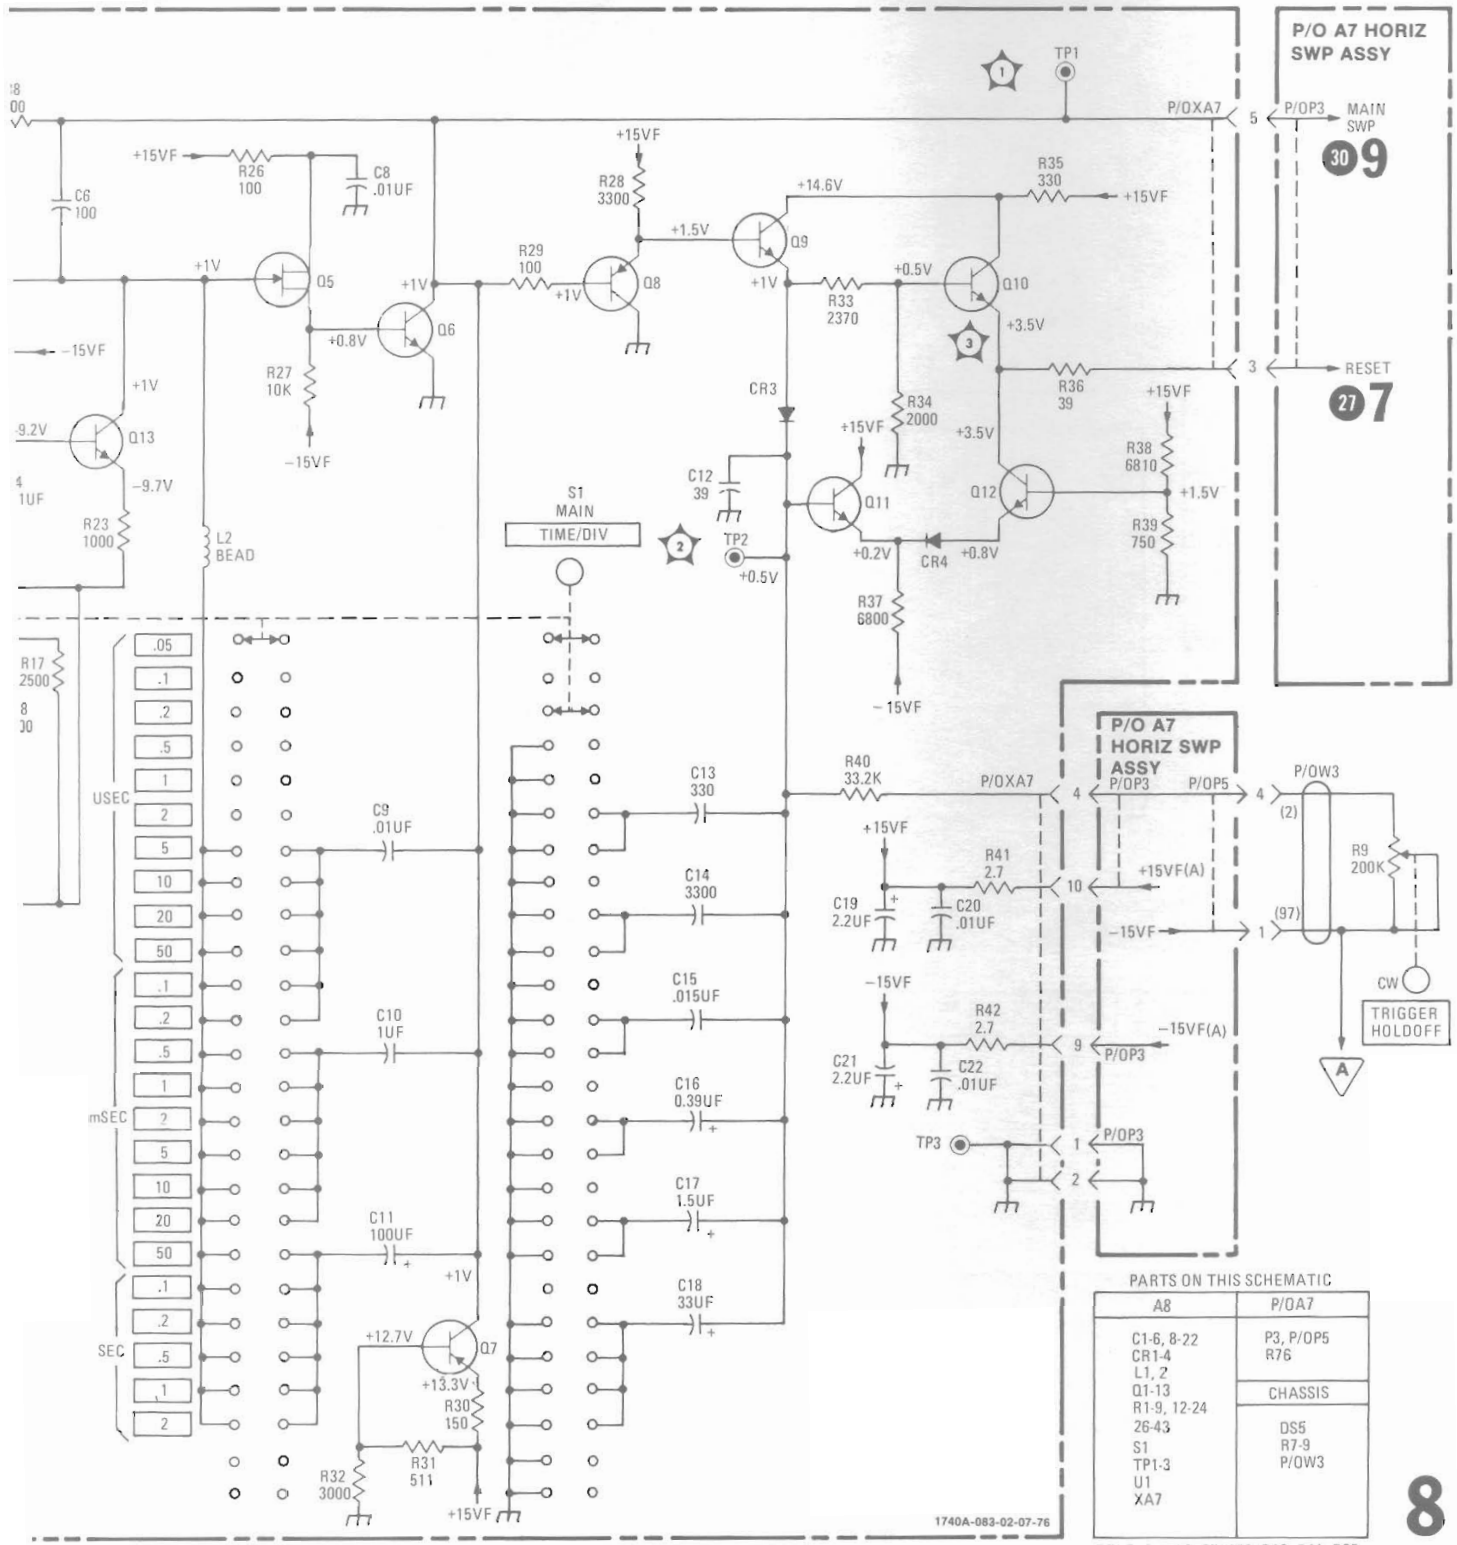





Figure 8-17.
Service Information, Main Sweep Assembly A8 (Sheet 2 of 2)
8-27

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 9**

- Set front-panel controls in accordance with initial control settings in Section V, except as follows:
 DLY'D TIME/DIV 50 μ SEC
- All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 9**


- Set front-panel controls in accordance with initial control settings in Section V, except as follows:
 Coupling (channel A) 50 Ω
 DLY'D TIME/DIV 10 μ SEC
 DELAY 5.00
 Horiz display MAIN
 TRIGGER LEVEL (main) stable display
- Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
- Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
- Adjust square-wave generator output for 6 divisions of signal amplitude (.6 V) at 5 kHz.

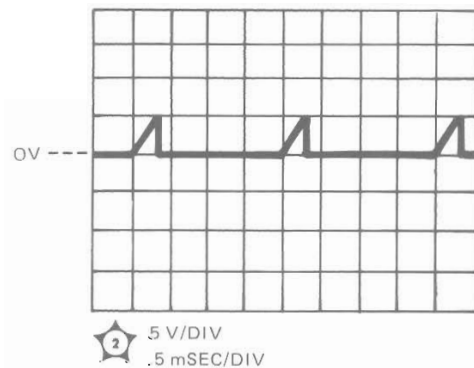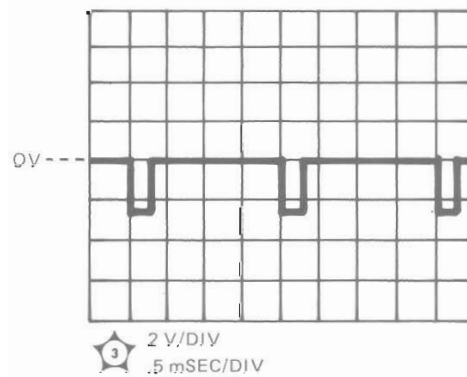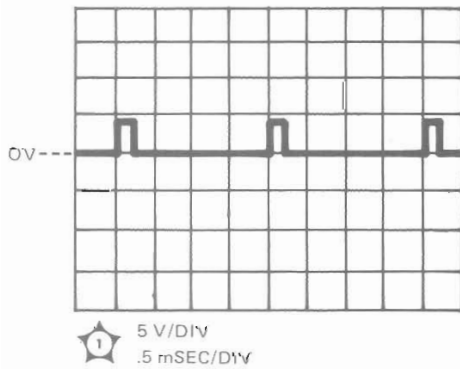


1740A-085-01-10-75

Figure 8-18. Service Information, Delayed Trigger Assembly A10 and Horizontal Sweep Assembly A7 (Sheet 1 of 2)


A10 DELAYED TRIGGER ASSY

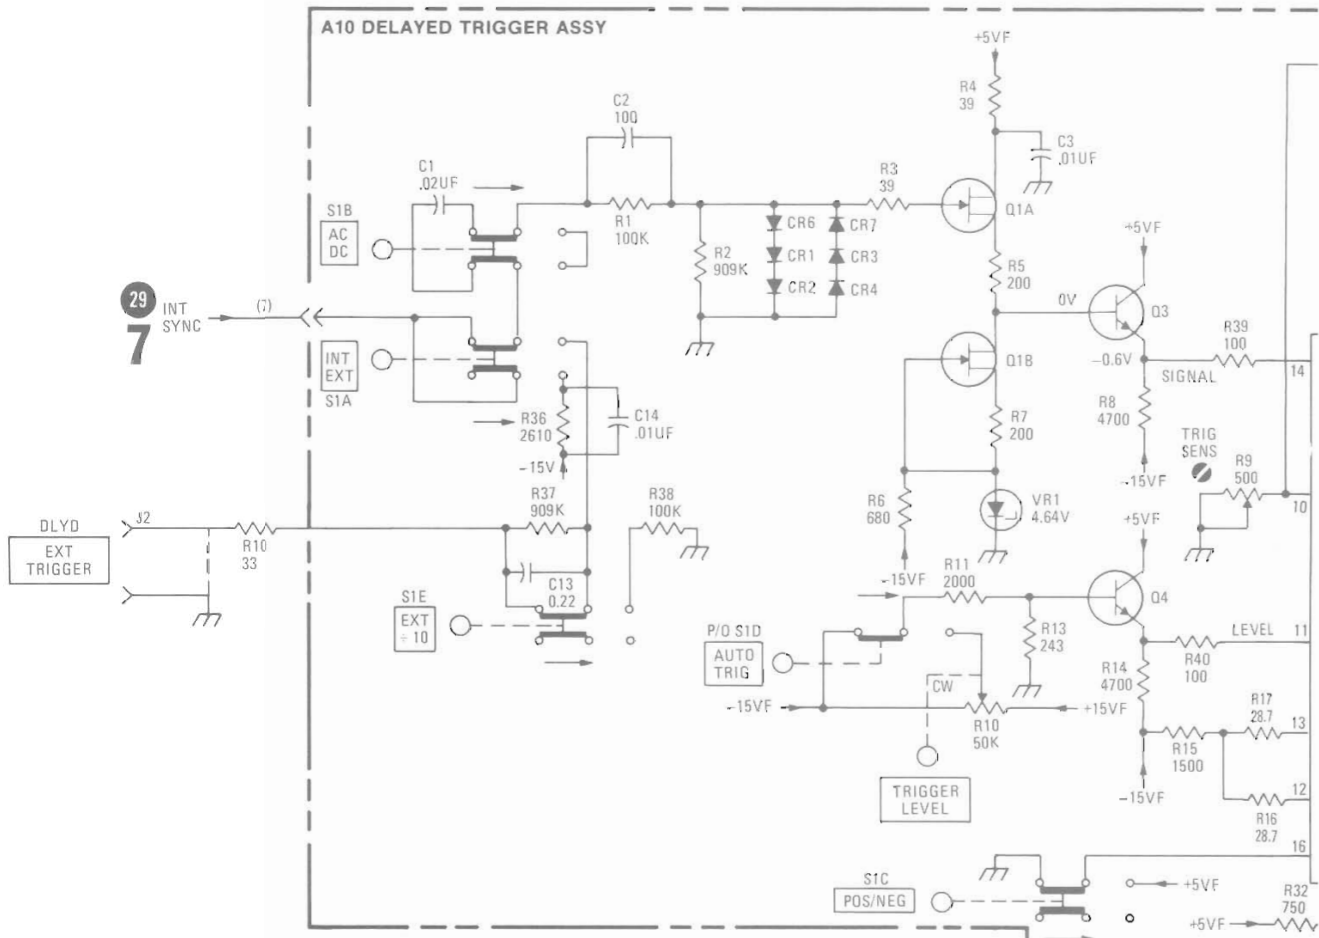


P/O A7 HORIZ SWP ASSY

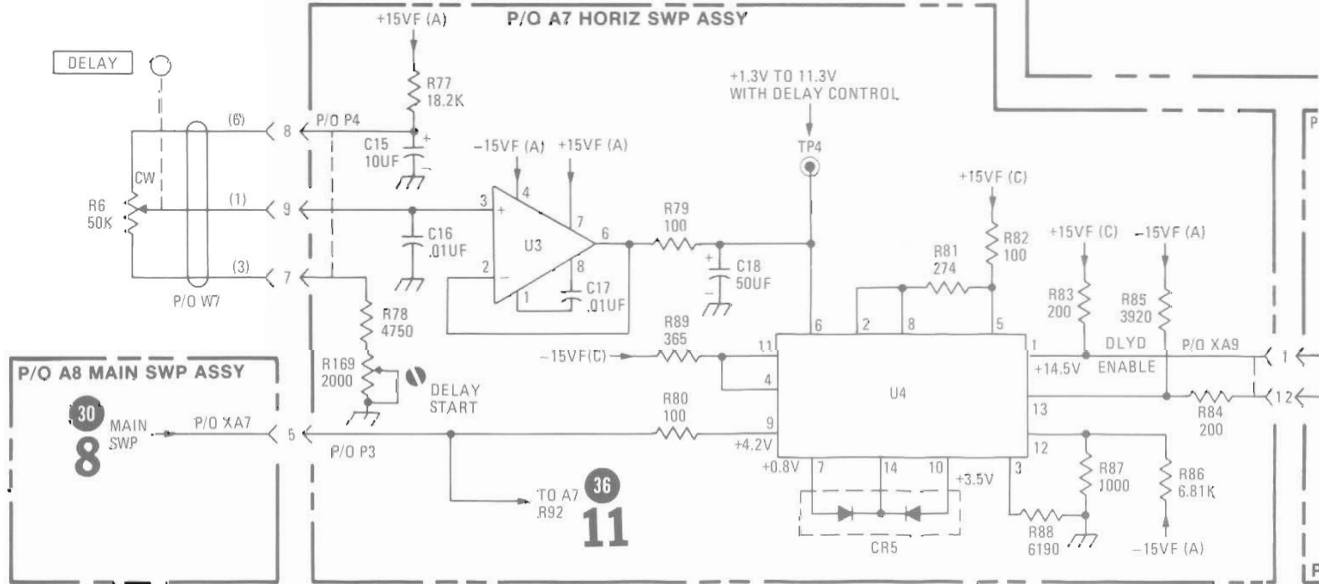


P/O A8 MAIN SWP ASSY



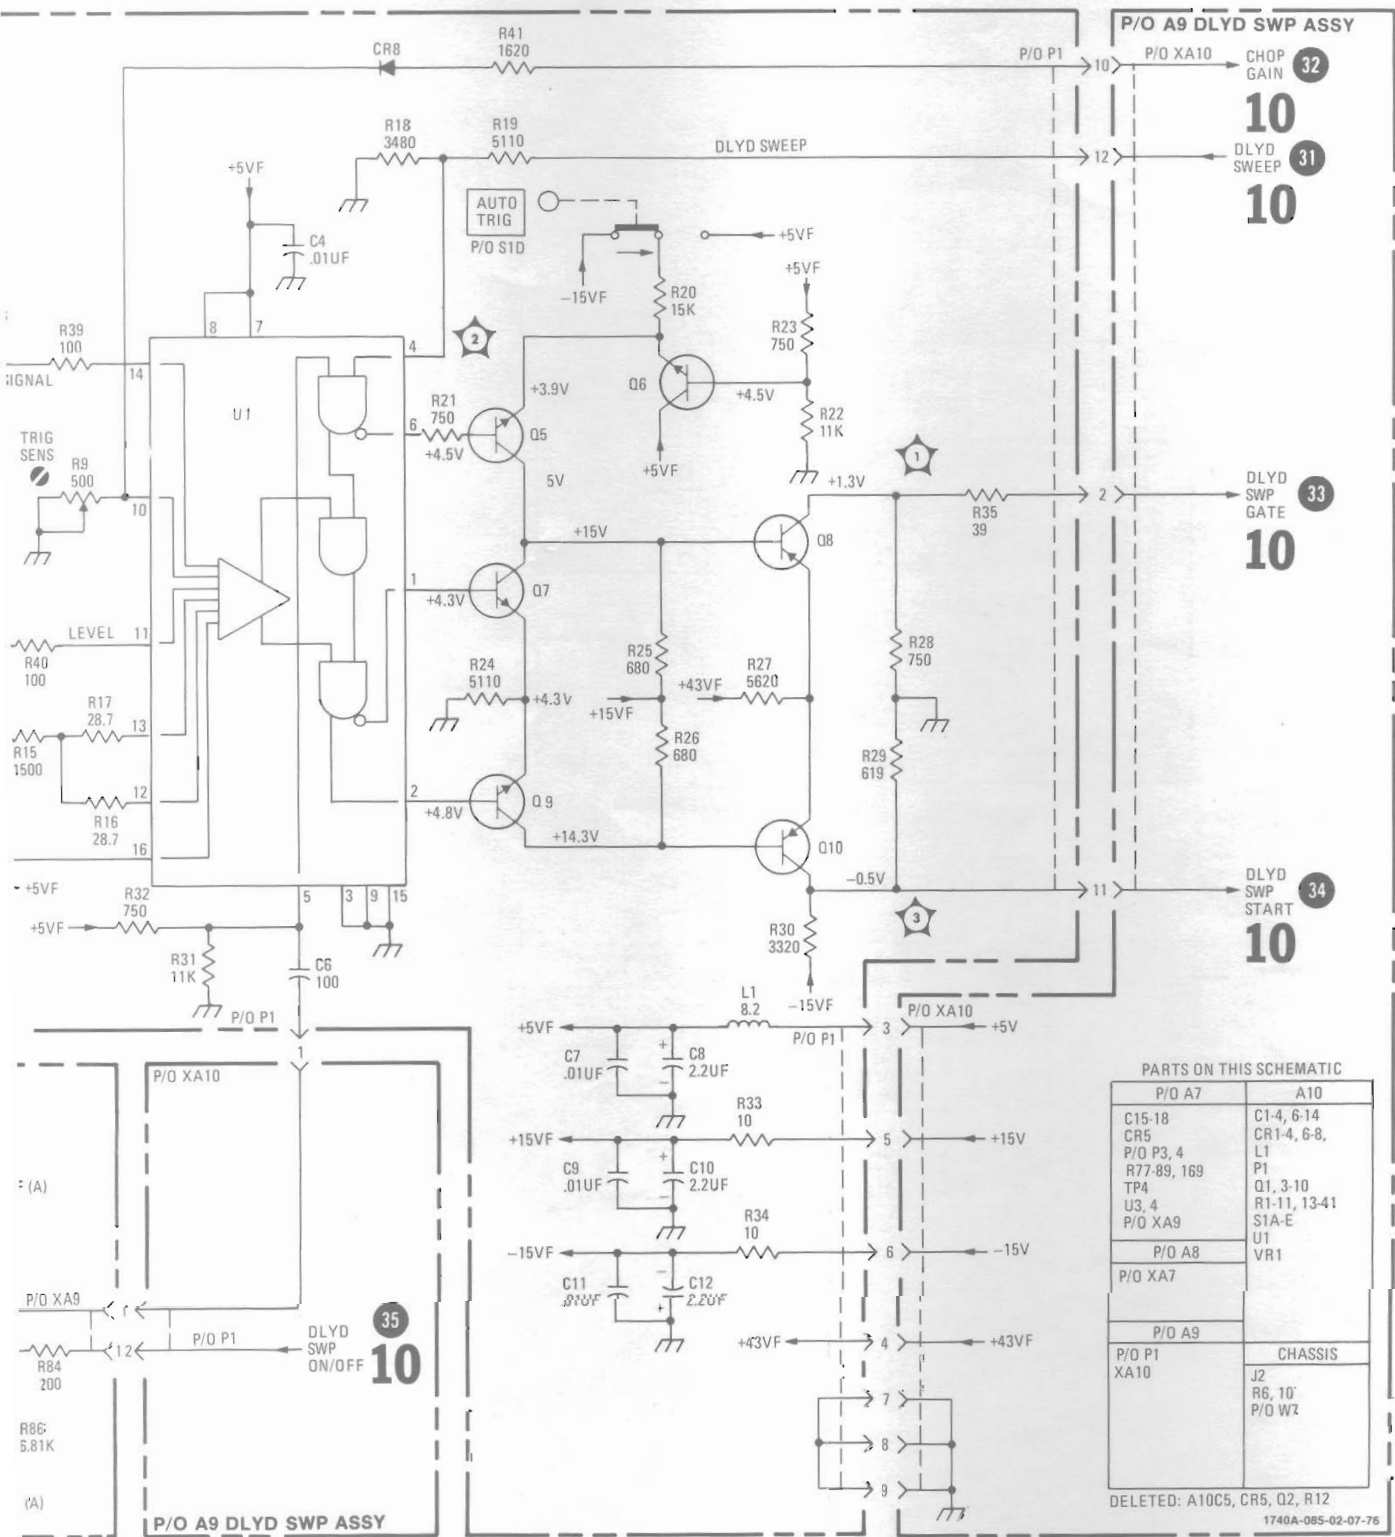

9

Figure 8-18.
Service Information, Delayed Trigger Assembly A10 and Horizontal Sweep Assembly A7 (Sheet 2 of 2)
8-29

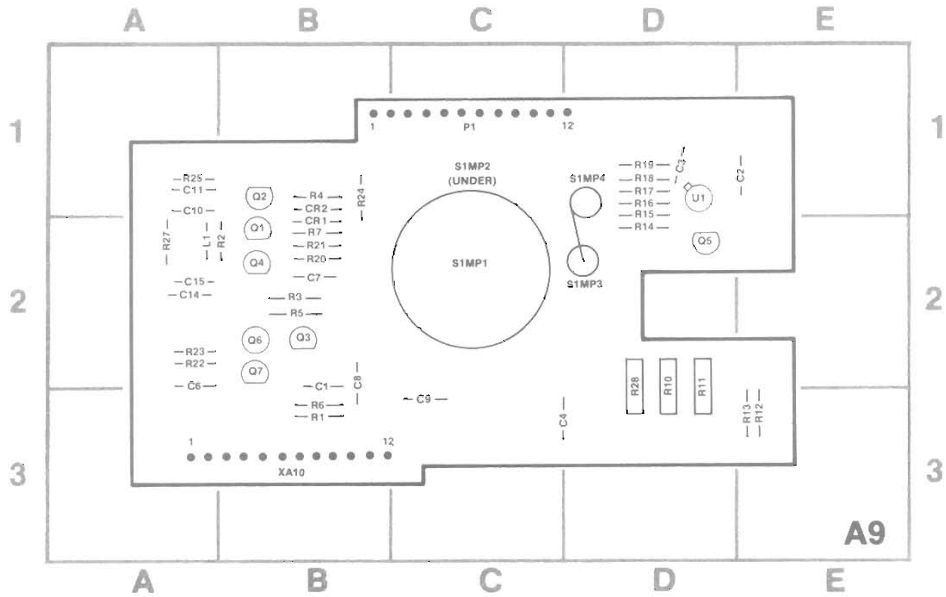

1740A-086-10-75

| REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC | REF DESIG | GRID LOC |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| C1 | B-2 | C15 | A-2 | Q7 | B-2 | R13 | E-3 | R24 | B-1 |
| C2 | E-1 | CR1 | B-2 | R1 | B-3 | R14 | D-2 | R25 | A-1 |
| C3 | D-1 | CR2 | B-1 | R2 | B-2 | R15 | D-1 | R27 | A-2 |
| C4 | C-3 | L1 | A-2 | R3 | B-2 | R16 | D-1 | R28 | D-2 |
| C6 | A-2 | P1 | C-1 | R4 | B-1 | R17 | D-1 | S1MP1 | C-2 |
| C7 | B-2 | Q1 | B-2 | R5 | B-2 | R18 | D-1 | S1MP2 | C-1 |
| C8 | B-2 | Q2 | B-1 | R6 | B-3 | R19 | D-1 | S1MP3 | D-2 |
| C9 | C-3 | Q3 | B-2 | R7 | B-2 | R20 | B-2 | S1MP4 | D-1 |
| C10 | A-1 | Q4 | B-2 | R10 | D-2 | R21 | B-2 | U1 | D-1 |
| C11 | A-1 | Q5 | D-2 | R11 | D-2 | R22 | A-2 | XA10 | B-3 |
| C14 | A-2 | Q6 | B-2 | R12 | E-3 | R23 | A-1 | | |

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 10**

1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:

| | |
|---------------------------|--------------|
| DLY'D TIME/DIV | 50 μ SEC |
| AUTO/NORM | NORM |
| SINGLE | engaged |
| Both TRIGGER LEVELS | fully cw |
| RESET light should be off | |


2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 10**

1. Set front-panel controls in accordance with initial control settings in Section V, except as follows:


| | |
|----------------------------|----------------|
| Coupling (channel A) | 50 Ω |
| DLY'D TIME/DIV | 10 μ SEC |
| DELAY | 5.00 |
| Horiz display | MAIN |
| TRIGGER LEVEL (main) | stable display |


2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
3. Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square-wave generator output for 6 divisions of signal amplitude (6 V) at 5 kHz.

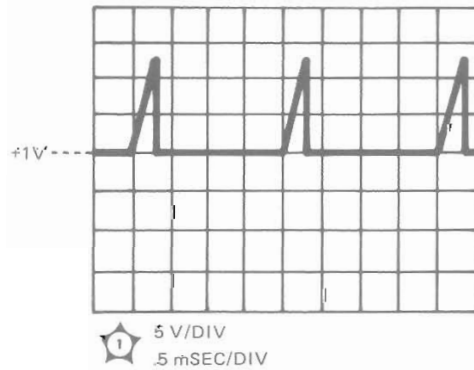

1740A-087-01-10-75

Figure 8-19. Service Information., Delayed Sweep Assembly A9 (Sheet 1 of 2)

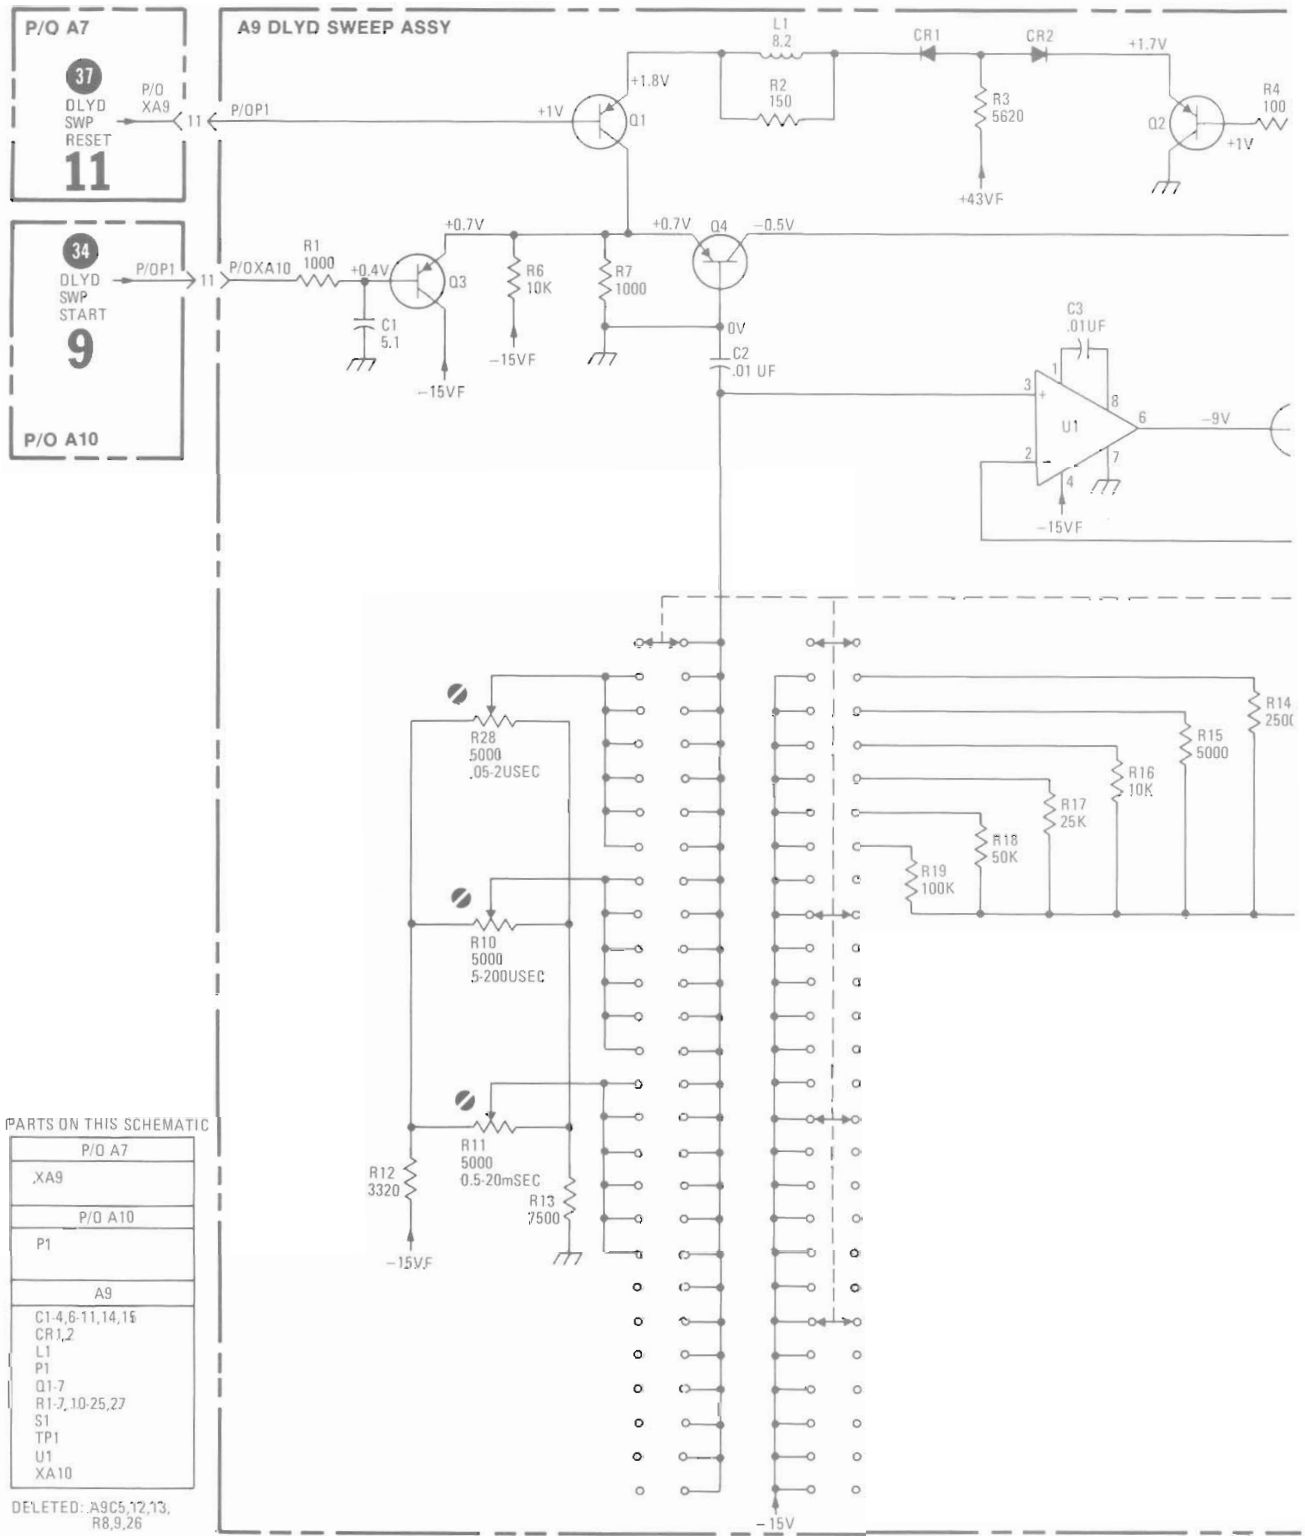

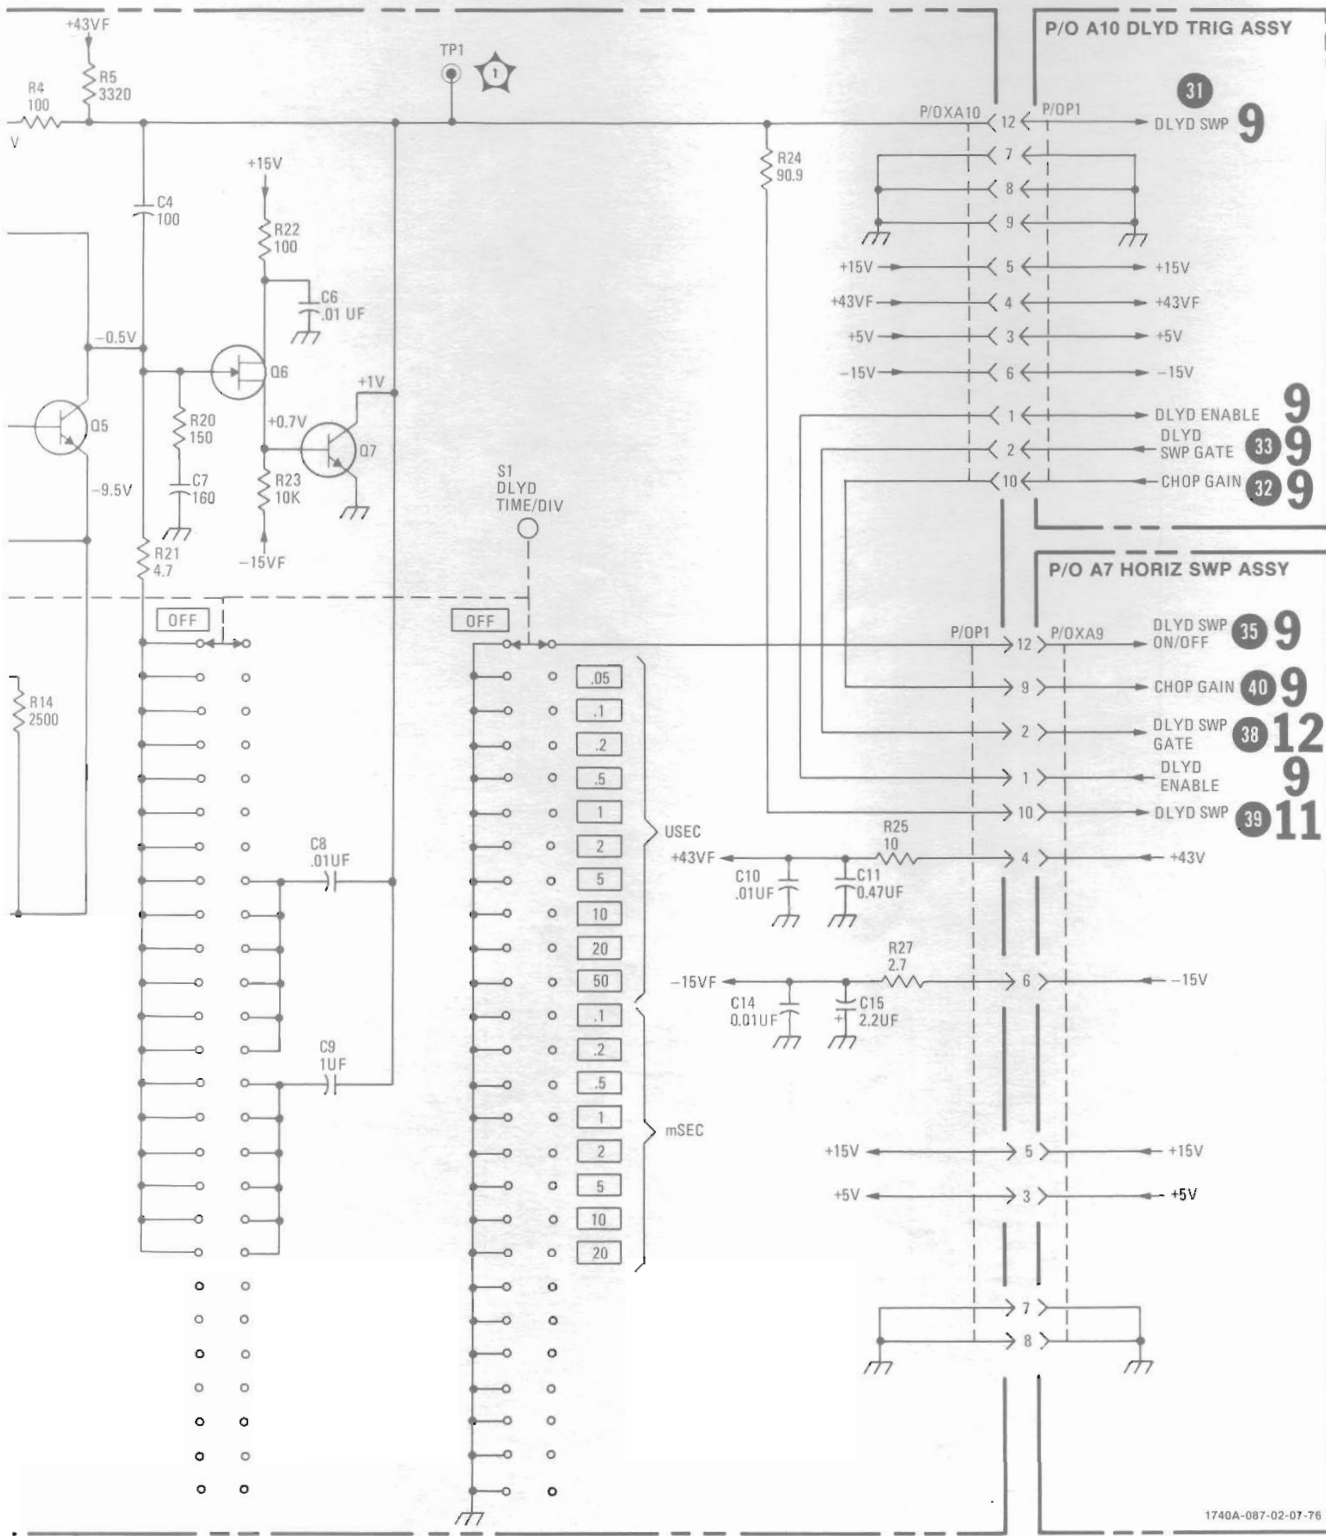

10

Figure 8-19.
Service Information, Delayed Sweep Assembly A9 (Sheet 2 of 2)
8-31

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 11**

- Set front-panel controls in accordance with initial control settings in Section V, except as follows:
 - Sweep mode A vs B
 - Spot centered on CRT.
 - BEAM INTENSITY barely visible spot
- All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 11**

- Set front-panel controls in accordance with initial control settings Section V, except as follows:
 - Coupling (channel A) 50Ω
 - TRIGGER LEVEL (main) stable display
- Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s).
- Connect HP Model 211B Square-wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
- Adjust square-wave generator output for 6 divisions of signal amplitude (.6 V) at 5 kHz.



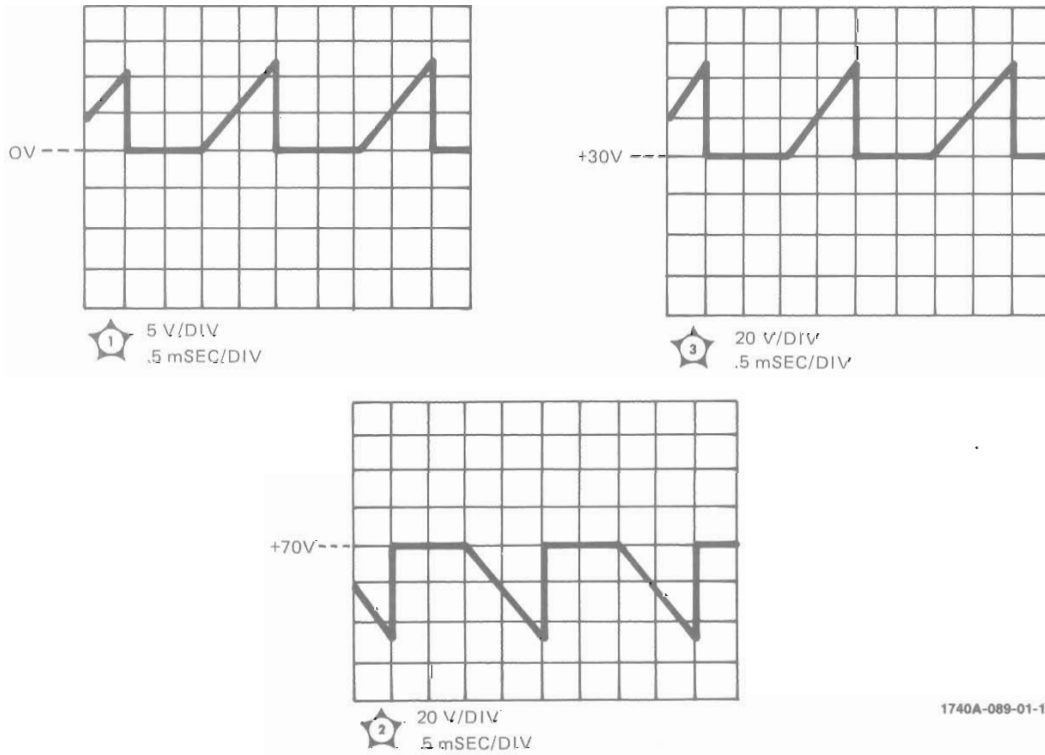


Figure 8-20. Service Information, Horizontal Output Assembly A11 and Horizontal Sweep Assembly A7 (Sheet 1 of 2)

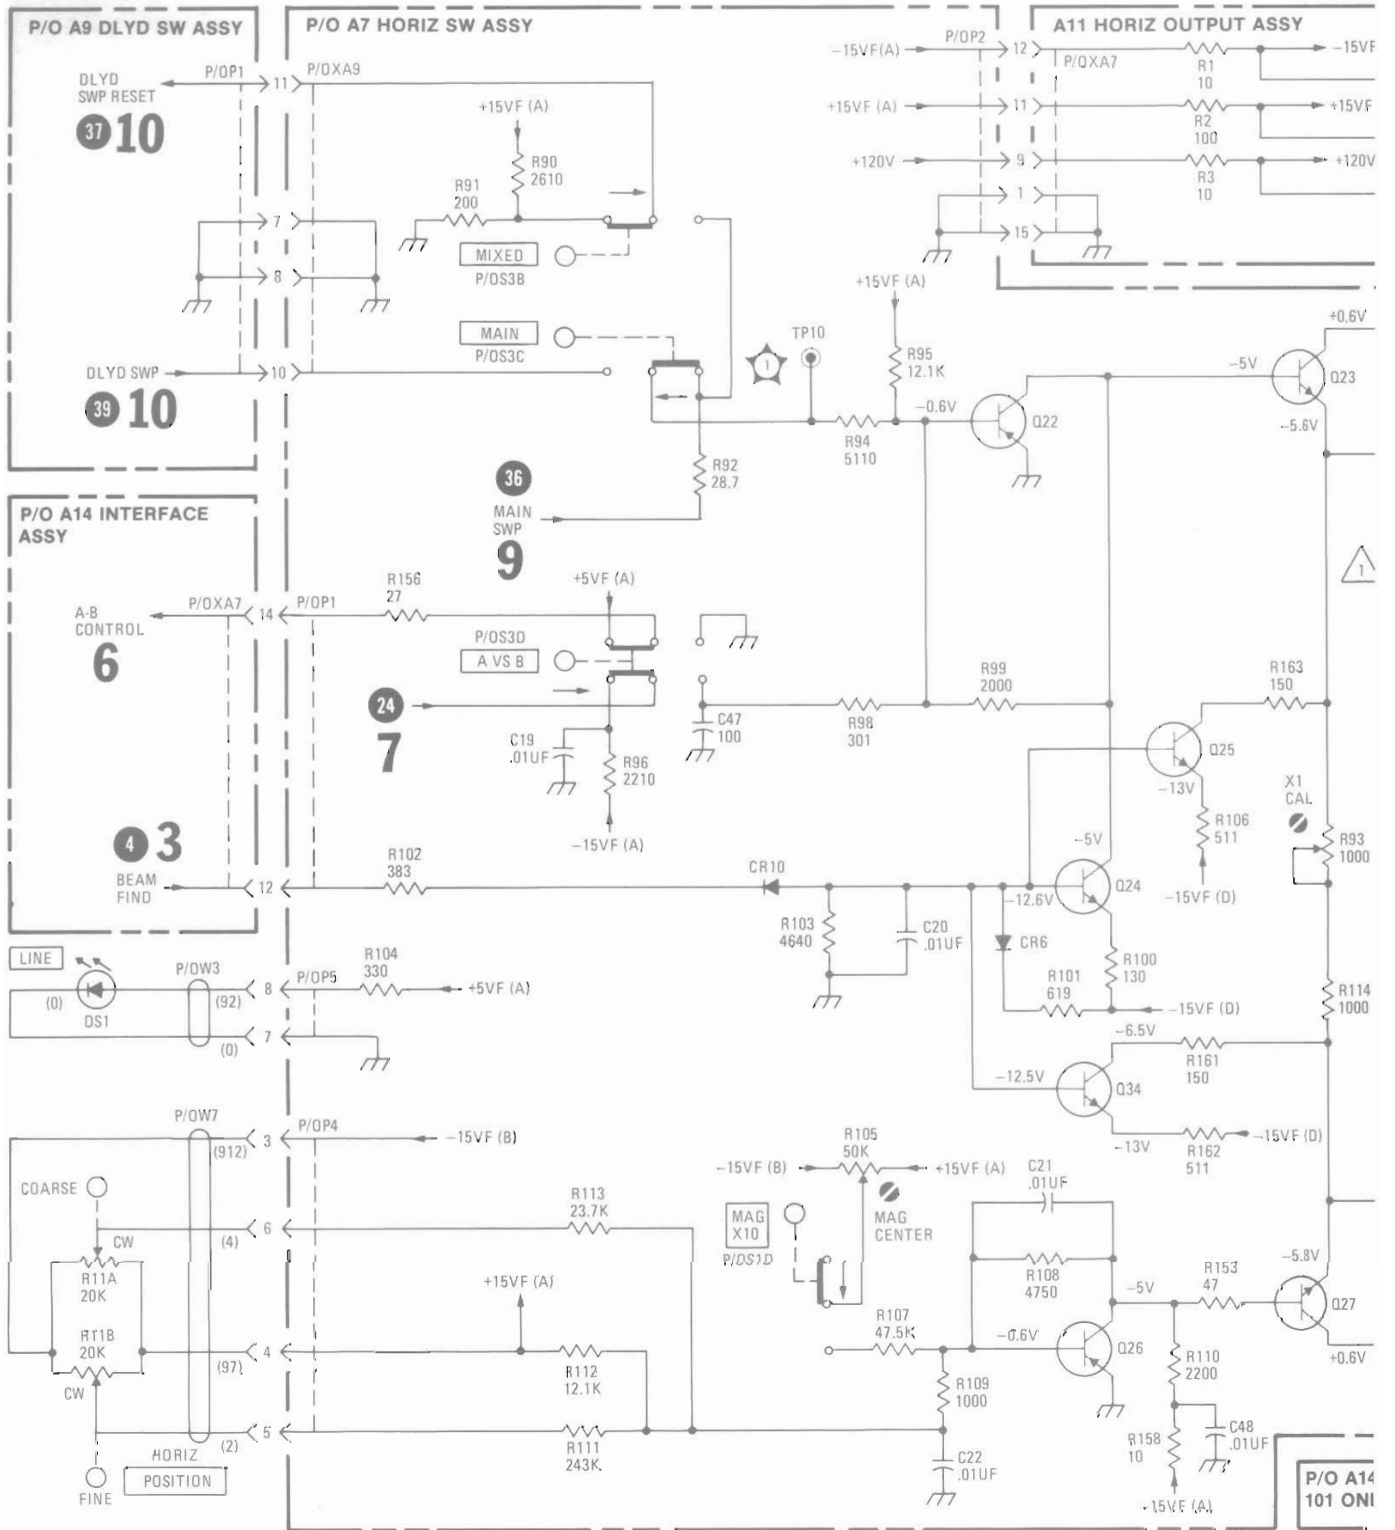

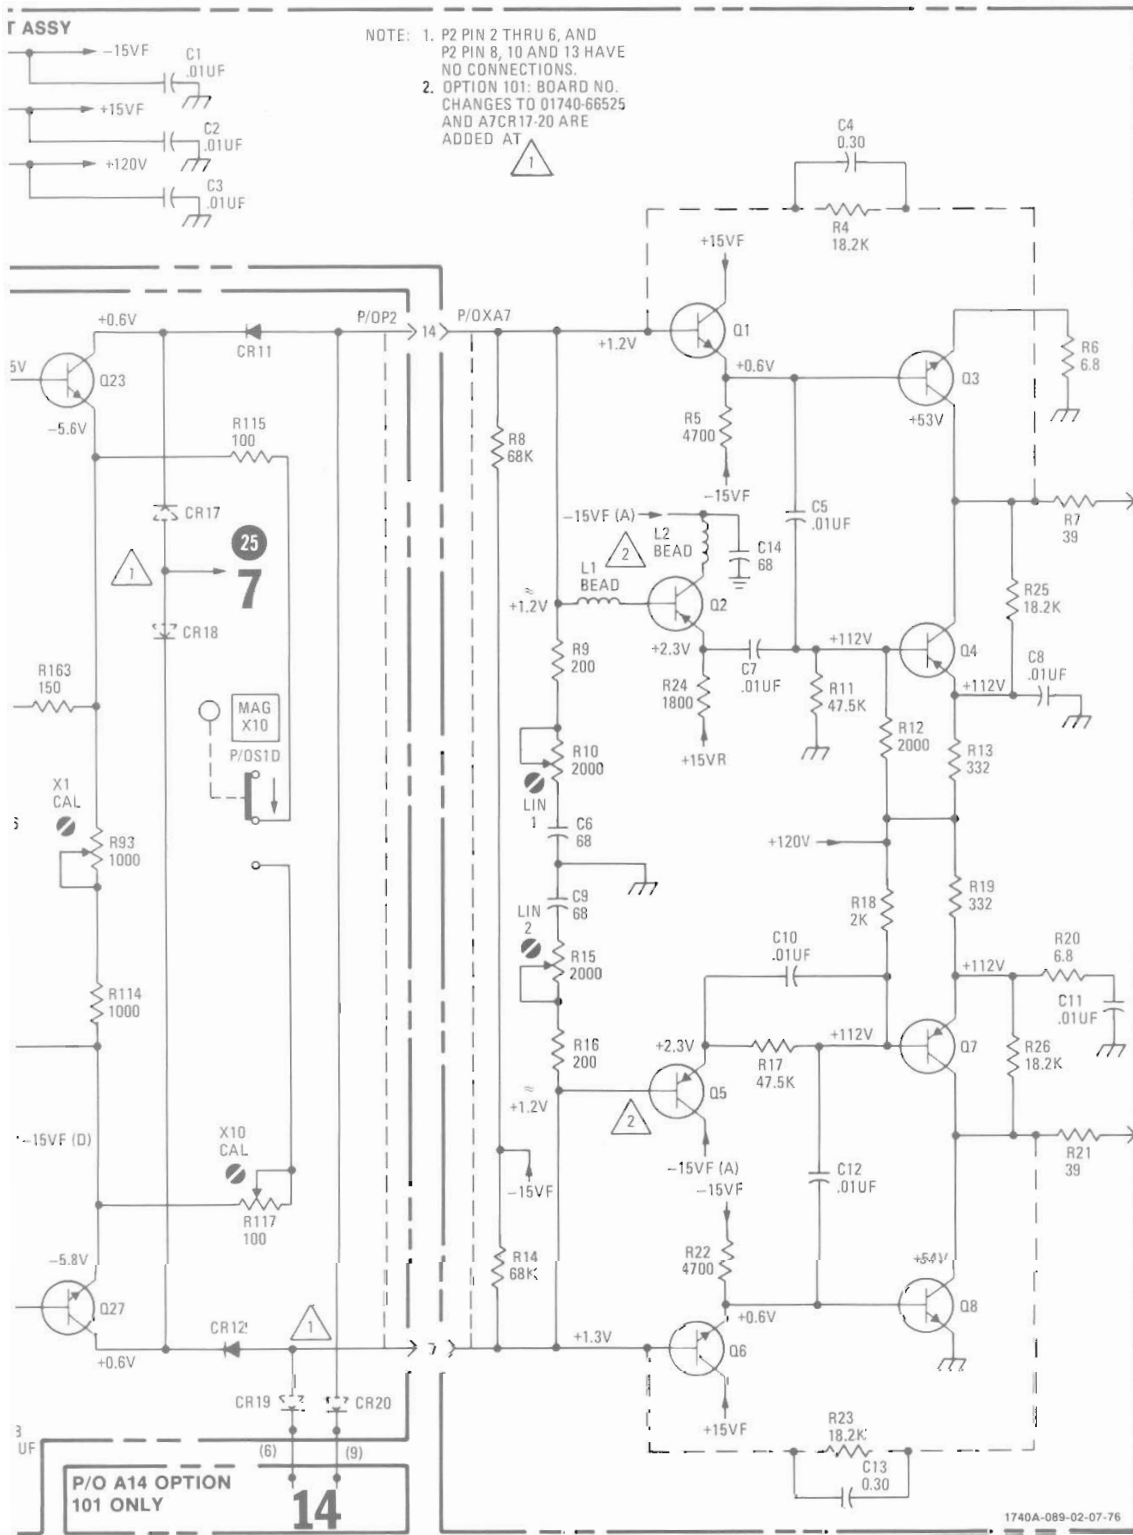

PARTS ON THIS SCHEMATIC

| P/OA7 | P/OA9 |
|--------------|---------|
| C19,22,47,48 | P/OP1 |
| CR6-10, | |
| CR6,10-12, | A11 |
| 17,20 | |
| P/OP1,2,4,5 | C1-14 |
| Q22,27,34 | L1-2 |
| R90-115,117, | Q1-8 |
| 153,156,158, | R1-26 |
| 161-163 | XA7 |
| S10,S38-D | CHASSIS |
| TP10 | |
| P/OXA9 | DS1 |
| | R11 |

DELETED: A7 R116
 A11Q2/A11Q5
 LEAD CONFIGURATION
 BOTTOM VIEW



2
 TO HORIZ PLATES

W4
 300Ω

(9)

(2)

2
 TO HORIZ PLATES

1740A-089-02-07-76

11


Figure 8-20. Service Information, Horizontal Output Assembly A11 and Horizontal Sweep Assembly A7 (Sheet 2 of 2), 8-33

**DC VOLTAGE MEASUREMENT CONDITIONS
SCHEMATIC 12**


1. Set front panel controls in accordance with initial control settings in Section V, except as follows:
 Sweep mode: Normal External Hold Roll A VS B
 BEAM INTENSITY: Normal Dim Trace Barely visible spot
 Spot centered on CRT
2. All voltages are referenced to chassis ground. All indications are nominal and 15% variation from those indicated should be considered normal.

**WAVEFORM MEASUREMENT CONDITIONS
SCHEMATIC 12**


1. Set front panel controls in accordance with initial control settings in Section V, except as follows:
 Coupling (channel A): DC AC GND Video Hi-Z
 TRIGGER LEVEL (main): 0.50V 1.00V 2.00V 4.00V 8.00V Stable display
2. Set monitor oscilloscope TIME/DIV and VOLTS/DIV controls as indicated under waveform(s)
3. Connect HP Model 211B Square wave Generator 50-ohm output to Model 1740A channel A INPUT connector.
4. Adjust square wave generator output for 6 divisions of signal amplitude (6 V) at 5 kHz.

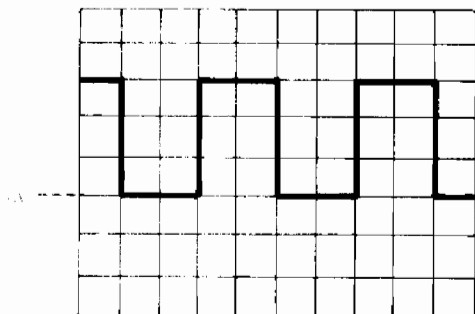

1 6 V (p-p)
5 ns/STC

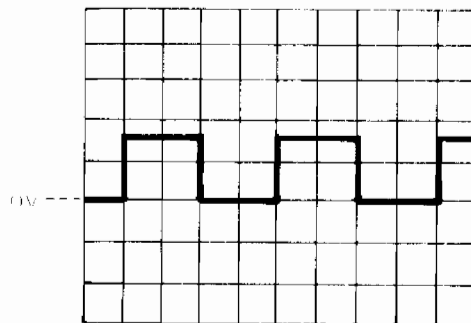


3 1 V/DIV
5 ns/STC

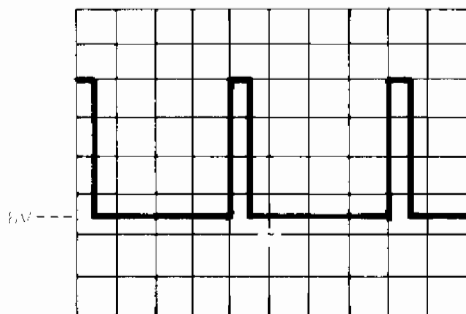

2 1 V/DIV
5 ns/STC

1740A-090 01-10-75

Figure 8-21. Service Information, Gate Schmitt, P/O Assembly A7 (Sheet 1 of 2)

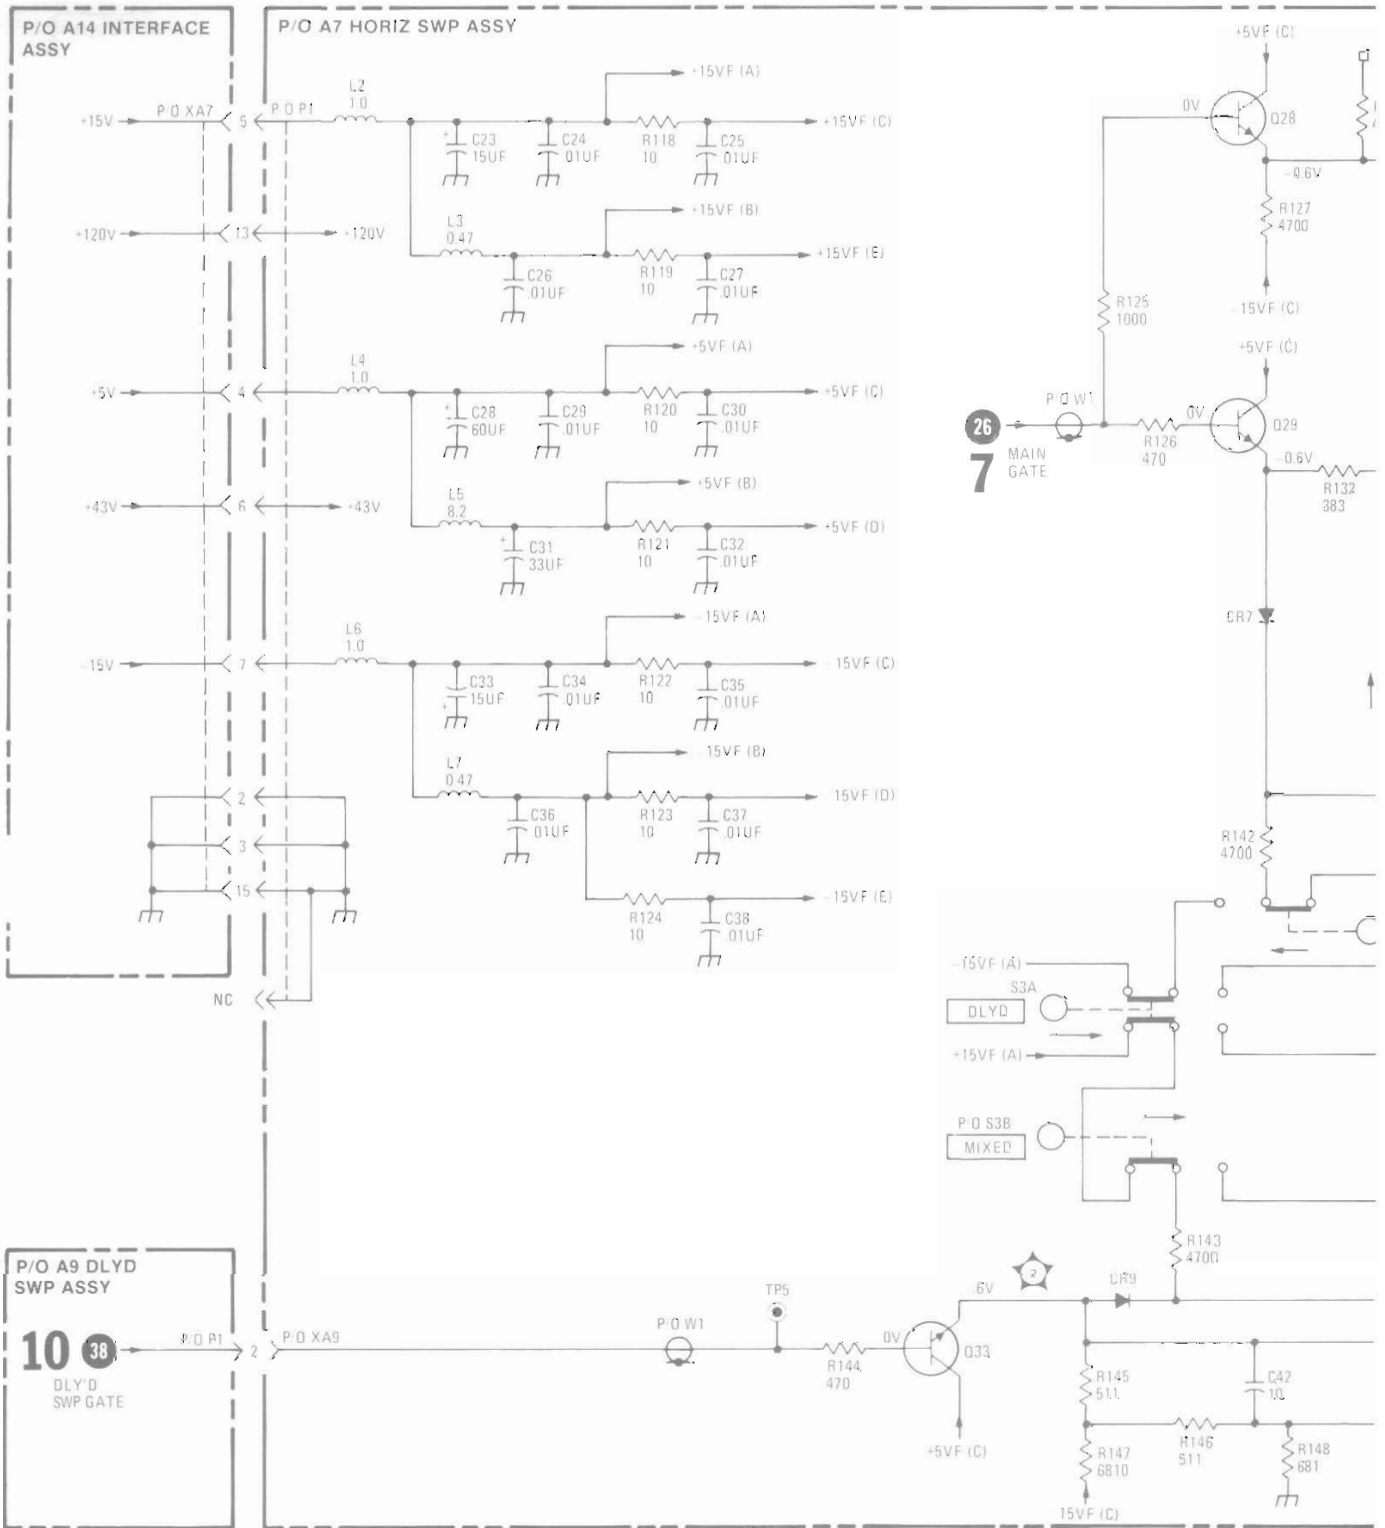



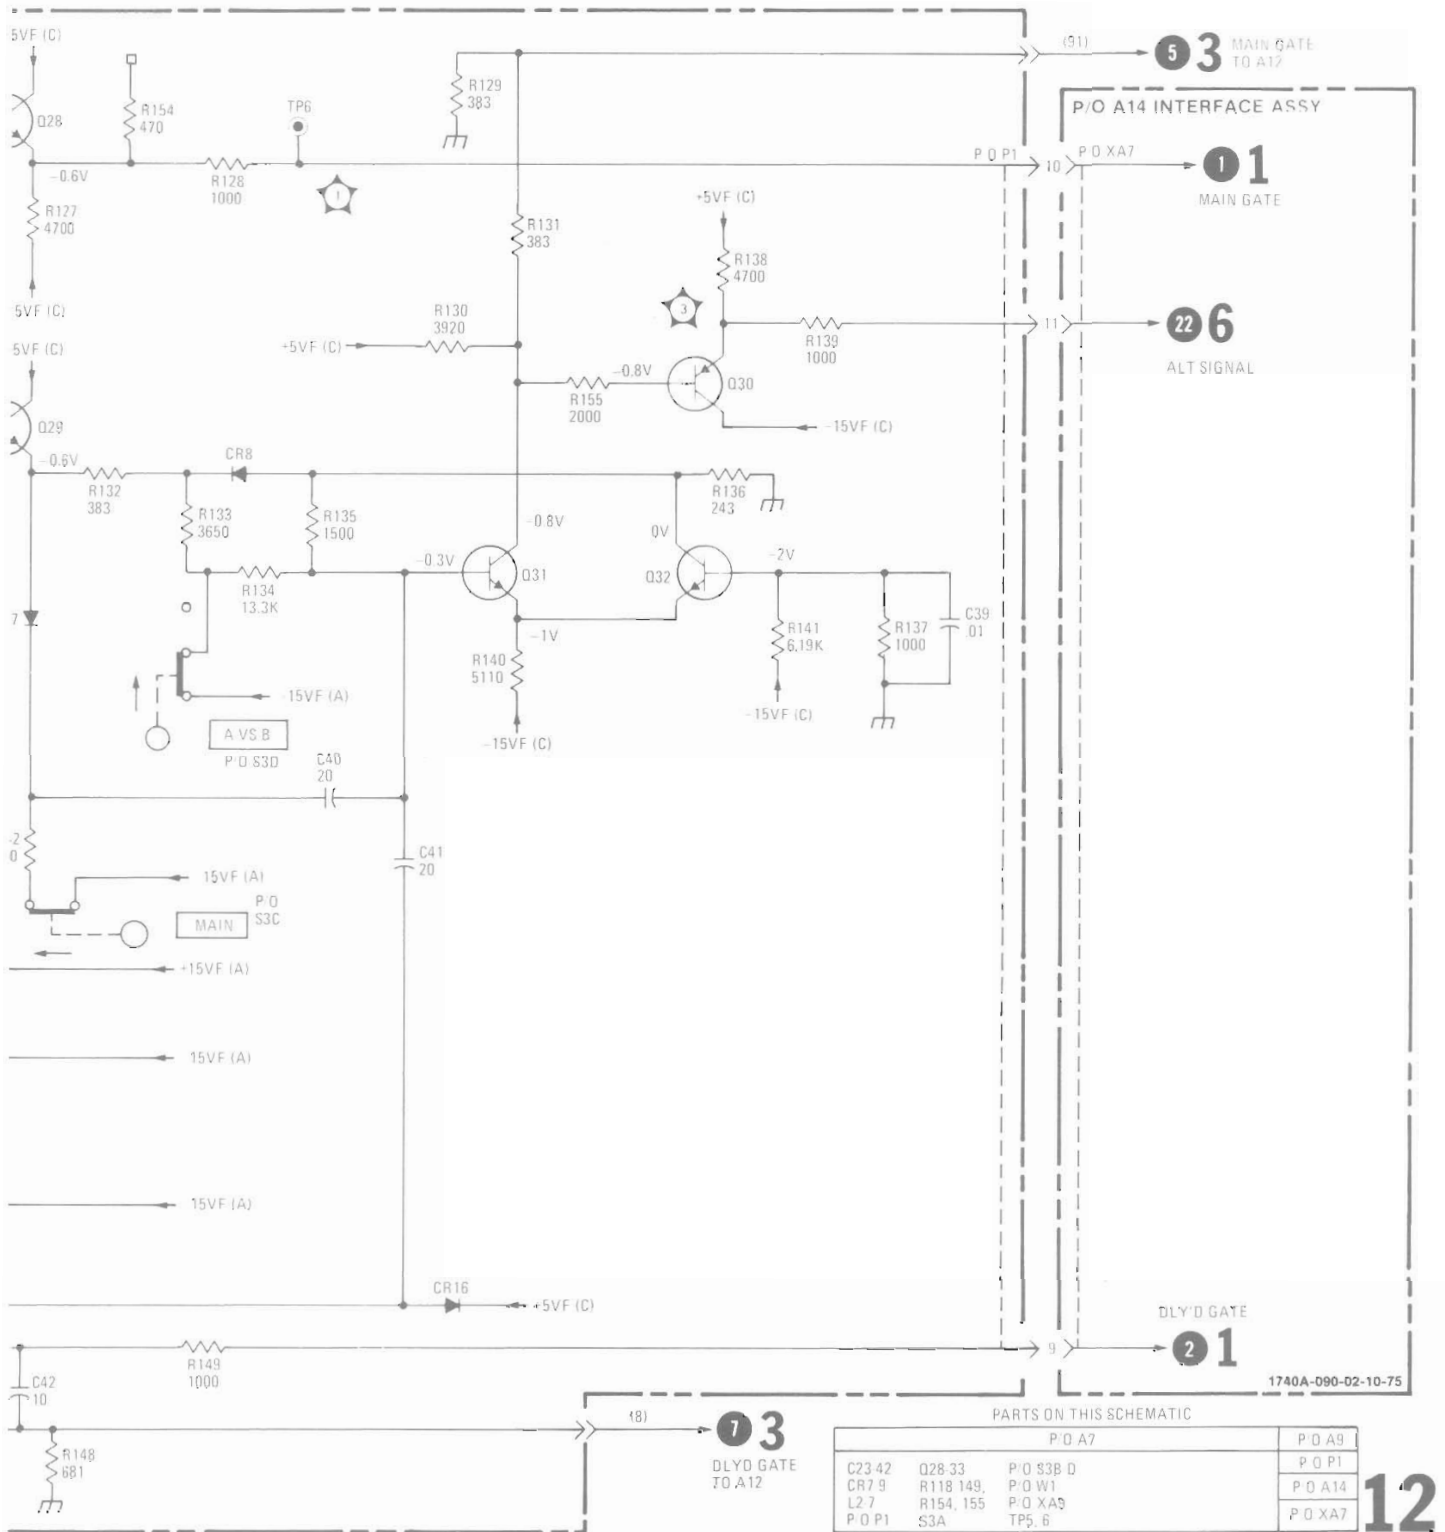


Figure 8-21.
 Service Information, Gate Schmitt, P/O Assembly A7 (Sheet 2 of 2)
 8-35/(8-36 blank)

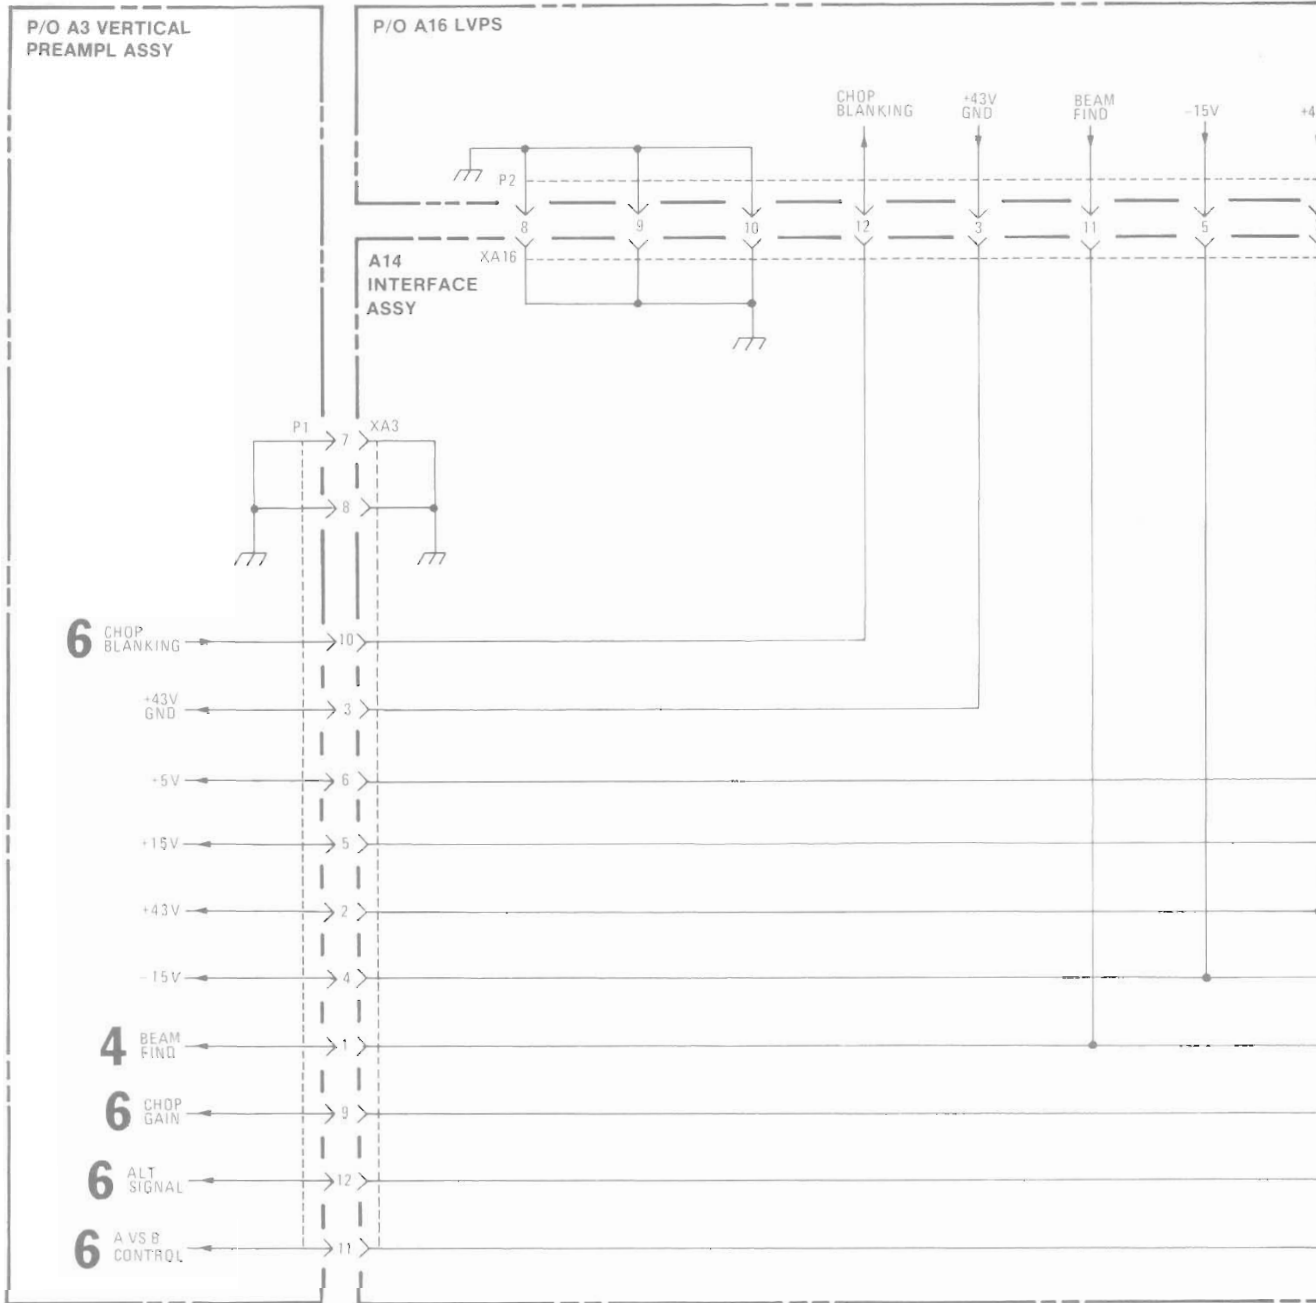

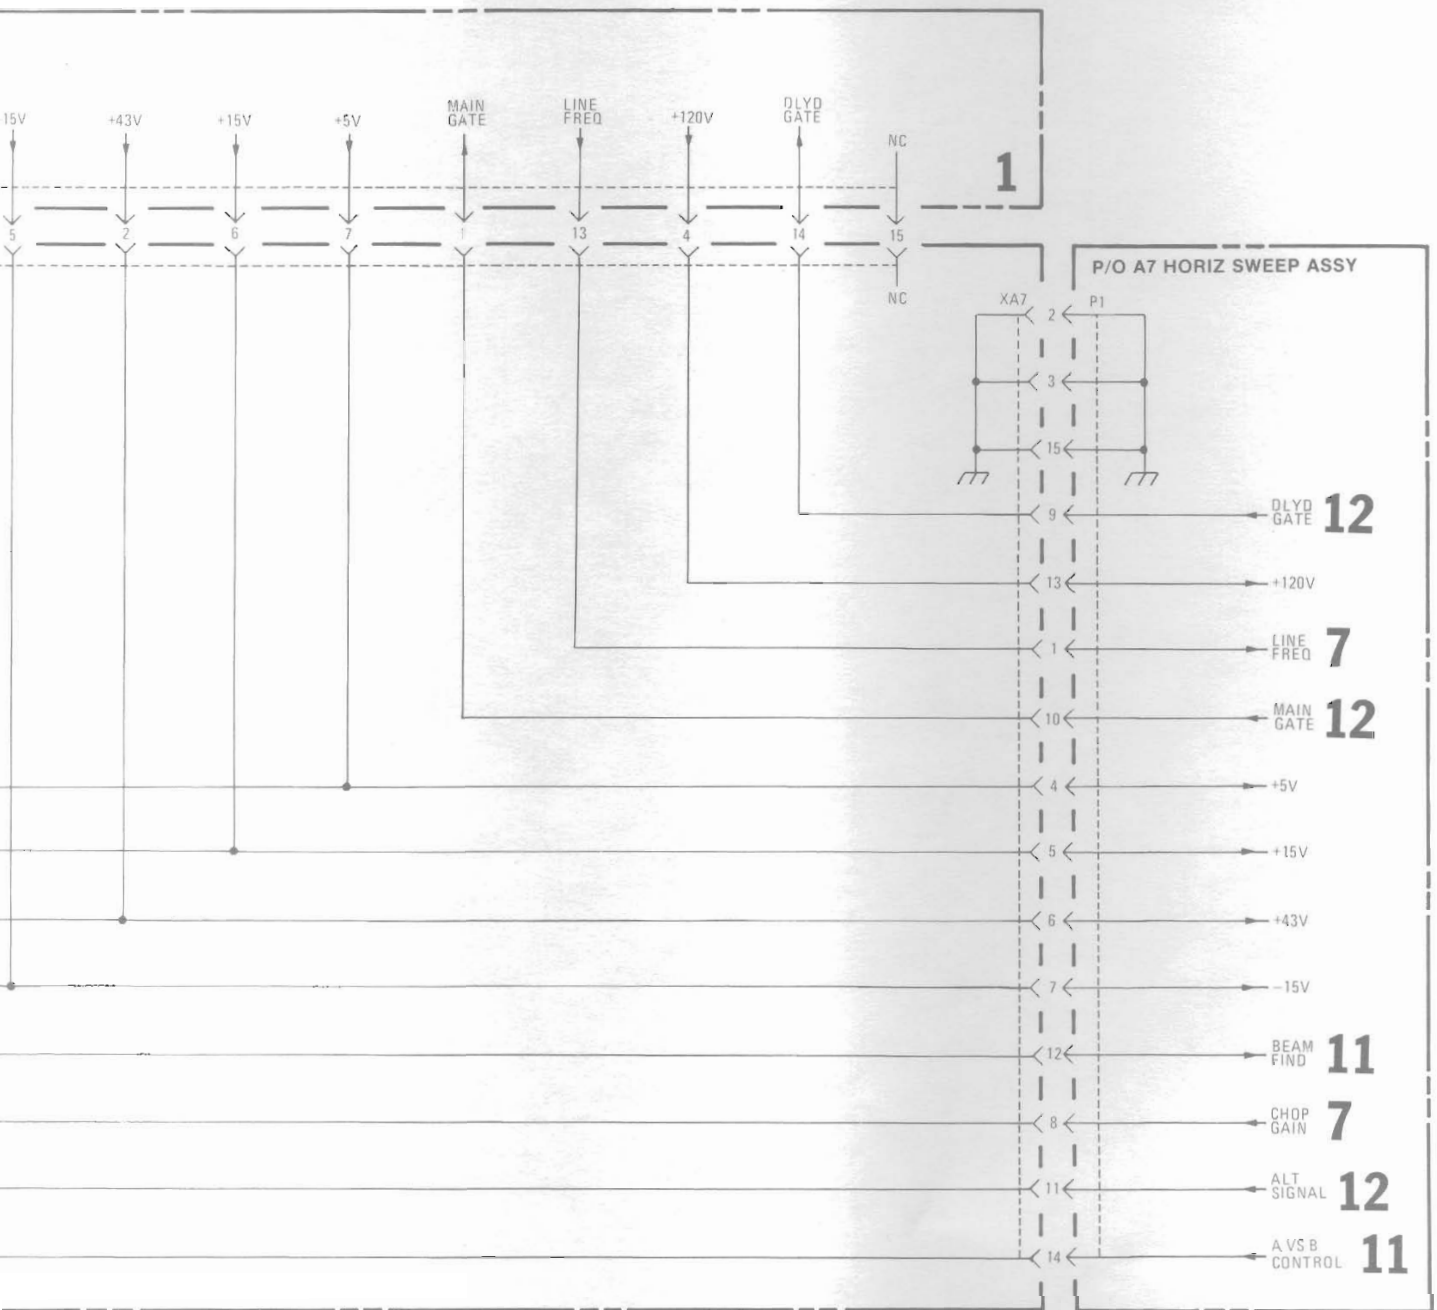


1740A-091-10-75

PARTS ON THIS SCHEMATIC

| P/O A3 | P/O A7 | A14 | P/O A16 |
|--------|--------|--------------------|---------|
| P1 | P1 | XA3 XA7 XA16 | P2 |

13

Figure 8-22.
Service Information, Interface Assembly A14
8-37

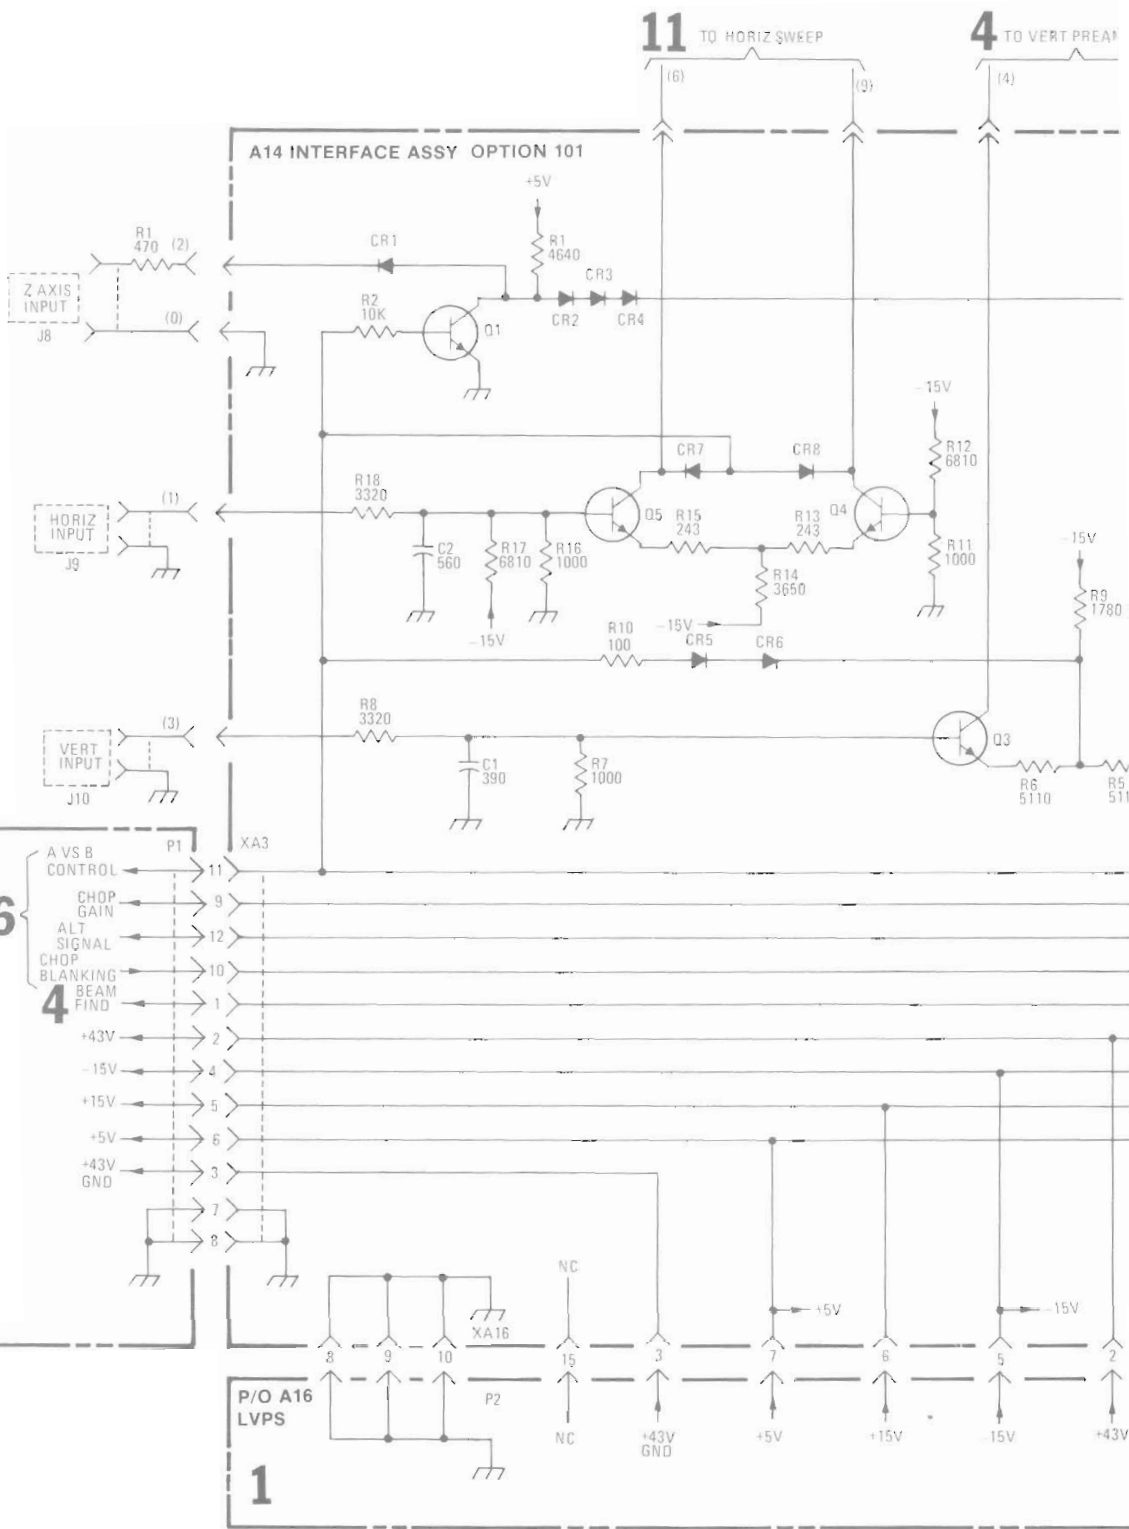

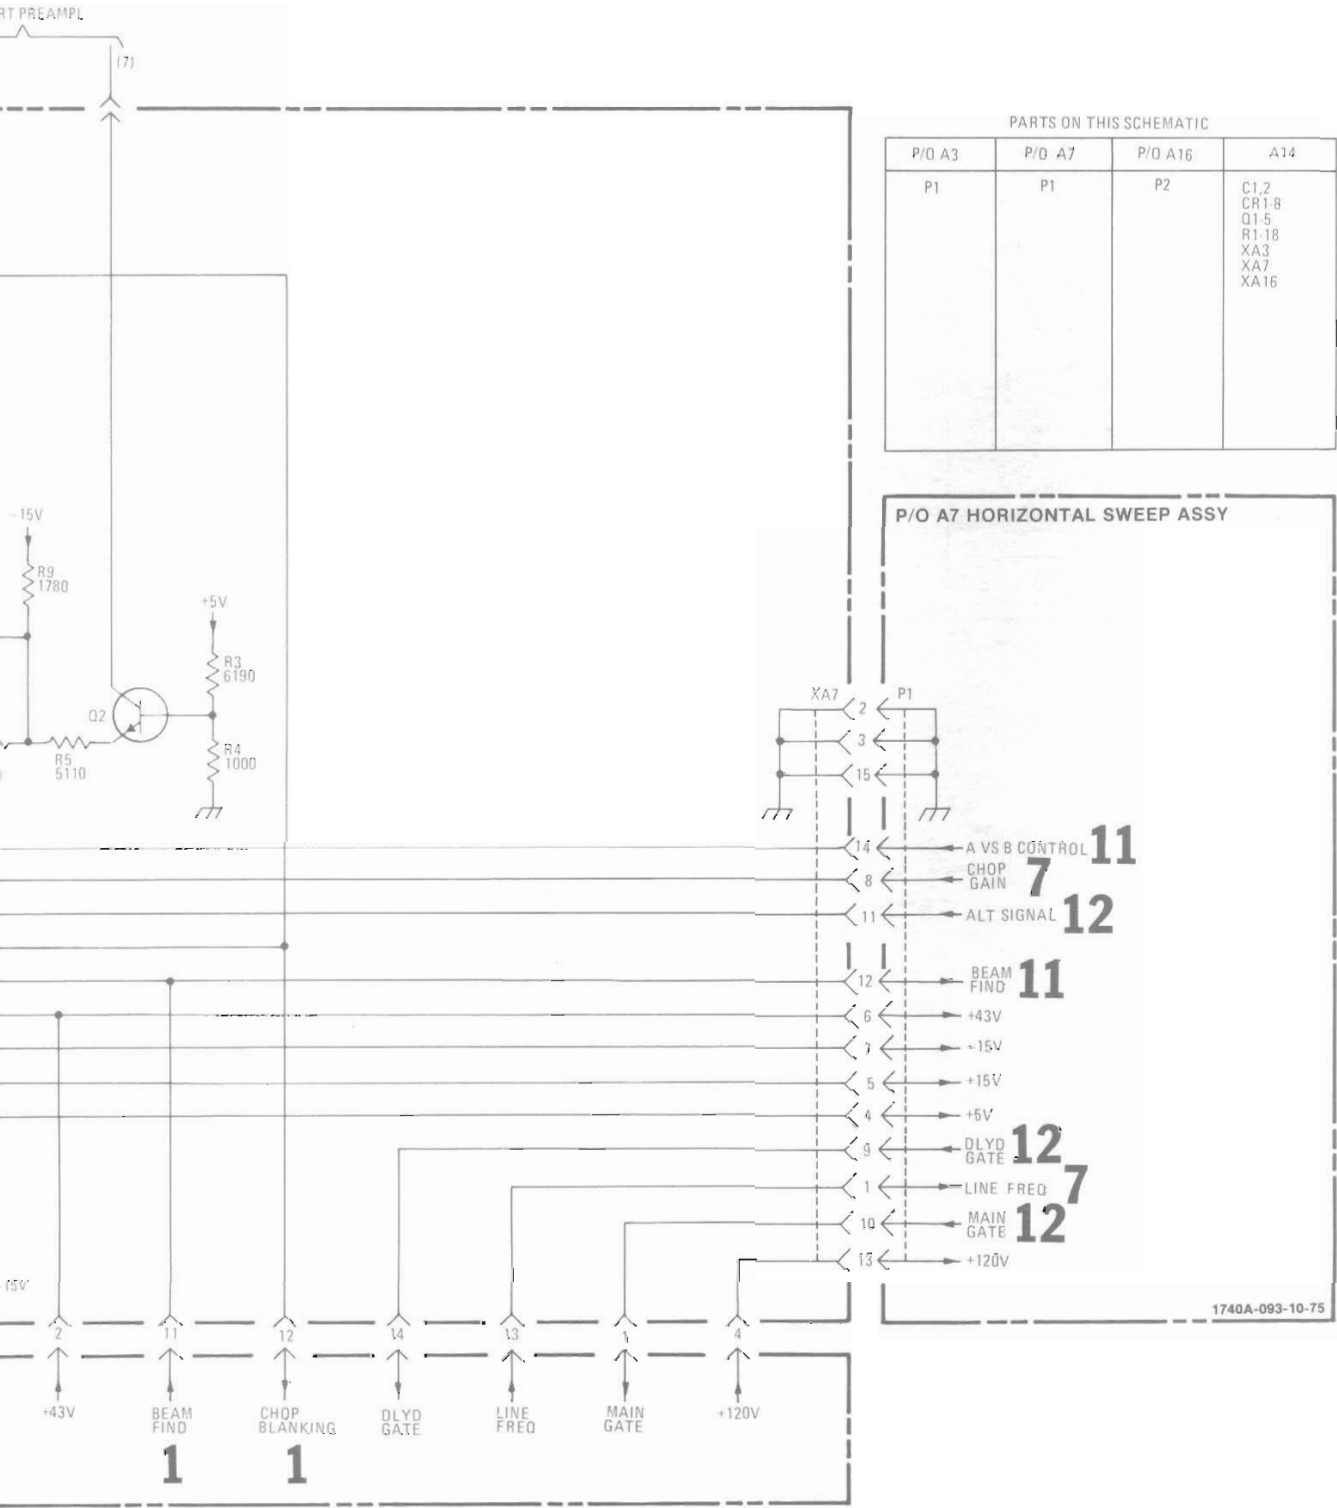


Figure 8-23. Information, Option 101 Interface Assembly A14 (Sheet 2 of 2) 8-39



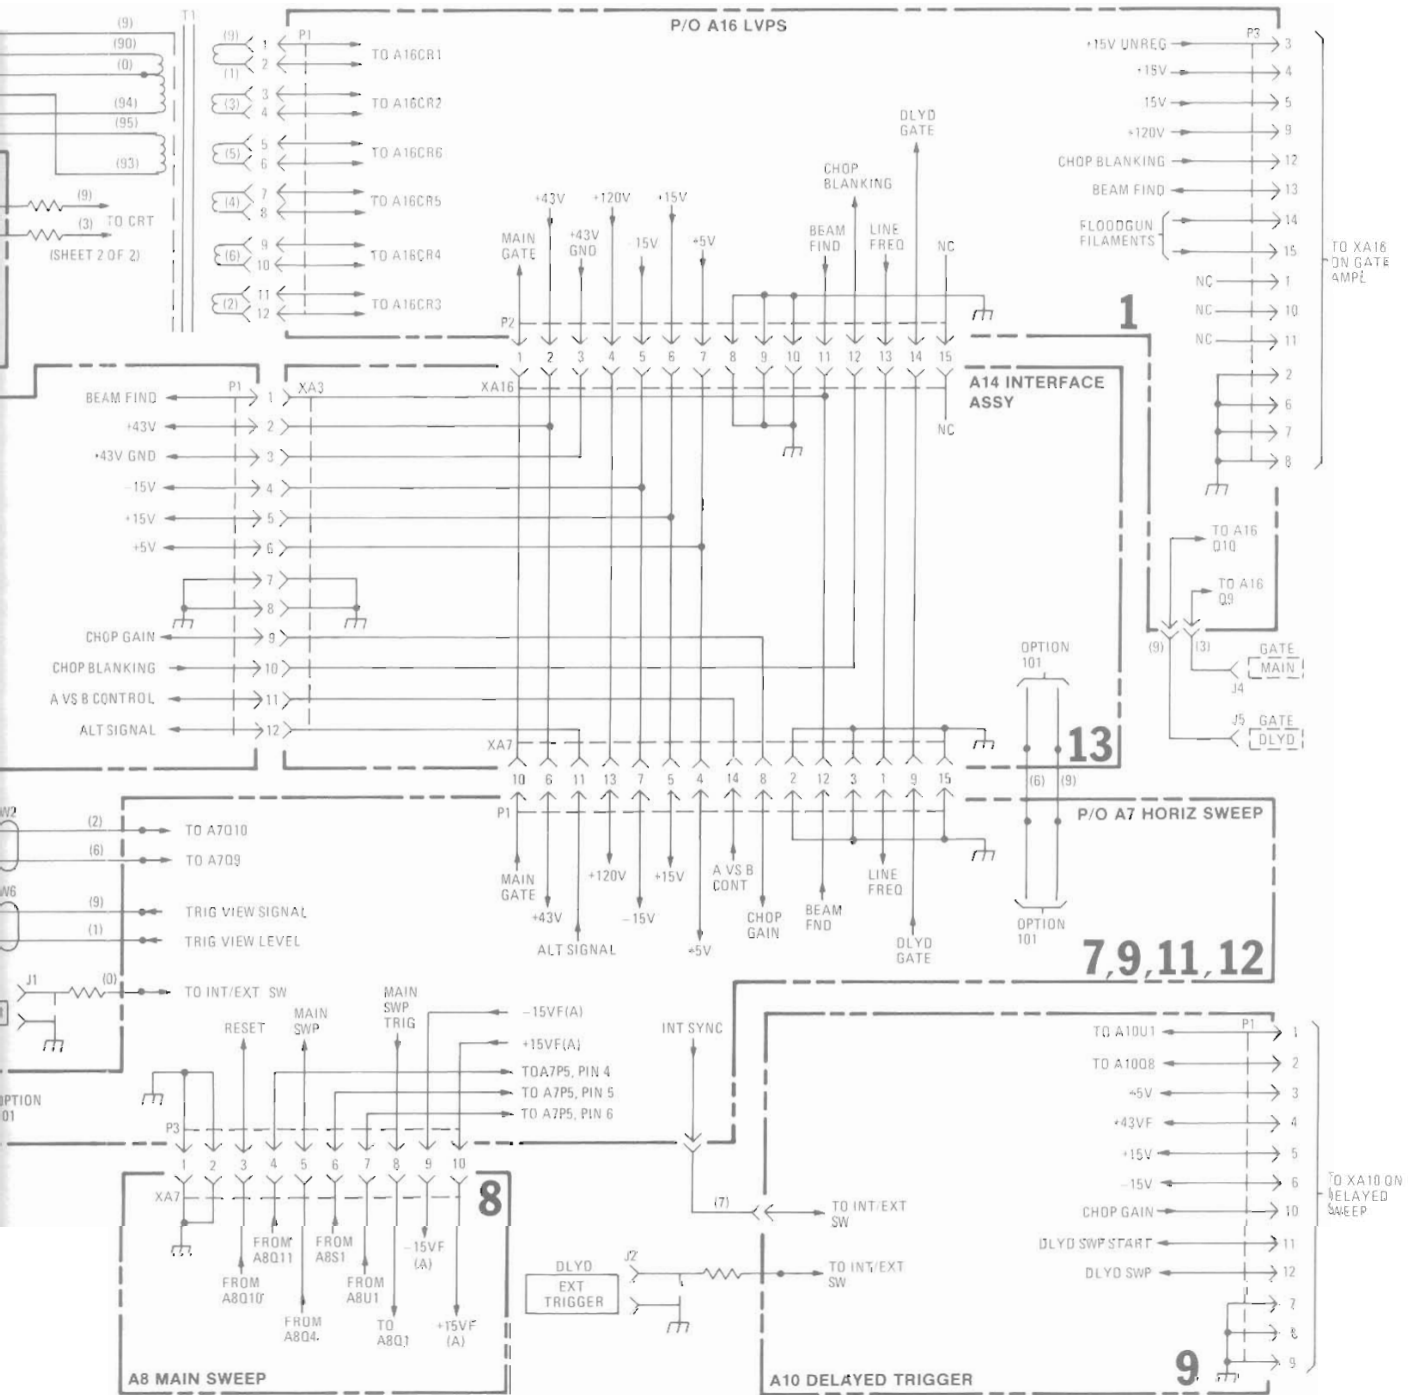


Figure 8-24. Interconnection Diagram (Sheet 1 of 2)

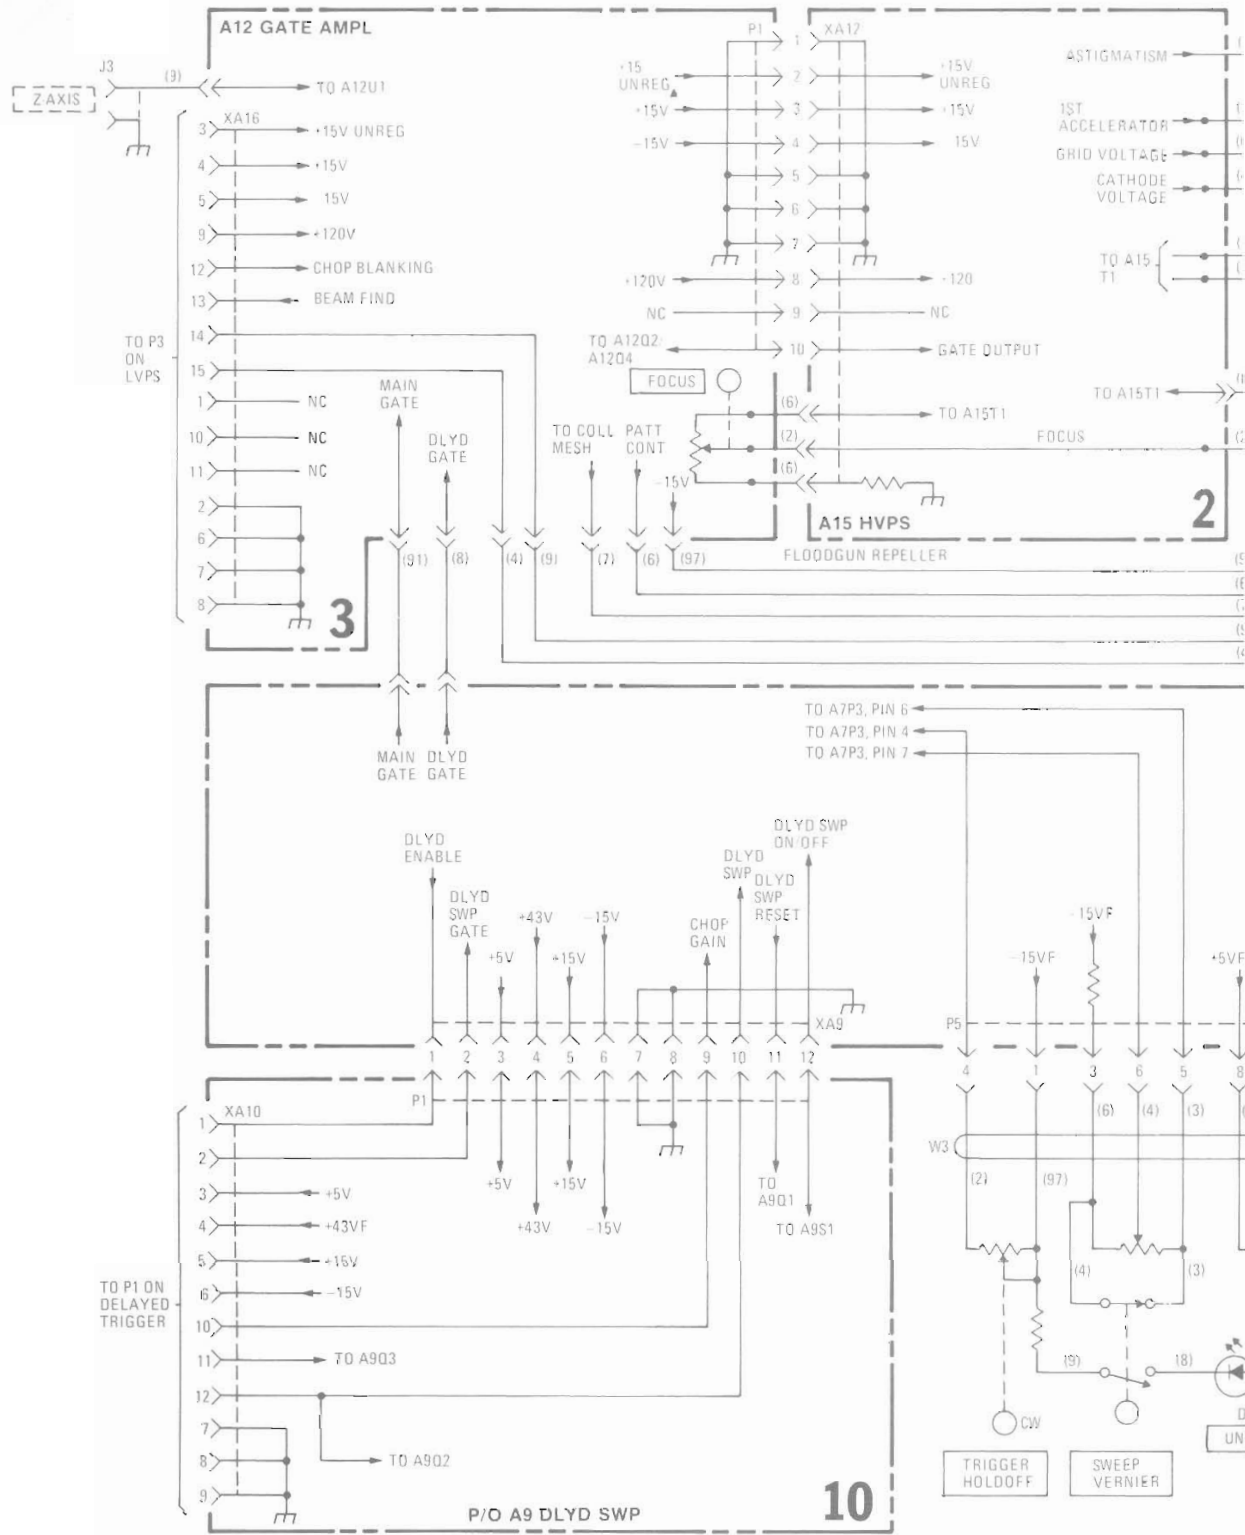

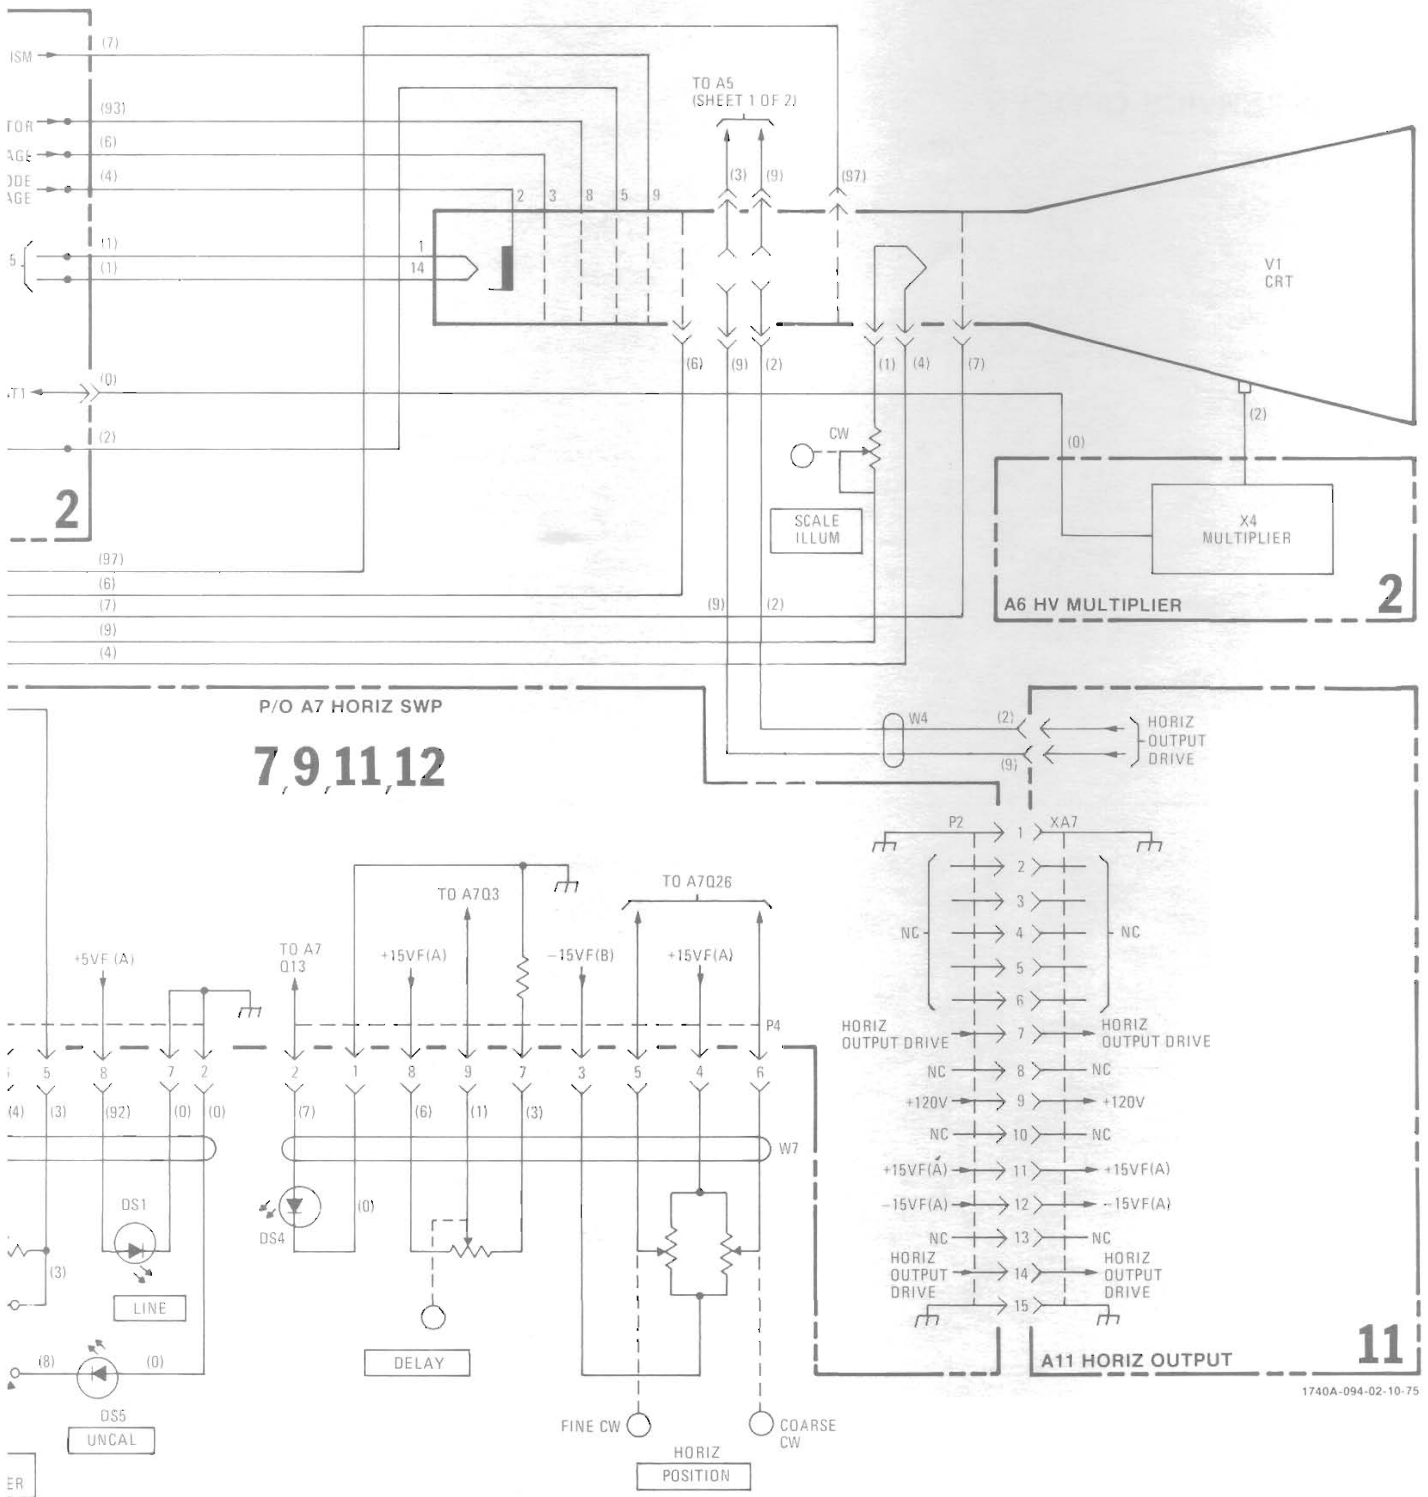

1740A-094-02-10-75

Figure 8-24.
Interconnection Diagram (Sheet 2 of 2)