

# DLHC OSCILLATOR



## Specifications


Parameters	Standard	Options	
Frequency range	25,0 kHz - 160,000 MHz		
Logic output	HCMOS/TTL compatible	TTL only	
Frequency stability			
Overall	+/- 50,0 ppm	+/-15,0 ppm best possible	
Initial at 25°C	Please specify		
Temperature			
vs supply voltage change			
vs load change			
Aging first year			
Aging over .... Years			
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C -40°C ~ +85°C Other on custom request	
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C	
Supply voltage	5,0 V ± 5% or 3,3 V +5%	1,8 V ; 2,5 V Other on custom request	
Current	Other		
25,00 kHz - 7,999 MHz			15 mA max.
8,000 MHz - 29,999 MHz			20 mA max.
30,000 MHz - 49,999 MHz			40 mA max.
50,000 MHz - 79,999 MHz			60 mA max.
80,000 MHz - 160,000 MHz			80 mA max.
Load	15 pF	Other - dependent of logic output	
Rise/fall time	Other on custom request		
25,00 kHz - 7,999 MHz			10 ns max.
8,000 MHz - 79,999 MHz			8 ns max.
80,000 MHz -160,000 MHz			4 ns max.
Duty cycle	40/60 %	45/55 % Other on custom request	
Phase noise	Please specify ( if required )		
Harmonics			
Sub-harmonics			
Jitter			

# DLHC OSCILLATOR

## Specifications

Parameters	Standard	Options
Start-up time	10 ms max.	Other on custom request
Frequency trimming range with externally adjustable trimmer		± 3 ppm min.
		Other
Tristate	High or open = enable Low = disable	no tristate
Marking	Freq + Code + Week +Year	
Package	DIL08 DIL08-7 DIL08-9	

## Drawing

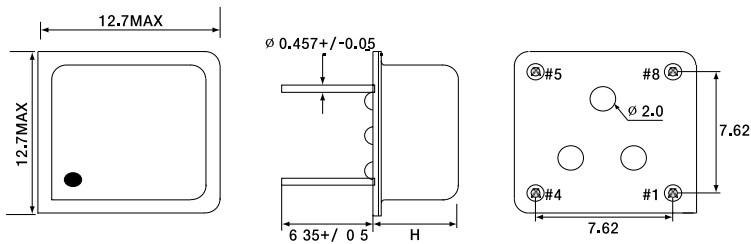

Case	H
DIL08	5.08
DIL08-7	7.48
DIL08-9	9.0

Pin configuration	#1: E/D or NC	other pin configuration possible
	#4: GND	
	#5: Output	
	#8: Vcc	