

KPC OSCILLATOR




Specifications

Parameters	Standard	Options	
Frequency range	0,5 MHz - 160,000 MHz		
Logic output	HCMOS/TTL compatible	TTL only	
Frequency stability			
Overall	+/- 50,0 ppm	+/-15,0 ppm best possible	
Initial at 25°C	Please specify		
Temperature			
vs supply voltage change			
vs load change			
Aging first year			
Aging over Years			
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C	
		-40°C ~ +85°C	
		Other on custom request	
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C	
Supply voltage	5,0 V ± 5% or 3,3 V +5%	Other on custom request	
Current	10 - 50 mA max.	Other	
Load	15 pF	Other - dependent of logic output	
Rise/fall time	Other on custom request		
0,5 MHz - 7,999 MHz			8 ns max.
8,000 MHz - 79,999 MHz			6 ns max.
80,000 MHz - 160,000 MHz			4 ns max.
Duty cycle	40/60 %	45/55 %	
		Other on custom request	
Phase noise	Please specify (if required)		
Harmonics			
Sub-harmonics			
Jitter			
Start-up time	10 ms max.	Other on custom request	
Tristate	High or open = enable	no tristate	
	Low = disable		

KPC OSCILLATOR

Drawing

Package	ceramic J-lead 4pad	ceramic J-lead 6 pad
---------	---------------------	----------------------

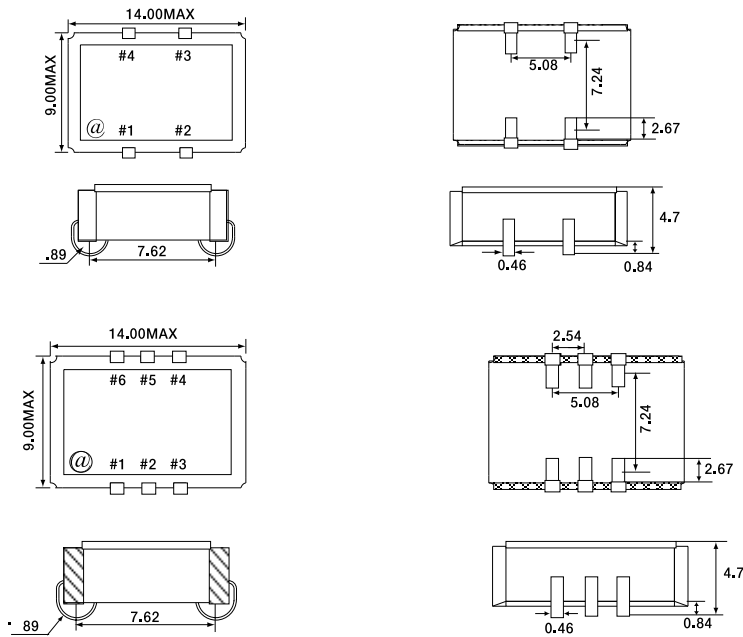

Pin configuration	4 pad version	6 pad version
	#1: NC or E/D	#1: NC
	#2 : GND	#2 : E/D or NC
	#3 : Output	#3 : GND
	#4 : Vcc	#4 : Output
		#5 : NC
	#6 : Vcc	