

# KPE OSCILLATOR



## Specifications


Parameters	Standard	Options
Frequency range	19,440 MHz - 700,0 MHz	
Logic output	LVPECL	PECL
Frequency stability		
Overall	+/- 50,0 ppm	+/-15,0 ppm best possible
Initial at 25°C	Please specify	
Temperature		
vs supply voltage change		
vs load change		
Aging first year		
Aging over .... Years		
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C
		-40°C ~ +85°C
		Other on custom request
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Supply voltage	3,3 V +/-5%	5,0 V +/-5%
		Other on custom request
Current	80 mA max	
Load	Vcc-2,0 V into 50 ohm	
Rise/fall time	2 ns max	Other on custom request
Duty cycle	40/60 %	45/55 %
		Other on custom request
Jitter ( 12kHz ~20,0 MHz )	< 184,320 MHz : 1ps RMS	Other on custom request
	> 184,320 MHz : 4,5 ps RMS	
Phase noise	Please specify ( if required )	
Harmonics		
Sub-harmonics		

# KPE OSCILLATOR

## Specifications

Parameters	Standard	Options
Start-up time	10 ms max.	Other on custom request
Tristate	Low or open = enable High = disable	no tristate
Marking	Freq + Code + Week +Year	
Package	ceramic J-lead 6pad	ceramic J-lead 4pad

## Drawing

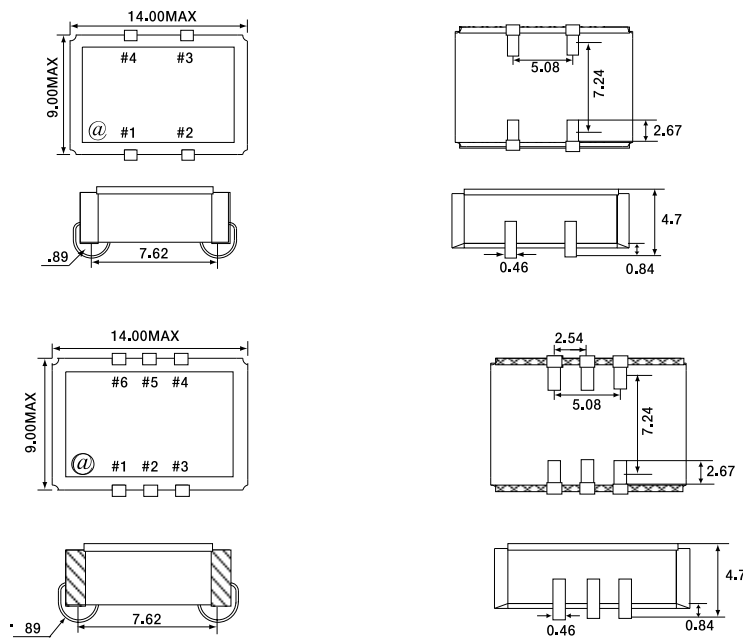

Pin configuration	6 pad version	4 pad version
	#1: NC	#1: Complementary output
	#2 : E/D	#2 : GND
	#3 : GND	#3 : Output
	#4 : Output	#4 : Vcc
	#5 : Complementary output	
	#6 : Vcc	