

OVEN CONTROLLED CRYSTAL OSCILLATOR

Features:	High stability vs. temperature up to $\pm 3E-8$	Frequency range: 1—60M
------------------	-------------------------------------------------	------------------------

OPTION GUIDE: OX225---58-----J-----12-----JT-----[SIN]-----13M

Temperature stability	Aging	Output	Supply Voltage
38: $\pm 3E-8$ 58: $\pm 5E-8$ 17: $\pm 1E-7$ 27: $\pm 2E-7$ 37: $\pm 3E-7$ 57: $\pm 5E-7$	J: $\pm 5E-7$ /year I: $\pm 3E-7$ /year H: $\pm 2E-7$ /year G: $\pm 1E-7$ /year	SIN HCMOS	5: $5V \pm 5\%$ 12: $12V \pm 5\%$


Temperature choice

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+25	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85

SPECIFICATION

Output	SIN	Square Form
Duty cycle	×	40...60%
Short term stability per 1 sec, typical	$< 1E-10$	
Daily fluctuation	$\leq \pm 0.05$ ppm	
Frequency stability vs. load changes	$< \pm 1E-8 @ 50 \Omega \pm 10\%$	$< \pm 1E-8 @ 1k \Omega \pm 10\%$
Frequency stability vs. power supply changes	$< \pm 1E-8 @ V_{cc} \pm 10\%$	
Peak current during warm-up @ 25°C	< 500 mA	
Frequency pulling range	$> \pm 5E-6 @ 0.5V \text{ --- } 4.5V$	
Linearity	$\pm 10\%$	
Phase noise, typical for 10M		
1 Hz	-80 dBc/Hz	
10 Hz	-115 dBc/Hz	
100 Hz	-135 dBc/Hz	
1k Hz	-145 dBc/Hz	
10k Hz	-150 dBc/Hz	
Harmonic suppression	30dB	×
Spurious suppression	70dB	
Input impedance	100k Ω	
Storage temperature range	-40...+85°C	
Other requests:		

Package:

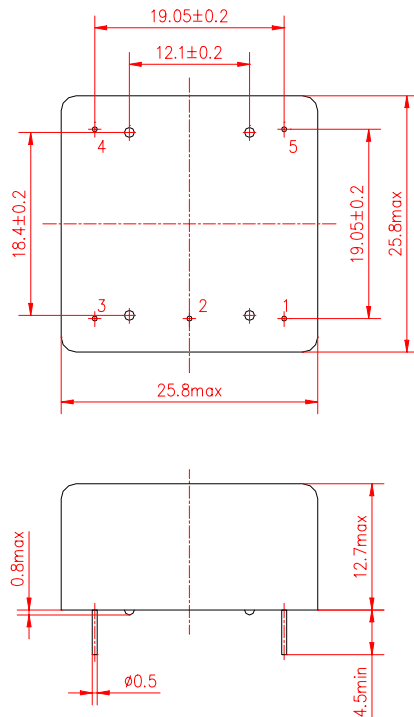

Pin configuration:

1. RF-Output
2. GND
3. Voltage Control (Adjustment)
4. NC/ Reference Voltage
5. Supply Voltage

Pin diameter will be from 0.5—0.8mm

Note:

Not all combinations are available, any requests, please consult factory