



Agilent Technologies Pulse Pattern and Data Generators

Digital Stimulus Solutions

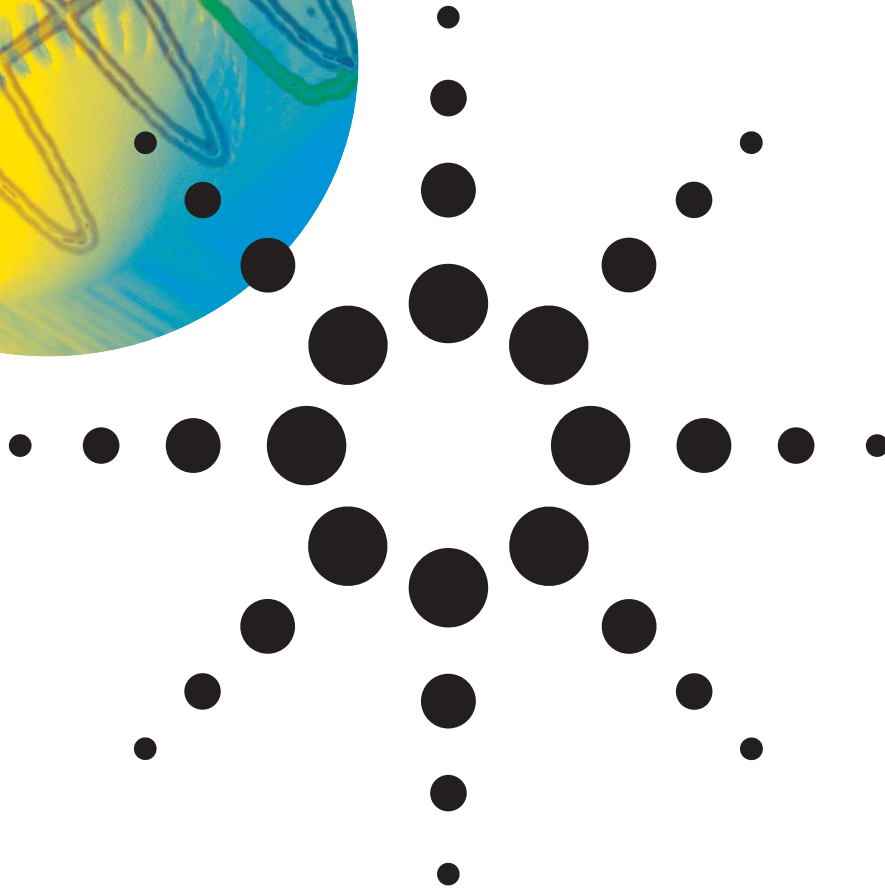

**Leading pulse, pattern, data and
clock generation for all test needs in
digital design and manufacturing**

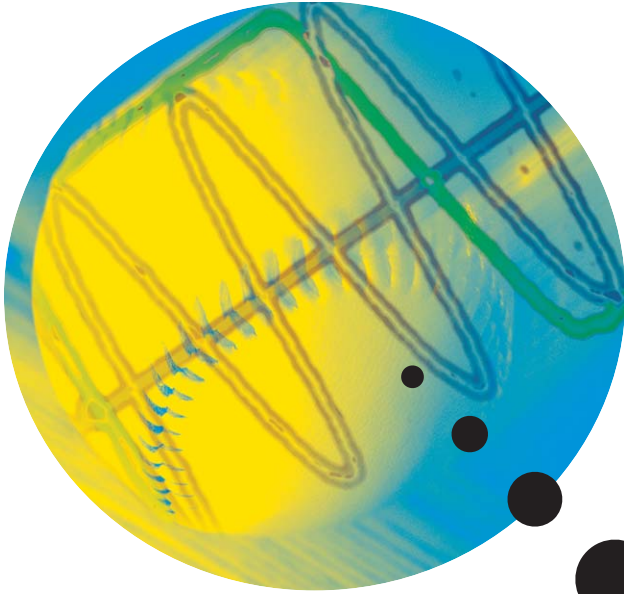

Agilent Technologies

Pulse Pattern Generators

Agilent Technologies offers a comprehensive portfolio of signal generation instruments for digital waveforms and data signals. Whether your application calls for

- Demanding digital pulses
- High-speed clock signals
- Square waves
- Flexible serial or
- Parallel bit patterns and data streams


Agilent Technologies provides the stimulus solution you are looking for.

Choose the performance you need from the portfolio of reliable Pulse Generators, the Data Generator platform with up to 132 parallel channels or the multi-purpose Pulse Pattern Generator instruments. Agilent's family of Pulse Pattern Generators comprises

- Pulse Generators
- Pattern Generators
- Data Generators
- PRBS Generators
- Controllable Jitter Injection
- Timing Generators

Agilent provides the perfect signal generation instrument for your application. Whether you require powerful pulses for the latest generation of laser diodes, need to characterize a high-speed serial bus device at the physical layer or need to get a detailed insight into your system's signal integrity.

Agilent's Pulse Pattern Generators deliver the reliable and accurate results you require.

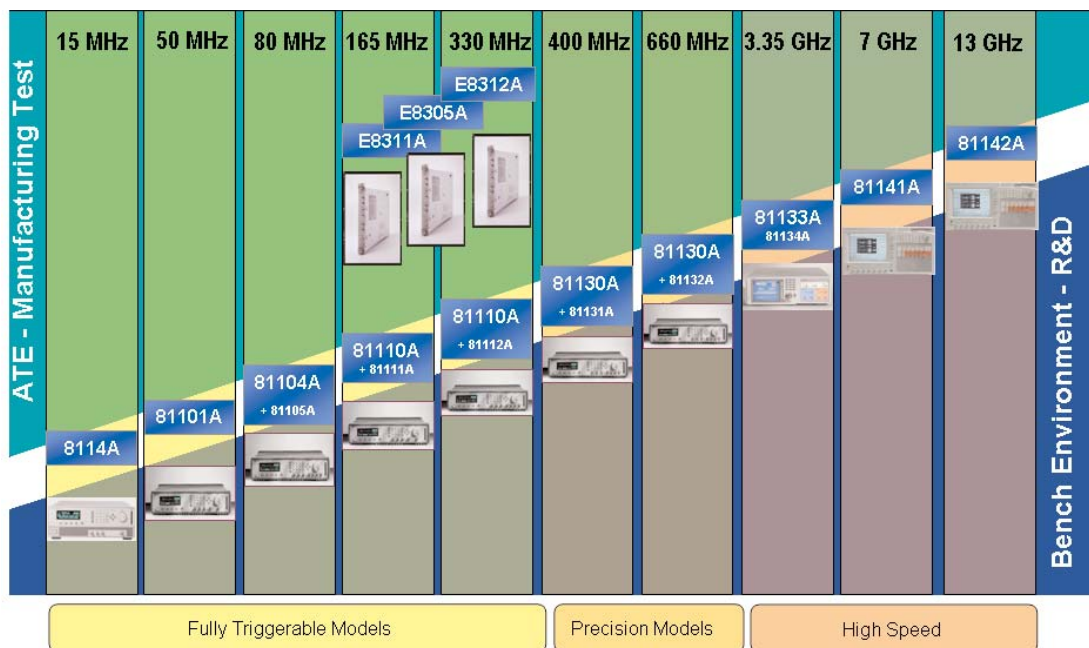

All models at a glance

Key Applications at a Glance

Application	8114A	81101A	81104A 81105A	81111A	81110A 81112A	81131A	81130A 81132A	E8305A	VXI E8311A	E8312A	81133A	81134A	81141A 81142A	81200A
Clock Generation		*	*	*	*	*	*	*	*	*	*	*	*	*
System Trigger Source		*	*	*	*	*	*	*	*	*	*	*	*	*
Diodes - LEDs	*	*	*	*					*					
Laser or IR Diodes	*													
Radar Test				*	*				*	*				
Mixed Signal Devices			*	*	*			*	*	*				
Flash Chip Test			*	*				*	*					
EEPROMs	*													
High Power Semiconductors	*													
PRBS Generation			*	*	*	*	*	*	*	*	*	*	*	*(PRWS)
Data Generation < 56 kBit			*	*	*	*	*	*	*	*	*	*	*	*
Data Generation > 56 kBit											*	*	*	*
Data Looping						*	*						*	*
Serial Bus Test < 1 GBit/s			*	*	*	*	*				*	*	*	*
High Speed Serial Bus Test > 1 GBit/s							*				*	*	*	*
Signal Integrity Test											*	*	*	*
Jitter (Stress) Test											*	*	*	*

Product Specifications at a Glance

Specification	8114A	81101A	81104A 81105A	81110A			81130A 81132A	VXI			81133A	81134A	81200A	81141A 81142A
				81111A	81112A	81131A		E8305A	E8311A	E8312A				
Frequency Range	1 Hz - 15 MHz	1 mHz - 50 MHz	1 mHz - 80 MHz	1 mHz - 165 MHz	1 mHz - 330 MHz	1 kHz - 400 MHz	1 kHz - 660 MHz	1 mHz - 250 MHz	1 mHz - 165 MHz	1 mHz - 330 MHz	15 MHz - 3.35 GHz	15 MHz - 3.35 GHz	1 kHz - 2.7 GBit/s	150 mHz - 13.5 GHz ⁽³⁾
Number of Channels	1	1	1 or 2	1 or 2	1 or 2	1 or 2	1 or 2	2 ⁽¹⁾	2 ⁽¹⁾	2 ⁽¹⁾	1	2	2 - 132	1
Optional 2nd Channel (retrofitable)			*	*	*	*	*						max 132	
Amplitude Range	1 V - 100 V	100 mV - 20 V	100 mV - 20 V	100 mV - 20 V	100 mV - 3.8 V	100 mV - 3.8 V	100 mV - 2.5 V	100 mV - 5 V	100 mV - 20 V	100 mV - 3.8 V	50 mV - 2 V	50 mV - 2 V	50 mV - 1.8 V	0.1 V - 1.8 V
Differential Outputs				*	*	*	*		*	*	*	*	*	*
LDVS Levels											*	*	*	*
Triggerable	*	*	*	*	*	*	*	*	*	*				*
Gate Mode	*	*	*	*	*	*	*	*	*	*				*
Remotely Programmable	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Pulse Generation	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Pattern & Data Generation			*	*	*	*	*	*	*	*	*	*	*	*
PRBS Generation			*	*	*	*	*	*	*	*	*	*	*	*
Bursts	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Data Bursts			*	*	*	*	*	*	*	*	*	*	*	*
Pattern Memory			16 kBit / channel	16 kBit / channel	16 kBit / channel	64 kBit / channel	64 kBit / channel	16 kBit / channel	16 kBit / channel	16 kBit / channel	12 MBit / channel	12 MBit / channel	8 MBit / channel	32 MBit / channel
PRBS Variations (2n-1)			n = 7,8,...14	n = 7,8,...14	n = 7,8,...14	n = 7,8,...15	n = 7,8,...15	n = 7,8,...14	n = 7,8,...14	n = 7,8,...14	n = 5,6,...32	n = 5,6,...32	n = 7,8,...31 (PRWS)	n = 5,...32
Segment Looping						4 segments, 1 looping level	4 segments, 1 looping level						Multiple segments; up to 5 looping levels	4 segments, 1 loop level
Controlled Jitter Injection											*	*	*	*
Variable Width	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Variable Delay	*	*	*	*	*	*	*	*	*	*	*	*	*	*
Glitch-Free Timing Changes (patented)		*	*	*	*	*	*	*	*	*	*(2)	*(2)		
Analogue Channel Add			*	*					*					
Digital Channel Add						*	*							(*)
Multi-Level Signals			*	*					*					(*)

(1) - VXI modules with 2 channels per module - multiple modules can be combined in one VXI-frame for multi-channel applications


(2) - Glitch-free frequency changes only in "direct" clock mode with external clock source

(3) - RZ, R1 only up to 7 GHz

Pulse Generation

Pulse Generation and Signal Parameters

A Pulse Generator provides full control over all pulse parameters like timing, levels and edges as shown in the diagram below. It is used to set up continuous or triggered pulse streams and offers flexibility to address the most challenging applications.

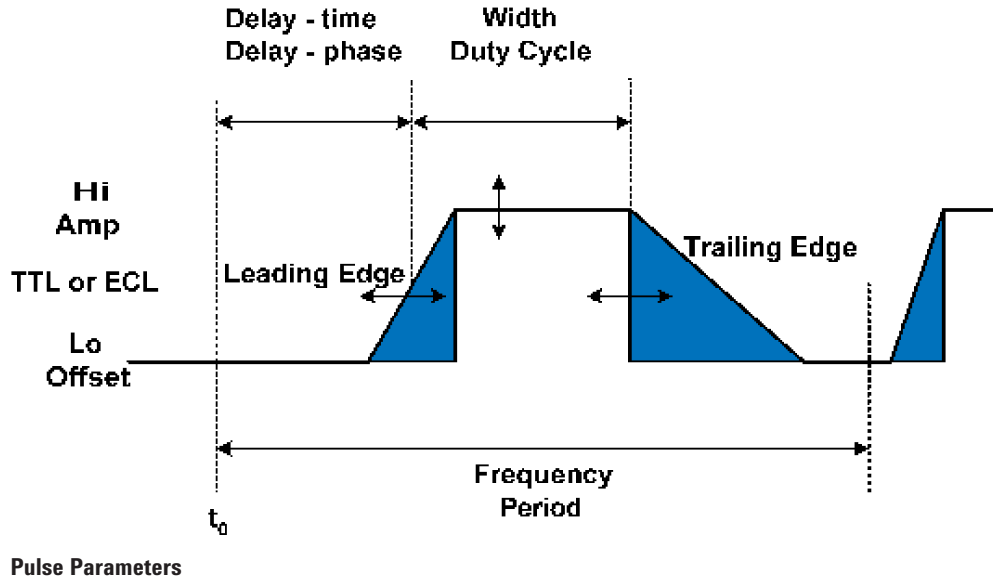

All parameters can be adjusted to meet the needs of the specific application. As opposed to arbitrary waveform generators, the specified maximum frequency is NOT a sampling rate. Instead, it is the maximum frequency of the rectangular output waveform.

Pulse generation capability is provided by all models. The Agilent instruments cover a frequency range from 1 mHz to 3.35 GHz and an output amplitude range from 50 mV up to 100 V.

Glitch Free Timing Changes

The Agilent 81101A, 81104A and 81110A uniquely allow timing parameter changes, such as changing the frequency, without dropouts or glitches. This industry-leading feature enables continuous operation without rebooting or resetting the device under test, when measuring a PLL pull-in and hold range for instance, or to characterize a device over a sweeping clock frequency.



Glitch-free timing changes

From Pulse to Pattern, Data and PRBS

Pulse pattern generators not only generate single impulses, bursts or continuous pulse streams as mentioned before. Their pattern capability also allows the generation of data signals. This versatility is key to digital device test applications, for example for compliance tests.

In pattern mode, the same full control over the signal output is available as in the traditional pulse generation mode. This allows the generation of uncounted forms of data signals, including standard Non-Return-to-Zero (NRZ) signals, or data bursts with programmable pulse width with additional delay to the clock signal.

Apart from user defined data signals, standardized Pseudo Random Binary Sequences (PRBS) can also be generated. The ability to create user-defined bit patterns, standard compliant data and PRBS make the Agilent Pulse Pattern Generators the ideal source for

- Stimulated eye diagram measurements
- Cross-talk measurements
- Compliance tests
- Jitter tests
- Signal integrity measurements
- Stress tests for receivers


With the VXI modules E8305A, E8311A and E8312A and the 81200 Data Generator and Analyzer Platform, modular and parallel pulse and data applications can be addressed with up to 132 parallel channels.

The 81130A's data looping capabilities or the 12 MBit deep memory and the PC based Pattern Management Tool of the 81133A and 81134A enable you to generate 'real-life' data sequences for today's latest technology, like serial high-speed busses.


Pulse pattern generators provide all the tools to generate the data packets needed for digital bus device tests: Integrated Pattern Editors, PC-based graphically enhanced Data and Pattern Management Software, segment looping features as well as hardware-generated PRBS. This enables engineers to quickly gain detailed insight into their digital bus device - including devices for

- USB 2.0
- Serial ATA
- PCI Express
- Firewire and more


These tools allow the easy carrying out of all measurements from physical layer characterization, signal integrity and jitter measurements to complete standard compliance tests.

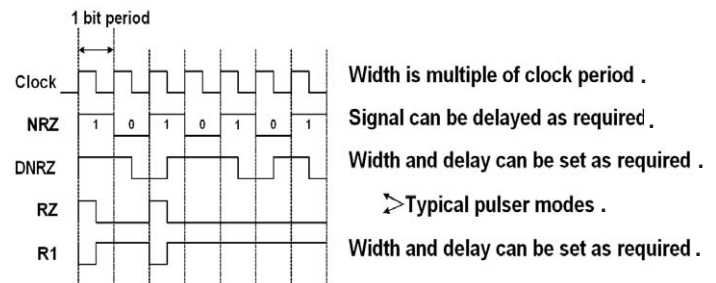

Data Generation Parameters

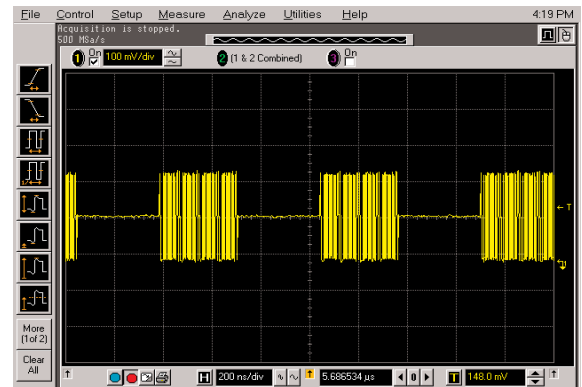

Data burst generated with a Pulse Pattern Generator displayed on an Agilent Infiniium Oscilloscope.

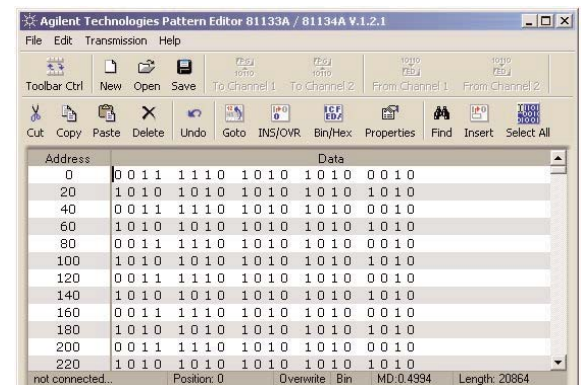

PC-based Pattern Management Tool for 81133A/34A

81101A and 81104A

The Agilent **81101A 50 MHz Pulse Generator** is the instrument of choice for cost efficient pulse and clock generation. It provides flexibility and full control over all the parameters needed for system clock applications.

The variable transition times range (5 ns to 200 ms) can be set individually for rising and falling edges. In combination with the unique capability to change the timing parameters without glitches, this provides full control over the stimulus signal.

The 81101A is the perfect entry-level instrument for signal generation. And because the portfolio of Agilent Technologies' 81100A Pulse Pattern Generators is designed for compatibility, your equipment can grow with your needs. The 81101A, 81104A, 81110A, 81130A share the same user interface, compatible programming commands and much more!



Flexible pulse generation

Key Features 81101A

- 1 channel
- Up to 20 V_{pp} (into 50 Ω)
- Variable transition times between 5 ns and 200 ms
- Internal and external clocking
- 1 MHz to 50 MHz repetition rate
- Glitch-free timing changes
- Triggerable or internal PLL
- Single ended outputs



81101A 50 MHz Pulse Generator

Complementary products:
D/MSO6030, 54622/4x and 54621x
Oscilloscopes



The Basics

The Agilent **81104A Pulse Pattern Generator** offers flexible pulse, data and PRBS generation with a frequency range up to 80 MHz.

The 81104A can be configured with one or two **81105A output channels**. Single channel instruments can easily be upgraded with a second output channel.

The 81104A allows you to generate multi-level signals, using its analog channel-add function. In addition to pulse generation, the 81104A also supports user defined data patterns as well as pseudo random binary sequences.



Key Features 81104A with 81105A

- 1 or 2 channels
- Up to 20 Vpp (into 50 Ω)
- Variable transition times between 3 ns and 200 ms
- Internal and external clocking
- 1 mHz to 80 MHz repetition rate
- Glitch-free timing changes
- Triggerable or internal PLL
- Single ended outputs
- Analog channel addition
- Complex data patterns
- Pseudo Random Binary Sequence (PRBS) generation

PRBS

Data

Pattern

Pulse

81104A Pulse Pattern Generator with 81105A Output Channel(s)



Complementary products -
D/MS06050, 54830/31x, D/MS06030 and
54622/4x Oscilloscopes

81110A

The Agilent **81110A Pulse Pattern Generator** is the industry-standard for pulse, pattern, data and PRBS generation up to 165/330 MHz. It provides high quality signals and leading flexibility that meets virtually all application needs. This instrument is a must for all labs.



Key Features 81110A with 81111A

- 1 or 2 channels
- Up to 20 Vpp (into 50 Ω)
- Variable transition times between 3 ns and 200 ms
- Internal and external clocking
- 1 MHz to 165 MHz repetition rate
- Glitch-free timing changes
- Triggerable or internal PLL
- Single ended outputs
- Analog channel addition
- Data patterns
- Pseudo Random Binary Sequence (PRBS) generation

The **81110A with one or two 81111A 165 MHz output channels** provides pulse, pattern, data and PRBS generation up to 165 MHz with an amplitude of up to 20 Vpp. With the same user interface and programming commands, it is the natural upgrade from the 81101A and 81104A.

The 81110A with 81111A output channels is used in countless applications, flash chip test, communication equipment, aerospace defense and automotive test as well as many other high-end applications.



81110A Pulse Pattern Generator with 81111A 165 MHz Output Channel(s)

**Complementary products -
54852/3A, D/MSO6100, 54832/33x,
D/MSO6050, 54830/31x and D/MSO6030
Oscilloscopes**



PRBS

Data

Pattern

Pulse

The Lab Standard

The Agilent **81110A Pulse Pattern Generator with one or two 81112A 330 MHz output channels** provides up to two differential output channels with fast transition times for a broad range of tests.



Key Features 81110A with 81112A

- 1 or 2 channels
- Up to 3.8 Vpp (into 50 Ω)
- Selectable transition times
800 ps or 1.6 ns
- Internal and external clocking
- 1 MHz to 330 MHz repetition rate
- Glitch-free timing changes
- Triggerable or internal PLL
- Differential outputs
- Data patterns
- Pseudo Random Binary Sequence (PRBS) generation

PRBS

Data

Pattern

Pulse

81110A Pulse Pattern Generator with 81112A 330 MHz Output Channel(s)



Complementary product -
54852/3A, D/MSO6100, 54832/33x,
D/MSO6050, 54830/31x and
D/MSO6030 Oscilloscopes

81130A

The Agilent **81130A 400 MHz Pulse Pattern Generator with one or two 81131A output channels** is the instrument of choice for advanced applications that require even higher precision signals and timing accuracy. It offers a wide channel delay range and of course, full control of the pulse width.

On top of which, enhanced data generation and pattern segment looping features allow you to generate complex data patterns.

Key Features 81130A with 81131A

- 1 or 2 channels
- Up to 3.8 Vpp (into 50 Ω)
- Selectable transition times
800 ps or 1.6 ns
- Internal and external clocking
- 1 kHz to 400 MHz repetition rate
- Precision timing
- Differential outputs
- EXOR channel addition
- Complex data patterns and
pattern segment looping
- Pseudo Random Binary Sequence
(PRBS) generation



Precision
Timing

PRBS

Data

Pattern

Pulse

81130A Pulse Pattern Generator with 81131A 400 MHz Output Channel(s)

**Complementary products -
54854A, 54852/3A and
D/MS06100, 54832/33x
Oscilloscopes**



Clean and Precise

The Agilent **81130A Pulse Pattern Generator with one or two 81132A 660 MHz output channels** offers enhanced performance compared to the 81130A with 81131A output channels. It is Agilent's recommended data generator for USB compliance tests. Data rates up to 1.32 Gbit/s can be achieved by the digital channel add feature, offering stimulus signals for Gigabit Ethernet test, for example.



Key Features 81130A with 81132A

- 1 or 2 channels
- Up to 2.5 Vpp (into 50 Ω)
- Fixed transition times 500 ps typ.
- Internal and external clocking
- 1 kHz to 660 MHz repetition rate
- Precision timing
- Differential outputs
- EXOR channel addition
- Up to 1.32 Gbit/s data generation
- Complex data patterns and pattern segment looping e.g. for USB 2.0 pre-compliance testing
- Pseudo Random Binary Sequence (PRBS) generation

Precision
Timing

PRBS

Data

Pattern

Pulse

81130A Pulse Pattern Generator with 81132A 660 MHz Output Channel(s)



Complementary products -
54655A, 54854A and
54852/3A Oscilloscopes

81133A/81134A

The Agilent **81133A and 81134A 3.35 GHz Pulse Pattern Generators** provide the ultimate timing accuracy and signal performance. With their unrivaled performance, they are the perfect clock, pulse, data, pattern and PRBS sources for all applications up to 3.35 GHz. In addition, the instruments allow you to control the signal quality at speeds from 15 MHz up to 3.35 GHz. Sample applications comprise cross-over point adjustments and jitter insertion using the delay control input. Their high quality signals and low intrinsic jitter enable you to perform quick and reliable measurements with accurate and repeatable results!



With the 12 Mbit pattern memory per channel, the 81133A and 81134A enable you to generate the long data patterns required to test today's high speed interfaces, like PCI Express or Serial ATA and many more. The PC-based Pattern Management Software is a very convenient tool to edit and save data patterns on any computer. It also allows you to load patterns easily into the generator.

**Complementary products -
DSO80000/DCA-J, 54655A and
54854A Oscilloscopes**




Key Features 81133A and 81134A

- 1 channel (81133A) or 2 channels 81134A)
- 50 mV up to 2 Vpp amplitude (into 50 Ω)
- Programmable termination voltage
- Transition times < 90 ps (adjustable between 70 ps-120 ps typ.)
- 15 MHz to 3.35 GHz repetition rate
- Total jitter typically less than 2 ps
- 12 Mbit pattern memory per channel
- PC-based pattern management software
- 1.5 ps typ. RMS jitter
- Differential Outputs
- Complex data patterns e.g. for PCI Express, SATA
- Pseudo Random Binary Sequence (PRBS) generation
- Delay Modulation: -250 ps to 250 ps (up to 500 ps total jitter)
- Modulation Frequency: 0-200 MHz
- Additional variable crossover between 30%-70% typ.
- NRZ/RZ/R1 signal formats over the full frequency range.




High Speed, High Fidelity


The jitter-insertion capabilities enable jitter tolerance tests. Target applications of the 81133A and 81134A include physical layer characterisation, signal integrity and jitter tests. In addition the 81134A is Agilent's recommended solution for PCI Express and Serial ATA compliance tests.

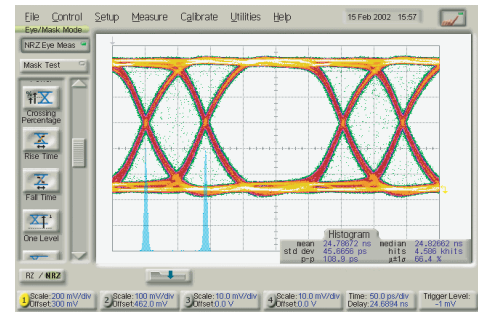


Jitter modulated with Rectangle-Wave

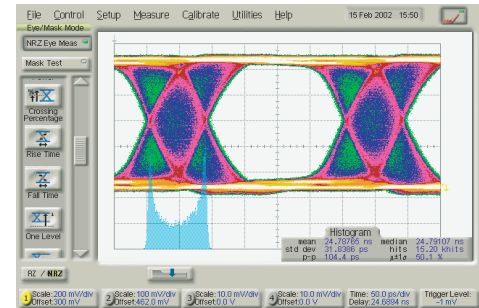

Jitter modulated with Sine-Wave

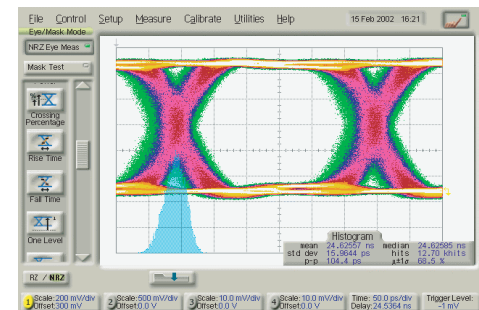

Jitter modulated with Noise

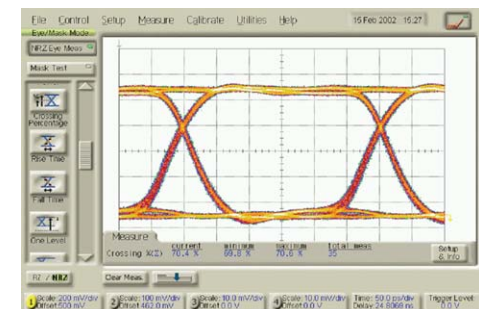

Variable Cross Over point at 70%

33250A Modulation Source




Jitter Input

81133A/34A Pulse Pattern Generator



Device Under Test

Reference Clock

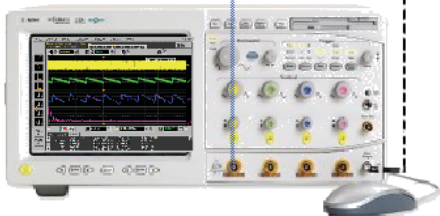

Infiniium Oscilloscope (54855A) or DCA-J (86100C)

Perform stress tests by modifying the amount and shape of jitter by using the Delay Control Input and an external modulation source.




81133A & 81134A 3.35 GHz Pulse Pattern Generators

81141A / 81142A

Achieving high-quality characterization and reliable measurements needs superior signal quality. As the frequency increases, accurate results rely on signal timing, transitions and integrity. With its outstanding rise and fall times and its matchless jitter performance the Agilent 81141A / 81142A builds the foundation for high speed designs. The reliability of its test signal lets you focus on the measurements instead of the test set up.

The new Agilent 81141A / 81142A serial Pulse Data Generator provides what is needed to conduct physical layer tests e.g. full control of data for stress tests. Its linear delay modulation is essential for jitter tolerance measurements.

Small amplitudes with flexible and accurate crossover-points allow sensitivity tests, the RZ format is mandatory for bandwidth tests.

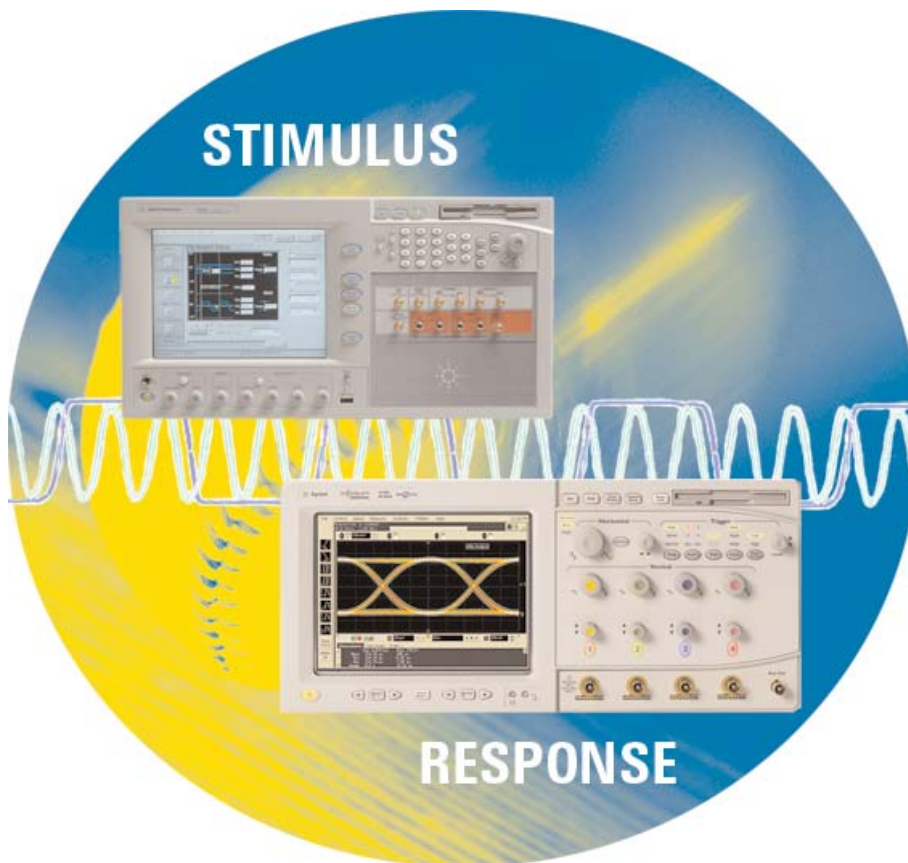

Key Features 81141A and 81142A

- Pulse Data, Pattern and PRBS up to 7 GHz and 13 GHz
- RZ, R1 limited to 7 GHz
- Data formats RZ, R1 and NRZ
- Single channel data and clock, differential or single ended
- Trigger In and Trigger Out
- Sub rate clock for easy generation of reference clock
- Sequencing: 4 levels possible
- Variable crossover between 20 % and 80 %
- Transition times (20/80) < 20 ps
- Jitter (clock mode) 1 ps typical
- Jitter (data mode) 9 ps pp typical
- Jitter modulation bandwidth up to 1 GHz
- Data output amplitude / resolution 0.1 V to 1.8 V with a 5 mV resolution
- PRBS generation from 25 - 1 to 231 - 1
- Memory 32 Mbit

**Complementary products - 54655
Infiniium Oscilloscope and DSO
80000/86100C DCA-J**

The Agilent 81141A / 81142A combines multiple data formats like RZ, R1 and NRZ with sequencing, trigger capability and ultra-high-speed frequency. Obtaining high quality characterization enables the development of the next-generations of high speed serial bus standards and for scientists conducting fundamental lab research.



Jitter

Linear delay modulation



Pulse

Bandwidth testing at your fingertips



Clock

Ultra-precise timing



Data

Real world and worst-case signals (jitter inseration e.g. for stressed eye)



Pattern

and sequencing for protocol standards




PRBS


Standard psuedo-random bit sequence for characterization




81141A 7 GHz serial Pulse Data Generator
81142A 13 GHz serial Pulse Data Generator

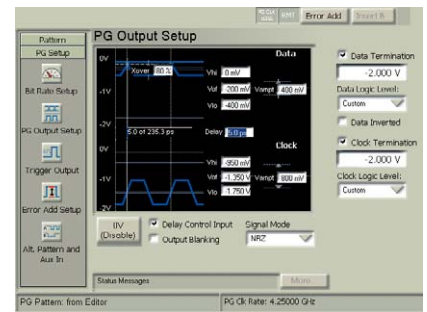


Versatile, highest quality pulse and data signals, easily selectable

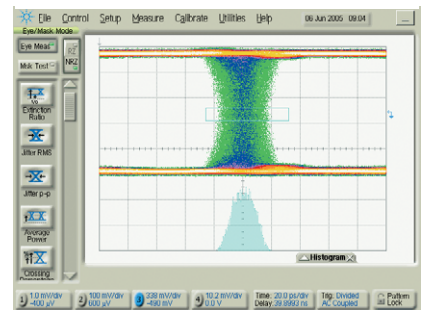

Random jitter

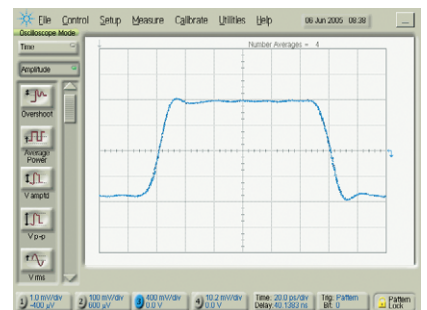

Clean and precise signal

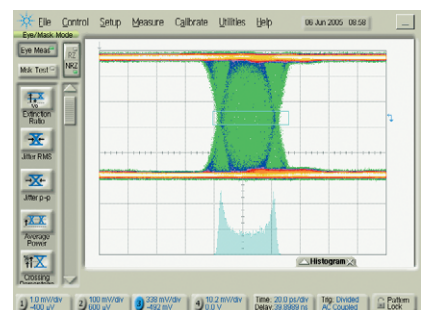

Sinusoidal jitter

8114A: The Real Power

For tests on devices that require high voltages or currents the Agilent **8114A Pulse Generator** is the instrument you need. It has the power required for measurements of laser or IR diodes and other applications with pulses up to 100 Volts, 2 Amperes and 15 MHz. In addition, it can also be used as a pulsed current source.

The Agilent 8114A offers the same look and feel as well as the same programming syntax as the 81100A series to ease your work with different pulse pattern generators from Agilent Technologies.



Key Features 8114A

- 1 channel
- Up to 100 Vpp (into 50 Ω) or 2 A
- Clean, reliable pulses with variable pulse width and 7 ns transition time
- External Synchronization and gating
- 15 MHz repetition rate and a counted burst mode
- Load compensation
- Optional variable pulse baseline (25 V)
- Device protection to avoid accidental damage



8114A 15 MHz High Power Pulse Generator

Complementary products -
54622/24 A/D 100 MHz



E8305A, E8311A & E8312A

The Agilent **E8305A, E8311A and E8312A Pulse Pattern Generators** combine the 81110A's versatility and performance in the modular and flexible VXI form factor (C-size, 1 slot). The specifications of the E8311A and E8312A match those of the 81110A with 81111A and 81112A output channels. All VXI Pulse Pattern Generators have identical programming syntax and pattern capabilities - enabling a quick and easy transition from lab to production.

Key Features E8305A, E8311A, E8312A

	E8305A	E8311A	E8312A
Frequency range	1 mHz to 250 MHz	1 mHz to 165 MHz	1 mHz to 330 MHz
No. of channels	2 channels	2 channels	2 channels
Data pattern	16kbit/channel user defined; PRBS 2^n-1 , $n=7,8,\dots,14$ RZ, NRZ	16kbit/channel user defined; PRBS 2^n-1 , $n=7,8,\dots,14$ RZ, NRZ, DNRZ	
Variable delay range	0.00 ns to 999.5 s	0.00 ns to 999.5 s	
Period RMS-jitter	0.001 % + 15 ps	0.001 % + 15 ps	
Amplitude range	100 mV to 5 V	100 mV to 20.0 V	100 mV to 3.8 V
Transition time range (10/90)	1.3 ns to 200 ps programmable	2.00 ns to 200 ms programmable	800 ps or 1.6 ns selectable



E8305A, E8311A & E8312A Pulse Pattern Generators

81200: For a Parallel World

The Agilent **81200 Data Generator/Analyzer** platform is the right choice for functional and parametric test applications on digital subsystems, ICs and boards, during development or manufacturing.

The 81200 is a flexible and scalable platform which, depending on the configuration, offers up to 132 channels (RZ, NRZ). The data rate range covers 1 kBit/s to 2.7 GBit/s. The 81200 Data Generator and Analyzer is freely configurable to fit application needs either as a stand alone data generator or a platform with any number of generator and analyzer channels. In addition, the Agilent 81200 can be combined with other standard VXI modules or systems.

With up to 8 MBit memory depth per channel and full control of the pulse parameters for each individual channel, maximum stress can be applied to a DUT. The 81200 Data Generator/Analyzer platform is the ideal tool throughout the design verification process - from first turn-on through operational check and characterization of design margins, to detailed analysis of critical design parts.

Key Features 81200

- Up to 132 channels (RZ, NRZ) within one clock group, depending on the configuration
- PRBS and PRWS (pseudo random word sequence) up to $2^{31}-1$
- 1 kbit/s to 2.7 Gbit/s data rate
- Sequencing with 5 looping levels
- Branching on internal and external events
- Variable delays, levels and transition times can be independently set for each channel
- EXOR channel addition



PRBS

Data

Pattern

Pulse


81200 Data Generator/Analyzer

Transition-Time Converters


Models 15432B/15433B/15434B/15435A/15438A/N4915A

These converters have been designed to convert the transition times of instruments with fast, fixed transition times, to slower, fixed transition-times (150 ps, 250 ps, 500 ps, 1 ns, 2 ns). This reduces signal bandwidth which may be necessary during the development of some devices. All transition-times are measured between 10% and 90% of amplitude.

The design of these converters ensures very low signal reflection (far beyond the 3 dB point). Reducing the signal transition-times also increases the overall pulse-performance for overshoot/reflection sensitive applications. The converters are fitted with two SMA connectors, one male, one female.

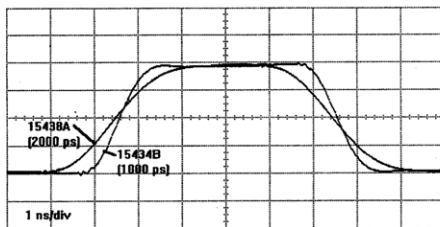

15434B and 15438A Output Pulses

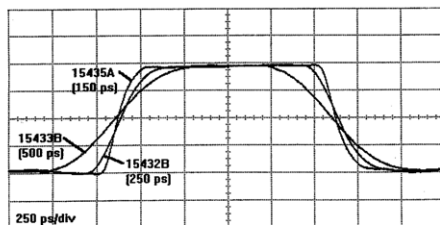

15435A, 15432B and 15433B Output Pulses

Key Features

Typical Characteristics

- Converter: 15435A, 15432B, 15433B, 15434B, 15438A, N4915A
- Output Transition Time 150 ps, 250 ps, 500 ps, 1000 ps, 2000 ps
- 3 dB point 2.1 GHz, 1.3 GHz, 640 MHz, 370 MHz, 190 MHz
- Input Voltage < 10 Vpp
- Insertion Loss < 0.2 dB
- Overshoot and Ringing < 3 %



15432B/15433B/15434B/15435A/15438A/N4915A

Related Literature

Publication Number

- Agilent 81140A Series Serial Pulse Data Generators 7GHz and 13.5 GHz **5989-3052EN**
- Agilent Technologies 81133A and 81134A, 3.35 GHz Pulse Pattern Generators, Data Sheet **5988-5549EN**
- Agilent Technologies 81100 Family Pulse Pattern Generators, Technical Specifications **5980-1215E**
- Agilent Technologies 8114A 100 V/2 A Programmable Pulse Generator, Technical Specifications **5980-1213E**
- Agilent 81100 Family of Pulse Pattern Generators: Radar Distance Test to Airborne Planes, Product Note 1 **5968-5843E**
- Agilent 81100 Family of Pulse Pattern Generators: The Dual Clock Gbit Chip Test, Product Note 2 **5968-5844E**
- Agilent 81100 Family of Pulse Pattern Generators: Magneto-Optical Disk Drive Research, Product Note 3 **5968-5845E**
- Agilent 81100 Family of Pulse Pattern Generators: Simulation of Jittering Synchronization Signals for Video Interfaces, Product Note 4 **5968-5846E**
- PCI Express RX Design Validation with 81133A / 81250 **5988-7432EN**
- USB 2.0 Pre-Compliance Testing with Agilent Infiniium, Application Note 1400 **5988-6219EN**

For more information, please visit us at www.agilent.com/find/pulse_generator

Product specifications and descriptions in this document subject to change without notice.

For the latest version of this document, please visit our website at www.agilent.com/find/pulse_generator and go to the Key Library Information area or insert the publication number (**5980-0489E**) into the search engine.

Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Agilent Open

www.agilent.com/find/open

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Europe:United States:

(tel) 800 829 4444
(fax) 800 829 4433

Korea:

(tel) (080) 769 0800
(fax) (080) 769 0900

Canada:

(tel) 877 894 4414
(fax) 800 746 4866

Latin America:

(tel) (305) 269 7500

China:

(tel) 800 810 0189
(fax) 800 820 2816

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Europe:

(tel) 31 20 547 2111

Japan:

(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Other Asia Pacific

Countries:

(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.

Contacts revised: 09/26/05

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

© Agilent Technologies 2005

Printed in the Netherlands, 9th November 2005

5980-0489E

