




TB26SMD CRYSTAL

Specifications

Parameters	Standard	Options
Frequency range	25,000 kHz - 175,000 kHz	
Frequency tolerance at 25°C	± 20 ppm	Other on custom request
Temperature stability	- 0,035 ppm/°C ² typical	
Operating temperature	-10°C ~ +70°C	Other on custom request
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Load capacitance Cl	12,5 pF	Other
Equivalent series resistance ESR	50 kOhm max.	
Shunt capacity Co	1,1 pF typical , 2 pF max.	Other
Aging	± 3 ppm /first year max.	Other on custom request
Insulation resistance	500 Mohms minimum at 100 VDC	
Drive level	1,0 uW	
Marking	Freq	

Drawing

Package	TB26SMD 2,0 x 6,0 mm
---------	----------------------

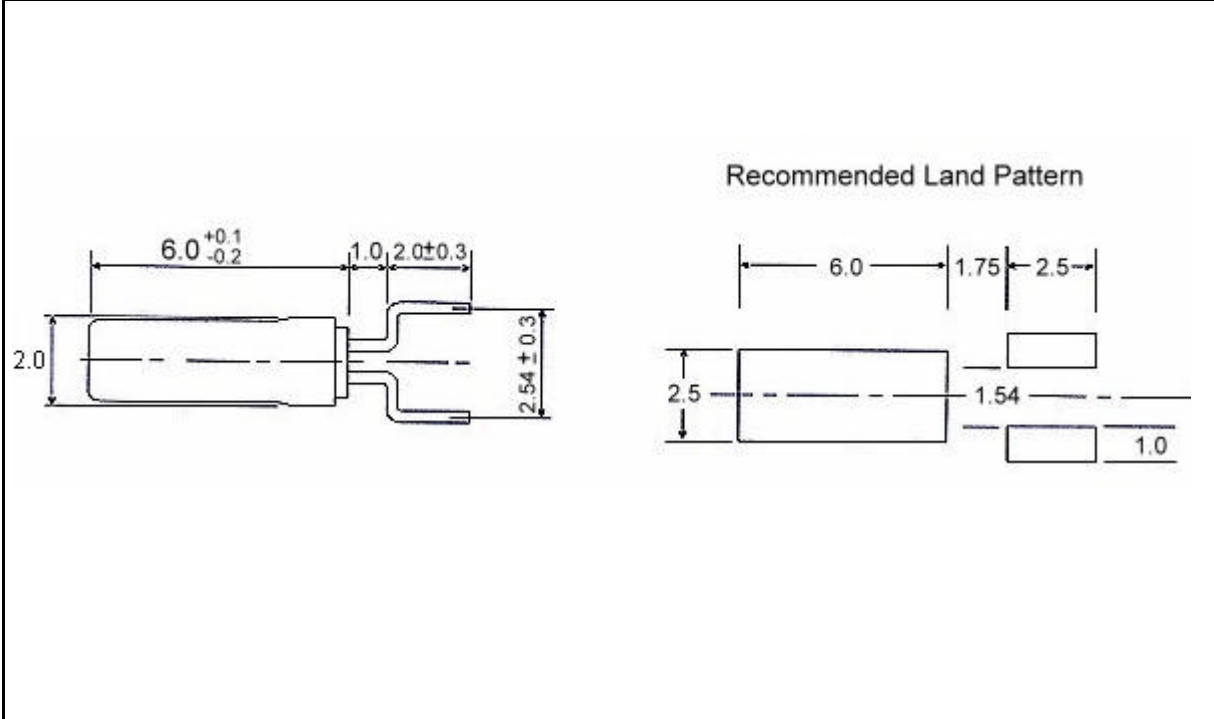

HM International
 Demer 26 B-2230 Herselt BELGIUM
 Tel. +32(0)14548955 Fax. +32(0)14549443
 email : info@hminternational.be www.hminternational.be