

# X115 CRYSTAL



## Specifications

Parameters	Standard	Options
Frequency range	3,5 MHz -30,000 MHz	
Frequency stability	Please specify	
Overall		
Initial at 25°C		
Temperature		
Aging first year		
Aging over .... Years		
Operating temperature	-10° C ~ +60°C	-20°C ~ +70°C
Storage temperature	-40°C ~ +85°C	
Load capacitance Cl	10 pF ~ 120 pF or serie	
Equivalent series resistance ESR	see ESR table	
Shunt capacity Co	< 7 pF	
Aging	± 5 ppm /first year max.	
Insulation resistance	500 Mohms minimum at 100 VDC	
Drive level	0,5 mW	
Marking	Freq + Week +Year	

## ESR table






Frequency range	Mode	ESR ( ohms)
3,5 MHz - 3,99 MHz	Fund.	180 max.
4,0 MHz - 4,99 MHz	Fund.	150 max.
5,0 MHz - 6,99 MHz	Fund.	100 max.
7,0 MHz - 10,99 MHz	Fund.	50 max.
11,0 MHz - 30,00 MHz	Fund.	40 max.

# X115 CRYSTAL

## Drawing

Package

X115

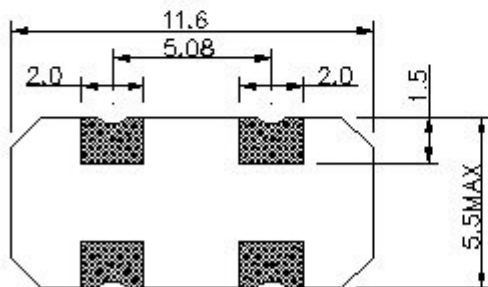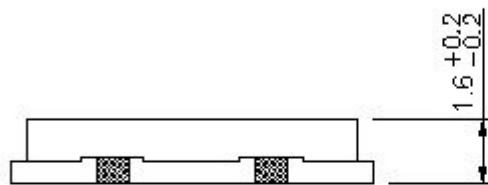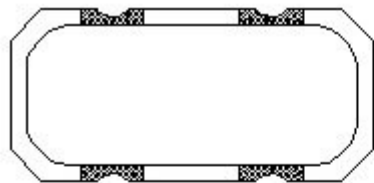

UNIT: mm