

Agilent PNA Series Microwave Network Analyzers

Configuration Guide


E8362B 10 MHz to 20 GHz
E8363B 10 MHz to 40 GHz
E8364B 10 MHz to 50 GHz
E8361A 10 MHz to 67 GHz

System configuration summary

This summary lists the main components required to form a basic measurement system. Options or peripherals may be added to provide enhanced measurement and data storage capability.

Full S-parameter measurements

- Agilent PNA Series microwave network analyzers
- Test port cables, 50 ohms
- Calibration kit for applicable connector type

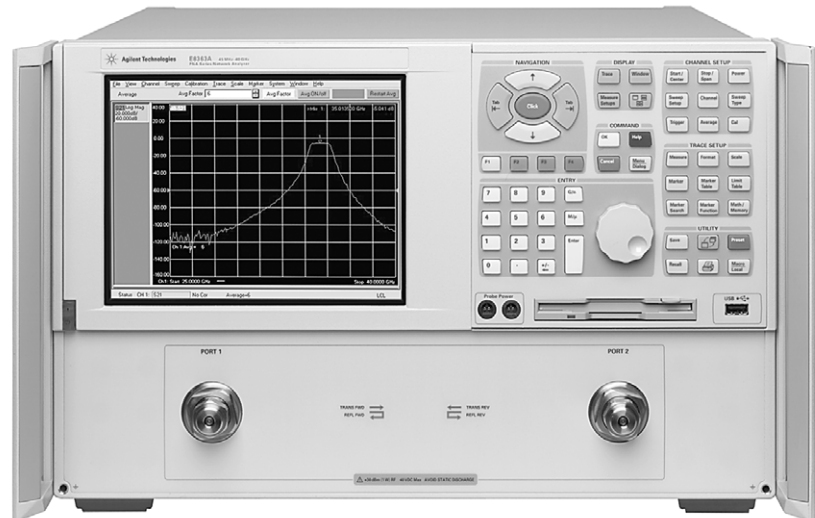

This configuration guide describes standard configurations, options, accessories, upgrade kits and compatible peripherals for the PNA Series microwave network analyzers. This guide should be used with the *Agilent PNA Series Microwave Network Analyzers, Data Sheet* for a complete description of these analyzers.

Ordering Guide For PNA Series Network Analyzers

This guide is intended to assist you in the ordering process. Additional information and products (such as calibration kits and cables) are described throughout this document.

PNA Series microwave network analyzers

| | |
|--------|------------------|
| E8362B | 10 MHz to 20 GHz |
| E8363B | 10 MHz to 40 GHz |
| E8364B | 10 MHz to 50 GHz |
| E8361A | 10 MHz to 67 GHz |

Options

To add options to a product, order the corresponding item number.

| Description | For E8362B item number | For E8363B item number | For E8364B item number | For E8361A item number | Additional information |
|--|------------------------|------------------------|------------------------|------------------------|--|
| Test set | | | | | |
| Option 014 • Configurable test set | E8362B-014 | E8363B-014 | E8364B-014 | E8361A-014 | |
| Power configuration | | | | | |
| Option UNL • Extended power range and bias-tees | E8362B-UNL | E8364B-UNL | E8364B-UNL | Available soon | |
| Option 016 • Add receiver attenuators | E8362A-016 | E8364A-016 | E8364A-016 | Available soon | |
| CPU RAM | | | | | |
| Option 022 • Extended memory | E8362A-022 | E8364A-022 | E8364A-022 | E8361A-022 | |
| Non-linear measurements | | | | | |
| Option 080 • Frequency offset | E8362A-080 | E8364A-080 | E8364A-080 | E8361A-080 | Requires 014 |
| Option 081 • Reference receiver switch | E8362A-081 | E8364A-081 | E8364A-081 | Available soon | Requires 014, 080 |
| Option 083 • Frequency-converter measurement application | E8362A-083 | E8364A-083 | E8364A-083 | E8361A-083 | Requires 014, 080, and 081 (E8361A only requires 014, 080) includes GPIB to USB interface (82357A) |
| Measurement features | | | | | |
| Option 010 • Time-domain capability | E8362A-010 | E8363A-010 | E8364A-010 | E8361A-010 | |
| Accessories | | | | | |
| Option 1CM • Rack mount kit without handles | E8362A-1CM | E8363A-1CM | E8364A-1CM | E8361A-1CM | |
| Option 1CP • Rack mount kit with handles | E8362A-1CP | E8363A-1CP | E8364A-1CP | E8361A-1CP | |
| N4688A • USB CD R/W drive | N4688A | N4688A | N4688A | N4688A | |
| N4689A • USB Hub | N4689A | N4689A | N4689A | N4689A | |
| Additional documentation¹ | | | | | |
| Option AVK • Printed English version of on-line Help | E8362A-AVK | E8363A-AVK | E8364A-AVK | E8361A-AVK | |
| Option ABD ² • Printed German version of on-line Help | E8362A-ABD | E8363A-ABD | E8364A-ABD | E8361A-ABD | |
| Option ABE ² • Printed Spanish version of on-line Help | E8362A-ABE | E8363A-ABE | E8364A-ABE | E8361A-ABE | |
| Option ABF ² • Printed French version of on-line Help | E8362A-ABF | E8363A-ABF | E8364A-ABF | E8361A-ABF | |
| Option ABJ ² • Printed Japanese version of on-line Help | E8362A-ABJ | E8363A-ABJ | E8364A-ABJ | E8361A-ABJ | |
| Option OBW • Printed copy of assembly level service manual version of on-line Help | E8362A-OBW | E8363A-OBW | E8364A-OBW | E8361A-OBW | |
| Calibration documentation | | | | | |
| Option 1A7 • ISO 17025 compliant calibration | E8362B-1A7 | E8363B-1A7 | E8364B-1A7 | Available soon | |
| Option UK6 • Commercial calibration certificate with test data | E8362A-UK6 | E8363A-UK6 | E8364A-UK6 | E8361A-UK6 | |

Note: Item numbers may not correspond to product model number. For example, to order the time-domain option on the E8362B, the correct item number to order is E8362A-010.

Warranty and service

For warranty and service of 5 years, please order 60 months of R-51B (quantity = 60). Standard warranty is 36 months.

R-51B Return-to-Agilent warranty and service plan

Calibration²

For 3 years, order 36 months of the appropriate calibration plan shown below. For 5 years, specify 60 months.

| | |
|-----------|---------------------------------|
| R-50C-001 | Standard calibration |
| R-50C-002 | Standards compliant calibration |

1. Options not available in all countries.

2. Printed version of on-line help has translations up to firmware revision 1.0.

Agilent Microwave PNA Series

The microwave PNA Series instruments are integrated vector network analyzers equipped with a built-in S-parameter test set, synthesized source, hard and floppy disk drives, and LCD display. The E8362B analyzer has two 50 ohm, 3.5 mm (m) test ports. The E8363B and E8364B analyzers have two 50 ohm, 2.4 mm (m) test ports. The E8361A analyzer has two 50 ohm, 1.85 mm (m) test ports. Included with each instrument is a mouse, keyboard, CD-ROM containing a copy of on-line Help and programming documentation, and a 3-year return-to-Agilent service warranty.

- **E8362B** network analyzer, 10 MHz to 20 GHz
- **E8363B** network analyzer, 10 MHz to 40 GHz
- **E8364B** network analyzer, 10 MHz to 50 GHz
- **E8361A** network analyzer, 10 MHz to 67 GHz

Options

- **Time-domain capability (Option 010)** – For viewing reflection and transmission responses in time or distance domain.
- **Configurable test set (Option 014)** – Provides six front panel access loops. Three access loops are for port one and three for port two. The loops provide access to the signal path between (a) the source output and the reference receiver, (b) the source output and directional coupler thru arm and (c) the coupled arm of the directional coupler and the port receiver. This option provides the capability to improve instrument sensitivity for measuring low-level signals, to reverse the directional coupler to achieve even more dynamic range or to add components and other peripheral instruments for a variety of measurement applications. (see PNA Series Microwave Data Sheet literature number 5988-7988EN for a basic block diagram)
- **Extended power range and bias tees (Option UNL)** – Adds two 60 dB step attenuators and two bias tees. A step attenuator and bias tee set is inserted between the source and test port one and another set between the source and test port two. (see PNA Series Microwave Data Sheet literature number 5988-7988EN for a basic block diagram)
- **Frequency offset (Option 080)** – This option enables the PNA Series microwave network analyzers to set the source frequency independently from where the receivers are tuned. This ability is important for two general classes of devices: mixers (and converters) and amplifiers. Option 080 provides a very basic user interface.
- **Reference receiver switch (Option 081)** – Option 081 adds a solid-state internal RF transfer switch in the R1 reference-receiver path (see PNA Series Microwave Data Sheet literature number 5988-7988EN for a basic block diagram). The switch allows the instrument to easily switch between standard S-parameter (non-frequency-offset) measurements and frequency offset measurements such as relative phase or absolute group delay that require an external reference mixer. The user can set the switch manually or remotely, but it is best used with the frequency-converter application (Option 083), where it is controlled automatically during the vector-mixer calibration procedure and subsequent measurements.
- **Frequency-converter measurement application (Option 083)** – The frequency-converter application adds an intuitive and easy-to-use user interface, advanced calibration choices that provide exceptional amplitude and phase accuracy, and control of external signal sources for use as local oscillators. Mixer calibration techniques include scalar-mixer calibration and vector-mixer calibration (requires Option 081). Finally, the frequency-converter application supports all of Agilent's major signal source families. Option 083 includes a GPIB to USB interface (82357A) for control of external sources and power meters.
- **Add receiver attenuators (Option 016)** – A 35 dB attenuator is added between each test port and its corresponding receiver (see PNA Series Microwave Data Sheet literature number 5988-7988EN for a basic block diagram).
- **Extended memory (Option 022)** – Adds more RAM for a total of 512 MB
- **Rack mount kit without handles (Option 1CM)** Adds a rack mount (5063-9217) and rail kit (E3663AC) for use without handles
- **Rack mount kit with handles (Option 1CP)** Adds a rack mount (5063-9237) and rail kit (E3663AC) for use with previously supplied handles

Selecting the correct mixer-test configuration:

Most mixer or converter test applications require Options 014, 080, 081, and 083. If you want to create and automate your own custom frequency-offset measurements (for example, intermodulation distortion), you may only need Options 014 and 080. For converters that require input power below -27 dBm, or for devices that have a large amount of LO feedthrough (like an unfiltered mixer), Option UNL, which adds source attenuators, is highly recommended. Besides allowing lower input power levels, these attenuators improve the isolation between the PNA's internal source and LO leakage signals, helping to prevent source-unleveled errors. For devices that put out signals near or above the receiver's compression levels (which varies between -3 and +5 dBm, depending on the model and frequency), Option 016 is recommended, which adds receiver attenuators. Finally, Option 010, which adds time-domain analysis, is very useful for gating out unwanted, time-delayed responses which often occur when measuring mixers.

Documentation

- Printed copy of assembly level service manual** (Option 0BW)

Localization

The following options provide a translated, printed copy of the on-line Help and an English printed copy of programming documentation.

- English manual** (Option AVK)
- German manual** (Option ABD¹)
- Spanish manual** (Option ABE¹)
- French manual** (Option ABF¹)
- Japanese manual** (Option ABJ¹)

Certification options

- Commercial calibration certificate with test data** (Option UK6)
Complete set of measurements which tests unit to manufacturer's published specifications. Includes calibration label, calibration certificate, and data report. Conforms to ISO 9001.
- ISO 17025 compliant calibration** (Option 1A7)
Complete set of measurements which tests unit to manufacturer's published specifications. Includes calibration label, ISO 17025 calibration certificate, and data report, measurement uncertainties and guardbands on all customer specifications. Conforms to ISO 17025 and ISO 9001.

Warranty and service

For warranty and service of 5 years, please order 60 months of R-51B (quantity = 60). Standard warranty is 36 months.

- Return-to-Agilent warranty and service plan** (Option R-51B)

Calibration²

For 3 years order 36 months of the appropriate calibration plan shown below. For 5 years, specify 60 months.

- Standard calibration** (Option R-50C-001)
- Standards-compliant calibration** (Option R-50C-002)

1. Printed version of on-line help has translations up to firmware version 1.0.
2. Options not available in all countries.

Measurement Accessories

A complete line of RF and microwave test accessories can be found by visiting www.agilent.com/find/mta, www.agilent.com/find/accessories or www.agilent.com/find/ecal

Accessories are available in these connector types: 50 ohm Type-N, 3.5 mm, 7 mm, 2.4 mm, 2.92 mm, 1.85 mm, and waveguide. Test port cables and a calibration kit should be added for a complete measurement system. A verification kit is used to verify corrected system performance.

Cables and adapter sets


Agilent offers cables in the following types:

- single cables in semi-rigid and flexible
- cable sets in semi-rigid and flexible

There are also adapter sets available that protect the test port and convert the port to the desired connector interface. These kits contain:

- one male adapter
- one female adapter

To attain the best mechanical rigidity for device connection, use a single cable and the appropriate special adapter set. To attain the greatest flexibility for device connection, use a cable set.

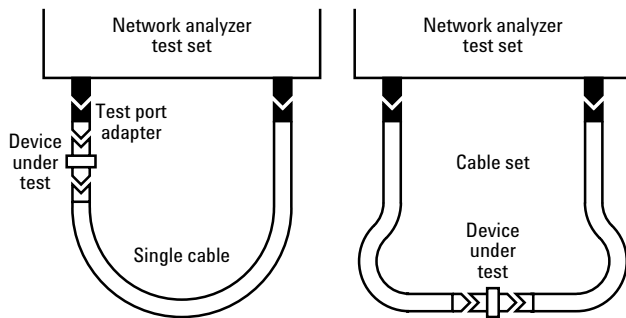

Calibration kits

Coaxial measurements

Mechanical calibration kits include standards, such as opens, shorts and loads, which are measured by the network analyzer for increased measurement accuracy.

Electronic calibration (ECal) kits replace mechanical calibration standards with one solid-state calibration module that is controlled by the network analyzer via USB, to present many different impedances to the test ports. A full two-port calibration can be performed quickly with a single connection. This technique reduces operator errors and connector wear and abrasion.

Choose a calibration kit for each connector type to be used.

Economy, includes:

- open standards (male and female)
- short standards (male and female)
- fixed-termination standards (male and female)

Standard, includes the devices in the economy kit and adds:

- sliding load standards (male and female) or a series of offset shorts

Precision, includes the devices in the economy kit and adds:

- 50 ohm airline(s) for TRL calibration
- TRL adapters

Waveguide measurements

For waveguide measurements, Agilent offers mechanical calibration kits that include:

- waveguide-to-coax adapters (X, P, K, R, Q, U, V)
- precision waveguide section
- flush short circuit
- fixed terminations
- straight section

For devices with 1.85 mm connectors

Mechanical calibration kits

□ **85058B** standard: DC to 67 GHz.

Includes:

- 85058-60101 1.85 mm (m) short 5.4 mm
- 85058-60102 1.85 mm (m) short 6.3 mm
- 85058-60103 1.85 mm (m) short 7.12 mm
- 85058-60104 1.85 mm (m) short 7.6 mm
- 85058-60105 1.85 mm (f) short 5.4 mm
- 85058-60106 1.85 mm (f) short 6.3 mm
- 85058-60107 1.85 mm (f) short 7.12 mm
- 85058-60108 1.85 mm (f) short 7.6 mm
- 85058-60109 1.85 mm male open
- 85058-60110 1.85 mm female open
- 85058-60111 1.85 mm male load
- 85058-60112 1.85 mm female load
- 85058-60113 1.85 mm (m) to 1.85 mm (m) adapter
- 85058-60114 1.85 mm (f) to 1.85 mm (f) adapter
- 85058-60115 1.85 mm (m) to 1.85 mm (f) adapter

□ **85058E** economy: DC to 67 GHz.

Includes:

- 85058-60101 1.85 mm (m) short 5.4 mm
- 85058-60105 1.85 mm (f) short 5.4 mm
- 85058-60109 1.85 mm male open
- 85058-60110 1.85 mm female open
- 85058-60123 1.85 mm male load
- 85058-60124 1.85 mm female load
- 85058-60113 1.85 mm (m) to 1.85 mm (m) adapter
- 85058-60114 1.85 mm (f) to 1.85 mm (f) adapter
- 85058-60115 1.85 mm (m) to 1.85 mm (f) adapter

Electronic calibration kits

□ **N4694A** Microwave ECal: 10MHz to 67 GHz, 2 ports.

Includes:

Option M0F module with:

- N4694-60001 1.85mm (f) to 1.85mm (m) ECal module

Option 00M module with:

- N4694-60002 1.85mm (m) to 1.85mm (m) ECal module

Option 00F module with:

- N4694-60003 1.85mm (f) to 1.85mm (f) ECal module

Option 00A adds:

- 85058-60113 1.85mm (m) to 1.85mm (m) adapter
- 85058-60114 1.85mm (f) to 1.85mm (f) adapter

Cables¹

- **N4697E** Single, flexible: 1.85 mm, 96.5 cm, 38 inches
- **N4697F** Set, flexible: 1.85 mm, 62.2 cm, 24.5 inches

Adapter set

- **85130H** 1.85 mm¹ to 1.85 mm

For devices with 2.4 mm connectors

Mechanical calibration kits

□ **85056A** standard: DC to 50 GHz.

Includes:

- 00901-60003 2.4 mm (m) fixed broadband load
- 00902-60004 2.4 mm (f) fixed broadband load
- 00915-60003 2.4 mm (m) sliding load
- 00915-60004 2.4 mm (f) sliding load
- 85056-60005 2.4 mm (m) to 2.4 mm (m) adapter
- 85056-60006 2.4 mm (f) to 2.4 mm (f) adapter
- 85056-60007 2.4 mm (m) to 2.4 mm (f) adapter
- 85056-60020 2.4 mm (m) short
- 85056-60021 2.4 mm (f) short
- 85056-60022 2.4 mm (m) open
- 85056-60023 2.4 mm (f) open

□ **85056D** economy: DC to 50 GHz.

Includes:

- 00901-60003 2.4 mm (m) fixed broadband load
- 00902-60004 2.4 mm (f) fixed broadband load
- 85056-60005 2.4 mm (m) to 2.4 mm (m) adapter
- 85056-60006 2.4 mm (f) to 2.4 mm (f) adapter
- 85056-60007 2.4 mm (m) to 2.4 mm (f) adapter
- 85056-60020 2.4 mm (m) short
- 85056-60021 2.4 mm (f) short
- 85056-60022 2.4 mm (m) open
- 85056-60023 2.4 mm (f) open

Electronic calibration kits

□ **N4693A** Microwave ECal: 10MHz to 50 GHz, 2 ports.

Includes:

Option M0F module with:

- N4693-60001 2.4mm (f) to 2.4mm (m) ECal module

Option 00M module with:

- N4693-60002 2.4mm (m) to 2.4mm (m) ECal module

Option 00F module with:

- N4693-60003 2.4mm (f) to 2.4mm (f) ECal module

Option 00A adds:

- 85056-60005 2.4mm (m) to 2.4mm (m) adapter
- 85056-60007 2.4mm (f) to 2.4mm (f) adapter

Cables¹

- **85133C** single, semi-rigid: 2.4 mm, 81 cm, 32 inches
- **85133D** set, semi-rigid: 2.4 mm, 53 cm each, 21 inches
- **85133E** single, flexible: 2.4 mm, 81 cm, 32 inches
- **85133F** set, flexible: 2.4 mm, 53 cm each, 21 inches

Adapter set

- **85130G** 2.4 mm¹ to 2.4 mm

1. Special rugged female connector specifically for connecting to the network analyzer test port, but does not mate with a standard male connector.

For devices with K connectors (2.92mm)

Mechanical calibration kits

- **85056K** 2.92/2.4 economy: DC to 40/50 GHz.
Includes:
 - 00901-60003 2.4 mm (m) fixed broadband load
 - 00902-60004 2.4 mm (f) fixed broadband load
 - 00915-60003 2.4 mm (m) sliding load (Option 001)
 - 00915-60004 2.4 mm (f) sliding load (Option 001)
 - 11904-60001 2.4 mm (m) to 2.92 mm (m) adapter
 - 11904-60002 2.4 mm (f) to 2.92 mm (f) adapter
 - 11904-60003 2.4 mm (m) to 2.92 mm (f) adapter
 - 11904-60004 2.4 mm (f) to 2.92 mm (m) adapter
 - 85056-60005 2.4 mm (m) to 2.4 mm (m) adapter
 - 85056-60006 2.4 mm (f) to 2.4 mm (f) adapter
 - 85056-60007 2.4 mm (m) to 2.4 mm (f) adapter
 - 85056-60020 2.4 mm (m) short
 - 85056-60021 2.4 mm (f) short
 - 85056-60022 2.4 mm (m) open
 - 85056-60023 2.4 mm (f) open

Electronic calibration kits

- **N4692A** Microwave ECal: 10MHz to 40 GHz, 2 ports.
Includes:
 - Option M0F** module with:
 - N4692-60001 2.92mm (f) to 2.92mm (m) ECal module
 - Option 00M** module with:
 - N4692-60002 2.92mm (m) to 2.92mm (m) ECal module
 - Option 00F** module with:
 - N4692-60003 2.92mm (f) to 2.92mm (f) ECal module
 - Option 00A** adds:
 - N4692-60010 2.92mm (m) to 2.92mm (m) adapter
 - N4692-60011 2.92mm (f) to 2.92mm (f) adapter

Cables^{1,2}

- **85133C** single, semi-rigid: 2.4 mm, 81 cm, 32 inches
- **85133D** set, semi-rigid: 2.4 mm, 53 cm each, 21 inches
- **85133E** single, flexible: 2.4 mm, 81 cm, 32 inches
- **85133F** set, flexible: 2.4 mm, 53 cm each, 21 inches

Adapters

- **11904A** 2.4 mm (m) to K (m)
- **11904B** 2.4 mm (f) to K (f)
- **11904C** 2.4 mm (m) to K (f)
- **11904D** 2.4 mm (f) to K (m)
- **11904S** 2.4 mm to K adapter set

For devices with 3.5 mm or SMA connectors

Mechanical calibration kits

- **85052B** standard: DC to 26.5 GHz. Includes:
 - 00902-60003 3.5 mm (m) fixed load
 - 00902-60004 3.5 mm (f) fixed load
 - 00911-60019 3.5 mm (m) sliding load
 - 00911-60020 3.5 mm (f) sliding load
 - 85052-60006 3.5 mm (m) short
 - 85052-60007 3.5 mm (f) short
 - 85052-60008 3.5 mm (m) open
 - 85052-60009 3.5 mm (f) open
 - 85052-60012 3.5 mm (f) to 3.5 mm (f) adapter
 - 85052-60013 3.5 mm (f) to 3.5 mm (m) adapter
 - 85052-60014 3.5 mm (m) to 3.5 mm (m) adapter
- **85052C** precision TRL: DC to 26.5 GHz. Includes:
 - 00902-60003 3.5 mm (m) fixed load
 - 00902-60004 3.5 mm (f) fixed load
 - 85052-60006 3.5 mm (m) short
 - 85052-60007 3.5 mm (f) short
 - 85052-60008 3.5 mm (m) open
 - 85052-60009 3.5 mm (f) open
 - 85052-60032 3.5 mm (f) to 3.5 mm (f) adapter
 - 85052-60033 3.5 mm (m) to 3.5 mm (m) adapter
 - 85052-60034 3.5 mm (f) to 3.5 mm (m) adapter
 - 85052-60035 3.5 mm short TRL line
 - 85052-60036 3.5 mm long TRL line
- **85052D** economy: DC to 26.5 GHz. Includes:
 - 00902-60003 3.5 mm (m) fixed load
 - 00902-60004 3.5 mm (f) fixed load
 - 85052-60006 3.5 mm (m) short
 - 85052-60007 3.5 mm (f) short
 - 85052-60008 3.5 mm (m) open
 - 85052-60009 3.5 mm (f) open
 - 85052-60012 3.5 mm (f) to 3.5 mm (f) adapter
 - 85052-60013 3.5 mm (f) to 3.5 mm (m) adapter
 - 85052-60014 3.5 mm (m) to 3.5 mm (m) adapter

1. Special rugged female connector specifically for connecting to the network analyzer test port, but does not mate with a standard male connector.

2. For use with E8362A or B.

Electronic calibration kits

- **N4691A** Microwave ECal: 10MHz to 26.5 GHz, 2 ports.
Includes:
 - Option M0F** module with:
N4691-60001 3.5mm (f) to 3.5mm (m) ECal module
 - Option 00M** module with:
N4691-60002 3.5mm (m) to 3.5mm (m) ECal module
 - Option 00F** module with:
N4691-60003 3.5mm (f) to 3.5mm (f) ECal module
 - Option 00A** adds:
 - 85052-60012 3.5mm (m) to 3.5mm (m) adapter
 - 85052-60014 3.5mm (f) to 3.5mm (f) adapter

Cables¹

- **85131C** single, semi-rigid: 3.5 mm to 3.5 mm, 81 cm, 32 inches²
- **85131D** set, semi-rigid: 3.5 mm to 3.5 mm, 53 cm each, 21 inches each²
- **85131E** single, flexible: 3.5 mm to 3.5 mm, 96.5 cm, 38 inches²
- **85131F** set, flexible: 3.5 mm to 3.5 mm, 62.2 cm each, 24.5 inches each²
- **85134C** single, semi-rigid: 3.5 mm to 2.4 mm, 81 cm, 32 inches
- **85134D** set, semi-rigid: 3.5 mm to 2.4 mm, 53 cm each, 21 inches each
- **85134E** single, flexible: 3.5 mm to 2.4 mm, 96 cm, 38 inches
- **85134F** set, flexible: 3.5 mm to 2.4 mm, 53 cm each, 21 inches each

Adapter sets

- **85130F** 2.4 mm¹ to 3.5 mm

For devices with Type-N connectors

Mechanical calibration kits

- **85054B** standard: DC to 18 GHz. Includes:
 - 00909-60011 Type-N (m) fixed lowband load
 - 00909-60012 Type-N (f) fixed lowband load
 - 85054-60025 Type-N (m) short
 - 85054-60026 Type-N (f) short
 - 85054-60027 Type-N (m) open
 - 85054-60028 Type-N (f) open
 - 85054-60031 Type-N (f) to 7mm adapter
 - 85054-60032 Type-N (m) to 7mm adapter
 - 85054-60037 Type-N (f) to Type-N (f) adapter
 - 85054-60038 Type-N (m) to Type-N (m) adapter
 - 85054-80010 Type-N (f) sliding load
 - 85054-80009 Type-N (m) sliding load
 - 85054-60050 Type-N (f) connector gage
 - 85054-60052 Type-N (f) gage master
 - 85054-60051 Type-N (m) connector gage
 - 85054-60053 Type-N (m) gage master
- **85054D** economy: DC to 18 GHz. Includes:
 - 85054-60025 Type-N (m) short
 - 85054-60026 Type-N (f) short
 - 85054-60027 Type-N (m) open
 - 85054-60028 Type-N (f) open
 - 85054-60031 Type-N (f) to 7mm adapter
 - 85054-60032 Type-N (m) to 7mm adapter
 - 85054-60037 Type-N (f) to Type-N (f) adapter
 - 85054-60038 Type-N (m) to Type-N (m) adapter
 - 85054-60046 Type-N (m) fixed load
 - 85054-60047 Type-N (f) fixed load

Electronic calibration kits

- **N4690A** Microwave ECal: 10 MHz to 18 GHz, 2 ports.
Includes:
 - Option M0F** module with:
N4690-60001 Type-N (f) to Type-N (m) ECal module
 - Option 00M** module with:
N4690-60002 Type-N (m) to Type-N (m) ECal module
 - Option 00F** module with:
N4690-60003 Type-N (f) to Type-N (f) ECal module
 - Option 00A** adds:
 - 85054-60037 Type-N (m) to Type-N (m) adapter
 - 85054-60038 Type-N (f) to Type-N (f) adapter

Cables¹

Use the test port cables recommended for devices with 7 mm connectors, and 7 mm to Type-N adapters that are from the 85054B/D Type-N calibration kit (see 7 mm connector section).

1. Special rugged female connector specifically for connecting to the network analyzer test port, but does not mate with a standard male connector.

2. For use with E8362A or B.

For devices with 7 mm connectors

Mechanical calibration kits

- **85050B** standard: DC to 18 GHz. Includes:
 - 00909-60008 7 mm coax termination
 - 85050-60006 7 mm fixed broadband load
 - 85050-80007 7 mm short
 - 85050-80010 7 mm open
 - 85050-80011 7 mm sliding load
- **85050C** precision TRL: DC to 18 GHz. Includes:
 - 00909-60008 7 mm coax termination
 - 85050-60003 7 mm to 7 mm airline
 - 85050-60005 7 mm to 7 mm TRL adapter
 - 85050-60006 7 mm fixed broadband load
 - 85050-80008 7 mm short
 - 85050-80009 7 mm short collet
 - 85050-80010 7 mm open
- **85050D** economy: DC to 18 GHz. Includes:
 - 85050-60006 7 mm fixed broadband load
 - 85050-80007 7 mm short
 - 85050-80010 7 mm open

Electronic calibration kits

- **N4696A** Microwave ECal: 10 MHz to 18 GHz, 2 ports, 7mm to 7mm Microwave module

Cables¹

- **85132C** single, semi-rigid: 7 mm to 3.5 mm, 81 cm, 32 inches²
- **85132D** set, semi-rigid: 7 mm to 3.5 mm, 53 cm each, 21 inches each²
- **85132E** single, flexible: 7 mm to 3.5 mm, 97.2 cm, 38.25 inches²
- **85132F** set, flexible: 7 mm to 3.5 mm, 62.9 cm each, 24.75 inches each²
- **85135C** single, semi-rigid: 7 mm to 2.4 mm, 81 cm, 32 inches
- **85135D** set, semi-rigid: 7 mm to 2.4 mm, 53 cm each, 21 inches each
- **85135E** single, flexible: 7 mm to 2.4 mm, 96 cm, 38 inches
- **85135F** set, flexible: 7 mm to 2.4 mm, 53 cm each, 21 inches each

Adapter sets

- **85130E** 2.4 mm¹ to 7 mm

For devices with waveguide

Mechanical calibration kits

X Band

- **X11644A** standard, WR-90: 8.2 to 12.4 GHz. Includes:
 - 00896-60008 X-band standard section
 - 00910-60003 X-band termination
 - 11644-20018 X-band short
 - 11644-20021 X-band shim
- **85132F** cable set (set, flexible 7 mm to 3.5 mm, 62.9 cm each, 24.75 inches each²)
- **85135F** cable set (set, flexible, 7 mm to 2.4 mm, 53 cm each, 21 inches each)
- **X281C** adapter (included in calibration kit): WR-90 to 7 mm

P Band

- **P11644A** standard, WR-62: 12.4 to 18 GHz. Includes:
 - 00896-60007 P-band standard section
 - 00910-60002 P-band termination
 - 11644-20017 P-band short
 - 11644-20020 P-band shim
- **85132F** cable set (set, flexible 7 mm to 3.5 mm, 62.9 cm each, 24.75 inches each²)
- **85135F** cable set (flexible, 7 mm to 2.4 mm, 53 cm each, 21 inches each)
- **P281C** adapter (included in calibration kit): WR-62 to 7 mm

K Band

- **K11644A** standard, WR-42: 18 to 26.5 GHz. Includes:
 - 00896-60006 K-band standard section
 - 00910-60001 K-band termination
 - 11644-20016 K-band short
 - 11644-20019 K-band shim
- **85134F** cable set (set, flexible, 3.5 mm to 2.4 mm, 53 cm each, 21 inches each)
- **K281C** adapter (included in calibration kit): WR-42 to 3.5 mm (f)
 - Option 012** WR-42 to 3.5 mm (m)

1. Special rugged female connector specifically for connecting to the network analyzer test port, but does not mate with a standard male connector.

2. For use with E8362A or B.

R Band

- **R11644A** standard, WR-28: 26.5 to 40 GHz.
Includes:
 - 00914-20028 R-band termination
 - 11644-20005 R-band short
 - 11644-20003 R-band shim
 - 11644-60001 R-band 10 cm straight waveguide
 - 11644-60016 R-band 5 cm straight waveguide
- **85133F** cable set (set, flexible, 2.4 mm, 53 cm each, 21 inches each)
- **R281A** adapter (2.4 mm (f) to WR-28 waveguide adapter)
- **R281B** adapter (2.4 mm (m) to WR-28 waveguide adapter)

Q Band

- **Q11644A** standard, WR-22: 33 to 50 GHz.
Includes:
 - 11644-60005 Q-band termination
 - 11644-20004 Q-band short
 - 11644-20001 Q-band shim
 - 11644-60002 Q-band 10 cm straight waveguide
 - 11644-60017 Q-band 5 cm straight waveguide
- **85133F** cable set (set, flexible, 2.4 mm, 53 cm each, 21 inches each)
- **Q281A** adapter (2.4 mm (f) to WR-22 waveguide adapter)
- **Q281B** adapter (2.4 mm (m) to WR-22 waveguide adapter)

U Band

- **U11644A** standard, WR-19: 40 to 60 GHz.
Includes:
 - 11644-60006 U-band termination
 - 11644-20004 U-band short
 - 11644-20002 U-band shim
 - 11644-60003 U-band 10 cm straight waveguide
 - 11644-60018 U-band 5 cm straight waveguide

V Band

- **V11644A** standard, WR-15: 50 to 75 GHz.
Includes:
 - 11644-60025 V-band termination
 - 11644-20015 V-band short
 - 11644-20013 V-band shim
 - 11644-60012 V-band standard section

Verification kits

All Agilent verification kits include:

- precision Z_0 airline
 - mismatched airline
 - fixed attenuators
 - traceable measured data and uncertainties
- **85057B** 45 MHz to 50 GHz 2.4 mm kit
Includes attenuators, airline and mismatch airline with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **85055A** 300 kHz to 18 GHz Type-N kit
Includes attenuators, airline and mismatch airline with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **85053B** 300 kHz to 26.5 GHz 3.5 mm kit
Includes attenuators, airline and mismatch airline with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **85051B** 300 kHz to 18 GHz 7 mm kit
Includes attenuators, airline and mismatch airline with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **R11645A** 26.5 to 40 GHz R-Band WR-28 kit
Includes attenuators and mismatch attenuator with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **Q11645A** 33 to 50 GHz Q-Band WR-22 kit
Includes attenuators and mismatch attenuator with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **U11645A** 40 to 60 GHz U-Band WR-19 kit
Includes attenuators and mismatch attenuator with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.
 - **V11645A** 50 to 75 GHz V-Band WR-15 kit
Includes attenuators and mismatch attenuator with data on a 3.5-inch disk for use in confirming accuracy enhanced system measurement performance, traceable to national standards. Test procedure is provided in the service manual.

General Accessories

USB

- N4688A** CD-ROM drive
Provides an external read/write CD-ROM drive with a USB cable.
- N4689A** USB hub
Provides a USB hub for connecting additional USB peripherals.

Probe

- 85024A** high-frequency probe
Provides high-impedance in-circuit test capability from 300 kHz to 3 GHz.

Power meters and sensors

Recommended for self support, adjustments and performance tests to verify proper instrument operation.

- E4418B** single-channel power meter
- E4419B** dual-channel power meter
- 8481B** power sensor, 10 MHz to 18 GHz, Type-N (m), 25 W
- 8481A** power sensor, 10 MHz to 18 GHz, Type-N (m), 100 mW
- 8485A** power sensor, 50 MHz to 26.5 GHz, APC-3.5 mm (m), 100 mW
- 8487A** power sensor, 50 MHz to 50 GHz, 2.4 mm, 300 mW
- 8487D** power sensor, 50 MHz to 50 GHz, 2.4 mm, 100 mW
- R8486A** power sensor, 26 GHz to 40 GHz, waveguide flange UG-599/U, 100 mW
- Q8486A** power sensor, 33 GHz to 50 GHz, waveguide flange UG-383/U, 100 mW
- U8486A** power sensor, 50 GHz to 75 GHz, waveguide flange UG-385/U, 200 mW avg
- E4412A** CW power sensor, 10 MHz to 18 GHz, Type-N (m), 200 mW
- E4413A** CW power sensor, 50 MHz to 265 GHz, 3.5 mm, 200 mW

Amplifiers

- 83006A** power amplifier, 10 MHz to 26.5 GHz, 20 dB gain, power out: +18 dBm to 10 GHz or +16 dBm to 20 GHz or +14 dBm to 26.5 GHz
- 83017A** power amplifier, 50 MHz to 26.5 GHz, 25 dB gain, power out: +20 dBm to 20 GHz, or +15 dBm to 26.5 GHz
- 83018A** power amplifier, 2 to 26.5 GHz, 27 dB gain to 20 GHz or 23 dB to 26.5 GHz, power out: +24 dBm to 20 GHz or +21 dBm to 26.5 GHz
- 83020A** power amplifier, 2 to 26.5 GHz, 30 dB gain to 20 GHz or 27 dB to 26.5 GHz, power out: +30 dBm to 20 GHz or +26 dBm to 26.5 GHz
- 83050A** power amplifier, 2 to 50 GHz, 23 dB gain, power out: +20 dBm to 40 GHz or +17 dBm to 50 GHz
- 83051A** power amplifier, 45 MHz to 50 GHz, 23 dB gain power out: +12 dBm to 45 GHz or +10 dBm to 50 GHz

Couplers

- 87300B** coaxial coupler, 1 to 20 GHz, SMA (f), 10 dB coupling
- 87300C** coaxial coupler, 1 to 26.5 GHz, 3.5 mm (f), 10 dB coupling
- 87301B** coaxial coupler, 10 to 46 GHz, 2.9 mm (f), 10 dB coupling
- 87301D** coaxial coupler, 1 to 40 GHz, 2.4 mm (f) or optional 2.92 mm (f), 13 dB coupling
- 87310B** 90° coaxial coupler, 1 to 18 GHz, SMA (f), 3 dB coupling
- 87301E** coaxial coupler, 2 to 50 GHz, 2.4 mm (f), 10 dB coupling

Equipment racks and case

- E3663AC** Rack mount flange kit, for use with handles; includes handles¹
- 5063-9237** Rack mount kit, for use without handles; may be ordered as option 1CM
- 5063-9217** Rack mount kit, for use with previously supplied handles; may be ordered as option 1CP
- 5063-9224** Rail kit, included with option 1CM and 1CP

1. The PNA Series analyzer is supplied with handles.

Applications

Material measurement

□ 85070D High-Temperature Dielectric Probe Kit

The 85070D enables measurements of the dielectric properties of materials quickly and conveniently. Measurements made with this probe are nondestructive and require no sample preparation. The dielectric probe is well suited for measurements of liquid, semisolid and flat solid materials. Measurement results can be viewed in a variety of formats (ϵ'_r , ϵ''_r , $\tan \delta$ or Cole-Cole). The supplied software can be run in the PNA analyzer or on a PC.

□ 85071D Materials Measurement Software

The 85071D materials measurement software calculates the permittivity and permeability of material samples placed in a coaxial airline or a rectangular waveguide. The measurement technique works well for solid materials that can be machined to fit precisely inside a transmission line. Measurement results can be viewed in a variety of formats (ϵ'_r , ϵ''_r , μ'_r , μ''_r , $\tan \delta$, or Cole-Cole μ). The software can be run in the PNA analyzer or on a PC.

Peripherals

The following peripherals may be used with the Microwave PNA Series. Other peripherals not listed here may also be compatible with these instruments.

Monitors

VGA-compatible monitor

Printers

USB, LAN, parallel or serial printers with Microsoft® Windows® 2000 printer driver

Interface cables

Choose the appropriate cables to connect each peripheral to the network analyzer.

- 10833A GPIB cable, 1.0 m (3.3 ft)
- 10833B GPIB cable, 2.0 m (6.6 ft)
- 10833D GPIB cable, 0.5 m (1.6 ft)
- 82357A GPIB to USB interface

Upgrade Kits

Upgrade kits for the Microwave PNA Series

Upgrade kits are available to add options after initial purchase. To order an upgrade kit for the Microwave PNA series, order the analyzer's model number followed by a "U", then indicate the option to be added:

- Time-domain upgrade kit** (Option 010)
The serial number of the instrument to be retrofitted must be specified when ordering this kit. User installable.
- Configurable test set upgrade kit** (Option 014)
Includes installation at an Agilent service center.
- Frequency-offset** (Option 080)
(Not available for the E8362AU/63AU/64AU)
Includes installation at an Agilent service center.
- External reference switch** (Option 081)
(Not available for the E836xAU) Includes installation at an Agilent service center.
- Frequency converter measurement application** (Option 083)
(Not available for the E8362AU/63AU/64AU)
Provides the application software for the PNA Series on CD-ROM. The software is user-installable. Installation requires USB CD-ROM drive or external computer connected via LAN.
- Receiver attenuators** (Option 016)
(Not available for the E836xAU)
Includes installation at an Agilent service center.
- Extended memory** (Option 022)
(Not available for the E8362AU/63AU/64AU)
Includes installation at an Agilent service center.
- Frequency range upgrade to an E8363A/B (40 GHz) PNA** (Option 040)
Available only for the E8362AU/BU. Includes installation at an Agilent service center.
- Frequency range upgrade to an E8364A/B (50 GHz) PNA** (Option 050)
Available only for the E8362AU/BU and E8363AU/BU. Includes installation at an Agilent service center.
- Frequency range upgrade to an E8361A (67 GHz) PNA** (Option 067)
Available only for the E8364AU/BU. Includes installation at an Agilent service center.
- Extended power range** (Option UNL)
(Currently unavailable for the E8361A)
Adds a step attenuator and a bias-tee between source and each test port. Includes installation at an Agilent service center.
- Extended hardware capability** (Option 097)
(Available for the E8362A/63A/64A only)
This option will upgrade your E836xA model to an E836xB model; adding a 10 MHz start frequency and the ability to add the options needed to test mixers (080, 081, and 083).
- Firmware upgrade** (Option 099)
Provides the latest revision of firmware for the PNA Series on CD-ROM. Firmware is user-installable. Installation requires USB CD-ROM drive or external computer connected via LAN. The latest firmware is also available from our web site or by using AgileUpdate on the analyzer. Visit our web page at: www.agilent.com/find/pna

Literature and Information

PNA Series Brochure

literature number 5968-8472E

Microwave PNA Series Data Sheet

literature number 5988-7988EN

Application and product notes

Application Development with the Agilent PNA Series of Network Analyzers

literature number 5980-2666ENUS

Understanding and Improving Network Analyzer Dynamic Range Application Note 1363-1

literature number 5980-2778EN

The “Need for Speed” in Component Manufacturing Test

literature number 5980-2783EN

Connectivity Advances in a LAN-enabled Instrument

literature number 5980-2782EN

De-embedding and Embedding S-parameter Networks Using the PNA Series Network Analyzer Application Note 1364-1

literature number 5980-2784EN

Understanding the Fundamental Principles of Vector Network Analysis Application Note 1287-1

literature number 5965-7707E

Exploring the Architectures of Network Analyzers Application Note 1287-2

literature number 5965-7708E

Applying Error Correction to Network Analyzer Measurements Application Note 1287-3

literature number 5965-7709E

Network Analyzer Measurements: Filter and Amplifier Examples Application Note 1287-4

literature number 5965-7710E

Improving Throughput in Network Analyzer Applications Application Note 1287-5

literature number 5966-3317E

Using a Network Analyzer to Characterize High-Power Components Application Note 1287-6

literature number 5966-3319E

Simplified Filter Tuning Using Time-Domain Analysis Application Note 1287-8

literature number 5968-5328E

In-Fixture Measurements Using Vector Network Analyzers Application Note 1287-9

literature number 5968-5329E

Advanced Filter Tuning Using Time Domain Application Note 1287-10

literature number 5980-2785EN

10 Hints for Making Better Network Analyzer Measurements Application Note 1291-1

literature number 5965-8166E

Key web resources

Visit Application Central:
www.agilent.com/find/test

Visit the PNA Series home page for additional literature and product information:
www.agilent.com/find/pna

Most application and product notes may be downloaded from our web site:
www.agilent.com/find/tmappnotes/apps

For on-line information about Agilent's service and support products visit:
www.agilent.com/find/tm_services

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

By internet, phone, or fax, get assistance with all your test & measurement needs

Phone or Fax

United States:
(tel) 800 452 4844

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:

(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific

Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252

Email:
tm_asia@agilent.com

On-line Assistance:

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002, 2003
Printed in USA, January 31, 2003
5988-7989EN



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Microsoft® and Windows® are U.S. registered trademarks of Microsoft Corporation.



Agilent Technologies