

X63 CRYSTAL



Specifications		
Parameters	Standard	Options
Frequency range	9.0 MHz – 100.0 MHz	
Frequency stability	Please specify	
Overall		
Initial at 25°C		
Temperature		
Aging first year		
Aging over Years		
Operating temperature	-10° C ~ +60°C	-20°C ~ +70°C -40°C ~ +85°C
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Load capacitance Cl	8 pF ~ 120 pF or serie	
Equivalent series resistance ESR	see ESR table	
Shunt capacity Co	< 5 pF	
Aging	± 5 ppm /first year max.	
Insulation resistance	500 Mohms minimum at 100 VDC	
Drive level	0,01 to 100 uW 10uW recommended	
Marking	Freq + Week +Year	

ESR table		
Frequency range	Mode	ESR (ohms)
9,000 MHz - 9,999 MHz	Fund.	70 max.
10,000 MHz - 11,999 MHz	Fund.	60 max.
12,000 MHz - 14,999 MHz	Fund.	60 max.
15,000 MHz - 19,999 MHz	Fund.	50 max.
20,000 MHz - 54,000 MHz	Fund.	40 max.
40.000 MHz – 100.0 MHz	3 rd	70 max.


X63 CRYSTAL

Drawing

Package

X63 4pad & X63 2pad

X63 4 pad

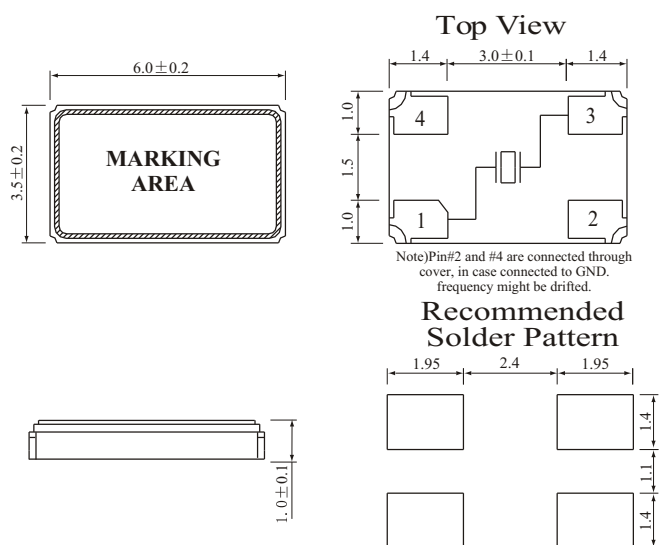

X63 2 pad

