

Agilent E8247C/57C PSG CW and Analog Signal Generators

Data Sheet



All specifications and characteristics apply over a 0 to 55°C range (unless otherwise stated) and apply after a 45 minute warm-up time. Supplemental characteristics, denoted as typical or nominal, provide additional (non-warranted) information.

PSG Signal Generators

	Option 520 250 kHz to 20 GHz	Option 540 250 kHz to 40 GHz
CW only	E8247C	E8247C
Analog	E8257C	E8257C
Vector	E8267C	

(See E8267C data sheet for PSG Vector Signal Generator specifications)

Definitions

Specifications (spec): represent warranted performance.

Typical (typ): performance is not warranted. It applies at 25°C. 80% of all products meet typical performance.

Nominal (nom): values are not warranted. They represent the value of a parameter that is most likely to occur; the expected or mean value. They are included to facilitate the application of the product.

Standard (std): No options are included when referring to the signal generator unless noted otherwise.



Agilent Technologies

E8247C & E8257C PSG Signal Generators

Choose your required frequency range as an option when configuring your PSG series. Please refer to the related literature section for additional information.

Agilent microwave PSG CW/analog signal generators options

Frequency range	(required option)
Option 520	250 kHz to 20 GHz
Option 540	250 kHz to 40 GHz
Step attenuator	
Option 1E1	Adds output step attenuator
High output power	
Option 1EA	High RF output power
Enhanced phase noise	
Option UNR	Enhanced phase noise performance
Narrow pulse modulation	
Option 1E6	Provides narrow pulse modulation below 3.2GHz
Analog (ramp) sweep	
Option 007	Provides analog (ramp) sweep and scalar network analyzer interface
Connectors	
Option 1ED	Type-N (f) connector
Option 1EM	Moves all connector to rear panel

Specifications

Frequency

Range¹		
Option 520	250 kHz to 20 GHz	
Option 540	250 kHz to 40 GHz	
Resolution		
CW	0.001 Hz ²	
All Sweep modes	0.01 Hz	
Accuracy		
	Aging rate ± temperature effects ± line voltage effects	
Switching speed³		
	< 15 ms (typical)	
Phase offset		
	Adjustable in nominal 0.1° increments.	
Frequency bands		
Band	Frequency range	N #
1	250 kHz to 250 MHz	1/8
2	> 250 to 500 MHz	1/16
3	> 500 MHz to 1 GHz	1/8
4	> 1 to 2 GHz	1/4
5	> 2 to 3.2 GHz	1/2
6	> 3.2 to 10 GHz	1
7	> 10 to 20 GHz	2
8	> 20 to 40 GHz	4
Internal timebase reference oscillator		
	Standard	Option UNR
Aging rate	< ±1 x 10 ⁻⁷ /year or < ±4.5 x 10 ⁻⁹ /day after 45 days	< ±3 x 10 ⁻⁸ /year or < ±2.5 x 10 ⁻¹⁰ /day after 30 days
Temperature effects (typical)	< ±5 x 10 ⁻⁸ 0 to 55°C	< ±4.5 x 10 ⁻⁹ 0 to 55°C
Line voltage effects (typical)	< ±2 x 10 ⁻⁹ for +5% -10% change	< ±2 x 10 ⁻¹⁰ for ±10% change
External reference frequency	1, 2, 2.5, 5, 10 MHz (within 1 ppm)	10 MHz only (within 1 ppm)
Reference output		
Frequency	10 MHz	
Amplitude	> +4 dBm into 50 Ω load (typical)	
External reference input		
Amplitude	> -3 dBm	
Opt UNR	5 dBm ±5 dB ⁴	
Input impedance	50 Ω (nominal)	

1. Useable to 100 kHz
2. In ramp sweep mode (Option 007), resolution is limited with narrow spans and slow sweep speeds. Refer to ramp sweep specifications for more information.
3. To within 0.1 ppm of final frequency above 250 MHz or within 100 Hz below 250 MHz
4. To optimize phase noise 5 dBm ± 2 dB

Digital sweep

Operating modes	Step sweep of frequency or amplitude or both (start to stop) List sweep of frequency or amplitude or both (arbitrary list)
Sweep range	
Frequency sweep	Within instrument frequency range
Amplitude sweep	Within attenuator hold range
Dwell time	1 ms to 60 s
Frequency settling time	28 ms (typical)
Amplitude settling time	10 ms (typical)
Number of points	2 to 1601
Triggering	Auto, external, single, or GPIB

Ramp (analog) sweep (Option 007)¹

Operating modes	Synthesized frequency sweep (start/stop), (center/span), (swept CW) Power (amplitude) sweep (start/stop) Manual sweep RPG control between start and stop frequencies Alternate sweep Alternates successive sweeps between current and stored states		
Sweep span range	Settable from minimum ² to full range		
Maximum sweep rate	Start frequency	Maximum sweep rate	Max span for 100ms sweep
	250 kHz to <0.5 GHz	25 MHz/ms	2.5 GHz
	0.5 to <1 GHz	50 MHz/ms	5 GHz
	1 to <2 GHz	100 MHz/ms	10 GHz
	2 to <3.2 GHz	200 MHz/ms	20 GHz
	≥3.2 GHz	400 MHz/ms	36.8 GHz
Frequency accuracy	± 0.05% of span ± timebase (at 100 ms sweep time, for sweep spans less than maximum values given above) Accuracy improves proportionally as sweep time increases ³		
Sweep time	(forward sweep, not including bandswitch and retrace intervals)		
Resolution	1 ms		
Manual mode	Settable 10 ms to 99 seconds		
Auto mode	Set to minimum value determined by maximum sweep rate and 8757D setting		
Triggering	Auto, external, single, or GPIB		
Markers	10 independent continuously variable frequency markers		
Display	Z-axis intensity or RF amplitude pulse		
Functions	M1 to center, M1/M2 to start/stop, marker delta		
Two-tone (master/slave) measurements⁴	Two PSG's can synchronously track each other, with independent control of start/stop frequencies		
Network analyzer compatibility	Fully compatible with Agilent 8757D scalar network analyzer ⁵ Also useable with Agilent 8757A/C/E scalar network analyzers for making basic swept measurements. ⁶		


1. During Ramp sweep operation, AM and Pulse Modulation are useable but not specified; FM, Phase Modulation, Wideband AM and I/Q modulation are not useable.
2. Minimum settable sweep span is proportional to carrier frequency and sweep time. Actual sweep span may be slightly different than desired setting for spans less than $[0.00004\% \text{ of carrier frequency or } 140 \text{ Hz}] \times [\text{sweep time in seconds}]$. Actual span will always be displayed correctly.
3. Typical accuracy for sweep times > 100 ms can be calculated from the equation: $[(0.005\% \text{ of span}) + (\text{sweep time in seconds})] \pm \text{timebase}$. Accuracy is not specified for sweep times < 100 ms.
4. For Master/Slave operation use Agilent Technologies part #8120-8806 Master/Slave interface cable.
5. When measuring low-pass devices in AC mode, dynamic range may be reduced up to 10dB below 3.2 GHz
6. GPIB system interface is not supported with 8757A/C/E, only with 8757D. As a result, some features of 8757A/C/E, such as frequency display, pass-through mode, and alternate sweep, do not function with PSG signal generators.

Output

Power ¹ (dBm)	Standard	Option 1EA
Frequency range		
20 GHz Models		
250 kHz to 3.2 GHz	-20 to +13	-20 to +16
250 kHz to 3.2 GHz (with Option 1E6)	-20 to +13	-20 to +13
> 3.2 to 20 GHz	-20 to +13	-20 to +20
40 GHz Models		
250 kHz to 3.2 GHz	-20 to +9	-20 to +15
250 kHz to 3.2 GHz (with Option 1E6)	-20 to +9	-20 to +12
> 3.2 to 20 GHz	-20 to +9	-20 to +18
> 20 to 40 GHz	-20 to +9	-20 to +14
20 GHz Models with step attenuator (Option 1E1)		
250 kHz to 3.2 GHz	-135 to +11	-135 to +15
250 kHz to 3.2 GHz (with Option 1E6)	-135 to +11	-135 to +12
> 3.2 to 20 GHz	-135 to +11	-135 to +18
40GHz Models with step attenuator (Option 1E1)		
250 kHz to 3.2 GHz	-135 to +7	-135 to +14
250 kHz to 3.2 GHz (with Option 1E6)	-135 to +7	-135 to +11
> 3.2 to 20 GHz	-135 to +7	-135 to +16
> 20 to 40 GHz	-135 to +7	-135 to +12
Step attenuator	0 dB and 5 to 115 dB in 10 dB steps	


20 GHz Models with Option 1EA

Measured maximum available power

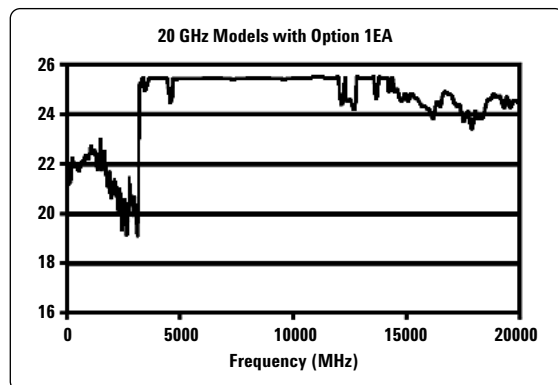

40 GHz Models with Option 1EA

Measured maximum available power

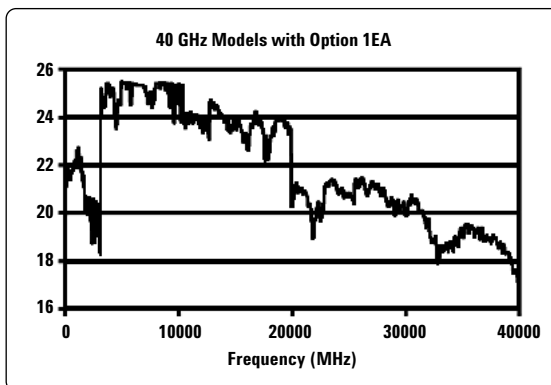

Attenuator hold range

Minimum

(Same as max power sweep range)

From -20 dBm to maximum specified output power with step attenuator in 0 dB position. Can be offset using Option 1E1 attenuator.

Amplitude switching speed²

CW or analog modulation

< 5 ms (typical)

When using power search

< 25 ms (typical)

Level accuracy³ (dB)

Frequency	> +10 dBm	+10 to -10 dBm	-10 to -20 dBm
250 kHz to 2 GHz	±0.6	±0.6	±1.4
2 GHz to 20 GHz	±0.8	±0.8	±1.2
> 20 to 40 GHz	±1.0	±0.9	±1.3

1. Maximum power specification is warranted from 15 to 35° C, and is typical from 0 to 15° C. Maximum power over the 35 to 55° C range typically degrades less than 2 dB.


2. To within 0.1 dB of final amplitude within one attenuator range

3. Specifications apply in CW and List/Step sweep modes over the 15 to 35° C temperature range. Degradation outside this range, for power levels > -10 dBm, is typically < 0.3 dB. In Ramp sweep mode (with Option 007), specifications are typical. For instruments with Type-N connectors (Option 1ED), specifications are degraded typically 0.2 dB above 18 GHz.


Level accuracy with step attenuator¹ (dB)

Frequency	> +10 dBm	+10 to -10 dBm	-10 to -70 dBm	-70 to -90 dBm	-90 to -110 dBm
250 kHz to 2 GHz	±0.6	±0.6	±0.7	±0.8	±1.4
> 2 to 20 GHz	±0.8	±0.8	±0.9	±1.0	±1.7
> 20 to 40 GHz	±1.0	±0.9	±1.0	±2.0	

20 GHz level accuracy

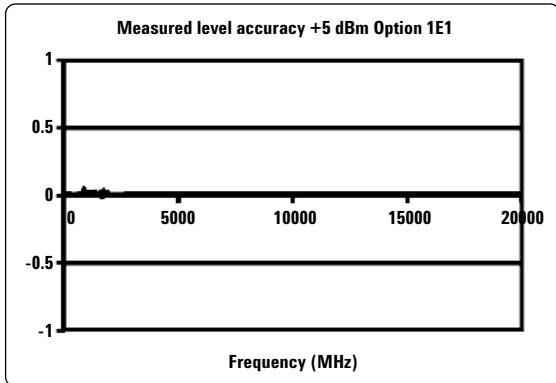

40 GHz level accuracy

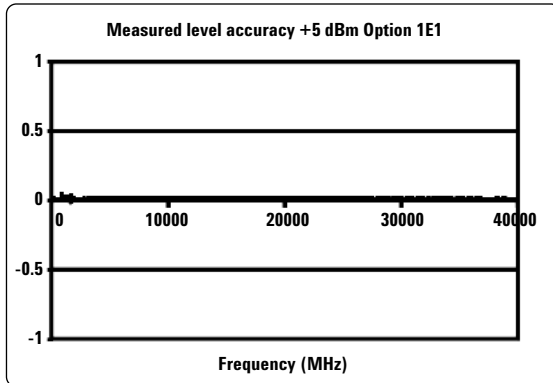

Resolution	0.01 dB
Temperature stability	0.01 dB/°C (typical)
User flatness correction	
Number of points	2 to 1601 points/table
Number of tables	Up to 10,000, memory limited
Path loss	Arbitrary, within attenuator range
Entry modes (user edit/view)	Remote power meter ² , remote bus, manual
Output impedance	50 Ω (nominal)
SWR (internally leveled) (typical)	
250 kHz to 2 GHz	< 1.4:1
> 2 GHz to 20 GHz	< 1.6:1
> 20 GHz to 40 GHz	< 1.8:1
Leveling modes	Internal leveling, external detector leveling, millimeter source module, ALC Off
External detector leveling	
Range	-0.2 mV to -0.5 V (nominal) (-36 dBm to +4 dBm using Agilent 33330D/E detector)
Bandwidth	10 kHz (typical) (Note: not intended for pulsed operation)
Maximum reverse power	1/2 Watt (nominal)


- Specifications apply in CW and List/Step sweep modes over the 15 to 35° C temperature range, with attenuator hold off (normal operating mode). Degradation outside this range, for ALC power levels > -10 dBm, is typically < 0.3 dB. In Ramp sweep mode (with Option 007), specifications are typical. For instruments with type-N connectors (Option 1ED), specifications are degraded typically 0.2 dB above 18 GHz. Level accuracy is not specified below -110 dBm.
- Compatible with Agilent Technologies EPM Series (E4418B and E4419B) power meters.

Spectral purity

Harmonics¹

	(dBc at +10 dBm or maximum specified output power, whichever is lower)
< 1 MHz	-28 dBc (typical)
1 MHz to 2 GHz	-28 dBc
> 2 GHz to 20 GHz	-55 dBc
> 20 GHz to 40 GHz	-50 dBc (typical)

20 GHz Measured harmonics 40 GHz Measured harmonics

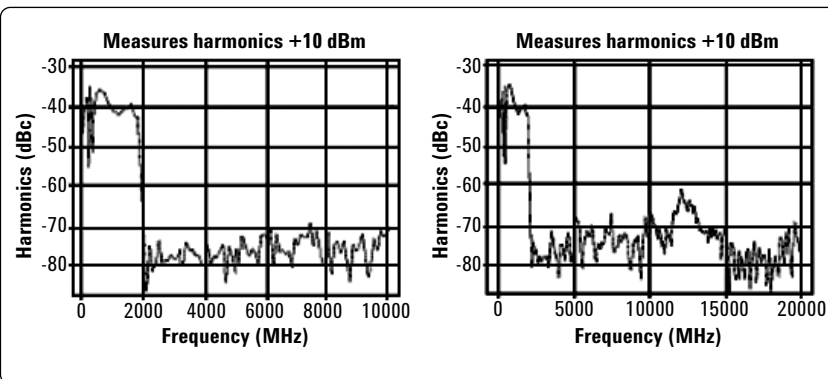

Sub-harmonics:²

	(dBc at +10 dBm or maximum specified output power, whichever is lower)
250 kHz to 10 GHz	None
> 10 GHz to 20 GHz	< -60 dBc
> 20 GHz to 40 GHz	< -50 dBc

Non-harmonics:

	(dBc at +10 dBm or maximum specified output power, whichever is lower, for offsets > 3 KHz [>300 Hz with Option UNR]) ¹⁶	
Frequency	Spec	Typical
250 kHz to 250 MHz	-65	-72 for > 10 kHz offsets
> 250 MHz to 1 GHz	-80	-88
> 1 to 2 GHz	-74	-82
> 2 to 3.2 GHz	-68	-76
> 3.2 to 10 GHz	-62	-70
> 10 to 20 GHz	-56	-64
> 20 to 40 GHz	-50	-58

SSB phase noise (CW)

	Offset from Carrier (dBc/Hz)	
Frequency	20 kHz	20 kHz (typical)
250 kHz to 250 MHz	-130	-134
> 250 to 500 MHz	-136	-140
> 500 MHz to 1 GHz	-130	-134
> 1 to 2 GHz	-124	-128
> 2 to 3.2 GHz	-120	-124
> 3.2 to 10 GHz	-110	-113
> 10 to 20 GHz	-104	-108
> 20 to 40 GHz	-98	-102

1. Specifications for harmonics beyond maximum instrument frequencies are typical.
2. Specifications for sub-harmonics beyond maximum instrument frequencies are typical.
3. Performance is typical for spurs at frequencies above the maximum operating frequency of the instrument. Specifications apply for CW mode only. Performance typically is -60 dBc between 200 and 250 MHz.

Option UNR: Enhanced SSB phase noise (CW)

Offset from carrier (dBc/Hz)

Frequency	100 Hz	1 kHz	10 kHz	100 kHz
250 kHz to 250 MHz	spec (typical) -94 (-115)	spec (typical) -110 (-123)	spec (typical) -128 (-132)	spec (typical) -130 (-133)
> 250 to 500 MHz	-100 (-110)	-124 (-130)	-132 (-136)	-136 (-141)
> 500 MHz to 1 GHz	-94 (-104)	-118 (-126)	-130 (-135)	-130 (-135)
> 1 to 2 GHz	-88 (-98)	-112 (-120)	-124 (-129)	-124 (-129)
> 2 to 3.2 GHz	-84 (-94)	-108 (-116)	-120 (-125)	-120 (-125)
> 3.2 to 10 GHz	-74 (-84)	-98 (-106)	-110 (-115)	-110 (-115)
> 10 to 20 GHz	-68 (-78)	-92 (-100)	-104 (-107)	-104 (-109)
> 20 to 40 GHz	-62 (-72)	-86 (-94)	-98 (-101)	-98 (-103)

Residual FM


CW mode	< N x 6 Hz (typical)
Option UNR	< N x 4 Hz (typical)
Ramp sweep mode: (rms, 50 Hz to 15 kHz bandwidth)	< N x 1 kHz (typical)

Broadband noise (CW mode at +10 dBm output, for offsets > 10 MHz)


> 2.4 to 20 GHz	< -148 dBc/Hz (typical)
> 20 to 40 GHz	< -141 dBc/Hz (typical)

Measured phase noise


Standard product

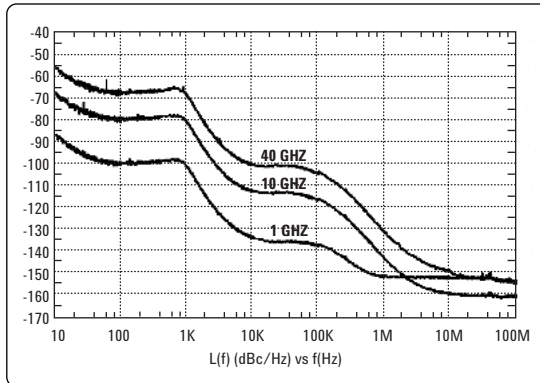


Option UNR

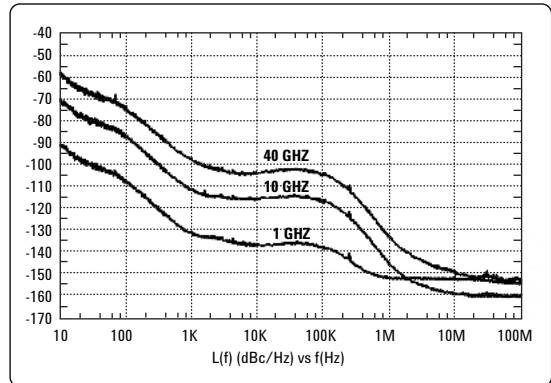

Measured Standard vs. Option UNR at 10 GHz

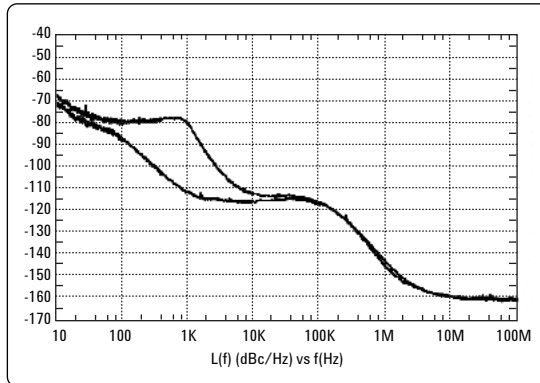

Measured AM noise at 10 GHz

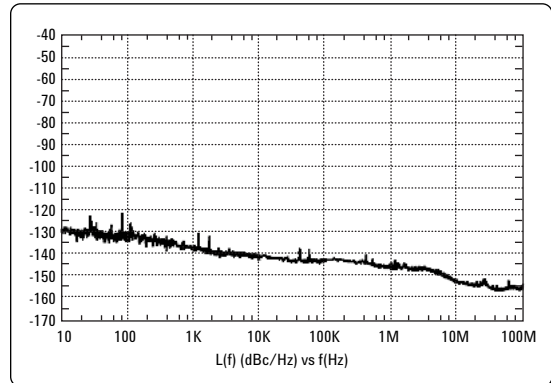

Typical RMS jitter:¹**Standard**

Carrier frequency	SONET/SDH data rates	RMS jitter bandwidth	Unit intervals (μ UI)	Time (fs)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	48	303
622 MHz	622 MB/s	1 kHz to 5 MHz	34	50
2.488 GHz	2488 MB/s	5 kHz to 15 MHz	65	25
9.953 GHz	9953 MB/s	20 kHz to 80 MHz	173	16

Option UNR

Carrier frequency	SONET/SDH data rates	RMS jitter bandwidth	Unit intervals (μ UI)	Time (fs)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	47	297
622 MHz	622 MB/s	1 kHz to 5 MHz	26	40
2.488 GHz	2488 MB/s	5 kHz to 15 MHz	66	25
9.953 GHz	9953 MB/s	20 kHz to 80 MHz	161	15

Frequency modulation

Maximum deviation	$N \times 8$ MHz									
Resolution	0.1% of deviation or 1 Hz, whichever is greater									
Deviation accuracy	$< \pm 3.5\%$ of FM deviation + 20 Hz (1 kHz rate, deviations $< N \times 800$ kHz)									
Modulation frequency response										
Path	<table border="1"> <thead> <tr> <th></th> <th>1 dB Bandwidth</th> <th>3 dB Bandwidth (typical)</th> </tr> </thead> <tbody> <tr> <td>FM 1</td> <td>dc/20 Hz to 100 kHz</td> <td>dc/5 Hz to 10 MHz</td> </tr> <tr> <td>FM 2</td> <td>dc/20 Hz to 100 kHz</td> <td>dc/5 Hz to 1 MHz</td> </tr> </tbody> </table>		1 dB Bandwidth	3 dB Bandwidth (typical)	FM 1	dc/20 Hz to 100 kHz	dc/5 Hz to 10 MHz	FM 2	dc/20 Hz to 100 kHz	dc/5 Hz to 1 MHz
	1 dB Bandwidth	3 dB Bandwidth (typical)								
FM 1	dc/20 Hz to 100 kHz	dc/5 Hz to 10 MHz								
FM 2	dc/20 Hz to 100 kHz	dc/5 Hz to 1 MHz								
dc FM² carrier offset	$\pm 0.1\%$ of set deviation + ($N \times 8$ Hz)									
Distortion	$< 1\%$ (1 kHz rate, deviations $< N \times 800$ kHz)									
Sensitivity	$\pm 1 V_{\text{peak}}$ for indicated deviation									
Paths	FM1 and FM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2. The FM2 path is limited to a maximum rate of 1 MHz. The FM2 path must be set to a deviation less than FM1.									

Phase modulation

Maximum deviation	$N \times 80$ radians ($N \times 8$ radians in high-bandwidth mode)	
Resolution	0.1% of set deviation	
Deviation accuracy	$< \pm 5\%$ of deviation + 0.01 radians (1 kHz rate, normal BW mode)	
Modulation frequency response		
Mode	Maximum deviation	Rates (3 dB BW)
Normal BW	$N \times 80$ rad	dc to 100 kHz
High BW	$N \times 8$ rad	dc to 1 MHz (typical)
Distortion	$< 1\%$ (1 kHz rate, THD, dev $< N \times 80$ rad, normal BW mode)	
Sensitivity	$\pm 1 V_{\text{peak}}$ for indicated deviation	
Paths	Φ M1 and Φ M2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2. The Φ M2 path must be set to a deviation less than Φ M1.	

1. Calculated from phase noise performance in CW mode only at +0 dBm. For other frequencies, data rate, or bandwidths, please contact your sales representative.
2. At the calibrated deviation and carrier frequency, within 5°C of ambient temperature at time of user calibration.

Amplitude modulation ($f_c > 2 \text{ MHz}$)¹ (typical)

Depth	Linear mode	Exponential (log) mode (Downward modulation only)
Maximum	> 90%	> 20 dB
Settable ²	0 to 100 %	0 to 40 dB
Resolution	0.1%	0.01 dB
Accuracy (1 kHz rate)	< $\pm(6 \text{ % of setting} + 1 \text{ %})$	< $\pm(2\% \text{ of setting} + 0.2 \text{ dB})$
Ext sensitivity	$\pm 1 V_{\text{peak}}$ for indicated depth	-1 V for indicated depth
Rates (3 dB bandwidth, 30% depth)	dc/10 Hz to 100 kHz (typical) (useable to 1 MHz)	
Distortion (1 kHz rate, linear mode, THD)		
30% AM	< 1.5%	
90% AM	< 4 %	
Paths	AM1 and AM2 are summed internally for composite modulation. Either path may be switched to any one of the modulation sources: Ext1, Ext2, internal1, internal2.	

External modulation inputs (Ext1 & Ext2)

Modulation types	AM, FM, and ΦM
Input impedance	50 or 600 Ω (nominal) switched
High/low indicator (100 Hz to 10 MHz BW, ac coupled inputs only)	Activated when input level error exceeds 3% (nominal)

Simultaneous modulation

All modulation types may be simultaneously enabled except: FM with ΦM , and linear AM with exponential AM. AM, FM, and ΦM can sum simultaneous inputs from any two sources (Ext1, Ext2, internal1, or internal2) Any given source (Ext1, Ext2, internal1, or internal2) may be routed to only one activated modulation type.


Internal modulation source

Dual function generators provides two independent signals (internal1 and internal2) for use with AM, FM, ΦM , or LF Out.	
Waveforms	Sine, square, positive ramp, negative ramp, triangle, Gaussian noise, uniform noise, swept sine ²¹
Rate range	
Sine	0.5 Hz to 1 MHz
Square, ramp, triangle	0.5 Hz to 100 kHz
Resolution	0.5 Hz
Accuracy	Same as timebase
LF out	
Output	Internal1 or internal2. Also provides monitoring of internal1 or internal2 when used for AM, FM, or ΦM .
Amplitude	0 to $3 V_{\text{peak}}$, (nominal) into 50 Ω
Output impedance	50 W (nominal)
Swept sine mode: (frequency, phase continuous)	
Operating modes	Triggered or continuous sweeps
Frequency range	1 Hz to 1 MHz
Sweep rate	0.5 Hz to 100 kHz sweeps/s, equivalent to sweep times 10 μs to 2 s
Resolution	0.5 Hz (0.5 sweep/s)

- For $f_c < 2 \text{ MHz}$ AM is usable but not specified. AM specifications apply with ALC on, and envelope peaks < maximum specified power. For instruments without Option 1E1 attenuator, specs apply for carrier amplitude > -2 dBm.
- For AM depth settings > 90% or > 20 dB, deep AM mode or 1 kHz ALC BW is recommended.
- Internal2 is not available when using swept sine or dual sine modes.

Pulse modulation¹

	Standard ≥ 500 MHz to ≤ 3.2 GHz	Option 1E6 ≥ 10 MHz to ≤ 3.2 GHz	> 3.2 GHz
On/off ratio	80 dB (typical)	80 dB	80 dB
Rise/fall times (Tr, Tf)	100 ns (typical)	10 ns (8 ns typical)	10 ns (6 ns typical)
Pulse width			
Internally leveled	≥ 2 μs (typical)	≥ 1 μs	≥ 1 μs
Level hold (ALC Off with power search) ²	≥ 0.5 μs (typical)	≥ 20 ns (typical)	≥ 20 ns (typical)
Repetition frequency			
Internally leveled	10 Hz to 250 kHz (typical)	10 Hz to 500 kHz (typical)	10 Hz to 500 kHz (typical)
Level hold (ALC Off with power search) ²	dc to 1 MHz (typical)	dc to 10 MHz (typical)	dc to 10 MHz (typical)
Level accuracy (relative to CW)			
Internally leveled	±0.5 dB	±0.5 dB	±0.5 dB
Level hold (ALC Off with power search) ²	±0.5 dB (typical)	±1.0 dB (typical)	±0.15 (typical) ≤ 20 GHz ±0.8 dB (typical) ≤ 40 GHz ±1.2 dB (typical)
Width compression	±50 ns (typical)	±5 ns (typical)	±5 ns (typical)
Video feed-through³	< 200 mV (typical)	< 125 mV (typical)	< 2 mV (typical)
Video delay			
(Ext input to Video)	40 ns (nominal)	40 ns (nominal)	40 ns (nominal)
RF delay (Tm)			
(Video to RF output)	280 ns (nominal)	45 ns (nominal)	35 ns (nominal)
Pulse overshoot (Vor)	< 10% (typical)	< 1GHz 20% (typical) ≥ 1GHz 10% (typical)	< 10% (typical)
Input level	+1 V _{peak} = RF On	+1 V _{peak} = RF On	+1 V _{peak} = RF On
Input impedance	50 Ω (nominal)	50 Ω (nominal)	50 Ω (nominal)

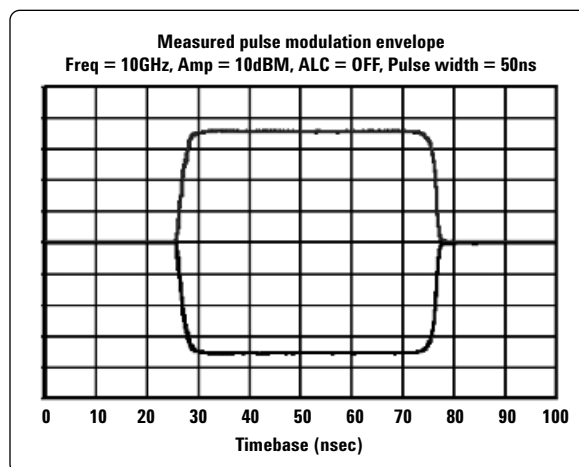

1. With ALC off, specs apply after the execution of power search. For instruments without a step attenuator, specs apply between 0 and +10 dBm. For instruments with the step attenuator, specs apply with Atten Hold Off, or ALC level between 0 and +10 dBm.
2. Power search is a calibration routine that improves level accuracy in ALC-off mode. Un-pulsed RF power will be present typically up to 50 ms when executing power search.
3. With attenuator in 0 dB position. Video feed-through decreases with attenuator setting.

Internal pulse generator

Modes	Free-run, triggered, triggered with delay, doublet, and gated. Triggered with delay, doublet, and gated require external trigger source.
Period (PRI) (T_p)	70 ns to 42 s (Repetition frequency: 0.024 Hz to 14.28 MHz)
Pulse width (T_w)	10 ns to 42 s
Delay (T_d)	
Free-run mode	0 to ± 42 s
Triggered with delay and doublet modes	75 ns to 42s with ± 10 ns jitter
Resolution	10 ns (width, delay, and PRI)

Td Video delay (variable)

T_w Video pulse width (variable)

T_p Pulse period (variable)

T_m RF delay


T_{rf} RF pulse width

T_f RF pulse fall time

T_r RF pulse rise time

V_{or} Pulse overshoot

V_f Video feedthrough

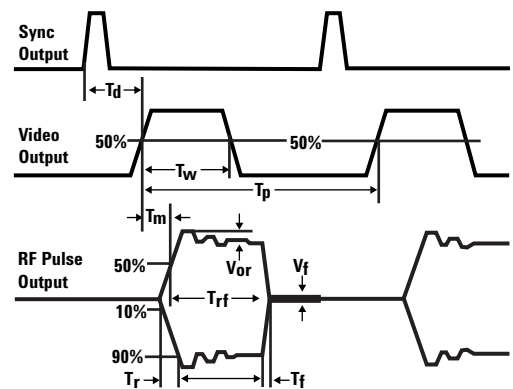

Remote programming

Interfaces	<p> GPIB (IEEE-488.2,1987) with listen and talk, RS-232, and 10BaseT LAN interface. </p>
Control languages	<p> SCPI version 1997.0. Also will emulate most applicable Agilent 836xxB, Agilent 837xxB, and Agilent 8340/41B commands, providing general compatibility with ATE systems which include these signal generators. </p>
IEEE-488 functions	<p> SH1, AH1, T6, TE0, L4, LE0, SR1, RL1, PP0, DC1, DT0, CO, E2. </p>
ISO compliant	<p> This family of signal generators is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies commitment to quality. </p>

General

Power requirements	<p> 90 to 132 Vac 50 to 60 Hz, or 195 to 267 Vac 50 to 60 or 400 Hz, (automatically selected), 300 W maximum. </p>
Operating temperature range	<p> 0 to 55 °C </p>
Storage temperature range¹	<p> –40 to 71 °C </p>
Shock and vibration	<p> Meets MIL-STD-28800E Type III, Class 3. </p>
EMC	<p> Conducted and radiated interference and immunity meets IEC/EN 61326-1 and MIL-STD-461C Part 2, RE02. Meets radiated emission requirements of CISPR Pub 11/1997 Group 1 class A. </p>
Storage registers	<p> Memory is shared by instrument states, user data files, sweep list files, and waveform sequences. Depending on the number and size of these files, up to 800 storage registers and 10 register sequences are available. </p>
Security	<p> Display blanking. </p>
Compatibility	<p> Agilent Technologies 83550 Series millimeter heads, Agilent Technologies 8757D Scalar Network Analyzers, Agilent Technologies EPM Series Power Meters. </p>
Self-test	<p> Internal diagnostic routine tests most modules (including microcircuits) in a preset condition. For each module, if its node voltages are within acceptable limits, then the module “passes” the test. </p>
Weight	<p> < 22 kg (48 lb.) net, < 30 kg (68 lb.) shipping. </p>
Dimensions	<p> 178 mm H x 426 mm W x 498 mm D (7” H x 16.8” W x 19.6” D in.). </p>
Recommended calibration cycle	<p> 24 months </p>

1. Storage below –20°C Instrument states may be lost.

Front panel connectors

(All connectors are BNC female unless otherwise noted.)¹

RF output For 20 GHz models For 40 GHz models	Nominal output impedance 50 Ω . Precision APC-3.5 male, or Type-N with Option 1ED. Precision 2.4 mm male; plus 2.4 - 2.4 mm and 2.4 - 2.9 mm female adaptors also included.
ALC input	Used for negative external detector leveling. Nominal input impedance 120 k Ω , damage level ± 15 V.
LF output (E8257C only)	Outputs the internally generated LF source. Nominal output impedance 50 Ω .
External input 1 (E8257C only)	Drives either AM, FM, or Φ M. Nominal input impedance 50 or 600 Ω , damage levels are 5 V_{rms} and 10 V_{peak} .
External input 2 (E8257C only)	Drives either AM, FM, or Φ M. Nominal input impedance 50 or 600 Ω , damage levels are 5 V_{rms} and 10 V_{peak} .
Pulse/trigger gate input (E8257C only)	Accepts input signal for external fast pulse modulation. Also accepts external trigger pulse input for internal pulse modulation. Nominal impedance 50 Ω . Damage levels are 5 V_{rms} and 10 V_{peak} .
Pulse video out (E8257C only)	Outputs a signal that follows the RF output in all pulse modes. TTL-level compatible, nominal source impedance 50 Ω .
Pulse sync out (E8257C only)	Outputs a synchronizing pulse, nominally 50 ns width, during internal and triggered pulse modulation. TTL-level compatible, nominal source impedance 50 Ω .

Rear panel connectors

(All connectors are BNC female unless otherwise noted.)¹

Auxiliary interface (Dual mode)	Used for RS-232 serial communication and for Master/Slave source synchronization. (9-pin subminiature female connector).
GPIB	Allows communication with compatible devices.
LAN	Allows 10BaseT LAN communication
10 MHz input	Accepts an external reference (timebase) input (at 1, 2, 2.5, 5, 10 MHz for standard and 10 MHz only for Option UNR) Nominal input impedance 50 Ω . Damage levels > +10 dBm
10 MHz output	Outputs internal or external reference signal. Nominal output impedance 50 Ω . Nominal output power +8 dBm
Sweep output (Dual mode)	Supplies a voltage proportional to the RF power or frequency sweep ranging from 0 volts at the start of sweep to +10 volts (nominal) at the end of sweep, regardless of sweep width.

When connected to an Agilent 8757D Scalar Network Analyzer (Option 007), generates a selectable number of equally spaced 1 μ s pulses (nominal) across a ramp (analog) sweep. Number of pulses can be set from 101 to 1601 by remote control from the 8757D.

Output impedance: < 1 Ω , can drive 2000 Ω .

1. Digital inputs and output are 3.3 V CMOS unless indicated otherwise. Inputs will accept 5 V CMOS, 3V CMOS, or TTL voltage levels.
2. Digital inputs and output are 3.3 V CMOS unless indicated otherwise. Inputs will accept 5 V CMOS, 3V CMOS, or TTL voltage levels.

Stop sweep In/Out	Open-collector, TTL-compatible input/output. In ramp sweep operation, provides low level (nominally 0 V) during sweep retrace and bandcross intervals, and high level during the forward portion of the sweep. Sweep will stop when grounded externally, sweep will resume when allowed to go high.
Trigger output (Dual mode)	Outputs a TTL signal. High at start of dwell, or when waiting for point trigger; low when dwell is over or point trigger is received. In ramp sweep mode, provides 1601 equally-spaced 1 us pulses (nominal) across a ramp sweep. When using LF Out, provides 2 us pulse at start of LF sweep.
Trigger input	Accepts TTL signal for triggering point-to-point in manual sweep mode, or to trigger start of LF sweep. Damage levels $\geq +10$ V or ≤ -4 V.
Source module interface	Provides bias, flatness correction, and leveling connections to the Agilent model 83550 Series mm-wave source modules.
Source settled	Provides an output trigger that indicates when the signal generator has settled to a new frequency or power level. High indicates source not settled, Low indicates source settled.
Z-axis Blank/Markers	During Ramp Sweep, supplies + 5 V (nominal) level during retrace and bandswitch intervals. Supplies – 5V (nominal) level when the RF frequency is at a marker frequency.
EFC	> 0.25 ppm for –5 to +5 V. Input impedance: >1 M Ω

Related Agilent literature

PSG Signal Generator, Brochure
Literature number 5988-7538EN

Agilent E8247/57C PSG CW and Analog Signal Generators Data Sheet
Literature number 5988-7454EN

Agilent E8267C PSG Vector Signal Generator Data Sheet
Literature number 5988-6632EN

PSG Self Guided Demo
Literature number 5988-2414EN

PSG Configuration Guide
Literature number 5988-7541EN

PSG Series Product Note: Millimeter Head
Literature number 5988-2567EN

PSG Two-tone and Multitone Application Note AN 1410
Literature number 5988-7689EN

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

By internet, phone, or fax, get assistance with all your test & measurement needs

Phone or Fax

United States:
(tel) 800 452 4844

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:

(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:

(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific

Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252

Email:
tm_asia@agilent.com

Online Assistance:

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002, 2003
Printed in USA, January 23, 2003
5988-7454EN



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Technologies