


# Agilent E4406A Vector Signal Analyzer Performance Guide Using 89601A Vector Signal Analysis Software

Product Note

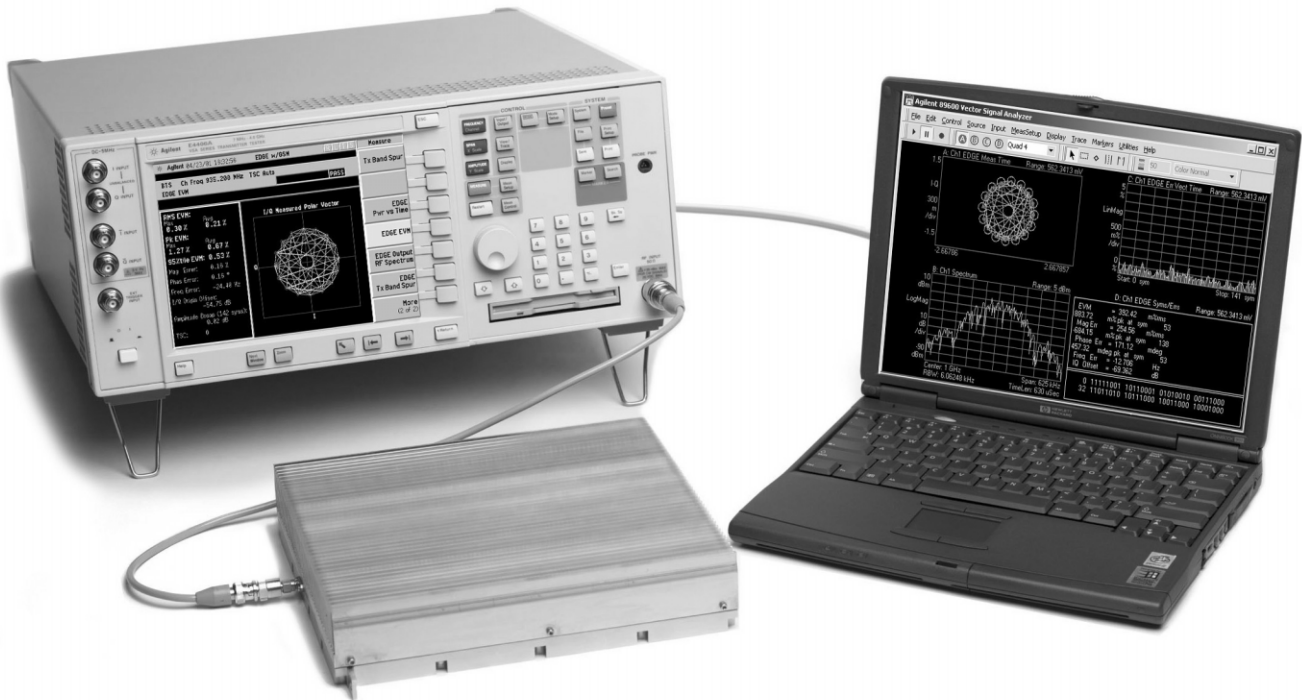

Agilent Technologies

## Introduction

This guide characterizes the performance of the E4406A vector signal analyzer (VSA) and the 89601A vector signal analysis software combination. Together, these tools provide you both the flexible digital demodulation and analysis capabilities of the 89601A software and the standards-based one-button test capabilities of the E4406A. This teaming provides fast accurate testing for compliance to wireless specifications and tools to analyze the design if it fails to meet the specification. It's easily configured one-button measurements feature simple, straight-forward menu structures to activate and control built-in standards-based tests. A variety of 2G and 3G communications standards including W-CDMA, cdma2000, cdmaOne, EDGE, and GSM are supported.

## Product overview

### E4406A VSA

The E4406A VSA is a full-featured transmitter tester designed to meet the test needs of wireless equipment developers and manufacturers. It's easily configured one-button measurements feature simple, straight-forward menu structures to activate and control built-in standards-based tests. A variety of 2G and 3G communications standards including W-CDMA, cdma2000, cdmaOne, EDGE, and GSM are supported.

### 89601A software

The 89601A vector signal analysis software is the heart of the 89600 series PC-based VSAs. This software provides flexible tools for demodulating and analyzing even the most advanced digital formats, whether or not they are defined by an established standard. The features include variable block size signal acquisition with user-selectable pulse search and synch words, and a user-controllable adaptive equalizer.

User-selectable filter types include cosine (raised and square-root raised), Gaussian, and low-pass, all with user-selectable alpha/BT. Supported modulation formats for both continuous and burst carriers include FSK (2, 4, 8 and 16 level), BPSK, QPSK, OQPSK, DQPSK, D8PSK,  $\pi/4$ DQPSK, 8PSK, QAM (16 to 256 level), and VSB (8 and 16 level), EDGE and MSK.

In addition, the 89601A software provides signal capture and analysis features, capability to download signal capture files for playback through a signal generator, high-speed spectrogram displays, and cross-channel measurement results.

### E4406A/89601A combination

In the E4406A/89601A combination, the E4406A standards-based tests determine if a device under test (DUT) meets the requirements of the specification. If it doesn't, the 89601A software provides the modulation quality and error analysis tools to determine why the DUT failed.

The combination can measure active signals or signals captured in the E4406A memory. The E4406A alone or the E4406A/89601A combination can examine the signal. Switching between the two modes is facilitated by a quick disconnect/restart menu selection in the 89601A user interface.

The 89601A software runs on a PC connected to the E4406A, via LAN or GPIB, and provides hardware control, modulation analysis, and complete results displays. The controls and display of the E4406A are disabled while operating with the 89601A software.

## Configuration overview

The E4406A/89601A combination requires an E4406A VSA with firmware version A.05.01 or later and option B7C I/Q inputs for baseband measurements, the 89601A software with the vector signal analysis option 100 (vector modulation analysis, option AYA, recommended) and a PC with a LAN or GPIB interface card. Detailed configuration requirements for each item in the combination are provided in appendix A.

## Feature availability

When the E4460A VSA is controlled by 89601A series VSA software, users have control of the following features of the spectrum analyzer using the software:

**Frequency:** The center frequency will be displayed on the 89601A software GUI.

**Span:**  $\leq 8$  MHz

**Input attenuator and ADC gain:** available indirectly through the input range feature of the 89601A software

**Triggering:** IF magnitude, external front/rear, hold-off, level, delay and slope

**External reference:** Selectable frequency

**Calibration**

**Overload detection**

**Baseband operation**

In addition, you can gain immediate, direct access to all of the PSA series spectrum analyzer's features by using the **Disconnect** capability on the VSA software's control menu.

When the 89601A software is used with a E4406A VSA, almost all of the features of the software and its options are available.

This includes:

- Recording of time waveforms, allowing you to re-analyze signals and store them for future comparisons
- Complete set of of vector signal analysis and modulation analysis measurements and results
- Flexible marker capabilities, including time gating, integrated band power, and offset (delta) markers
- Flexible displays, including multiple trace displays, spectrogram, constellation, eye diagram, and error screens with powerful scaling
- Link to the Agilent ESG-series signal source for integrated control of source signals
- Complete save and recall of your signals, trace data, and measurement screens
- Easy cut and paste to other PC applications

The 89600 VSA software's swept spectrum application is not supported.

# Performance<sup>1</sup>

The following is a summary of the features and capabilities provided by the E4406A/89601A combination. These are nominal values; they are not warranted.

<b>Frequency range</b>	RF Baseband	7 MHz to 314 MHz, 329 MHz to 4 GHz DC to 5 MHz
<b>Center-frequency tuning resolution</b>	RF Baseband	1 Hz 1 mHz
<b>Frequency span range</b>	RF Baseband	<10 Hz to 8 MHz <10 Hz to 5 MHz (2 channels active) <15 Hz to 5 MHz (1 channels active)
<b>Frequency points per span</b>		
Calibrated points	51 to 102,401	
Displayable points	51 to 131,072	

**Resolution bandwidth (RBW)**  
The range of available RBW choices is a function of the selected frequency span and the number of calculated frequency points. Users may step through the available range in 1-3-10 sequence, or directly enter an arbitrarily chosen bandwidth.

<b>Range</b>	RF Baseband	<1 Hz to 2.3 MHz <1 Hz to 2.876 MHz
--------------	----------------	--

**RBW shape factor**  
The window choices below allow you to optimize the RBW shape as needed for best amplitude accuracy, dynamic range, or response to transient signal characteristics.

Window	Selectivity (3:60 dB)	Passband flatness	Rejection
<b>Flat top</b>	0.41	0.01 dB	>95 dBc
<b>Gaussian top</b>	0.25	0.68 dB	>125 dBc
<b>Hanning</b>	0.11	1.5 dB	>31 dBc
<b>Uniform</b>	0.0014	4.0 dB	>13 dBc

<b>Input range<sup>2</sup></b> (full scale, combines attenuator setting and ADC gain)	RF Baseband	-18 dBm to +22 dBm in 1 dB steps -5 dBm to +13 dBm in 6 dB steps
--	----------------	---

<b>Dynamic range</b>		
<b>RF</b>		
Third-order intermodulation distortion:	< -70 dBc or < -90 dBfs, whichever is greater	
Noise density:	< -124 dBfs at 1 GHz	
<b>Baseband</b>		
Third-order intermodulation distortion:	< -60 dBc	
Noise density:	-143 dBfs/Hz (+13 dBm range) -142 dBfs/Hz (+7 dBm range) -139 dBfs/Hz (+1 dBm range) -135 dBfs/Hz (-5 dBm range)	

<b>IF Flatness</b>	RF	± 0.2dB
--------------------	----	---------

1. All RF related values are using the E4406A with digital IF part number E4440-60025. Refer to the E4406A datasheet for more information

2. For RF input E4406A ADC gain is set to +18 dB and attenuator is set to [18 + 89601A range (in dBm)] dB.

## Time and waveform (vector signal analyzer software)

---

### Baseband versus zoom measurements

These two signal processing modes affect the appearance and the duration of input waveforms as they are captured and displayed on the 89600 VSAs.

Most 89600 measurements are made with a non-zero start frequency, also called the *zoom* mode. In these cases, the time domain display shows a complex envelope representation of the input signal – that is, the magnitude and phase of the signal relative to the analyzer's center frequency. This provides powerful capability to examine the baseband components of a signal without the need to first demodulate it.

*Baseband* mode refers to the special case where the measurement span begins at 0 Hz. Here, the input signal is directly digitized, and the waveform display shows the entire signal (carrier plus modulation), very much as an oscilloscope would.

---

### Time record characteristics

In the 89601A software, measurements are based on time records. For example, blocks of waveform samples from which time, frequency and modulation domain data is derived. Time records have these characteristics:

---

<b>Time record length</b>	= (number of frequency points – 1)/span, with RBW mode set to arbitrary, auto-coupled.
<b>Time sample resolution</b>	= 1/(k x span), where k = 1.28 for time data = zoom or where k= 256 for time data = baseband

---

---

**Time capture characteristics**


In time capture mode, the 89601A software captures the incoming waveform in real time (i.e. gap-free) into high-speed time capture memory. This data may then be replayed through the software at full or reduced speed, saved to mass storage, or transferred to another software application.

When post-analyzing the captured waveform, users may adjust measurement span and center frequency in order to zoom in on specific signals of interest, as long as the new measurement span lies entirely within the originally captured span.

---

<b>Time capture memory size</b>	RF	900k samples, complex
During time capture, and for spans below 1.55 MHz (775 kHz for baseband operation) the analyzer is internally set to the next highest cardinal span available in the E4406A that equals or exceeds the currently displayed frequency span. For spans above 1.55 MHz the analyzer span is set to 8 MHz	Baseband	900k samples real, per channel with software zoom.

---

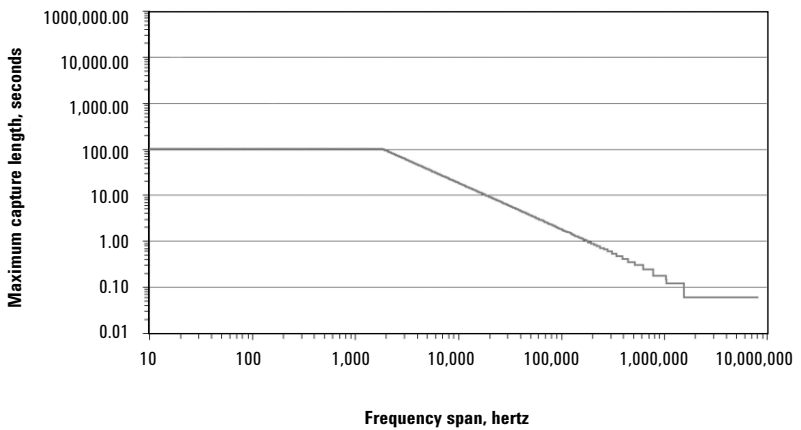**Time capture length versus span  
(For RF mode only)**

# Measurement, display and control

<b>Triggering</b>	
<b>Trigger types</b>	
Vector signal analyzer application (RF, Baseband, Composite)	Free run, IF magnitude*, external front/rear * Not available in baseband mode
Pre-trigger delay range	500 ms or time capture length, whichever is shorter
Post-trigger delay range	500 ms
<b>Averaging</b>	
<b>Number of averages, maximum</b>	>10 <sup>8</sup>
<b>Overlap averaging</b>	0% to 99.99%
<b>Average types</b>	
Vector signal analyzer application	rms (video), rms (video) exponential, peak hold, time, time exponential
<b>Analog demodulation</b>	
<b>Demodulation types</b>	AM, PM, FM, with auto carrier locking provided for PM or FM
<b>Demodulator bandwidth</b>	Same as selected measurement span
<b>AM demodulation (typical)</b>	
Accuracy	±1%
Dynamic range	60 dB (100%) for a pure AM signal
Cross demodulation	< 0.3% AM on an FM signal with 10 kHz modulation, 200 kHz deviation
<b>PM demodulation (typical)</b>	
Accuracy	±3 degrees
Dynamic range	60 dB (rad) for a pure PM signal
Cross demodulation	< 1 degree PM on an 80% AM signal
<b>FM demodulation (typical)</b>	
Accuracy	±1% of span
Dynamic range	60 dB (Hz) for a pure FM signal
Cross demodulation	< 0.5% of span FM on an 80% AM signal
<b>Time gating</b>	
Provides time-selective frequency-domain analysis on any input or analog demodulated time-domain data. When gating is enabled, markers appear on the time data; gate position and length can be set directly. Independent gate delays can be set for each input channel. See time specifications for main time length and time resolution details.	
<b>Gate length, maximum</b>	Main time length
<b>Gate length, minimum</b>	= window shape / (0.3 x freq. span) where window shape is equal to: Flat-top window      3.8 Gaussian-top window   2.2 Hanning window       1.5 Uniform window        1.0

---

**Marker functions**

Peak signal track, frequency counter, (RF band only)  
band power

---

**Band power markers**

Markers can be placed on any time, frequency, or demodulated trace for direct computation of band power, rms square root (of power), C/N or C/No, computed within the selected portion of the data.

---

**Trace math**

Trace math can be used to manipulate data on each measurement. Applications include user-defined measurement units, data correction and normalization.

---

**Operands**

Measurement data, data register, constants, j $\omega$

---

**Operations**

+, -, x, /, conjugate, magnitude, phase, real, imaginary, square, square root, FFT, inverse FFT, windowing, logarithm, exponential, peak value, reciprocal, phase unwrap, zero



Trace data	Display formats				
	Vector signal analysis demodulation OFF)	Cross channel <sup>1</sup>	Vector signal analysis (analog demodulation)	Vector modulation analysis (option AYA)	W-CDMA and cdma2000 modulation analysis (option B7N)
Autocorrelation	•		•		
Complementary cumulative distribution function	•		•		
Cumulative distribution function	•		•		
Channel frequency response				•	
Code domain error					•
Code domain power					•
Common pilot error					
Composite errors					•
Coherence		•			
Correction	•		•	•	
Counter zoom	•		•		
Cross correlation		•			
Cross spectrum		•			
Error vector spectrum				•	•
RMS error vector spectrum					
Error vector time				•	•
RMS error vector time					
Equalizer impulse response				•	
Frequency response		•			
Gate time	•		•		
Impulse response		•			
Instantaneous main time	•		•		
Instantaneous spectrum	•		•	•	•
IQ magnitude error				•	•
IQ measurement					
IQ measurement spectrum				•	•
IQ measurement time				•	•
IQ phase error				•	•
IQ reference					
IQ reference spectrum				•	•
IQ reference time				•	•
Main time	•		•		
Probability density function	•		•		
Power spectral density	•		•		
Search time				•	
Spectrum	•		•	•	•
Symbols/errors				•	•
Time				•	•

1. Requires E4406A with option B7C I/Q inputs.

<b>Trace formats</b>	Log mag (dB or linear), linear mag, real(I), imag(Q), wrap phase, unwrap phase, I-Q, constellation, Q-eye, I-eye, trellis-eye, group delay
<b>Trace layouts</b>	1–4 traces on one, two or four grids
<b>Number of colors</b>	User-definable palette
<b>Spectrogram display</b>	
Types	Color – normal and reversed Monochrome – normal and reversed User colormap – 1 total
Adjustable parameters	Number of colors Enhancement (color-amplitude weighting) Threshold
Trace select	When a measurement is paused any trace in the trace buffer can be selected by trace number. The marker values and marker functions apply to selected trace.
Z-axis value	The z-axis value is the time the trace data was acquired relative to the start of the measurement. The z-axis value of the selected trace is displayed as part of the marker readout.
Memory (characteristic)	Displays occupy memory at a rate of 128 traces/Mbyte (for traces of 401 frequency points).

## Software interface

The 89601A software appears to other Windows software as an ActiveX object. Implemented according to the industry-standard Component Object Model (COM), the software exposes a rich object model of properties, events and methods, as fully described in the 89601A documentation.

Software development environments that are capable of interacting with COM objects include Agilent VEE, Microsoft® Visual Basic, Microsoft Visual C++, MATLAB®, National Instruments LabView and others.

In addition, many end-user applications are able to interact directly with COM objects, using built-in macro languages such as Visual Basic for Applications (VBA). For example, in Microsoft Excel, a VBA macro could be used to set up the instrument, collect the measurement data, and automatically graph the results.

---

### Macro language

The 89601A's built-in Visual Basic Script interpreter allows many types of measurement and analysis tasks to be easily automated. Scripts may be developed using any text editor, or may be recorded automatically from a sequence of menu selections. Completed scripts may be named and integrated onto the analyzer's toolbar, allowing them to be launched with a single button press.

---

### Remote displays

To operate the 89601A/E4406A combination or view its displays from a remote location, the use of commercially-available remote PC software such as Microsoft NetMeeting or Symantec PCAnywhere is recommended. The 89601A software can also operate E4406A remotely via LAN networking.

---

### Remote programming

Beginning with Microsoft Windows NT® 4.0, COM objects on one PC are accessible from software running on another PC. This capability, known as Distributed COM (DCOM), makes the 89600 object model fully programmable from any other PC having network connectivity to the analyzer's host PC.

---

### File formats

For storage and recall of measured or captured waveforms, spectra and other measurement results:

ASCII	Tab-delimited (.txt), comma-delimited (.csv)
Binary	Agilent standard data format (.sdf, .cap, .dat)
Binary	Agilent E3238 time snapshot (.cap) and time recording (.cap) files under 2 gigasamples in size. No additional calibration
MATLAB 5	MAT-file (.mat)
MATLAB 4 and prior	MAT-file (.mat)

---

### Source

In source mode the 89601A software can control a signal generator via GPIB or LAN. Control is provided via the VSA GUI. Frequency and level control of CW signals is provided. Arbitrary signals may be downloaded from the time capture memory to the signal generator for replay. The same time record may be played over and over contiguously. A window function can be applied to smooth start-up and finish of replay.

Compatible sources	ESG-D or ESG-DP (firmware version B.03.50 or later), with the option UND internal dual arbitrary waveform generator (firmware version 1.2.92 or later)
Signal types	CW (fixed frequency sinewave) Arbitrary
Frequency range	Determined by signal generator
Level range	-136 dBm to 20 dBm in 0.02 dBm steps

For all other specifications see the technical data sheet for the signal generator used.

## Option AYA

### Vector modulation analysis

<b>Signal acquisition</b>	
Note: Signal acquisition does not require an external carrier or symbol clock	
<b>Data block length</b>	Adjustable to 4096 symbols.
<b>Samples per symbol</b>	1–20
<b>Symbol clock</b>	Internally generated
<b>Carrier lock</b>	Internally locked
<b>Triggering</b>	Single/continuous, external, pulse search (searches data block for beginning of TDMA burst, and performs analysis over selected burst length)
<b>Data synchronization</b>	User-selected synchronization words
<b>Supported modulation formats</b>	
<b>Carrier types</b>	Continuous and pulsed/burst (such as TDMA)
<b>Modulation formats</b>	2, 4, 8 and 16 level FSK (including GFSK) MSK (including GMSK) QAM implementations of: BPSK, QPSK, OQPSK, DQPSK, D8PSK, $\pi/4$ DQPSK, 8PSK, $\frac{3\pi}{8}$ 8PSK (EDGE) 16QAM, 32QAM, 64QAM, 128QAM, 256QAM (absolute encoding) 16QAM, 32QAM, 64QAM (differential encoding per DVB standard) 8VSB, 16VSB
<b>Single-button presets for</b>	<b>Cellular:</b> CDMA (Base), CDMA (mobile), CDPD, EDGE, GSM, NADC, PDC, PHP (PHS), W-CDMA <b>Wireless networking:</b> Bluetooth™, HIPERLAN/1 (HBR), HIPERLAN/1 (LBR), 802.11b <b>Digital Video:</b> DTV8, DTV16, DVB16, DVB32, DVB64 <b>Other:</b> APCO 25, DECT, TETRA, VDL mode 3
<b>Filtering</b>	
<b>Filter types</b>	Raised cosine, square-root raised cosine, IS-95 compatible, Gaussian, EDGE, low pass, rectangular, none
<b>Filter length</b>	40 symbols: VSB; QAM and DVB-QAM where $\alpha < 0.2$ 20 symbols: all others
<b>User-selectable alpha/BT</b>	Continuously adjustable from 0.05 to 10
<b>User-defined filters</b>	User-defined impulse response, fixed 20 points/symbol Maximum 20 symbols in length or 401 points

---

**Maximum symbol rate**

Symbol rate is limited only by the measurement span, that is, the entire signal must fit within the analyzer's currently selected frequency span.

Example: with raised-cosine filtering

$$\text{Max symbol rate}^* = \frac{\text{frequency span}}{1 + \alpha}$$

\* Maximum symbol rate doubled for VSB modulation format.

---

**Measurement results (formats other than FSK)**

<b>I-Q measured</b>	Time, spectrum (filtered, carrier locked, symbol locked)
<b>I-Q reference</b>	Time, spectrum (ideal, computed from detected symbols)
<b>I-Q error versus time</b>	Magnitude, phase (I-Q measured versus reference)
<b>Error vector</b>	Time, spectrum (vector difference between measured and reference)
<b>Symbol table and error summary</b>	Error vector magnitude is computed at symbol times only
<b>Instantaneous</b>	Time, spectrum, search time

---

**Measurement results (FSK)**

<b>FSK measured</b>	Time, spectrum
<b>FSK reference</b>	Time, spectrum
<b>Carrier error</b>	Magnitude
<b>FSK error</b>	Time, spectrum

---

**Display formats**

The following trace formats are available for measured data and computed ideal reference data, with complete marker and scaling capabilities and automatic grid line adjustment to ideal symbol or constellation states.

---

**Polar diagrams**

Constellation	Samples displayed only at symbol times
Vector	Display of trajectory between symbol times with 1–20 points/symbol

---

**I or Q versus time**

Eye diagrams	Adjustable from 0.1 to 40 symbols
Trellis diagrams	Adjustable from 0.1 to 40 symbols
Continuous error vector magnitude versus time	
Continuous I or Q versus time	

---

**Error summary (formats other than FSK)**

Measured rms and peak values of the following:

Error vector magnitude, magnitude error, phase error, frequency error (carrier offset frequency), I-Q offset, amplitude droop (PSK and MSK formats), SNR (8/16VSB and QAM formats), quadrature error, gain imbalance

For VSB formats, VSB pilot level is shown in dB relative to nominal. SNR is calculated from the real part of the error vector only.

For DVB formats, EVM is calculated without removing IQ offset.

---

**Error summary (FSK)**

Measured rms and peak values of the following:

FSK error, magnitude error, carrier offset frequency, deviation

---

**Detected bits (symbol table)**

Binary bits are displayed and grouped by symbols. Multiple pages can be scrolled for viewing large data blocks. Symbol marker (current symbol shown as inverse video) is coupled to measurement trace displays to identify states with corresponding bits. For formats other than DVBQAM and MSK, bits are user-definable for absolute states or differential transitions.

Note: Synchronization words are required to resolve carrier phase ambiguity in non-differential modulation formats.

---

**Accuracy**

Formats other than FSK, 8/16VSB and OQPSK. Averaging = 10 (typical)

Conditions: Specifications apply for a full scale signal, fully contained in the selected measurement span, random data sequence, range  $\geq -18$  dBm, start frequency  $\geq 15\%$  of span,  $\alpha/BT \geq 0.3^*$ , and symbol rate  $\geq 1$  kHz. For symbol rates less than 1kHz accuracy may be limited by phase noise.

\*  $0.3 \leq \alpha \leq 0.7$  offset QPSK

---

**Residual errors (result = 150 symbols, averages = 10)****Residual EVM**

span $\leq 100$ kHz	<0.5% rms
span $\leq 1$ MHz	<0.5% rms
span $\leq 8$ MHz <sup>1</sup>	<1.0% rms

**Magnitude error**

span $\leq 100$ kHz	0.5% rms (RF), 0.3% rms (Baseband)
span $\leq 1$ MHz	0.5% rms
span $\leq 8$ MHz <sup>1</sup>	1.0% rms

**Phase error** (For modulation formats with equal symbol amplitudes)

span $\leq 100$ kHz	0.3° rms
span $\leq 1$ MHz	0.4° rms
span $\leq 8$ MHz <sup>1</sup>	0.6° rms

**Frequency error**

(added to frequency accuracy if applicable)	symbol rate/500,000
---	---------------------

**I-Q/origin offset**

	-60 dB or better
--	------------------

---

1. For RF only,  $\leq 5$ MHz for Baseband.

---

**Video modulation formats**

Applies for RF and Composite (I+jQ) modes only.

---

**Residual errors (typical)**

8/16 VSB: Symbol rate = 10.762 MHz,  $\alpha = 0.115$ ,  
7 MHz span, full-scale signal, range  $\geq -18$  dBm,  
result length = 800, averages = 10

**Residual EVM**  $\leq 1.5\%$  (SNR  $\geq 36$  dB)

16, 32, 64 or 256 QAM: Symbol rate = 6.9 MHz,  
 $\alpha = 0.15$ , 8 MHz span, full-scale signal, range  
 $\geq -18$  dBm, result length = 800, averages = 10

**Residual EVM**  $\leq 1.0\%$  (SNR  $\geq 40$  dB)

---

**Adaptive equalizer**

Removes the effects of linear distortion (e.g. non-flat frequency response, multipath, etc.) from modulation quality measurements. Equalizer performance is a function of the setup parameters (equalization filter length, convergence, taps/symbol) and the quality of the signal being equalized.

---

**Equalizer type**

Decision-directed, LMS, feed-forward  
equalization with adjustable convergence rate

Filter length 3–99 symbols, adjustable

Filter taps 1, 2, 4, 5, 10, or 20 taps/symbol

---

**Measurement results provided**

Equalizer impulse response

Channel frequency response

---

**Supported modulation formats**

MSK, BPSK, QPSK, OQPSK, DQPSK,  $\pi/4$ DQPSK,  
8PSK, 16QAM, 32QAM, 64QAM, 256QAM,  
8VSB, 16VSB,  $\frac{3\pi}{8}$  8PSK (EDGE), D8PSK

**Option B7N**  
**W-CDMA and cdma2000**  
**modulation analysis**  
 (requires vector modulation  
 analysis, option AYA)

<b>W-CDMA modulation analysis</b>	
<b>Signal acquisition</b> (characteristic)	
Result length	Adjustable between 1 and 64 slots
Samples per symbol	1
Triggering	Single/continuous, external
Measurement region	Length and offset adjustable within result length
<b>Signal playback</b> (characteristic)	
Baseband or RF modes only	
Result length	Adjustable between 1 and 64 slots <sup>1</sup>
Capture length (gap-free analysis at 0% overlap; at 5 MHz span)	88 slots <sup>1</sup>
<b>Supported formats</b> (characteristic)	
Formats	Downlink, uplink
Single-button presets	Downlink, uplink
<b>Other adjustable parameters</b> (characteristic)	
Chip rate	Continuously adjustable
User-selectable alpha	Continuously adjustable between 0.05 and 1
Scramble code (downlink)	Continuously adjustable between 0 and 511
Scramble code (uplink)	Continuously adjustable between 0 and $2^{24} - 1$
Scramble offset (downlink)	Continuously adjustable between 0 and 15
Scramble type (downlink)	Standard, left, right
Sync type (downlink)	CPICH, SCH
<b>Measurement results</b> (characteristic)	
<b>Composite</b> (all code channels at once or all symbol rates taken together)	
Code domain power	All symbol rates together Individual symbol rates (7.5, 15, 30, 60, 120, 240, 480, 960 ksps)
Code domain error	Composite (all symbol rates taken together) Individual symbol rates (7.5, 15, 30, 60, 120, 240, 480, 960 ksps)
IQ measured	Time, spectrum
IQ reference	Time, spectrum
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time, spectrum (vector difference between measured and reference)
Composite errors	Summary of EVM, magnitude error, phase error, rho, peak active CDE, peak CDE, Ttrigger, frequency error, IQ offset, slot number
<b>Channel</b> (individual code channel)	
IQ measured	Time
IQ reference	Time
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time (vector difference between measured and reference)
Symbol table and error summary	Summary of EVM, magnitude error, phase error, slot number, pilot bits, tDPCH
<b>Other</b>	
Pre-demodulation	Time, spectrum

1. 43 Slots maximum for channel 1, baseband mode.



<b>Display formats</b> (characteristic)		
CDP measurement results	I and Q shown separately on same trace for uplink	
Channel measurement results	I and Q show separately	
Code order	Hadamard, bit reverse	
Other	Same as option AYA	
<b>Accuracy</b> (typical) (Input range within 5 dB of total signal power)		
<b>Code domain</b>		
CDP accuracy	±0.3 dB (spread channel power within 20 dB of total power)	
Symbol power versus time	±0.3 dB (spread channel power within 20 dB of total power averaged over a slot)	
<b>Composite EVM</b>		
EVM floor	1.5% or less for pilot only	
EVM floor	1.5% or less for test model 1 with 16 DPCH signal	
<b>Frequency error</b>		
Range (CPICH sync type)	±500 Hz	
Accuracy	±10 Hz	
<b>cdma2000 modulation analysis</b>		
<b>Signal acquisition</b> (characteristic)		
Result length (adjustable)	Baseband, 1 channel	1–22 PCG
	Baseband, 2 channel	1–46 PCG
	Forward link, RF	1–64 PCG
	Reverse link, RF	1–48 PCG
Samples per symbol	1	
Triggering	Single/continuous, external	
Measurement region	Length and offset adjustable within result length	
<b>Signal playback</b> (characteristic)		
Result length	Baseband, 1 channel	1–22 PCG
	Baseband, 2 channel	1–46 PCG
	Forward link, RF	1–64 PCG
	Reverse link, RF	1–48 PCG
Capture length (gap-free analysis at 0% overlap; at 1.5 MHz span)	Baseband, 1 channel	22 PCG
	Baseband, 2 channel	46 PCG
	RF	94 PCG
<b>Supported formats</b> (characteristic)		
Formats	Forward, reverse	
Single-button presets for	Forward, reverse	
<b>Other adjustable parameters</b> (characteristic)		
Chip rate	Continuously adjustable	
Long code mask (reverse)	0	
Base code length	64, 128	

---

**Measurement results** (characteristic)**Composite** (all code channels at once or all symbol rates taken together)

Code domain power	All symbol rates together Individual symbol rates (9.6, 19.2, 38.4, 76.8, 153.6, 307.2 ksps)
Code domain error	Composite (all symbol rates taken together) Individual symbol rates (9.6, 19.2, 38.4, 76.8, 153.6, 307.2 ksps)
IQ measured	Time, spectrum
IQ reference	Time, spectrum
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time, spectrum (vector difference between measured and reference)
Composite errors	Summary of EVM, magnitude error, phase error, rho, peak active CDE, peak CDE, Ttrigger, frequency error, IQ offset, slot number

**Channel** (individual code channel)

IQ measured	Time
IQ reference	Time
IQ error versus time	Magnitude and phase (IQ measured versus reference)
Error vector	Time (vector difference between measured and reference)
Symbol table and error summary	Summary of EVM, magnitude error, phase error, slot number, pilot bits, tDPCH

**Other**

Pre-demodulation	Time, spectrum
------------------	----------------

---

**Display formats** (characteristic)

CDP measurement results	I and Q shown separately on same trace for uplink
Channel measurement results	I and Q show separately
Code order	Hadamard, bit reverse
Other	Same as option AYA

---

**Accuracy** (typical)

(Input range within 5 dB of total signal power)

**Code domain**

CDP accuracy	±0.3 dB (spread channel power within 20 dB of total power)
Symbol power versus time	±0.3 dB (spread channel power within 20 dB of total power averaged over a slot)

**Composite EVM**

EVM floor	1.5% or less for pilot only
EVM floor	1.5% or less for test model 1 with 16 DPCH signal

**Frequency error**

Range (CPICH sync type)	±500 Hz
Accuracy	±10 Hz

**Option 105**  
**Dynamic links to EESof ADS**

This option links the 89600 VSA with design simulations running on the Agilent EESof Advanced Design System, providing real-time, interactive analysis of results. It adds vector signal analyzer sink and source components to the Agilent Ptolemy simulation environment. When a simulation is run, the 89600 software is automatically launched. The VSA sink component analyzes waveform data from a simulation. Its user interface and measurement functions are the same in this mode as for hardware-based measurements. The VSA source component outputs measurement data to a simulation. Its input data can be from a recording or hardware. Front-end hardware need not be present when using either component, unless live measurements are to be sourced into a simulation.

**Source Component**

<b>ADS version required</b>	ADS 2001 or later
<b>ADS output data types supported</b>	Data: Timed Frequency Demod Errors Complex Scalar Float Scalar Integer Scalar Control: Data Gap Indicator
<b>VSA input modes</b>	Hardware Recording
<b>VSA analysis range</b>	Dependent on input mode and hardware installed
<b>VSA component parameters</b> (user settable)	VSATitle ControlSimulation OutputType Pause VSATrace TStep SetUpFile RecordingFile SetUpUse AutoCapture DefaultHardware AllPoints
<b>VSA component parameters</b> (passed to ADS, timed output only)	Carrier frequency TStep

**Sink Component**

<b>ADS version required</b>	ADS 1.3 or later
<b>ADS input data types supported</b>	Float Complex Timed – baseband Timed – ComplexEnv
<b>VSA input modes</b>	Single channel Dual channel I + jQ
<b>VSA analysis range</b>	
Carrier frequency	dc to >1 THz
TStep (sample time)	<10 <sup>-12</sup> to >10 <sup>3</sup> seconds

<b>VSA component parameters</b> (user-settable):	VSATitle TStep SamplesPerSymbol RestoreHW SetupFile Start Stop TcITkMode RecordMode SetFreqProp
<b>VSA component parameters</b> (passed from ADS)	Carrier frequency TStep Data type
<b>Number of VSAs that can run concurrently</b>	
ADS version 1.5 and later	20
ADS version 1.3	1
<b>Required ADS components</b>	
EESof Design Environment	E8900A/AN
EESof Data Display	E8901A/AN
EESof Ptolemy Simulator	E8823A/AN
<i>Recommended ADS configurations:</i>	
EESof Communication System Designer Pro	E8851A/AN
EESof Communication System Designer Premiere	E8852A/AN

# Appendix A: Configuration requirements

The E4406A/89601A combination requires an E4406A VSA, the 89601A vector signal analysis software with required options, a PC to run the software, and interface cables. The following are the detailed configuration requirements for each item.

### E4406A VSA transmitter tester

The E4406A comes equipped with the I/O required to connect it into the combination. Firmware version A.05.01, or later, is required. Option B7C, I/Q inputs, is required for baseband measurements.

Option B7R 802.11a OFDM modulation analysis is not recommended due to bandwidth constraints. Software version 3.0, or later is required for baseband I/Q measurements.

### 89601A vector signal analysis software

The 89601A software requires vector signal analysis, option 100, and vector signal analysis, option AYA. Option B7N is required to analyze W-CDMA and cdma2000 signals.

### PC for 89601A software

A laptop or desktop PC may be used as long as it meets or exceeds the following minimum requirements<sup>1</sup>:

- >300 MHz Pentium® or AMD-K6,
- 192 MB RAM  
(256 MB recommended)
- 4 MB video RAM  
(8 MB recommended)
- Hard disk with 100 MB of available space
- Microsoft Windows 2000 (laptop only) or Windows NT 4.0 (service pack 5, or greater required)
- CD-ROM drive (can be provided via network access), 3.5-inch floppy disk drive (can be provided via network access)
- GPIB or LAN interface  
(see table 2)


### PC to E4406A interface

The E4406A supports both LAN and GPIB I/O. Table 2 shows the interface cards and connection cables that are recommended for the PC. Figures 1 and 2 show how to make the physical connections.

**Table 2. PC interfaces and connection cables**


Description	Part number	Notes
PCMCIA GPIB card	778034-02	For laptop PCs, comes with 2-m GPIB cable. Available from National Instruments.
PCI GPIB interface card	82350	For desktop PCs, requires GPIB cable (10833A). Available from Agilent
1-meter GPIB cable	10833A	Available from Agilent
LAN cross-over cable	8121-0545	Available from Agilent

**Figure 1. GPIB connection**



**Figure 2. Point-to-point LAN connection.**

The PC and the E4406A may also be connected to a multipoint LAN network.



1. For best immunity from electrostatic discharge (ESD), use a desktop PC.





## Related literature

*89600 Series Wide-Bandwidth Vector Signal Analyzer*, brochure  
literature number 5980-0723E

*89610A, dc-40 MHz, Vector Signal Analyzer*, data sheet  
literature number 5980-1259E

*89640A, dc-2700 MHz, Vector Signal Analyzer*, data sheet  
literature number 5980-1258E

*E4406A Vector Signal Analyzer*, brochure  
literature number 5968-7618E

*E4406A Vector Signal Analyzer*,  
data sheet  
literature number 5968-3030E



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.

Pentium is a U.S. registered trademark of Intel Corporation.

Microsoft, Windows, and Windows NT are U.S. registered trademarks of Microsoft Corporation.

MATLAB is a U.S. registered trademark of The Math Works, Incorporated.

Bluetooth is a trademark owned by the Bluetooth SIG, Inc.

### Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

#### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

#### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

**By internet, phone, or fax, get assistance with all your test & measurement needs**

Online assistance:

[www.agilent.com/find/assist](http://www.agilent.com/find/assist)

Phone or Fax:

**United States:**

(tel) 1 800 452 4844

**Korea:**

(tel) (82 2) 2004 5004

(fax) (82 2) 2004 5115

**Canada:**

(tel) 1 877 894 4414

(fax) (905) 282 6495

**Latin America:**

(tel) (305) 269 7500

(fax) (305) 269 7599

**China:**

(tel) 800 810 0189

(fax) 1 0800 650 0121

**Taiwan:**

(tel) 080 004 7866

(fax) (886 2) 2545 6723

**Europe:**

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

**Other Asia Pacific**

**Countries:**

(tel) (65) 375 8100

(fax) (65) 836 0252

**Japan:**

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Email:

[tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

This information is subject to change without notice.  
Copyright © 2002 Agilent Technologies Inc.  
Printed in USA June 12, 2002  
5988-2906EN



Agilent Technologies