

Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK



Typical Applications


The HMC933LP4E is ideal for:

- EW Receivers
- Military Radar
- Test Equipment
- Satellite Communications
- Beam Forming Modules

Features

- Wide Bandwidth: 18 - 24 GHz
- 470° Phase Shift
- Low Insertion Loss: 4.5 dB
- Low Phase Error: ±10 deg Typ.
- Single Positive Voltage Control
- 24 Lead 4x4 mm QFN Package: 16 mm²

Functional Diagram

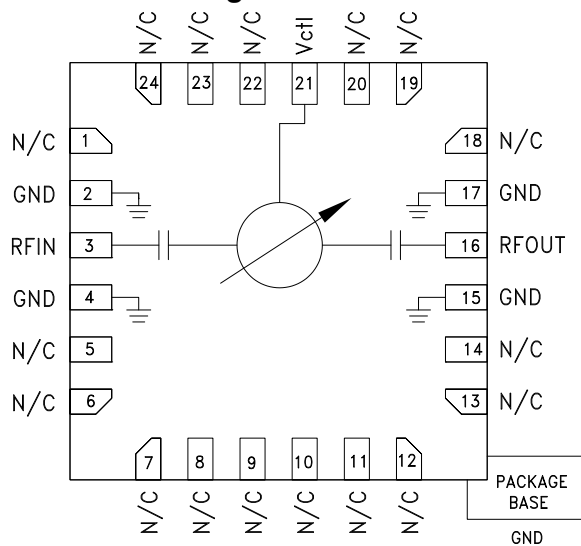

General Description

The HMC933LP4E is an Analog Phase Shifter which is controlled via an analog control voltage from 0 to +13V. The HMC933LP4E provides a continuously variable phase shift of 0 to 470 degrees from 18 to 24 GHz, with extremely consistent low insertion loss versus phase shift and frequency. The high accuracy HMC933LP4E is monotonic with respect to control voltage and features a typical low phase error of ±10 degrees over a wide bandwidth. The HMC933LP4E is housed in an RoHS compliant 4x4 mm QFN leadless package.

Electrical Specifications, $T_A = +25^\circ\text{C}$, 50 Ohm System


| Parameter | Min. | Typ. | Max. | Units |
|---|------|----------|------|--------|
| Frequency Range | 18 | | 24 | GHz |
| Phase Shift Range | | 470 | | deg |
| Insertion Loss | | 4.5 | | dB |
| Return Loss (input and output) | | 14 | | dB |
| Control Voltage Range | 0 | | 13 | V |
| Control Current Range | | | ± 1 | mA |
| Input IP3 | | 33 | | dBm |
| Input Power @ - 5° Shift In Insertion Phase (Vctl = 0V) | | 11 | | dBm |
| Input Power @ - 2° Shift In Insertion Phase (Vctl = 0.5V) | | 12 | | dBm |
| Phase Voltage Sensitivity | | 34 | | deg/V |
| Phase Error (peak) * | | +9 / -17 | | deg |
| Phase Error (average) * | | +3 / -11 | | deg |
| Modulation Bandwidth | | 90 | | MHz |
| Insertion Phase Temperature Sensitivity | | 0.10 | | deg/°C |

* Up to a phase shift range of 380 degrees.




470° ANALOG PHASE SHIFTER, 18 - 24 GHz


Insertion Loss vs. Frequency

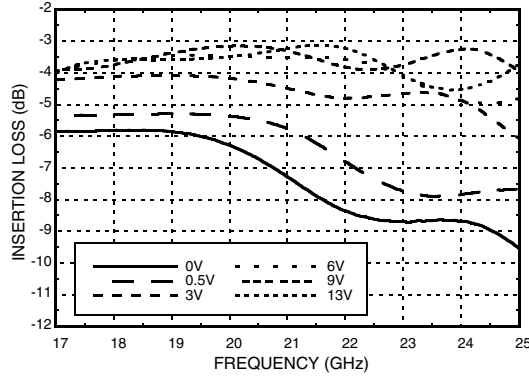


Insertion Loss vs. Vctl , F = 21 GHz

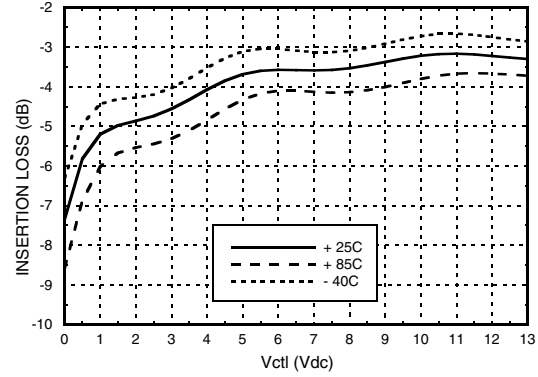


Phase Shift vs. Vctl

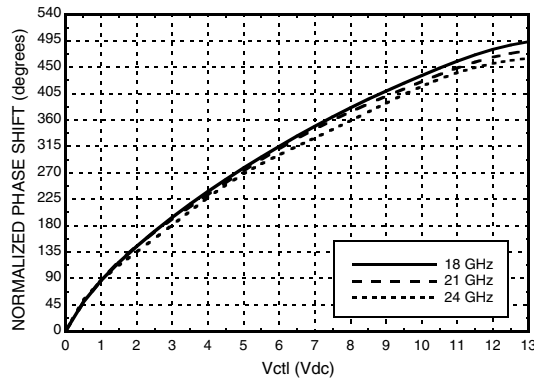


**Phase Shift vs. Frequency @ Vctl = 6V
(Relative to Vctl = 0V)**

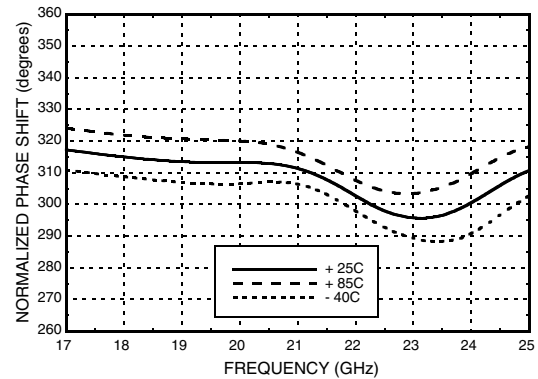

**Phase Shift vs. Frequency
(Relative to Vctl = 0V) Vctl = 0.5 to 13V**

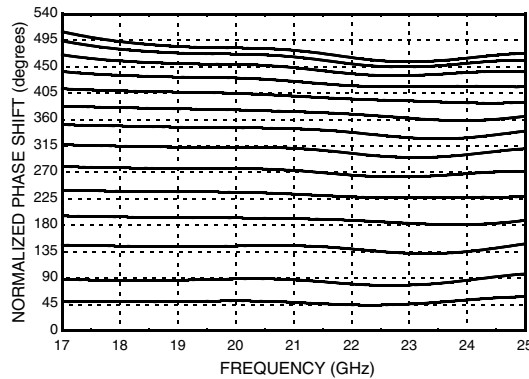

Phase Error vs. Frequency, Fmean = 21 GHz [1]

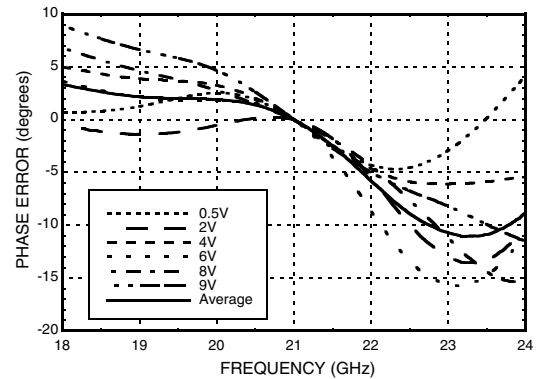


[1] 0 to 9V provides 0 - 380 degrees phase shift range




470° ANALOG PHASE SHIFTER, 18 - 24 GHz


Second Harmonics vs. Vctl, F = 21 GHz

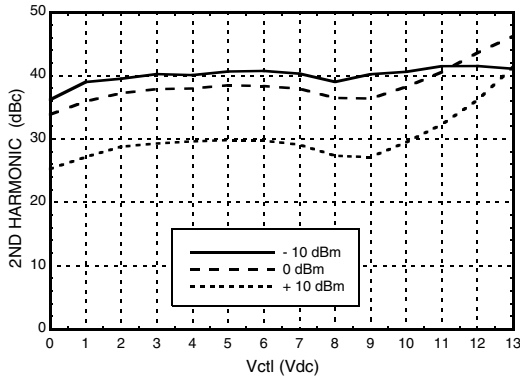


Input IP3 vs. Vctl, F = 21 GHz

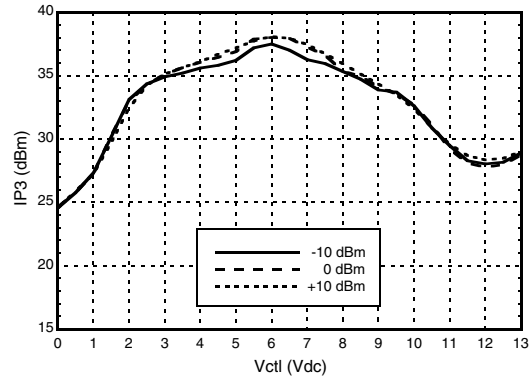


Insertion Loss vs. Pin @ 18 GHz

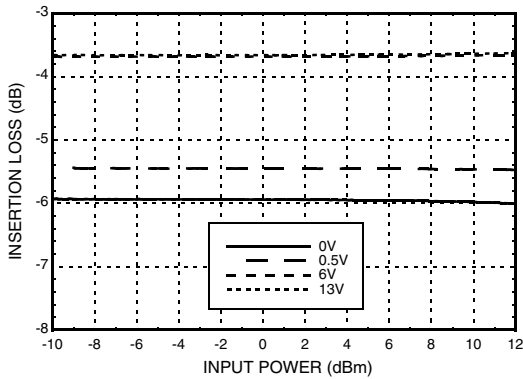


Insertion Loss vs. Pin @ 21 GHz

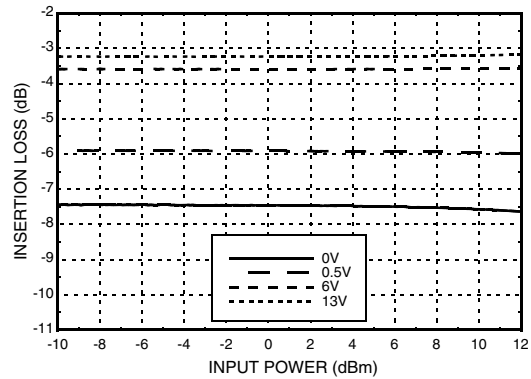

Insertion Loss vs. Pin @ 24 GHz

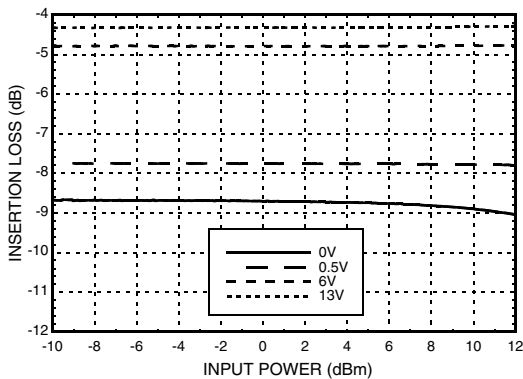


Phase Shift vs. Pin @ 18 GHz

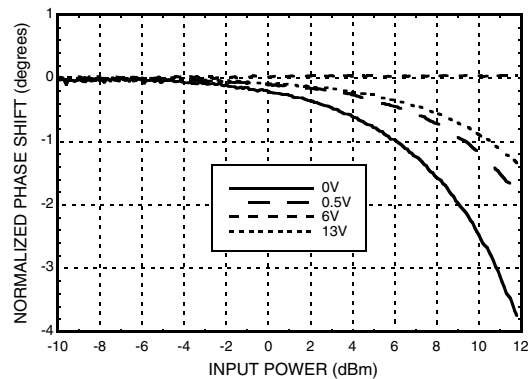




470° ANALOG PHASE SHIFTER, 18 - 24 GHz


Phase Shift vs. Pin @ 21 GHz

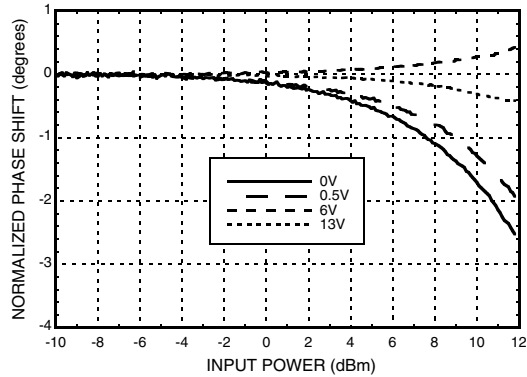


Phase Shift vs. Pin @ 24 GHz

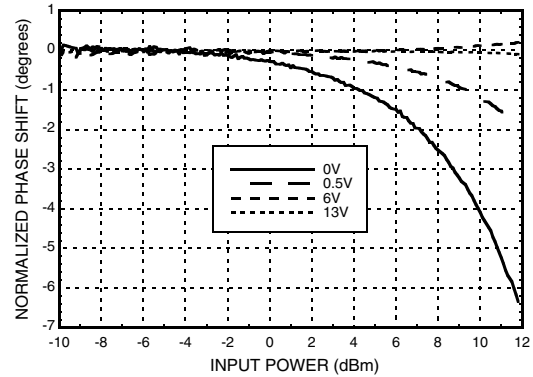

Input Return Loss vs. Frequency, Vctl = 0 to +13V

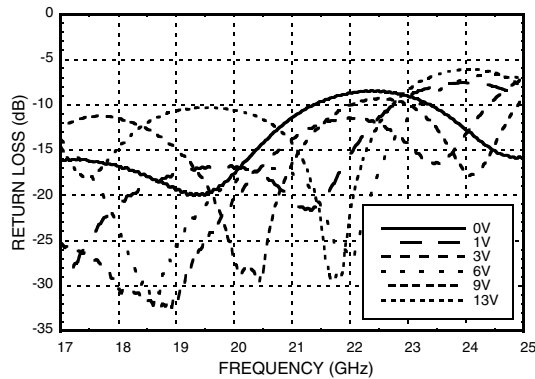

Output Return Loss vs. Frequency, Vctl = 0 to +13V

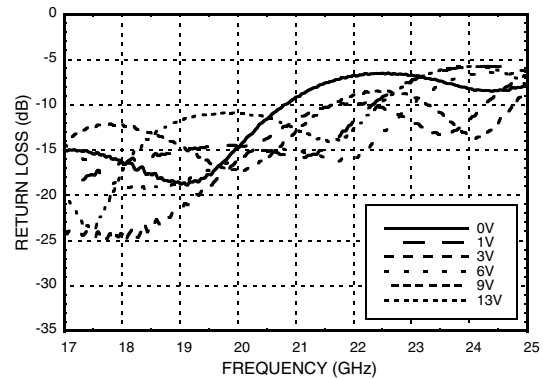

Absolute Maximum Ratings

| | |
|------------------------|----------------|
| Input Power (RFIN) | +26 dBm |
| Control Voltage (Vctl) | -0.5V to +15V |
| Storage Temperature | -65 to +150 °C |
| ESD Sensitivity (HBM) | Class 1B |

Reliability Information

| | |
|--|---------------|
| Junction Temperature (Tj) | 150 °C |
| Nominal Junction Temperature (T = 85 °C, Pin = 10 dBm) | 87 °C |
| Thermal Resistance (Junction to GND Paddle) | 80 °C/W |
| Operating Temperature | -40 to +85 °C |




**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**



470° ANALOG PHASE SHIFTER, 18 - 24 GHz

Outline Drawing

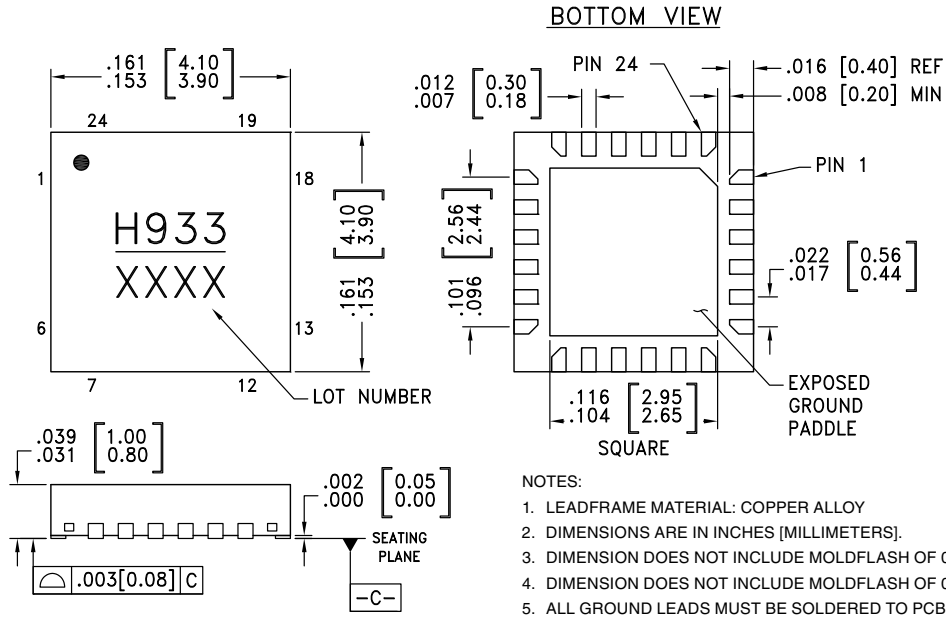

Package Information


| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[1] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC933LP4E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | H933 XXXX |

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C

Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|--------------------------------|----------|---|---------------------|
| 1, 5 - 14, 18 - 20, 22 - 24 | N/C | No connection required. These pins may be connected to RF/DC ground without affecting performance. | |
| 2, 4, 15, 17 | GND | Ground: Backside of package has exposed metal ground slug that must be connected to ground thru a short path. Vias under the device are required. | |
| 3 | RFIN | Port is DC blocked. | |
| 16 | RFOUT | Port is DC blocked. | |
| 21 | Vctl | Phase shift control pin. Application of a voltage between 0 and 13 volts causes the transmission phase to change. The DC equivalent circuit is a series connected diode and resistor. | |

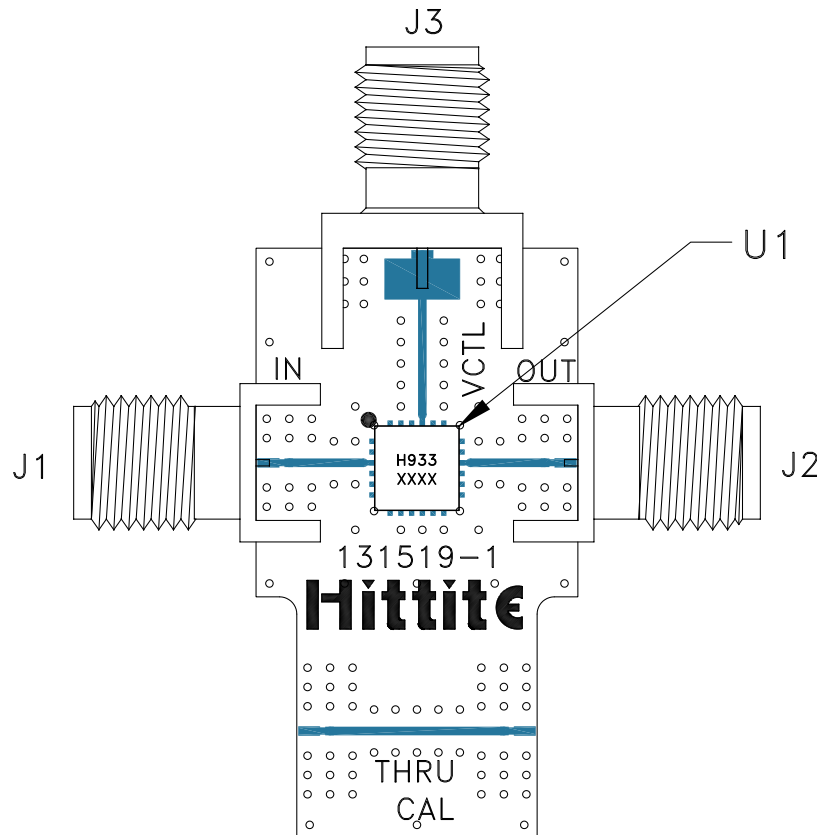Evaluation PCB

List of Materials for Evaluation PCB 131521 [1]

| Item | Description |
|---------|---------------------------------|
| J1, J2 | PCB Mount SMA Connector, SRI |
| J3 | PCB Mount SMA Connector |
| U1 | HMC933LP4E Analog Phase Shifter |
| PCB [2] | 131519 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.