


**LH5 – 5 x 5 mm CERAMIC  
HERMETIC SMT PACKAGE**

**Suggested LH5 PCB Land Pattern**

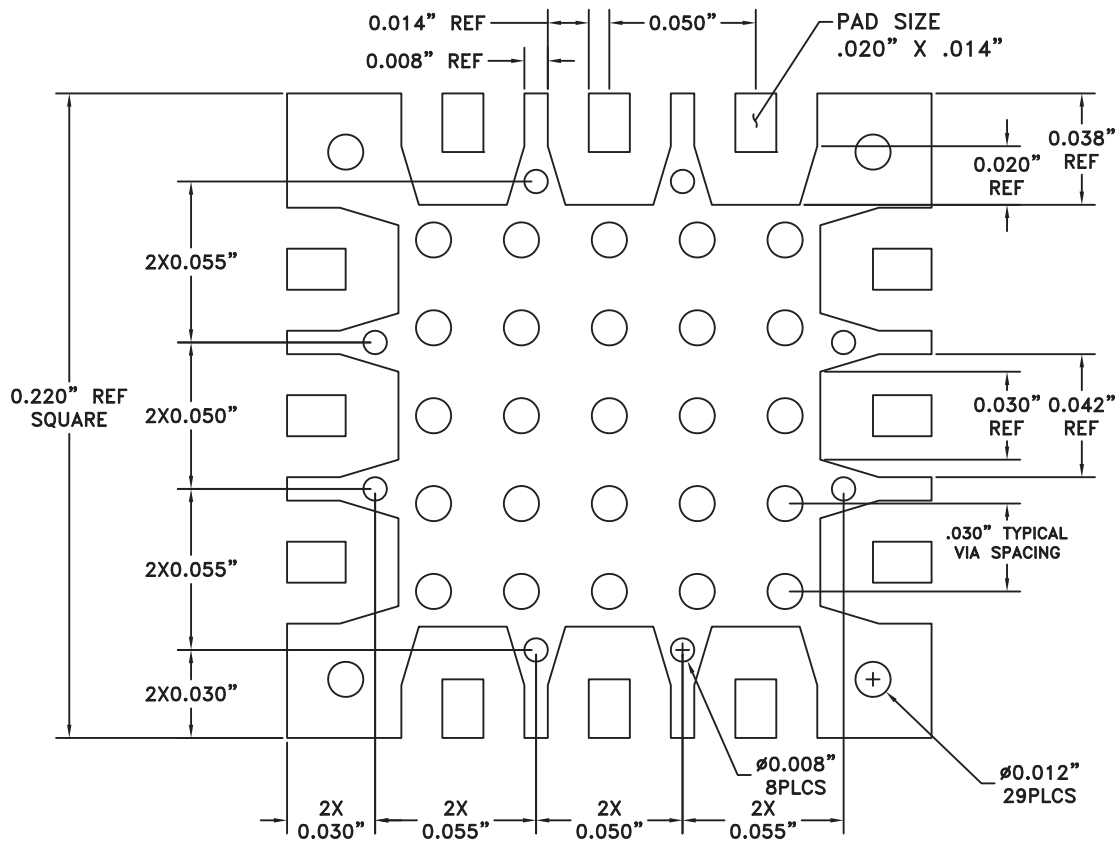

**NOTES:**

1. DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. PAD WIDTH SHOWN IS FOR SOLDERING ONLY. BEYOND SOLDERING AREA ALL CONDUCTORS THAT CARRY RF AND MICROWAVE SIGNALS SHOULD HAVE 50 OHM CHARACTERISTIC IMPEDANCE.