


Agilent 86130A BitAlyzer® Error Performance Analyzer

Technical Specifications

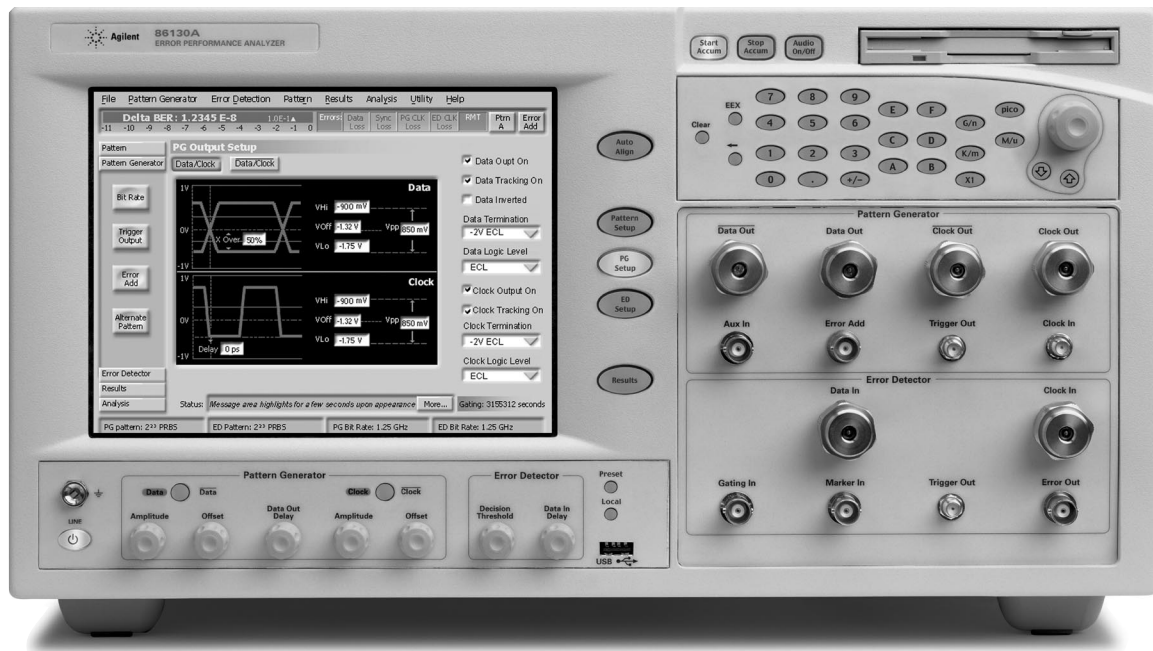

General Features

Internal Hard Disk

For local storage of user patterns and data

Removable Storage

MS-DOS® compatible 3.5" Superdrive (accepts 1.4 Mbyte HD disks & 120 Mbyte SuperDisks™)

Data Entry

Touch-sensitive display, numeric keypad with up/ down arrows, analogue feel position controls, or provided USB keyboard and mouse if desired.

Display

Internal 8" (diagonal) backlit LCD touch-screen

Interfaces

GPIB (IEEE 488), LAN ("10 Base T" Ethernet) for printing and file transfer, Parallel/Centronics printer port, external VGA output.

On-line Help

Context-sensitive On-Line help is included. Operation, programming and quick-start guides are also included and supplied on MS-Windows® compatible CD-ROM.

Accessories Supplied

USB compatible keyboard; mouse; stylus; Quick Start Manual on paper; Quick Start Card.

MS-Windows® compatible CD-ROM containing "PDF" files of Operating, Quick-Start, and Programming guides.

Power Cord; 6x APC-3.5 connector savers (female to female); 6x 50Ω APC-3.5 (male) terminations, 3x 1 metre SMA (male to male) cables.



Agilent Technologies

Pattern Generator

Pattern Generator Parameters

Operating Frequency

Operating Frequency

50 MHz to 3.6 GHz with external clock (optional)
50 MHz to 3.0 GHz with internal clock source

Internal Clock Source

Frequency Range

50 MHz to 3.0 GHz

Frequency Accuracy

± 20 ppm

Test Patterns

2^N-1 PRBS

$2^{31}-1$, $2^{23}-1$, $2^{15}-1$, $2^{10}-1$, 2^7-1

2^N PRBS

2^{23} , 2^{15} , 2^{10} , 2^7

Variable Mark Density

1/8, 1/4, 1/2, 3/4, 7/8

User Defined Patterns

Variable length patterns from 1 to 8 Mbits

Alternating Patterns

Change between two equal length user patterns, each up to 4 Mbits long. Changeover is synchronous with the end of a pattern, under the control of the front panel or the Auxiliary Input.

Error Add

Single, continuously variable between 1×10^{-2} and 1×10^{-9} , and user specified bursts of errors.

Pattern Editor

Fully flexible pattern editor included with "cut", "copy" and "paste" functions.

Pattern Generator Input/Output Specifications

Data and Data Outputs

Data and $\overline{\text{Data}}$ outputs are independently settable

Format: NRZ

Polarity: Normal or Inverted

Amplitude: 0.5 to 2 V in 10 mV steps

Offset: See figure below. 10mV resolution.

Data Outputs On/Off: 'Off' goes to high impedance state

Supported Terminations:

0 V (LVTTTL, SCFL, etc.), -2 V (ECL), +1.3 V (3.3 V PECL), AC-coupled

Jitter (pk-pk): <20 ps, <12 ps typical (w/internal source)

Transition Time (10–90%): <45 ps typical

Variable Crossover: Supported

Clock/ Data Delay Range: 0–1 bit period or 10 ns, whichever is less. 1 ps resolution.

Interface: DC-coupled
50 Ω reverse terminated,
APC-3.5 connector

Clock and Clock Outputs

Clock and $\overline{\text{Clock}}$ outputs are independently settable

Amplitude: 0.5 to 2 V in 10 mV steps

Offset: See figure below.

10mV resolution.

Clock Outputs On/Off: 'Off' goes to high impedance state

Supported Terminations:

0 V (LVTTTL, SCFL, etc.), -2 V (ECL), +1.3 V (3.3 V PECL), AC-coupled


Transition Time (10–90%): <45 ps typical

Interface: DC-coupled 50 Ω reverse terminated, APC-3.5 connector

Intrinsic Clock to data delay is constant at all frequencies.


Data/ $\overline{\text{Data}}$ /Clock/ $\overline{\text{Clock}}$ Amplitudes and Offsets

0.5 min
to
2V max



Termination:

	-2V	0V	+1.3V
Maximum High Level:	0V	2.5V	2.5V
or Minimum Low Level:	-3V	-3V	-3V

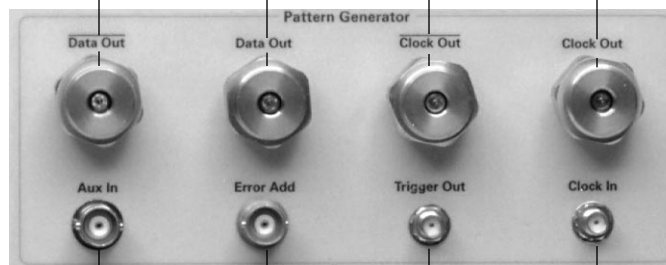

Auxiliary Input

This has two functions.

1. Blanks the data outputs to allow the user to create bursts of data
2. If in Alternating Pattern mode, used to change between 'A' and 'B' patterns

Minimum pulse width: 128 clock periods

Interface: TTL compatible, 50 Ω BNC female connector

Clock Input

Allows connection of an external clock source in order to extend the operating range of the instrument. Recommended clock sources Agilent 8648D and 83752A.

Frequency Range: 50 MHz to 3.6 GHz

Amplitude Range: +3 dBm to -3 dBm

Interface: SMA female 50 Ω , DC coupled to 0 V

Error Add Input

This allows injection of single errors by an external pulse generator into the transmitted test pattern synchronous with the rising edge of the pulse

Minimum pulse width: 128 clock periods

Interface: TTL compatible, 50 Ω BNC female connector

Trigger Output

Provides a pulse to trigger a communication analyzer etc. It has two modes:

1. Divided Clock mode: pulses at 1/8th of the clock rate.
2. Pattern mode: pulse at a settable bit position within the pattern.

Min.pulse width: (Pattern mode) 64 bits

Output levels: High -0.2 V, Low -0.9 V

Interface: 50 Ω SMA female

Error Detector

Error Detector Parameters

Operating Frequency

50 MHz to 3.6 GHz.

Test Patterns

As specified for Pattern Generator

Auto-Align

Includes synchronizing, data polarity, clock/ data align, clock invert, 0/1 threshold center.

Data In Delay

Manual Data In Delay/Auto Clock-Data Align

Threshold Setting

Manual set, Average DC level set, Auto 0/1 center

Synchronization

Manual, Automatic, Burst*, Capture*. Sync threshold adjustable from 10^{-1} to 10^{-9} .

Results

Accumulated measurements may be run once, repetitively or manual start/ stop.

Delta (instantaneous) BER always available.

Accumulation

Time

Accumulate for periods from 1 second to 100 days

Errors

Until at least 10/100/1000 errors

Bits

$10E^7$ to $10E^{15}$ bits

Results are logged periodically to the hard disk for later export (in 'CSV' format) and analysis in a PC spreadsheet program.

Result Displays

Results are displayed under the following headings.

Delta BER Results

Delta Error Ratio, Delta Error Count, Graph of BER vs Time

Accumulated Results

Bit Count, Error Ratio, Error Count, Errored One Count, Errored Zero Count, Error Free Seconds, Errored Seconds, Elapsed Accumulation Time, Sync Loss Seconds, Power Loss Seconds, Graph vs Time

Eye Results

Eye Width, Eye Height, Eye Voltage Center value, Eye Time Center value, Delta Error Ratio at Eye Center on completion of Autoalign

SYNTHESYS Error Analysis

Graphs of Burst Lengths, Error Free Intervals, Correlation Analysis, Pattern Sensitivity Analysis, Block Analysis, Strip Chart, Table of Error Statistics

Audible Error Indicator

Selectable to indicate Isolated Errors, Delta Error Ratio, Errors above user-defined threshold. On/Off Volume Control. Audible pitch changes, with higher pitch corresponding to higher BER.

* Burst Mode and Capture Synch coming later.

Error Detector Input/Output Specifications

Data Input

Polarity: Normal or Inverted
Input Amplitude: 0.1 to 2 V (typical)
Threshold Range: +3 to -3 V
Threshold Resolution: 0.5 mV
Terminations: Via 50Ω to -2 V, 0 V, +1.3 V
Data Input Delay Range: 0–1 bit period, or 10 ns whichever is less. 1 ps resolution
Interface: DC-coupled 50Ω, APC-3.5 female connector

Clock Input

Clock Input functions—switchable termination voltages, input frequency measurement, clock invert.
Bit Rate: 50 MHz to 3.6 GHz
Data Sampling Clock Edge: Selectable Rising or Falling
Amplitude: 0.5 to 2 V
Terminations: Via 50Ω to -2 V, 0 V, +1.3 V
Interface: DC-coupled 50Ω, APC-3.5 female



Gating Input

This is used to inhibit error counting
Minimum pulse width: 128 clock periods
Interface: TTL compatible, 50Ω BNC female connector

Error Output

Provides a pulse if one or more errors have been detected within the preceding 128 bit block.
Pulse Width: 64 bits
Output Levels: High +2.4 V, Low +0.4 V
Interface: DC-coupled, reverse terminated 50Ω BNC female connector

Marker Input

Takes in reference marker signal to provide reference for Error Correlation Analysis
Pulse width: 128 clock periods
Interface: TTL compatible, 50Ω BNC female connector

Trigger Output

Provides a pulse to trigger a communication analyzer etc. It has two modes:
 1. Divided Clock mode: pulses at 1/8th of the clock rate.
 2. Pattern mode: pulse at a fixed bit position within the pattern.
Pulse width (Pattern mode): 64 bits
Output levels: High -0.2 V, Low -0.9 V
Interface: 50Ω SMA female

External Parameters

Environmental

Warm-up time

30 minutes

Operating Temperature Range to specification

10 to 45°C

Humidity

15 to 95% at 45°C non-condensing

Electrical

Supply Voltage Parameters

90 V–250V AC, 50–60Hz

Power Consumption

<300W

EMC

EU EMC Directive (CE-Marked)

Support

Warranty

1 year


Calibration

2 year cycle, return to Agilent Technologies

Physical

Dimensions

426 W x 215 H x 527 D mm approx (16.8" W x 8.5" H x 20.7" D approx)

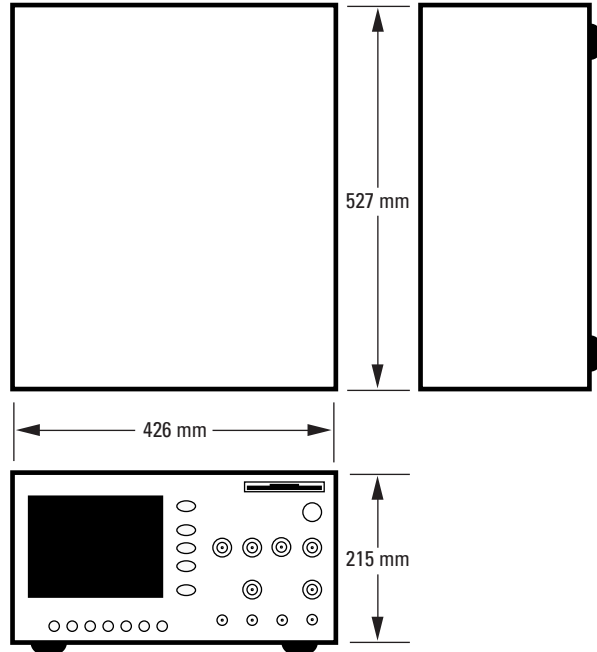

Weight

23 kg (50 lbs)

Ordering Information

- 86130A BitAlyzer** 3 Gbit/s BitAlyzer with basic error analysis features
(for 3.0 Gbit/s BER measurement and analysis with internal clock source, 3.6 Gbit/s with external clock source)
- Option 100** 2-D error mapping*
- Option 200** Error correction coding analysis*
- Option 300** Add 8648D 4.0 GHz external synthesized signal source
- Option 0B1** Hard copy programming manuals
- Option AX4** Mounting kit for 19" rack, without handles
- Option AXE** Mounting kit for 19" rack, including front handles

Recommended Product Accessories

Torque Wrench:

- 8710-1765** For APC 3.5 connectors

Cable:

- 8120-4948** 1m SMA cable

Blocking Capacitor:

- 11742A** 45 MHz to 26.5 GHz, APC-3.5 mm

Bias Network:

- 11612A** 45 MHz to 26.5 GHz, APC-3.5 mm

Attenuators:

- 8493C option 003** 3 dB APC 3.5 pad
- 8493C option 006** 6 dB APC 3.5 pad
- 8493C option 010** 10 dB APC 3.5 pad
- 8493C option 020** 20 dB APC 3.5 pad

Transition Time Convertors:

Used to slow the output waveform rise/fall times if desired. SMA male to SMA female connectors.

- 15435A** 150 ps output transition time
- 15432B** 250 ps output transition time
- 15433B** 500 ps output transition time
- 15434B** 1000 ps output transition time
- 15438A** 2000 ps output transition time

* Contact factory for availability

SuperDisk is a trademark of Imation Corp.

BitAlyzer is a registered trademark of SyntheSys Research Inc.

MS-DOS and MS-Windows are U.S. registered trademarks of Microsoft Corporation.

Agilent Technologies'

Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:

www.agilent.com/comms/lightwave

Phone or Fax

United States:

(tel) 1 800 452 4844

Canada:

(tel) 1 877 894 4414

(fax) (905) 282 6495

Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Latin America:

(tel) (305) 269 7500

(fax) (305) 269 7599

Australia:

(tel) 1 800 629 485

(fax) (61 3) 9210 5947

New Zealand:

(tel) 0 800 738 378

(fax) 64 4 495 8950

Asia Pacific:

(tel) (852) 3197 7777

(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.

Copyright © 2000 Agilent Technologies

Printed in USA April 1, 2001

5968-8545E



Agilent Technologies