


Agilent SCM VX008 TI-Based VXI DSP Module Distributed Product

Product Overview

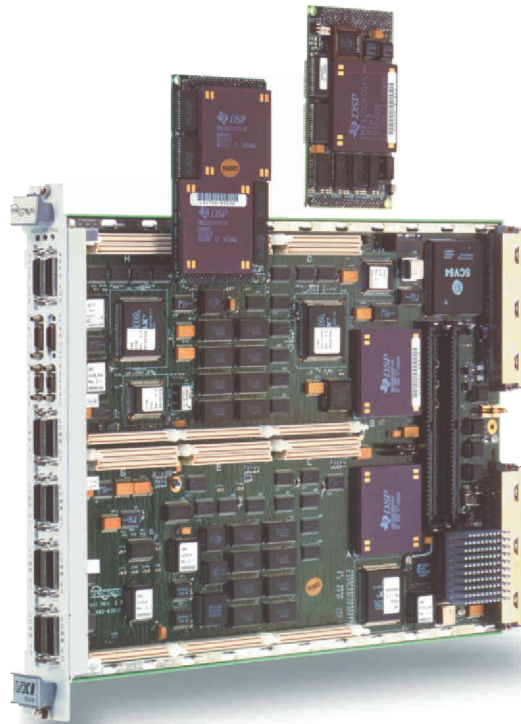

Concentrated computing power with high performance I/O

When your data acquisition and signal processing tasks demand concentrated computing power, the Agilent SCM VX008 is the answer.

Use the SCM VX008 when your acquisition or processing task is more than your system controller can handle. Add TIM-40* type DSP modules to the SCM VX008 to handle even bigger jobs in the future.

- **Two 60 MHz TI TMS320C40 DSPs**
- **Six TIM-40 mezzanine card slots**
- **Eight C40 comm ports on front panel**
- **Local bus support**
- **VXI shared memory**
- **Two application specific connectors**
- **JTAG connection**
- **Standard C40 software development**
- **Single-slot, C-size, VXI module**



* The Texas Instrument Module (TIM-40) for the C40 is a widely accepted mezzanine card standard generated by Texas Instruments.



Agilent Technologies

Processing power

The SCMVX008 brings one of the most popular digital signal processors in the world to VXI. This C-size single-slot VXI module contains two of Texas Instrument's high performance 60 MHz TMS320C40 digital signal processors. These are 32-bit resolution, general purpose, floating point DSP chips, ideal for application in communications, signal analysis, process control, data acquisition, and test. On this board each C40 comes standard with a total of 1 MB of 0 wait state SRAM memory.

Expanded processing power

Increase the computing power in your SCMVX008 by using its six expansion slots to add processors. Each slot holds a TIM-40 type mezzanine card.


Different cards have different combinations of DSP, memory, and I/O capabilities. By mixing and matching TIM-40 modules you can build a processing system suited to your application.

The Options and Accessories section at the end of this datasheet has a complete explanation of the options available to you for expanding the computing power of the SCMVX008.

DSP-to-DSP communication

The TMS320C40 DSP is noted for the DSP-to-DSP communication flexibility provided by its six highspeed communication ports. The layout of the SCMVX008 uses that flexibility to move data efficiently among multiple DSPs. Each C40 and TIM-40 node in the module is connected to its five nearest neighbors and to one of the eight buffered C40 comm port connectors on the module front panel, see Figure 1.

Figure 1:
Agilent SCMVX008
C40 comm port
connections

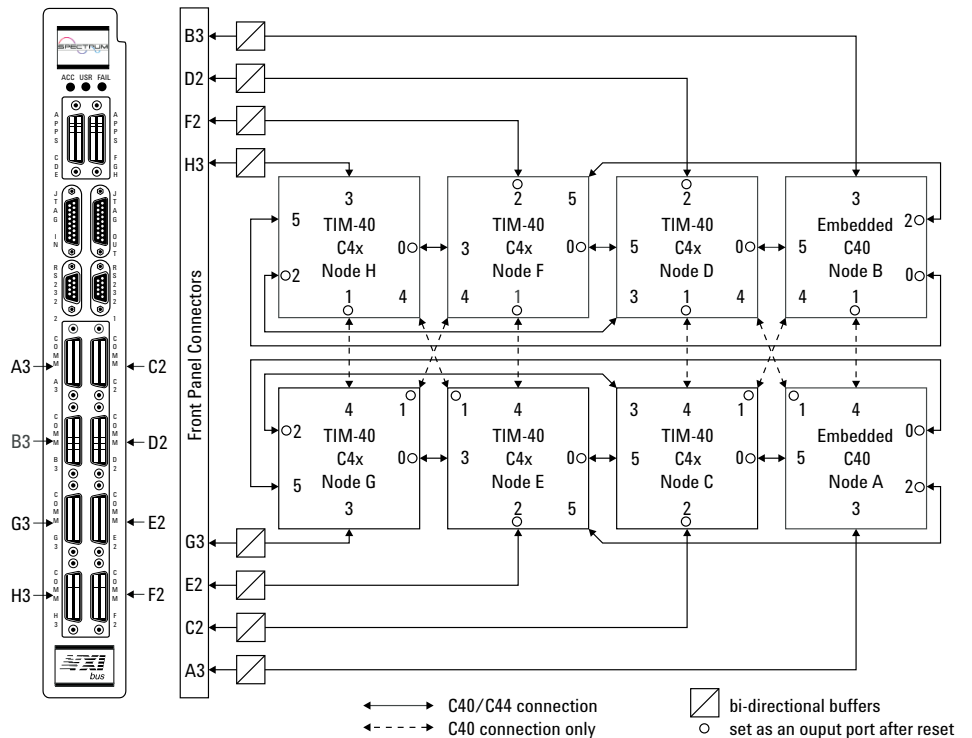

High performance I/O

Processing power is wasted without fast, flexible data I/O. The SCM VX008 module has a selection of data ports to assure fast input of raw data and efficient output of processed data.

Use the VXI Local Bus port for fastest data transfer to and from other VXI modules, see Figure 2. Agilent's implementation of this module-to-module bus enables data transfer rates as high as 100 MB/s. The SCM VX008 achieves input rates of 60 MB/s.

Increase data throughput rate by broadcasting Local Bus data to multiple DSP nodes at once. Every C40 and TIM-40 node in the SCM VX008 is connected to the VXI Local Bus port via its global bus connection. You can broadcast to all nodes at once or to selected node subsets only.

Use the VXI bus port to transfer processed data to and from the host and other VXI modules. This is a particularly efficient data path when used in conjunction with the VXI shared RAM capability of the SCM VX008. You can also use

this port to download programs to the C40s and to communicate with the host and other VXI modules.


Share data directly with external C40 comm port compatible resources via the eight C40 comm ports on the SCM VX008 front panel, see Figure 1. Use these ports to expedite direct, high speed, DSP-to-DSP I/O when your application demands multiple SCM VX008's. Or, connect directly to non-VXI resources. These connectors also provide direct links to non-VXI resources.

Special I/O

The SCM VX008 has special purpose I/O. Two application specific connectors on the front panel provide direct access to the TIM-40 nodes. Each node has eight pins that can be used by mezzanine cards designed to use them as inputs or outputs, to pass analog signals or digital data (see four channel tuner with DAC (Option SCM VX008-040) description in Options and Accessories Section).

The SCM VX008 also supports RS232 communication to one of the embedded C40's.

Figure 2:
Agilent SCM VX008
block diagram

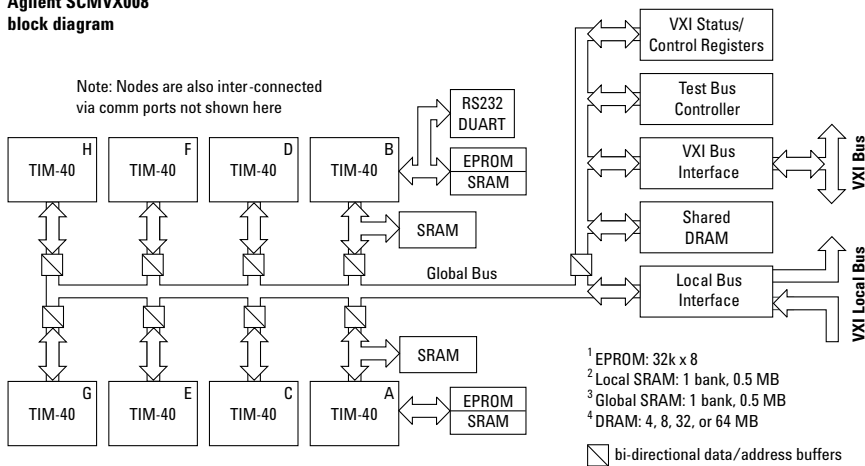

Agilent options and accessories

VXI shared memory

VXI shared memory facilitates data transfer to the host or other VXI modules. Order as much as your processing needs demand. Select as little as 4 MB, or as much as 64 MB.

Software

Develop software for the SCM VX008 using standard C40 software tools.

TI offers a proven, mature set of development tools for their TMS320 DSP family. This first-class combination of software and support is utilized by a broad range of third parties. TI's C4X Assembler/Linker and ANSI C compiler (TI TMS320C4X code generation tools, release 4.70 and higher) are available for PCs enabling users to develop DSP applications in standard ANSI C. The compiler makes use of chip features such as parallel instructions, optimized multi-pass data addressing, and the repeat block instruction to ensure the code produced is as efficient as possible. TI's

assembly language tools support coding in mixed assembler and C for greater control over code efficiency.

Download prototype code via standard JTAG connectors. Or, if your development environment is a VXI embedded PC or workstation, download prototype code over the VXI backplane via the Test Bus Controller. The SCM VX008 supports full JTAG functionality including single step execution.

Host DSP communication is supported with a complete VXI I/O library (part of the SCM04008 I/O Library and JTAG kit) that runs on either SIDL or VISA. The library is HP-UX, Windows NT®, Windows 2000, and WIN95 compatible.

The SCM VX008 has several options and accessories to enhance its functionality.

Option SCM VX008-011 TMS320C40 TIM-40 card

Use this option to increase the number of C40s in your SCM VX008 module. Each SCM VX008-011 TIM-40 card adds a single, 60 MHz TMS320C40 DSP with 1.5 MBytes of 0 ws SRAM.

Option SCM VX008-011 comes standard with a global bus connection so the processor can access the VXI Local bus, VXIbus, VXI shared RAM and other DSPs. All six C40 comm ports are brought off the card to facilitate direct DSP-to-DSP communication.

This card includes a 32KB PEROM that acts as an IDROM to comply with the Texas Instrument TIM-40 specification and as a boot ROM to assist downloading software from a host. The PEROM is user programmable.

You can add six Option SCM VX008-011 C40's to a single SCM VX008.

Windows NT, and Windows 2000 are a U.S. registered trademark of Microsoft Corporation.

HP-UX 9.*, 10.0 and 10.01 for HP 9000 Series 700 and 800 computers are X/Open Company UNIX 93 branded products.

* HP-UX 10.10 and 10.20 for HP 9000 Series 700 and 800 computers are X/Open Company UNIX 95 branded products.

**Option SCMVX008-012
Dual TMS320C44 TIM-40 card**

Use this card to increment the DSPs in your SCMVX008 by two using only one TIM-40 slot. Each option SCMVX008-012 holds two, 60 MHz TMS320C44 DSPs. The C44 has the same functionality as the C40 but is enough smaller that two can fit on one TIM-40 card. Each C44 has 1 MB of 0 ws SRAM divided equally between their two busses.

Option SCMVX008-012 comes standard with one processor connected to the global bus connector so the card can access the Local bus, VXIbus, VXI shared RAM and other DSPs. Six of the eight available C44 comm ports are brought off the card to facilitate direct DSP to DSP communication. The remaining two connect the C44's (see Figure 4).

This card includes a 32KB PEROM that acts as an IDROM to comply with the Texas Instrument TIM-40 specification and as a boot ROM to assist downloading software from a host. The PEROM is user programmable.

**Option SCMVX008-040
Four-channel tuner with DACs**


This card provides four independent channels of digital quadrature mixing with digital LOs followed by decimation filtering for use in digital radio applications.

Each channel is independently tunable so the card can select four specific signals for demodulation, once a segment of spectrum is downconverted and digitized by other VXI modules. Tuning resolution for each channel is <1 Hz.


Programmable bandwidth filtering SCMVX008-040 enhances demodulation by maximizing signal-to-noise ratio. Filter bandwidths can be programmed between 176 kHz and 86 Hz on data sampled at 20.48 MSa/s.

Decimation, also a standard feature, assures the lowest possible data rate without sacrificing signal information. The decimation factor is programmable from 64 to 131,072 in steps of four.

**Figure 3:
Option SCMVX008-011
block diagram**

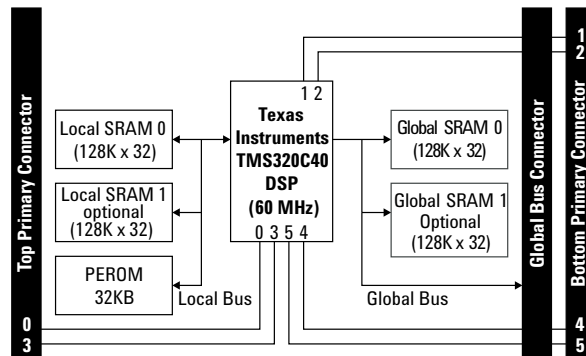

**Figure 4:
Option SCMVX008-012
block diagram**

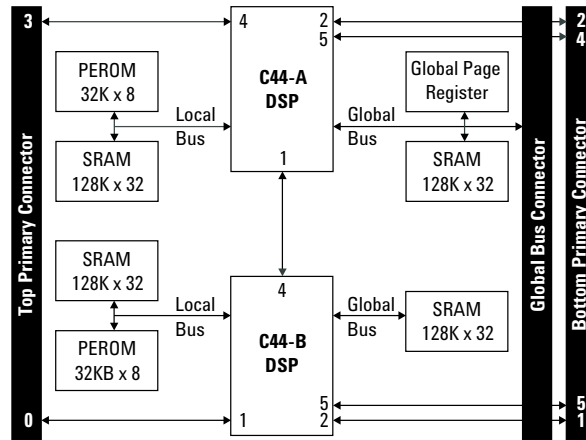

Because of the digital quadrature mixing, all four channels supply digital I/Q data that is perfect for processing digital modulation formats. Demodulation can then be performed by a C40 (see Figure 6).

Once a C40 has demodulated the signals, return them to the four channel DAC on the Option 040 module. The DAC outputs are routed through the application-specific connectors on the SCM VX008 front panel. Connect the outputs to speakers and listen to the demodulated signals. Or keep the signals in digital form and send them to the host for further processing or storage.

You can add six Option SCM VX008-040 four channel tuners and DACs to a single SCM VX008.

Option SCM VX008-140 Demodulation software

Use this software with the Option SCM VX008-040 four channel tuner and DACs TIM-40 card. Option SCM VX008-140 provides programmatic control of the LOs, filters, and DACs on the DDC, and provides AM, FM, and SSB routines to demodulate the signals selected by the tuners.

Because the Option SCM VX008-040 tuner card has no processor or conventional memory this software must run on a C40 connected to a comm port (0, 4, or 5) of the Option SCM VX008-040 TIM-40 module.

Use the source code shipped with Option SCM VX008-140 software as example code to create your own control and demodulation downloadable.


Agilent SCM04008 VXI I/O library and JTAG kit

This kit provides the VXI device driver and interface libraries required to interface the SCM VX008 and its TIM-40 cards to the host controller.

The driver and interface libraries support operations such as control (reset, initialize, open, close), DSP code download, module I/O, and test. Both Agilent SICL and VXI *plug&play* VISA standards are supported providing a standard interface to higher-level application software.

The kit includes the I/O library and drivers, VXI manual, TI TMS320C4x users manual, XDS cable conversion board and VXI JTAG chain cable for downloading and debugging code during code development.

Figure 5: Option SCM VX008-040 block diagram

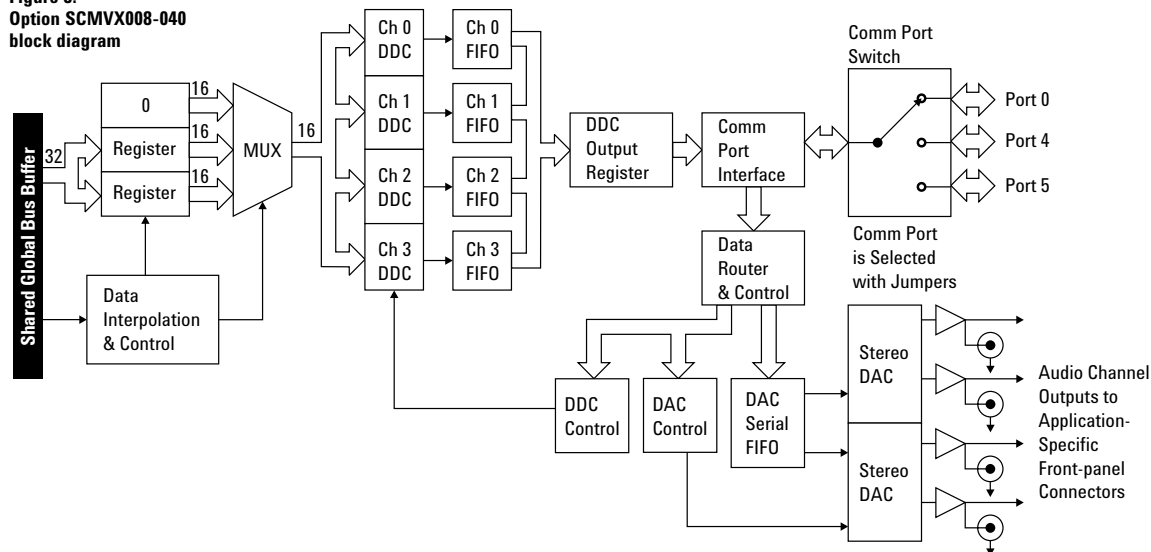

A system library provides developers with a suite of C4x callable functions to exercise the full functionality of the SCM VX008. This low-level C4x library optimizes data transfers and simplifies the task of configuring and controlling the SCM VX008. Support functionality includes: VXI bus routines (DMA, configuration and VXI master transfers), Local Bus routines (bus configuration and data transfer), RS232 communication, and user-defined LED control.

Utility software is also included in this kit. The software provides easy to use PEROM programming utilities (EEPROM Tools) for programming the boot ROMs, example software (with source code), and built in test software to verify board level functionality at power up.


One of these kits must be ordered with the SCM VX008.

**Agilent SCM01545
Debug kit (DOS)**

This kit provides SCM VX008 specific tools to aid software development.

The debug kit includes an XDSC40 emulator board, DB40 debugger software, and an XDSC40 users manual to enable downloading and debugging C40 code from an external PC via the front panel JTAG connector.

**Figure 6:
Digital receiver
block diagram using
Option SCM VX008-040**

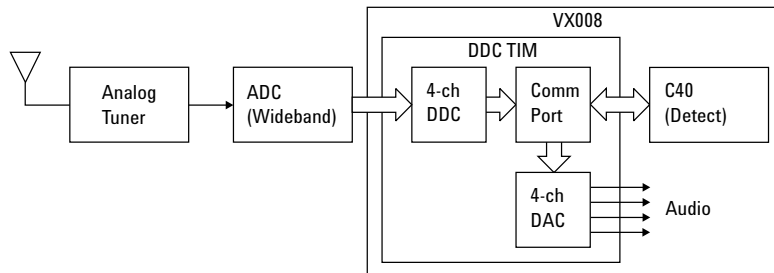

Ordering Information

SCMVX008	TI based DSP Module
SCMVX008-011	TMS320C40 TIM-40 Card
SCMVX008-012	Dual TMS320C44 TIM-40 Card
SCMVX008-040	Four-Channel Tuner with DACs
SCMVX008-140	AM, FM, SSB Demodulation Software
SCMVX008-082	4 MB DRAM VXI Shared Memory
SCMVX008-083	8 MB DRAM VXI Shared Memory
SCMVX008-085	32 MB DRAM VXI Shared Memory
SCMVX008-086	64 MB DRAM VXI Shared Memory
SCMVX008-0B1	Additional Manual
SCM04008	I/O Library
SCM01545	Debug Kit
SCM00010	C4X Comm Port Cable Kit
SCM00012	JTAG Chain Cable
A2636-6160	RS232 Cable (30 inch)

Warranty

This product is distributed, warranted, and supported by Agilent Technologies. It is manufactured by Spectrum Signal Processing, Inc.

The Agilent SCM VX008 comes with a 1-year warranty. During that period, the unit will either be replaced or repaired, at Agilent’s option, and returned to the customer without charge.

Related Agilent Literature

E3238 Signals Development System Configuration Guide

literature number 5988-0562EN

E3238 Signals Development System Product Overview

literature number 5968-2075E

E3238 Signals Development System Technical Specifications

literature number 5963-6609E

Test Systems and VXI Products Catalog

literature number 5980-0307E

Visit our Websites

Agilent Communications
Intelligence Information –
www.agilent.com/find/AD

Agilent VXI Product Information –
www.agilent.com/find/vxi

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 800 452 4844

Canada:
(tel) 877 894 4414
(fax) 905 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) 305 269 7500
(fax) 305 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.
© Agilent Technologies, Inc. 2003
Printed in the USA March 15, 2003
5966-3438E



Agilent Technologies