

# **The Harman Kardon Model hk775**

---

## **Monophonic Amplifier**

# - Technical Manual

## PRECAUTIONS

1. Always disconnect the chassis from power line when soldering. Turning the power switch OFF is not enough. Power line leakage passing through the heating element may destroy the transistors.
2. Never attempt to do any work on the transistor amplifiers without first disconnecting the AC line cord and waiting until the power supply filter capacitors have discharged.
3. Replacement for output and driver transistors, if necessary, must be made from the same beta group as the original type.
4. If one output transistor burns out (open or short) always remove all the output transistors in that channel and check the bias adjustment, the control and other parts in the network with an ohmmeter before inserting a new transistor. All transistors in one channel will be destroyed if the base biasing circuit is open on the emitter end.
5. When mounting a replacement power transistor, be sure that the bottom of the flange, the mica insulators and the surface of the heat sink are free of foreign matter, for they may cause transistor failure.
6. Silicon grease must be applied between the transistor and the mica insulator, and between the mica insulator and the heat sink for better heat conduction.
7. Fuses must be replaced with size and type indicated. Use of other types can expose components to destructive current levels.

## ALIGNMENT PROCEDURES

### DC VOLTAGE BALANCE ADJUSTMENT

Equipment Required: DC Voltmeter

Connect Output Meter To	Adjust	Adjust For
DC voltmeter to SPEAKER terminals	VR401	0V $\pm$ 10mV

### IDLING CURRENT ADJUSTMENT

Equipment Required: DC Voltmeter

Connect Output Meter To	Adjust	Adjust For
DC voltmeter to TP1 (+) and TP2 (-)	VR402	36mV

# ALIGNMENT PROCEDURES

## POWER LEVEL DISPLAY SENSITIVITY ADJUSTMENT

**Equipment Required:** Audio Signal Generator and AC VTVM

- Notes:** 1. Connect signal source to INPUT jack.  
 2. Press in DISPLAY SENS. push button to x0.1 (button in) position.

Step	Signal Source	Connect Output Meter To	Adjust	Adjust For
1	1 kHz	8 ohm dummy load and AC VTVM to SPEAKER terminals	Signal source output level	12.65V on AC VTVM
2	1 kHz, -1 dB output level	_____	VR1	Topmost LED lights to glimmer



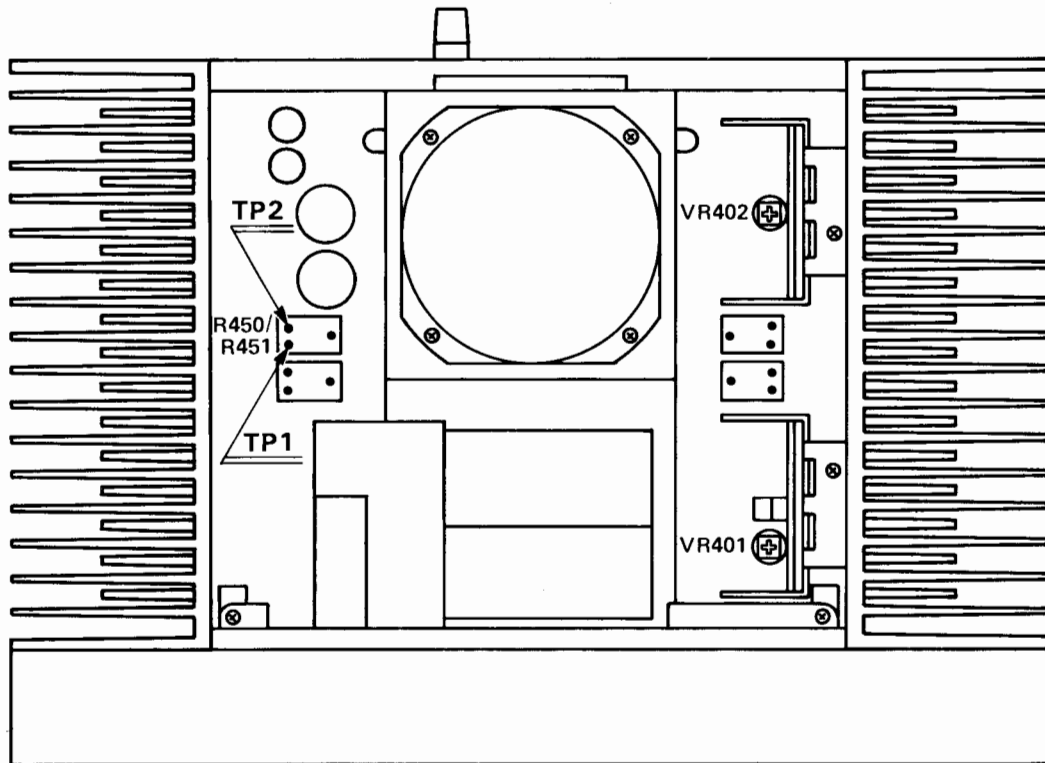



Fig. 1 – Alignment Points Location

# GENERAL UNIT EXPLODED VIEW

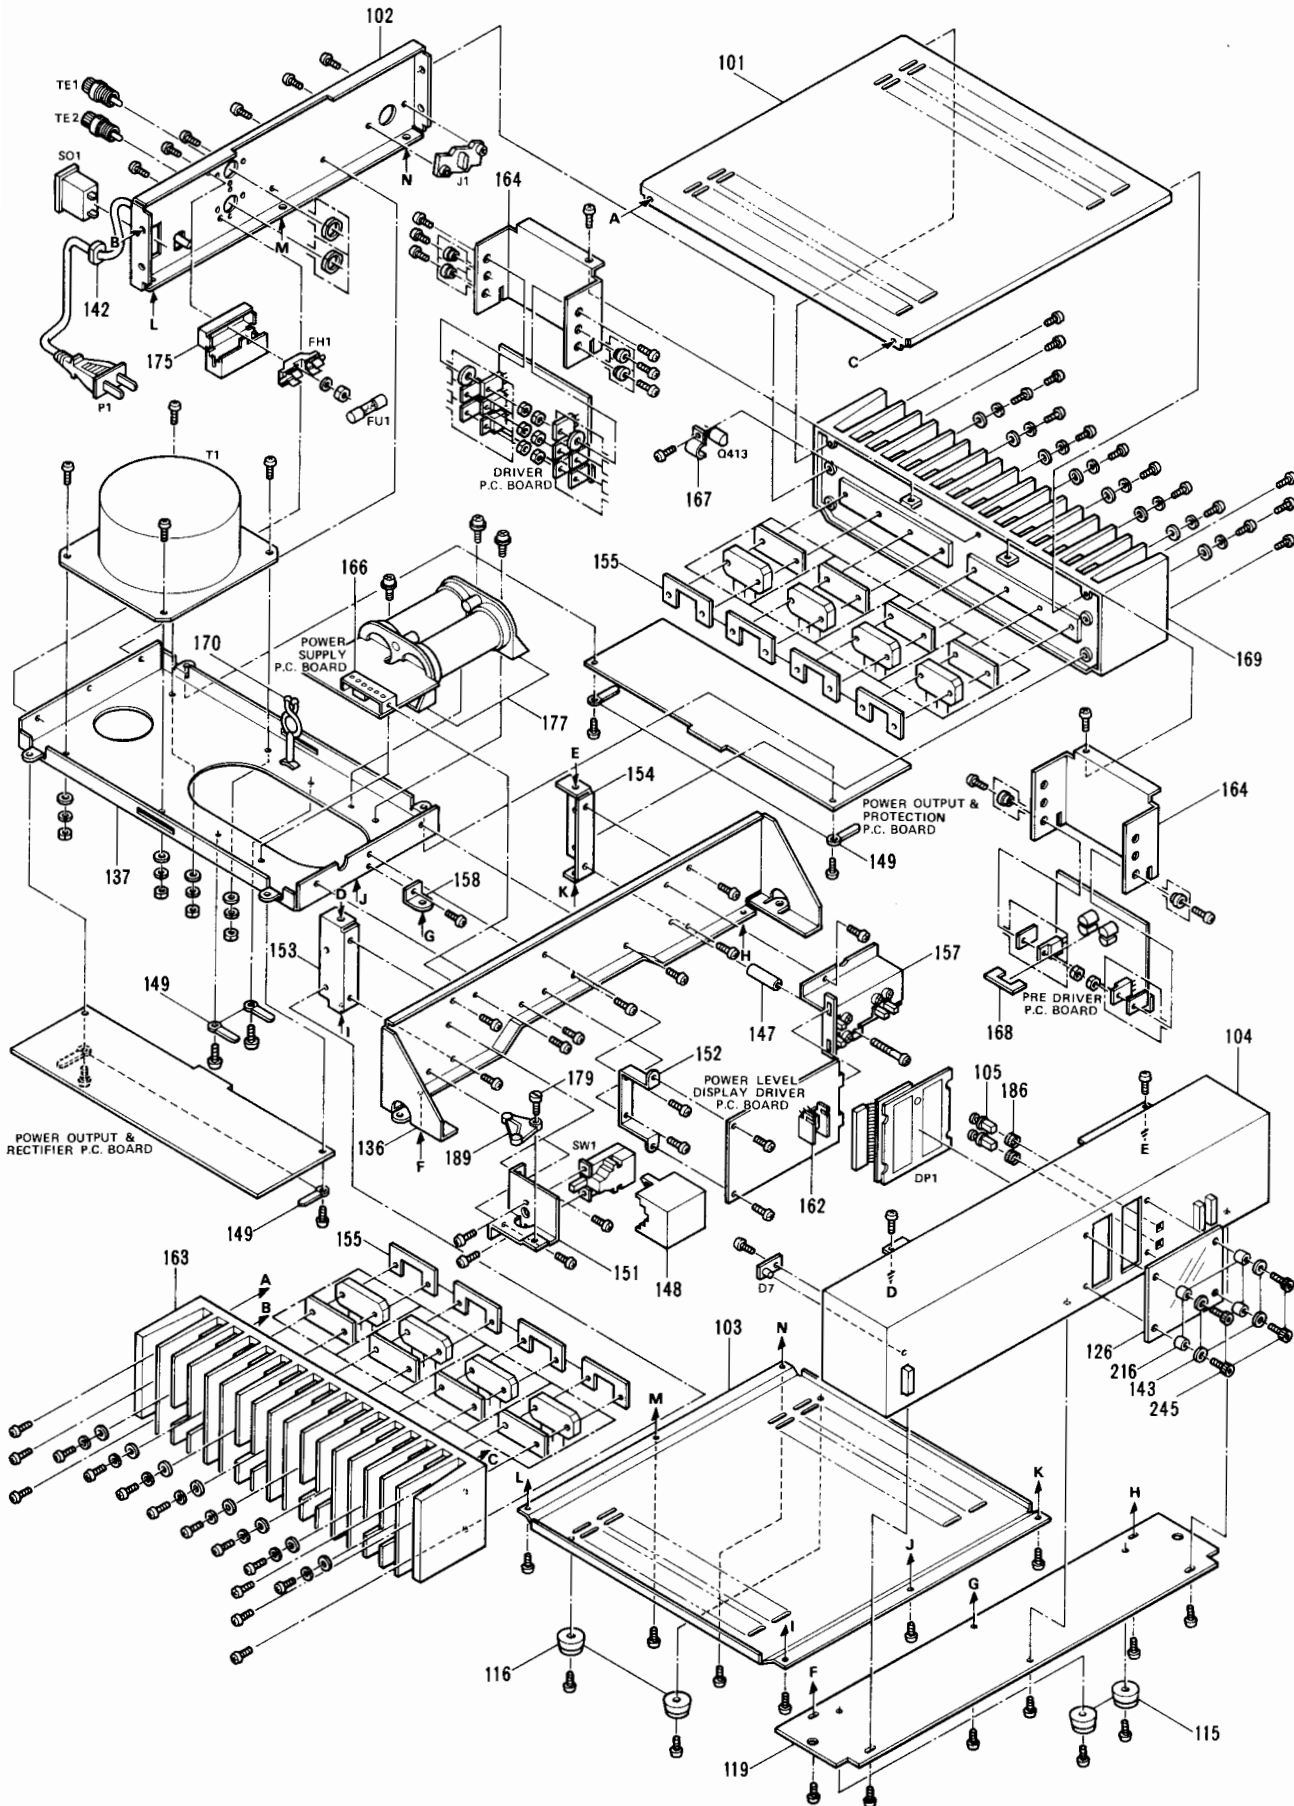


# SCHEMATIC DIAGRAM

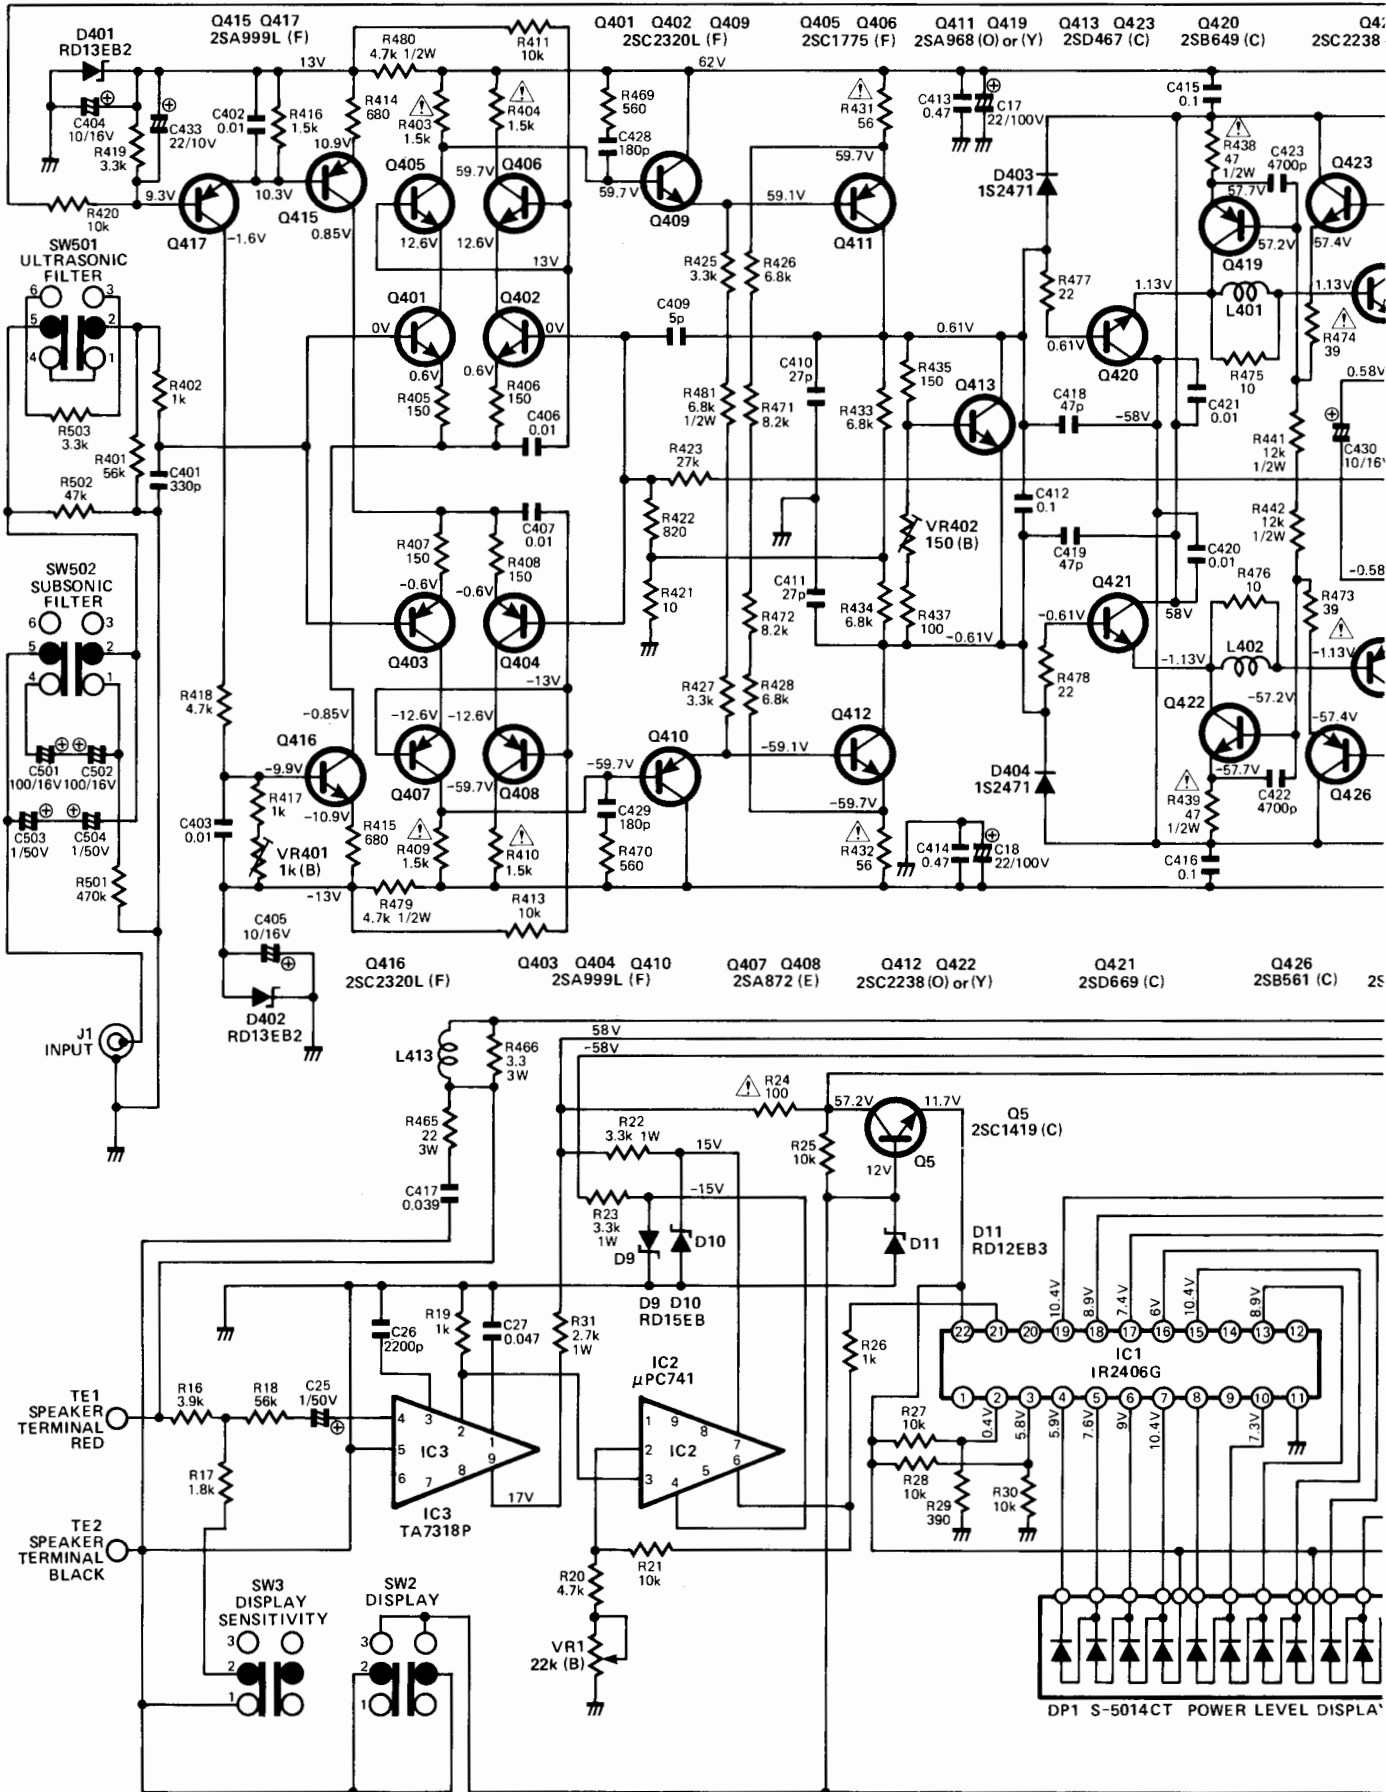


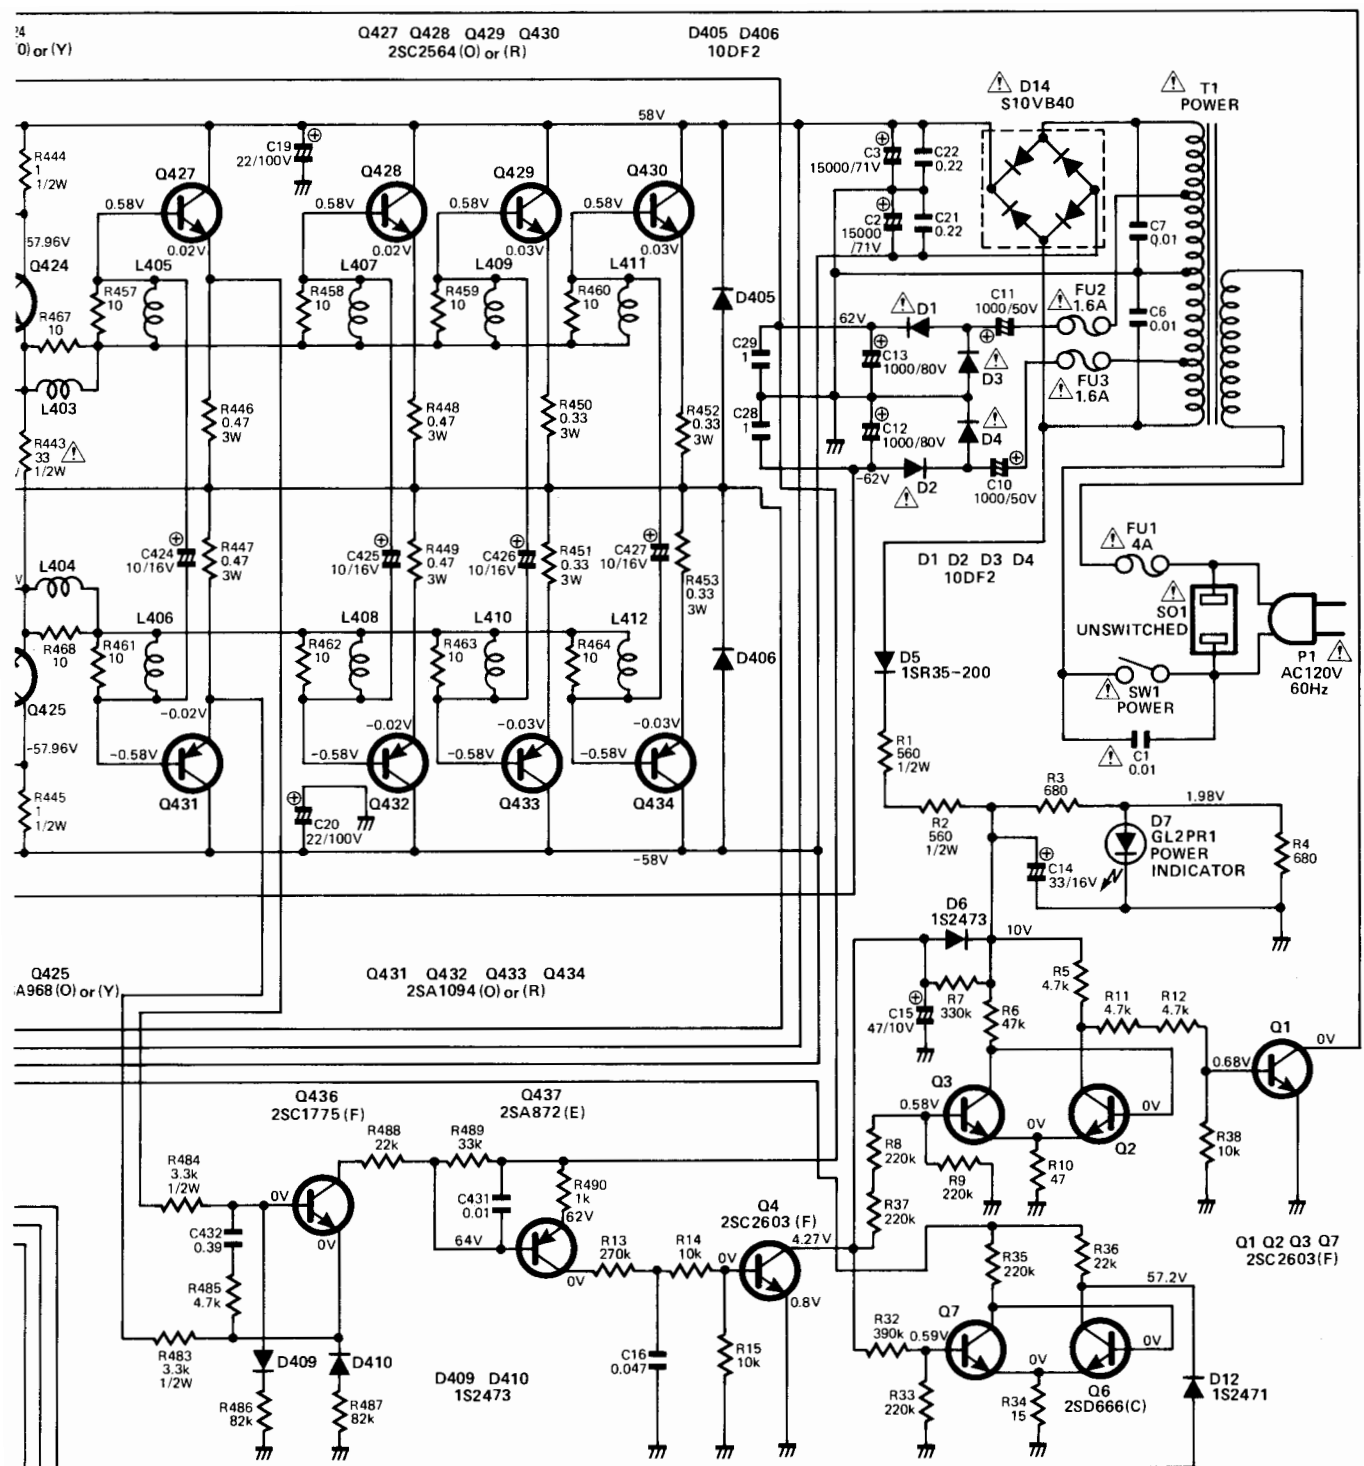


**NOTES:**


1. ALL RESISTANCES ARE 1/4 WATTS, UNLESS OTHERWISE NOTED, VALUES ARE IN  $\Omega$ .  
 $K = 1000\Omega$ ,  $M = 1000K\Omega$
2. ALL CAPACITANCES VALUES ARE IN  $\mu F$  UNLESS OTHERWISE NOTED.  $pF = \mu\mu F$
3. ALL VOLTAGES READING FROM CHASSIS ARE MEASURED WITH V.T.V.M. UNDER NO SIGNAL CONDITIONS.
4.  SAFETY-REQUIREMENTS COMPONENTS IN ACCORDANCE WITH PRESENT SAFETY REGULATIONS, THESE COMPONENTS MUST ONLY BE REPLACED BY ORIGINAL PARTS.

# POWER OUTPUT & PROTECTION P.C. BOARD

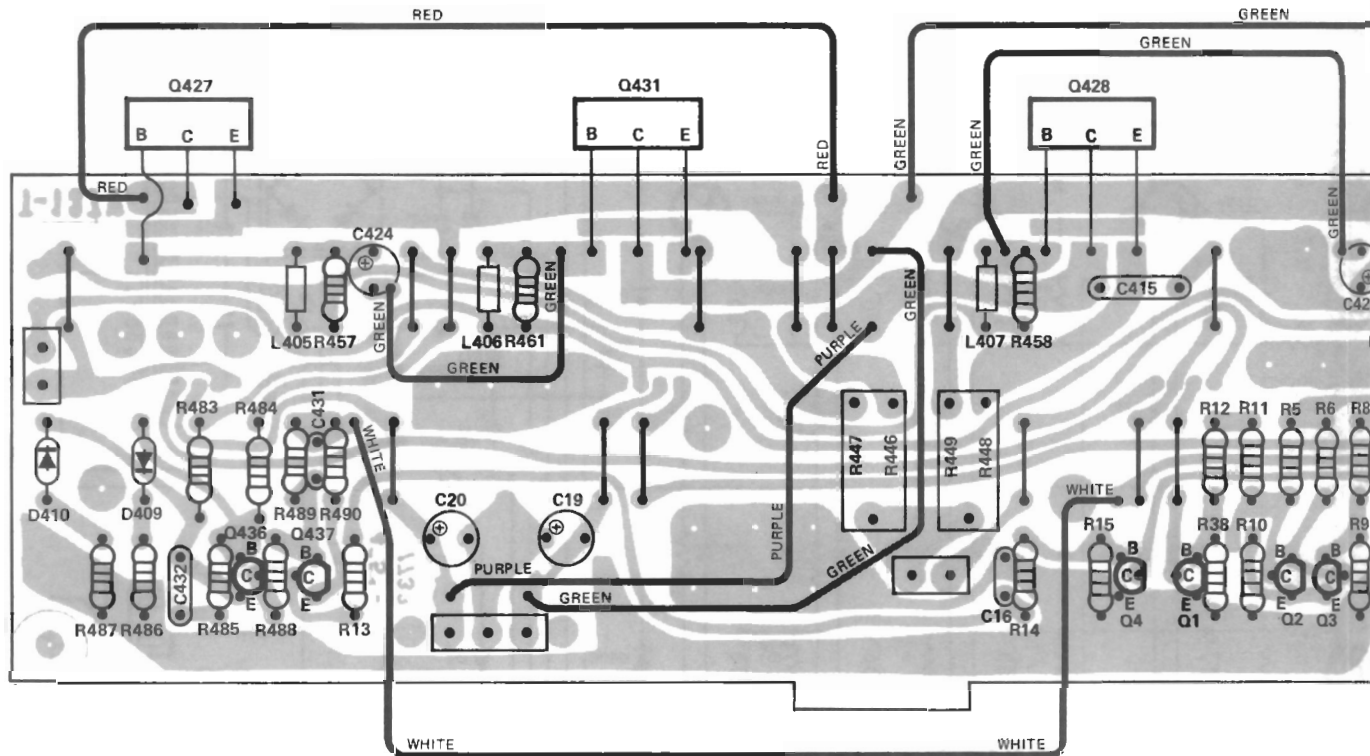


# POWER OUTPUT & RECTIFIER P.C. BOARD

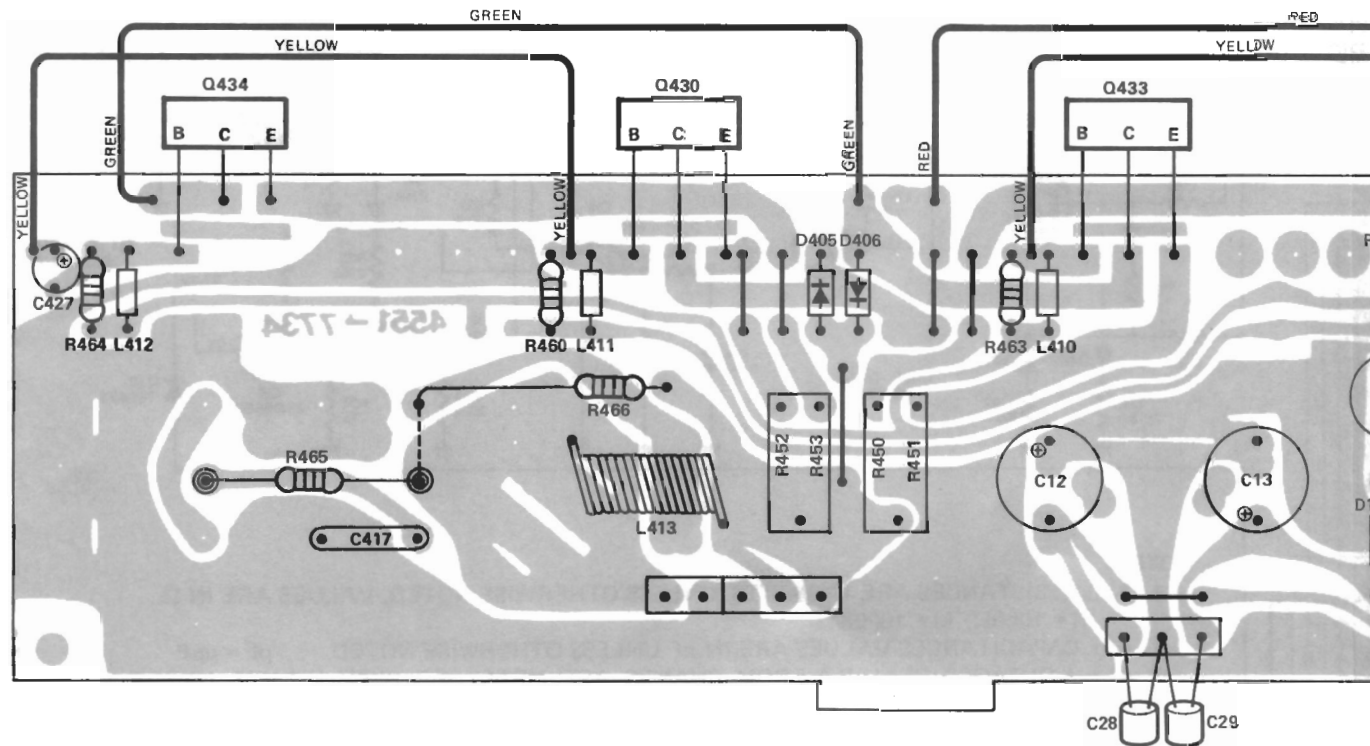

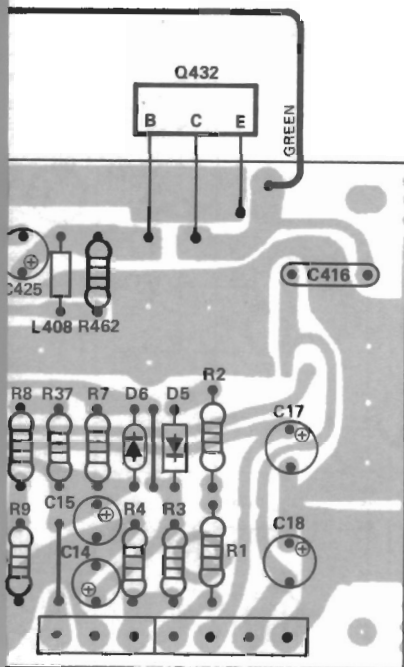


Ref. No.	Part No.	Description
<b>RESISTORS, CEMENT</b>		
R446/447, 448/449	5273-R33672	0.33Ω ±10% 3W×2 Special Dual
<b>CAPACITORS, ELECTROLYTIC</b>		
C17, 18, 19, 20	5345-228J0211	22μF ±20% 100V
<b>TRANSISTORS</b>		
Q1, 2, 3, 4	5613-2603(F)	2SC2603(F) Overload Protector/Muting
Q427, 428	5613-2564(O)	2SC2564(O)or(R) } Power Output
Q431, 432	5611-1094(O)	2SA1094(O)or(R) }
Q436	5613-1775(F)	2SC1775(F) } Overload Protector
Q437	5611-872(E)	2SA872(E) }
<b>DIODES</b>		
D5	5632-1SR35-20	1SR35-200
D6, 409, 410	5636-1S2473	1S2473
<b>MISCELLANEOUS</b>		
L405, 406, 407, 408	5597-45502	Ferrite Bead

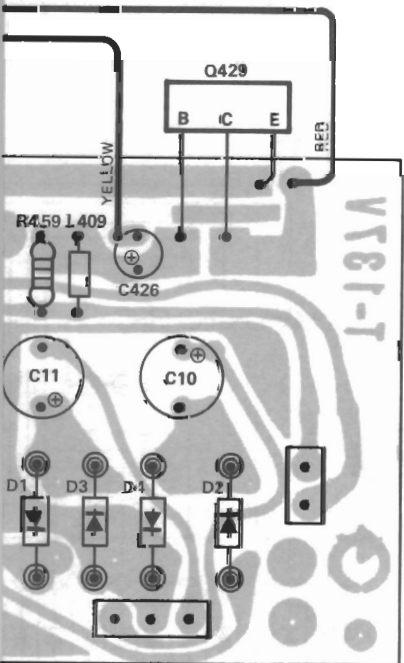

Ref. No.	Part No.	Description
<b>RESISTORS, CEMENT</b>		
R450/451, 452/453	5273-R33672	0.33Ω ±10% 3W×2 Special Dual
<b>CAPACITORS, ELECTROLYTIC</b>		
C10, 11	5345-108-50	1000μF ±50%--10% 50V
C12, 13	5341-108H0270	1000μF ±20% 80V
<b>TRANSISTORS</b>		
Q429, 430	5613-2564(O)	2SC2564(O)or(R) } Power Output
Q433, 434	5611-1094(O)	2SA1094(O)or(R) }
<b>DIODES</b>		
D1, 2, 3, 4, 405, 406	5632-10DF2	10DF2
<b>MISCELLANEOUS</b>		
L409, 410, 411, 412	5597-45502	Ferrite Bead
L413	5991-7125	Coil, RF Choke




# POWER LEVEL DISPLAY DRIVER P.C. BOARD

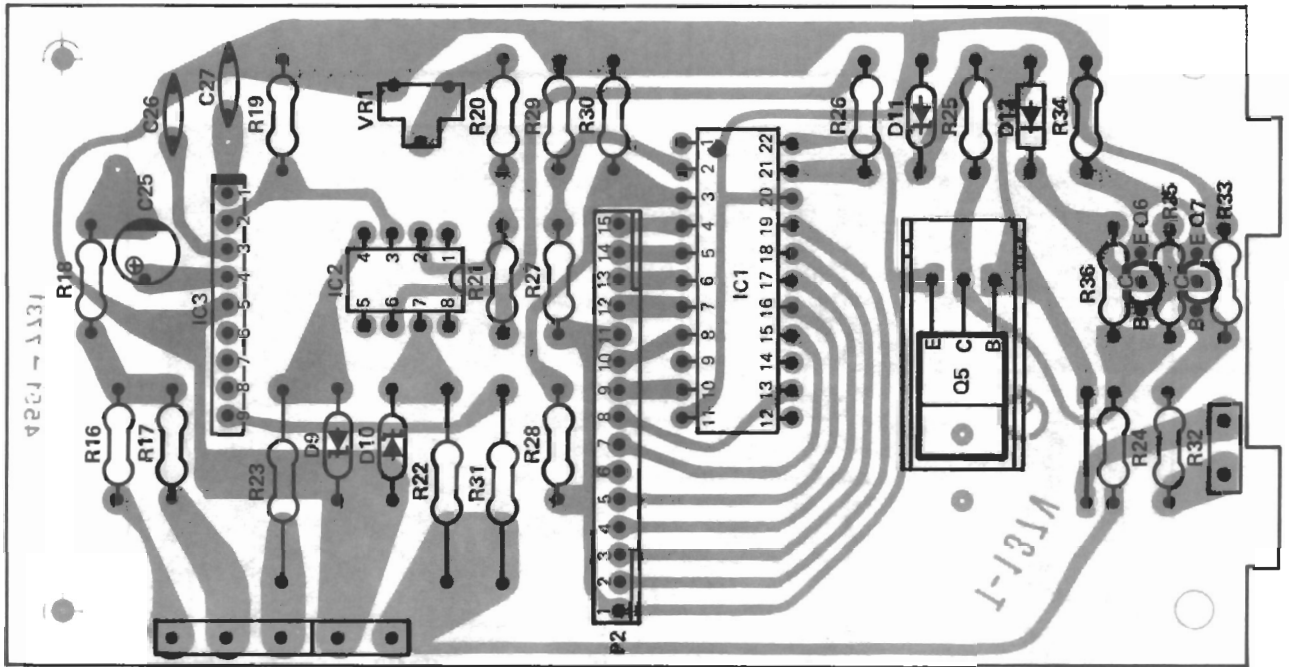


Ref. No.	Part No.	Description
<b>RESISTORS</b>		
R24	5102-1014713	100Ω ±2% 1/4W Fuse
VR1	5101-2238575	Variable Resistor, 22kΩ(B)
<b>INTEGRATED CIRCUITS</b>		
IC1	5652-IR2406G	IR2406G Power Level Display Driver
IC2	5652-μPC741	μPC741 Buffer Amp.
IC3	5652-TA7318P	TA7318P Linear-Log Converter
<b>TRANSISTORS</b>		
Q5	5613-1419(C)	2SC1419(C) Voltage Regulator
Q6, 7	5613-2603(F)	2SC2603(F) Muting
<b>DIODES</b>		
D9, 10	5635-RD15EB	Zener, RD15EB
D11	5635-RD12EB3	Zener, RD12EB3
D12	5636-1S2471	1S2471

# FILTER SWITCHES P.C. BOARD

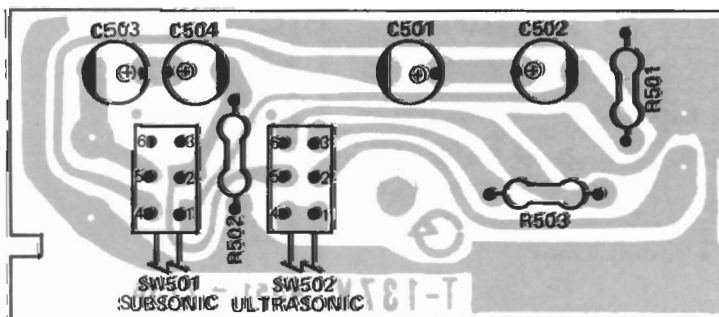


Ref. No.	Part No.	Description
SW501, 502	4431-01027369	Push Switch, Subsonic Filter, Ultrasonic Filter

PRE-DRIVER P.C. BOARD

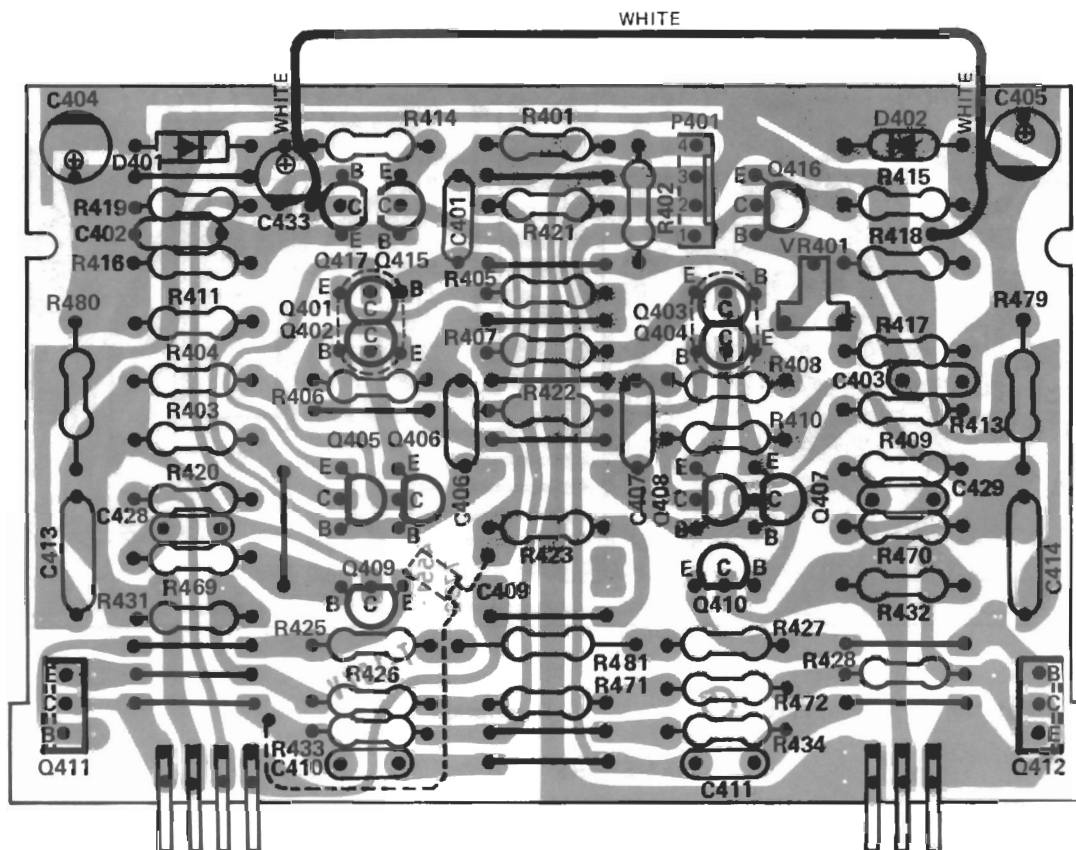


Ref. No.	Part No.	Description
<b>RESISTORS</b>		
R403, 404, 409, 410	5102-1524713	1.5kΩ ±2% 1/4W Fuse
R431, 432	5102-5604713	56Ω ±2% 1/4W Fuse
VR401	5101-1027875	Variable Resistor, 1kΩ(B)
<b>TRANSISTORS</b>		
Q401, 402	5613-2320L(F)	2SC2320L(F)
Q403, 404	5611-999L(F)	2SA999L(F)
Q405, 406	5613-775(F)	2SC775(F)
Q407, 408	5611-872(E)	2SA872(E)
Q409	5613-2320L(F)	2SC2320L(F)
Q410	5611-999L(F)	2SA999L(F)
Q411	5611-968(O)	2SA968(O)or(Y)
Q412	5613-2238(O)	2SC2238(O)or(Y)
Q415, 417	5611-999L(F)	2SA999L(F)
Q416	5613-2320L(F)	2SC2320L(F)
<b>DIODES</b>		
D401, 402	5635-RD13EB2	Zener, RD13EB2

# DRIVER P.C. BOARD

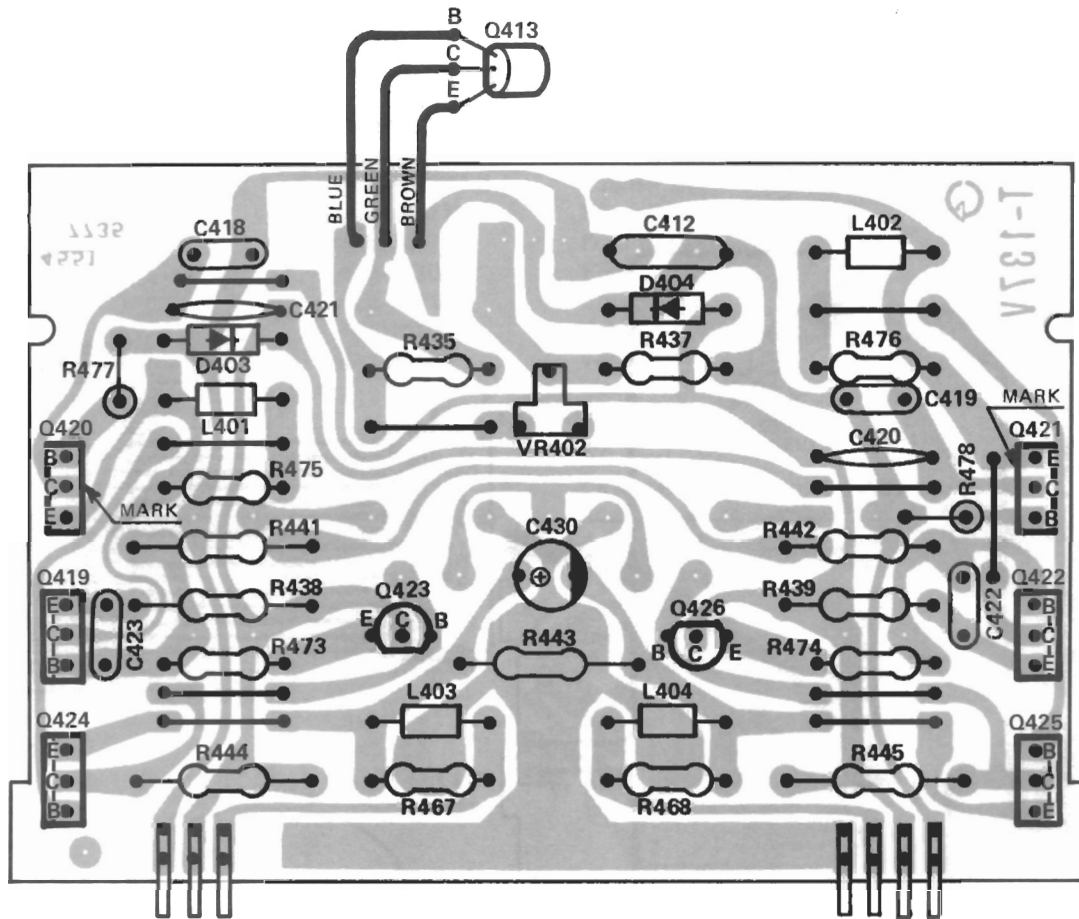


Ref. No.	Part No.	Description
<b>RESISTORS</b>		
R438, 439	5102-4705114	47Ω ±5% 1/2W Fuse
R443	5102-2705114	27Ω ±5% 1/2W Fuse
R473, 474	5102-3904713	39Ω ±2% 1/4W Fuse
VR402	5101-1517475	Variable Resistor, 150Ω(B)
<b>TRANSISTORS</b>		
Q413	5614-467(C)	2SD467(C) Bias Stabilization
Q419, 425	5611-968(O)	2SA968(O)or(Y)
Q420	5612-649(C)	2SB649(C)
Q421	5614-669(C)	2SD669(C)
Q422, 424	5613-2238(O)	2SC2238(O)or(Y)
Q423	5614-467(C)	2SD467(C)
Q426	5612-561(C)	2SB561(C)
<b>DIODES</b>		
D403, 404	5636-1S2471	1S2471
<b>MISCELLANEOUS</b>		
L401, 402, 403, 404	5597-45502	Ferrite Bead


POWER SUPPLY P.C. BOARD

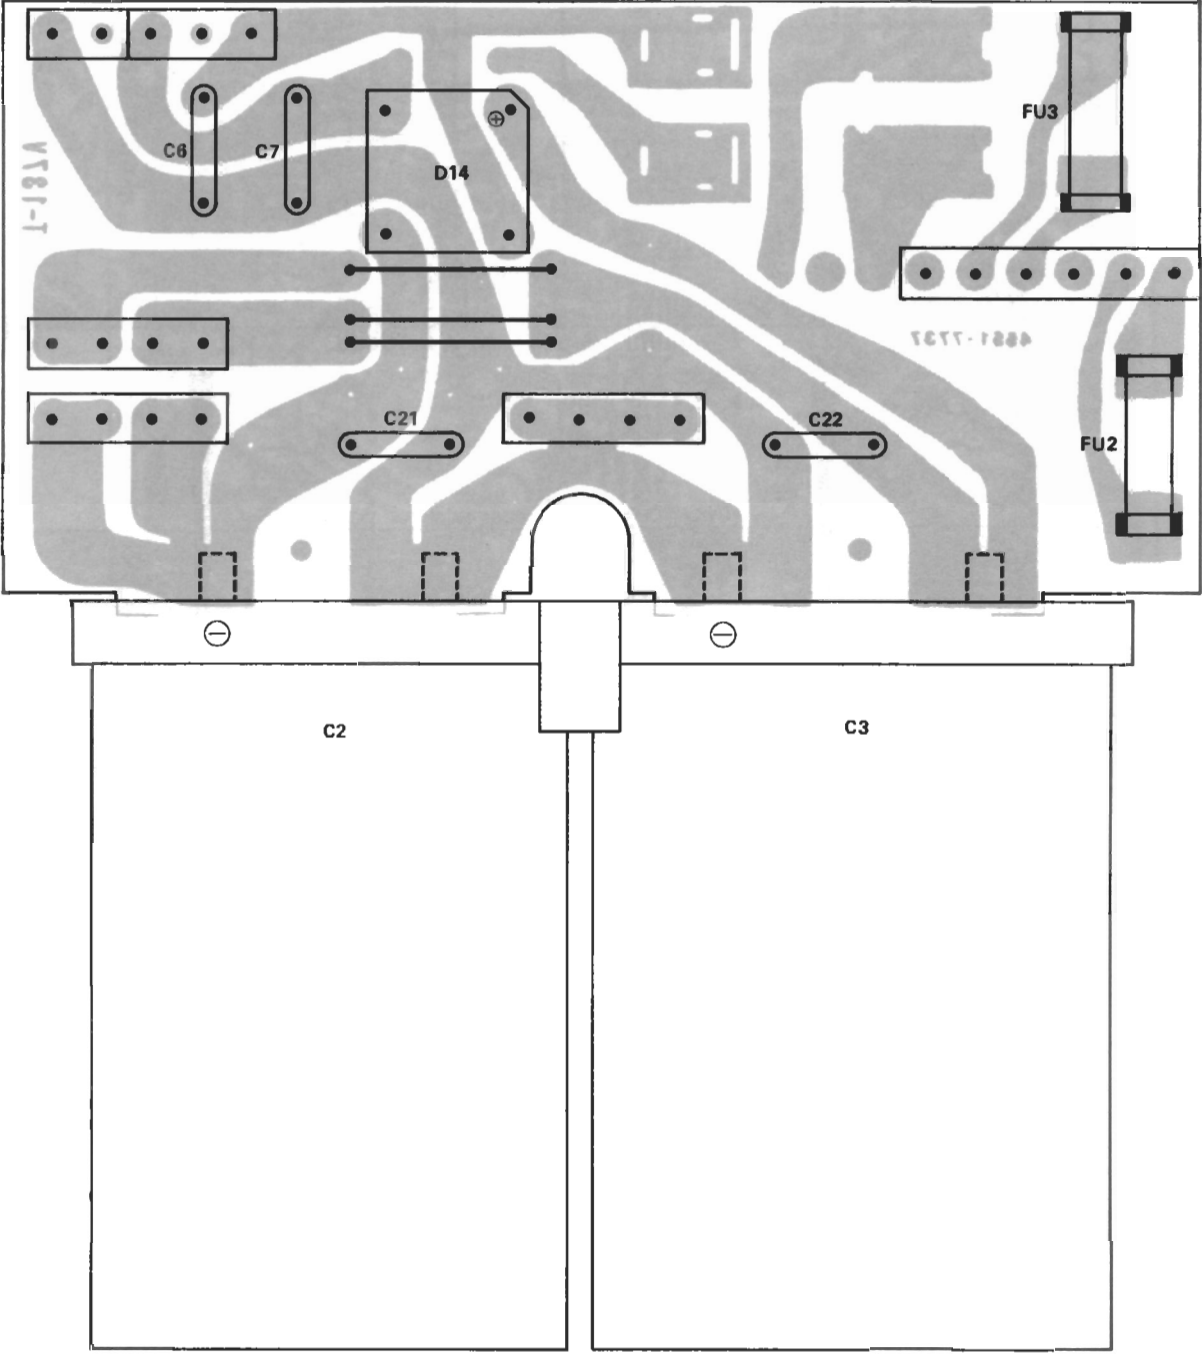

Ref. No.	Part No.	Description
C2, 3	5341-159Z0272	Capacitor, 15000 $\mu$ F +50%–10% 71V Electrolytic
D14	5685-S10VB40	Bridge Silicon Diode, S10VB40
FU2, 3	5732-162031	Fuse, 1.6A 125V

# WIRING DIAGRAM

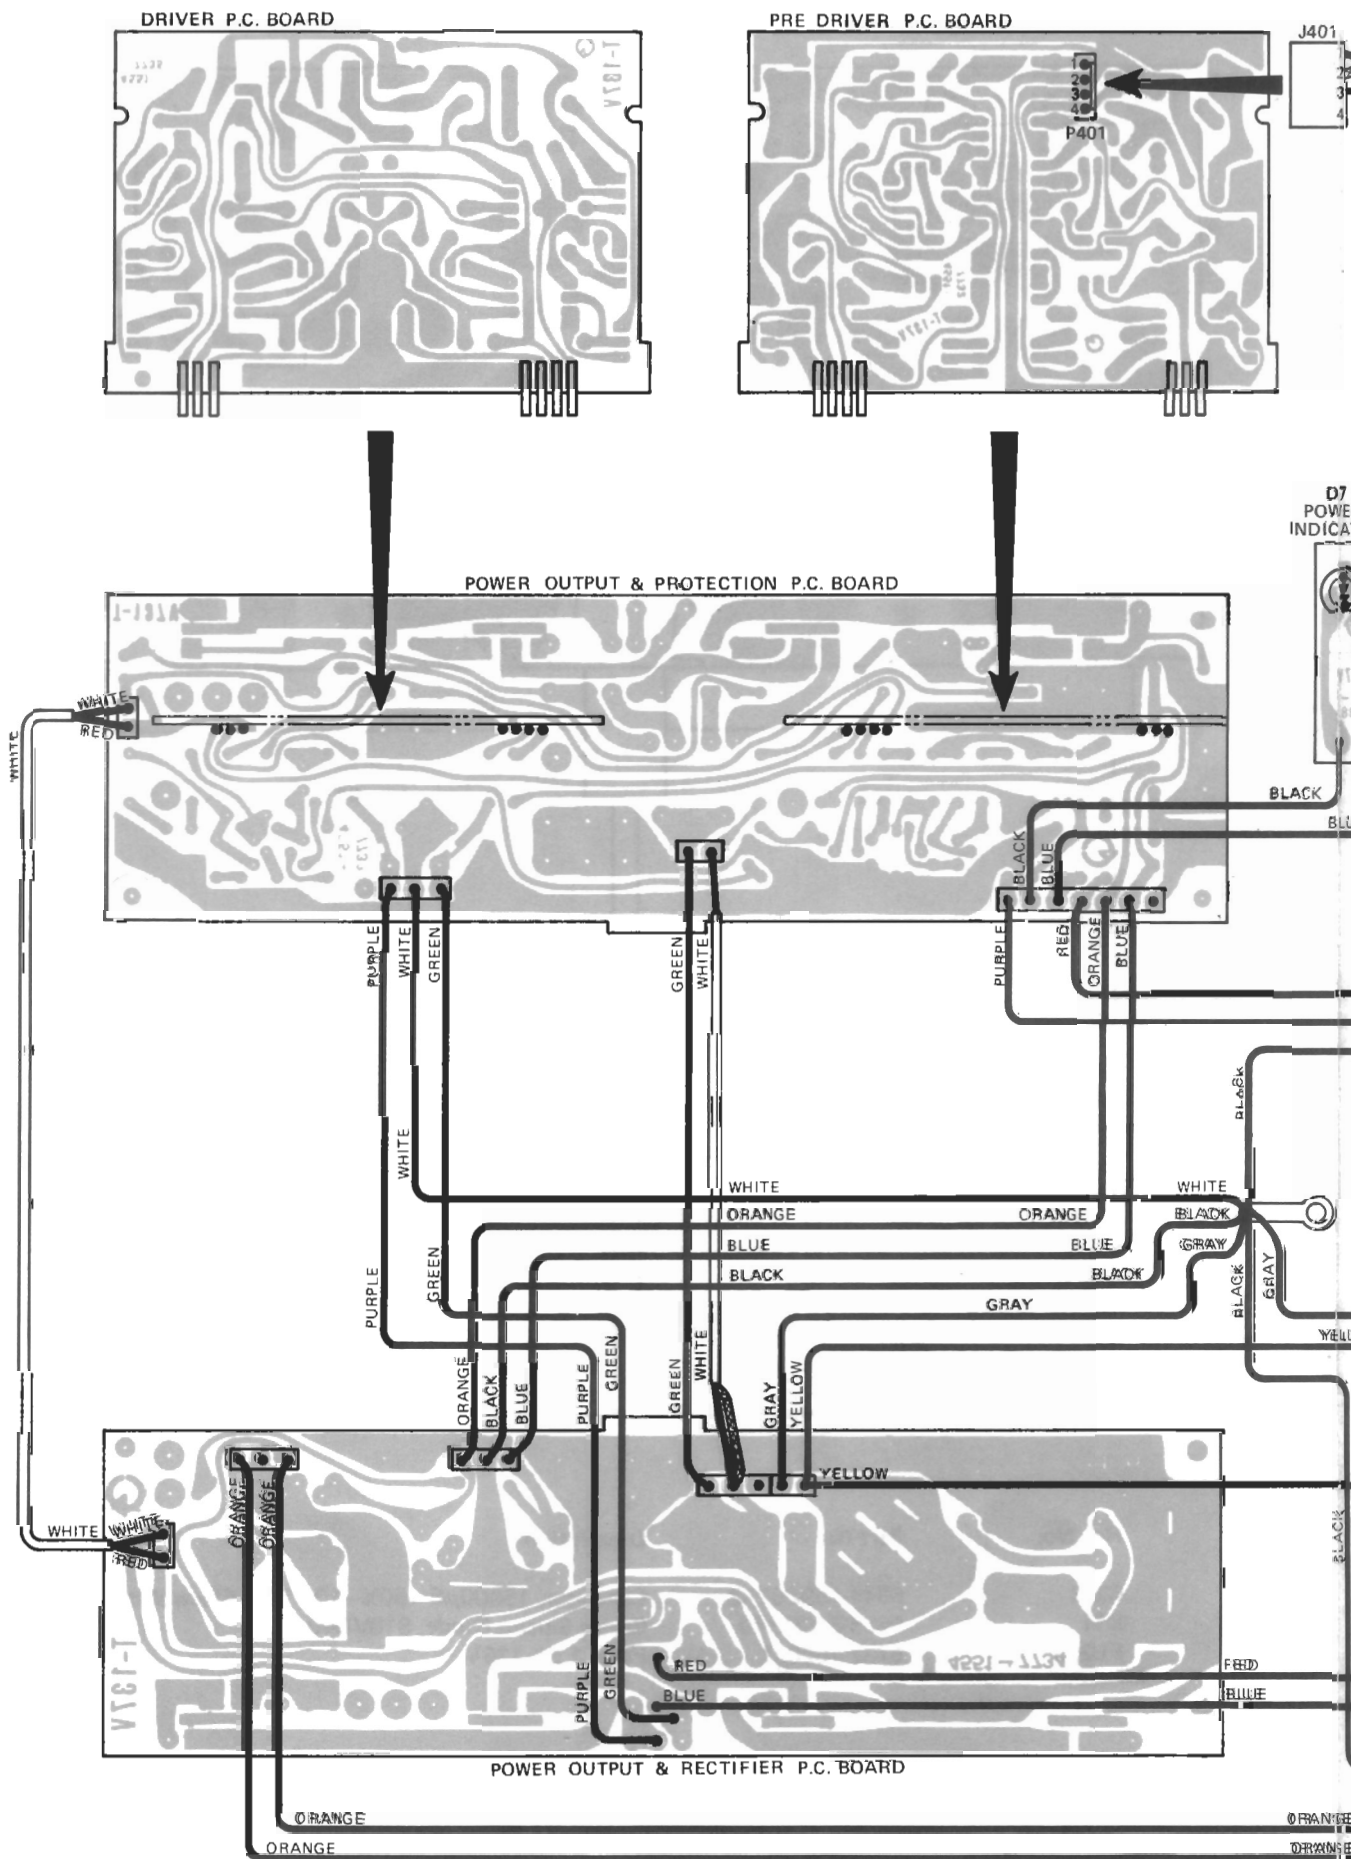

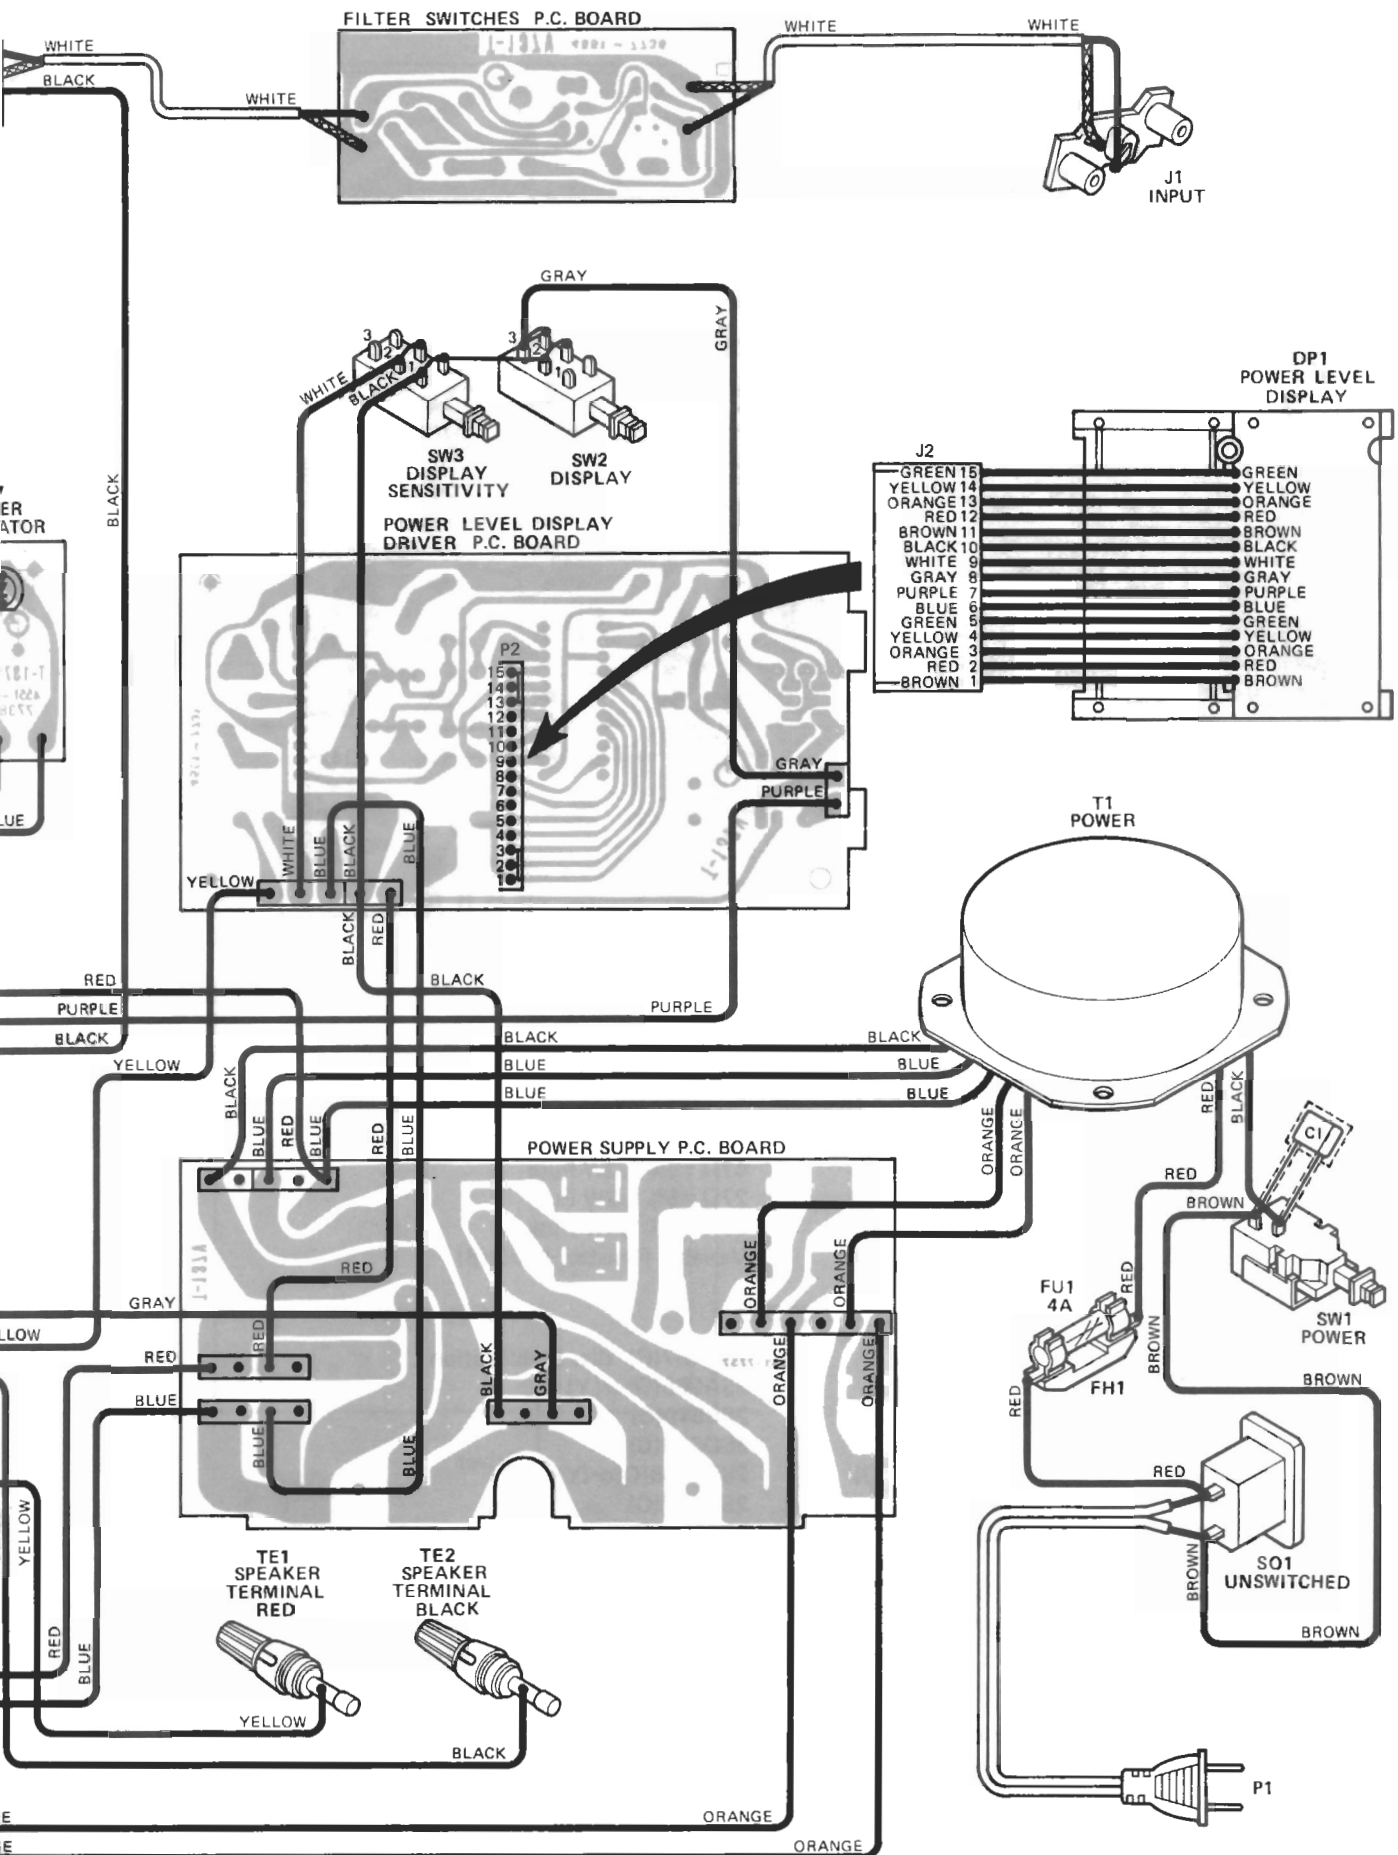

## CHASSIS PARTS LIST

Ref. No.	Part No.	Description
<b>GENERAL UNIT</b>		
101	A414-HK775	Cabinet Top Assembly
102	A424-HK775-A	Cabinet Back Assembly
103	A424-HK775-B	Cabinet Bottom Assembly
104	A443-HK775	Front Panel Assembly
105	A662-HK775	Push Button Assembly, Display, Display Sensitivity
115	1319-7330	Foot
116	1319-7131	Foot
119	1423-00102	Cabinet Bottom
126	1531-03401	Window
<b>ELECTRICAL</b>		
P1	4161-7387	AC Line Cord
SO1	4474-152	External AC Socket, Unswitched
SW1	4431-01017358	Push Switch, Power
SW2, 3	4431-01027169	Push Switch, Display, Display Sensitivity
T1	5584-701348	Power Transformer
FU1	5732-402028	Fuse, 4A 125V
FH1	4472-7128	Fuse Holder
C1	5352-1030959	Capacitor, 0.01 $\mu$ F $\pm$ 20% AC125V Metalized Polyester
J1	4481-5	Jack, Input
TE1	4214-111	Speaker Terminal, Red
TE2	4214-112	Speaker Terminal, Black
DP1	5623-S-5014CT	LED Display Assembly, S-5014CT Power Level
D7	5637-GL2PR1	Light Emitting Diode, GL2PR1 Power Indicator