

# Black and White Camera Module

Be-201 A/B

Operation Guide

Hitachi Denshi, Ltd.

## Table of Contents

1. Introduction .....	2
2. General .....	2
3. Composition .....	2
4. Specifications .....	2
5. Notes to users .....	3
6. External view .....	6
7. Optical dimensions .....	7
8. Installation .....	8
9. Typical connection .....	9
10. Function settings and changes	
10-1 AGC on / off .....	10
10-2 Gamma response .....	11
10-3 Auto electronic shutter on / off .....	12
10-4 Change from fixed to adjustable gain .....	13
10-5 Storage mode change .....	14
10-6 Changes to fixed shutter mode .....	15
10-7 OFD (sub voltage) adjustment .....	16
Attachment : Spectral sensitivity characteristic .....	17

## 1. Introduction

Thank you very much for your purchase of the Hitachi BE-201A/B Black and White Camera Module.

Prior to using this camera, read this manual carefully.

## 2. General

The Hitachi BE-201A/B are black and white camera modules using a 1/4 inch interline CCD. The BE-201A/B are so small that they are most suitable for use with the equipment provided with limited space.

The BE-201B is provided with a lens as standard.

## 3. Composition

- 1) Black and white camera module ..... 1
- 2) Interface cable ..... 1

Note : The standard accessory cable is 300 mm single conductor.

Different length cable requires shielding to avoid external noise.

## 4. Specifications

1) Imaging device	1/4 inch interline CCD
No. of pixels	EIA : 537(H) × 505(V) CCIR : 537(H) × 597(V)
No. of effective pixels	EIA : 510(H) × 492(V) CCIR : 500(H) × 582(V)
Pixel pitch	EIA : 7.15(H) × 5.55(V)um CCIR : 7.3(H) × 4.7(V)um
2) Sensing area	EIA : 3.65(H) × 2.73(V)mm CCIR : 3.65(H) × 2.74(V)mm
3) Signal format	Conforming to EIA or CCIR.
4) Hor. scanning frequency	EIA : 15.734 kHz CCIR : 15.625 kHz
5) Vert. scanning frequency	EIA : 59.94 Hz CCIR : 50 Hz
6) Sync system	Internal
7) Scanning system	2:1 interlaced
8) Video output	1.0 Vp-p, 75 Ω , unbalanced Video: 0.7 Vp-p Sync: 0.3 Vp-p, negative

- |                             |                                 |
|-----------------------------|---------------------------------|
| 9) Horizontal resolution    | EIA : 380 TVL<br>CCIR : 370 TVL |
| 10) Signal-to-noise ratio   | Better than 46dB (AGC:OFF)      |
| 11) Auto electronic shutter | Provided                        |
| 12) AGC                     | Max. 18 dB approx.              |
| 13) Integration mode        | Field integration mode          |
| 14) Gamma correction        | 0.45                            |
| 15) Minimum illumination    | 0.5 lx, f1.4                    |
| 16) Power supply            | 9 VDC $\pm$ 0.5 V               |
| 17) Power consumption       | 100mA approx.                   |
| 18) Standard lens           | BE-201B only                    |

		Std.	Option		Under development	
Kind		Glass	Glass	Glass	Pinhole	Pinhole
Focal distance (mm)		3.8	2.5	6.0	3.2	3.7
f-value		2.0	2.0	2.0	4.5	4.5
Angular field of view (Deg)	H	52.9	83.8	33.8	66.9	54.2
	V	39.6	61.9	25.3	49.8	40.6

- |                        |  |
|------------------------|--|
| 19) Ambient conditions |  |
| Operating              | -5 to 45 °C, 90 %RH or less  |
| Storage                | -10 to 60 °C, 70 %RH or less   |
| 20) Dimensions         | 32(W) $\times$ 32(H) $\times$ 11(D)mm<br>BE-201B : 23(D)mm                       |
| 21) Mass               | BE-201A : 6 g approx. (w/o cable)<br>BE-201B : 22 g approx. (w/lens & w/o cable) |

## 5. Notes to users

### 3-1 Power supply

- Connect a 9V DC voltage (8.5 to 9.5V) from an external regulated DC power supply.
- Use a stable power supply without ripple and noise.
- Prior to turning on the power switch, check that the polarities of the power cable are correct, referring to the connection diagram (Page 9).

### 3-2 To protect CCD (sensor)

- Do not touch the glass surface of the CCD sensor to avoid deterioration in picture quality due to dirt and scratches.
- If the glass surface of the sensor should become dusty or dirty, remove dust or dirt carefully with a cotton-tipped applicator. Do not wipe the surface with dry cloth or paper tissue to avoid possible damage to the glass surface by static electricity.

### 3-3 Protection of camera

- Do not use or store the camera under direct sunlight, at a place exposed to rain or snow, or at a place where flammable or corrosive gas is present.
- When housing the camera in a camera case, use the utmost care regarding rise of internal temperature.

When casing the camera, the temperature normally rises by 10 to 20°C, compared with the outside air temperature. The camera operates in the temperature range from -5 to 45°C. If the camera is used or left in high temperature environment for hours, the life of the camera may be shortened.

- Do not drop the camera. Do not apply strong shock or vibration to the camera.
- Before connecting or disconnecting a connector, turn off the camera and be sure to hold connector body to connect or disconnect the connector.

### 3-4 Camera arrangement

Mutual interference noise can occur if multiple cameras are arranged in close proximity. Separate the cameras to the extent possible.

When camera units are installed directly into other equipment, external noise can prevent a normal picture. In such cases, shield the camera units.

The camera can be damaged by static electricity. Use ample care when installing and arranging.

### 3-5 Auto electric shutter

In regions using 50 Hz power line frequency, flicker can appear on the monitor screen from light sources such as fluorescent or mercury. In such cases, release the auto electronic shutter.

### 3-6 Phenomena inherent to CCD imaging device

Following are phenomena inherent to a CCD imaging device, and not defects.

#### 1) Smear and blooming

When strong light (lamp, fluorescent lamp, reflected light, etc.) is shot, pale bands are displayed vertically above and below the light.

In this case, change the angle of the camera so that such strong light does not enter the camera through the lens.



#### 2) Fixed pattern noise

When the camera is operated in a high temperature, fixed pattern noise may appear on the entire screen.


The higher the sensitivity of camera, the more this fixed pattern noise appears.

#### 3) Moire




When fine patterns are shot, moire may be displayed.

3-7 The CE mark is required when exporting to Europe. Obtain the necessary authorization for the customer's system. Enclose the camera in a shielded case and use shielded cable

## 6. External view

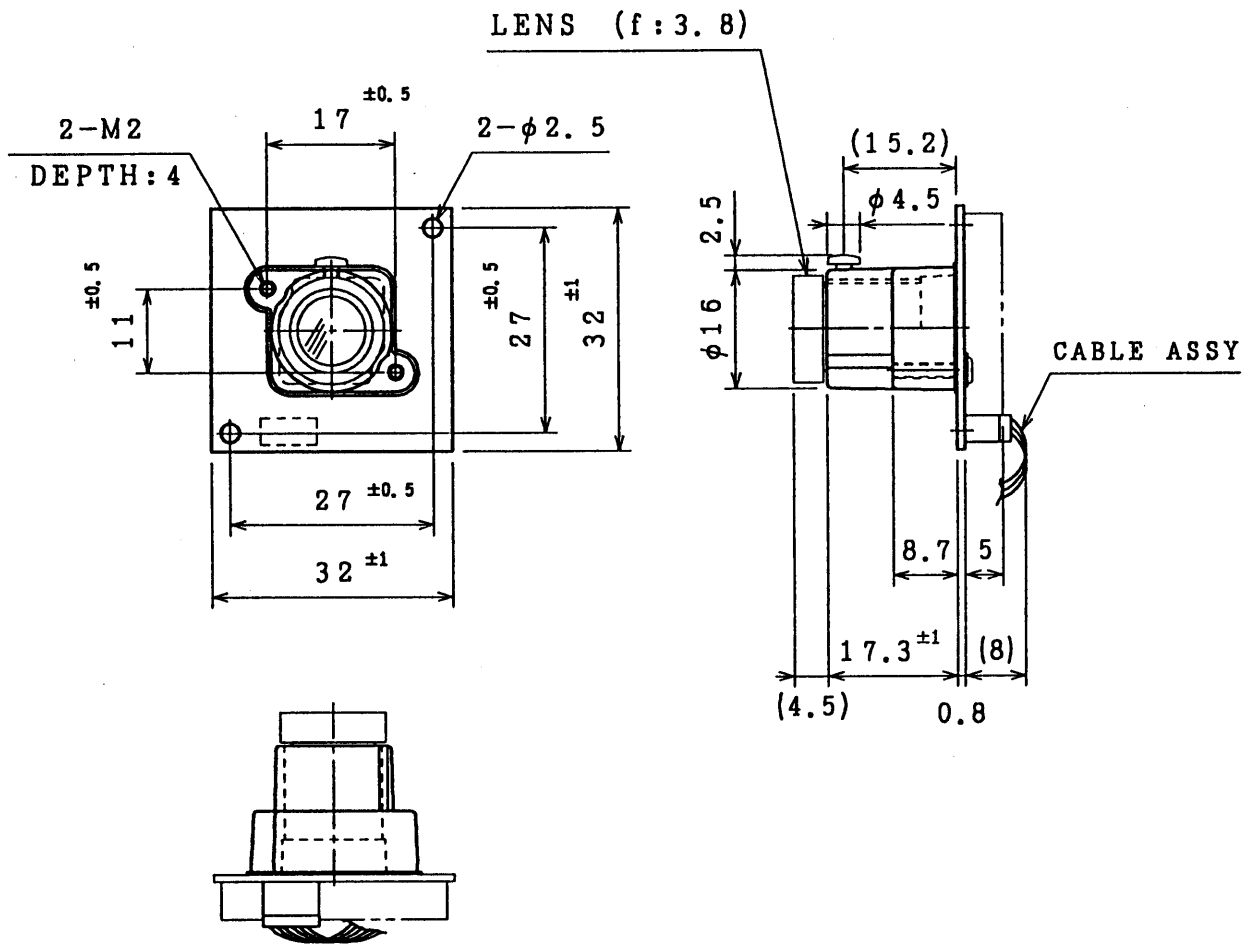


Dimensions (BE-201B)

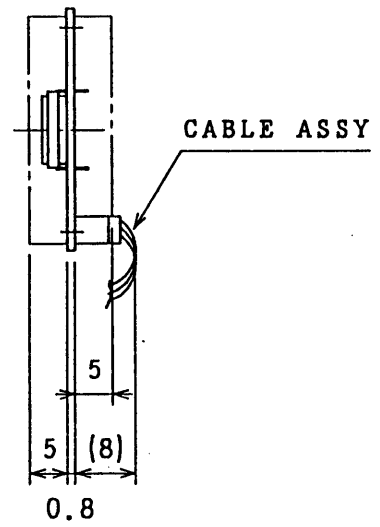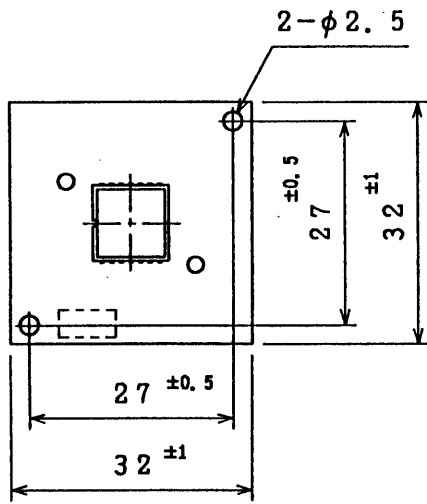

Dimensions (BE-201A)

## 7. Optical dimensions

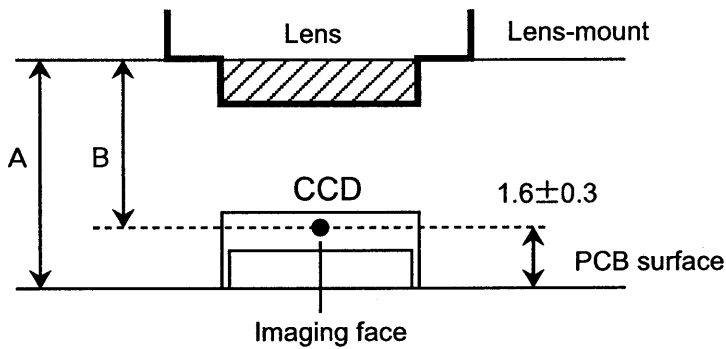

Extension of optical path due to the thickness of CCD glass is considered.

Mounts	A (mm)	B (mm)
C-mount	$19.4 \pm 0.7$	17.776
CS-mount	$14.4 \pm 0.7$	12.75

### Reference


Lens flangeback in air	
Mounts	B (mm)
C-mount	17.526
CS-mount	12.5




## 8. Installation

- (1) When installing this unit in a housing or other device, secure by using the holes indicated in the figures.

BE-201A

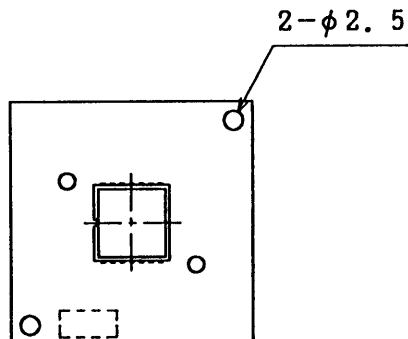


BE-201B

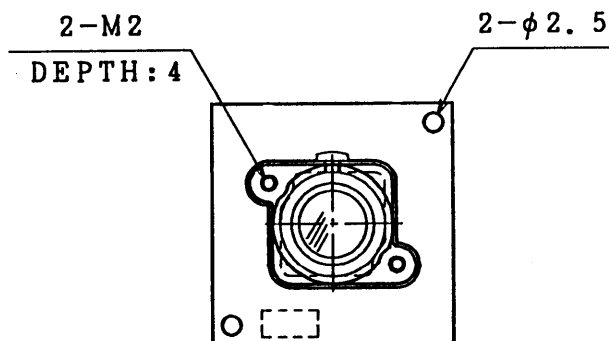

Note : When connecting or disconnecting a connector, use care not to apply excessive force to the printed circuit board.

When the board is warped, soldering may be peeled off or chip components may be broken.

## 9. Typical connection

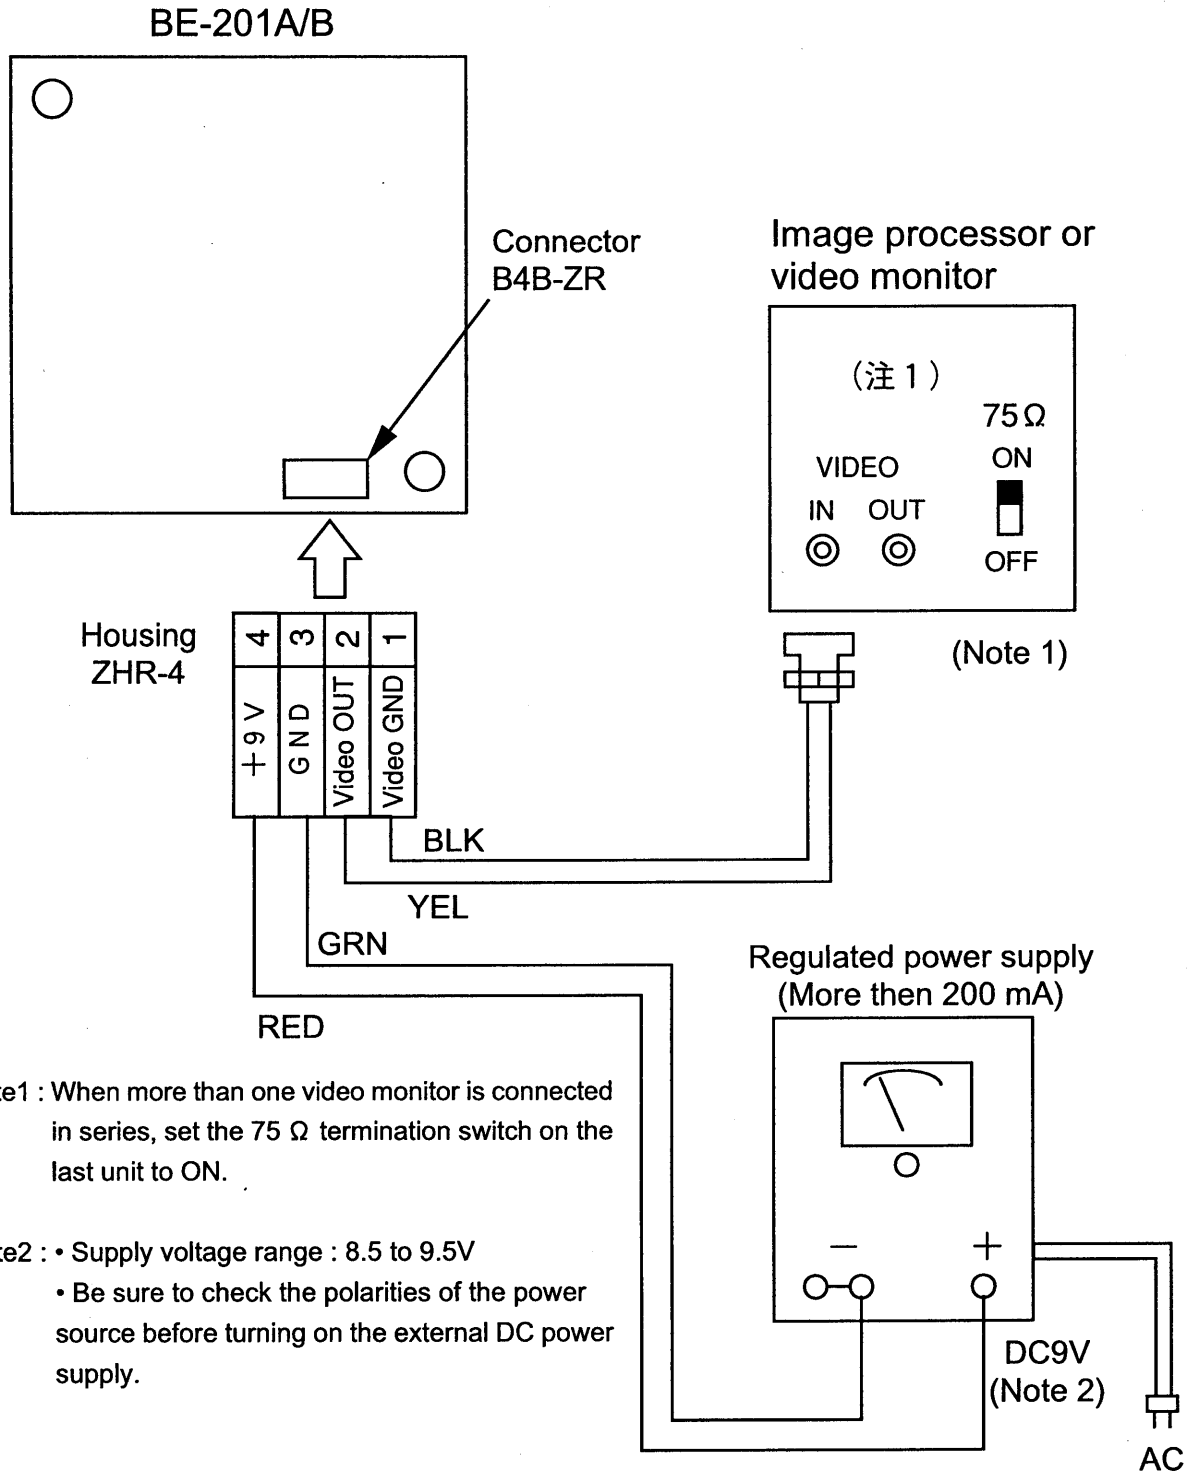

## 10. Function setting and changes

When changing the function settings, perform the work with thorough care. Be sure to use anti-static measures such as a grounding band. Also observe safety precautions when soldering to avoid burn and fire hazards.

Hitachi Denshi assumes no liability for damage or injury resulting from such work. Since the function setting can be provided at the time of shipment, consult a Hitachi Denshi representative.

### 10-1 AGC on/off


The AGC is set to off at time of shipment. The AGC can be set to on by turning the control.



Factory setting : AGC off



Turn clockwise : AGC on

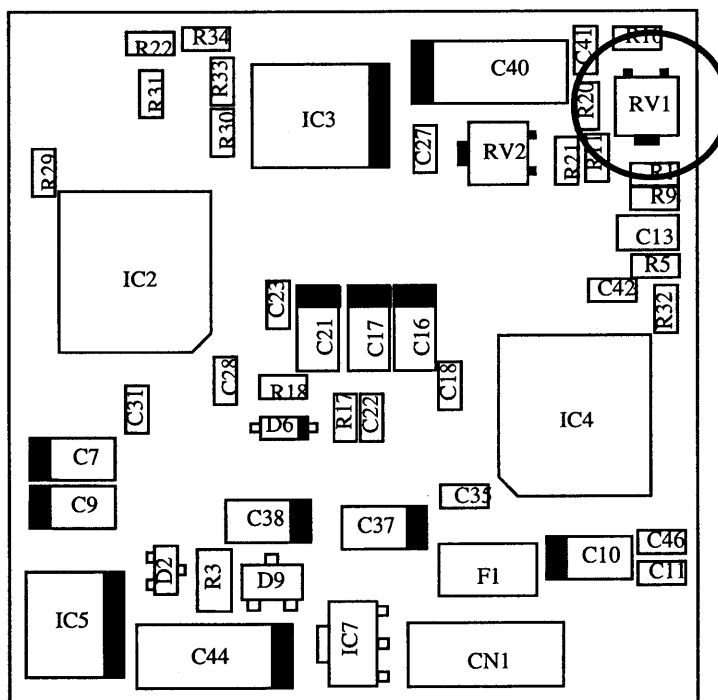

Location of chip resistor

## 10-2 Gamma response

The factory setting is gamma on (0.45). If necessary, the gamma response can be changed as follows.


Change the gamma response by changing the chip part.

Gamma ( $\gamma$ ) response	C11	C41
On (0.45)	0.1 $\mu$ F	Absent
Off (1.0)	Remove	0.1 $\mu$ F

Remove the C11 chip and install C41 (C11 and C41 are the same part)

0.1  $\mu$ F : Part code CCG0678

Description GRM39F104Z16P

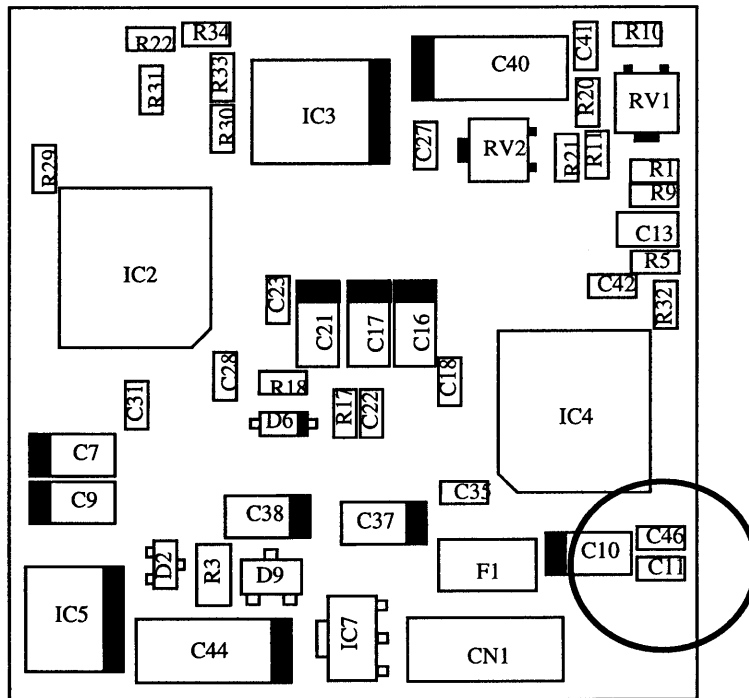


Location of chip capacitors

### 10-3 Auto electronic shutter on / off

Factory setting for auto electronic shutter is on. If necessary, it can be set to off.  
Install the R30 chip to set the auto electronic shutter to off.

Auto electronic shutter	R30
On	Absent
Off	0 Ω

0 Ω : Part code RME1784  
Description ERJ3GWYJ0R00V

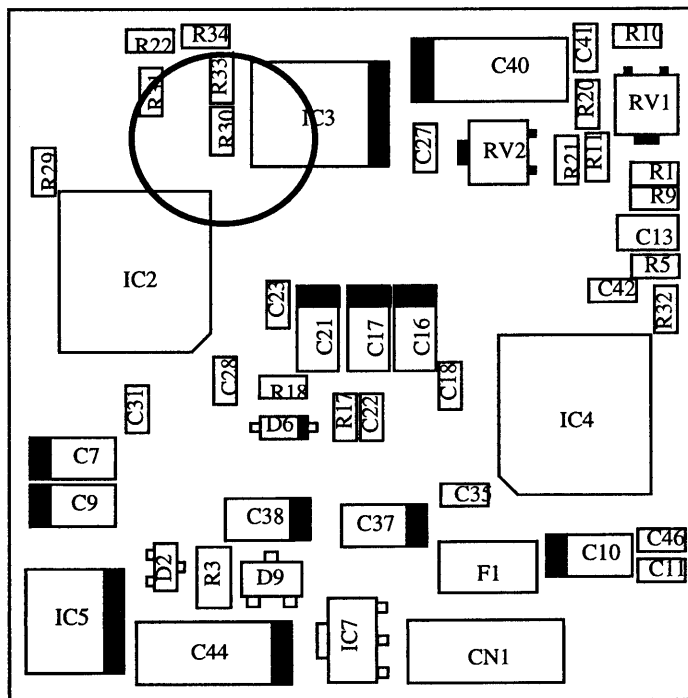

Location of chip resistors

### 10-4 Change from fixed to adjustable gain

To change from fixed to adjustable gain, change the chip parts indicated below.


Gain	R1	R9	R10	R11	R32
AGC	Absent	10k $\Omega$	2700 $\Omega$	1800 $\Omega$	0 $\Omega$
Fixed	0 $\Omega$	Remove	220 $\Omega$	220 $\Omega$	Remove

0  $\Omega$  : Part code RME1784

Description ERJ3GEYJ0R00V

220  $\Omega$  : Part code RME1801

Description ERJ3GEYJ221V

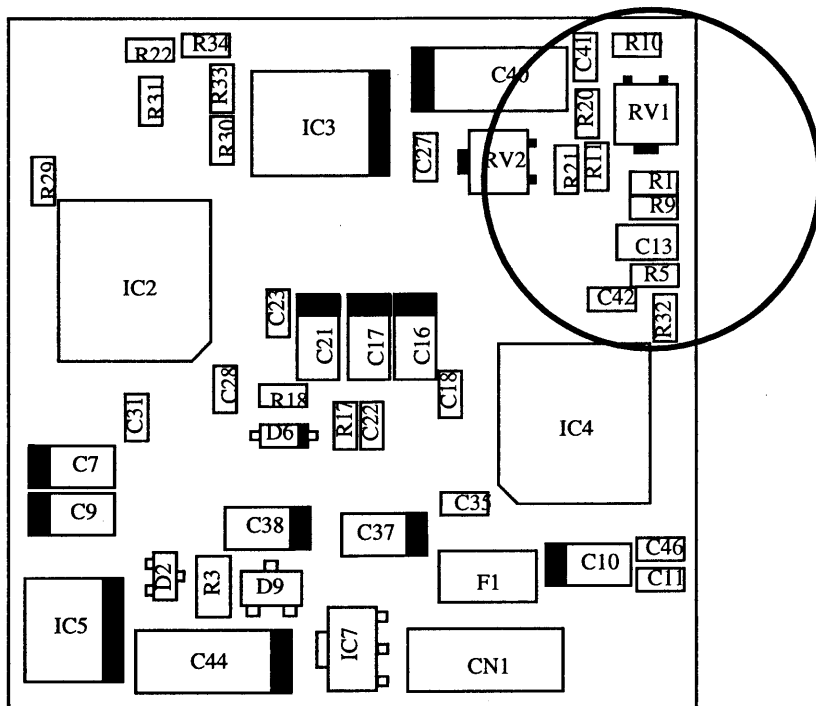

Location of chip resistors


### 10-5 Storage mode change

The storage mode can be changed by installing the R31 chip.

Storage mode	R31
Field	Absent
Frame	0 Ω

0 Ω : Part code RME1784

Description ERJ3GEYJ0R00V

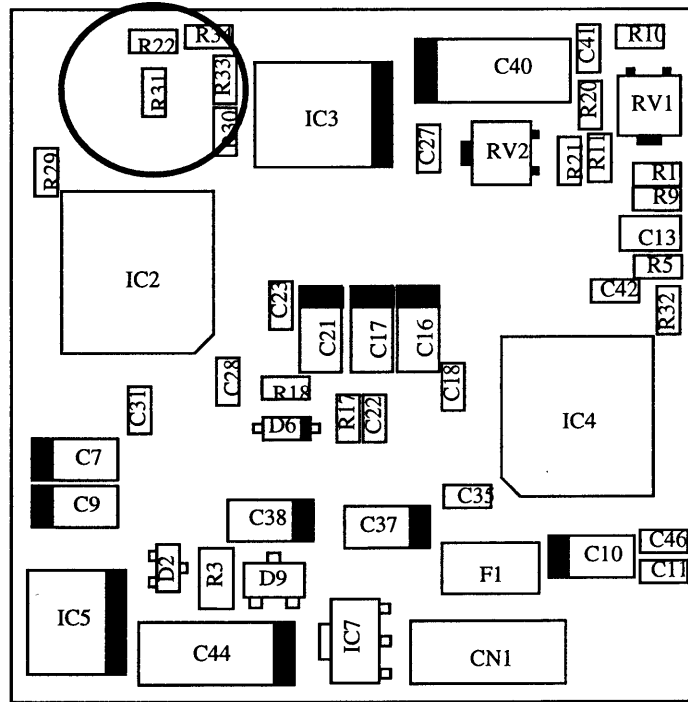

Location of chip resistor


### 10-6 Change to fixed shutter mode

The fixed shutter mode can be changed by replacing the chip parts indicated below.


Mode	R16	Q1	R23	R24	R25	R26	R27	R28	R30	R33	R34	
Auto electronic shutter mode	3300Ω	UMX1	2200Ω	2700Ω	47kΩ	2200Ω	5600Ω	47kΩ	Absent	Absent	Absent	
Normal mode	3300Ω	UMX1	2200Ω	2700Ω	47kΩ	2200Ω	5600Ω	47kΩ	0Ω	Absent	Absent	
Shutter speed	EIA :1/100 CCIR:1/120 (Flickerless)	0Ω	Remove	0Ω	0Ω	Remove	0Ω	0Ω	Remove	Absent	0Ω	Absent
	1/250	0Ω	Remove	0Ω	0Ω	Remove	Remove	Remove	0Ω	Absent	0Ω	Absent
	1/500	Remove	Remove	0Ω	0Ω	Remove	0Ω	0Ω	Remove	Absent	0Ω	0Ω
	1/1000	Remove	Remove	0Ω	0Ω	Remove	Remove	Remove	0Ω	Absent	0Ω	0Ω
	1/2000	0Ω	Remove	Remove	Remove	0Ω	0Ω	0Ω	Remove	Absent	0Ω	Absent
	1/5000	0Ω	Remove	Remove	Remove	0Ω	Remove	Remove	0Ω	Absent	0Ω	Absent
	1/10000	Remove	Remove	Remove	Remove	0Ω	0Ω	0Ω	Remove	Absent	0Ω	0Ω
	1/100000	Remove	Remove	Remove	Remove	0Ω	Remove	Remove	0Ω	Absent	0Ω	0Ω

0Ω : Part code RME1784

Description ERJ3GEYJ0R00V

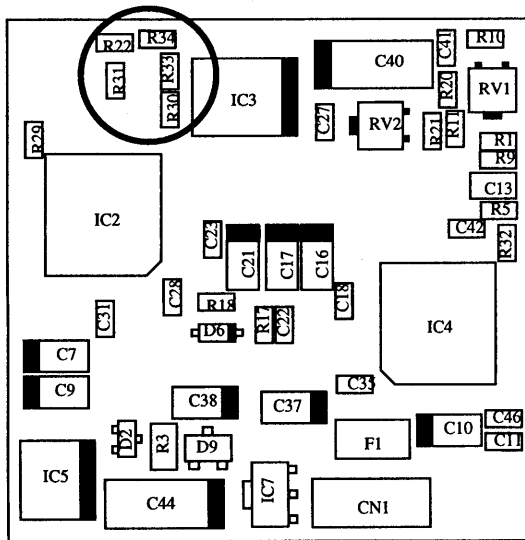

(Side A)

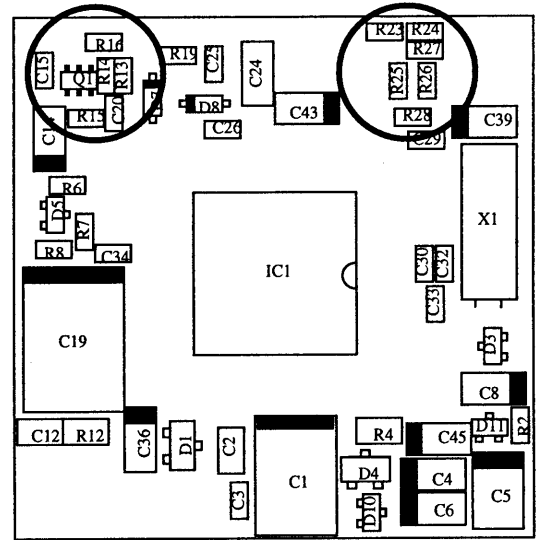

(Side B)

Location of chip resistors



### 10-7 OFD (sub voltage) adjustment

Use care not to disturb the OFD (sub voltage) control. If disturbed, readjust as follows.


- 1) Supply power and shield the CCD from light.
- 2) Observe the code marked on the connector and note the voltage from the table.

<b>V<sub>SUB</sub> code</b>	-	=	0	1	2	3	4	6	7	8	9	A	C	d
<b>Actual value</b>	5.0	5.25	5.5	5.75	6.0	6.25	6.5	6.75	7.0	7.25	7.5	7.75	8.0	8.25


<b>V<sub>SUB</sub> code</b>	E	f	G	h	J	K	L	m	N	P	R	S	U	V
<b>Actual value</b>	8.5	8.75	9.0	9.25	9.5	9.75	10.0	10.25	10.5	10.75	11.0	11.25	11.5	11.75

<b>V<sub>SUB</sub> code</b>	W	X	Y	Z
<b>Actual value</b>	12.0	12.25	12.5	12.75


Example : L = 10.0V



- 3) While measuring the voltage at the position indicated by the arrow, turn RV2 to set the voltage as read from the table.

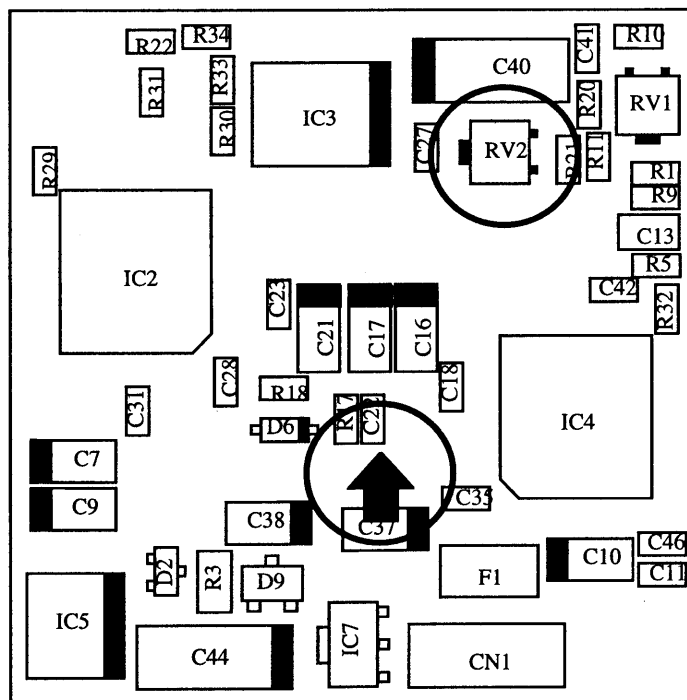

Attachment : Spectral sensitivity characteristic

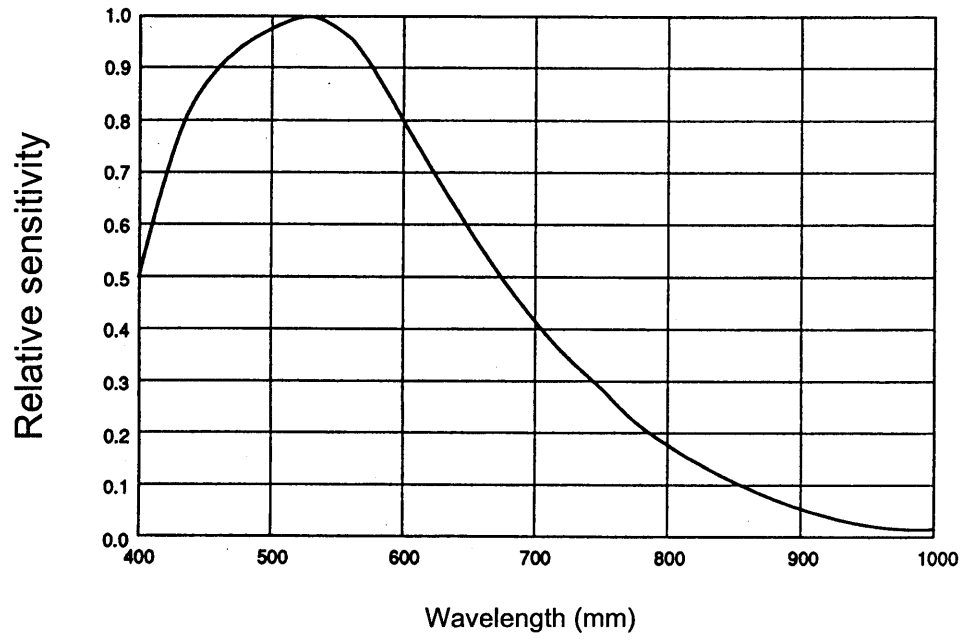

# NOTICE

To qualify for CE mark, this camera module must be contained in a metal housing.



 **Hitachi Denshi, Ltd.**