


Block diagram

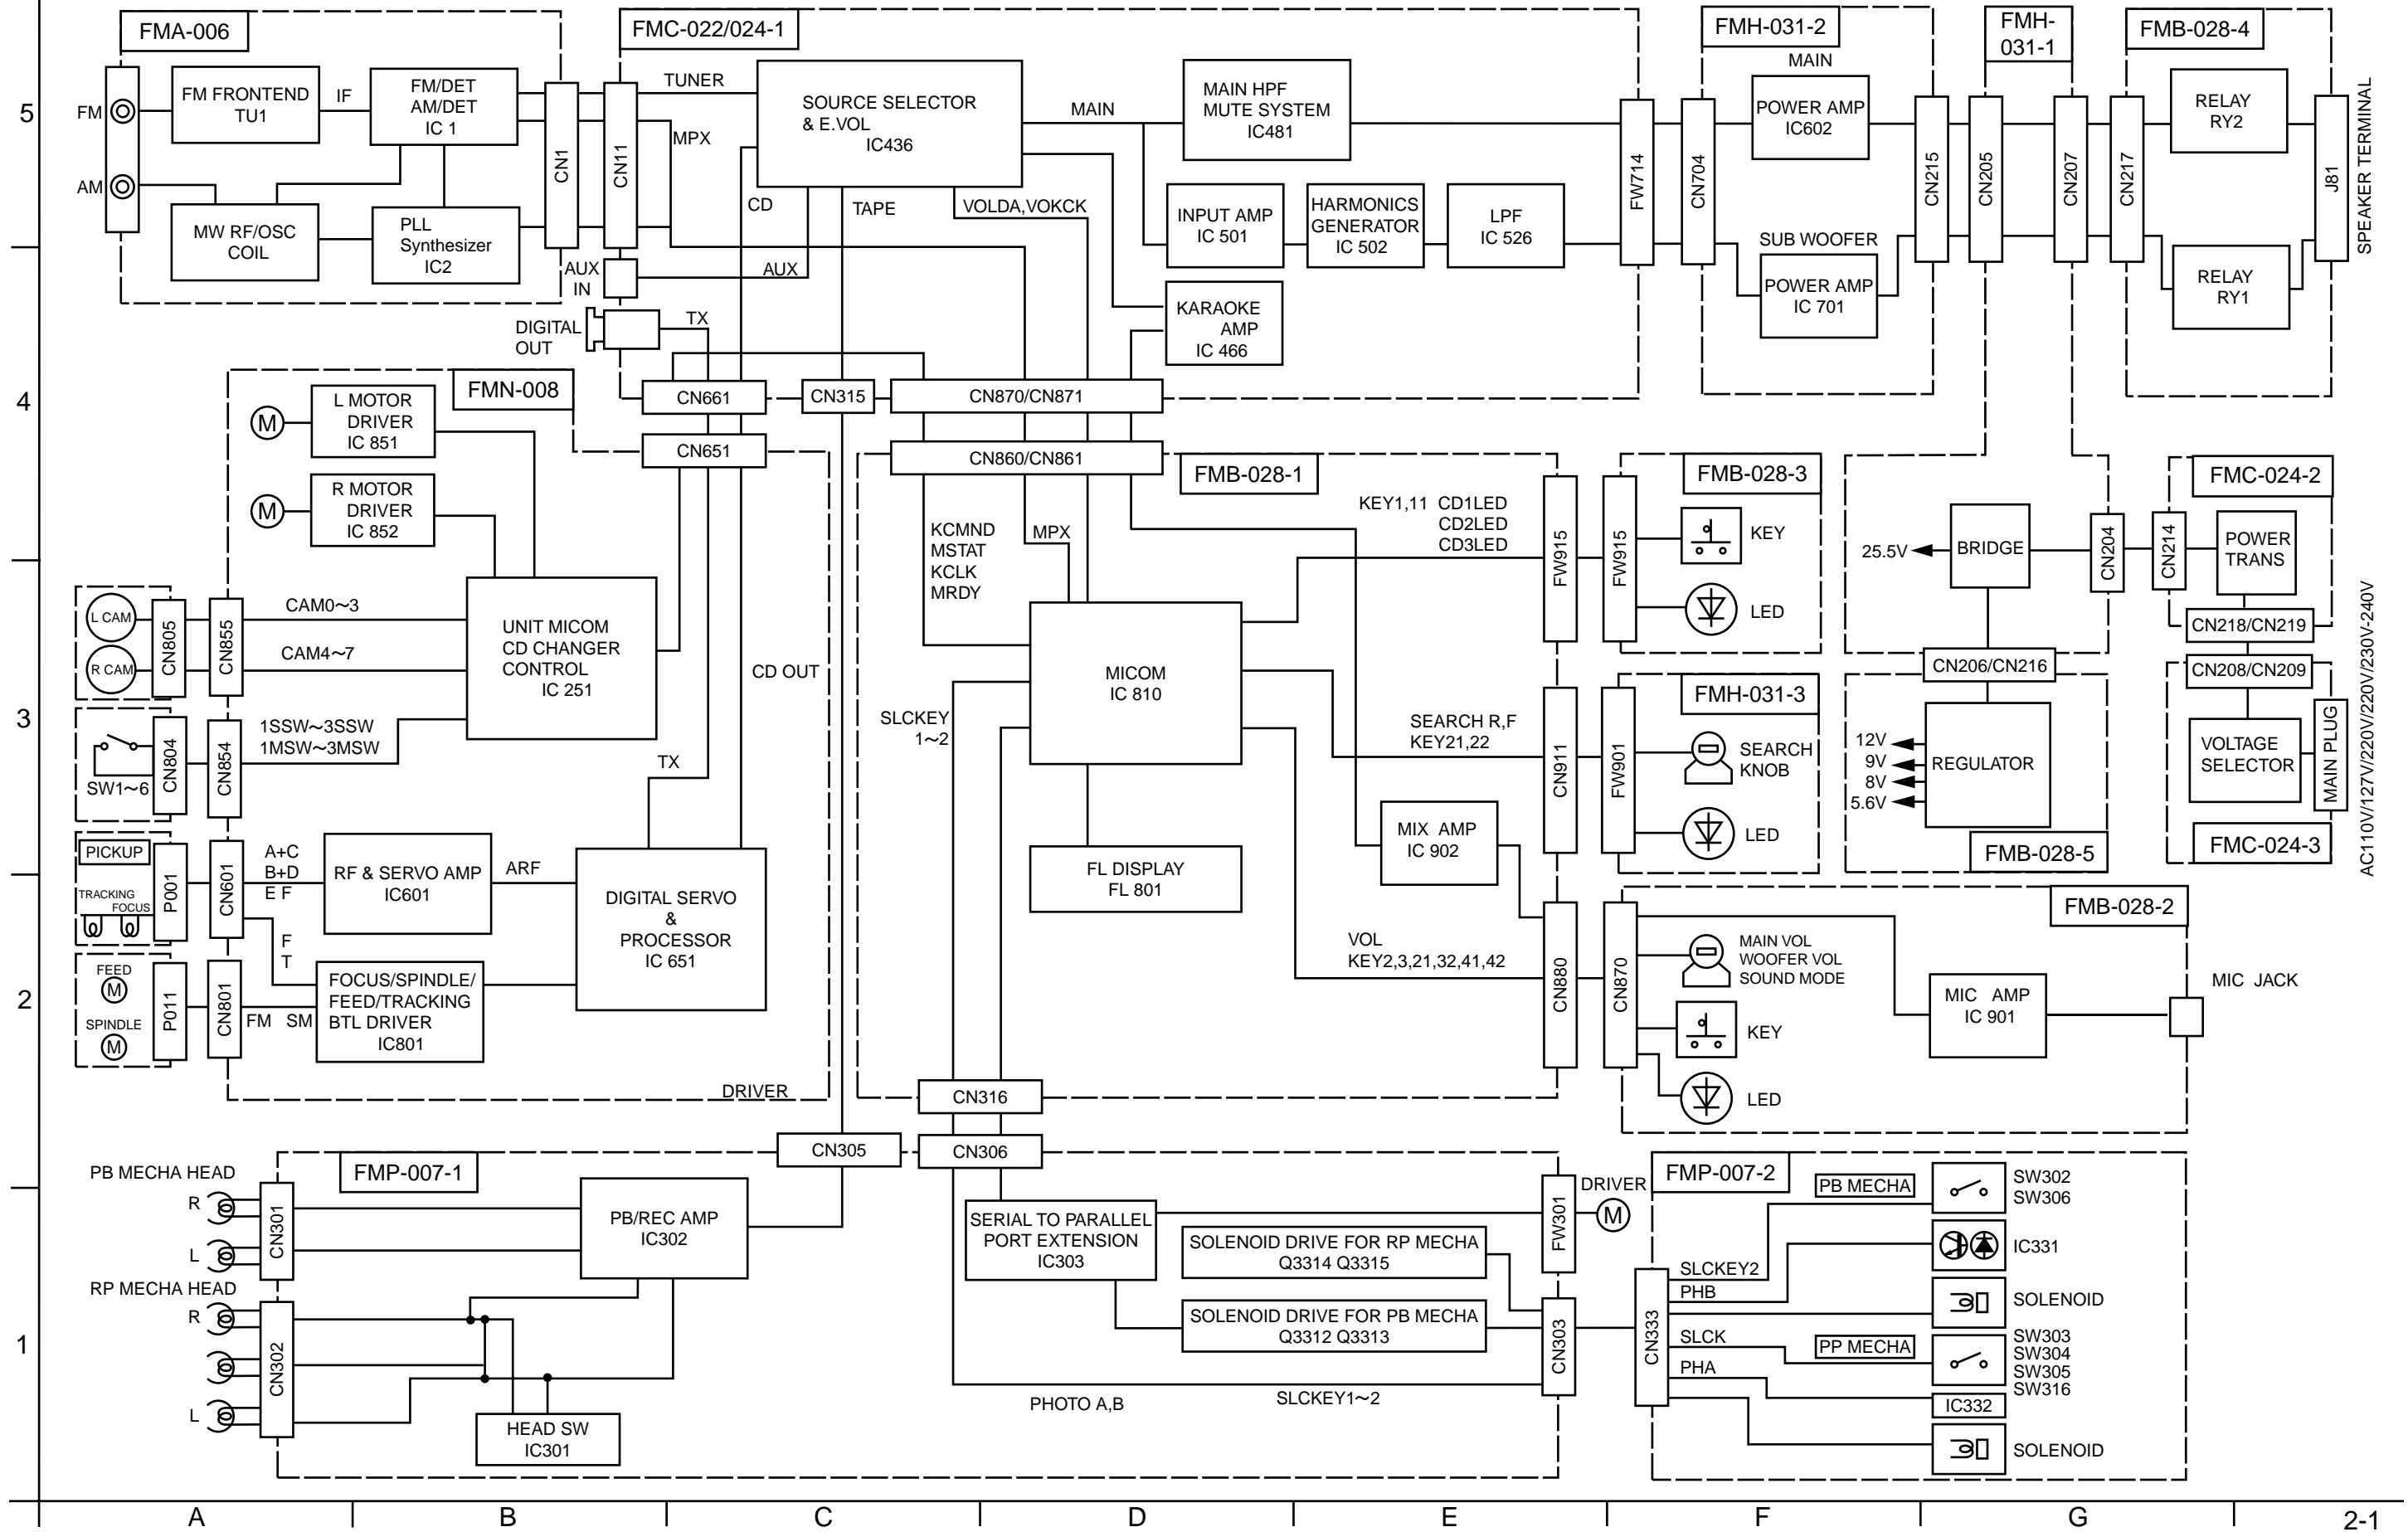


AC110V/127V/220V/230V/240V


Standard schematic diagrams

Power supply section

POWER SUPPLY BLOCK

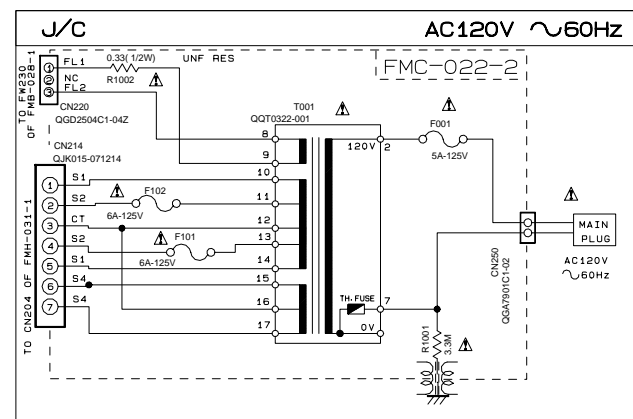

POWER SUPPLY BLOCK

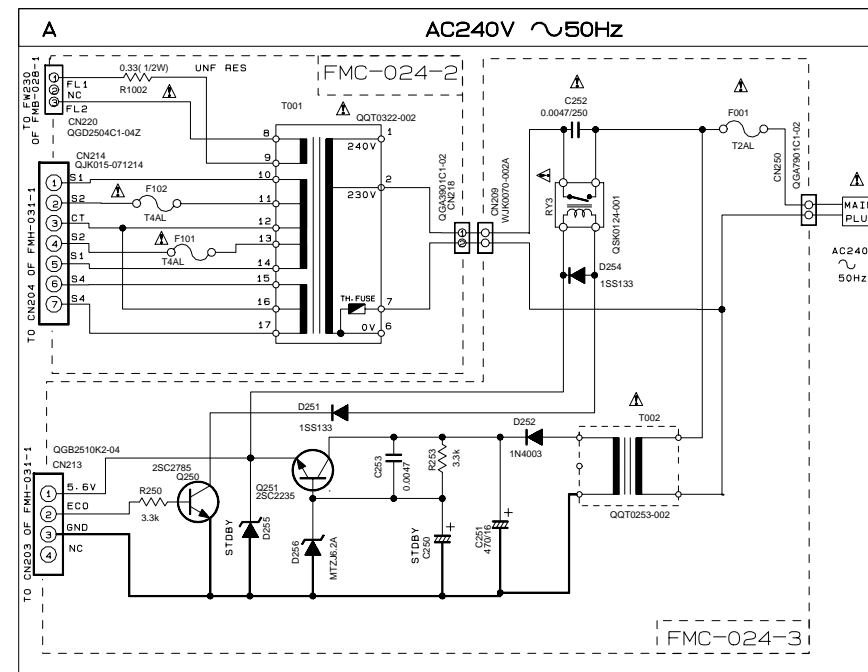


EXPLANATION OF OVERALL OF SCHEMA.


MODEL MX-GT90 US/UW/UY

SHEET NUMBER	MODEL NUMBERS TO BE APPLIED	CIRCUITS DESCRIPTION
1/8	MX-GT90	PRIMARY WITH MAINS TRANSFORMER
2/8	MX-GT90	DC REGULATORS/AUDIO OUTPUT
3/8	MX-GT90	EXTERNAL INPUT, SOURCE SELECTOR SWITCH
4/8	MX-GT90	FL DISPLAYS, SYSTEM CONTROL LSI
5/8	MX-GT90	USER CONTROL KEYS, MIC AMP
6/8	MX-GT90	CD SERVO AND CD SYSTEM CONTROL CD CHANGER MECHANISM CONTROL
7/8	MX-GT90	TAPE DECK MECHANISM CONTROL TAPE CIRCUITS SUCH AS PRE-AMP AND BIAS
8/8	MX-GT90	TUNER RF/IF/FM MULTIPLEX


POWER SUPPLY BLOCK

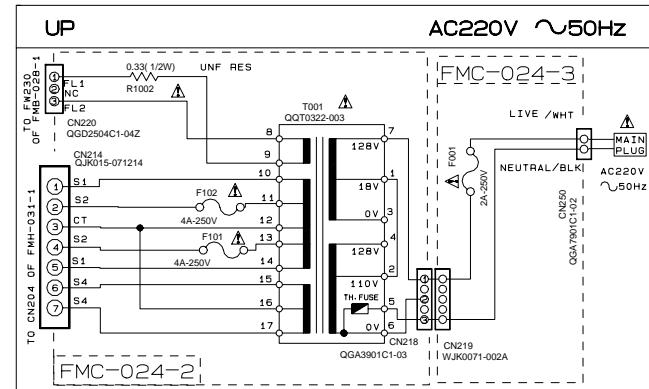

POWER SUPPLY BLOCK

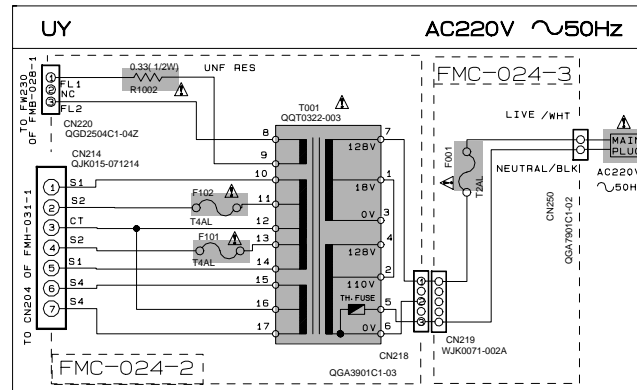


POWER SUPPLY BLOCK

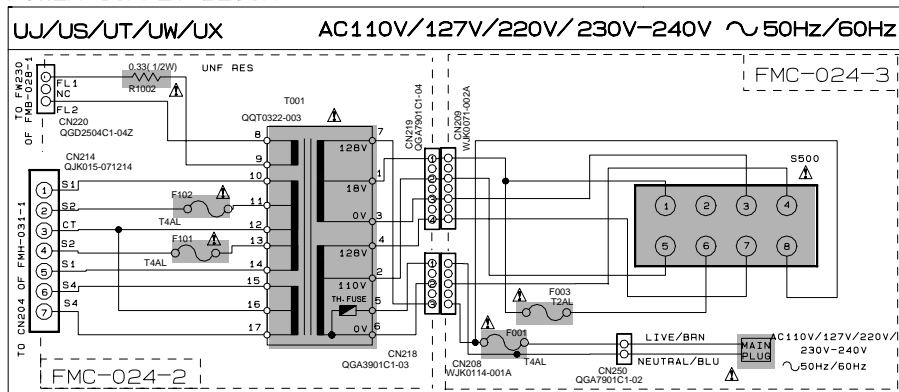

VERSION CODES

- J U.S.A.
- C CANADA
- A AUSTRALIA
- UJ MILITARY
- UP KOREA
- UT TAIWAN
- UX SAUDI ARABIA
- UY ARGENTINA
- UM SOUTH AMERICA EXCEPT ARGENTINA
- US SINGAPORE AND UNIVERSAL EXCEPT ALL OF ABOVE

VOLTAGE SELECTOR LOCATION

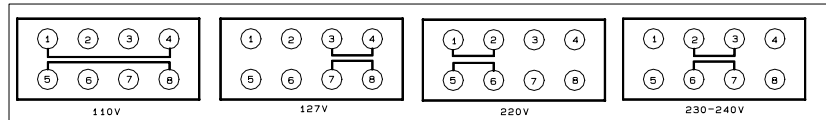

▲ Parts are safety assurance parts. When replacing those parts make sure to use the specified one.

5

4

3

2

1

A

B

C

2-2 D

D


E

F

G

H

DC regulation & Audio output section

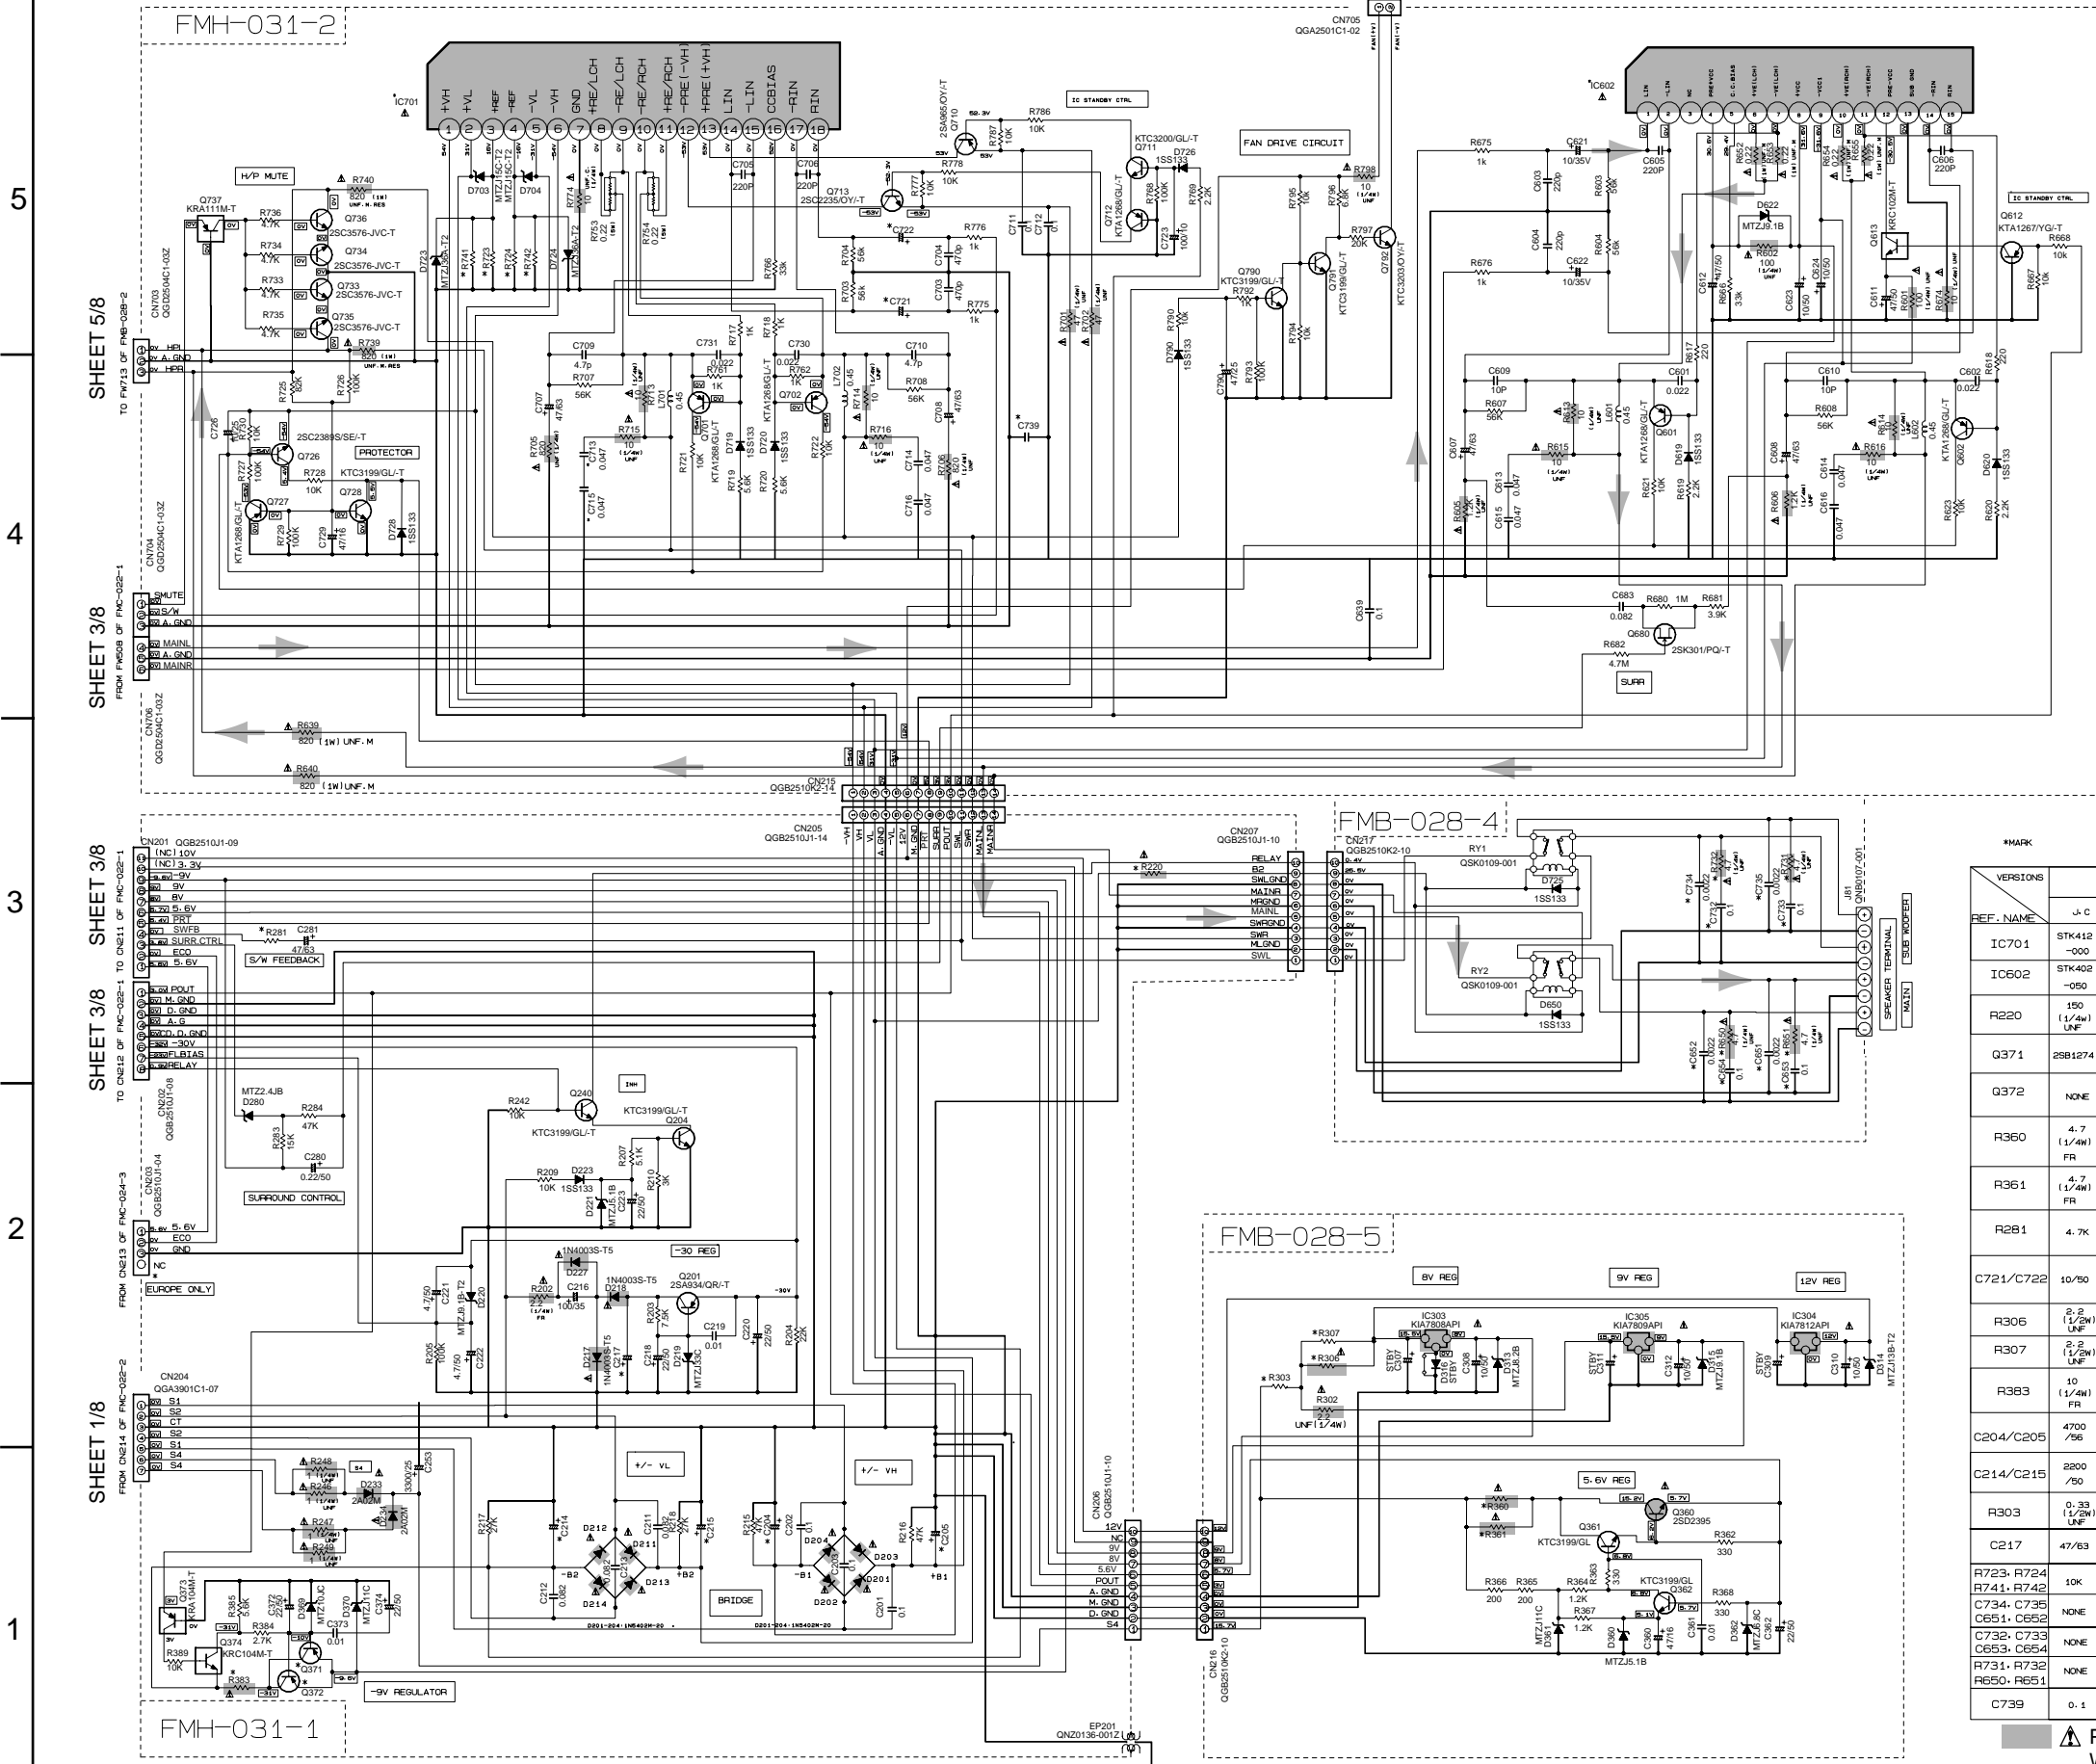

NOTES
 1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER OR OSCILLOSCOPE WITHOUT INPUT SIGNAL.
 CONDITION — AUX MODE, VOL. knob OFF
 2. UNLESS OTHERWISE SPECIFIED
 RESISTORS ARE 1/4W ±5% CARBON RESISTOR.
 ALL RESISTANCE VALUES ARE IN OHMS.
 ALL CAPACITORS ARE CERAMIC CAPACITOR OR MYLAR CAPACITOR.
 ALL CAPACITANCE VALUES ARE IN PICO(F).
 ALL INDUCTANCE VALUES ARE IN MILLI(H).
 ALL ELECTROLYTIC CAPACITORS ARE SHOWN IN THE FORM OF CAPACITANCE (μF)/VOLTAGE (V).
 ALL DIMENSIONS ARE IN MILLI(M).

MARK	MX-G70/G71R				MX-GT80				MX-GT90			
	J-C	A-E	U	UT	J-C	A-E	U	UT	J-C	A	U	UT
IC701	STK412 -000	STK412 -000	STK412 -090	STK412 -090	STK412 -010	STK412 -010	STK412 -030	STK412 -030	STK412 -010	STK412 -010	STK412 -010	STK412 -010
IC602	STK402 -050	STK402 -030	STK402 -030	STK402 -050	STK402 -030	STK402 -030	STK402 -070	STK402 -070	STK402 -030	STK402 -030	STK402 -030	STK402 -030
R220	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF	150 (1/4W) UNF
Q371	NONE	NONE	NONE	NONE	NONE	NONE	2SB1274	NONE	NONE	NONE	NONE	NONE
Q372	NONE	KTA1023	KTA1023	KTA1023	NONE	KTA1023	KTA1023	KTA1023	NONE	KTA1023	KTA1023	KTA1023
R350	4.7 (1/4W) FR	2.2 (1/4W) FR	2.2 (1/4W) FR	2.2 (1/4W) FR	4.7 (1/4W) FR	2.2 (1/4W) FR	2.2 (1/4W) FR	2.2 (1/4W) FR	4.7 (1/4W) FR	2.2 (1/4W) FR	2.2 (1/4W) FR	2.2 (1/4W) FR
R351	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR	4.7 (1/4W) FR
R281	4.7K	5.6K	4.7K	4.7K	7.5K	10K	6.8K	6.8K	8.2K	5.6K	5.6K	5.6K
C721/C722	10/50	10/50	10/50	10/50	10/50	10/50	10/50	10/35	10/35	10/35	10/35	10/35
R306	2.2 (1/2W) UNF	0.33 (1/2W) UNF	0.33 (1/2W) UNF	0.33 (1/2W) UNF	2.2 (1/2W) UNF	0.33 (1/2W) UNF	0.33 (1/2W) UNF	0.33 (1/2W) UNF	2.2 (1/2W) UNF	0.33 (1/2W) UNF	0.33 (1/2W) UNF	0.33 (1/2W) UNF
R307	2.2 (1/2W) UNF	OPEN	OPEN	OPEN	2.2 (1/2W) UNF	OPEN	OPEN	OPEN	2.2 (1/2W) UNF	OPEN	OPEN	OPEN
R383	10 (1/4W) FR	SHORT (B123)	SHORT (B123)	SHORT (B123)	10 (1/4W) FR	SHORT (B123)	SHORT (B123)	SHORT (B123)	10 (1/4W) FR	SHORT (B123)	SHORT (B123)	SHORT (B123)
C204/C205	4700 /56	4700 /56	4700 /56	4700 /56	4700 /63	4700 /56	4700 /56	4700 /56	4700 /56	4700 /63	4700 /63	4700 /63
C214/C215	2200 /50	2200 /35	2200 /35	2200 /35	2200 /50	2200 /35	2200 /35	2200 /35	2200 /50	2200 /35	2200 /35	2200 /50
R303	0.33 (1/2W) UNF	SHORT (B303)	SHORT (B303)	SHORT (B303)	0.33 (1/2W) UNF	SHORT (B303)	SHORT (B303)	SHORT (B303)	0.33 (1/2W) UNF	SHORT (B303)	SHORT (B303)	SHORT (B303)
C217	47/63	47/63	47/63	47/63	47/63	47/63	47/63	47/63	47/100	47/100	47/100	47/100
R723, R724 R741, R742	10K	6.8K	6.8K	6.8K	10K	6.8K	6.8K	6.8K	10K	6.8K	6.8K	6.8K
C734, C735 C651, C652	NONE	USE	NONE	NONE	NONE	USE	NONE	NONE	NONE	USE	NONE	NONE
C732, C733 C653, C654	NONE	USE	NONE	NONE	NONE	USE	NONE	NONE	NONE	USE	NONE	NONE
R731, R732 R650, R651	NONE	USE	NONE	NONE	NONE	USE	NONE	NONE	NONE	USE	NONE	NONE
C739	0.1	1/50	1/50	1/50	0.1	1/50	1/50	1/50	0.1	1/50	1/50	1/50

▲ Parts are safety assurance parts.
 When replacing those parts make
 sure to use the specified one.

MAIN Signal

MX-GT90

Main section

SHEET 4/8 TO CN860 OF FM8-028-1 SHEET 4/8 TO CN861 OF FM8-028-1


5

4

3

2

1

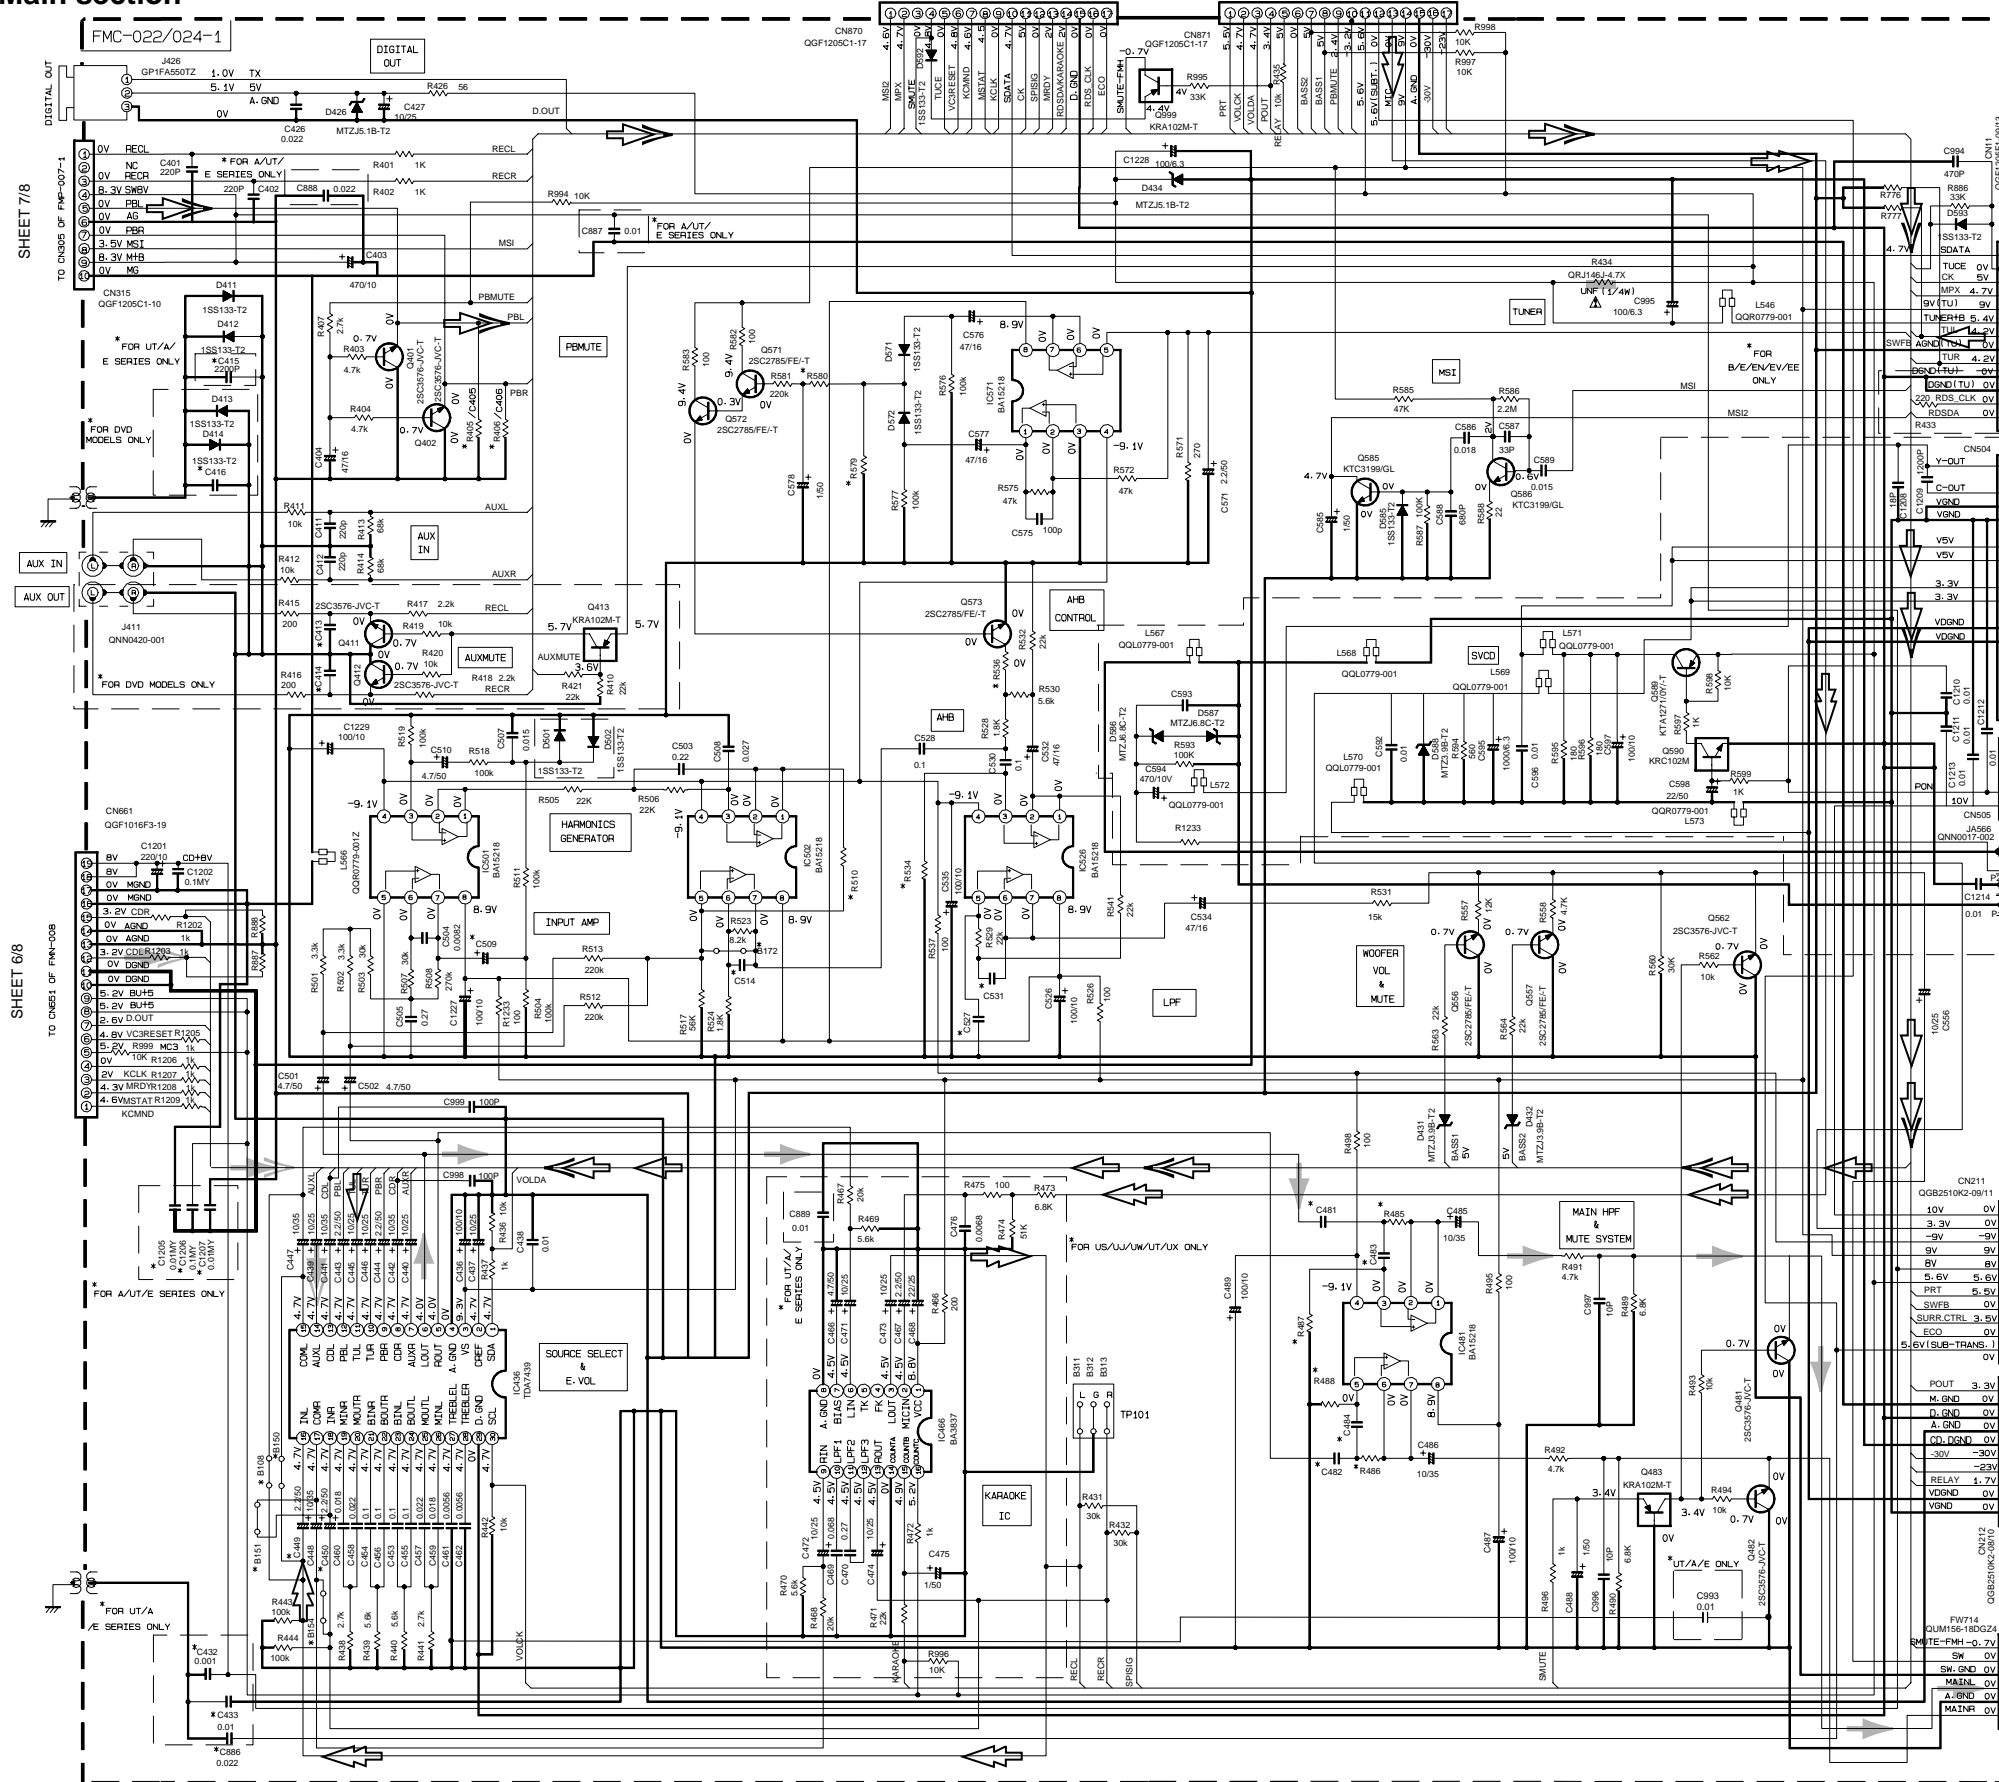

MODEL	CA-MXGT90		MX-GT90		CA-MXGT91R	
VERSION	US/UM UX/UJ	UP/UY	UT	A	J/C	B/E EN/EN/EE
R485/486			56K			
R487/488			82K			
C481/482 483/484			GFLM1HJ-223Z			
R536			15K			
C514			GFLM1HJ-473Z			
R510			100K			
C509			GETN1CM-475Z			
R534			180K			
C531			GFVJ1HJ-274Z			
C527			GFLM1HJ-273Z			
R579			82K			
R560			2.2K			
C449	USED	NONE	USED		NONE	
C450	USED	NONE	USED		NONE	
B150	NONE	USED	NONE		USED	
B151	NONE	USED	NONE		USED	
B108	NONE	USED	NONE		USED	
B154	NONE	USED	NONE		USED	

MODEL	CA-MXGT80		CA-MXGT91R			
VERSION	J/C	US/UM UJ	UP/UY	UT	A	B/E/EN E/EN/EE
R485/486				51K		
R487/488				130K		
C481/482 483/484				GFLM1HJ-273Z		
R536				12K		
C514				GFLC1HJ-471Z		
R510				100K		
C509				GETN1CM-106Z		
R534				180K		
C531				GFVJ1HJ-334Z		
C527				GFLM1HJ-103Z		
R579				100K		
R560				5.6K		
C449	NONE	USED	NONE	USED	NONE	NONE
C450	NONE	USED	NONE	USED	NONE	NONE
B150	USED	NONE	USED	NONE	USED	USED
B151	USED	NONE	USED	NONE	USED	USED
B108	USED	NONE	USED	NONE	USED	USED
B154	USED	NONE	USED	NONE	USED	USED

MODEL	MX-GT90		CA-MXGT90	
VERSION	J/C	US/UM UJ	UP/UY	A
R485/486				56K
R487/488				150K
C481/482 483/484				GFZ0150-223Z
R536				12K
C514				GFLC1HJ-417Z
R510				120K
C509				GETN1CM-106Z
R534				220K
C531				GFVJ1HJ-184Z
C527				GFLM1HJ-163Z
R579				82K
R560				680
C449	NONE	USED		NONE
C450	NONE	USED		NONE
B150	USED	NONE		USED
B151	USED	NONE		USED
B108	USED	NONE		USED
B154	USED	NONE		USED


NOTES
 1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER OR OSCILLOSCOPE WITHOUT INPUT SIGNAL. CONDITION — AUX MODE. VOL. MDN: SLEWCOOPER VOL. 1.
 2. UNLESS OTHERWISE SPECIFIED
 RESISTORS ARE 1/4W ±5% CARBON RESISTOR.
 ALL RESISTANCE VALUES ARE IN OHM(S).
 ALL CAPACITORS ARE CERAMIC CAPACITOR OR MYLAR CAPACITOR.
 ALL CAPACITANCE VALUES ARE IN μF (μF).
 ALL INDUCTANCE VALUES ARE IN μH (μH).
 ALL E-CAPACITORS ARE SHOWN IN THE FORM OF CAPACITANCE (μF)/RATED VOLTAGE (V).
 ALL DIODES ARE 1SS133

Parts are safety assurance parts. When replacing those parts make sure to use the specified one.

MAIN signal TAPE P.B. signal CD signal TUNER signal MIC signal

SHEET 3/8

FL & System control section

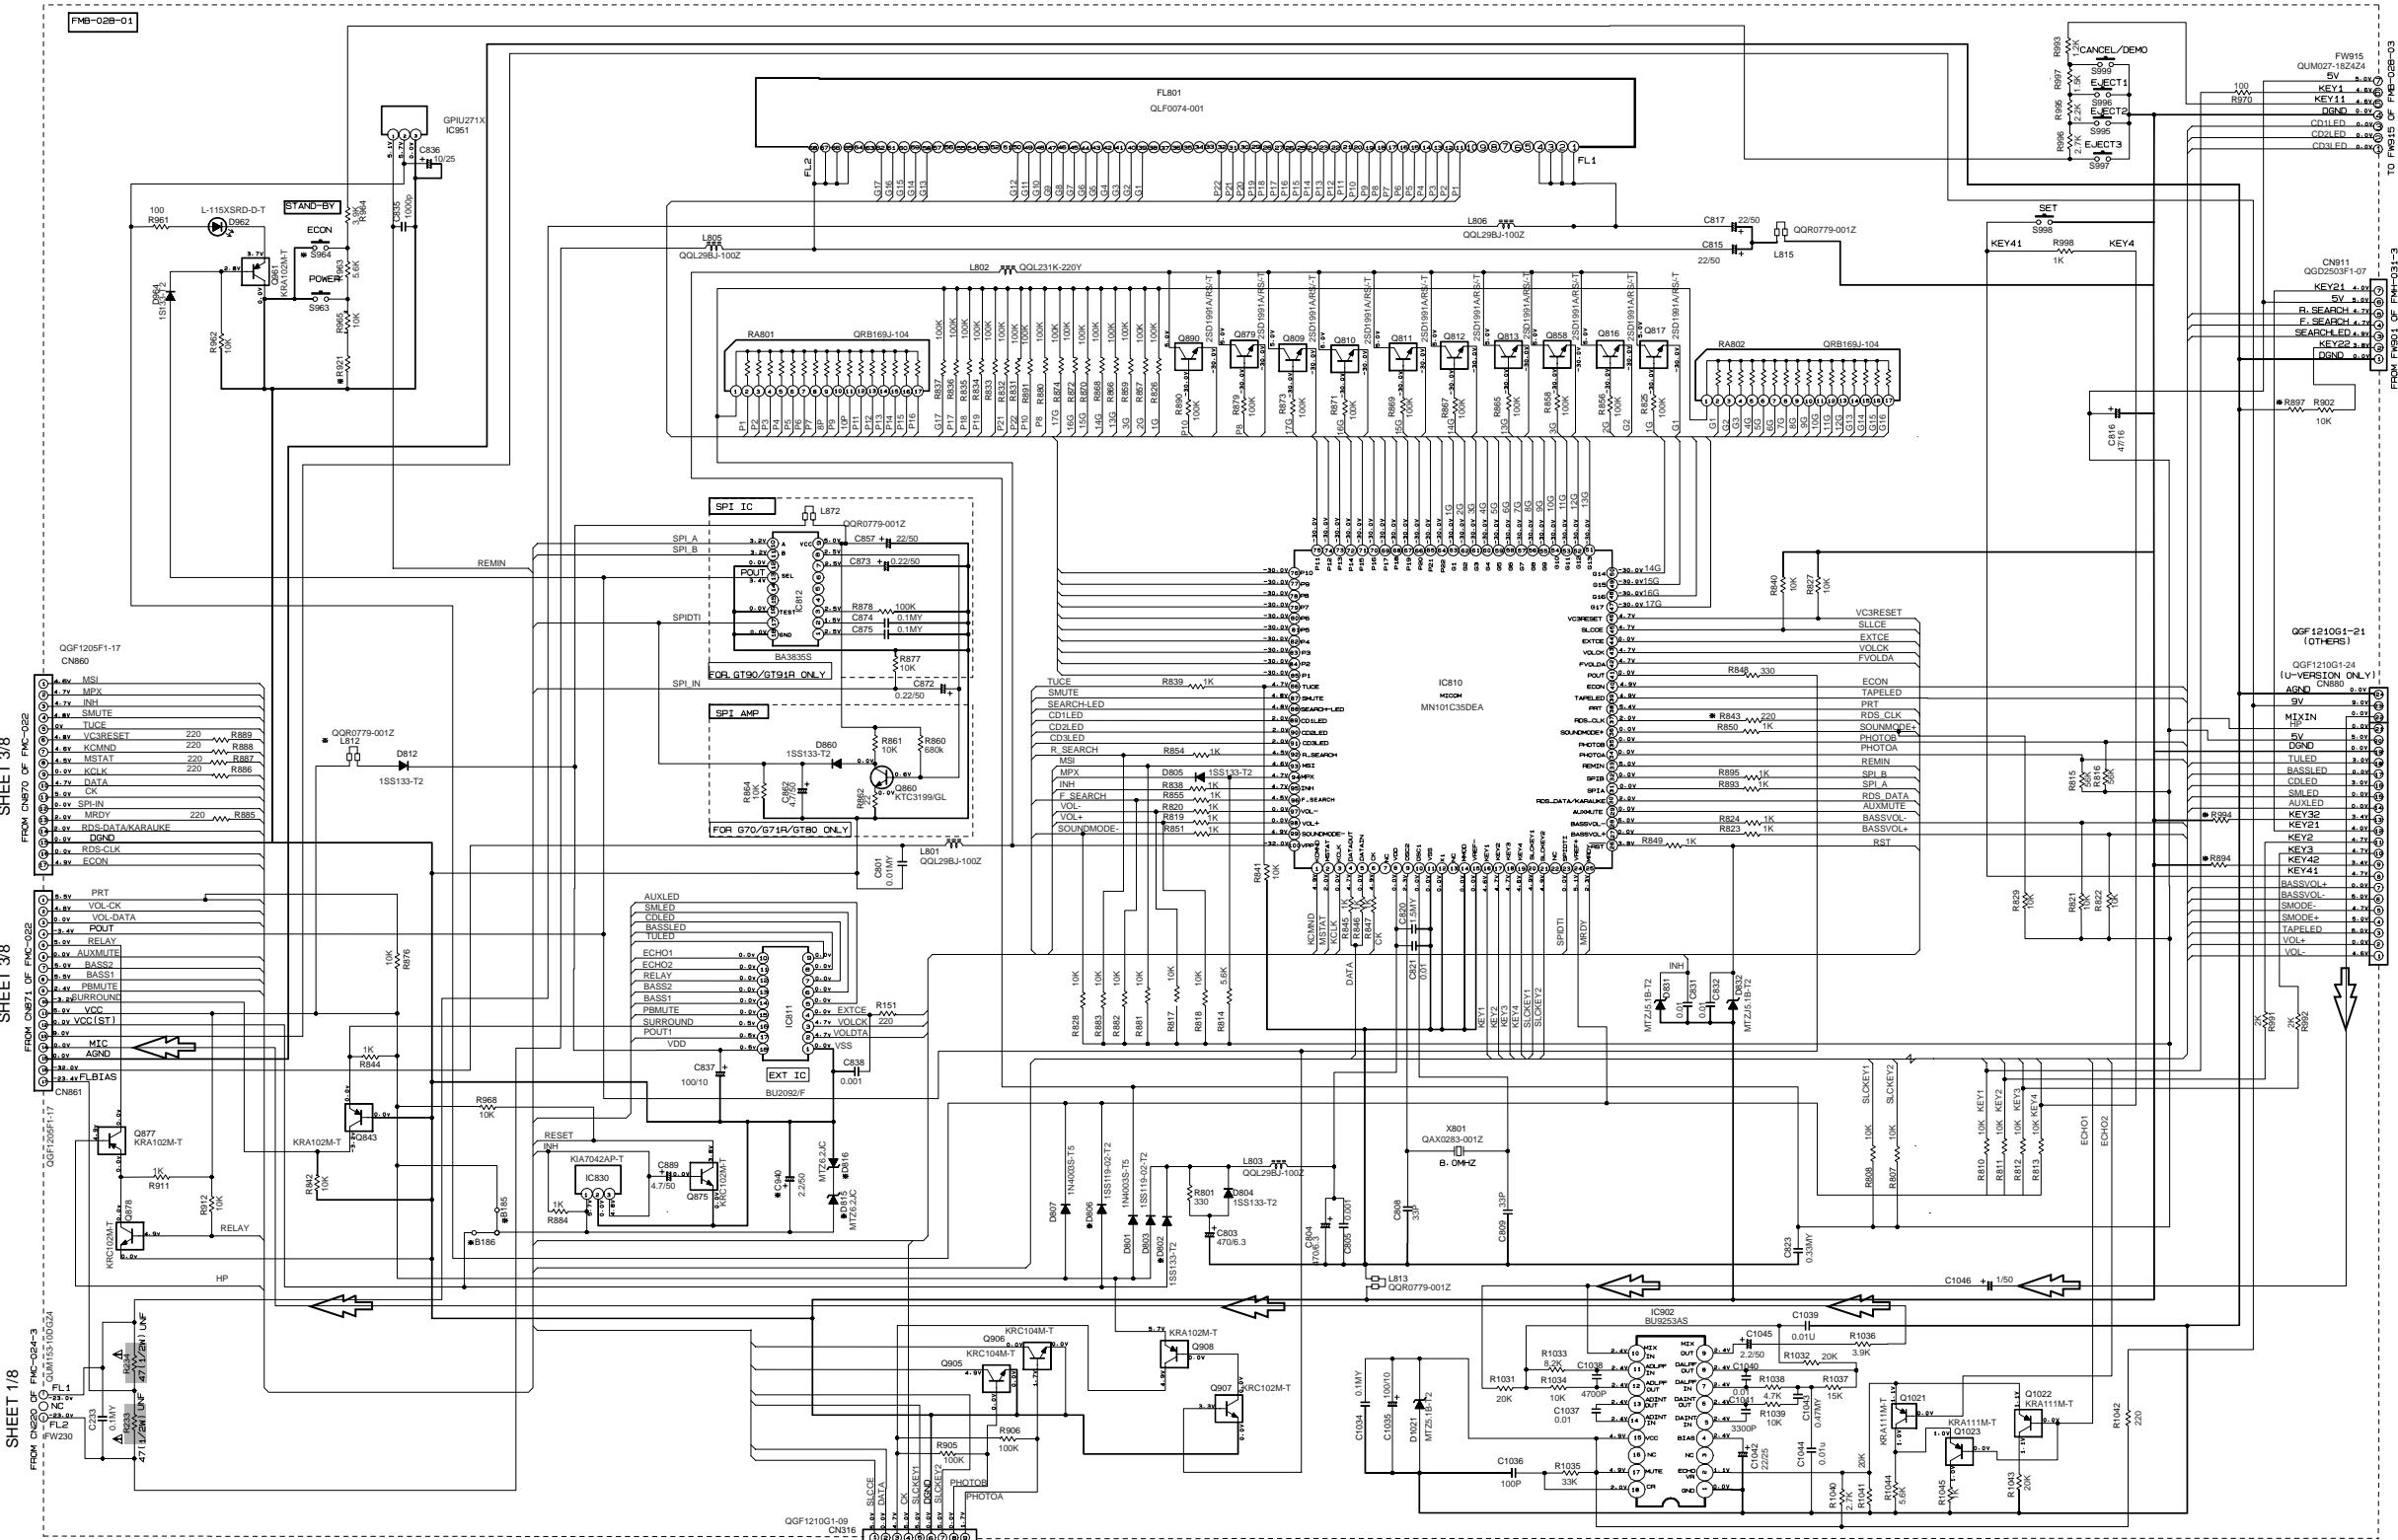

MARK

	CA-MXGT90 B-E-EN-EV	CA-MXGT90 A	MX-GT90 U-C	CA-MXGT90 UX	CA-MXGT90 UJ-UP-US-UT-UM	CA-MXGT90 UY	MX-GT90R EE	CA-MXGT90 UJ-UP-US-UT-UM	MX-GT90 C-J	CA-MXGT90R B-E-EN-EV	MX-GT90R EE	CA-MXGT90 A	CA-MXGT90 UY	CA-MXGT90 UJ-UP-US-UM	MX-GT90 C-J	MX-GT90 A	MX-GT90 UY
R821	330K	330K	330K	330K	330K	330K	75K	75K	75K	75K	75K	75K	75K	18K	18K	18K	18K
R897	330K	75K	75K	75K	75K	75K	330K	330K	330K	330K	330K	75K	75K	75K	75K	75K	75K
R894	75K	330K	75K	18K	75K	75K	330K	75K	330K	330K	75K	75K	75K	330K	330K	75K	75K
R854	330K	330K	75K	18K	330K	330K	75K	75K	75K	75K	330K	18K	330K	18K	330K	18K	330K
R843	USE	NONE	NONE	NONE	NONE	NONE	USE	NONE	NONE	USE	NONE	NONE	NONE	NONE	NONE	NONE	NONE
X801	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z	GAX0283-001Z
S864	GSW0674-001Z	GSW0674-001Z	NONE	NONE	NONE	NONE	GSW0674-001Z	NONE	NONE	GSW0674-001Z	GSW0674-001Z	NONE	NONE	NONE	NONE	NONE	NONE
D802	1S5133-T2	1S5133-T2	NONE	NONE	NONE	NONE	1S5133-T2	NONE	NONE	1S5133-T2	1S5133-T2	NONE	NONE	NONE	NONE	1S5133-T2	NONE
D806	1S5119-02-T2	1S5119-02-T2	NONE	NONE	NONE	NONE	1S5119-02-T2	NONE	NONE	1S5119-02-T2	1S5119-02-T2	NONE	NONE	NONE	NONE	1S5119-02-T2	NONE
B185	NONE	NONE	USE	USE	USE	USE	NONE	USE	USE	NONE	NONE	USE	USE	USE	NONE	NONE	NONE
B186	USE	NONE	NONE	NONE	NONE	NONE	USE	USE	USE	NONE	NONE	USE	USE	USE	NONE	NONE	NONE
C840	NONE	2.2/50	NONE	NONE	NONE	NONE	2.2/50	NONE	NONE	2.2/50	2.2/50	2.2/50	NONE	NONE	NONE	NONE	NONE
DB15-DB16	NONE	MTZJ6-2C-T2	NONE	NONE	NONE	NONE	MTZJ6-2C-T2	NONE	NONE	MTZJ6-2C-T2	MTZJ6-2C-T2	NONE	NONE	NONE	NONE	MTZJ6-2C-T2	NONE

MIC signal

NOTES

- VOLTAGES ARE MEASURED WITH A DIGITAL VOLT METER OR OSCILLOSCOPE WITHOUT INPUT SIGNAL.
- UNLESS OTHERWISE SPECIFIED RESISTORS ARE 1/4W ±5% CARBON RESISTOR. ALL CAPACITORS ARE CERAMIC CAPACITOR OR MLAR CAPACITOR. ALL CAPACITANCE VALUES ARE IN μF/INCH. ALL INDUCTANCE VALUES ARE IN mH/INCH. ALL DIMENSIONS ARE SHOWN IN THE FORM OF CAPACITANCE (μF)/NOMINAL VOLTAGE (V). ALL DIMENSIONS ARE IN MILLIMETERS.

Parts are safety assurance parts. When replacing those parts make sure to use the specified one.

■ Front key section


5

4

3

2

1

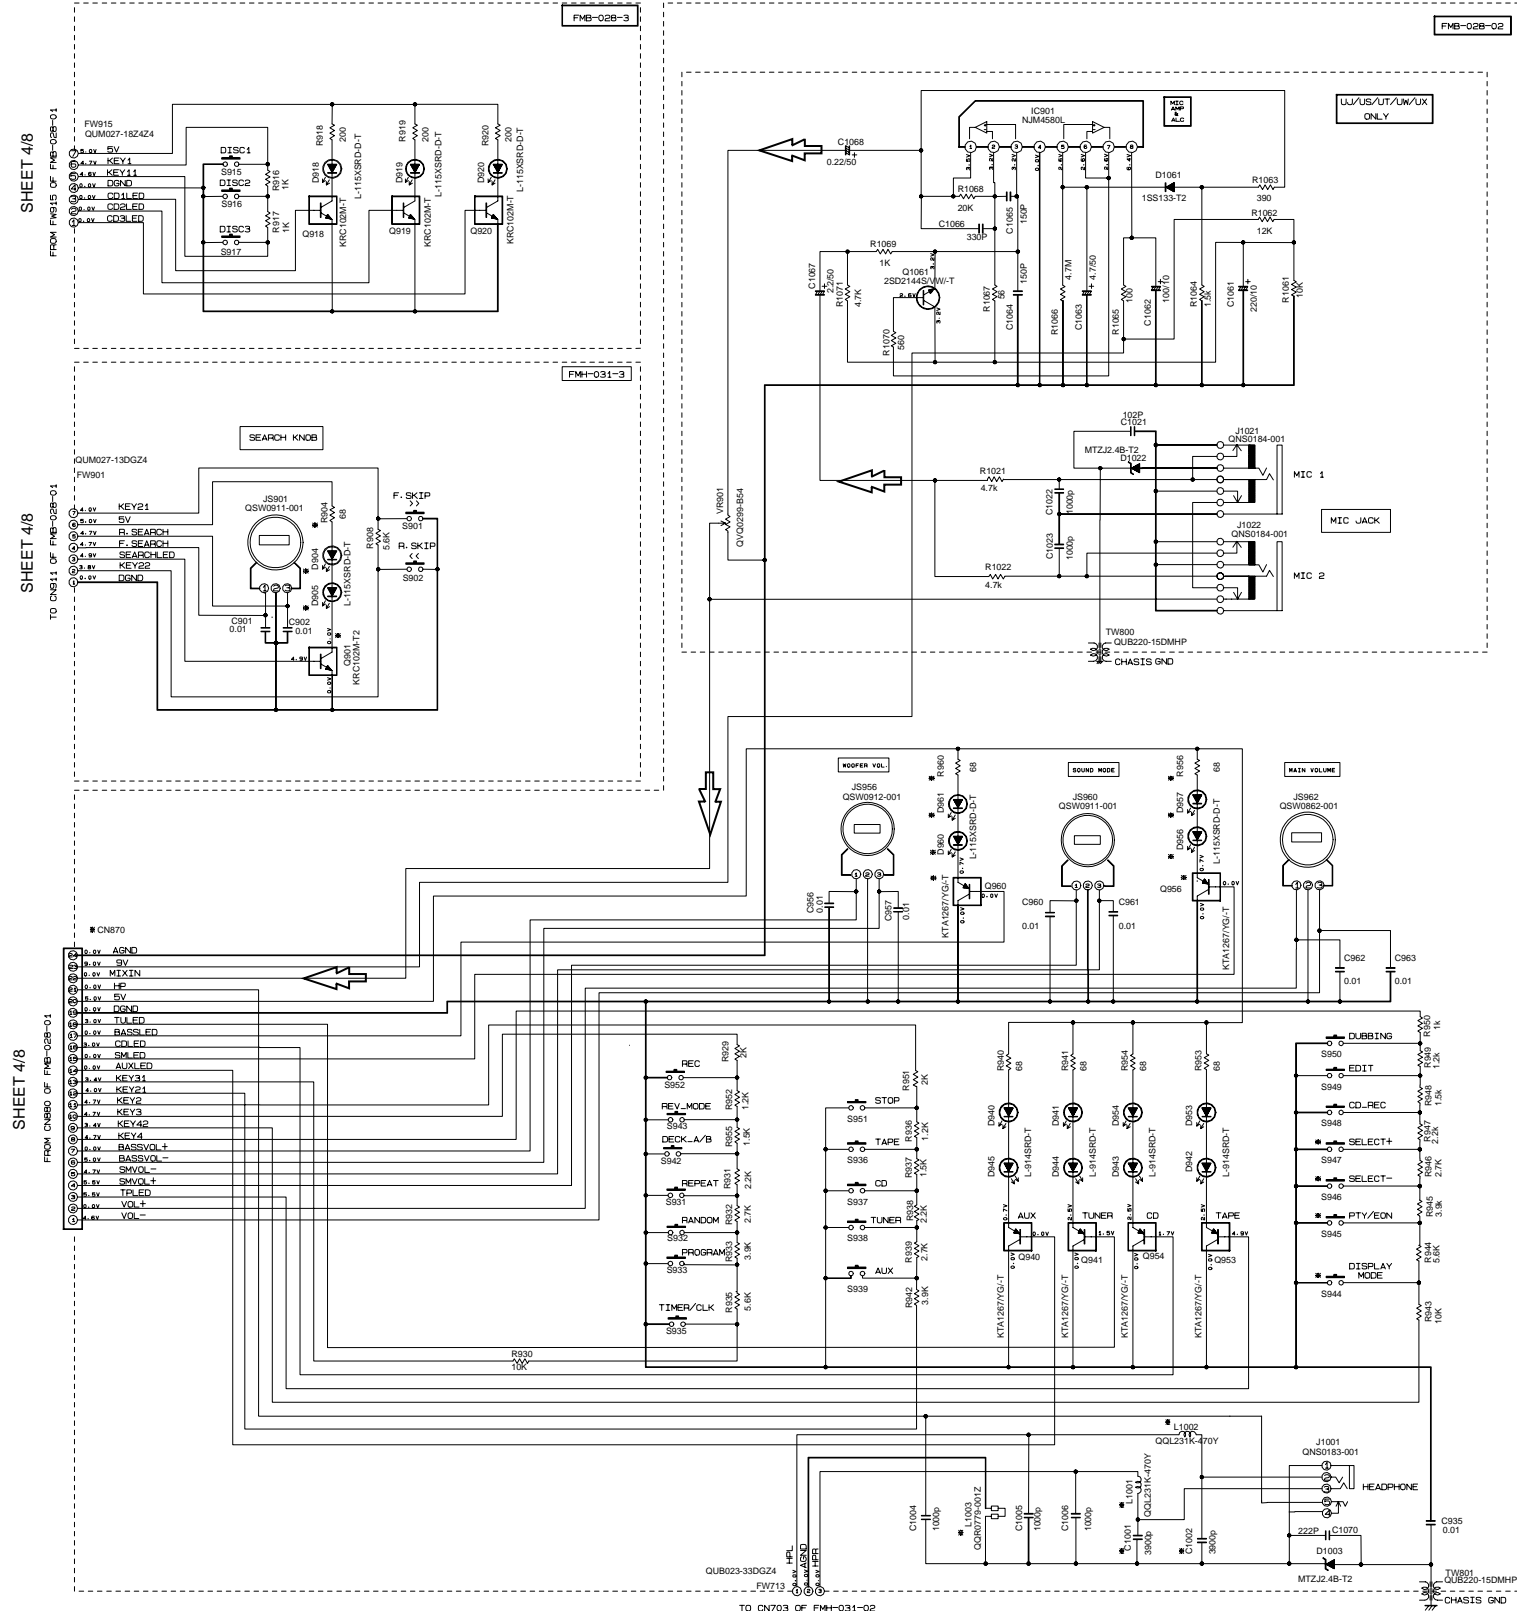

CD servo control section


5

4

3

2

1

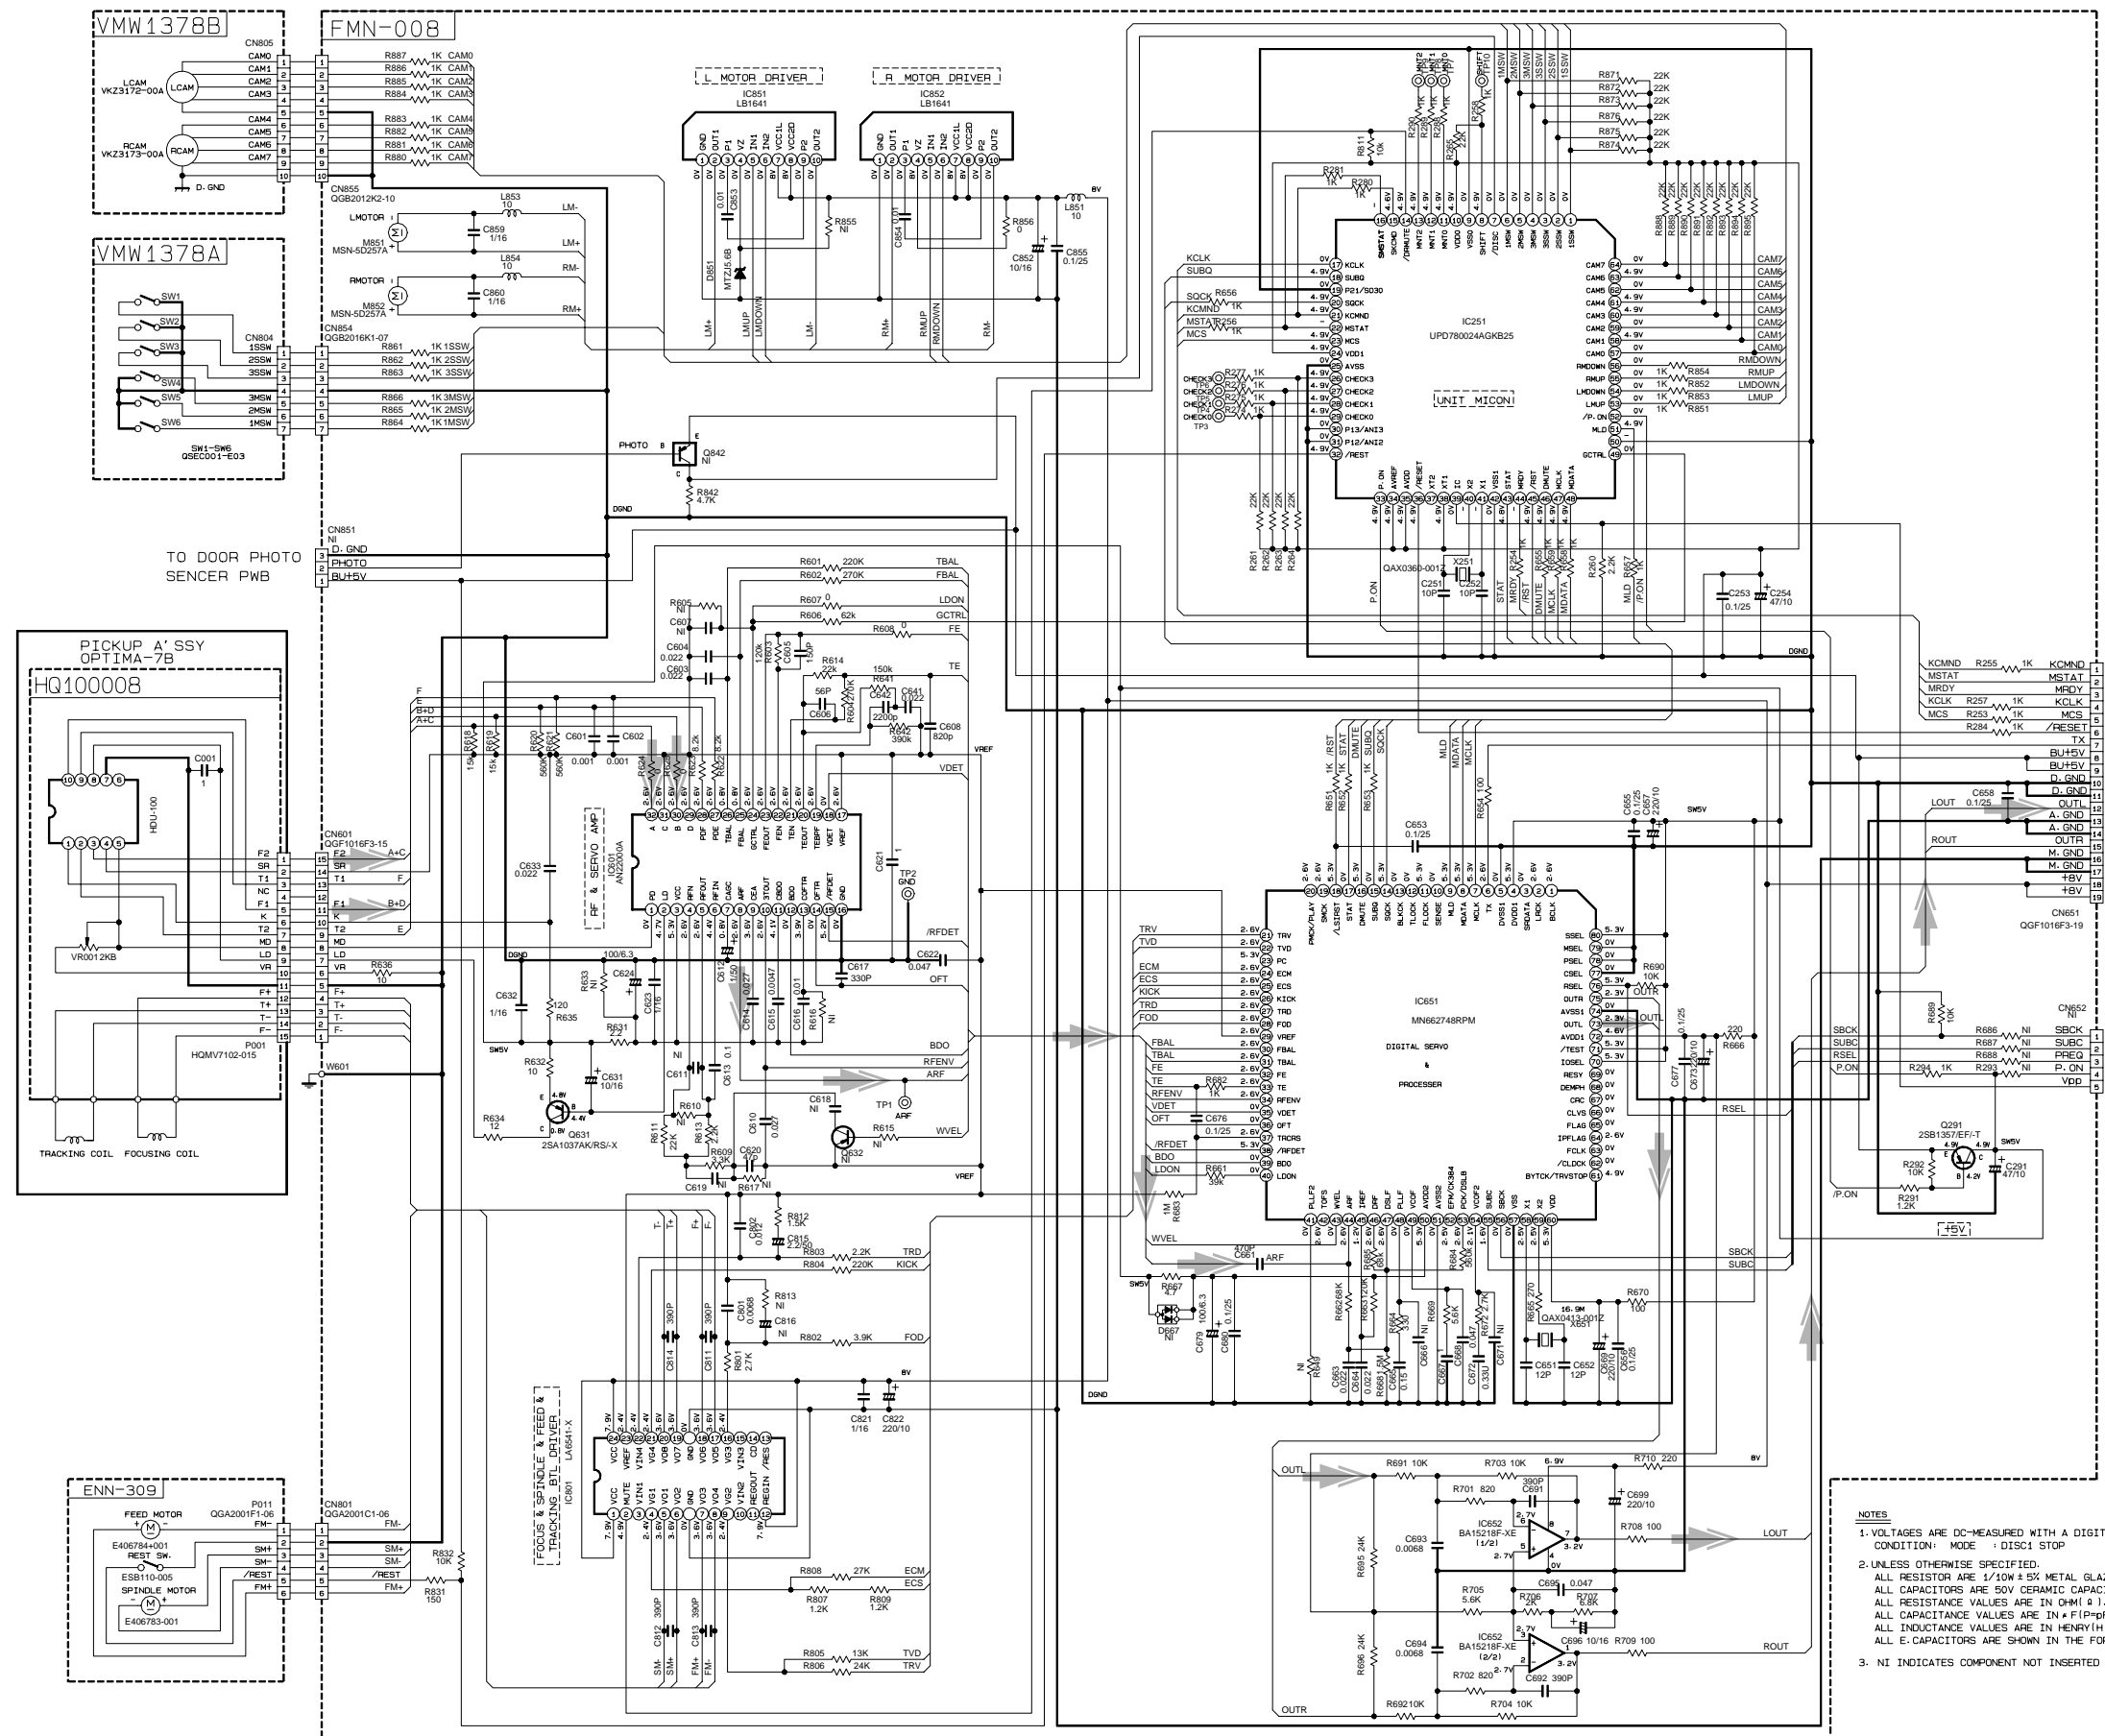

- NOTES**
1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER
CONDITION: MODE 1 DISC1 STOP
 2. UNLESS OTHERWISE SPECIFIED:
ALL RESISTOR ARE 1/10W ± 5% METAL GLAZE RESISTOR.
ALL CAPACITORS ARE 50V CERAMIC CAPACITOR OR 50V MYLAR CAPACITOR.
ALL RESISTANCE VALUES ARE IN OHM (Ω).
ALL CAPACITANCE VALUES ARE IN PICO (pF).
ALL INDUCTANCE VALUES ARE IN HENRY (H).
ALL E-CAPACITORS ARE SHOWN IN THE FORM OF CAPACITANCE (μF)/RATED VOLTAGE (V).
 3. NI INDICATES COMPONENT NOT INSERTED


TO CN861 OF FMC-022-1 SHEET 3/8

CD signal

Head amplifier section

CASSETTE MECHA CONTROL CIRCUIT [SLC]

5
4
3
2
1

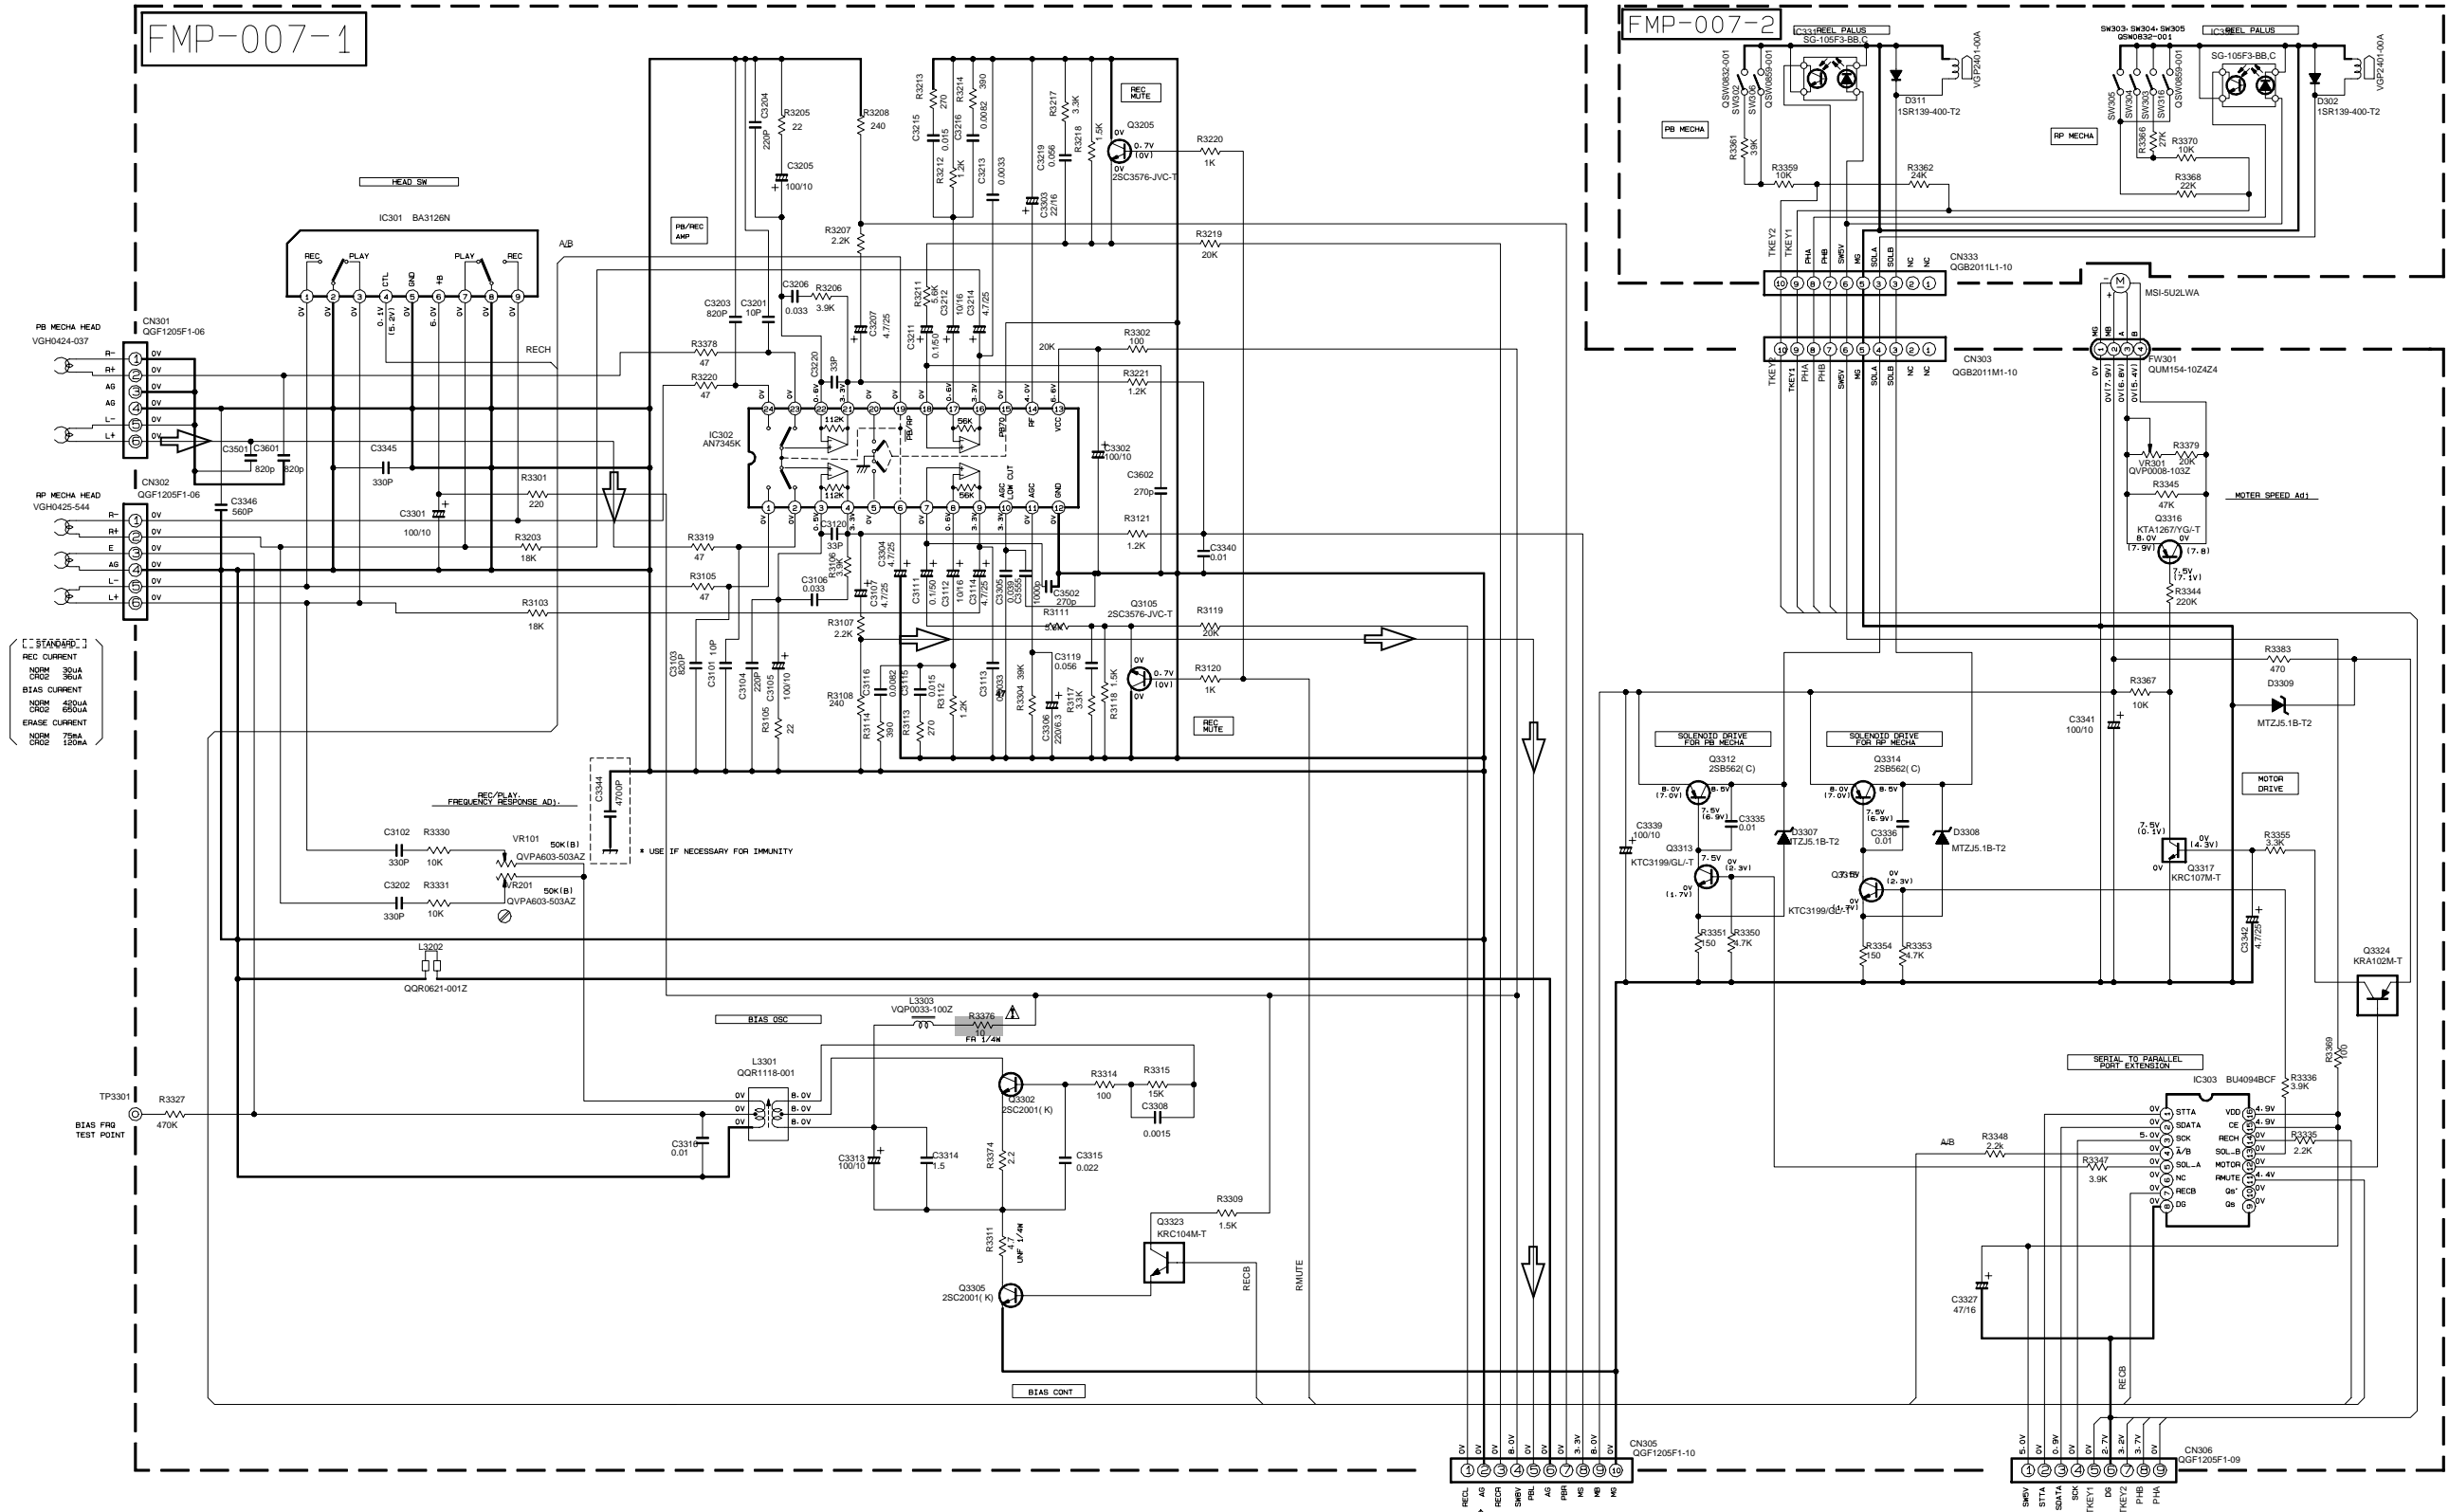

[STANDARD]
 REC CURRENT
 NORM 360A
 CHOC 361A
 BIAS CURRENT
 NORM 660A
 CHOC 660A
 ERASE CURRENT
 NORM 1200A
 CHOC 1200A

NOTES
 1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER OR OSCILLOSCOPE WITHOUT INPUT SIGNAL. () IS INVERT MODE
 2. UNLESS OTHERWISE SPECIFIED
 ALL RESISTANCE VALUES ARE IN OHM(Ω).
 ALL CAPACITANCE VALUES ARE IN pF(pF).
 ALL INDUCTANCE VALUES ARE IN μH(μH).
 ALL E. CAPACITORS ARE SHOWN IN THE FORM OF CAPACITANCE (μF)/RATED VOLTAGE (V).
 PLYPROPYLENE CAPACITOR

SHEET3/8

SHEET4/8

FROM CN315 OF FMC-022-1

FROM CN316 OF FMB-028-1

Parts are safety assurance parts.
 When replacing those parts make sure to use the specified one.

TAPE P.B. signal

SHEET 7/8



A B C 2-8 D E F G H

■ Tuner section


NOTES

1. VOLTAGES ARE DC-MEASURED WITH A DIGITAL VOLT METER.
2. ALL RESISTORS ARE 1/8W ±5% METAL GLAZE RESISTOR.
3. ALL RESISTANCE VALUES ARE IN OHM(Ω).
4. ALL CAPACITANCE VALUES ARE IN pF(pF).
5. ALL E. CAPASITORS ARE SHOWN IN THE FORM OF CAPASITANCE (pF)/RATED VOLTAGE (V).
6. SI DIODES (▶) ARE ALL 1SS133-T THAT CAN BE CHANGED TO SIMILAR DIODE SUCH AS MA165 OR HSS104J.
7. PARTS NO. OF TRANSISTORS ARE AS FOLLOWS.
Q1 2SC2814/4-5/-X Q2, Q3 2SC2412K/R/-X
Q4, Q5 DTA114YKA-X

B. INSIDE OF DIGITAL TRANSISTORS ARE SHOWN AS FOLLOWS.

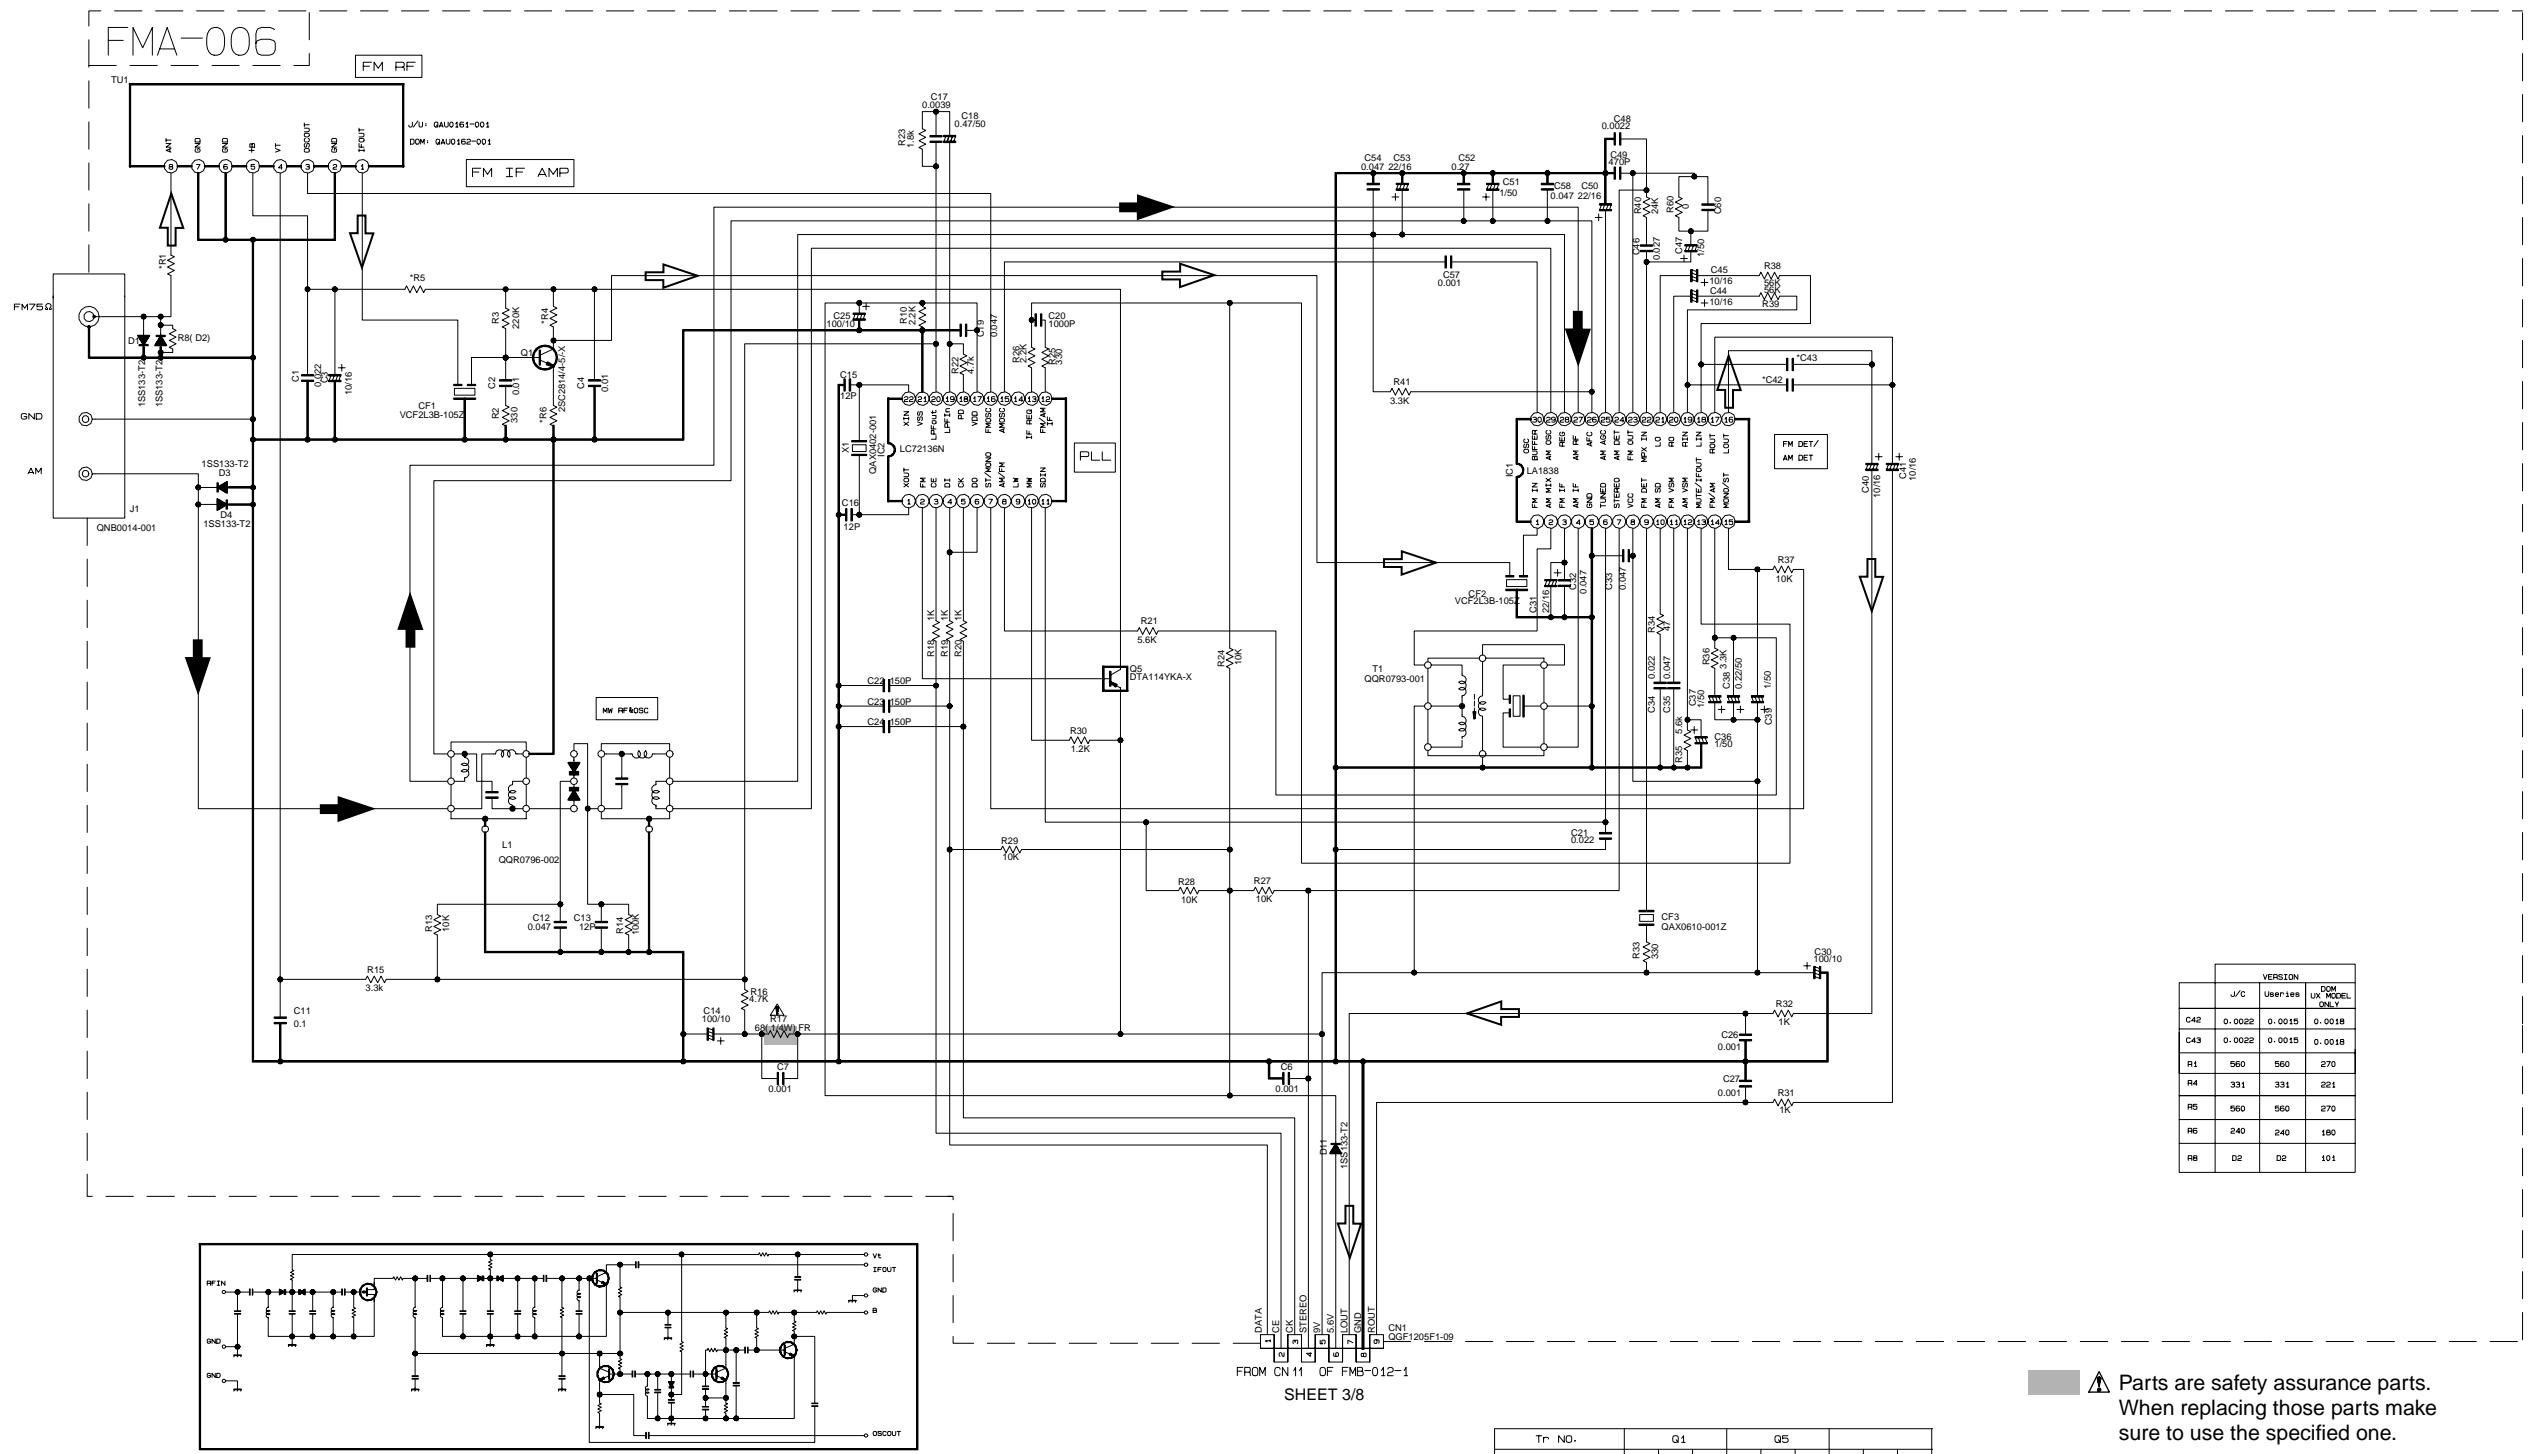

VERSION			
J/C	User's	QM	IK MODEL
			ONE.Y
C42	0.0022	0.0015	0.0018
C43	0.0022	0.0015	0.0018
R1	560	560	270
R4	331	331	221
R5	560	560	270
R6	240	240	180
R8	D2	D2	101

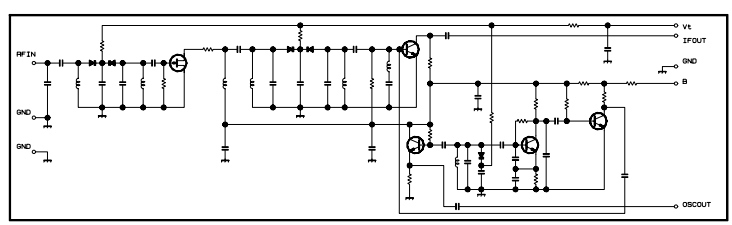

CONDITION	PIN NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
IC1	FM NO SIGNAL	3.6	8.9	3.6	3.6	0	5.0	5.0	8.9	8.9	1.3	0.1	0	0.9	7.8	7.8	4.3	4.3	4.3	4.3	3.4	3.4	2.8	3.4	0	0	3.5	3.5	3.6	3.6	2.7
	FM 60dB STEREO	3.6	8.9	3.6	3.6	0	5.0	5.0	8.9	8.9	1.3	4.3	0	0.9	7.8	7.8	4.3	4.3	4.3	4.3	3.4	3.4	2.8	3.4	0	0	3.6	3.6	3.6	3.6	2.7
	AM NO SIGNAL	3.5	9.0	3.5	3.5	0	5.0	5.1	9.0	2.6	1.3	0	0	0.9	4.7	5.5	4.3	4.3	4.3	3.3	3.2	2.8	1.8	0.7	0.7	3.6	3.6	3.6	3.6	2.1	
IC2	FM NO SIGNAL	2.5	0	0	5.0	4.9	5.0	7.9	7.8	3.6	6.1	5.1	0	0	0	2.5	5.1	0.9	0.9	3.8	0	2.3									

FROM CN11 OF FMB-012-1 SHEET 3/8

Tr. NO.	Q1	Q5	
PIN NO.	E C B E C B	E C B	
FM 87.5MHz NO SIGNAL	0 7.1 0.85	8.9 8.8 0	
AM 52KHz NO SIGNAL	0 0 0	9.0 0 8.9	
Tr. NO.	Q2	Q3	Q4
PIN NO.	E C B E C B E C B	E C B	E C B
AM 52KHz NO SIGNAL	0 0 0.7	0 0 0.7	0 3.6 0.7
AM 144KHz NO SIGNAL	0 0 0.3	0 0.3 0.3	3.6 3.6 3.6


▲ Parts are safety assurance parts. When replacing those parts make sure to use the specified one.

▶ FM/TUNER signal
▶ AM signal

Printed circuit boards

■ Main board

5
4
3
2
1

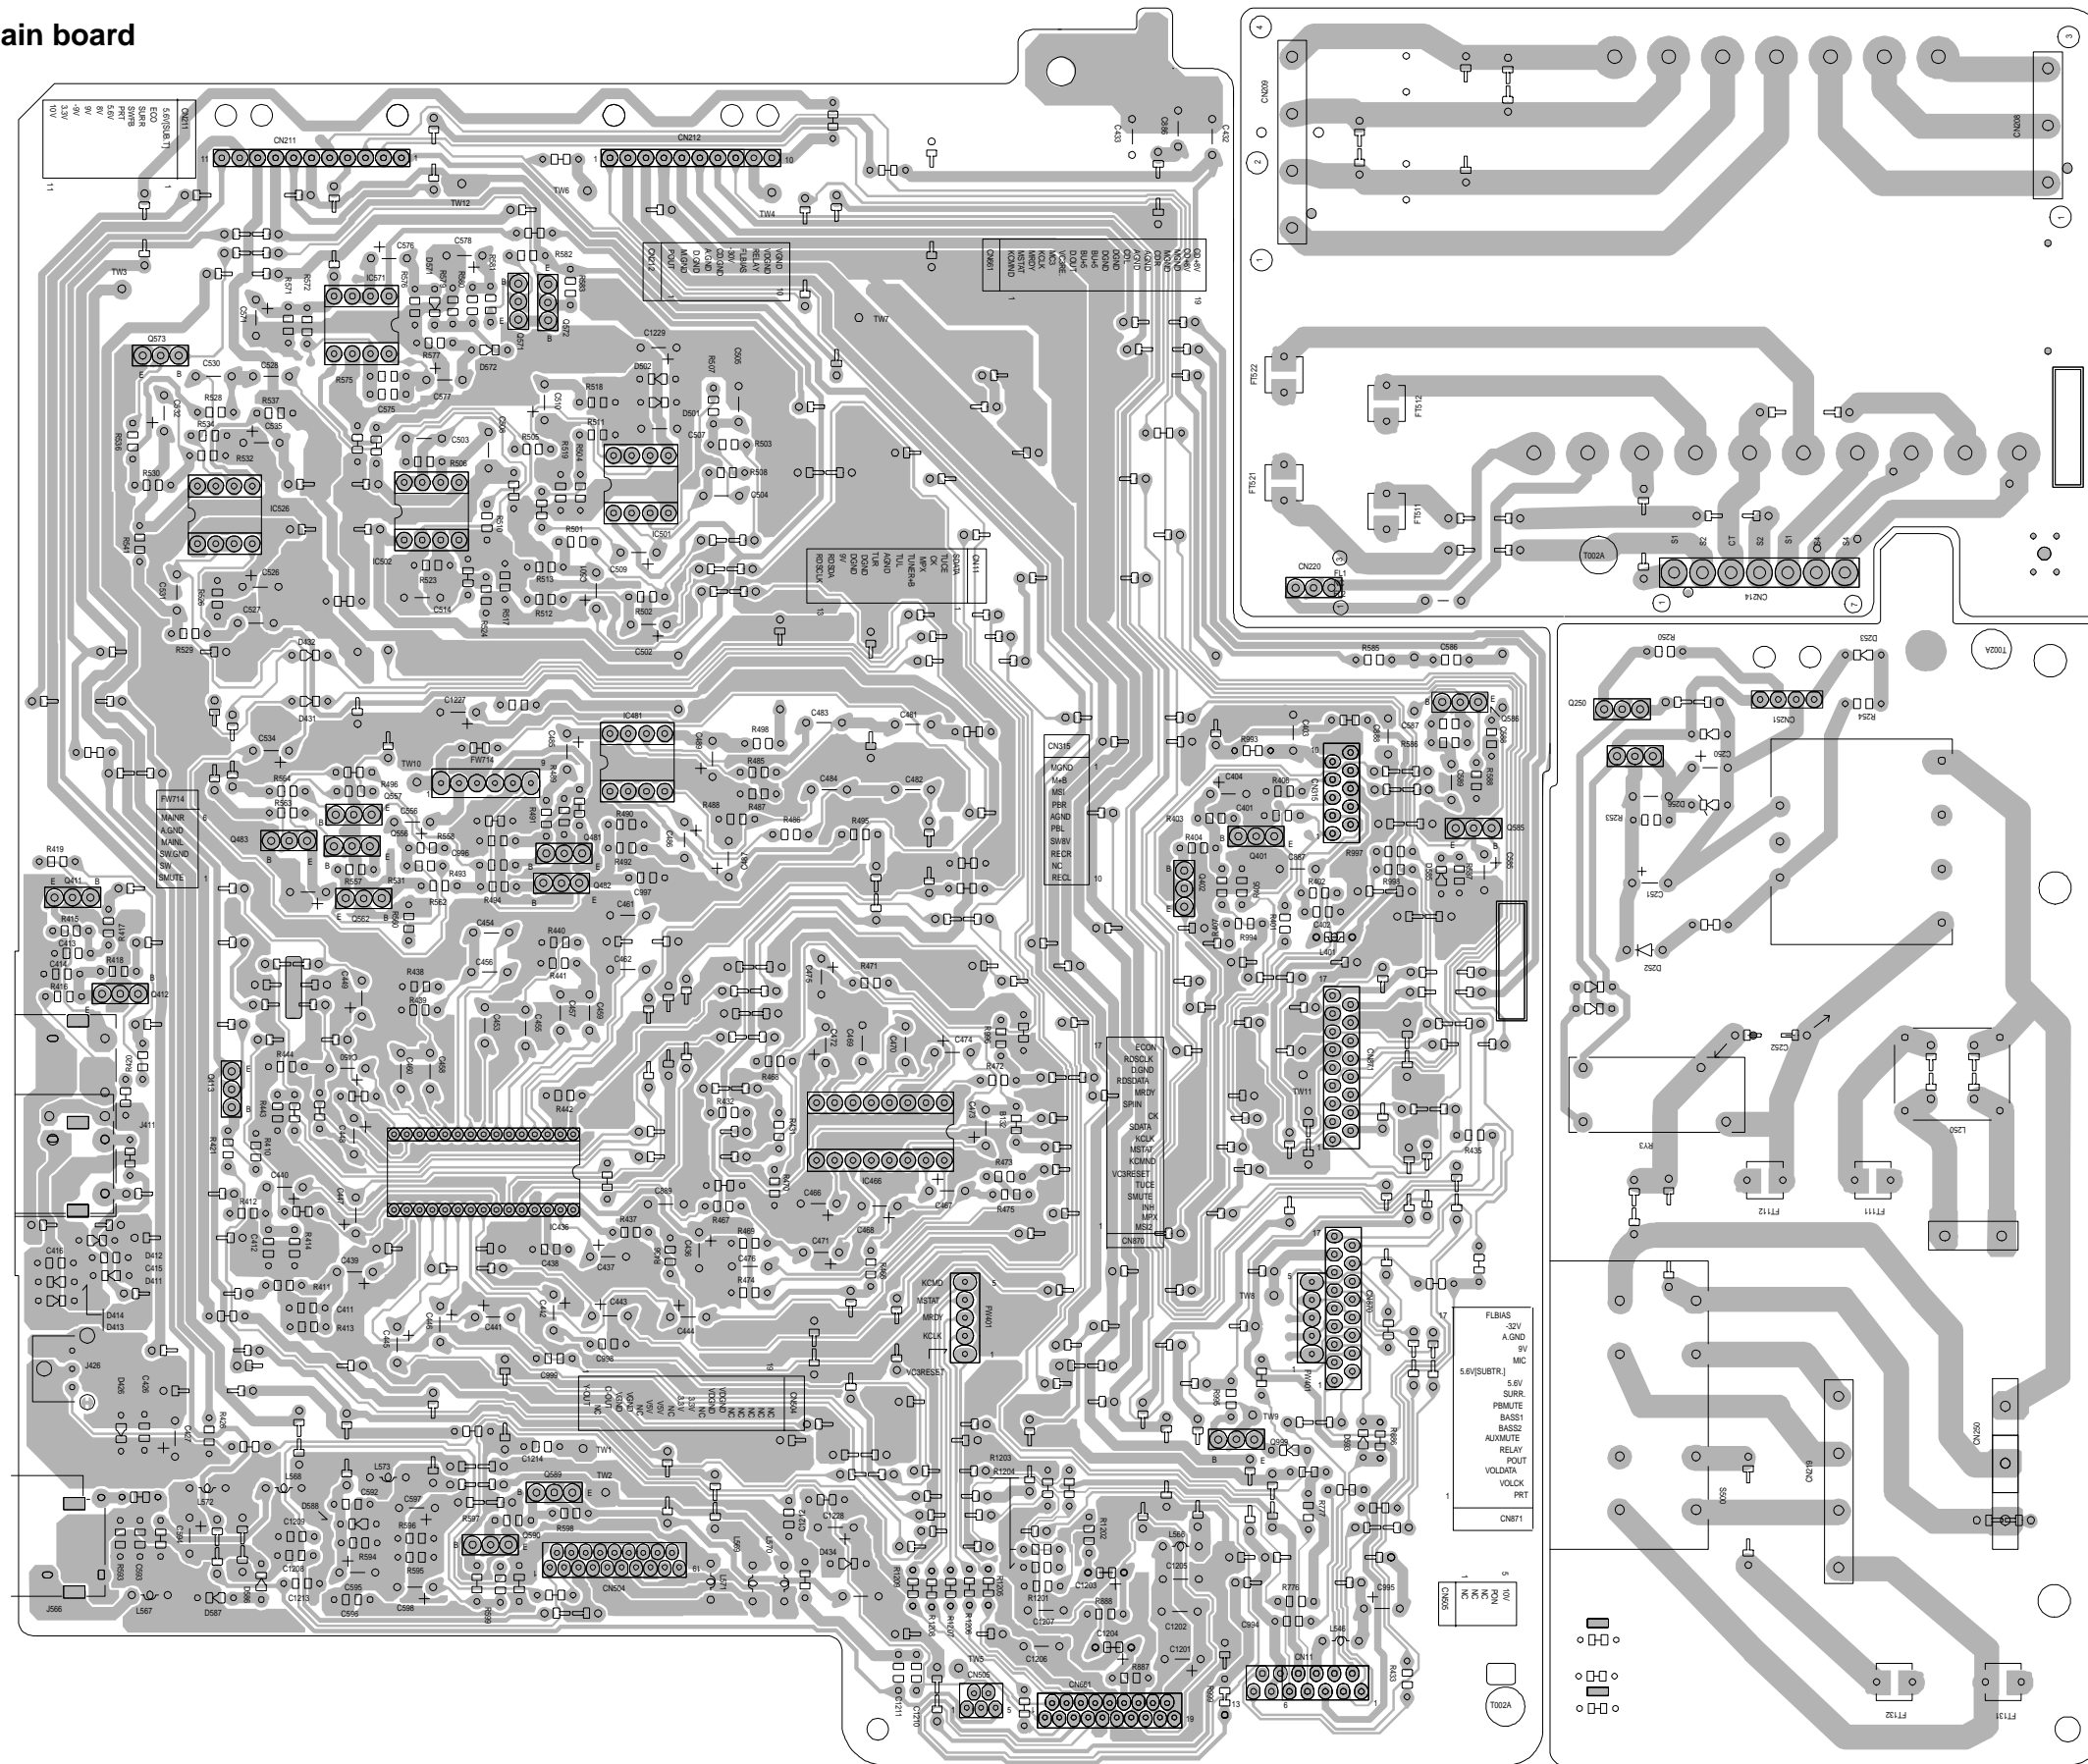


Transformer board

Voltage selector board

A B C 2-10 D E F G H

■ Regulation & amplifier board

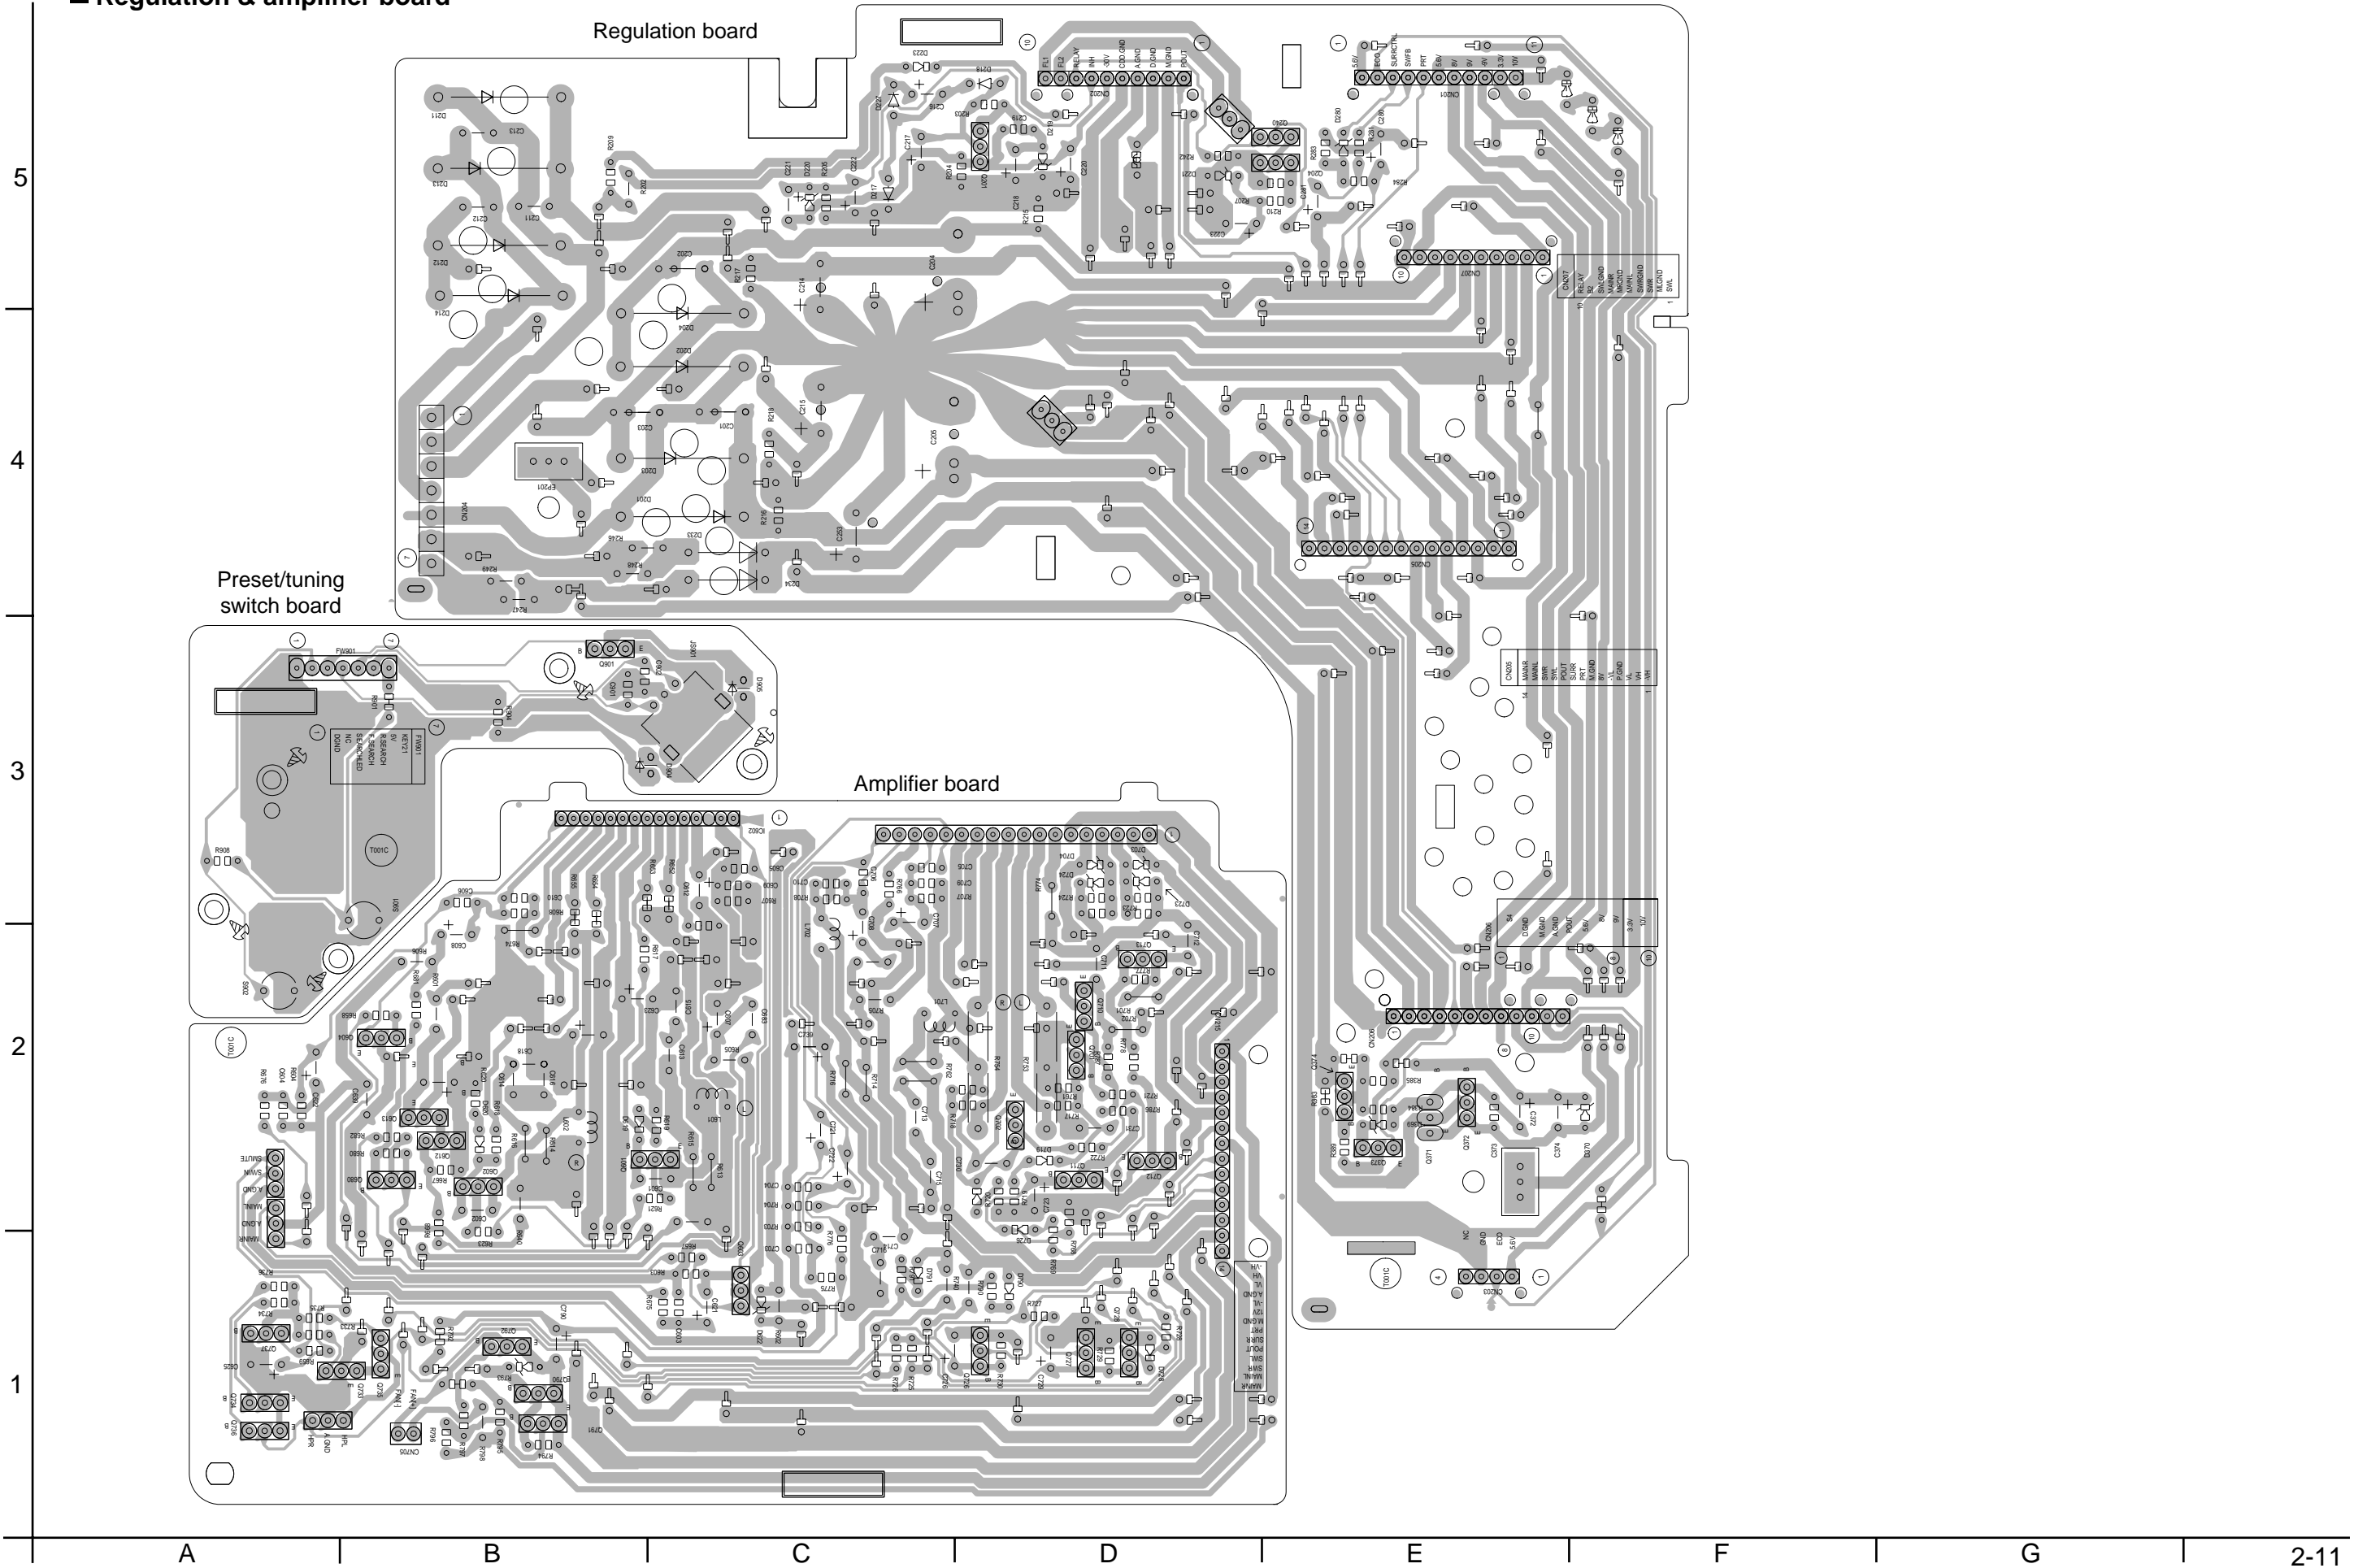

■ Front board

Display & system control board

Operation switch board


5

4

3

2

1

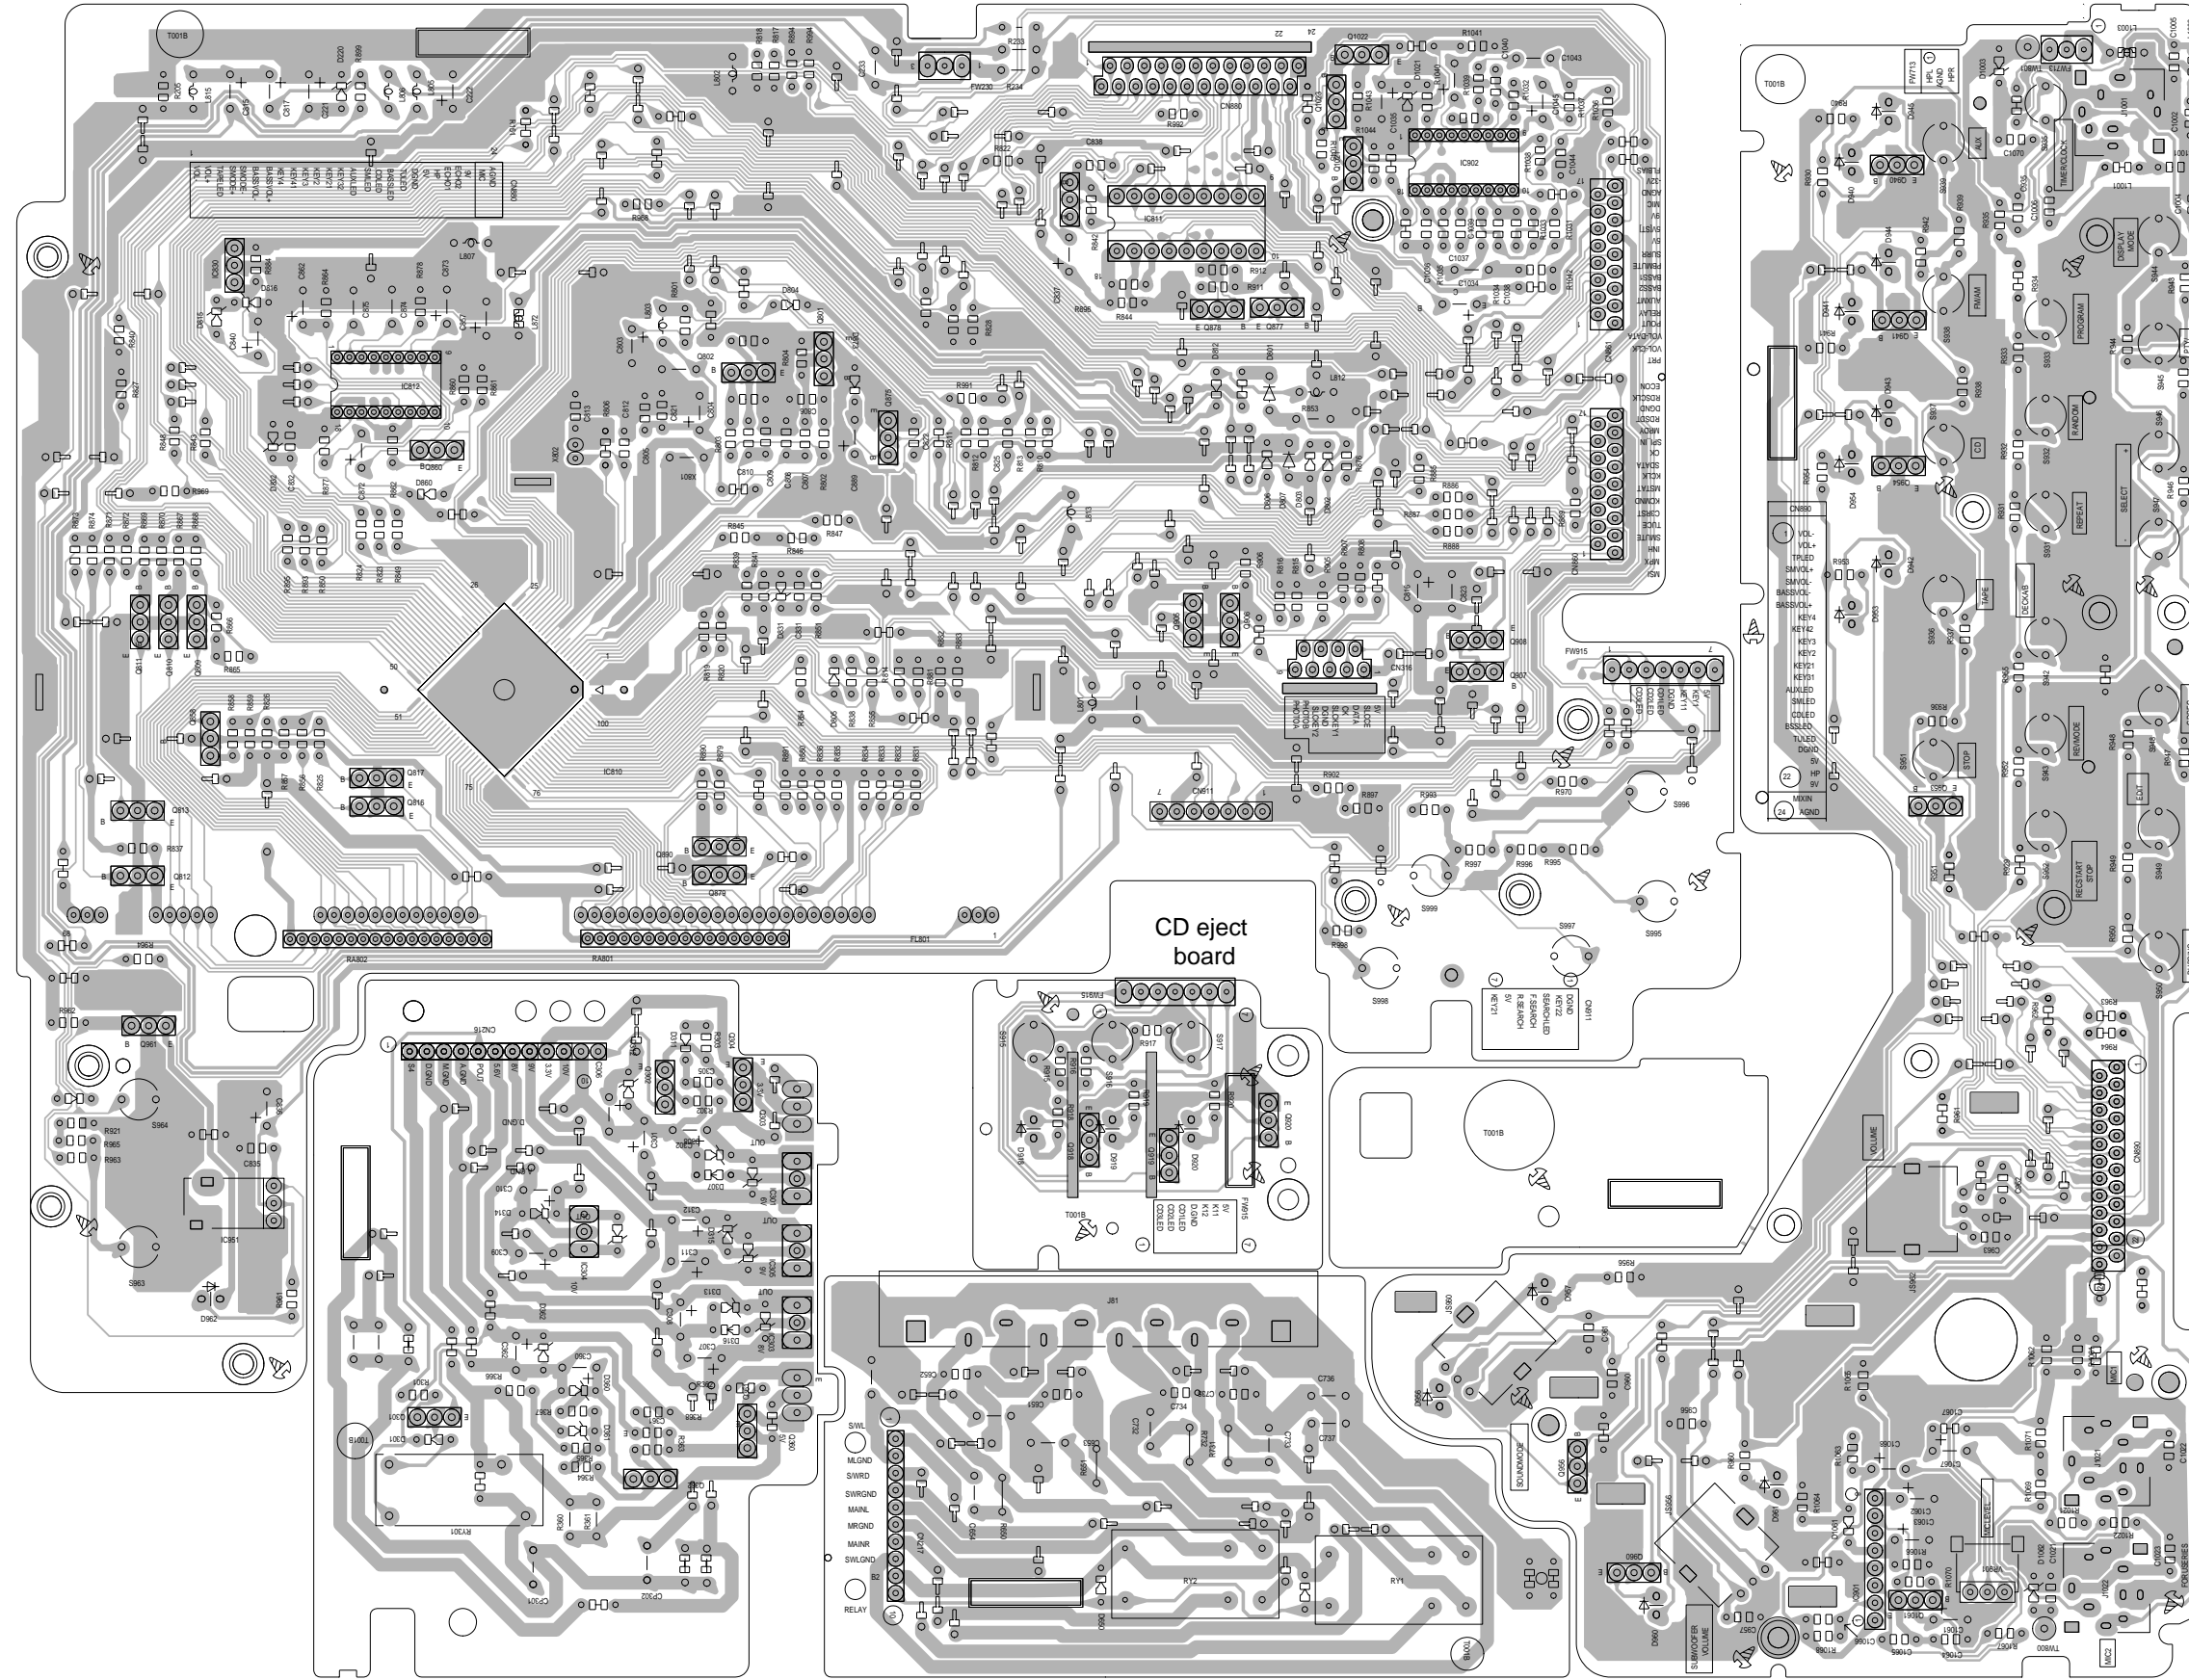

A

B

C

2-12

D


E

F


G

H


■ CD servo control board

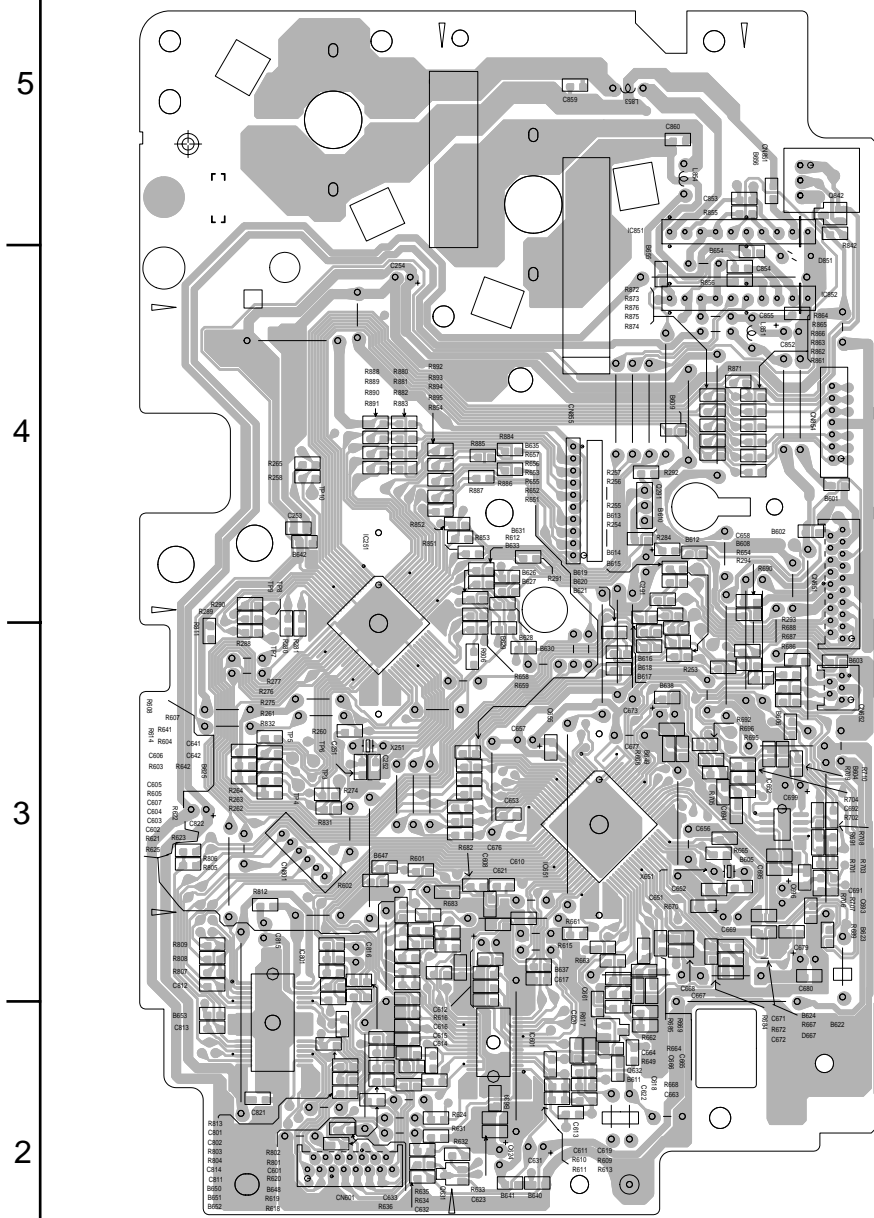

■ Head amplifier & mechanism control board

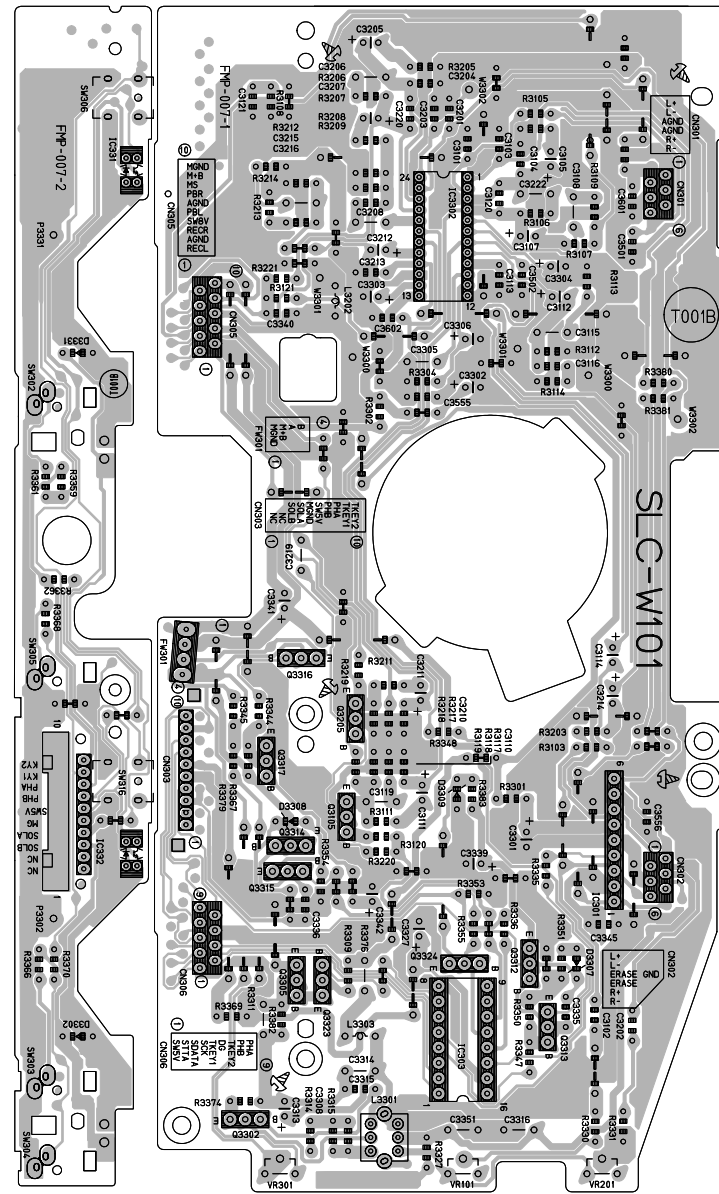

■ Tuner board

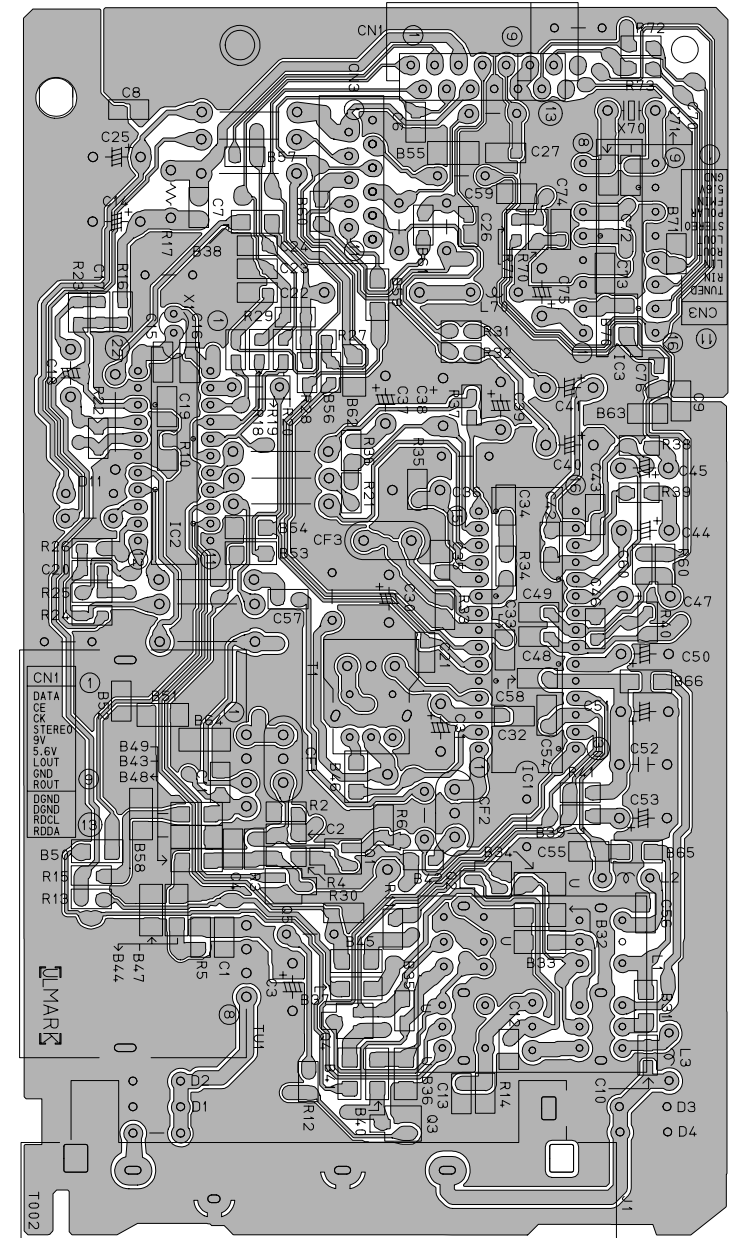

5

4

3

2

1

A

B

C

D

E

F

G