


JVC

SERVICE MANUAL

COLOUR TELEVISION


**AV-28BD5EKI / AV-28BD5EP / AV-28BD5EE
AV-28BD5EKIS / AV-28BD5EPS / AV-28BD5EES**

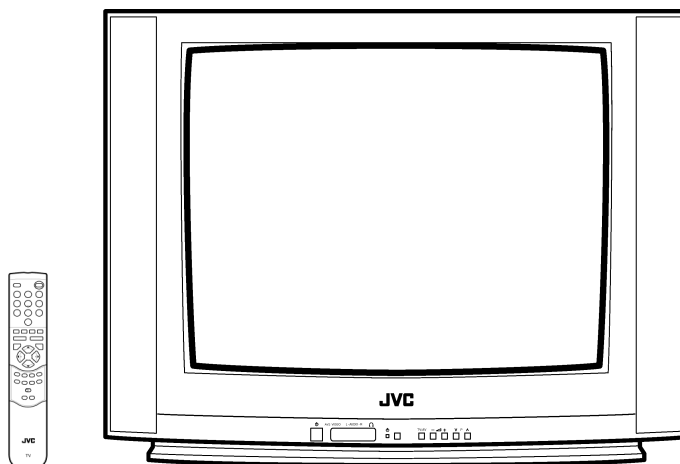

CONTENTS

■ SPECIFICATIONS	1-2
■ SAFETY PRECAUTIONS	1-5
■ FUNCTIONS	1-6
■ SPECIFIC SERVICE INSTRUCTIONS	1-8
■ SERVICE ADJUSTMENTS	1-9
★ STANDARD CIRCUIT DIAGRAM (APPENDIX)	2-1
■ PARTS LIST	1-15

SPECIFICATIONS

Item	Content
TV RF SYSTEM	B/G, I, D/K & L/L'
COLOUR STANDARD	PAL / SECAM / NTSC (AV only)
POWER INPUT	AC 230V, 50Hz
POWER CONSUMPTION	75W / 3W (STBY)
TELETEXT SYSTEM	FLOF (Fastext) / TOP / WST (standard system)
SOUND OUTPUT / SPEAKER	7W / 8Ω (×2)
PICTURE TUBE SIZE	VISIBLE AREA 66cm (measured diagonally)
ANTENNA INPUT	75Ω Unbalanced
INPUT / OUTPUT	FRONT: RCA JACK (VIDEO / AUDIO) REAR : 21-PIN EURO CONNECTOR (SCART) × 2 (VIDEO / AUDIO / RGB / S. VHS) 
INTERMEDIATE FREQUENCIES	PIF : 38.9MHz (B/G, D/K, I, L) , 33.9MHz (L') SIF : 33.4MHz (PAL / SECAM – B/G) 32.9MHz (PAL / SECAM – I / I) 32.4MHz (PAL / SECAM – D/K, SECAM – L) 40.4MHz (SECAM – L') <hr/> SOUND SUBCARRIER : 5.5MHz (PAL / SECAM – B/G) 6.0MHz (PAL / SECAM – I / I) 6.5MHz (PAL / SECAM – D/K, SECAM – L) 6.5MHz (SECAM – L') <hr/> COLOUR SUBCARRIER : 4.43MHz (PAL) 4.250MHz, 4.406MHz (SECAM)
REMOTE CONTROL	RM-C71 [Batt, AAA (R03)] (EP, EPS, EE, EES) RM-C72 [Batt, AAA (R03)] (EKI, EKIS)
DIMENSIONS (W × H × D)	760mm × 589mm × 475mm
MASS	32kg


Design & specifications are subject to change without notice.

■ 21-pin Euro connector (SCART socket)

21Pin EURO-SCART 1:

Pin No.	Signal Designation	Matching Value
1	Audio Output Right	0.5V(rms), Imp<1k Ω (RF 54% MOD)
2	Audio Input Right	0.5V(rms), Imp>10k Ω
3	Audio Output Left	0.5V(rms), Imp<1k Ω (RF 54% MOD)
4	Audio Earth	
5	Blue Earth	
6	Audio Input Left	0.5V(rms), Imp>10k Ω
7	Blue Input	0.7V(p-p) \pm 0.1V, Imp75 Ω
8	Slow Switching	TV : 0-2V, AV 16/9 : 4.5-7V, AV 4/3 : 9.5-12V, Imp>10k Ω
9	Green Earth	
10	NC	
11	Green Input	0.7V(p-p) \pm 0.1V, Imp 75 Ω
12	NC	
13	Red Earth	
14	Blanking Earth	
15	Red Input	0.7V(p-p) \pm 0.1V, Imp 75 Ω
16	Fast Switching	0-0.4V : Logic "0", 1-3V : Logic "1", Imp75 Ω
17	Video Out Earth	
18	Video In Earth	
19	Video Output	1V(p-p) \pm 3dB, Imp75 Ω
20	Video Input	1V(p-p) \pm 3dB, Imp75 Ω
21	Common Earth	


[Pin assignment]

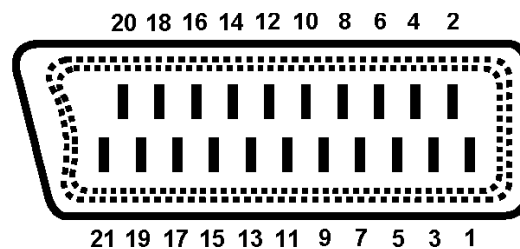

21Pin EURO-SCART 2 :

Pin No.	Signal Designation	Matching Value
1	NC	
2	Audio Input Right	0.5V(rms), Imp<10kΩ
3	NC	
4	Audio Earth	
5	Earth	
6	Audio Input Left	0.5V(rms), Imp>10kΩ
7	NC	
8	NC	
9	NC	
10	NC	
11	NC	
12	NC	
13	Earth	
14	Earth	
15	Chroma Input	±3dB for a luminance signal of 1V(p-p)
16	NC	
17	Earth	
18	Video In Earth	
19	NC	
20	Video Input, Y In.	1V(p-p) ±3dB, Imp75Ω
21	Common Earth	

[Pin assignment]

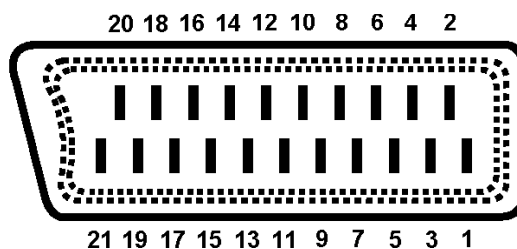




SAFETY PRECAUTIONS

1. The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
2. Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
3. Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (Δ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
4. **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (\perp) side GND, the ISOLATED(NEUTRAL) : (∇) side GND and EARTH : (\oplus) side GND. Don't short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND and never measure with a measuring apparatus (oscilloscope etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND at the same time.
If above note will not be kept, a fuse or any parts will be broken.
5. If any repair has been made to the chassis, it is recommended that the +B setting should be checked or adjusted (See +B ADJUSTMENT).
6. The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
7. Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10k Ω 2W resistor to the anode button.
8. When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.


FUNCTIONS

LOCAL CONTROL

FRONT

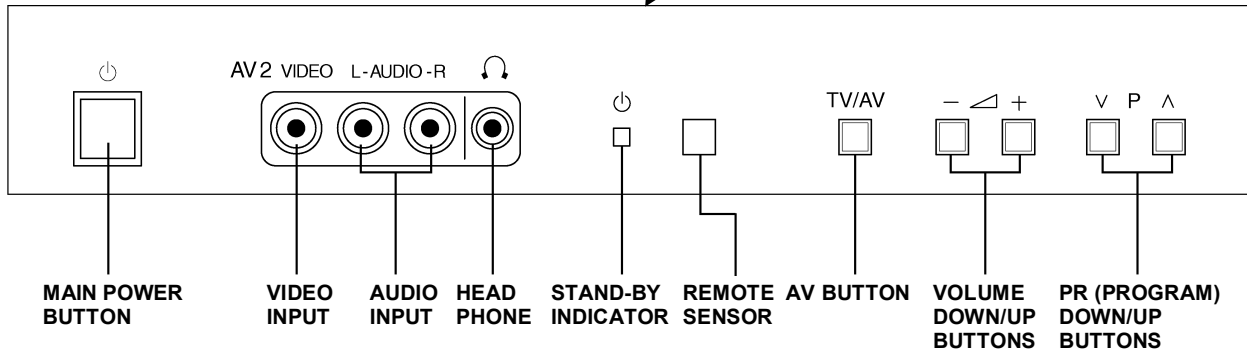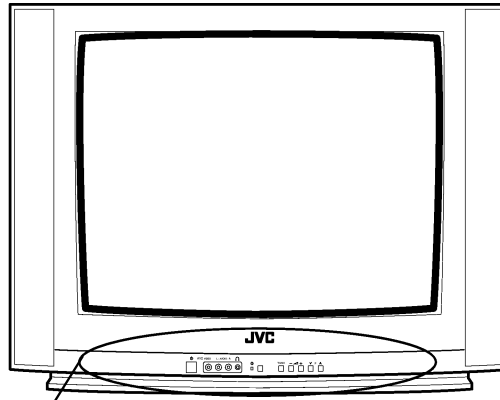

BACK

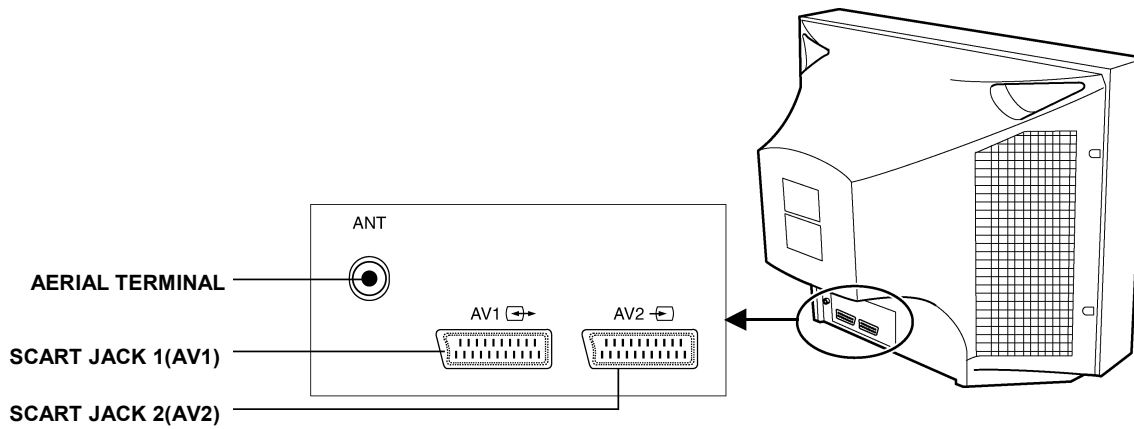




REMOTE CONTROL

TV mode

1. POWER
2. NUMBER 0-9 / NUMBER
3. P.MODE / OK
4. AV
5. UP
6. RIGHT
7. MENU
8. DOWN
9. LEFT
10. MUTING
11. RECALL
12. SLEEP
13. Not used
14. MOVE
15. SKIP
16. TV / TEXT
17. DELETE
18. MODE
19. VCR /  / DVD switch
20. VCR / DVD Control buttons

TELETEXT mode

1. POWER
2. NUMBER 0-9
3. INDEX
4. Not used
5. UP
6. SUBPAGE
7. MENU
8. DOWN
9. HOLD
10. MUTING
11. REVEAL
12. SIZE
13. CANCEL
14. GREEN
15. RED
16. TV / TEXT
17. YELLOW
18. CYAN
19. VCR /  / DVD switch
20. Not used

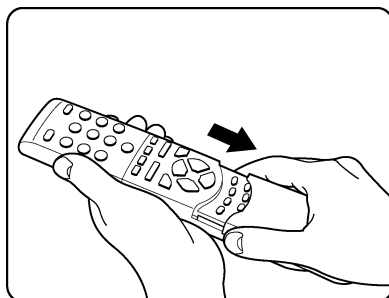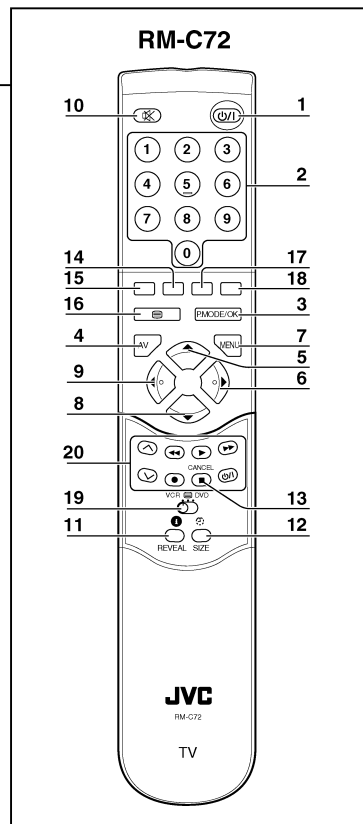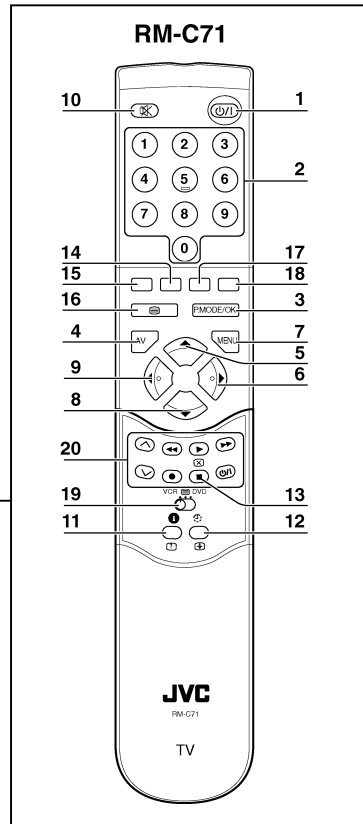


SPECIFIC SERVICE INSTRUCTIONS

DISASSEMBLY PROCEDURE

Note : Before starting work, disconnect the power plug from the wall outlet.

HOW TO REMOVE THE REAR COVER

1. Remove the 11 screws marked (A) .
2. Remove the rear cover backward.

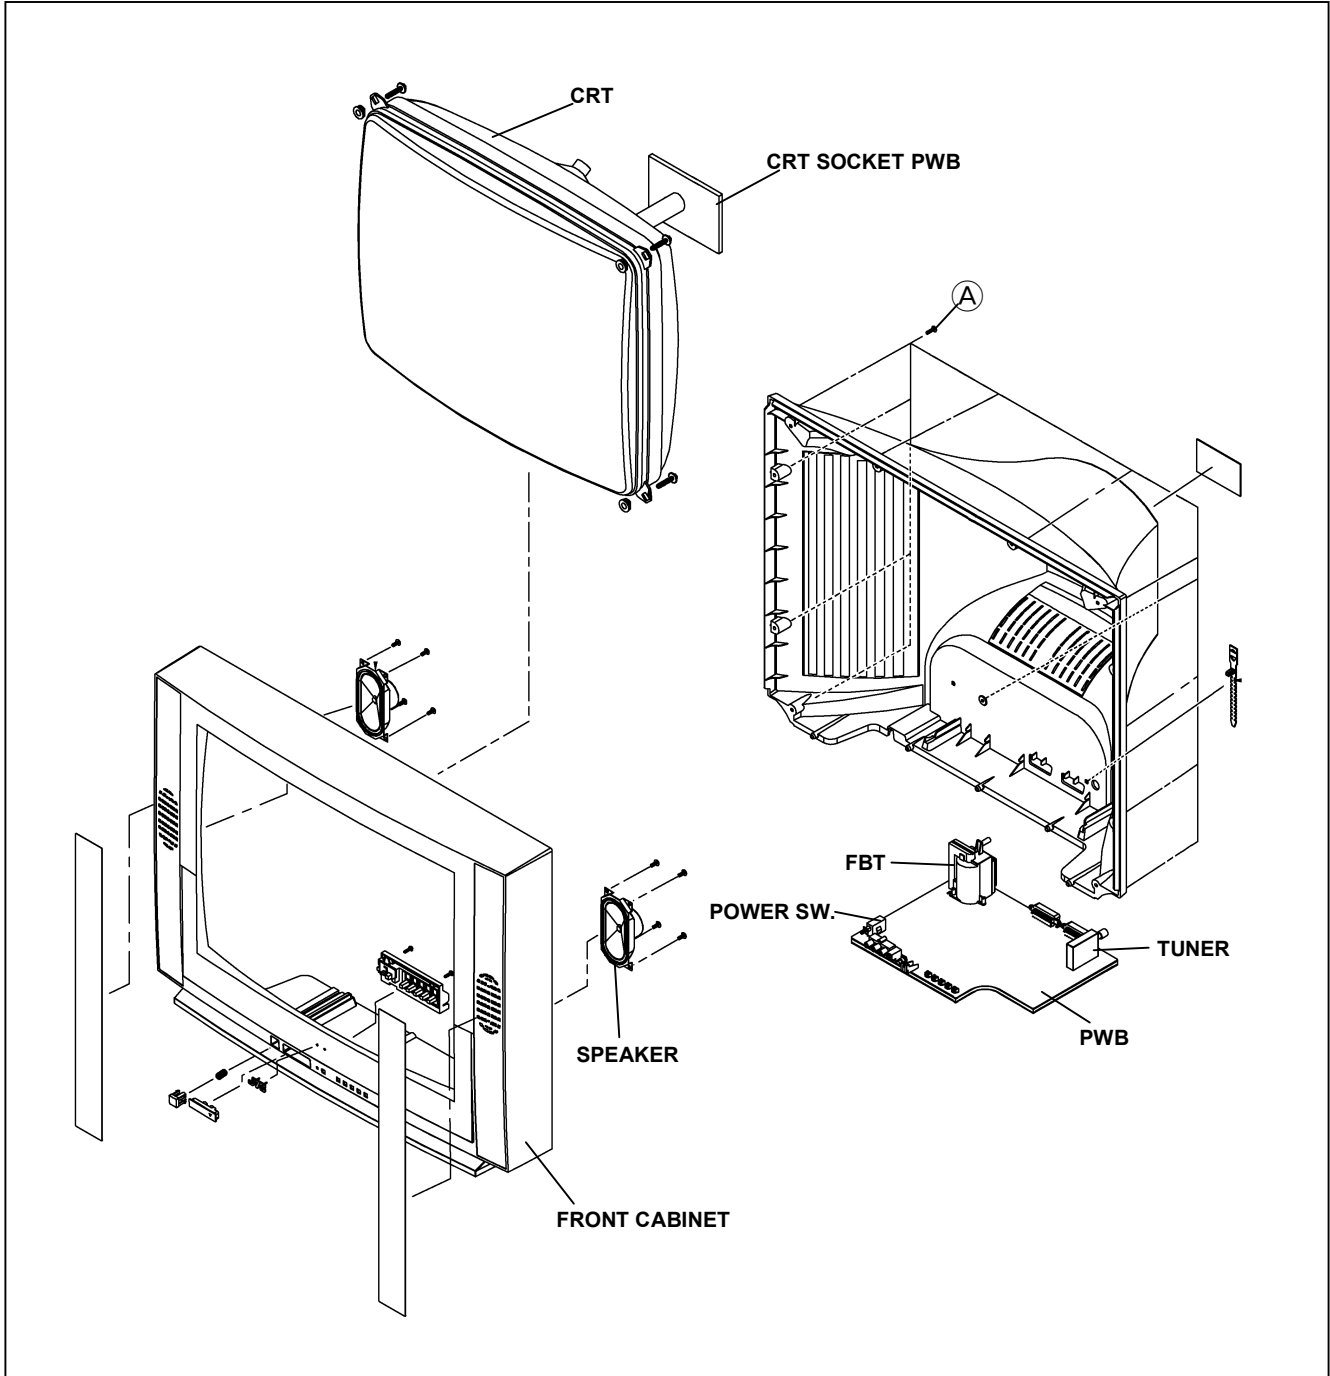

SERVICE ADJUSTMENTS

BEFORE ADJUSTMENT AND MAINTENANCE

1. Don't short any two soldering points or connect any component while TV set is power on.
2. Withdraw power plug before maintenance.
3. In order to ensure safety all components replaced should be identical. (For further details, refer to the component name and component No. in PARTS LIST.)
4. Must be warm up the set for 30 minutes or more and degauss CRT thoroughly with demagnetizer coil before adjustment.


EQUIPMENT FOR ADJUSTMENT

1. Pattern Generator
2. Digital volt meter
3. Oscilloscope
4. Demagnetizer
5. **Service** remote controller (For repair service)
6. Remote controller (RM-C71 or RM-C72)


ADJUSTMENTS PROCEDURES

+B VOLTAGE CHECK

1. Receive a standard colour bar signal.
2. Connect digital volt meter between + of B1 Line circuit and GND.
3. Confirm that voltage is DC 142V \pm 2.0V.

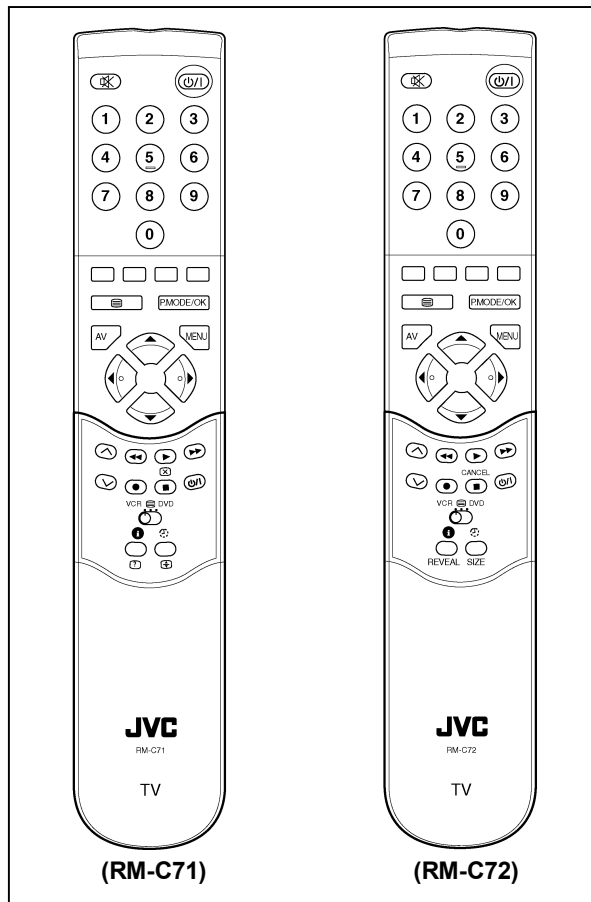

Remote Controller

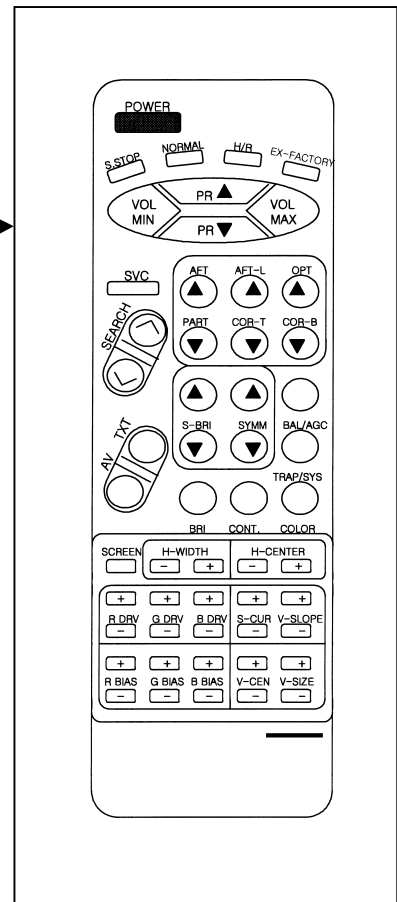


Service Remote Controller

BASIC OPERATION OF SERVICE MENU

REMOTE CONTROLLER (RM-C71, RM-C72)

How to ENTER and EXIT from service mode

1. Select the CH-91.
2. Press the MENU KEY of the remote control unit and select PICTURE from the MENU with the P.(▲)/ P.(▼) key of the remote control unit .
3. While pressing the P. MODE/OK KEY of the remote control unit, select "sharpness" from the MENU with the P.(▲)/ P.(▼) / ◀-/▶ + key. Then, set the set value of "sharpness" to "0" with the ◀-/▶ +KEY.
4. Press the MENU KEY of the remote control unit twice and return to the normal screen. To enter the SERVICE MODE, change the indication of RED, GREEN and MENU, in turn, with the key of the remote control unit.
5. When exiting from the SERVICE MODE, turn the power switch off.

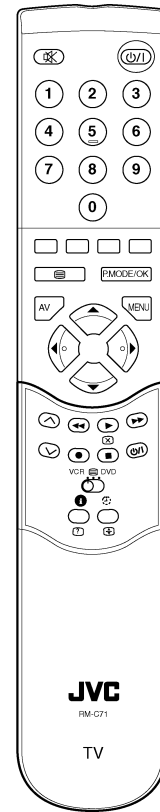

How to set SERVICE MODE

1. Select the setting item you want to change with the P.(▲)/ P.(▼) key on the remote control unit. (The item you selected will be indicated by YELLOW on the display.)
2. When changing the set values, use the ◀-/▶ +KEY on the remote control unit.
3. When the setting has been completed, turn the power switch off. (The changed set values are stored in memory.)


SERVICE MENU screen selection

Press the P.(▲)/ P.(▼) key select menu item.


(The letters of the selected items are displayed in yellow)

Press the ◀-/▶ +KEY setting the value item.

- | | |
|-----------|------------|
| ·AGC | ·VS Cor |
| ·Black R | ·V Shift |
| ·Black G | ·H Width |
| ·WP Red | ·EW Parabo |
| ·WP Green | ·Up Corner |
| ·WP Blue | ·Dw Corner |
| ·H Parall | ·EW Trapez |
| ·H Bow | ·Option |
| ·H Shift | |
| ·V Slope | |
| ·V Amp | |

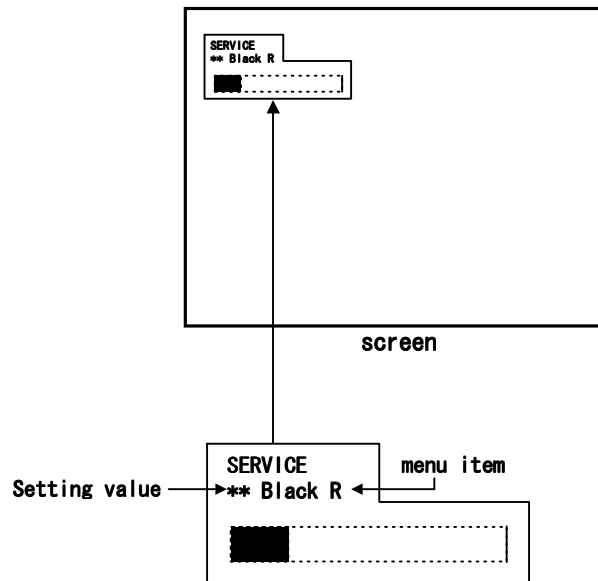

FUNCTION OF SERVICE REMOTE CONTROLLER

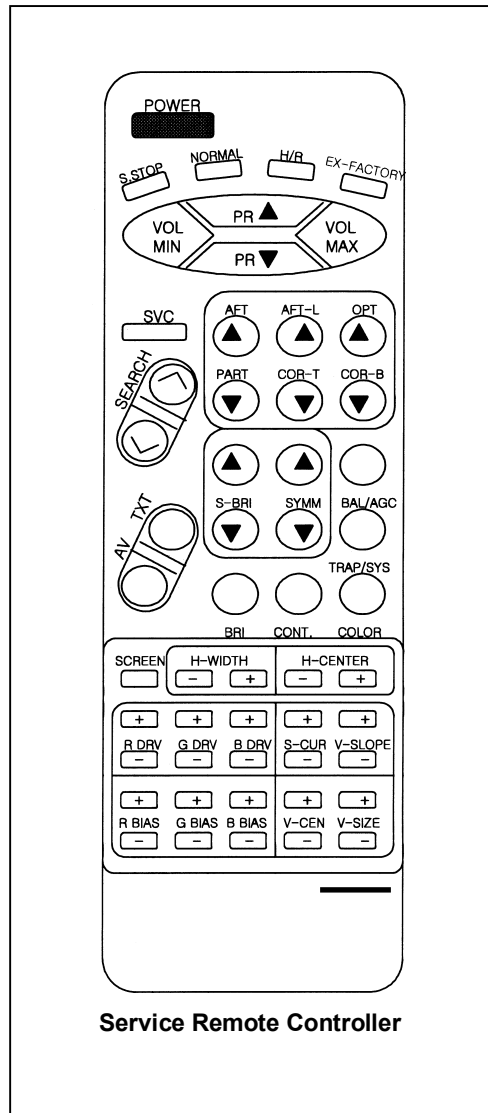

POWER	: Power On/Off key
S STOP	: User R/C mode change (DW→JVC→AIWA)
NORMAL	: NORMAL I →NORMAL II →Favorite
H/R	: Fast heat-run mode in line production
EX-FACTORY	: Not use
VOL MIN	: Volume minimum key
VOL MAX	: Volume maximum key
PR+	: Program up key
PR-	: Program down key
SVC	: Service mode On/Off key
AFT	: AFT adjustment key
AFT-L	: SECAM L AFT adjustment key
OPT	: AGC adjustment key
PART	: Not use
COR-T	: Not use
COR-B	: Not use
SEARCH	: Search up/down key
AV	: AV mode/TV mode toggle key
TXT	: Teletext On/Off key
S-BRI	: Sub-brightness adjustment key
SYMM	: Not use
BAL / AGC	: LED EAST Yes/No toggle key
BRI	: Brightness Min/Max toggle key
CONT	: Contrast Min/Max toggle key
COLOR	: Color Min/Max toggle key
SCREEN	: Horizontal 1 line display key for screen adjustment
H-WIDTH	: H. width adjustment key
H-CENTER	: H. center adjustment key
R DRV	: R drive adjustment key for W/B high beam
G DRV	: G drive adjustment key for W/B high beam
B DRV	: B drive adjustment key for W/B high beam (Do not adjust : B is the reference)
R BIAS	: R bias adjustment key for W/B low beam
G BIAS	: G bias adjustment key for W/B low beam
B BIAS	: B bias adjustment key for W/B low beam (Do not adjust : B is the reference)
S-CUR	: Not use
V-SLOPE	: Not use
V-CEN	: Vertical center adjustment key
V-SIZE	: Vertical size adjustment key

ADJUSTMENTS

SELECT OPTION ITEM

Option	Tuner maker	Cut off / video Amp.
0	DAEWOO / SAMSUNG	140V / 92V
2	SIEL	140V / 92V

G2 ALIGNMENT

- ① TV in AV mode without video signal ⇒ Black screen.
- ② TV preset with WP Red, WP Green and WP Blue equal to 32.
- ③ TV preset with Black R, Black G equal to 8.
- ④ Set TV in NORMAL I mode.
- ⑤ Adjust screen volume (on FBT) such that the highest cathode cut-off voltage measured on CRT board, is Vcut off $\pm 5V$.

Screen size	Vcut-off
28"	140V

WHITE BALANCE

- NOTE**
- When the WHITE BALANCE adjustments are carried out, it is necessary to use the service remocon.
 - Confirm G2 Alignment has been adjusted.

■ Low Light

- ① Press the TV / AV button on the front of the TV unit and enter the VIDEO MODE.
- ② Input a crosshatch pattern signal.
- ③ Press the SVC key to display the SVC screen as shown in Fig.1.
- ④ Press the SCREEN key to display the single horizontal line.
- ⑤ Check the color of the single horizontal line being displayed.
- ⑥ Press the SCREEN key to disappear the single horizontal line.
- ⑦ Adjust the bias values of R, G and B with their respective +/- keys so that the single horizontal line on the screen becomes "white" .
- ⑧ While pressing the SCREEN key, check the color of the single horizontal line on the screen.
- ⑨ Repeat the steps ⑤ ~⑧ above until the single horizontal line on the screen becomes "white" .

■ High Light


- ⑩ Press the SCREEN key to display the single horizontal line.
- ⑪ In the same manner as for “Low Light” , adjust R DRIVE and G DRIVE with their respective +/- keys.
- ⑫ When the adjustment has been completed, press the SVC button to exit from the ADJ’ MENT MODE.

FOCUS

- ① Input a crosshatch pattern signal
- ② Adjust the FOCUS volume (on FBT) to have the best resolution on screen.

VERTICAL GEOMETRY

Adjust the V Amp, V Shift, VSC or and V slope to compensate for vertical distortion.

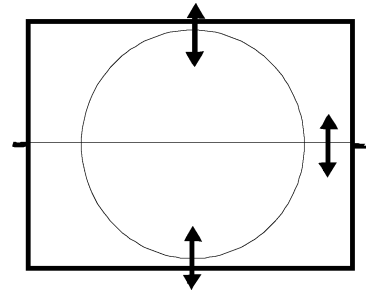


HORIZONTAL PICTURE CENTERING


Adjust H Shift, to have the picture in the center of the screen.

EAST / WEST CORRECTION


Adjust the H. Parall, H. Bow, H. Widdth, EW. Parabo, Up corner, Dw Corner, EW Trapez to compensate for geometrical distortion.

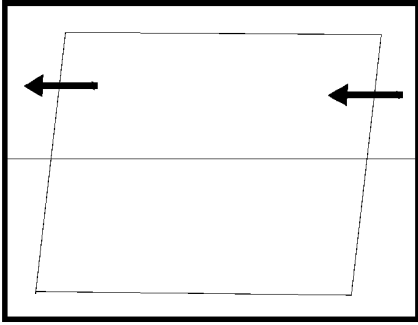


H. Parall

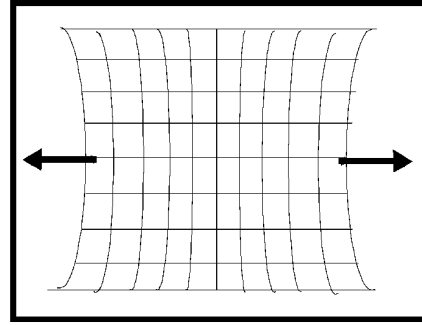


EW.Parabo

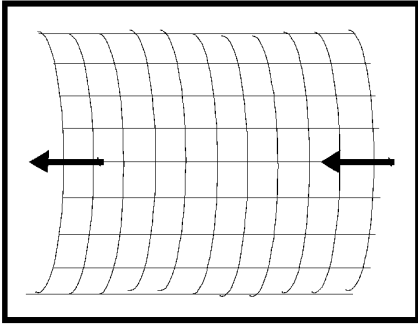


H. Bow

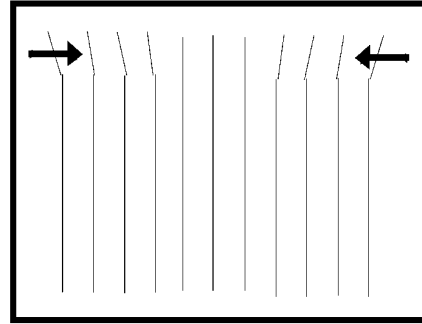


Up Corner

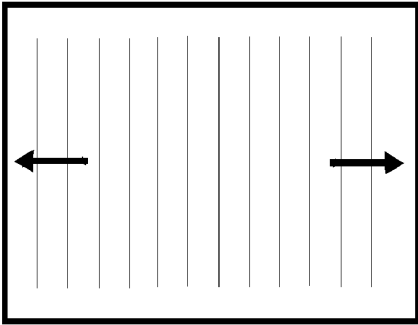

H. Width

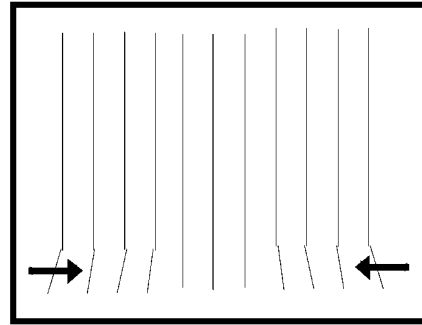

Dw Corner

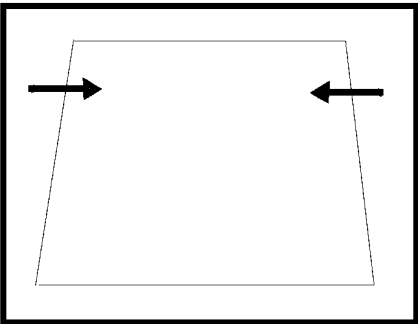

EW Trapez

PARTS LIST

CAUTION

- The parts identified by the \triangle symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety .
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied .
- P. W. Board Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied .

ABBREVIATIONS OF RESISTORS, TRANSISTOR, CAPACITORS AND TOLERANCES


RESISTORS		CAPACITORS	
C R	Carbon Resistor	CERA C	Ceramic Capacitor
V R	Variable Resistor	ELECTRO C	Electrolytic Capacitor
		MYLAR C	Mylar Capacitor
TR	Transistor		

TOLERANCES									
F	G	J	K	M	N	R	H	Z	P
$\pm 1\%$	$\pm 2\%$	$\pm 5\%$	$\pm 10\%$	$\pm 20\%$	$\pm 30\%$	+30% -10%	+50% -10%	+80% -20%	+100% 0%


■ PACKING & EXPLODED VIEW PARTS LIST

△	Ref.	Symbol No.	Part No.	Part Name	Description
△	1	M201	4852068011	MASK FRONT	HIPS BK
△	2	M211	4852151911	COVER BACK	HIPS BK
	3	M352	97P4602700	CLAMP CORD	NYLON 66 BLK 5280N
	4	M481	4854854101	BUTTON POWER	ABS BK
	5	M491	4854939901	BUTTON CTRL	ABS BK
△	6	M541	4855415800	SPEC PLATE	150ART P/E FILM (C/TV)
	7	M501	4855059001	ECO CTRL	PVC TO.25
	8	M561	4855617401	MARK BRAND	AL (SILVER)
	9	V901B	4856015800	SCREW CRT FIX	L=27 (×4)
	10	V901A	4856215403	WASHER RUBBER	CR T3.0 (×4)
	11	SP01, SP02	4858311110	SPEAKER	12W 8 OHMSP-58126F (×2)
	12	M481A	4856716000	SPRING	SWPA PIE0.5
	13	M211A	7122401612	SCREW TAPPING	T2S TRS 4X16 MFZN BK (×11)
	14	M811	4858187200	PAD	EPS 28G7
	15	ZZ130	PTPKCPD234	PACKING ASSY	DTL-28G7F
△	16	V901	4859622160	CRT (ITC)	A66EAK071X11 (Inc. DY, Deg. CRT EARTH WITE)
△	17	10000	48586054K1	MANUAL INSTRUCTION	DTM-2082CW
	18	M821	4858213800	BAG INSTRUCTION	L. D. P. E TO.05X250X400
	19	M822	4858215600	BAG P. E	PE FOAM TO.5X1600X1270

■ PACKING

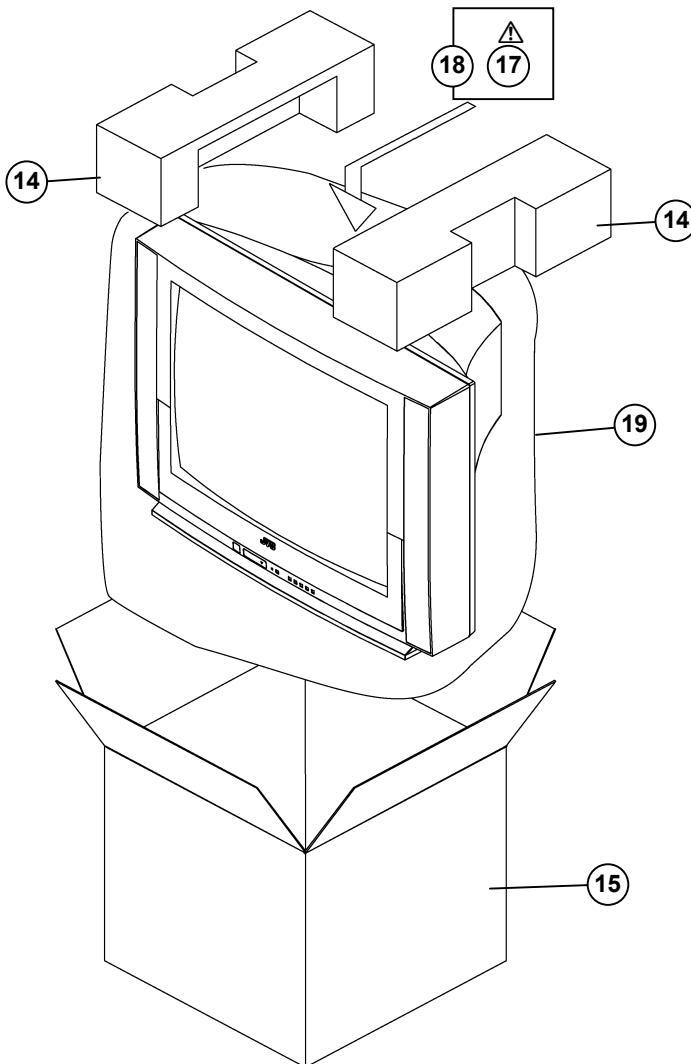

EXPLODED VIEW

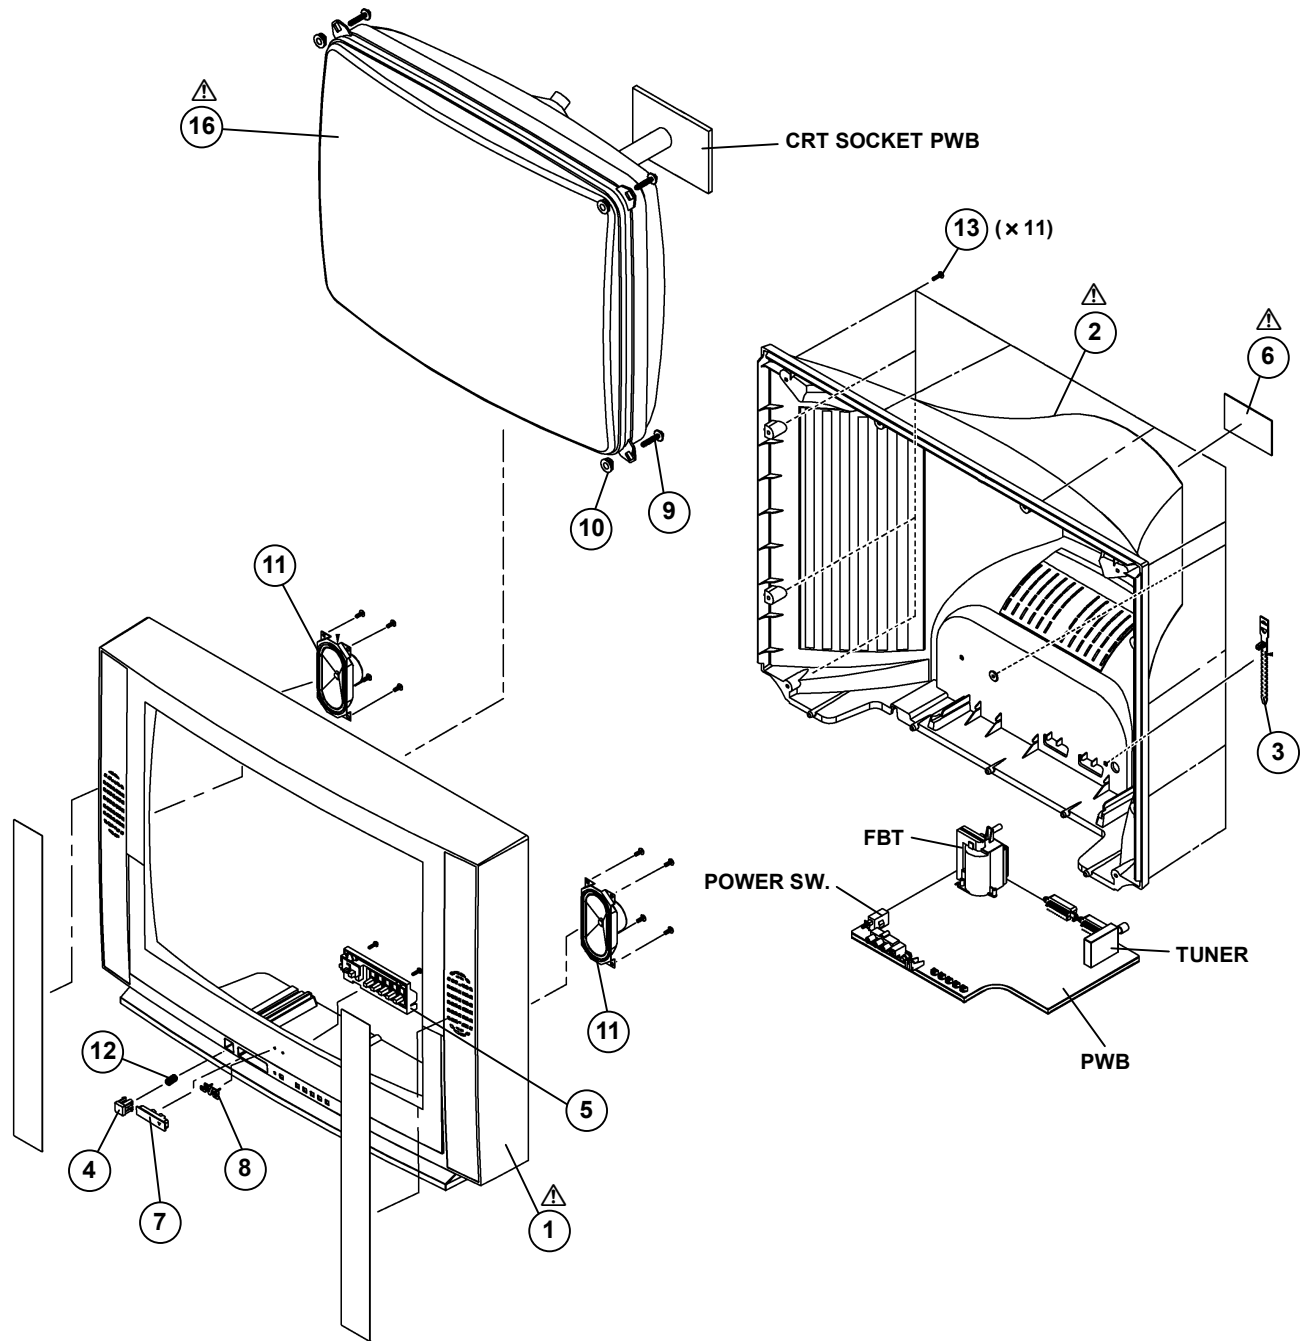

■ ELECTRICAL PARTS LIST

△ Symbol No.	Part No.	Part Name	Description
C101	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C102	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3*11) TP
C103	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
C104	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)
C106	CEXF1H221V	C ELECTRO	50V RSS 220MF (10X16) TP
C108	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
C110	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
C120	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)
C121	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C305	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
C313	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C315	CEXF2C470C	C ELECTRO	160V RUS 47MF (13X25) TP
C320	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C350	CCXF1H473Z	C CERA	50V F 0.047MF Z (TAPPING)
C351	CXF1H473Z	C CERA	50V F 0.047MF Z (TAPPING)
C370	CMXM2A473J	C MYLAR	100V 0.047MF J TP
C401	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C402	CMYH3C562J	C MYLAR	1.6KV 5600PF J (BUP)
C404	CMYT3C472J	C MYLAR	1.6KV 4700PF MKP
C408	CMYT2G274J	C MYLAR	400V 0.27MF MKP
C412	CXF2C339V	C ELECTRO	160V RSS 3.3MF (8X16) TP
C414	CMXM2A104J	C MYLAR	100V 0.1MF (8X16) TP
C415	CXF2E479V	C ELECTRO	250V RSS 4.7MF (10X16) TP
C418	CCXB1H102K	C CERA	50V B 1000PF K(TAPPING)
C420	CCXB2H222K	C CERA	500V B 2200PF K (TAPPING)
C430	CCYR3D681K	C CERA	2KV R 680PF K 125C
C431	CMXB2G472J	C MYLAR	400V 4700PF J TP
C440	CMXE2G273J	C MYLAR	400V PU 0.027MF J
C499	CEYD1H689W	C ELECTRO	50V RHD 6.8MF (16X35.5)
C500	CXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C501	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C509	CXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP
C511	CMXB1H224J	C MYLAR	50V EU 0.22MF J(TP)
C512	CMXB1H224J	C MYLAR	50V EU 0.22MF J(TP)
C513	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
C514	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C515	CBZR1C222M	C CERA	Y5R 16V 2200PF M AXIAL
C516	CBZR1C472M	C CERA	Y5R 16V 4700PF M AXIAL
C517	CXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C518	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
C519	CXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C520	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
C521	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
C523	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
C524	CMXB1H104J	C MYLAR	50V EU 0.1MF J (TP)
C525	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)
C526	CMXB1H104J	C MYLAR	50V EU 0.1MF J (TP)
C527	CMXM2A473J	C MYLAR	100V 0.047MF J TP
C528	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C529	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
C530	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C531	CCXF1H473Z	C CERA	50V F 0.047MF Z (TAPPING)
C532	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C533	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
C534	CCZF1H223Z	C CERA	50V F 0.022MF Z
C535	CCZF1H223Z	C CERA	50V F 0.022MF Z
C536	CCZF1H223Z	C CERA	50V F 0.022MF Z
C537	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C540	CXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C541	CXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C542	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C543	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C550	CXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
C555	CXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C560	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C561	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP

△ Symbol No.	Part No.	Part Name	Description
C564	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C565	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C577	CCZB1H561K	C CERA	50V B 560PF K (AXIAL)
C585	CCXB1H222K	C CERA	50V B 2200PF K (TAPPING)
C587	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
C588	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
C589	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
C590	CXCH1H220J	C CERA	50V CH 22PF J (TAPPING)
C591	CXCH1H220J	C CERA	50V CH 22PF J (TAPPING)
C592	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C593	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C601	CCXB1H472K	C CERA	50V B 4700PF K (TAPPING)
C602	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C603	CCXB1H472K	C CERA	50V B 4700PF K (TAPPING)
C604	CXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP
C605	CXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP
C608	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C610	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C611	CXF1H339V	C ELECTRO	50V RSS 3.3MF (5X11) TP
C612	CXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C613	CXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C614	CXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C615	CXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C616	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C617	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C620	CXCH1H509D	C CERA	50V CH 5PF D (TAPPING)
C621	CXCH1H509D	C CERA	50V CH 5PF D (TAPPING)
C622	CCXF1H223Z	C CERA	50V F 0.022MF Z (TAPPING)
C625	CXF1H479	C ELECTRO	50V RSS 4.7MF (5*11) TP
C626	CXF1H479V	C ELECTRO	50V RSS 4.7MF (5*11) TP
C629	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C630	CXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP
C631	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C635	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C636	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C650	CXCH1H470J	C CERA	50V CH 47PF J (TAPPING)
C660	CXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C661	CMXB1H224J	C MYLAR	50V EU 0.22MF J(TP)
C662	CMXB1H224J	C MYLAR	50V EU 0.22MF J(TP)
C665	CCXB1H472K	C CERA	50V B 4700PF K (TAPPING)
C666	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
C667	CCXB1H472K	C CERA	50V B 4700PF K (TAPPING)
C668	CMXB1H224J	C MYLAR	50V EU 0.22MF J(TP)
C669	CMXB1H224J	C MYLAR	50V EU 0.22MF J(TP)
C690	CXF1H479V	C ELECTRO	50V RSS 4.7MF (5*11) TP
C691	CXF1H479V	C ELECTRO	50V RSS 4.7MF (5*11) TP
C695	CXCH1H470J	C CERA	50V CH 47PF J (TAPPING)
C696	CXCH1H470J	C CERA	50V CH 47PF J (TAPPING)
C770	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C771	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
△ C801	CL1SC3474M	C LINE ACROSS	275V 0.47MF
C803	CCXB	3A472K	C CERA 1KV B 4700PF K (TAPPING)
C804	CCXB3A472K	C CERA	1KV B 4700PF K (TAPPING)
C805	CEYN2G181P	C ELECTRO	400V LHS 180MF (25X35)
C806	CXF1H330V	C ELECTRO	50V RSS 33MF (6.3X11) TP
C807	CCXF1H473Z	C CERA	50V F 0.047MF Z (TAPPING)
C808	CXF1H479V	C ELECTRO	50V RSS 4.7MF (5*11) TP
C809	CCZB1H102	C CERA	50V B 1000PF K (AXIAL)
C810	CBXB3D102K	C CERA SEMI	2KV BL(N) 1000PF K (T)
△ C812	CH1AFE472M	C CERA AC	4KV 4700PF M KX DE1610
C813	CEYF2E470V	C ELECTRO	250V RSS 47MF (16X25)
C814	CEYF2E470V	C ELECTRO	250V RSS 47MF (16X25)
C820	CCYR3A471K	C CERA	1KV 470PF K 125C
C821	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)
C823	CXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP
C824	CCYR3A471K	C CERA	1KV 470PF K 125C
C830	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
C831	CCYR3A471K	C CERA	1KV 470PF K 125C
C832	CXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP
C835	CXF1H470V	C ELECTRO	50V RSS 47MF (6.3*11) TP

△ Symbol No.	Part No.	Part Name	Description
C840	CXF1C222V	C ELECTRO	16V RSS 2200MF (13X25) TP
C841	CXF1C222V	C ELECTRO	16V RSS 2200MF (13X25) TP
C844	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C850	CCZB1H821K	C CERA	50V B 820PF K (AXIAL)
C861	CXF1E102V	C ELECTRO	25V RSS 1000MF (13X20) TP
C863	CXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C866	CCYR3A471K	C CERA	1KV 470PF K 125C
C888	CXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C905	CXF2E479V	C ELECTRO	250V RSS 4.7MF (10X16) TP
C910	CCXB1H152K	C CERA	50V B 1500PF K (TAPPING)
C950	CXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C965	CBXB3D102K	C CERA SEMI	2KV BL(N) 1000PF K (T)
C968	CCXL2E104K	C MYLAR	250V 0.1MF K MEU TP
CA01	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
CA02	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
CA03	CCZB1H101K	C CERA	50V B 100PF K (AXIAL)
CA10	CCXB1H102K	C CERA	50V B 1000PF K (TAPPING)
D100	DSML1216W-	LED	SML1216W
D101	DBAT85----	DIODE	BAT85 (TAPPING)
D102	D1SS85TA--	DIODE	1SS85TA
D313	DBYW36----	DIODE	BYW36 (TAPPING)
D360	DTZX22C----	DIODE ZENER	TZX22C (TAPPING)
D336	DUZ33B----	DIODE ZENER	UZ-33B
D403	DBY228----	DIODE	BY228
D404	DBYW76----	DIODE	BYW76
D405	DBYW36----	DIODE	BYW36 (TAPPING)
D407	DBYW36----	DIODE	BYW36 (TAPPING)
D408	DBYW36----	DIODE	BYW36 (TAPPING)
D410	D1N4003---	DIODE	1N4003 (TAPPING)
D411	D1N4003---	DIODE	1N4003 (TAPPING)
D450	DBYW36----	DIODE	BYW36 (TAPPING)
D520	D1N4148---	DIODE	1N4148 (TAPPING)
D521	D1N4148---	DIODE	1N4148 (TAPPING)
D591	DTZX2V4A--	DIODE ZENER	TZX2V4A
D710	DTZX5V1B--	DIODE ZENER	TZX5V1B (TAPPING)
△ D801	DBYT51J---	DIODE	BYT51J (TAPPING)
△ D802	DBYT51J---	DIODE	BYT51J (TAPPING)
△ D803	DBYT51J---	DIODE	BYT51J (TAPPING)
△ D804	DBYT51J---	DIODE	BYT51J (TAPPING)
D805	DBYW36----	DIODE	BYW36 (TAPPING)
D806	DBYW36----	DIODE	BYW36 (TAPPING)
D808	DBYW36----	DIODE	BYW36 (TAPPING)
D809	DBYW36----	DIODE	BYW36 (TAPPING)
D810	DBYW36----	DIODE	BYW36 (TAPPING)
D811	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
D820	DBYW76----	DIODE	BYW76
D821	DBYW36----	DIODE	BYW36 (TAPPING)
D822	DTZX9V1B--	DIODE ZENER	TZX9V1B (TAPPING)
D824	D1N4148---	DIODE	1N4148 (TAPPING)
D825	D1N4148---	DIODE	1N4148 (TAPPING)
D830	DBYW36----	DIODE	BYW36 (TAPPING)
D831	DBYW36----	DIODE	BYW36 (TAPPING)
D840	D1N4148---	DIODE	1N4148 (TAPPING)
D841	D1N4148---	DIODE	1N4148 (TAPPING)
D860	DBYW76----	DIODE	BYW76
D904	DBAV21----	DIODE	BAV21 (TAPPING)
D905	DBAV21----	DIODE	BAV21 (TAPPING)
D906	DBAV21----	DIODE	BAV21 (TAPPING)
D951	D1N4148---	DIODE	1N4148 (TAPPING)
D952	D1N4148---	DIODE	1N4148 (TAPPING)
D953	D1N4148---	DIODE	1N4148 (TAPPING)
D954	D1N4148---	DIODE	1N4148 (TAPPING)
DA01	D1N4148---	DIODE	1N4148 (TAPPING)
DA02	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
DA03	DTZX5V1B--	DIODE ZENER	TZX5V1B (TAPPING)
DA04	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
DA06	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
DA08	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
DA09	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
DA10	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)

△ Symbol No.	Part No.	Part Name	Description	
	DA11	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA13	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA14	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA15	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA16	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA20	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA23	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA24	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
	DA27	DTZX5V6B--	DIODE ZENER	TZX5V6B (TAPPING)
△	F801	5FSCB4022R	FUSE	GERASEMKO F4AH 4A 250V MF51
	F801A	4857415001	CLIP FUSE	PFC5000-0702
	F801B	4857415001	CLIP FUSE	PFC5000-0702
	G900	4SG0D00103	SPARK GAP	S-23 900V-1.5KV
	HP1	4859102130	JACK EARPHONE	YSC-1537
	I301	1TDA8358J-	IC VERTICAL	TDA8358J
	I501	1DW3653BE1	IC MAIN	DW9365/N1/3-BE1
	I601	1MSP3415D-	IC RF	MSP-3415D
	I602	1TDA8946J-	IC AUDIO	TDA8946J
	I702	1AT24C08PC	IC MEMORY	AT24C08-10PC
	I703	1TSOP1238W	IC PREAMP	TSOP1238W11
	I801	1STRF6653-	IC SMPS	STR-F6653
△	I804	1LTV817C--	IC PHOTO COUPLER	LTV-817C
	I805	1UPC574J--	IC	UPC574J
	I806	1SE130N---	IC	SE130N
	I810	TX0202DA--	THYRISTOR	X0202DA
	I820	1KA7805---	IC REGULATOR	KA7805
	I822	1KA7808---	IC REGULATOR	KA7808
	I823	1LE33CZ---	IC REGULATOR	LE33CZ
	I901	1TDA6107Q-	IC VIDEO	TDA6107Q
	JPA1	4859200401	SOCKET RGB	SR-21A1 (ANGLE TYPE)
	JPA2	4859200401	SOCKET RGB	SR-21A1 (ANGLE TYPE)
	JPA3	4859108450	JACK PIN BOARD	YSC03P-4120-14A
	L101	5CPZ100K02	COIL PEAKING	10UH 3.5MM K (LAL02TB)
	L350	5CPZ109M04	COIL PEAKING	1UH 10.5MM M (LAL04TB)
	L401	58H0000025	COIL H-LINEARITY	TRL-330
	L402	58C7070085	COIL CHOKE	TLN-3062A
	L500	5CPZ120K02	COIL PEAKING	12UH 3.5MM K (LAL02TB)
	L50	5CPZ100K02	COIL PEAKING	10UH 3.5MM K (LAL02TB)
	L502	5CPZ100K02	COIL PEAKING	10UH 3.5MM K (LAL02TB)
	L510	5CPZ100K02	COIL PEAKING	10UH 3.5MM K (LAL02TB)
	L511	5CPZ100K02	COIL PEAKING	10UH 3.5MM K (LAL02TB)
	L512	5CPZ100K02	COIL PEAKING	10UH 3.5MM K (LAL02TB)
	L601	5CPZ479K02	COIL PEAKING	4.7UH 3.5MM K (LAL02TB)
	L602	5CPZ479K02	COIL PEAKING	4.7UH 3.5MM K (LAL02TB)
	L603	5CPZ479K02	COIL PEAKING	4.7UH 3.5MM K (LAL02TB)
	L650	5MC0000100	COIL BEAD	MD-5 (HC-3550)
	L801	5MC0000100	COIL BEAD	MD-5 (HC-3550)
	L802	58C9430599	COIL CHOKE	AZ-9004Y (94MH)
	L803	5MC0000100	COIL BEAD	MD-5 (HC-3550)
△	LF801	5PLF24A1--	FILTER LINE	LF-24A1
	M351	4853533600	HOLDER LED	P. P BK
	Q101	TSTC1740Y-	TR	STC1740-Y
	Q103	TKTC3202Y-	TR	KTC3202Y
	Q401	T2SD1880--	TR	2SD1880
	Q402	T2SD1207T-	TR	2SD1207-T
	Q501	TSTA933Y--	TR	STA933-Y
	Q502	TSTC1740Y-	TR	STC1740-Y
	Q503	TSTC1740Y-	TR	STC1740-Y
	Q504	TSTC1740Y-	TR	STC1740-Y
	Q505	TSTC1740Y-	TR	STC1740-Y
	Q507	TSTA933Y--	TR	STA933-Y
	Q508	TSTC1740Y-	TR	STC1740-Y
	Q509	TSTA933Y--	TR	STA933-Y
	Q510	TSTA933Y--	TR	STA933-Y
	Q511	TSTA933Y--	TR	STA933-Y
	Q807	TSTC1740Y-	TR	STC1740-Y
	Q808	TSTC1740Y-	TR	STC1740-Y
	Q809	TSTC1740Y-	TR	STC1740-Y
	Q810	TSTC1740Y-	TR	STC1740-Y
	Q811	TSTC1740Y-	TR	STC1740-Y

△ Symbol No.	Part No.	Part Name	Description
Q950	TSTC1740Y-	TR	STC1740-Y
R101	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J
R102	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R103	RD-AZ123J-	R CARBON FILM	1/6 12K OHM J
R104	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J
R105	RD-AZ392J-	R CARBON FILM	1/6 3.9K OHM J
R106	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R107	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R113	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J
R114	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J
R115	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J
R116	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J
R117	RD-AZ222J-	R CARBON FILM	1/6 2.2K OHM J
R120	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R310	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R311	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R330	RD-2Z101J-	R CARBON FILM	1/2 100 OHM J
R331	RD-2Z101J-	R CARBON FILM	1/2 100 OHM J
R340	RD-4Z473J-	R CARBON FILM	1/4 47K OHM J
R350	RN-4Z2001F	R METAL FILM	1/4 2.0K OHM F
R351	RN-4Z2001F	R METAL FILM	1/4 2.0K OHM F
R370	RD-4Z159J-	R CARBON FILM	1/4 1.5 OHM J
R394	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J
R395	RD-4Z394J-	R CARBON FILM	1/4 390K OHM J
R396	RD-AZ272J-	R CARBON FILM	1/6 2.7K OHM J
R397	RD-AZ823J-	R CARBON FILM	1/6 82K OHM J
R398	RD-2Z828J-	R CARBON FILM	1/2 0.82 OHM J
R399	RS02Y120JS	R M-OXIDE FILM	2W 12 OHM J SMALL
R401	RD-4Z272J-	R CARBON FILM	1/4 2.7K OHM J
R402	RD-4Z220J-	R CARBON FILM	1/4 22 OHM J
R404	RD-4Z399J-	R CARBON FILM	1/4 3.9 OHM J
R406	RS02Y471JS	R M-OXIDE FILM	2W 470 OHM J SMALL
R415	RS02Y102JS	R M-OXIDE FILM	2W 1K OHM J SMALL
R420	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J
R450	RS02Y223JS	R M-OXIDE FILM	2W 22K OHM J SMALL
R501	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R502	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R503	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J
R504	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R505	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R506	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J
R507	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R508	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J
R509	RD-AZ681J-	R CARBON FILM	1/6 680 OHM J
R512	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R513	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R514	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R515	RD-AZ153J-	R CARBON FILM	1/6 15K OHM J
R516	RD-AZ393J-	R CARBON FILM	1/6 39K OHM J
R517	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R518	RD-AZ273J-	R CARBON FILM	1/6 27K OHM J
R520	RD-AZ333J-	R CARBON FILM	1/6 33K OHM J
R521	RD-AZ391J-	R CARBON FILM	1/6 390 OHM J
R522	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R523	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J
R524	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J
R525	RD-AZ104J-	R CARBON FILM	1/6 100K OHM J
R526	RD-4Z479J-	R CARBON FILM	1/4 4.7 OHM J
R527	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J
R528	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R530	RD-AZ470J-	R CARBON FILM	1/6 47 OHM J
R531	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R533	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R534	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R537	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R538	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R539	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R540	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R541	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R542	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J

△ Symbol No.	Part No.	Part Name	Description
R543	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R544	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R545	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J
R546	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R547	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R548	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R549	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R550	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R551	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R555	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R556	RD-AZ562J-	R CARBON FILM	1/6 5.6K OHM J
R567	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R570	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R580	RD-AZ561J-	R CARBON FILM	1/6 560 OHM J
R585	RD-AZ224J-	R CARBON FILM	1/6 220K OHM J
R586	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R587	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R588	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R589	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R591	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R592	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R593	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R594	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R595	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J
R597	RN-4Z1502F	R METAL FILM	1/4 15K OHM F
R598	RN-4Z1502F	R METAL FILM	1/4 15K OHM F
R599	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R605	RD-AZ751J-	R CARBON FILM	1/6 750 OHM J
R606	RD-AZ751J-	R CARBON FILM	1/6 750 OHM J
R608	RD-2Z151J-	R CARBON FILM	1/2 150 OHM J
R609	RD-2Z151J-	R CARBON FILM	1/2 150 OHM J
R610	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R614	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R615	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R620	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R621	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R622	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R650	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J
R660	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J
R661	RD-AZ822J-	R CARBON FILM	1/6 8.2K OHM J
R662	RD-AZ822J-	R CARBON FILM	1/6 8.2K OHM J
R700	RD-2Z332J-	R CARBON FILM	1/2 3.3K OHM J
R710	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J
R711	RD-AZ431J-	R CARBON FILM	1/6 430 OHM J
R713	RD-AZ681J-	R CARBON FILM	1/6 680 OHM J
R720	RD-AZ122J-	R CARBON FILM	1/6 1.2K OHM J
R721	RD-AZ181J-	R CARBON FILM	1/6 180 OHM J
R722	RD-AZ221J-	R CARBON FILM	1/6 220 OHM J
R723	RD-AZ331J-	R CARBON FILM	1/6 330 OHM J
R724	RD-AZ471J-	R CARBON FILM	1/6 470 OHM J
R801	DT120B8010	POSISTOR	T120-B80-A110
R802	RS02Y753JS	R M-OXIDE FILM	2W 75K OHM J SMALL
R803	RS02Y473JS	R M-OXIDE FILM	2W 47K OHM J SMALL
R804	RF02Y228K-	R FUSIBLE	2W 0.22 OHM K
R805	RD-2Z100J-	R CARBON FILM	1/2 10 OHM J
R806	RD-4Z472J-	R CARBON FILM	1/4 4.7K OHM J
R807	RD-2Z272J-	R CARBON FILM	1/2 2.7K OHM J
R808	RS02Y821JS	R M-OXIDE FILM	2W 820 OHM J SMALL
R810	RD-4Z102J-	R CARBON FILM	1/4 1K OHM J
△ R811	RC-2Z565KP	R CARBON COMP	1/2 5.6M OHM K
R817	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J
R819	RX10B339JN	R CEMENT	10W 3.3 OHM J BENCH 4P
R820	RD-AZ102J-	R CARBON FILM	1/6 1K OHM J
R821	RD-4Z102J-	R CARBON FILM	1/4 1K OHM J
R823	RD-2Z512J-	R CARBON FILM	1/2 5.1K OHM J
R829	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J
R830	RD-AZ332J-	R CARBON FILM	1/6 3.3K OHM J
R840	RD-4Z220J-	R CARBON FILM	1/4 22 OHM J
R841	RD-2Z479J-	R CARBON FILM	1/2 4.7 OHM J
R850	RD-2Z479J-	R CARBON FILM	1/2 4.7 OHM J

△ Symbol No.	Part No.	Part Name	Description
R855	RD-4Z185J-	R CARBON FILM	1/4 1.8M OHM J
R870	RD-2Z222J-	R CARBON FILM	1/2 2.2K OHM J
R888	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
R910	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R911	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R912	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
R913	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K
R914	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K
R915	RC-2Z102K-	R CARBON COMP	1/2 1K OHM K
R920	RF01Y109JA	R FUSIBLE	1W 1 OHM J A CURVE
R921	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R922	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R923	RD-AZ472J-	R CARBON FILM	1/6 4.7K OHM J
R951	RD-4Z244J-	R CARBON FILM	1/4 240K OHM J
R952	RD-4Z123J-	R CARBON FILM	1/4 12K OHM J
R953	RD-AZ153J-	R CARBON FILM	1/6 15K OHM J
R954	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J
R955	RD-AZ223J-	R CARBON FILM	1/6 22K OHM J
RA01	RD-AZ680J-	R CARBON FILM	1/6 68 OHM J
RA02	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
RA03	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
RA04	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
RA05	RD-AZ103J-	R CARBON FILM	1/6 10K OHM J
RA06	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J
RA08	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J
RA09	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J
RA10	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
RA11	RD-AZ680J-	R CARBON FILM	1/6 68 OHM J
RA12	RD-AZ680J-	R CARBON FILM	1/6 68 OHM J
RA16	RD-AZ680J-	R CARBON FILM	1/6 68 OHM J
RA19	RD-AZ750J-	R CARBON FILM	1/6 75 OHM J
RA20	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J
RA21	RD-AZ473J-	R CARBON FILM	1/6 47K OHM J
RA40	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
RA41	RD-AZ101J-	R CARBON FILM	1/6 100 OHM J
RA44	RD-AZ682J-	R CARBON FILM	1/6 6.8K OHM J
△ SCT1	4859303530	SOCKET CRT	PCS629-03C
SF1	5PK3953M--	FILTER SAW	K3953M
SF2	5PK9650M--	FILTER SAW	K9650M
SW700	5S50101090	SW TACT	SKHV17910A
SW701	5S50101090	SW TACT	SKHV17910A
SW702	5S50101090	SW TACT	SKHV17910A
SWW70	5S50101090	SW TACT	SKHV17910A
SW704	5S50101090	SW TACT	SKHV17910A
△ SW801	5S40101143	SW PUSH	PS3-22SP (P. C. B)
T401	50D19A1---	TRANS DRIVE	TD-19A1
△ T402	50H0000205	FBT	1342.0026
△ T801	50M4936B1-	TRANS SMPS	2094.0041
U100	4859719930	TUNER VARACTOR	DT5-BF18D
X502	5XE12R000E	CRYSTAL QUARTZ	HC-49/U 12.0000MHZ 30PPM
X601	5XE18R432E	CRYSTAL QUARTZ	HC-49/U 18.43200MHZ 30PPM
Z501	5PXP55R5MB	FILTER CERA	TPS5.5MB-TF21 TAPING
Z601	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z602	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z603	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z604	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z605	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z606	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z607	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z608	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z609	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470PF
Z610	5PXF1B471M	FILTER EMI	CFI 06 B 1H 470P

JVC

VICTOR COMPANY OF JAPAN, LIMITED

TELEVISION RECEIVER DIVISION 1106 Heta, Iwai-city, Ibaraki-prefecture, 306-0698, Japan



Printed in Japan
 VP 0006
 DP6052