


# SECTION 4 CHARTS AND DIAGRAMS

## NOTES OF SCHEMATIC DIAGRAM

### Safety precautions

The Components identified by the symbol  are critical for safety. For continued safety, replace safety critical components only with manufacturer's recommended parts.

### 1. Units of components on the schematic diagram

Unless otherwise specified.


- 1) All resistance values are in ohm, 1/6 W, 1/8 W (refer to parts list).  
Chip resistors are 1/16 W.  
K or k: kΩ (1000Ω), M: MΩ (1000kΩ)
- 2) All capacitance values are in μF, (P: PF).
- 3) All inductance values are in μH, (m: mH).
- 4) All diodes are 1SS133, MA165 or 1N4148M (refer to parts list).

### 2. Indications of control voltage

AUX : Active at high

AUX or AUX(L) : Active at low


### 3. Interpreting Connector indications

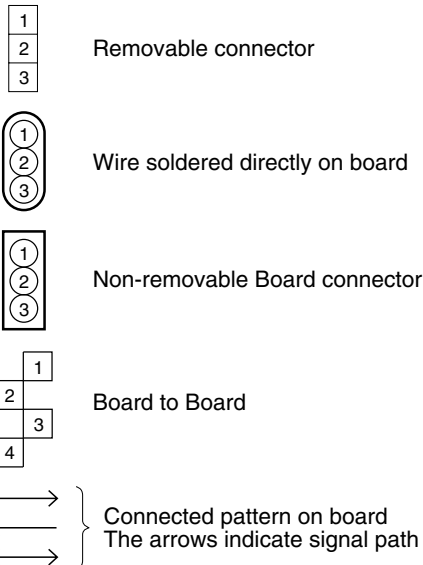

### 4. Voltage measurement

- 1) Video circuits  
REC : Colour bar signal in SP mode, normal VHS mode  
PB : Alignment tape, colour bar SP mode, normal VHS mode  
— : Unmeasurable or unnecessary to measure
- 2) Audio circuits  
REC : 1KHz, -8 dBs sine wave signal in SP mode, Normal VHS mode  
PB : REC then playback it
- 3) Movie Camera circuits  
Measured using a correctly illuminated gray scale or colour bar test charts in the E-E mode


- 4) Indication on schematic diagram  
Voltage Indications for REC and PB mode on the schematic diagram are as shown below.

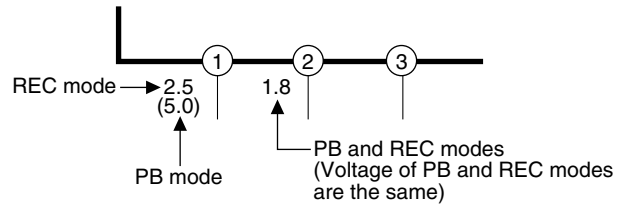


**Note: If the voltages are not indicated on the schematic diagram, refer to the voltage charts.**

### 5. Waveform measurement

- 1) Video circuits  
REC : Colour bar signal in SP mode, normal VHS mode  
PB : Alignment tape, colour bar SP mode, normal VHS mode
- 2) Audio circuits  
REC : 1KHz, -8 dBs sine wave signal in SP mode, normal VHS mode  
PB : REC then playback it
- 3) Movie Camera circuits  
Measured using a correctly illuminated gray scale or colour bar test charts in the E-E mode
- 4) Indication on schematic diagram  
Waveform indications on the schematic diagram are as shown below.

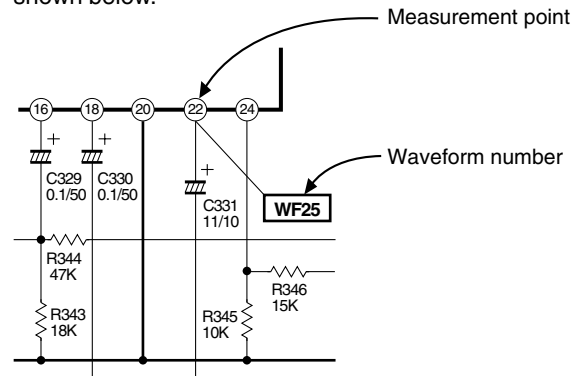


### 5) Waveform indications

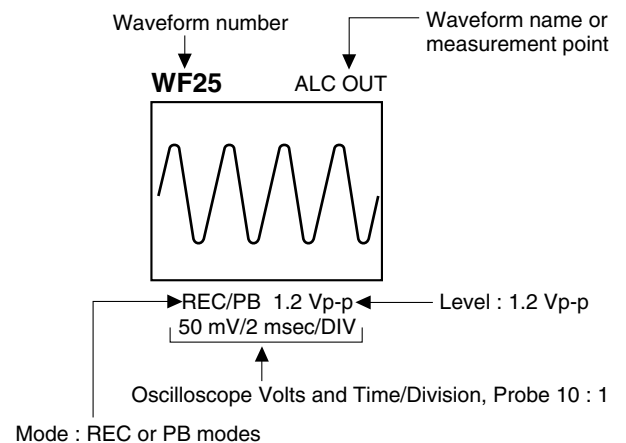


## 6. Signal path Symbols

The arrows indicate the signal path as follows.

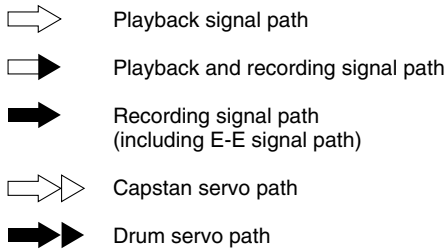


(Example)



## 7. Indication of the parts for adjustments

The parts for the adjustments are surrounded with the circle as shown below.



## 8. Indication of the parts not mounted on the circuit board

"OPEN" is indicated by the parts not mounted on the circuit board.




## CIRCUIT BOARD NOTES

### 1. Foil and Component sides

- 1) Foil side (B side) :  
Parts on the foil side seen from foil face (pattern face) are indicated.
- 2) Component side (A side) :  
Parts on the component side seen from component face (parts face) indicated.

### 2. Parts location guides


Parts location are indicated by guide scale on the circuit board.

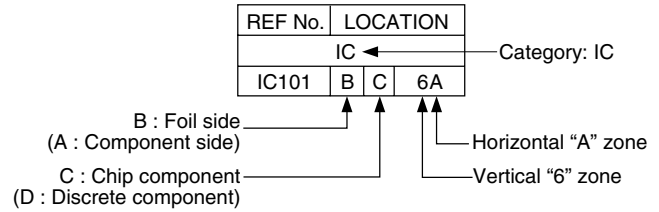

### Note:


For general information in service manual, please refer to the Service Manual of GENERAL INFORMATION Edition 4 No. 82054D (January 1994).

# 4.1 BOARD INTERCONNECTIONS

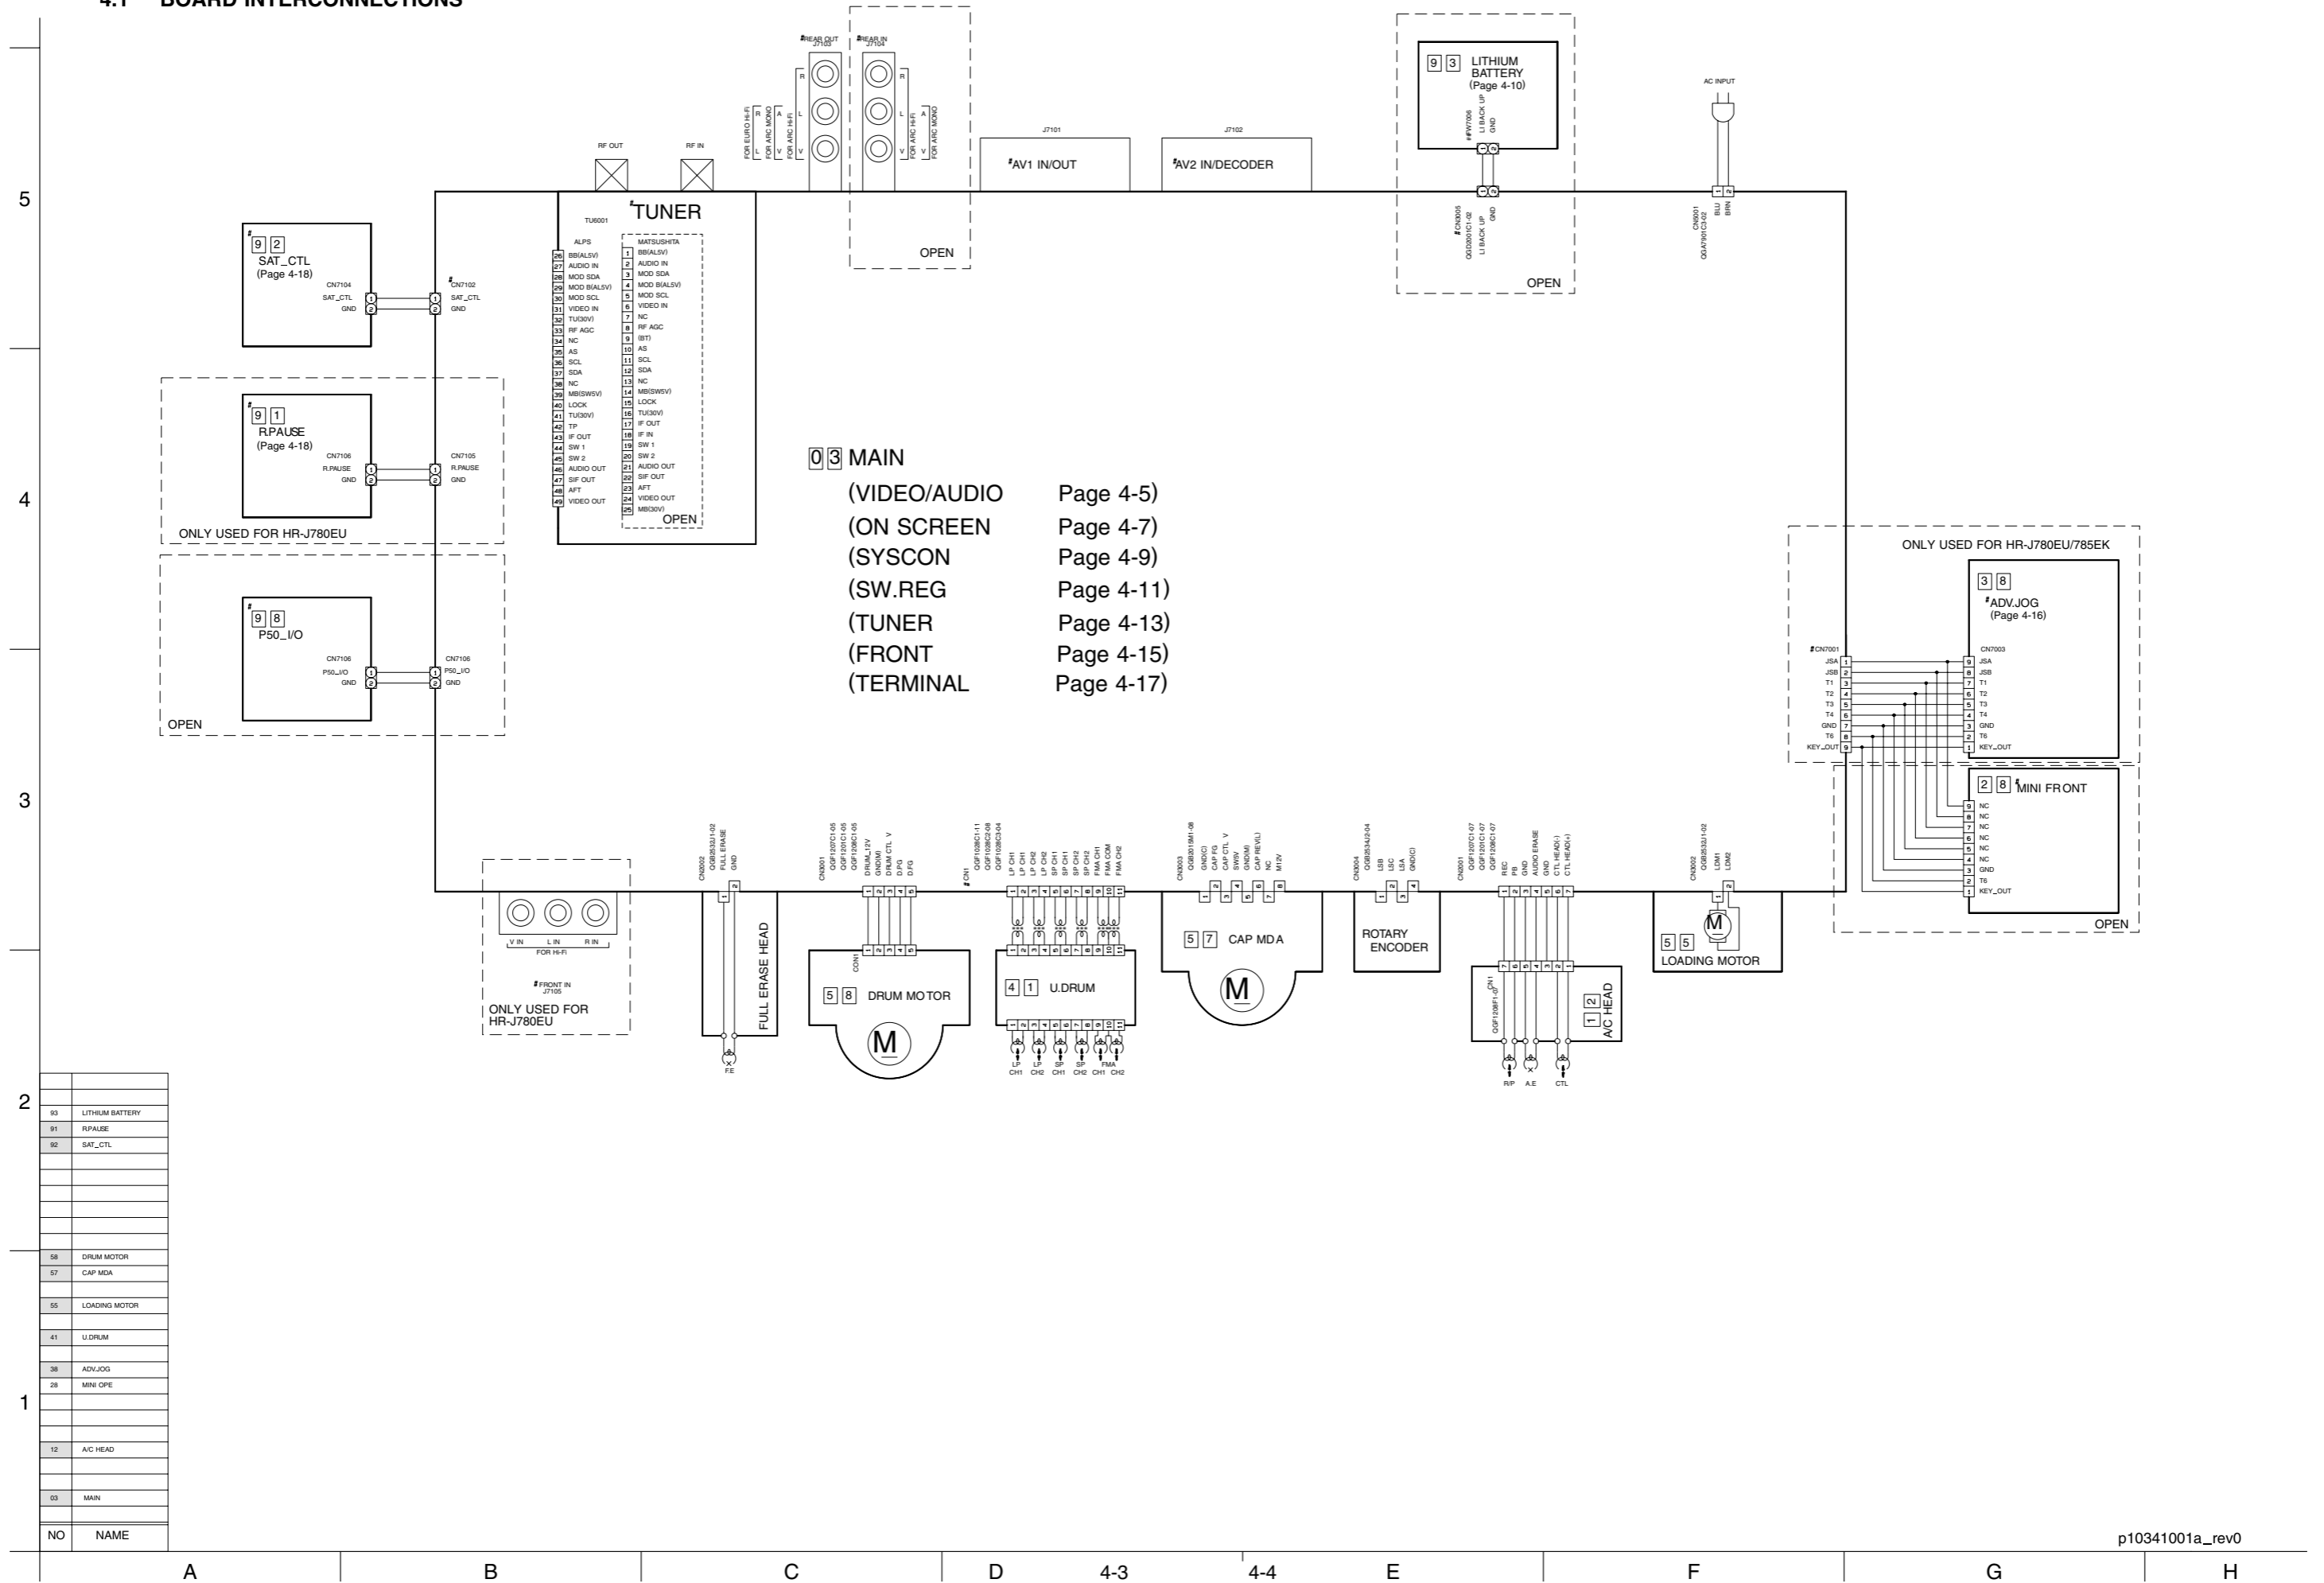

4.2 MAIN (VIDEO/AUDIO) SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

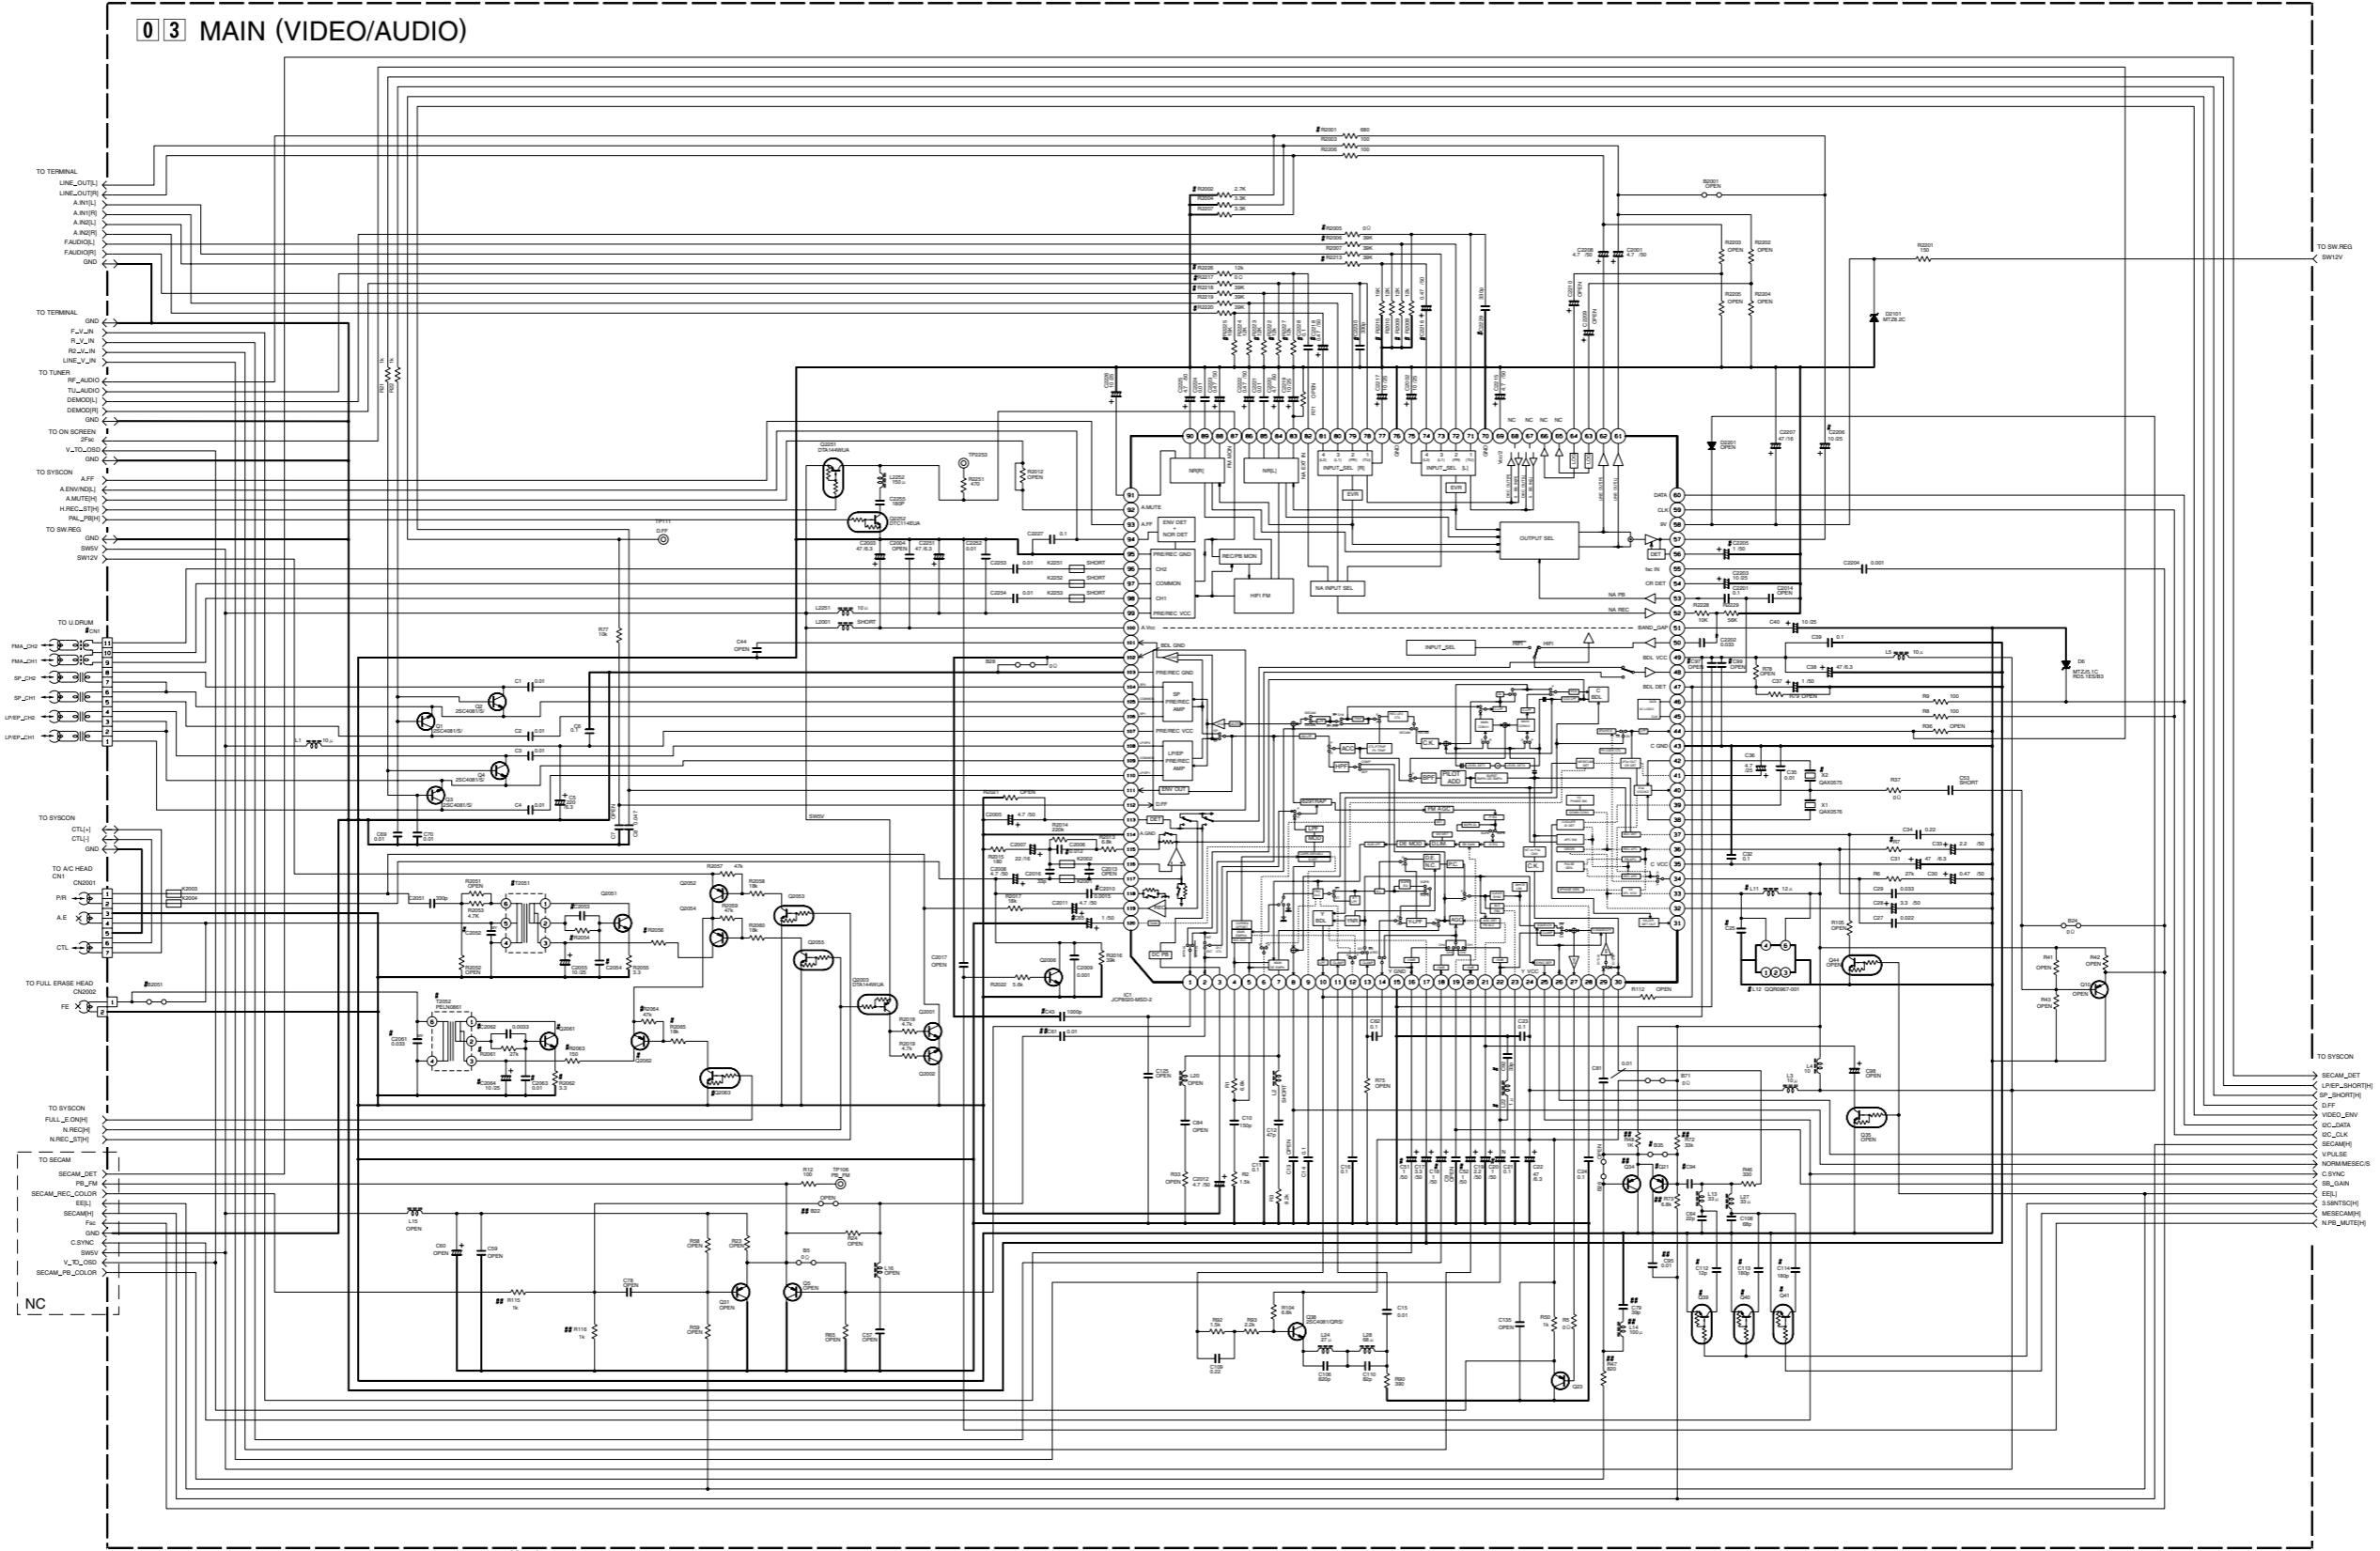

#DIFFERENCE TABLE

		R2005	R2008	R2217	R2222			R2213	R2218	R2220	R2225
		C2229	C2230					C2218	C2219		
WITH CH+	WITH CH-	X				X					
WITH R-IN	WITH R-IN										
WITH R-IN	WITH R-IN										
WITH R-IN	WITH R-IN										

AUDIO

		B2051	C2051	C2052	C2053	C2054	T2051	T2052
WITH A.DUB	WITH A.DUB	X						
WITH A.DUB	WITH A.DUB							
WITH A.DUB	WITH A.DUB							
WITH A.DUB	WITH A.DUB							

#DIFFERENCE TABLE

		C20	C51	C52	C18
WITH CH+	WITH CH-				
WITH CH+	WITH CH-				
WITH CH+	WITH CH-				
WITH CH+	WITH CH-				

VIDEO


		#SYMBOLS	B35	Q21	Q34			J2	C113	R7
SECAM REC.	SECAM REC.	YES		X	0.01					800
SECAM REC.	SECAM REC.	NO	X							800
SECAM REC.	SECAM REC.									
SECAM REC.	SECAM REC.									

NOTES - UNLESS OTHERWISE SPECIFIED:  
 ALL NPN TRANSISTOR ARE 2SC4081(QRS) or 2SD1819A(QRS) or 2PC4081(RV).  
 ALL PNP TRANSISTOR ARE 2SA1576A(QRV) or 2SB1218A(QRV) or 2P A1576(RV).  
 ALL NPN DIGITAL TRANSISTOR ARE DTC144WU A or UNS21E or PDTCT144WU or RN130S.  
 ALL RESISTANCE VALUES ARE IN OHMS.  
 ALL INDUCTANCE VALUES ARE IN H.  
 ALL CAPACITANCE VALUES ARE IN pF.

ELECTROLYTIC  
 CERAMIC  
 MYLAR  
 NON POLAR  
 K2001-K2004 = NCP403-003X

4.3 MAIN (ON SCREEN) SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

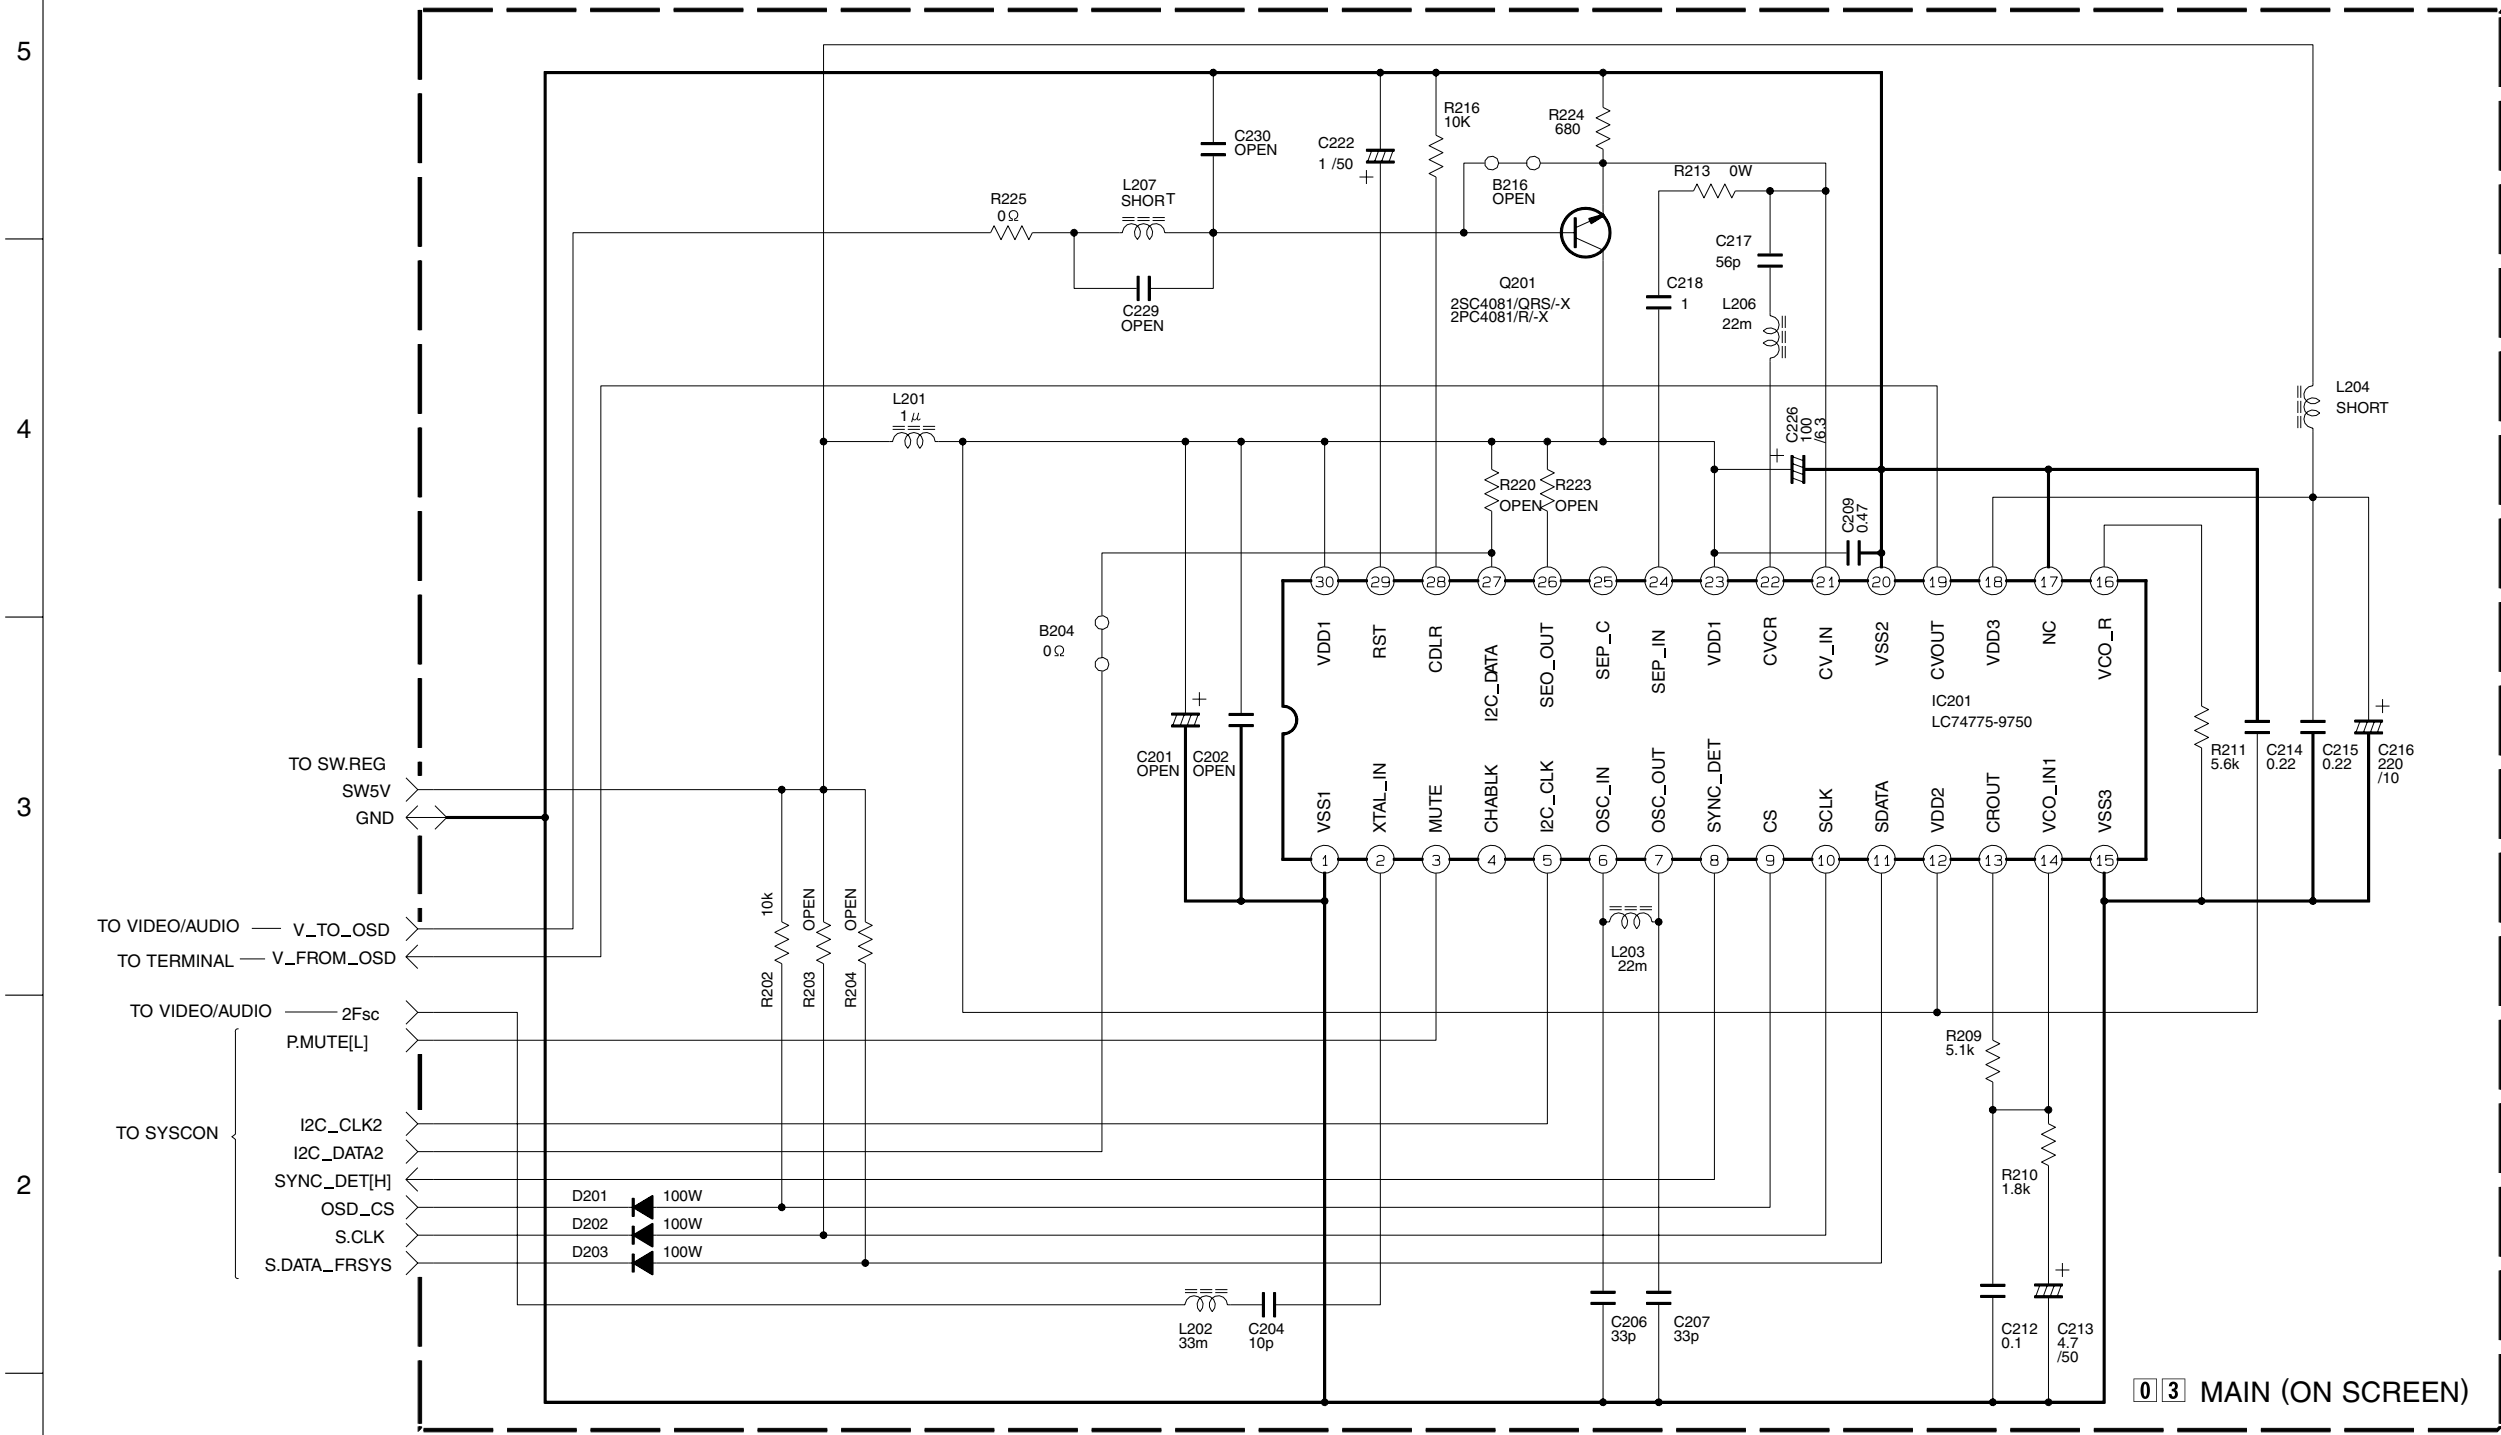


0 3 MAIN (ON SCREEN)

NOTES: UNLESS OTHERWISE SPECIFIED.  
 ALL RESISTANCE VALUES ARE IN OHMS.  
 ALL INDUCTANCE VALUES ARE IN H.  
 ALL CAPACITANCE VALUES ARE IN  $\mu$ F.  
 + ELECTROLYTIC  
 CERAMIC

4.4 MAIN (SYSCON) SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

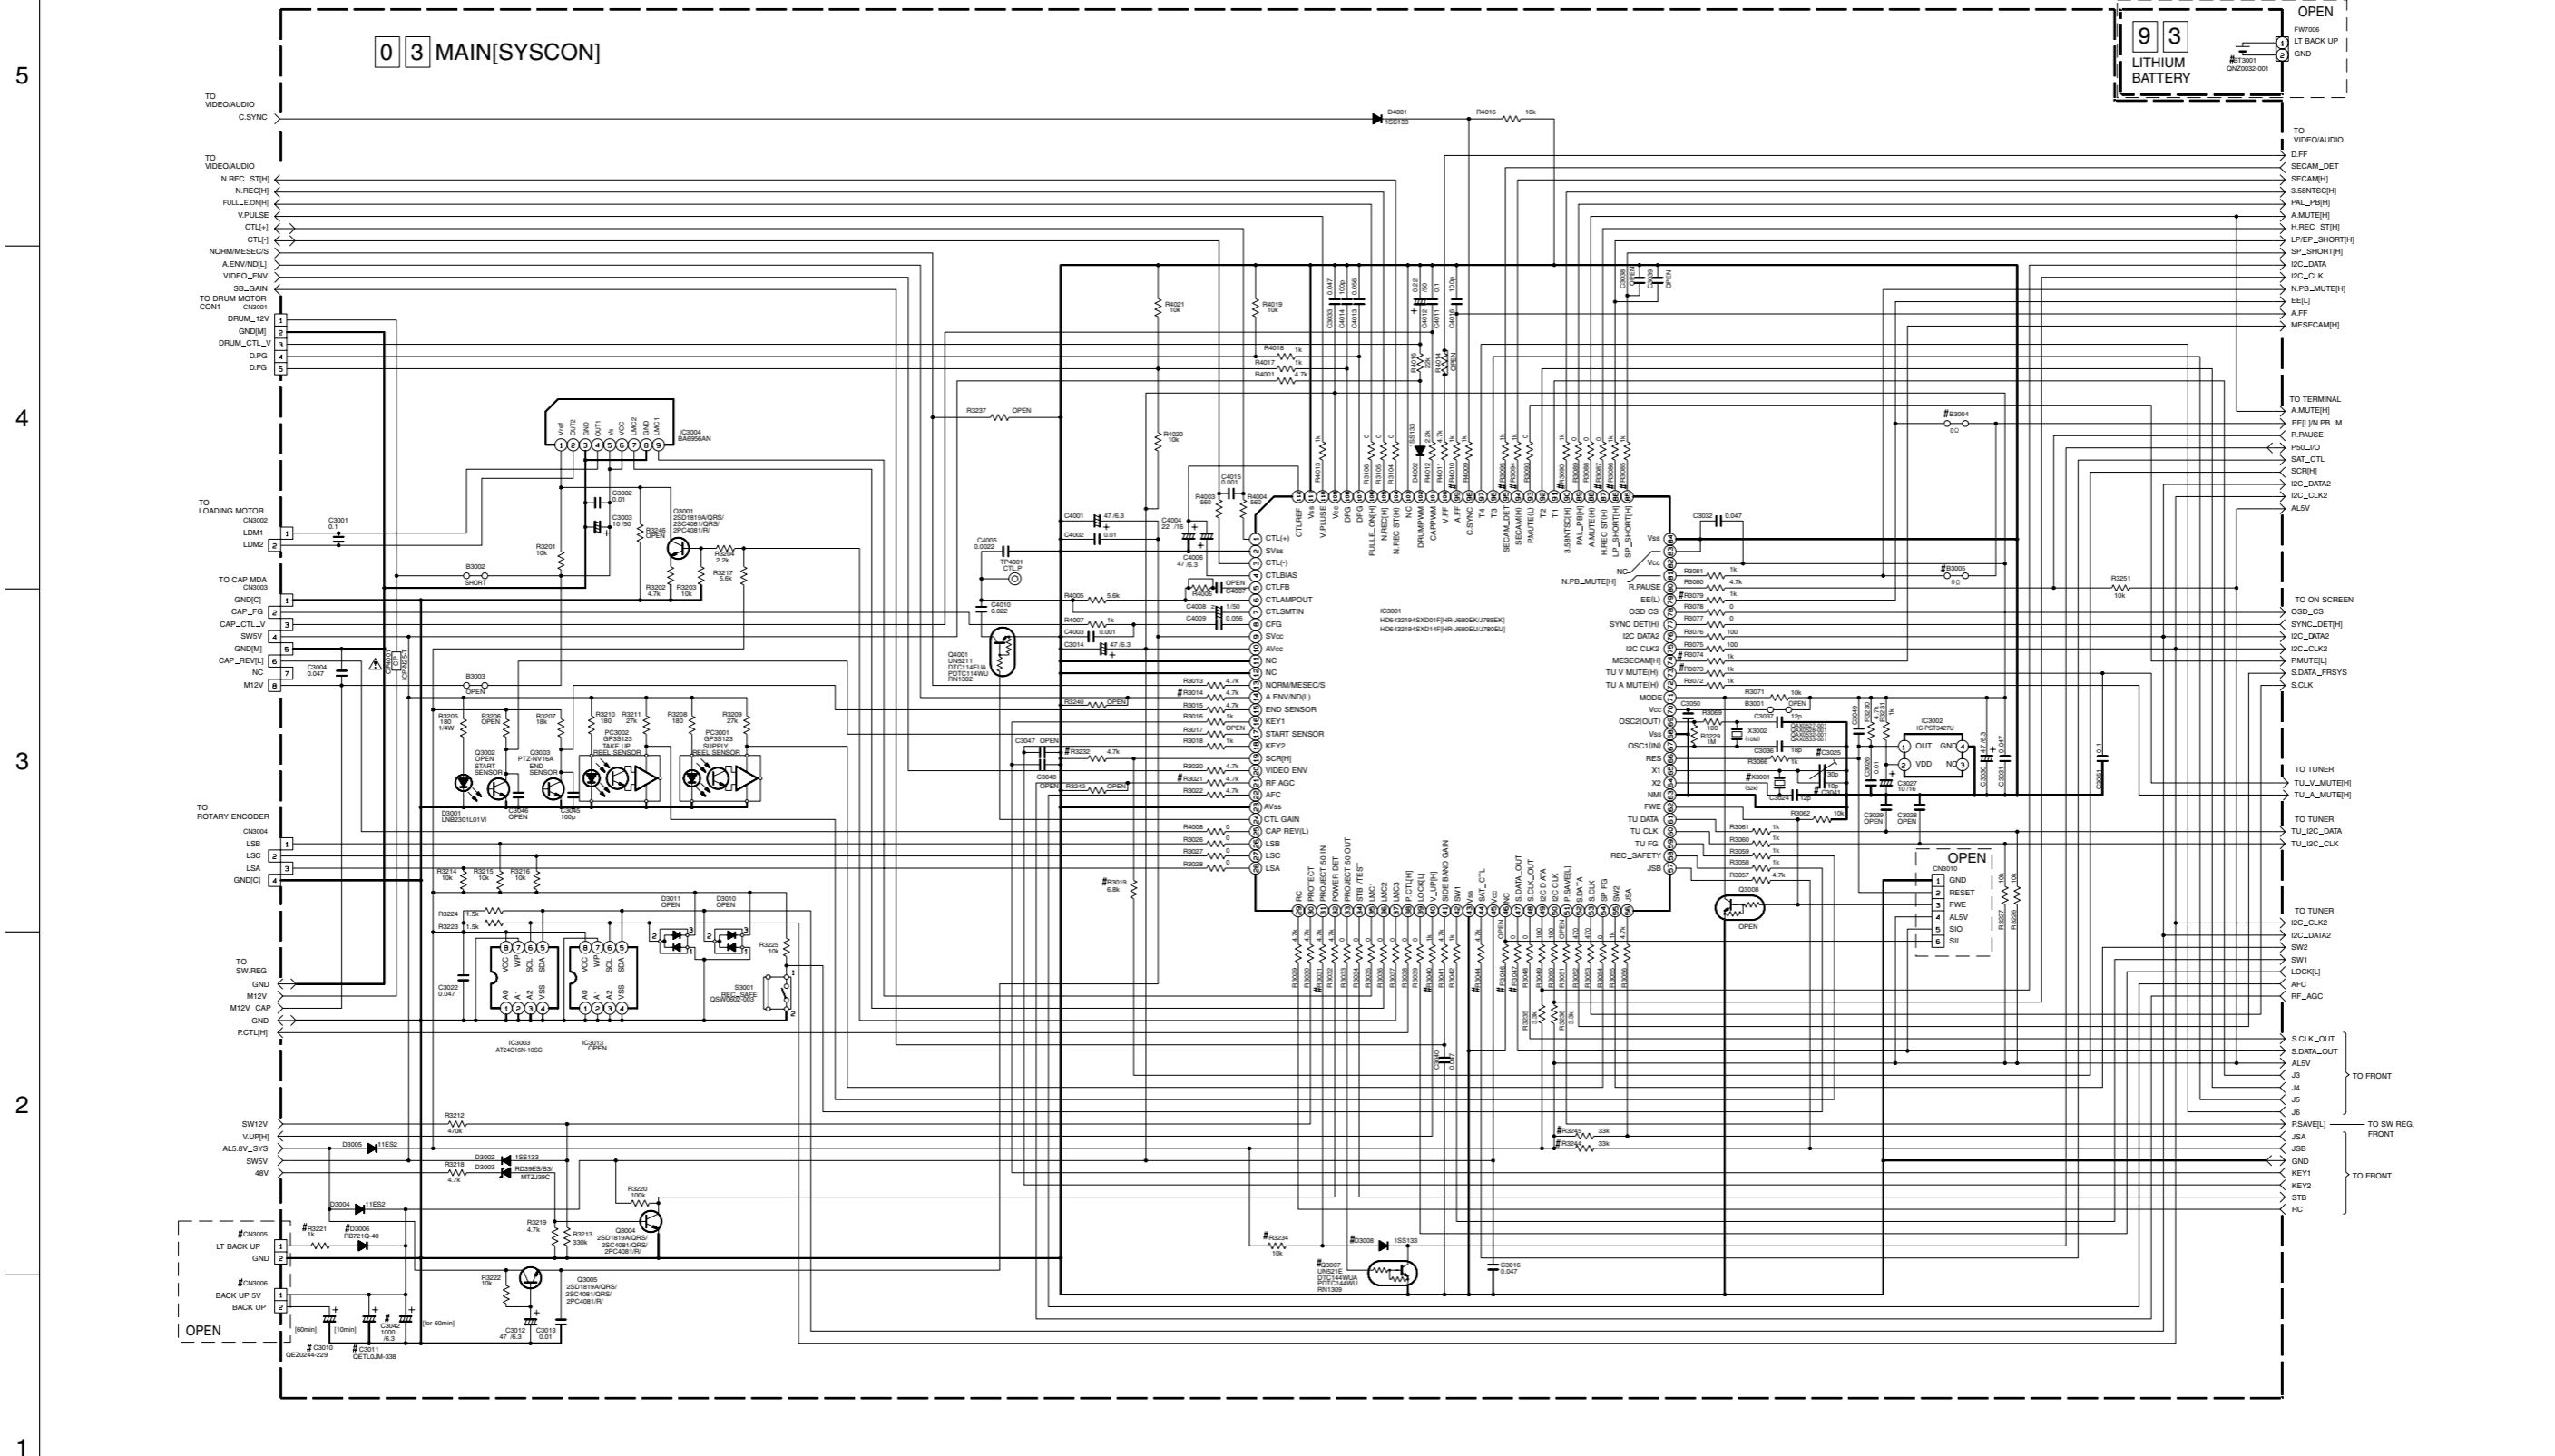


NOTES-UNLESS OTHERWISE SPECIFIED,  
 ALL RESISTANCE VALUES ARE IN OHMS.  
 ALL INDUCTANCE VALUES ARE IN H.  
 ALL CAPACITANCE VALUES ARE IN pF.  
 —|— ELECTROLYTIC  
 —|— CERAMIC  
 —|— MYLER  
 —|— NON POLAR

LAST NO	VACANT NO

4.5 MAIN (SW.REG) SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

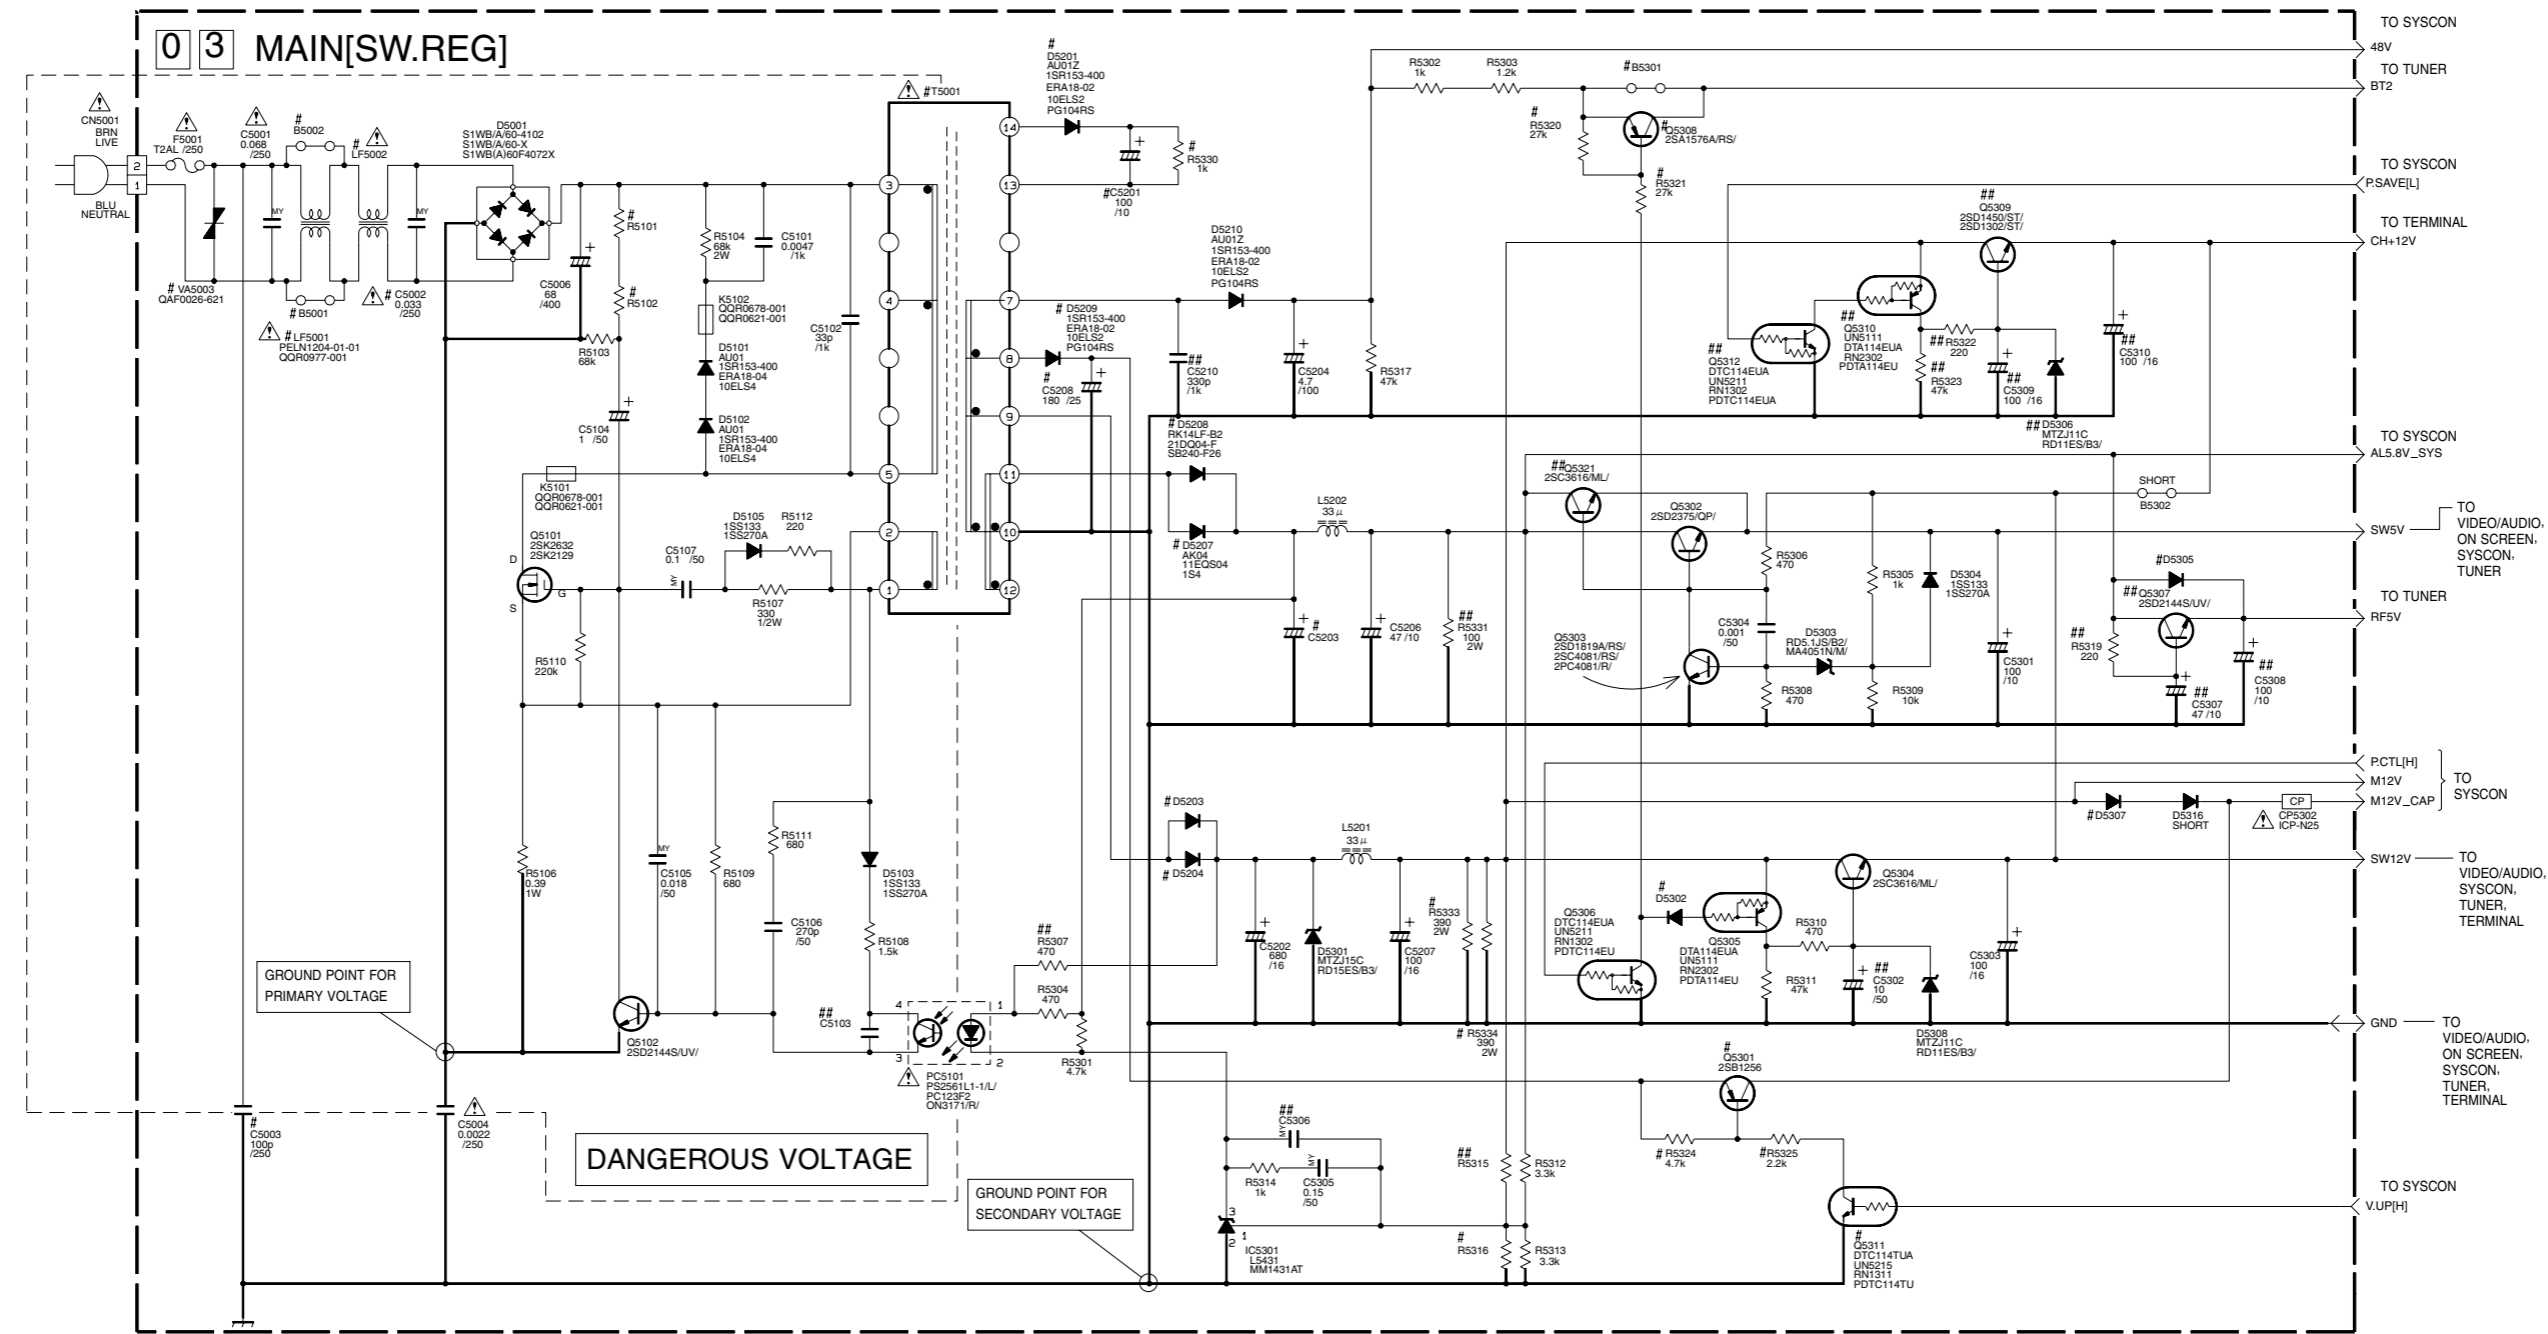

## MARK ELEMENTS ARE NOT MOUNTED

# DIFFERENCE TABLE 1

HIGH SPEED FF/REW		C5208 D5309 Q5301	Q5311 R5324 R5325	D5307	C5201 D5201 R5330	D5203 D5204	T5001
-YES-		YES		11ES2 EFA15-02 1A3G	YES	AU012 10ELS2 EFA18-04 1SR153-400 PG104RS	QOS0030-002 QOS0031-002
-NO-	AUTO OTHER	NO	SHORT	NO	NO	AU012 10ELS2	QOS0030-002 QOS0031-002 QOS0083-001 QOS0084-001

# DIFFERENCE TABLE 2

POWER SAVE		B5301	D5302	D5305	R5101 R5102	R5316	Q5308 R5330 R5321
-YES-		NO	1SS133 1SS270A	AK04 11EQS04 1S4	330k	12k	YES
-NO-		YES	SHORT	11ES2 EFA15-02 1A3G	220k	10k	NO

# DIFFERENCE TABLE 3

	B5001 B5002	C5002	LF5001	LF5002
CE	NO	YES	YES	QOR0978-001 QOR0608-001 QOR0605-001 QOR0610-001
OTHER	YES	NO	NO	QOR0532-001 QOR0533-001 QOR0516-001 QOR0832-001 QOR0816-001

# DIFFERENCE TABLE 4

	D5207	D5208	C5203
HIFI	NO	YES	1200/10
MONO	YES	NO	680/10

# DIFFERENCE TABLE 5

	R5333 R5334
AUTO	YES
OTHER	NO

# DIFFERENCE TABLE 6

	VA5003
JVC	NO
PH	YES

# DIFFERENCE TABLE 7

	C5003
PH/75	YES
OTHER	NO


NOTES: UNLESS OTHERWISE SPECIFIED, ALL RESISTANCE VALUES ARE IN OHMS. ALL INDUCTANCE VALUES ARE IN H. ALL CAPACITANCE VALUES ARE IN μF.

- + ELECTROLYTIC
- CERAMIC
- MY MYLER
- N NON POLAR

4.6 MAIN (TUNER) SCHEMATIC DIAGRAM

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

03 MAIN (TUNER)

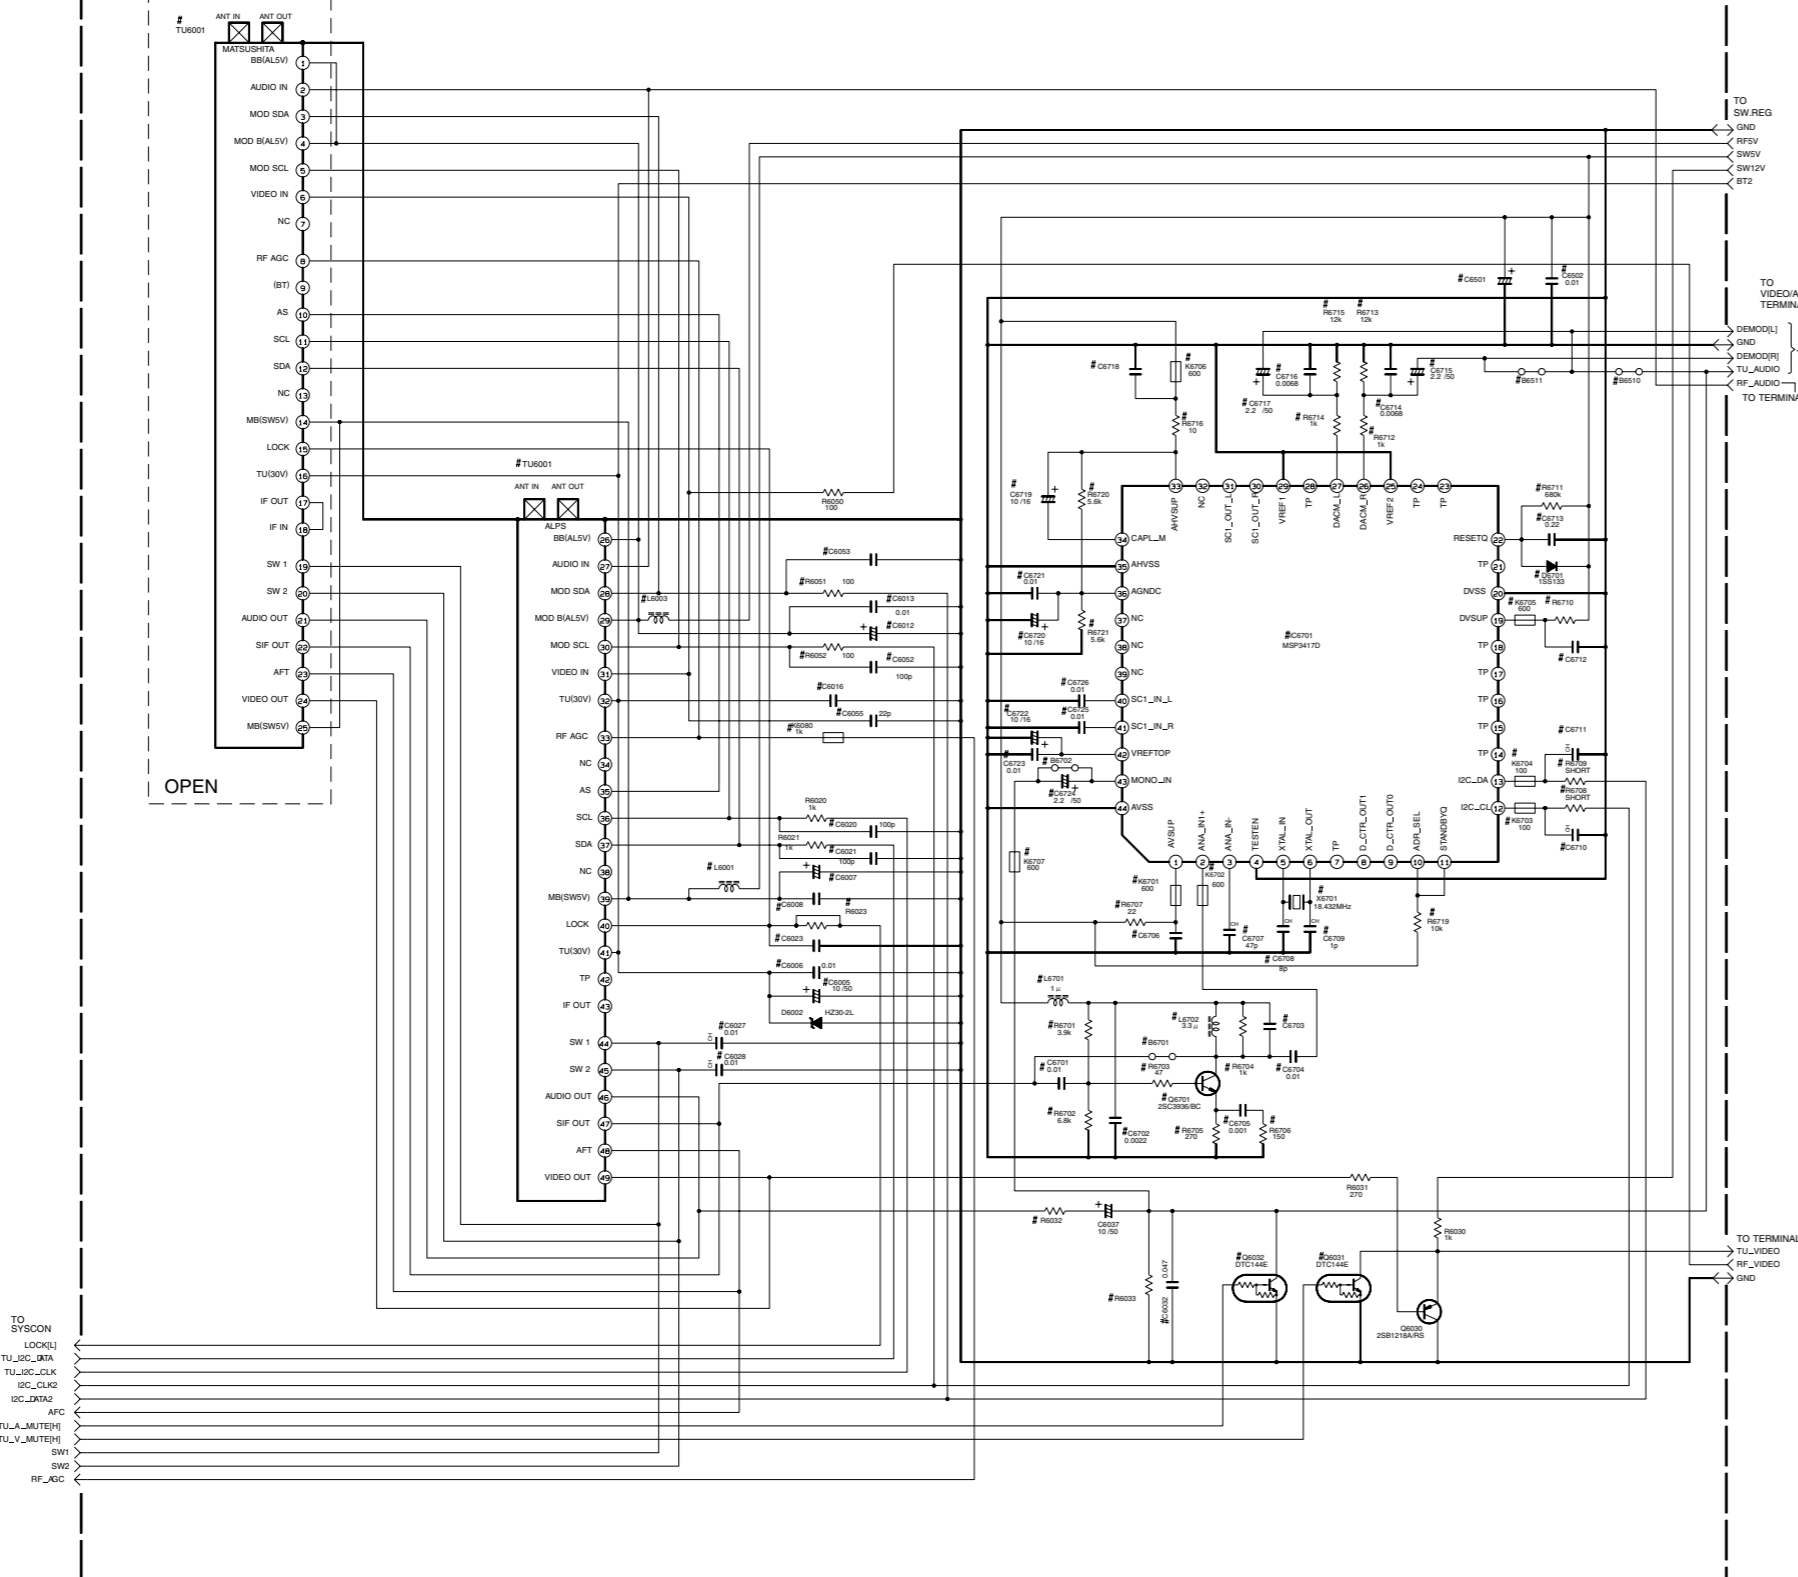

# DIFFERENCE TABLE

O : Used  
X : Not used

TUNER	TU6001	EUEK						FRANCE MS						ASA SYSTEM				ASA 4SYSTEM			
		HF1			MONO			HF1			MONO			HF1	MONO	HF1	MONO				
		With CH	Without CH	JSD (00)	With CH	Without CH	MONO	With CH	Without CH	MONO	With CH	Without CH	MONO	With CH	Without CH	MONO	With CH	Without CH			
TUNER UNIT	TU6001	WT25V9	ALPS	WT25V9	ALPS	ALPS	WT25V9	ALPS	LG	ALPS	LG	ALPS	LG	ALPS	WT25V9	ALPS	WT25V9	ALPS	WT25V9	WT25V9	
RF CONVERTER	R650-R652	O	O	O	X	O	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	L6003	47µ	47µ	47µ	47µ	47µ	SHORT	SHORT	47µ	47µ	47µ	47µ	SHORT	SHORT	47µ	47µ	SHORT	SHORT	47µ	SHORT	
	C612	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SW 1V	C652-C653	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	L6001	1µ	1µ	1µ	1µ	1µ	SHORT	SHORT	1µ	1µ	1µ	SHORT	SHORT	1µ	1µ	SHORT	SHORT	1µ	SHORT		
TU3(V)	C605	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	C606	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
RF AGC	R606	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	R608	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10	1K10
TUNER PLL	C603-C604	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	R603-C603	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
CENELEC SFC	C627	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	C628	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
AUDIO OUT	R632	1.8K	4.7K	1.8K	4.7K	1.8K	4.7K	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω	0Ω
	R633	2.7K	1.8K	2.7K	1.8K	1.8K	2.7K	1.8K	X	X	X	X	X	X	2.7K	1.8K	2.7K	1.8K	X	X	X
AUDIO MUTE	C632	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	C633	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
VIDEO MUTE	C631	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
	C632	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SET HF1 TUNER MONO	B610-B611	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	C651	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
DEMOD	C652	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	R670	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
PRE AMP	R670	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	R672	1.8K	1.8K	1.8K	1.8K	1.8K	1.8K	1.8K	X	X	X	X	X	X	1.8K	1.8K	1.8K	1.8K	1.8K	1.8K	1.8K
MONO IN	C670	O	O	O	O	O	O	O	X	X	O	O	O	X	X	O	O	X	X	O	O
	C671	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
AUDIO LOAD	R670	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	R671	O	O	X	X	X	X	X	O	O	X	X	X	X	X	X	X	X	X	X	X


NOTES: UNLESS OTHERWISE SPECIFIED,  
ALL RESISTANCE VALUES ARE IN OHMS.  
ALL INDUCTANCE VALUES ARE IN H.  
ALL CAPACITANCE VALUES ARE IN µF.  
ELECTROLYTIC  
CERAMIC  
MYLER  
NON POLAR





4.8 MAIN (TERMINAL), SAT CTL AND R.PAUSE SCHEMATIC DIAGRAMS

Note : The Parts Number, value and rated voltage etc. in the Schematic Diagram are for references only. When replacing the parts, refer to the Parts List.

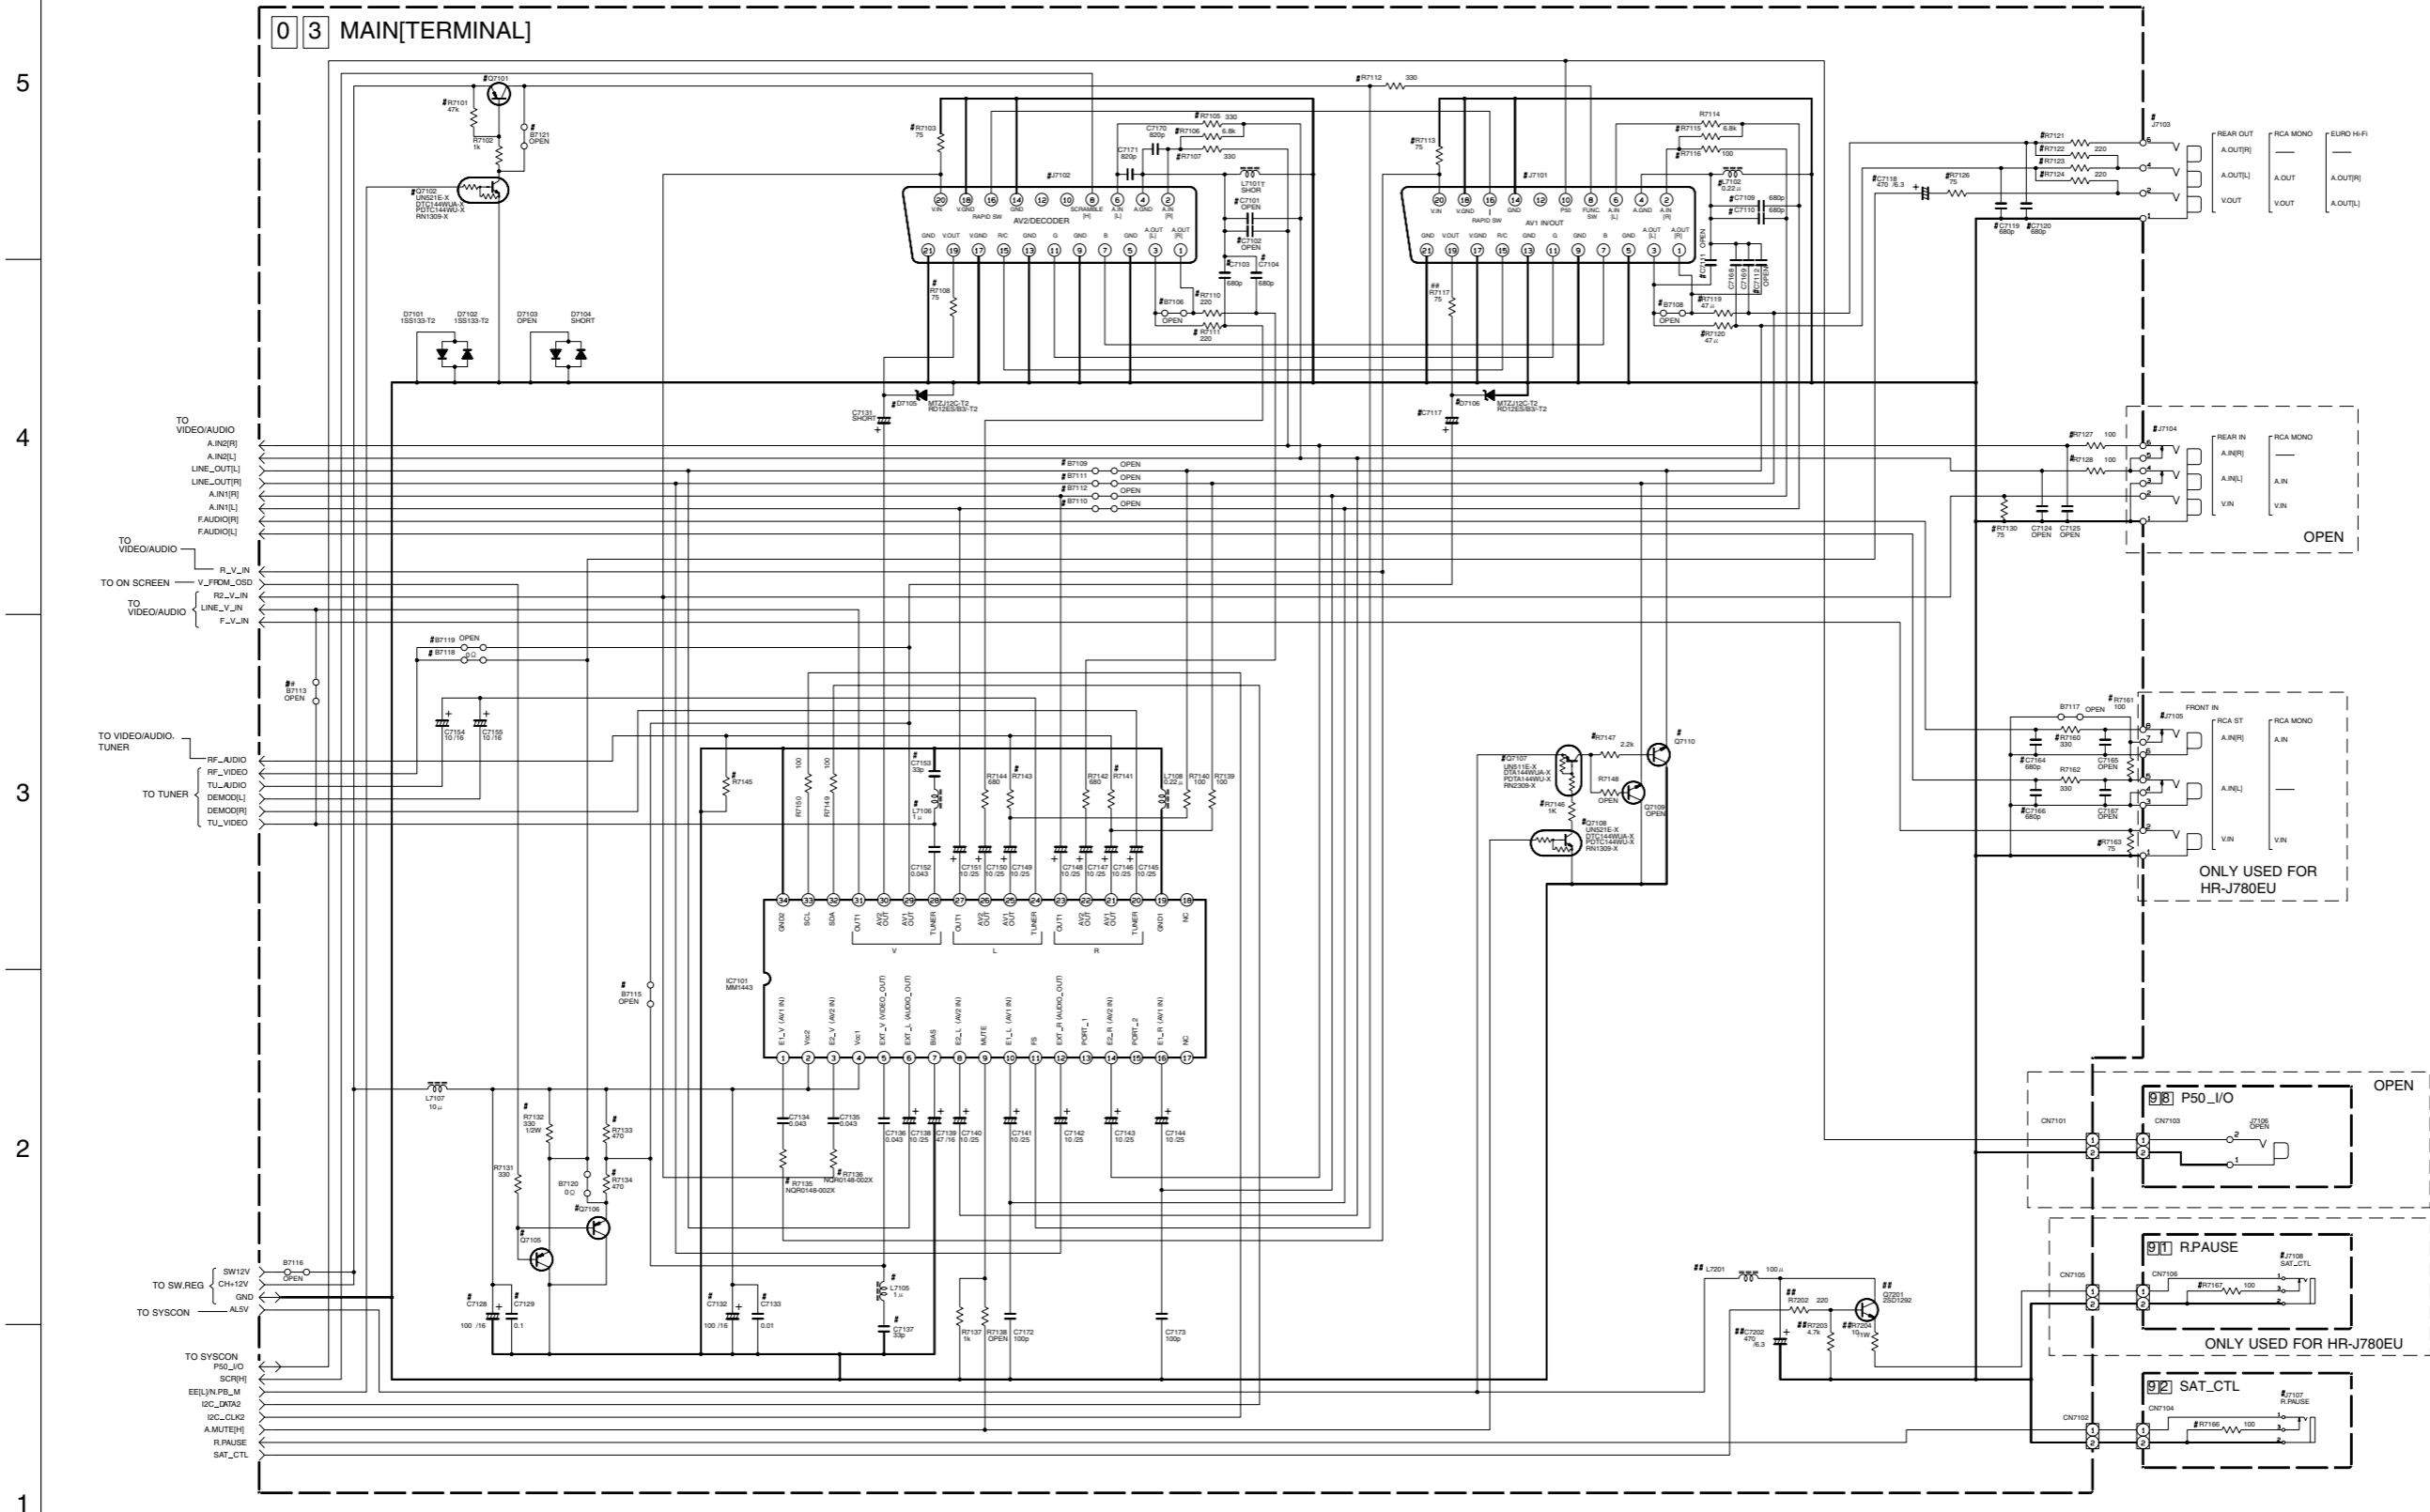


NOTES: UNLESS OTHERWISE SPECIFIED.  
 ALL RESISTANCE VALUES ARE IN OHMS.  
 ALL INDUCTANCE VALUES ARE IN H.  
 ALL CAPACITANCE VALUES ARE IN pF.  
 [Symbol] ELECTROLYTIC  
 [Symbol] CERAMIC  
 [Symbol] MYLER  
 [Symbol] NON POLAR

## 4.9 REMOTE CONTROLLER SCHEMATIC DIAGRAM

**NOTES:**

1. All parts shown in this schematic are critical for safety.
2. This schematic is only for reference.
3. Avoid replacing individual parts.
4. Replace the entire unit only.

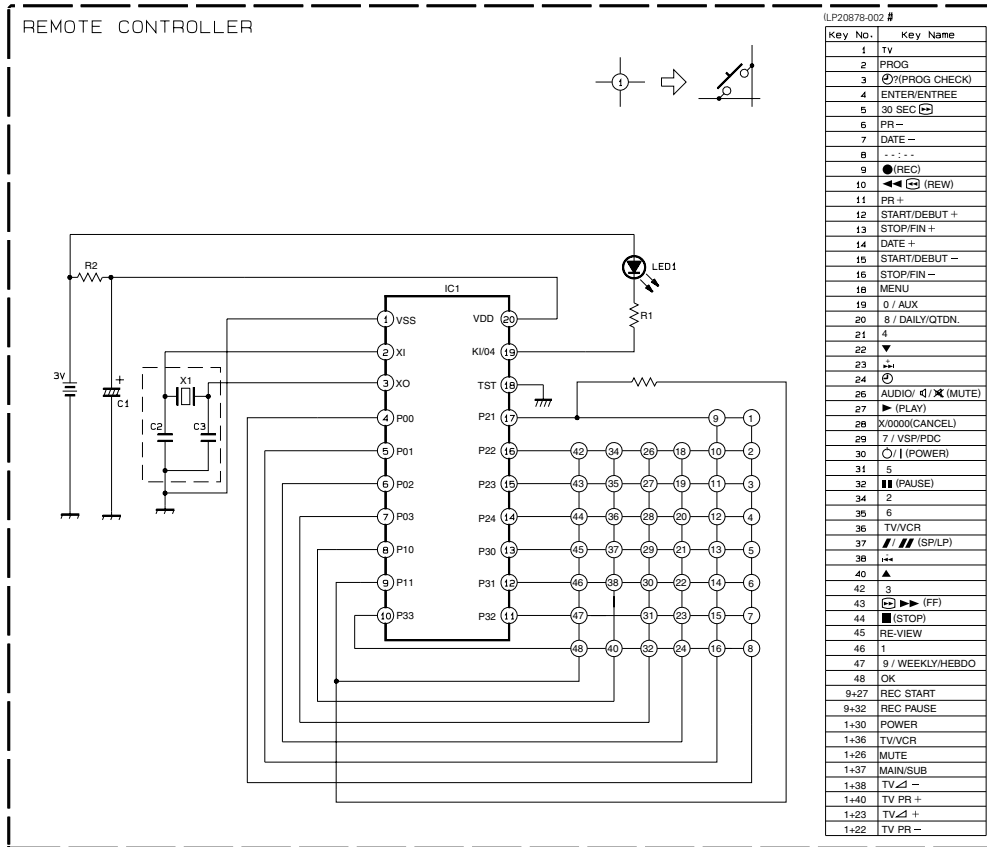


COMPONENT PARTS LOCATION GUIDE < MAIN >

REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION	REF.NO.	LOCATION																				
<b>CAPACITOR</b>																																					
C1	B	C	14N	C2008	A	D	130	C5208	A	D	3H	<b>CONNECTOR</b>						L303	A	D	6J	R50	B	C	9L	R3029	A	D	7E	R5102	A	D	4M	R7135	B	C	19K
C2	B	C	14N	C2009	B	C	120	C5210	A	D	3H	CN1	A	D	140	L2001	A	D	16J	R58	B	C	10N	R3030	B	C	9E	R5103	A	D	3M	R7136	B	C	19K		
C3	B	C	14N	C2010	B	C	130	C5301	A	D	2E	CN2001	A	D	140	L2251	A	D	15M	R59	B	C	10N	R3031	B	C	9E	R5104	A	D	1L	R7137	B	C	20K		
C4	B	C	14N	C2011	A	D	120	C5302	A	D	2F	CN2002	A	D	19L	L2252	A	D	16M	R65	B	C	12N	R3032	B	C	9E	R5106	A	D	2L	R7138	A	D	20K		
C5	B	C	14N	C2012	A	D	12N	C5303	A	D	2E	CN3001	A	D	7P	L3101	A	D	70	R71	B	C	16L	R3033	B	C	9E	R5107	A	D	3K	R7139	A	D	20M		
C6	B	C	14N	C2013	A	D	13N	C5304	A	D	1F	CN3002	A	D	7F	L5201	A	D	2G	R72	B	C	9L	R3034	A	D	8D	R5108	B	C	3L	R7140	A	D	20M		
C7	B	C	14N	C2014	A	D	12K	C5305	A	D	4G	CN3003	A	D	7L	L5202	A	D	1G	R73	B	C	9K	R3035	B	C	9E	R5109	A	D	3M	R7141	B	C	20M		
C8	B	C	130	C2016	B	C	13N	C5306	A	D	3G	CN3004	A	D	9F	L6001	A	D	21M	R75	B	C	10M	R3036	B	C	9E	R5110	B	C	3L	R7142	B	C	19M		
C9	B	C	16M	C2017	B	C	160	C5307	A	D	3D	CN3005	A	D	70	L6003	A	D	21H	R77	B	C	10P	R3037	B	C	9D	R5111	B	C	3K	R7143	B	C	20M		
C10	B	C	18M	C2051	B	C	90	C5308	A	D	4D	CN3006	A	D	3D	L6701	A	D	21H	R78	B	C	11J	R3038	B	C	9D	R5112	B	C	3K	R7144	B	C	17M		
C11	B	C	12N	C2052	A	D	90	C5309	A	D	3F	CN3010	A	D	10B	L6702	A	D	22F	R79	B	C	11K	R3039	A	D	8D	R5301	B	C	4H	R7145	B	C	21M		
C12	B	C	11N	C2053	A	D	90	C5310	A	D	3E	CN5001	A	D	1P	L7101	B	C	13P	R90	B	C	9N	R3040	B	C	9D	R5302	B	C	4G	R7146	B	C	20N		
C13	B	C	11N	C2054	A	D	9P	C6005	A	D	21I	CN7001	A	D	2C	L7102	A	D	17P	R92	B	C	8N	R3041	A	D	8D	R5303	B	C	4G	R7147	B	C	20O		
C14	B	C	10N	C2055	A	D	100	C6006	A	D	22M	CN7101	A	D	19H	L7105	A	D	20K	R93	B	C	8N	R3042	A	D	8D	R5304	B	C	3H	R7148	B	C	20O		
C15	B	C	9N	C2061	A	D	8P	C6007	A	D	21M	CN7102	A	D	20H	L7106	A	D	20K	R104	B	C	8M	R3044	A	D	11E	R5305	B	C	2E	R7149	B	C	19M		
C16	B	C	8N	C2062	A	D	8P	C6008	A	D	22M	CN7103	A	D	20H	L7107	A	D	21I	R105	B	C	10K	R3046	B	C	9C	R5306	B	C	1F	R7150	B	C	19M		
C17	B	C	8M	C2063	A	D	9P	C6012	A	D	21N	CN7104	A	D	180	L7108	A	D	20L	R112	A	D	11N	R3047	B	C	10D	R5307	B	C	2H	R7160	B	C	18B		
C18	B	C	10M	C2064	A	D	9P	C6013	A	D	22P	CN7105	A	D	20G	L7201	A	D	21H	R115	A	D	11N	R3048	B	C	10D	R5308	B	C	1F	R7161	B	C	19A		
C19	A	D	8M	C2201	B	C	12J	C6016	B	C	22O	CN7106	A	D	20D	<b>TRANSISTOR</b>						R116	B	C	12N	R3049	B	C	10D	R5309	B	C	2E	R7162	B	C	19B
C20	A	D	9M	C2202	B	C	12K	C6020	B	C	22N	<b>DIODE</b>						Q1	B	C	17G	R3050	B	C	11D	R5310	B	C	2F	R7163	B	C	21M				
C21	A	D	9M	C2203	A	D	12J	C6021	B	C	22N	D6	A	D	14H	Q2	B	C	14N	R203	B	C	17G	R3051	B	C	11D	R5311	B	C	2F	R7166	B	C	18O		
C22	A	D	11M	C2204	B	C	10J	C6023	B	C	22M	D201	A	D	18G	Q3	B	C	14O	R204	B	C	17G	R3052	B	C	11D	R5312	A	D	4G	R7167	B	C	20C		
C23	A	D	11M	C2205	A	D	12K	C6027	B	C	21L	D202	A	D	18G	Q4	B	C	14N	R209	B	C	17G	R3053	B	C	11D	R5313	B	C	3G	R7202	A	D	21H		
C24	B	C	11M	C2206	A	D	12K	C6028	B	C	21K	D201	A	D	18G	Q5	B	C	14N	R210	B	C	17G	R3054	B	C	11D	R5314	B	C	4G	R7203	B	C	22H		
C25	B	C	9M	C2207	A	D	13K	C6032	B	C	22I	D203	A	D	18G	Q10	B	C	10K	R211	B	C	17H	R3055	B	C	11D	R5315	B	C	3G	R7204	A	D	20H		
C26	B	C	11M	C2208	A	D	14K	C6037	A	D	22I	D210	A	D	7G	Q21	B	C	9K	R213	B	C	18H	R3056	B	C	11D	R5316	B	C	3G	R7205	B	C	21P		
C27	B	C	11M	C2209	A	D	13K	C6052	B	C	22O	D2201	A	D	11I	Q23	B	C	9L	R216	B	C	19H	R3057	B	C	11D	R5317	B	C	3H	R7206	B	C	21P		
C28	A	D	11M	C2210	A	D	14K	C6053	B	C	22P	D3001	A	D	12H	Q31	B	C	11N	R220	B	C	19I	R3058	B	C	11D	R5319	B	C	3D	<b>SWITCH</b>					
C29	B	C	10K	C2215	A	D	13K	C6055	B	C	22O	D3002	A	D	6F	Q34	B	C	8L	R223	B	C	18H	R3059	B	C	12D	R5320	B	C	4E	S3001	A	D	18C		
C30	A	D	10L	C2216	A	D	14L	C6501	A	D	22E	D3003	A	D	6G	Q35	B	C	9K	R224	B	C	17H	R3060	B	C	12D	R5321	A	D	4E	S7001	A	D	22B		
C31	A	D	10L	C2217	A	D	14L	C6502	A	D	22E	D3004	A	D	5C	Q38	B	C	8M	R225	A	D	14H	R3061	B	C	12D	R5322	B	C	3F	S7002	A	D	18B		
C32	B	C	11L	C2218	A	D	14L	C6701	B	C	21G	D3005	A	D	5C	Q39	B	C	9K	R301	B	C	7K	R3062	B	C	12D	R5323	B	C	4F	S7004	A	D	7B		
C33	B	C	10L	C2219	A	D	16L	C6702	B	C	21G	D3006	A	D	8H	Q40	B	C	9K	R302	B	C	7K	R3066	B	C	12D	R5324	B	C	3G	S7006	A	D	6B		
C34	B	C	10L	C2220	A	D	16L	C6703	B	C	21F	D3008	A	D	8E	Q41	B	C	9K	R303	B	C	7K	R3069	B	C	13E	R5325	B	C	4G	S7008	A	D	5B		
C35	B	C	10K	C2221	A	D	16L	C6704	B	C	21F	D3010	A	D	8G	Q44	B	C	10J	R304	B	C	7K	R3071	B	C	13E	R5330	B	C	1H	S7010	A	D	4B		
C36	B	C	10L	C2222	A	D	16L	C6705	B	C	21G	D3011	B	C	15C	Q44	B	C	10J	R305	B	C	6K	R3072	B	C	15D	R5331	A	D	1D	S7011	A	D	4B		
C37	A	D	11K	C2223	A	D	16M	C6706	B	C	22F	D4001	A	D	13G	Q301	B	C	6J	R306	B	C	6J	R3073	B	C	15D	R5333	A	D	2F	S7012	A	D	3B		
C38	A	D	12K	C2224	B	C	15M	C6707	B	C	21F	D4002	A	D	14H	Q302	B	C	8K	R307	A	D	8L	R3074	A	D	16D	R5334	A	D	3F	S7013	A	D	2B		
C39	B	C	12K	C2225	A	D	14L	C6708	B	C	21G	D5001	B	C	2M	Q311	B	C	7J	R308	B	C	6K	R3075	B	C	15D	R5335	B	C	21N	S7014	A	D	2B		
C40	A	D	12K	C2226	A	D	15M	C6709	B	C	21G	D5101	A	D	1M	Q312	B	C	8K	R309	B	C	6J	R3076	B	C	15D	R5321	B	C	21M	S7015	A	D	1B		
C43	A	D	12L	C2227	B	C	14M	C6710	B	C	20G	D5102	A	D	2K	Q2001	B	C	12O	R310	B	C	6J	R3077	B	C	15D	R5323	B	C	21M	S7016	A	D	17B		
C44	B	C	15L	C2228	B	C	14L	C6711	B	C	20F	D5103	A	D	3K	Q2002	B	C	12O	R311	B	C	7J	R3078	B	C	14E	R6030	B	C	22J	S7017	A	D	16B		
C51	A	D	9M	C2229	B	C	14K	C6712	B	C	19F	D5105	A	D	3K	Q2003	B	C	12O	R312	B	C	7J	R3079	B	C	14E	R6031	B	C	22J	S7018	A	D	9B		
C52	A	D	8M	C2230	B	C	15K	C6713	B	C	19F	D5201	A	D	1I	Q2006	B	C	13O	R313	B	C	7J	R3080	B	C	14E	R6032	B	C	22J	S7019	A	D	8B		
C53	B	C	10K	C2251	A	D	15M	C6714	A	D	20E	D5203	A	D	3I	Q2051	B	C	9O	R314	B	C	8J	R3081	B	C	14E	R6033	B	C	22I	<b>TEST POINT</b>					
C57	B	C	12N	C2252	A	D	15M	C6715	A	D	20E	D5204	A	D	2I	Q2052	B	C	11O	R315	B	C	8J	R3083	B	C	14E	R6035	A	D	21N	TP106	A	D	6P		
C59	B	C	10N	C2253	B	C	15O	C6716	B	C	19D	D5207	A	D	1I	Q2053	B	C	10O	R316	B	C	8J	R3085	B	C	14F	R6051	B	C	21P	TP111	A	D	5P		
C60	A	D	10N	C2254	B	C	15O	C6717	A	D	20D	D5208	A	D	1I	Q2054	B	C	10O	R321	B	C	8K	R3086	B	C	14F	R6052	B	C	21O	TP2253	A	D	6P		
C61	B	C	12N	C2255	B	C	16N	C6718	B	C	20D	D5209	A	D	1I	Q2054	B	C	10O	R321	B	C	7J	R3087	A	D	15F	R6701	B	C	21G	TP4001	A	D	6P		
C62	B	C	10N	C3001	B	C	7N	C6719	A	D	20E	D5210	A	D	3I	Q2055	B	C	12O	R328	B	C	7J	R3088	A	D	15F	R6702	B	C	21G	TP7001	A	D	3A		
C64	B	C	9K																																		

4.10 MAIN, SAT CTL AND R.PAUSE CIRCUIT BOARDS


<03>MAIN  
LPB10131-001C

DANGEROUS VOLTAGE

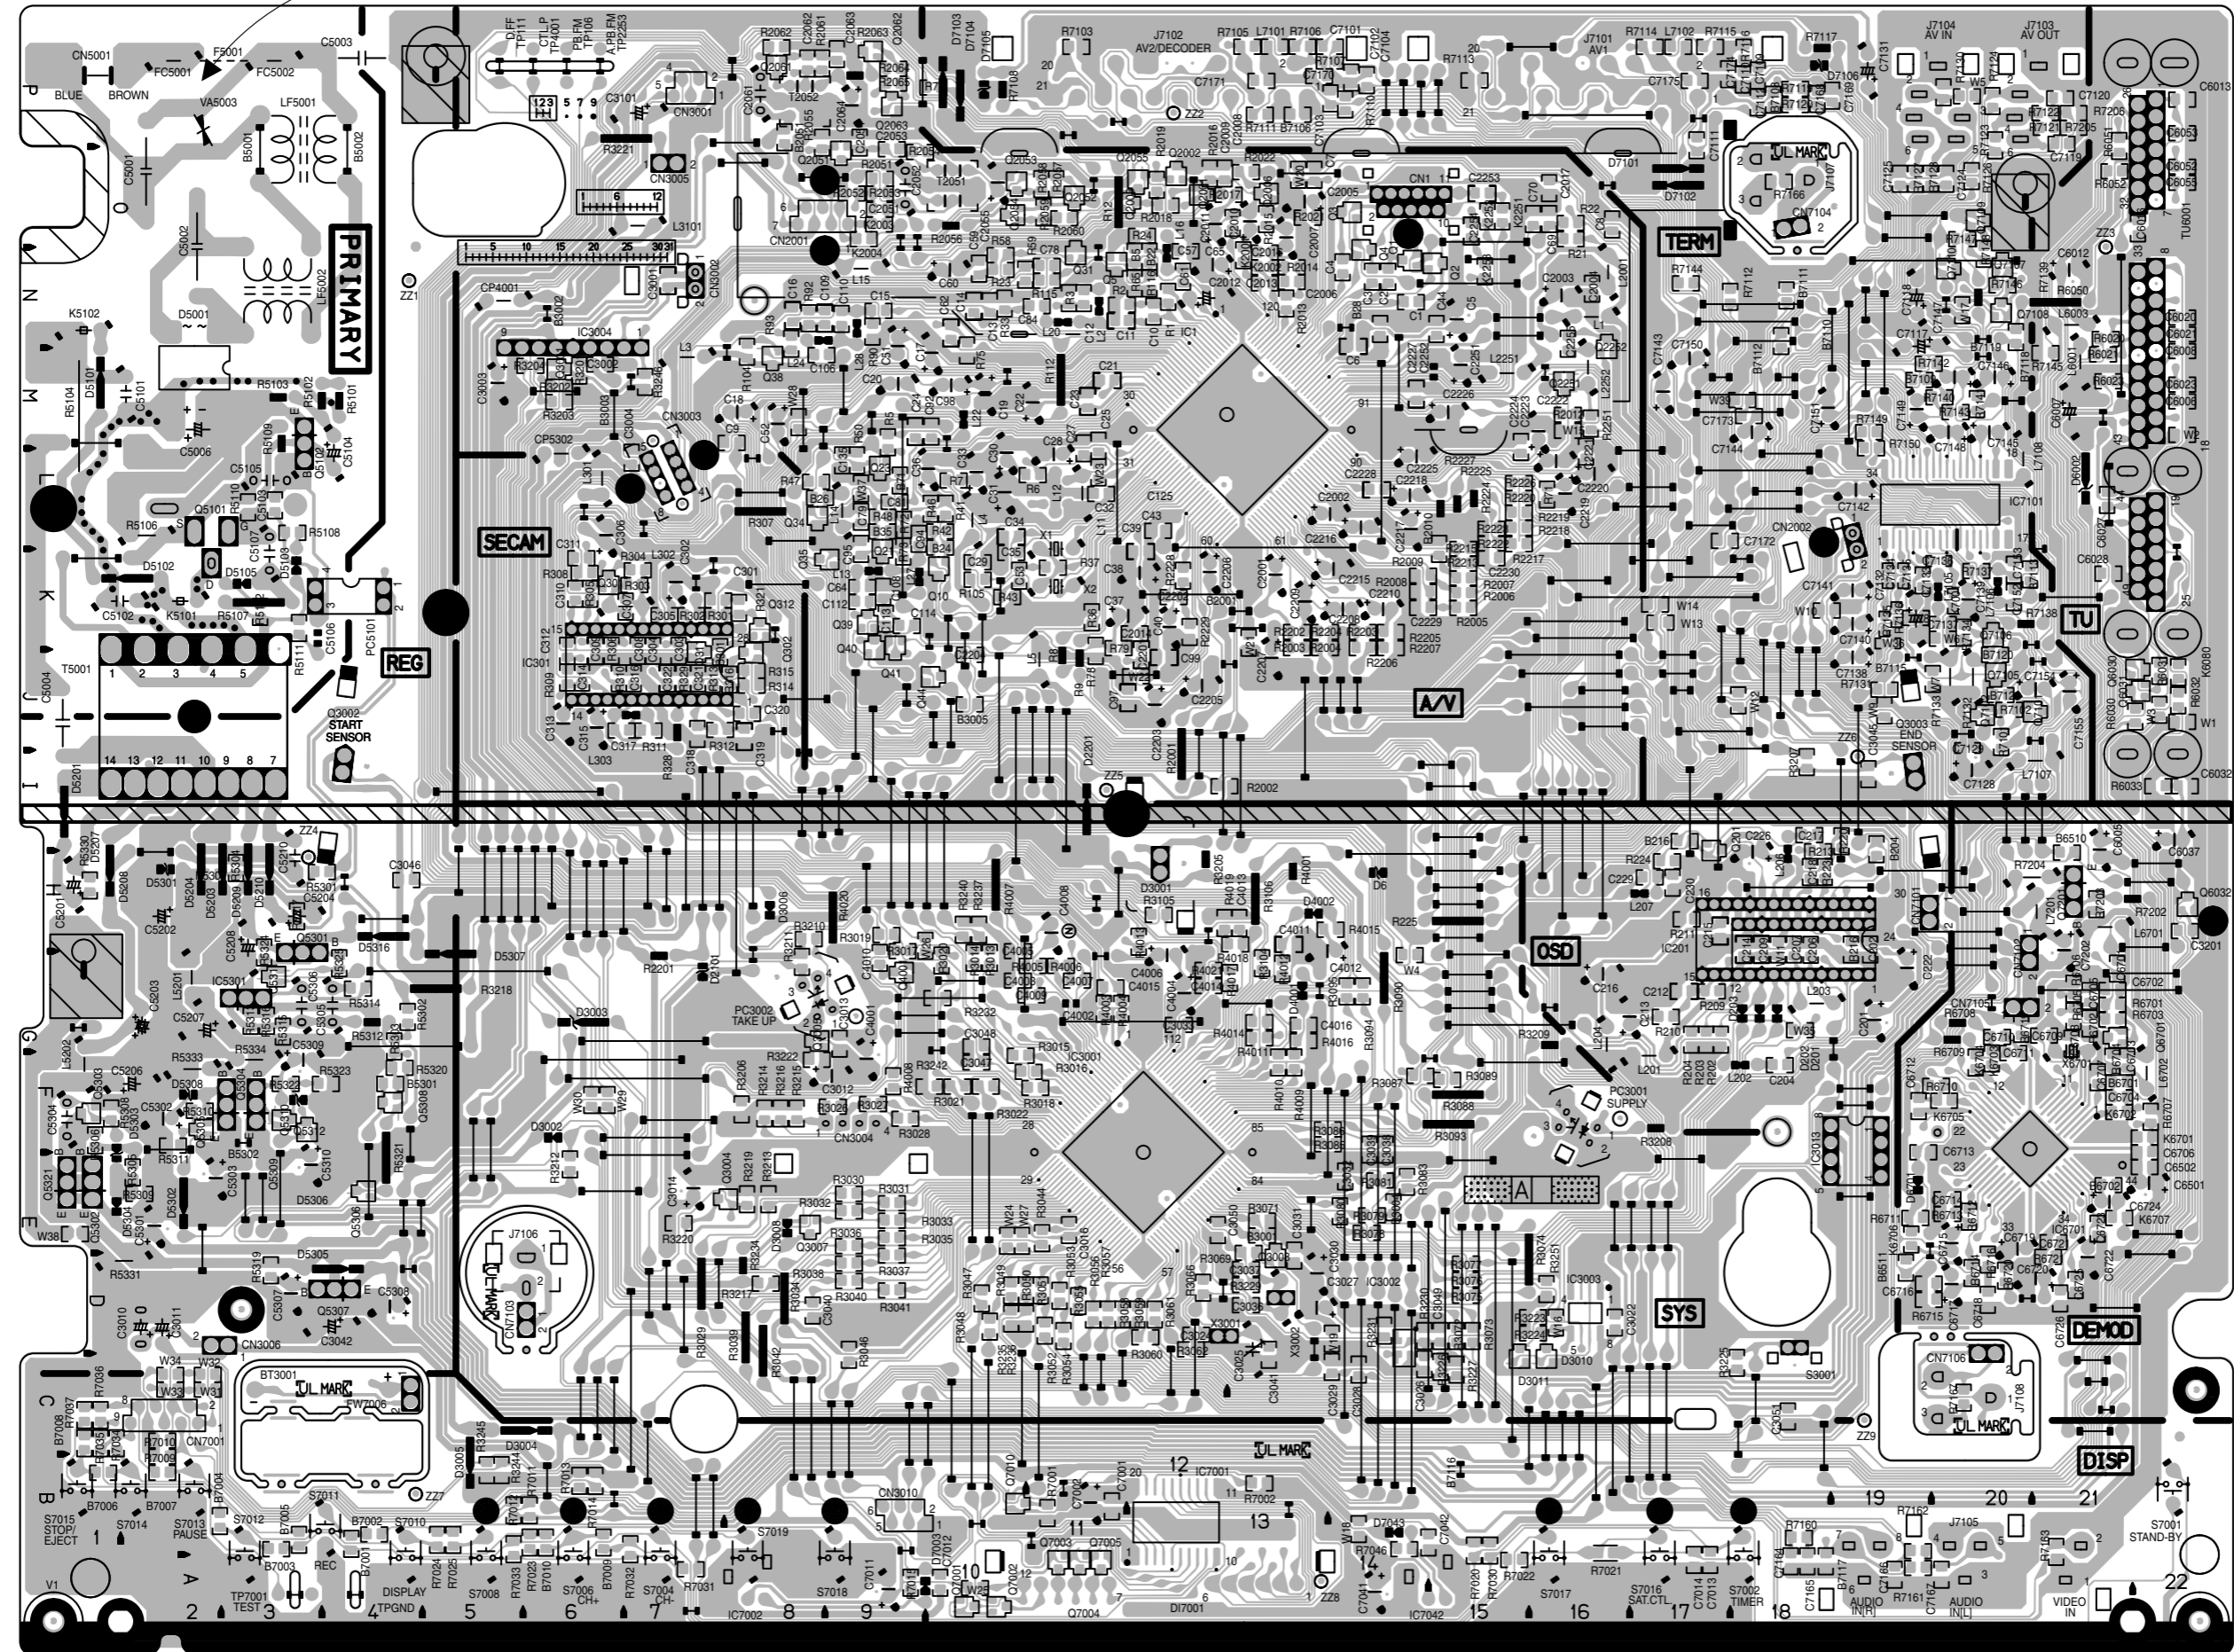

#### 4.11 FDP GRID ASSIGNMENT AND ANODE CONNECTION


##### GRID ASSIGNMENT

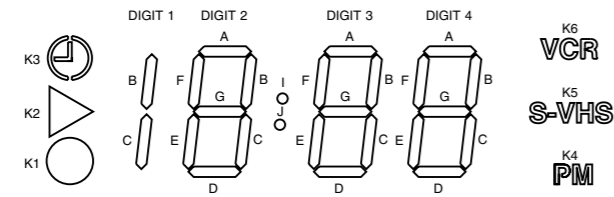

##### ANODE CONNECTION

No.	CONNECTION
1	CATHODE 2G, 3G, 4G, I, J
2	CATHODE 2F, 3F, 4F, K6
3	CATHODE 2E, 3E, 4E, K1
4	CATHODE 2D, 3D, 4D, K4
5	CATHODE 1C, 2C, 3C, 4C, K5
6	CATHODE 1B, 2B, 3B, 4B, K2
7	CATHODE 2A, 3A, 4A, K3
8	COMMON ANODE K3, K2, K5, K4, K1, K6, I, J
9	COMMON ANODE DIGIT4
10	COMMON ANODE DIGIT3
11	COMMON ANODE DIGIT2
12	COMMON ANODE DIGIT1

##### GRID ASSIGNMENT

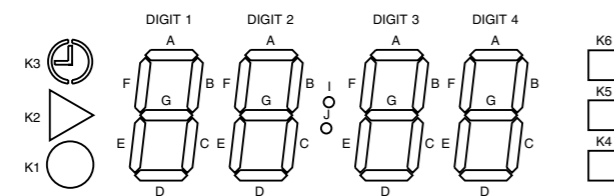


##### ANODE CONNECTION


No.	CONNECTION
1	CATHODE 1G, 2G, 3G, 4G, I, J
2	CATHODE 1F, 2F, 3F, 4F, K6
3	CATHODE 1E, 2E, 3E, 4E, K1
4	CATHODE 1D, 2D, 3D, 4D, K4
5	CATHODE 1C, 2C, 3C, 4C, K5
6	CATHODE 1B, 2B, 3B, 4B, K2
7	CATHODE 1A, 2A, 3A, 4A, K3
8	COMMON ANODE K3, K2, K5, K4, K1, K6, I, J
9	COMMON ANODE DIGIT4
10	COMMON ANODE DIGIT3
11	COMMON ANODE DIGIT2
12	COMMON ANODE DIGIT1

#### 4.12 WAVEFORMS


##### < SYSCON >

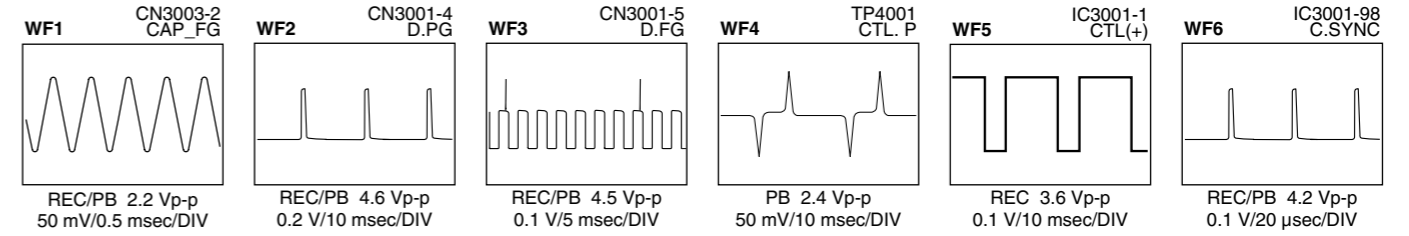

##### < VIDEO >

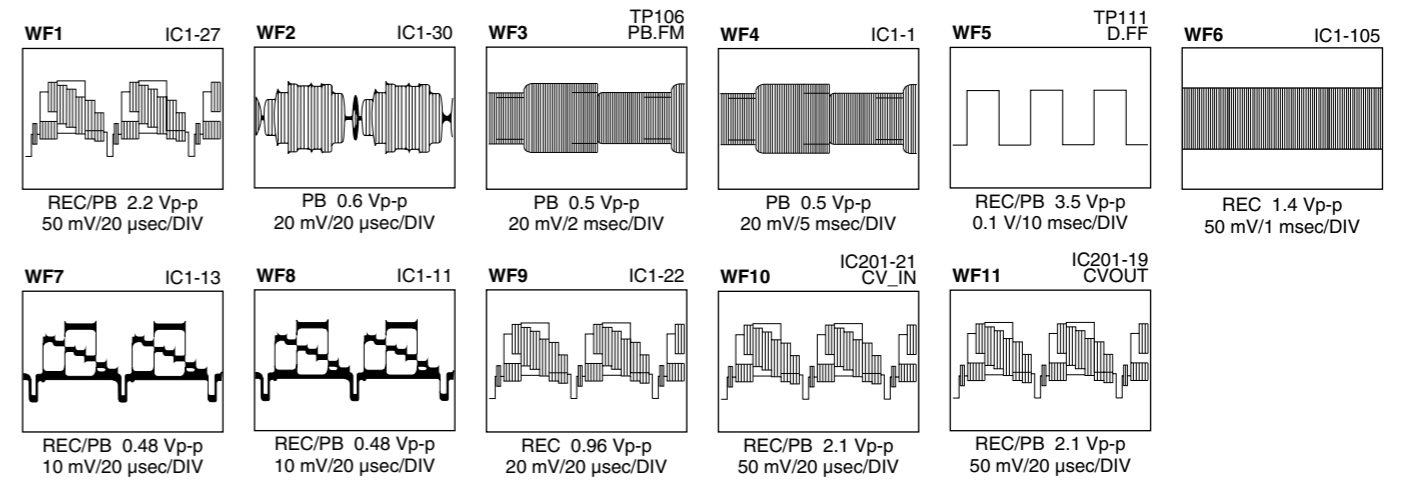

##### < AUDIO >

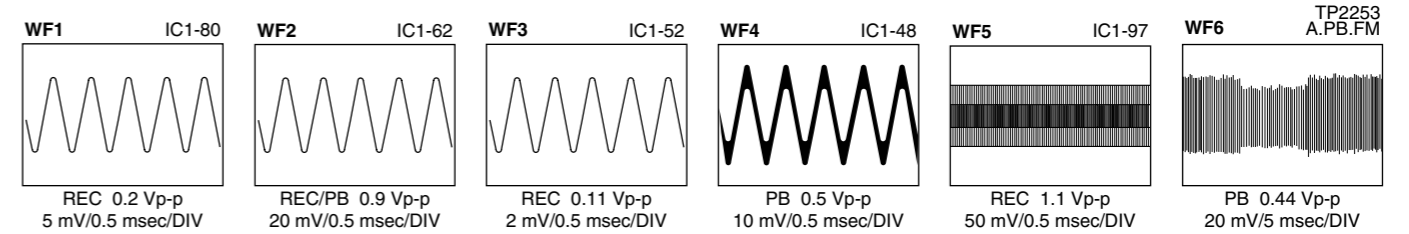

### 4.13 VOLTAGE CHARTS

<MAIN>			<ADV.JOG> [HR-J780EU/J785EK]			<SAT CTL>			<R.PAUSE> [HR-J780EU]		
MODE PIN NO.	REC	PLAY	MODE PIN NO.	REC	PLAY	MODE PIN NO.	REC	PLAY	MODE PIN NO.	REC	PLAY
IC1			101	0	0	50	4.8	4.8	6	2.4	2.4
1	1.7	2.1	102	0	0	51	4.9	4.9	7	2.4	2.4
2	2.9	2.9	103	0	0	52	0.8	0.8	8	2.4	2.4
3	2.6	2.6	104	2.5	2.5	53	4.5	4.5	9	2.8	2.5
4	1.9	1.4	105	2.4	2.4	54	-	-	10	2.8	2.5
5	1.9	1.4	106	2.4	2.4	55	0	0	11	2.8	2.5
6	2.4	2.1	107	5.4	5.4	56	0	0	CN2001		
7	1.5	0.7	108	0	0	57	0.1	0.1	1	0	0
8	0	0	109	0	0	58	4.9	4.9	2	0	0
9	2.6	2.9	110	5.0	0	59	-	-	3	0	0
10	2.4	2.4	111	0	3.4	60	0	4.9	4	0	0
11	3.1	3.1	112	2.5	2.5	61	0	4.9	5	0	0
12	2.8	2.6	113	0.5	0.5	62	0	0	6	2.2	2.4
13	3.1	3.1	114	0	0	63	0	0	7	2.4	2.4
14	2.3	2.3	115	2.6	2.6	64	-	-	CN2002		
15	0	0	116	2.5	2.5	65	-	-	1	0	0
16	2.8	2.8	117	2.5	2.5	66	-	-	2	0	0
17	1.5	1.5	118	0	0	67	-	-	CN3001		
18	2.8	2.8	119	2.5	2.5	68	0	0	1	11.7	11.7
19	0	2.6	120	4.7	4.9	69	-	-	2	0	0
20	2.8	2.8	IC201			70	4.9	4.9	3	1.4	1.4
21	2.0	1.4	1	0	0	71	4.9	4.9	4	0.1	0.1
22	2.8	2.8	2	2.6	2.8	72	4.9	4.9	5	1.5	1.5
23	2.8	2.8	3	4.9	4.9	73	4.9	4.9	CN3002		
24	5.1	5.1	4	0	0	74	0	0	1	0.2	0.2
25	0.4	2.8	5	4.5	4.5	75	4.5	4.5	2	0.2	0.2
26	0	0	6	2.5	2.5	76	4.6	4.6	CN3003		
27	2.3	2.3	7	2.5	2.7	77	5.4	5.4	1	0	0
28	2.3	2.3	8	5.4	5.4	78	3.1	3.1	2	2.5	2.7
29	1.9	1.9	9	3.1	3.1	79	0	4.9	3	2.5	2.5
30	2.1	2.1	10	4.5	4.5	80	0	0	4	5.4	5.4
31	0	0	11	0.7	0.7	81	0	0	5	0	0
32	2.5	2.5	12	5.4	5.4	82	4.9	4.9	6	4.9	4.9
33	5.0	5.0	13	2.8	3.0	83	0	0	7	-	-
34	2.7	2.3	14	2.8	3.0	84	0	0	8	11.7	11.7
35	5.4	5.4	15	0	0	85	0	0	CN3004		
36	2.6	2.6	16	1.2	1.2	86	4.6	4.6	1	4.9	4.9
37	2.3	2.3	17	0	0	87	4.9	4.9	2	4.9	4.9
38	-	-	18	5.4	5.4	88	0	0	3	0	0
39	1.2	1.2	19	2.3	2.3	89	4.9	4.9	4	0	0
40	-	-	20	0	0	90	0	0	CN7001		
41	2.6	2.6	21	2.3	2.3	91	0	0	CN7102		
42	-	-	22	0.3	0.5	92	0	0	1	0	0
43	0	0	23	5.4	5.4	93	4.9	4.9	2	0	0
44	2.2	2.2	24	2.9	3.2	94	0	0	CN7105		
45	4.8	4.8	25	2.5	2.7	95	0	0			
46	4.7	4.7	26	5.4	5.4	96	0	0			
47	2.9	2.9	27	4.6	4.6	97	0	0			
48	2.6	2.6	28	3.6	4.0	98	0.3	0.3			
49	5.1	5.1	29	5.4	5.4	99	0	2.5			
50	2.5	2.5	30	5.4	5.4	100	2.5	2.5			
51	2.8	2.8	IC3001			101	2.5	2.7			
52	2.4	2.4	1	2.7	2.4	102	1.4	1.4			
53	2.3	2.3	2	0	0	103	0	0			
54	2.4	2.4	3	0	2.4	104	4.9	0			
55	2.2	2.2	4	2.4	2.4	105	4.9	0			
56	0.4	0.4	5	0	0	106	4.9	0			
57	2.4	2.4	6	2.4	2.4	107	0.1	0.1			
58	8.2	8.2	7	2.4	0	108	1.5	1.5			
59	4.8	4.8	8	2.4	2.4	109	4.9	4.9			
60	4.7	4.7	9	4.9	4.9	110	0	0			
61	4.2	4.2	10	4.9	4.9	111	0	0			
62	4.2	4.2	11	0	0	112	2.4	2.4			
63	2.4	2.4	12	0	0	IC3002					
64	2.3	2.3	13	0	0	1	4.9	4.9			
65	1.8	1.8	14	0	1.8	2	4.9	4.9			
66	3.1	3.1	15	4.7	4.7	3	0	0			
67	4.2	4.2	16	4.9	4.9	4	0	0			
68	4.2	4.2	17	0	0.3	IC3003					
69	2.4	2.4	18	4.9	4.9	1	0	0			
70	0	0	19	0	0	2	0	0			
71	3.4	3.4	20	0	3.4	3	0	0			
72	3.4	3.4	21	4.0	4.3	4	0	0			
73	0.2	0.2	22	4.6	4.3	5	4.6	4.6			
74	2.4	2.4	23	0	0	6	4.5	4.5			
75	2.8	2.8	24	4.8	4.8	7	0	0			
76	0	0	25	0	4.9	8	4.9	4.9			
77	2.8	2.8	26	4.9	4.9	IC3004					
78	3.4	3.4	27	4.9	4.9	1	11.7	11.7			
79	3.4	3.4	28	0	0	2	0.2	0.2			
80	0.2	0.2	29	4.9	4.9	3	0	0			
81	2.4	2.4	30	4.2	4.2	4	0.2	0.2			
82	0.8	0	31	4.9	4.9	5	11.7	11.7			
83	0	0	32	0	0	6	11.7	11.7			
84	2.4	2.4	33	0	0	7	0	0			
85	2.4	0	34	4.8	4.8	8	0	0			
86	2.3	2.3	35	0	0	9	0	0			
87	1.7	1.9	36	0	0	IC5301					
88	2.3	2.3	37	0	0	1	2.5	2.5			
89	2.4	2.4	38	4.8	4.8	2	0	0			
90	2.4	2.4	39	0	0	3	4.4	4.4			
91	0.1	0.1	40	0	0	IC6701					
92	0	0	41	0	2.7	1	4.3	4.6			
93	0	2.2	42	0	0	2	1.5	1.5			
94	0	1.8	43	0	0	3	1.5	1.5			
95	0	0	44	0	0	4	0	0			
96	2.5	2.5	45	4.9	4.9	5	-	-			
97	2.8	2.5	46	0	0	6	-	-			
98	2.5	2.5	47	0	0	7	0.1	0.1			
99	5.4	5.4	48	4.9	4.9	8	0	0			
100	5.0	0	49	4.7	4.7	9	0	0			


MODE PIN NO.	REC	PLAY
CN7003	-	-
CN7104	0	0
2	0	0

### 4.14 CPU PIN FUNCTION

<SYSCON IC3001>			
PIN NO.	LABEL	IN/OUT	FUNCTION
1	CTL(+)	IN/OUT	CTL(+)-SIGNAL
2	SVSS	-	GND
3	CTL(-)	IN/OUT	CTL(-)-SIGNAL
4	CTLBias	-	CTL BIAS VOLTAGE
5	CTLFB	IN	CTL PULSE FEEDBACK [HR-J780EU]
6	CTLAMPOUT	OUT	CTL PULSE OUTPUT
7	CTLSMTIN	IN	CTL PULSE INPUT
8	CFG	IN	CAPSTAN FG PULSE INPUT
9	SVCC	-	SYSTEM POWER
10	AVCC	-	SYSTEM POWER FOR ANALOG CIRCUIT
11	NC	-	NC
12	NC	-	NC
13	NORM/MESEC/S	IN	NORMAL MODE:L/MESECAM MODE:M/NC
14	A.ENV/ND(L)	IN	AUDIO PB FM ENV.INPUT/NON HIFI MODE:L
15	END SENSOR	IN	END SENSOR
16	KEY1	IN	OPERATION CONTROL SIGNAL
17	START SENSOR	-	NC
18	KEY2	IN	OPERATION CONTROL SIGNAL
19	SCR(H)	IN	SCRAMBLE CONTROL INPUT (SCRAMBLE:H)
20	VIDEO ENV	IN	AUTO TRACKING DETECT/INPUT THE AVERAGE OF PLAYBACK VIDEO SIGNAL
21	RF AGC	IN	CHANGES IN AT&S+IC OUTPUT AS CAUSED BY CHANGES IN RECEIVER SENSITIVITY WHEN THE SAME CHANNEL IS RECEIVED MORE THAN ONCE ARE INPUT.
22	AFC	IN	TUNING LOCK
23	AVSS	-	GND FOR ANALOG CIRCUIT
24	CTL GAIN	OUT	CONTROL AMP OUT FREQUENCY RESPONSE SWITCHING
25	CAP REV(L)	OUT	CAPSTAN MOTOR REVERSE CONTROL (FWD:H/REV:L)
26	LSB	IN	MECHANISM MODE DETECT(B)
27	LSC	IN	MECHANISM MODE DETECT(C)
28	LSA	IN	MECHANISM MODE DETECT(A)
29	RC	IN	REMOTE CONTROL DATA INPUT
30	PROTECT	IN	DETECTION SIGNAL FOR SW POWER SUPPLY
31	PROJECT 50 IN	IN	CONTROL SIGNAL FOR TV LINK
32	POWER DET	IN	DETECTION SIGNAL FOR POWER DOWN OF AC POWER SUPPLY
33	PROJECT 50 OUT	OUT	CONTROL SIGNAL FOR TV LINK
34	STB/TEST	OUT	STROBE SIGNAL (FOR FDP DRIVER)
35	LMC1	OUT	LOADING MOTOR DRIVE(1)
36	LMC2	OUT	LOADING MOTOR DRIVE(2)
37	LMC3	OUT	LOADING MOTOR DRIVE(3)
38	P.CTL(H)	OUT	CONTROL SIGNAL FOR SWITCHING POWER SUPPLY
39	LOCK(L)	IN	TUNING PLL LOCK DETECT. L
40	V_UP(H)	-	NC
41	SIDE BAND GAIN	OUT	VOLTAGE CONTROL SIGNAL FOR VIDEO FREQUENCY RESPONSE
42	SW1	OUT	TUNER SYSTEM "L" MODE:L: H
43	VSS	-	GND
44	SAT_CTL	OUT	REMOTE CONTROL OUTPUT FOR SATELLITE RECEIVER
45	VCC	-	SYSTEM POWER
46	NC	-	NC
47	S.DATA_OUT	OUT	SERIAL DATA INPUT FOR THE FDP DRIVER
48	S.CLK_OUT	OUT	SERIAL DATA TRANSMISSION CLOCK FOR THE FDP DRIVER
49	I2C DATA	IN/OUT	SERIAL DATA TRANSFER INPUT/OUTPUT
50	I2C CLK	OUT	SERIAL DATA TRANSFER CLOCK
51	P.SAVE(L)	-	NC
52	S.DATA	OUT	SERIAL DATA TRANSFER OUTPUT TO THE ON-SCREEN IC
53	S.CLK	OUT	SERIAL DATA TRANSMISSION CLOCK FOR THE ON-SCREEN IC
54	SP FG	IN	DETECTION SIGNAL FOR SUPPLY REEL ROTATION/TAPE REMAIN
55	SW2	OUT	TUNER SYSTEM "L" MODE:L
56	JSA	IN	INPUT FOR JOG SHUTTLE [HR-J780EU/J785EK]

PIN NO.	LABEL	IN/OUT	FUNCTION
57	JSB	IN	INPUT FOR JOG SHUTTLE [HR-J780EU/J785EK]
58	REC_SAFETY	IN	REC SAFETY SWITCH DETECT (SW ON: L)
59	TU FG	IN	DETECTION SIGNAL FOR TAKE-UP REEL ROTATION/TAPE REMAIN
60	TU CLK	OUT	CLOCK FOR DATA TRANSFER TO THE TUNER UNIT
61	TU DATA	OUT	TUNING DATA
62	FWE	-	NC
63	NM(L)	-	NC
64	X2	-	TIMER CLOCK (32.768 kHz)
65	X1	-	TIMER CLOCK (32.768 kHz)
66	RES(L)	-	RESET TERMINAL (RESET ON:L)
67	OSC1(IN)	-	MAIN SYSTEM CLOCK (10MHz)
68	VSS	-	GND
69	OSC2(OUT)	-	MAIN SYSTEM CLOCK (10MHz)
70	VCC	-	SYSTEM POWER
71	MODE	-	NC
72	TU A MUTE(H)	OUT	TUNER AUDIO MUTE CONTROL (MUTE:H)
73	TU V MUTE(H)	OUT	TUNER VIDEO CONTROL (MUTE:H)
74	MESECAM(H)	OUT	MESECAM:H [HR-J680EU/J780EU]
75	I2C CLK2	OUT	SERIAL DATA TRANSFER CLOCK FOR MEMORY IC
76	I2C DATA2	IN/OUT	SERIAL DATA TRANSFER OUTPUT FOR MEMORY IC
77	SYNC DET(H)	IN	DETECTION OF VIDEO SYNC SIGNAL (DETECTED:H)
78	OSD CS	OUT	CHIP SELECT FOR THE ON-SCREEN IC
79	EE(L)	-	NC
80	R.PAUSE	IN	REMOTE PAUSE CONTROL [HR-J780EU]
81	N.PB_MUTE(H)	OUT	NORMAL AUDIO MUTE CONTROL (MUTE:H)
82	VCC	-	SYSTEM POWER
83	NC	-	NC
84	VSS	-	GND


4.15 SYSTEM CONTROL BLOCK DIA GRAM

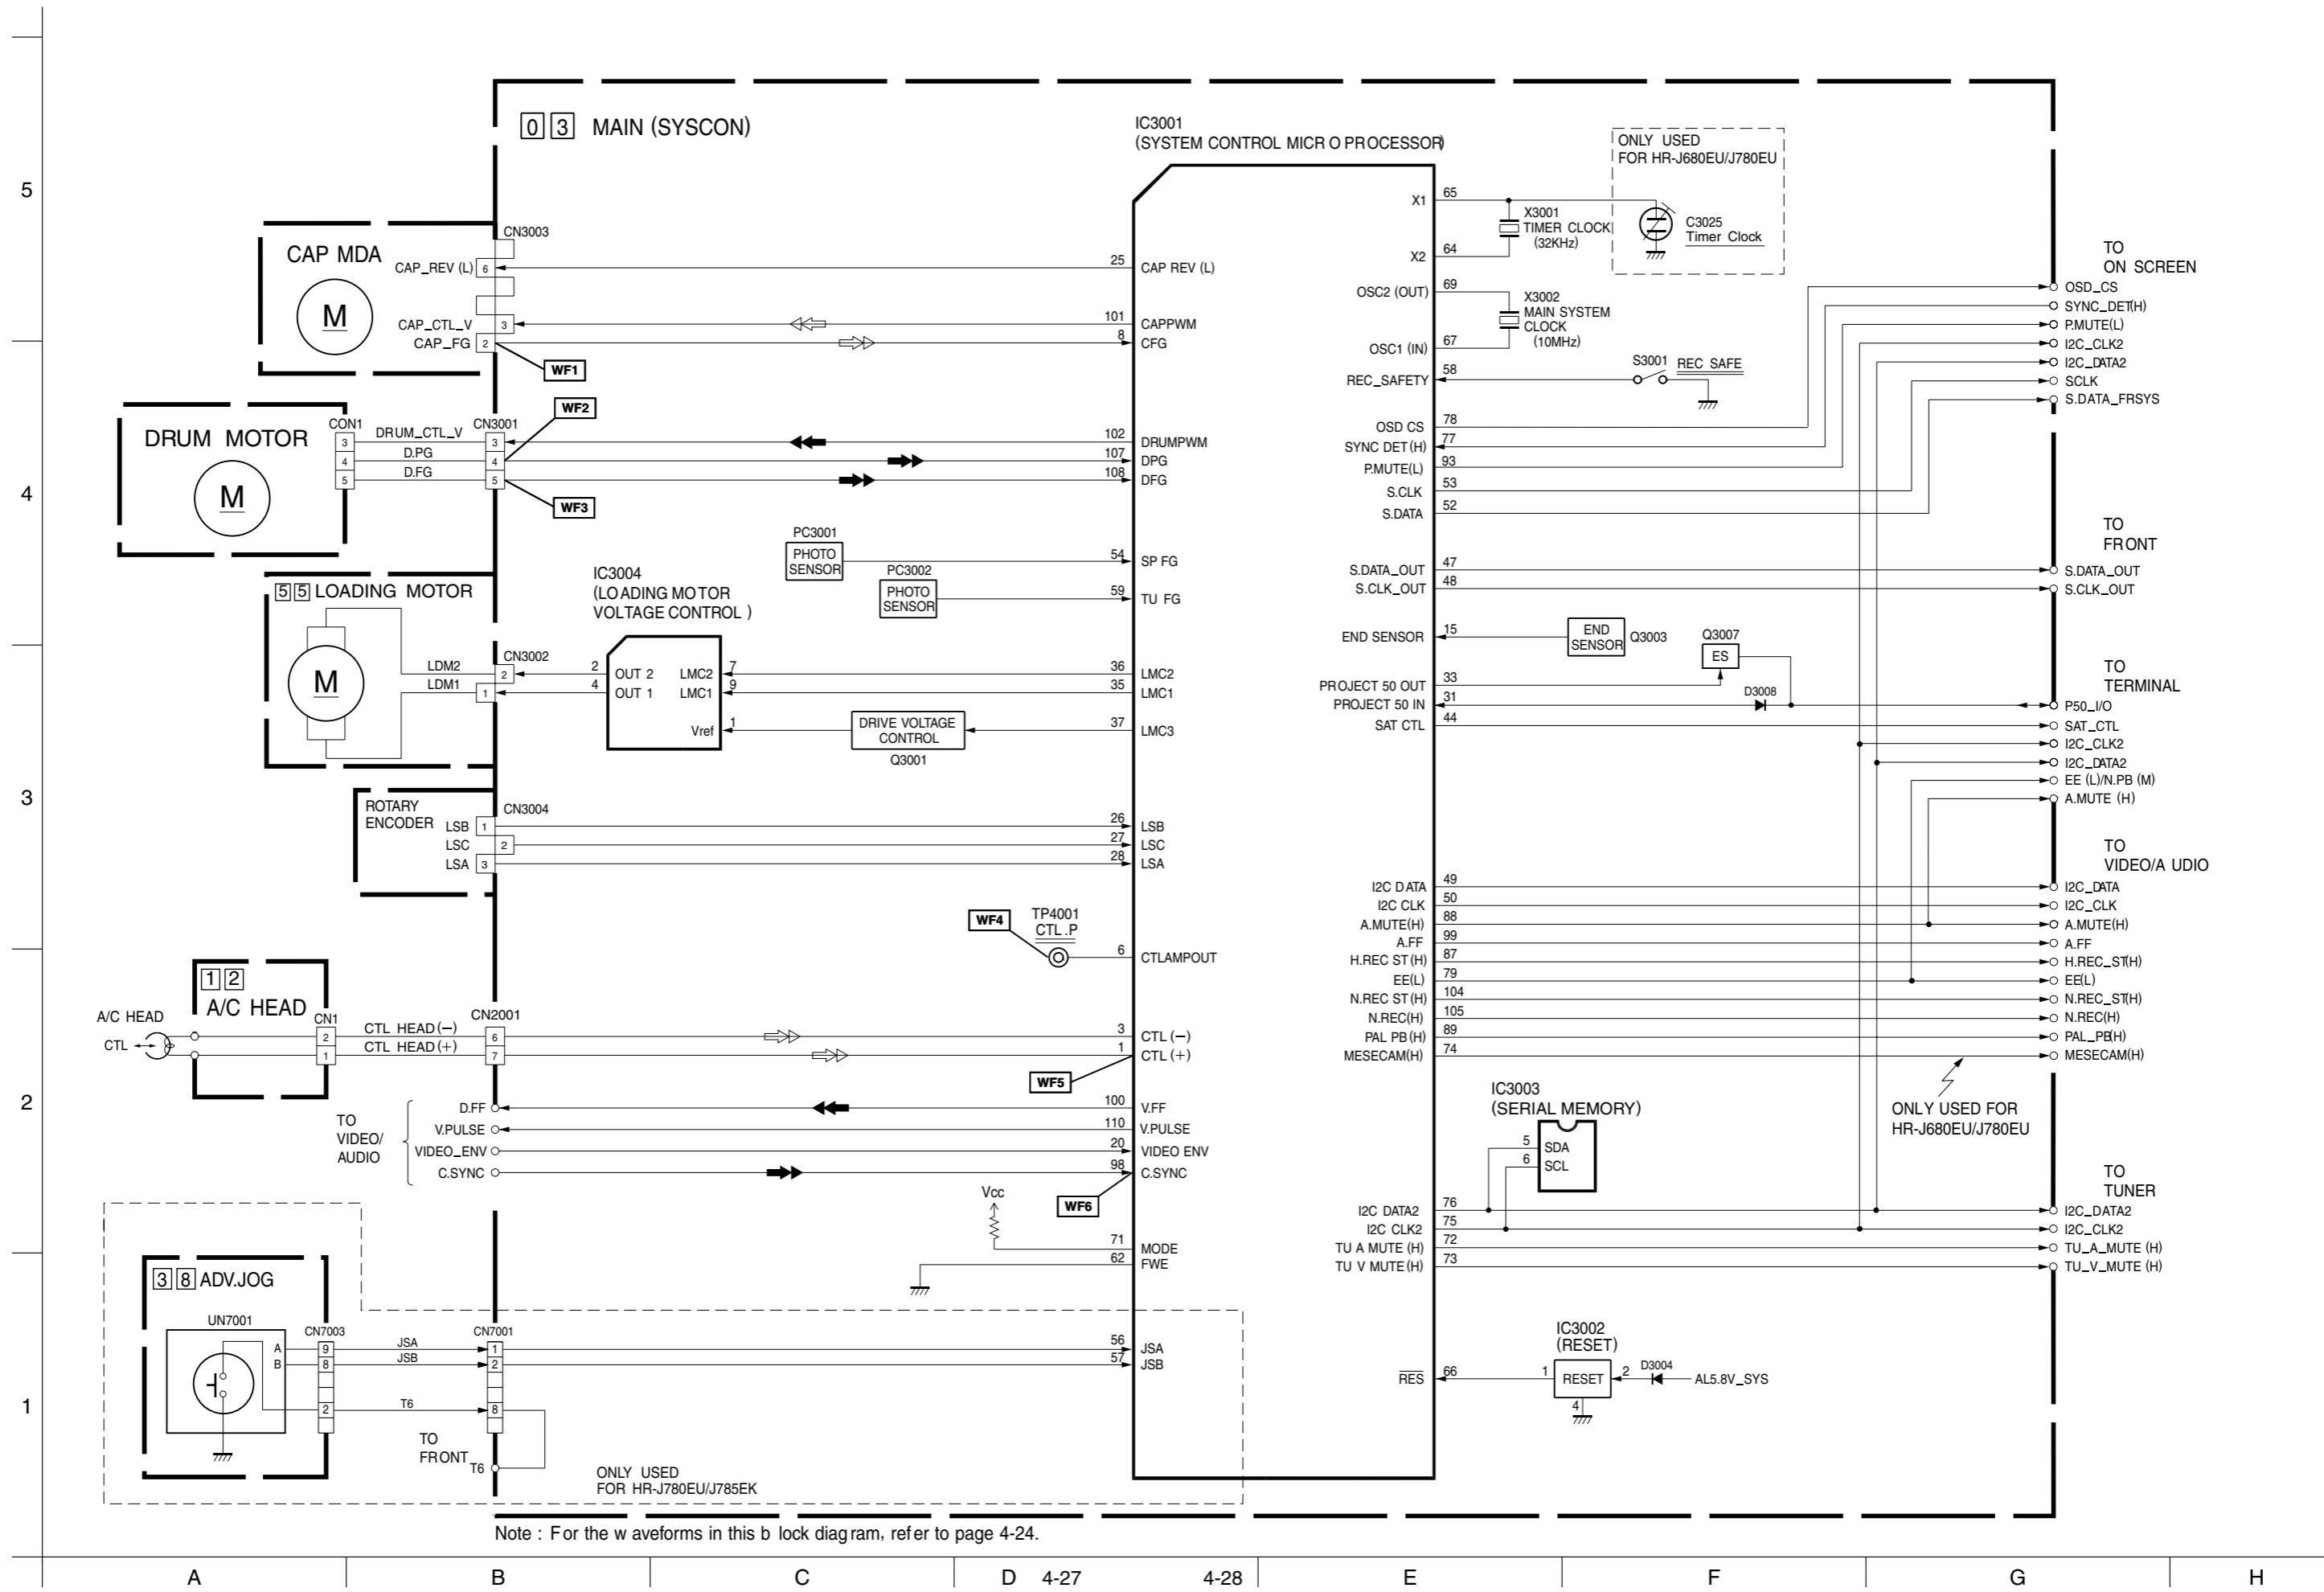

Note : For the waveforms in this block diagram, refer to page 4-24.




4.16 VIDEO BLOCK DIA GRAM

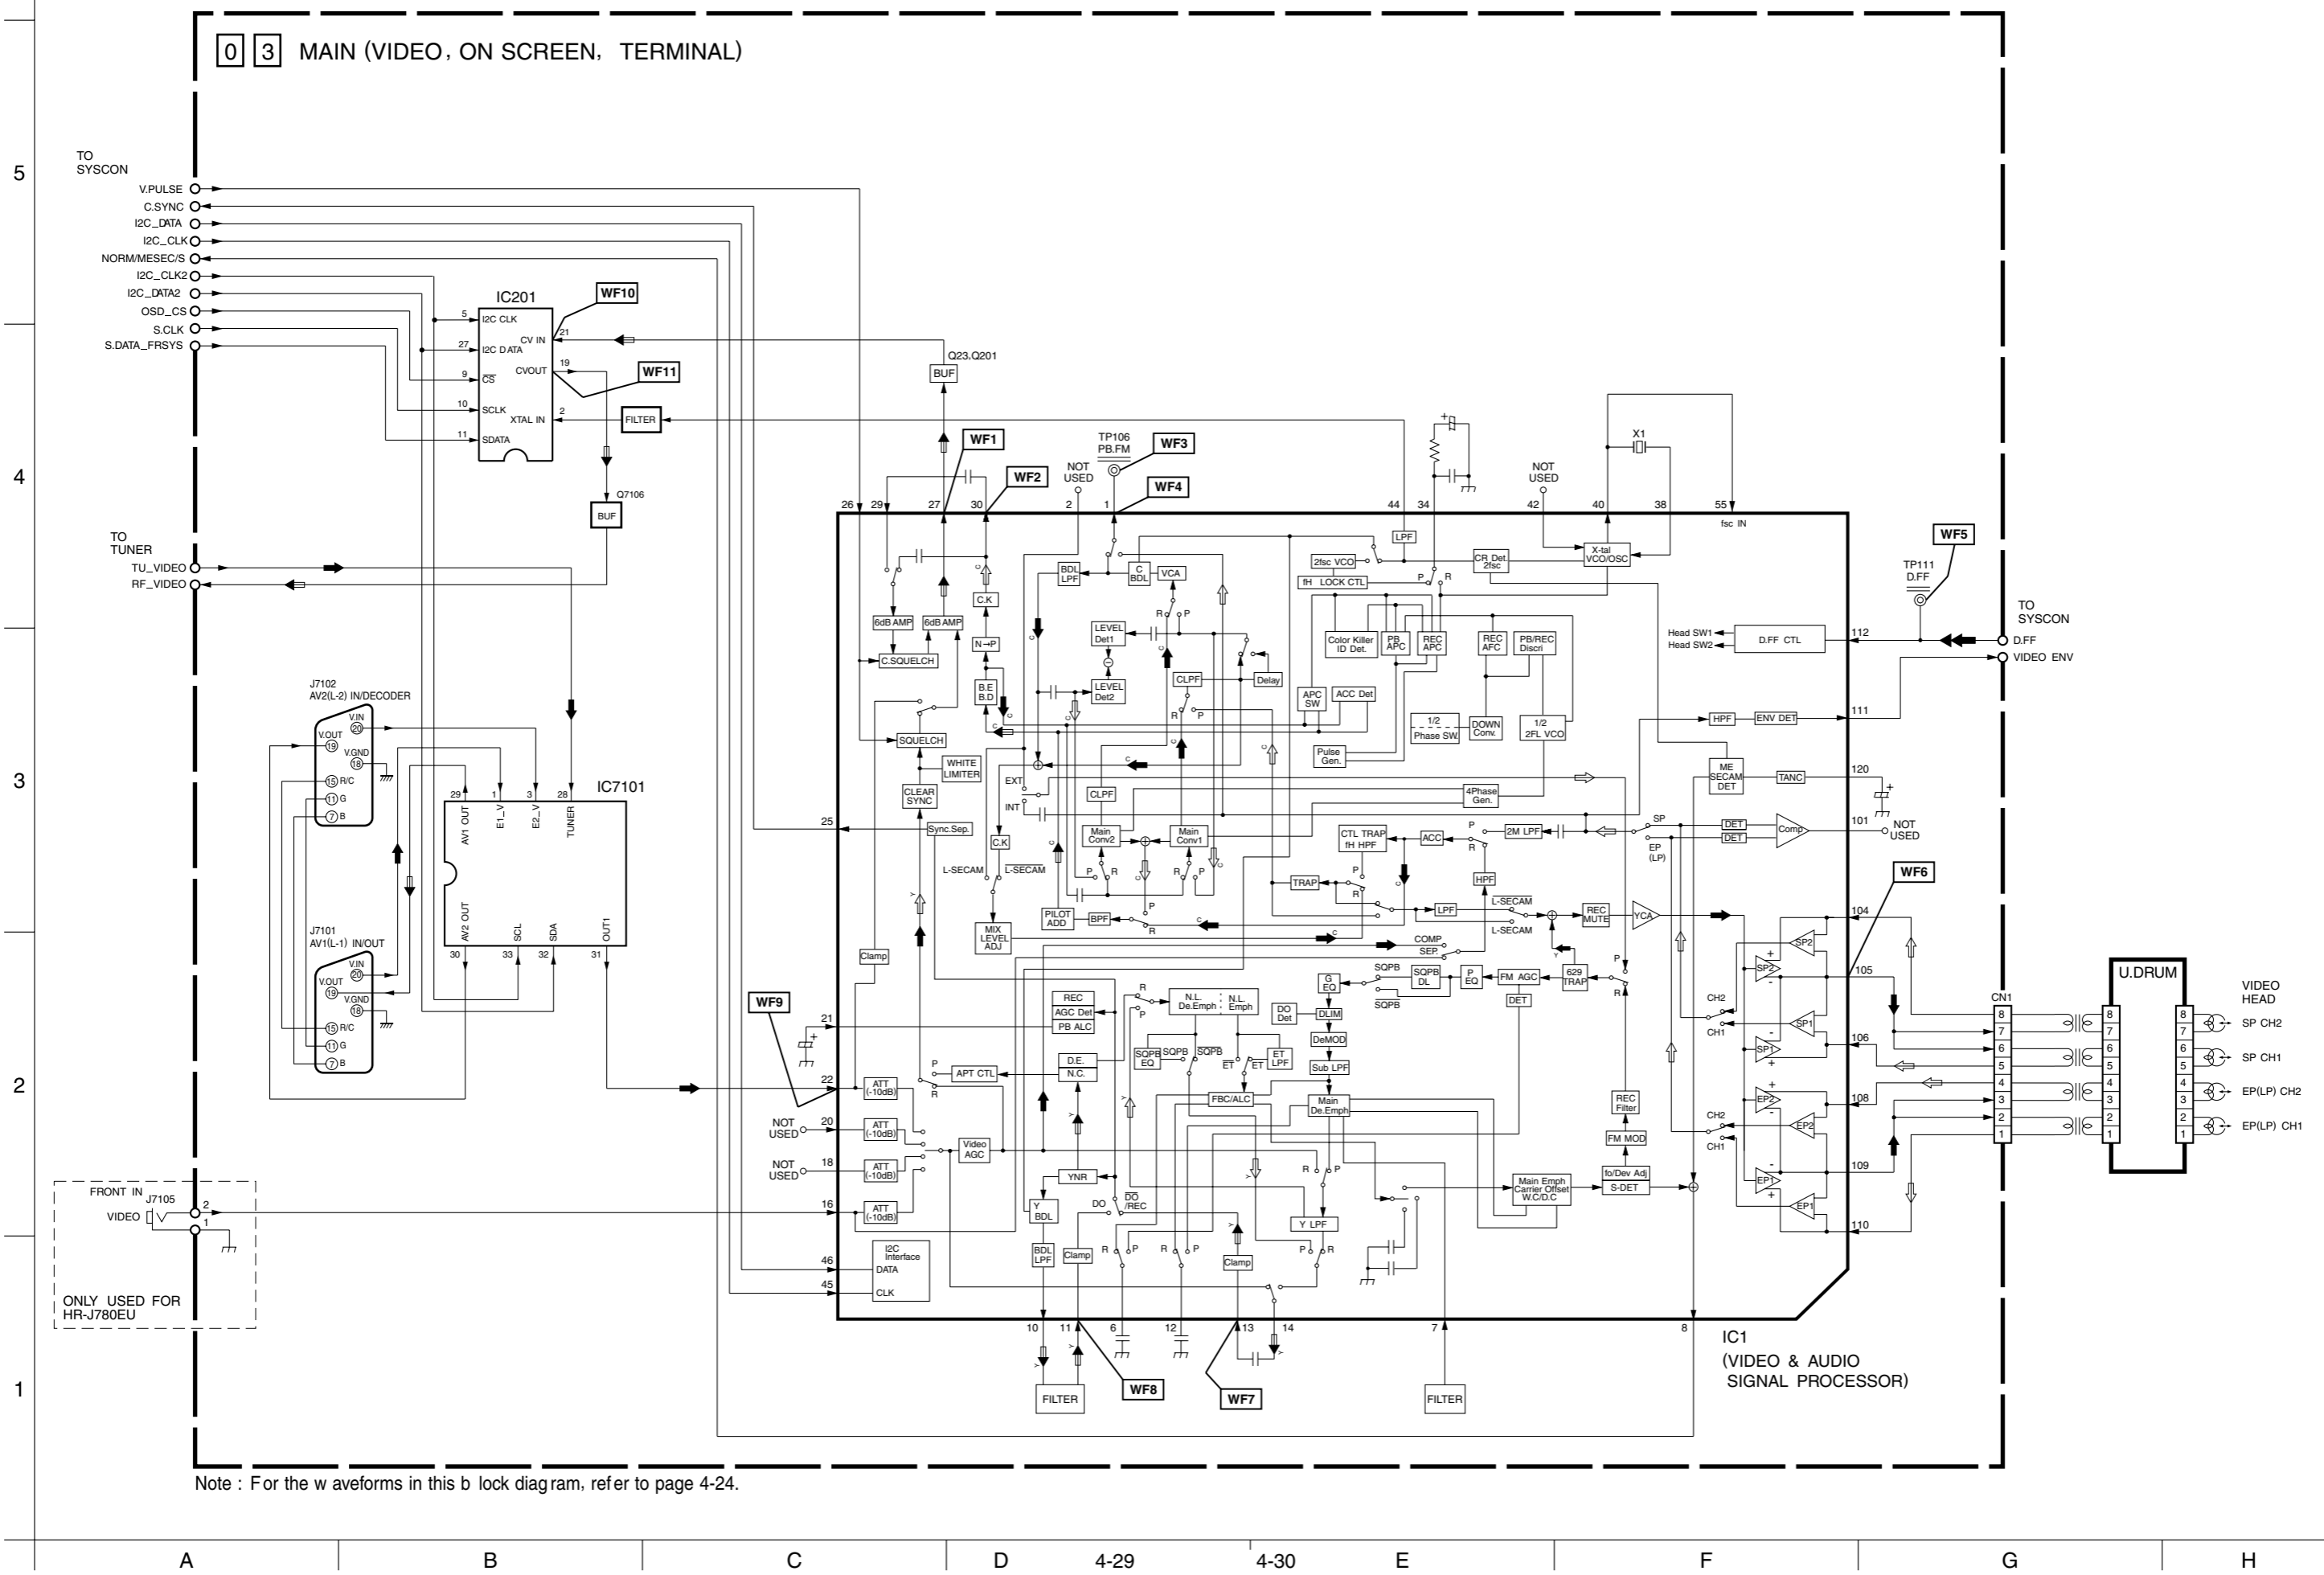

Note : For the waveforms in this block diagram, refer to page 4-24.

4.17 AUDIO BLOCK DIA GRAM

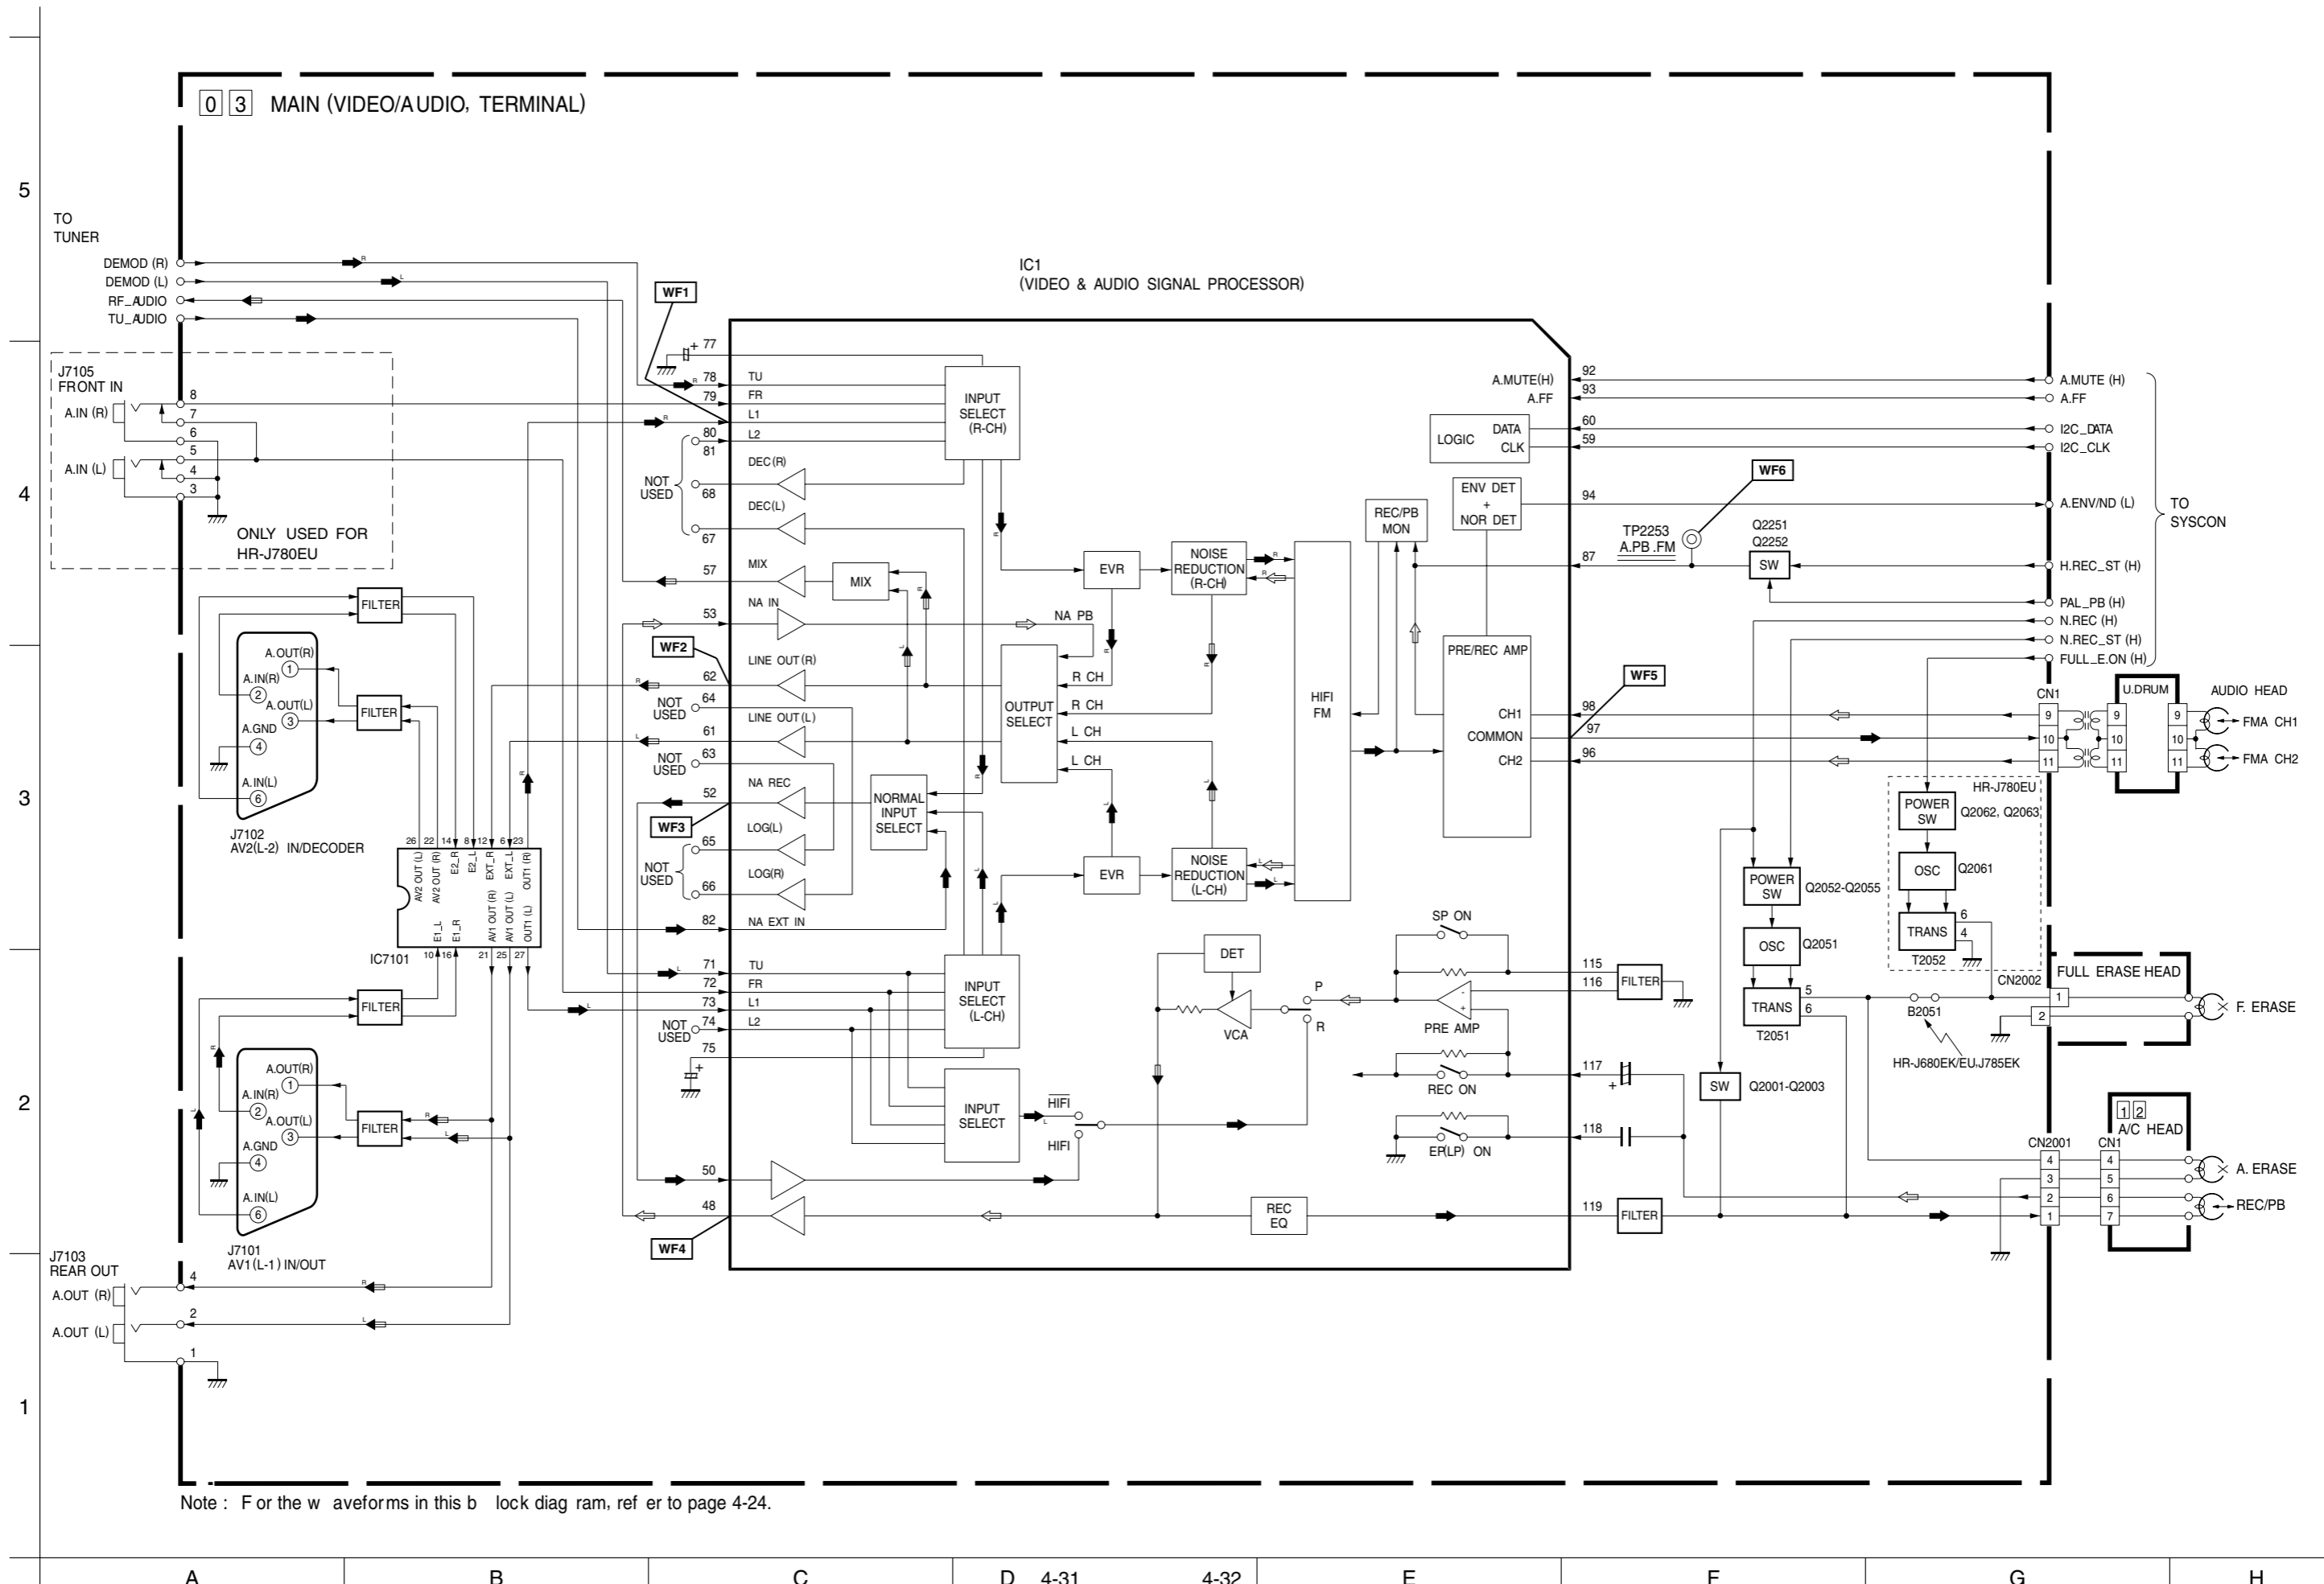

Note : F or the waveforms in this block diagram, refer to page 4-24.