

# **PAMS Technical Documentation**

## **NME-2A Series Transceivers**

### **Chapter 4**

## **System Module GM8**

### AMENDMENT RECORD SHEET

| Amendment Number | Date           | Inserted By | Comments  |
|------------------|----------------|-------------|---|
|                  | <b>08/97</b>   |             | Original  |
| <b>Issue 2</b>   | <b>02/2000</b> | OJuntune    | ARS added<br>TOC updated<br>New layout for tables<br>Parts list v.4.3 added<br>repaginated<br>A3 schematics for v. 13 added |
|                  |                |             |   |
|                  |                |             |   |
|                  |                |             |   |
|                  |                |             |   |

## CHAPTER 4 – SYSTEM MODULE GM8

### CONTENTS

|   |    |
|---|----|
| Introduction .....                      | 7  |
| Technical Specifications .....          | 7  |
| Modes of Operation .....                | 7  |
| External and Internal Connections ..... | 8  |
| System Connector .....                  | 8  |
| SIM Card Reader .....                   | 9  |
| Data Connector .....                    | 10 |
| Internal Signals .....                  | 11 |
| Baseband Block Description .....        | 14 |
| General .....                           | 14 |
| Names of Functional Blocks .....        | 14 |
| Clocking Scheme .....                   | 15 |
| Reset and Power Control .....           | 16 |
| Watchdog System .....                   | 17 |
| CTRLU .....                             | 18 |
| Main Components .....                   | 18 |
| Input Signals of CTRLU .....            | 19 |
| Output Signals of CTRLU .....           | 20 |
| Bidirectional Signals of CTRLU .....    | 20 |
| Block Description .....                 | 20 |
| PWRU .....                              | 22 |
| Main Components .....                   | 22 |
| Input Signals of PWRU .....             | 22 |
| Output Signals of PWRU .....            | 23 |
| Block Description .....                 | 23 |
| DSPU .....                              | 24 |
| Main Components of DSPU .....           | 25 |
| Input Signals of DSPU .....             | 26 |
| Output Signals of DSPU .....            | 26 |
| Bidirectional Signals of DSPU .....     | 26 |
| Block Description of DSPU .....         | 27 |
| AUDIO .....                             | 27 |
| Main Components of AUDIO .....          | 28 |
| Input Signals of AUDIO .....            | 28 |
| Output Signals of AUDIO .....           | 28 |

|                                     |    |
|-------------------------------------|----|
| Block Description of AUDIO .....    | 29 |
| ASIC .....                          | 29 |
| Main Components of ASIC .....       | 29 |
| Input Signals of ASIC .....         | 30 |
| Output Signals of ASIC .....        | 30 |
| Bidirectional Signals of ASIC ..... | 32 |
| Block Description of ASIC .....     | 32 |
| RFI .....                           | 33 |
| Main Components of RFI .....        | 33 |
| Input Signals of RFI .....          | 34 |
| Output Signals of RFI .....         | 34 |
| Bidirectional Signals of RFI .....  | 34 |
| Block Description of RFI .....      | 34 |
| RF Block Description .....          | 36 |
| Regulators .....                    | 36 |
| Power Distribution .....            | 36 |
| Current Consumption .....           | 36 |
| Receiver .....                      | 37 |
| Duplex Filter .....                 | 37 |
| Pre-Amplifier .....                 | 38 |
| RX Interstage Filters .....         | 38 |
| Second LNA .....                    | 39 |
| First Mixer .....                   | 39 |
| First IF Amplifier .....            | 40 |
| First IF Filter .....               | 40 |
| AGC Amplifier .....                 | 41 |
| Receiver IF IC .....                | 41 |
| Second IF Filter .....              | 42 |
| Second IF Amplifier .....           | 42 |
| Phase Split .....                   | 43 |
| Transmitter .....                   | 44 |
| Modulator Circuit .....             | 44 |
| Up Conversion Mixer .....           | 45 |
| TX Interstage Filters .....         | 46 |
| TX Amplifiers .....                 | 46 |
| Power Amplifier .....               | 47 |
| Power Control Circuitry .....       | 47 |
| Frequency Synthesizers .....        | 48 |

|   |    |
|---|----|
| VCTCXO .....                                  | 48 |
| VHF PLL .....                                 | 49 |
| VHF VCO .....                                 | 49 |
| UHF Synthesizer .....                         | 50 |
| UHF VCO .....                                 | 50 |
| UHF VCO Buffer .....                          | 51 |
| PLL Circuit .....                             | 51 |
| Prescaler .....                               | 52 |
| Part List of GM8 (EDMS Issue: 2.6) .....      | 58 |
| Part List of GM8 v.13 (EDMS Issue: 3.4) ..... | 78 |

## List of Figures

|   |        |
|---|--------|
| Clocking Scheme .....                       | 4 – 14 |
| Reset & Power Control .....                 | 4 – 15 |
| Watchdog System .....                       | 4 – 16 |
| Interconnection Diagram – Baseband .....    | 4 – 52 |
| Power Distribution Diagram – Baseband ..... | 4 – 53 |
| Block Diagram – Diagram of RF .....         | 4 – 54 |
| Power Distribution – Diagram of RF .....    | 4 – 55 |
| Interconnections – RF and BB .....          | 4 – 56 |

A3:

|  |         |
|--|---------|
| Block Diagram of Baseband (Version 1.0 Edit 192) .....       | 4/A3–1  |
| Circuit Diagram of MCU & Memories (Version 1.0 Edit 3) ..... | 4/A3–2  |
| Circuit Diagram of Power Supply (Version 1.0 Edit 16) .....  | 4/A3–3  |
| Circuit Diagram of DSPU (Version 1.0 Edit 4) .....           | 4/A3–4  |
| Circuit Diagram of Audio (Version 1.0 Edit 6) .....          | 4/A3–5  |
| Circuit Diagram of ASIC (Version 1.0 Edit 15) .....          | 4/A3–6  |
| Circuit Diagram of RFI (Version 1.0 Edit 3) .....            | 4/A3–7  |
| Block Diagram of RF (Version 1.0 Edit 70) .....              | 4/A3–8  |
| Circuit Diagram of Receiver (Version 1.0 Edit 208) .....     | 4/A3–9  |
| Circuit Diagram of Transmitter (Version 4.3 Edit 220) .....  | 4/A3–10 |
| Circuit Diagram of Synthesizers (Version 0.0 Edit 116) ..... | 4/A3–11 |
| Component Layout Diagram of Side 1 .....                     | 4/A3–12 |
| Component Layout Diagram of Side 2 .....                     | 4/A3–13 |
| Block Diagram of Baseband v.13( 1.0 Edit 192) .....          | 4/A3–1  |
| Circuit Diagram of MCU & Memories (Version 1.0 Edit 3) ..... | 4/A3–2  |

|  |         |
|--|---------|
| Circuit Diagram of Power Supply (Version 1.0 Edit 16) .....  | 4/A3-3  |
| Circuit Diagram of DSPU (Version 1.0 Edit 4) .....           | 4/A3-4  |
| Circuit Diagram of Audio (Version 1.0 Edit 6) .....          | 4/A3-5  |
| Circuit Diagram of ASIC (Version 1.0 Edit 15) .....          | 4/A3-6  |
| Circuit Diagram of RFI (Version 1.0 Edit 3) .....            | 4/A3-7  |
| Block Diagram of RF (Version 1.0 Edit 70) .....              | 4/A3-8  |
| Circuit Diagram of Receiver (Version 1.0 Edit 208) .....     | 4/A3-9  |
| Circuit Diagram of Transmitter (Version 4.3 Edit 220) .....  | 4/A3-10 |
| Circuit Diagram of Synthesizers (Version 0.0 Edit 116) ..... | 4/A3-11 |
| Component Layout Diagram of Side 1 .....                     | 4/A3-12 |
| Component Layout Diagram of Side 2 .....                     | 4/A3-13 |

**V.13 diagrams (A3):**

|   |           |
|---|-----------|
| Block Diagram of Baseband, version 13 (V.1 Edit 280) .....        | 4.1/A3-1  |
| Circuit Diagram of MCU & Memories, version 13 (V.1 Edit 10) ..... | 4.1/A3-2  |
| Circuit Diagram of Power Supply, version 13 (V.1 Edit 25) ...     | 4.1/A3-3  |
| Circuit Diagram of DSPU, version 13 (V.1 Edit 10) .....           | 4.1/A3-4  |
| Circuit Diagram of Audio, version 13 (V.1 Edit 15) .....          | 4.1/A3-5  |
| Circuit Diagram of ASIC, version 13 (V.1 Edit 21) .....           | 4.1/A3-6  |
| Circuit Diagram of RFI, version 13 (V.1 Edit 9) .....             | 4.1/A3-7  |
| Block Diagram of RF, version 13 (V.1 Edit 77) .....               | 4.1/A3-8  |
| Circuit Diagram of Receiver, version 13 (V.1 Edit 219) .....      | 4.1/A3-9  |
| Circuit Diagram of Transmitter, version 13 (V.4.3 Edit 239) ..    | 4.1/A3-10 |
| Circuit Diagram of Synthesizers, version 13 (V.0.0 Edit 123) .    | 4.1/A3-11 |
| Component Layout Diagram of GM8 v.13 Side 1 .....                 | 4.1/A3-12 |
| Component Layout Diagram of GM8 v.13 Side 2 .....                 | 4.1/A3-13 |

## Introduction

System Module GM8 is the baseband/RF module NME-2A cellular transceiver. The GM8 module carries out all the system and RF functions of the transceiver. System module GM8 is designed for a mobile phone, that operate in GSM system.

## Technical Specifications

The entire transceiver is built on a single multilayer PWB. This board is enclosed in a housing consisting of a metal bottom part and a metallized top plastic part. The housing has walls to separate baseband from RF.

## Modes of Operation

There are three different operation modes:

- active mode
- idle mode
- power off mode

In the active state all circuits are powered and part of the module may be in idle mode.

The module is usually in the idle mode when there is no call and the phone is in SERV. In the idle mode circuits are reset, powered down and clocks are stopped or the frequency reduced. All the clocks except the main clock from VCTCXO can be stopped in that mode. Whether the SIM clock is stopped or not depends on the network.

Currently the MCU only goes into sleep mode when in IDLE, not to MCU standby mode as the time to wake the SW is too long.

In power off mode all circuits are disabled. Power is turned on and off by pressing the *on/off* key on the handset which activates a power FET on the transceiver. The power FET enables power to the handset and the transceiver.

The Ignition Sense circuit will (when connected) turn the phone on when IGNS input goes high. This circuit is active for approximately 200ms. which is ample time for the phone to turn on.

## External and Internal Connections

The transceiver has three connectors, a 25 pole connector which basically implements the VDA recommendation for a GSM mobile phone, the antenna connector and a 16 pole connector for the Data Transfer implementing the M2BUS, the D-BUS and Flash programming. All internal connections on the board are by PWB wiring. The SIM card reader is soldered to the board.

### System Connector

| Pin   | Name          | Description   |
|-------|---------------|---|
| 1     | MIC           | Handset mic   |
| 2     | NC            | Not used  |
| 3, 17 | RFGND         | Battery GND   |
| 4, 16 | VBATT         | Battery voltage   |
|       |               | • nominal voltage: 13.2 V   |
| 5     | IGNS          | IGNS input  |
|       |               | • when IGNS goes from low to high voltage the radio will be turned on |
| 6     | EAR           | Earphone signal   |
|       |               | • signal to handset pin 8   |
| 7     | NC            | No connection   |
| 8     | RFGND         | Handset ground  |
|       |               | • handset connector pin 2   |
| 9     | AUTO AN-TENNA | Antenna control   |
|       |               | • phone off: 0...0.3 V  |
|       |               | • phone on: VBATT   |
|       |               | • min ext load: 80 Ω  |
| 10    | CRM           | CRM car radio mute  |
|       |               | • during a call: 0...0.3 V  |
|       |               | • standby mode: VBATT   |
|       |               | • min ext load: 80 Ω  |
| 11    | MBUS          | M2BUS   |
|       |               | • handset pin 3, in parallel with pin 5                               |
|       |               | of data connector   |
| 12    | NC            | Not connected   |
| 13    | NC            | Not connected   |



| Pin | Name       | Description  |                      |
|-----|------------|--|----------------------|
| 14  | RFGND      | HF Mic ground  |                      |
| 15  | MIC_HF     | External HF microphone                                   |                      |
| 18  | XPWRON     | Power on/off control                                     |                      |
|     |            | • input low:   | 0...0.2...0.7 V      |
|     |            | • connected to switch transistor<br>pulled high to VBATT |                      |
| 19  | LSP        | Audio to HF/handset speaker                              |                      |
|     |            | • impedance min:   | 3 Ω                  |
|     |            | • power max:   | 4 W                  |
| 20  | Shield GND | Shielding  |                      |
| 21  | NC         | Not connected  |                      |
| 22  | NC         | Not connected  |                      |
| 23  | VBSW_1     | Switched VBATT supply for handset                        |                      |
|     |            | • for HS pin 1   |                      |
|     |            | • value:   | 10.8...13.2...15.6 V |
| 24  | AGND       | Analog GND   |                      |
| 25  | LSPGND     | HF speaker ground  |                      |

### SIM Card Reader

| Pin  | Name     | Description                    |                    |
|------|----------|--------------------------------|--------------------|
| 1    | GND      | Ground                         |                    |
| 2, 6 | VSIM     | SIM card reader supply voltage |                    |
|      |          | • voltage:                     | 4.5...4.65...4.8 V |
| 3    | SIMDATA  | Data for SIM card              |                    |
|      |          | • state "1":                   | 3.6...4.65...4.8 V |
|      |          | • state "0":                   | 0...0.2...0.7V     |
| 4    | SIMCLK   | Clock for SIM card             |                    |
|      |          | • state "1":                   | 3.6...4.65...4.8 V |
|      |          | • state "0":                   | 0...0.2...0.7 V    |
| 5    | SIMRESET | Reset for SIM card             |                    |
|      |          | • output high:                 | 3.6...4.65...4.8 V |
|      |          | • output low:                  | 0...0.2...0.7V     |
| 7    | CARDDET  | Signal to ASIC                 |                    |
|      |          | • card not present:            | 3.6...4.65...4.8 V |
|      |          | • card present:                | 0...0.2...0.7V     |

## Data Connector

| Pin   | Name  | Description   |                    |
|-------|-------|---|--------------------|
| 1, 9  | DGND  | Digital ground  |                    |
| 2     | MMODE | Minimum mode, input line Connect to DGND for normal operation. Connect to M2BUS before power-on when flash programming. |                    |
| 3     | AGND  | Analog ground   |                    |
| 4     | TDA   | Transmitted DBUS data to the data card.   |                    |
|       |       | • state "1":  | 3.6...4.65...4.8 V |
|       |       | • state "0":  | 0...0.2...0.7 V    |
| 5     | M2BUS | Serial bidirectional data and control between the phone and accessories.  |                    |
| 6     | RXD2  | Flash loading data from programmer  |                    |
|       |       | • input low level:  | 0...0.2...0.7 V    |
|       |       | • input high level:   | 3.6...4.65...4.8 V |
| 7     | TXD2  | Flash acknowledge data to programmer  |                    |
|       |       | • output low level:   | 0...0.2...0.7 V    |
|       |       | • output high level:  | 3.6...4.65...4.8 V |
| 8, 16 | NC    | No connection   |                    |
| 10    | NC    | No connection   |                    |
| 11    | DSYNC | DBUS data bit sync 8 kHz clock.   |                    |
|       |       | • high level:   | 3.6...4.65...4.8 V |
|       |       | • low level:  | 0...0.2...0.7 V    |
| 12    | RDA   | DBUS received data from data card.  |                    |
|       |       | • state "1":  | 3.6...4.65...4.8 V |
|       |       | • state "0":  | 0...0.2...0.7 V    |
| 13    | NC    | Not used.   |                    |
| 14    | VF    | Programming voltage for flash.  |                    |
|       |       | • value:  | 11.4...12...12.6 V |
| 15    | DCLK  | DBUS data 512 kHz clock.  |                    |
|       |       | • state "1":  | 3.6...4.65...4.8 V |
|       |       | • state "0":  | 0...0.2...0.7 V    |

## Internal Signals

| Symbol   | Description                         | Values             |
|----------|-------------------------------------|--------------------|
| SCLK     | Synthesizer clock                   |                    |
|          | • load impedance:                   | 10 kΩ              |
|          | • frequency:                        | 3.25 MHz           |
| SDATA    | Synthesizer data                    |                    |
|          | • load impedance:                   | 10 kΩ              |
|          | • data rate frequency:              | 3.25 MHz           |
| SENAR    | Synthesizer enable                  |                    |
|          | • PLL contr. disabled:              | 4.5...4.65...4.8 V |
|          | • PLL activated:                    | 0...0.2...0.7 V    |
|          | • current:                          | 50 μA              |
| SENAT    | Synthesizer enable                  |                    |
|          | • PLL contr. disabled:              | 4.5...4.65...4.8 V |
|          | • PLL activated:                    | 0...0.2...0.7 V    |
|          | • current:                          | 50 μA              |
| RXPWR    | RX supply voltage on/off            |                    |
|          | • RX supply voltage on:             | 4.5...4.65...4.8 V |
|          | • RX supply voltage off:            | 0...0.2...0.7 V    |
|          | • current:                          | 0.5 mA             |
| SYNTHPWR | Supply voltage on/off               |                    |
|          | • RF regulators on:                 | 4.5...4.65...4.8 V |
|          | • RF regulators off:                | 0...0.2...0.7 V    |
|          | • current:                          | 1.0 mA             |
| TXPWR    | TX supply voltage on/off            |                    |
|          | • TX supply voltage on:             | 4.5...4.65...4.8 V |
|          | • TX supply voltage off:            | 0...0.2...0.7 V    |
|          | • current:                          | 0.5 mA             |
| TXP      | TX enable                           |                    |
|          | • transmitter power enable:         | 4.5...4.65...4.8 V |
|          | • transmitter power disable:        | 0...0.2...0.7 V    |
| AFC      | Automatic frequency control voltage |                    |
|          | • voltage min/max:                  | 0.35...4.35 V      |
|          | • resolution:                       | 11 bits            |

| Symbol     | Description  | Values                            |
|------------|--|-----------------------------------|
|            | • load impedance (dynamic):                        | 10 k $\Omega$                     |
| TXC        | TX transmit power control voltage                  |                                   |
|            | • voltage range min/max:                           | 0.3...4.2 V                       |
|            | • impedance:                                       | 10 k $\Omega$                     |
| TXQP, TXQN | Differential TX quadrature signal                  |                                   |
|            | • differential voltage swing:                      | 1.15...1.2...1.25 V <sub>PP</sub> |
|            | • d.c. level:                                      | 2.30...2.35...2.40 V              |
|            | • load impedance:                                  | 30 k $\Omega$                     |
| TXIP, TXIN | Differential TX in phase signal                    |                                   |
|            | • differential voltage swing:                      | 1.15...1.2...1.25 V <sub>PP</sub> |
|            | • d.c. level:                                      | 2.30...2.35...2.40 V              |
|            | • load impedance:                                  | 30 k $\Omega$                     |
| PDATA0–5   | Parallel AGC data                                  |                                   |
|            | • reduced front end gain:                          | 4.5...4.65...4.8 V                |
|            | • normal front end gain:                           | 0...0.2...0.7 V                   |
|            | • current:   | 0.1 mA                            |
|            | • PDATA1; AGC 3 dB reduction                       |                                   |
|            | • PDATA2; AGC 6 dB reduction                       |                                   |
|            | • PDATA3; AGC 12 dB reduction                      |                                   |
|            | • PDATA4; AGC 24 dB reduction                      |                                   |
|            | • PDATA5; AGC 12 dB reduction                      |                                   |
| RXQ        | RX quadrature signal                               |                                   |
|            | • output level:                                    | 15 mV <sub>PP</sub>               |
|            | • source impedance:                                | 470 $\Omega$                      |
| RXI        | RX in phase signal                                 |                                   |
|            | • output level:                                    | 15 mV <sub>PP</sub>               |
|            | • source impedance:                                | 470 $\Omega$                      |
| RFC        | High stability clock signal for the logic circuits |                                   |
|            | • frequency:                                       | 26 MHz                            |
|            | • signal amplitude:                                | 1.0 V <sub>PP</sub>               |
|            | • load resistance:                                 | 10 k $\Omega$                     |

| Symbol    | Description                          | Values               |
|-----------|--------------------------------------|----------------------|
| VREF      | VCTCXO supply voltage                |                      |
|           | • voltage:                           | 4.55...4.65...4.75 V |
|           | • current:                           | 2.0 mA               |
| VBATT_RF  | Supply voltage for RF                |                      |
|           | • voltage:                           | 10.8...13.2...15.6 V |
| VBATT_I   | Supply voltage for the PA module     |                      |
|           | • voltage:                           | 10.8...13.2...15.6 V |
| 6V5_RF    | Supply voltage for 5 V regulators    |                      |
|           | • voltage:                           | 6.0...6.5...7.0 V    |
| 8V5_RX_TX | Supply voltage for BB                |                      |
|           | • voltage:                           | 7.5...8.3...8.7 V    |
| VAI       | 8.5 V regulator on/off               |                      |
|           | • logic high "1":                    | 4.7 V                |
|           | • logic low "0":                     | 0 V                  |
| PA_CO     | Power amplifier supply compensation  |                      |
|           | *Load Impedance                      | 1k2 Ohm              |
|           | *DC range (VBATT Supply Switched on) | 15.6–10.2 Vdc        |
| PA_ADJ    | Power control loop DC-ADJ            |                      |
|           | *Voltage range                       | 0.3...4.6 Vdc        |
|           | *Load Impedance                      | 10k Ohm              |

## Baseband Block Description


### General

The purpose of the baseband module is to control the phone, to process audio signals to and from the RF block and to and from the handset/handsfree transducers. The module also includes a SIM card reader and furnishes external data and control lines.

### Names of Functional Blocks

| Name  | Function                                    |
|-------|---|
| CTRLU | Control unit for phone                      |
| PWRU  | Power supply                                |
| DSPU  | Digital signal processing block             |
| AUDIO | Audio coding                                |
| ASIC  | D2CA GSM/PCN system ASIC; several functions |
| RFI   | RF baseband interface                       |

## Clocking Scheme

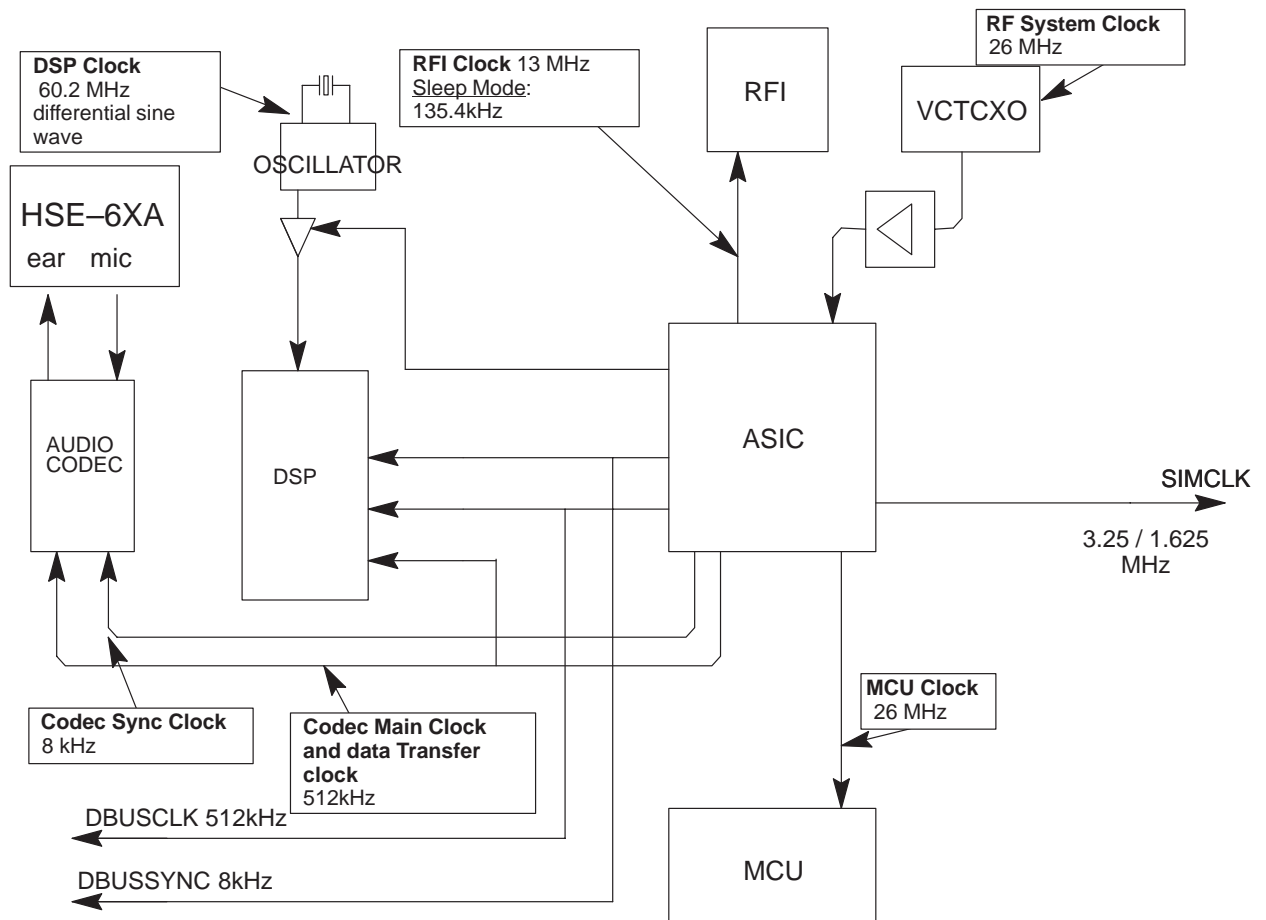

**Figure 1. Clocking Scheme**


Most of the clocks are generated from the 26 MHz VCTCXO frequency by the ASIC:

- 26 MHz clock for the MCU. MCU's internal clock frequency is half of that.
- 13 MHz for the RFI.
- The ASIC also generates 135.4 kHz sleep mode clock for the RFI
- 3.25 MHz clock for SIM. When there is no data transfer between the SIM card and the phone the clock can be reduced to 1.625 MHz. Some SIM cards also allows the clock to be stopped in that mode.
- 512 kHz main clock for the codec and for the data transfer between the DSP and the codec.
- 8 kHz synchronization clock for data transfer between the DSP and the codec.
- 512 kHz clock and 8 kHz sync. clock for the DBUS data transfer.

The DSP has its own crystal oscillator. The DSP uses differential sinusoidal clock. The frequency is 60.2 MHz. The DSP clock buffer can be powered down via ASIC. The ASIC MCU generates 8 kHz clock to the codec for the control data transfer.

In the idle mode all the clocks can be stopped except 26 MHz main clock coming from the VCTCXO. The VCTCXO signal is buffered to limit frequency pulling caused by the baseband circuits.

## Reset and Power Control

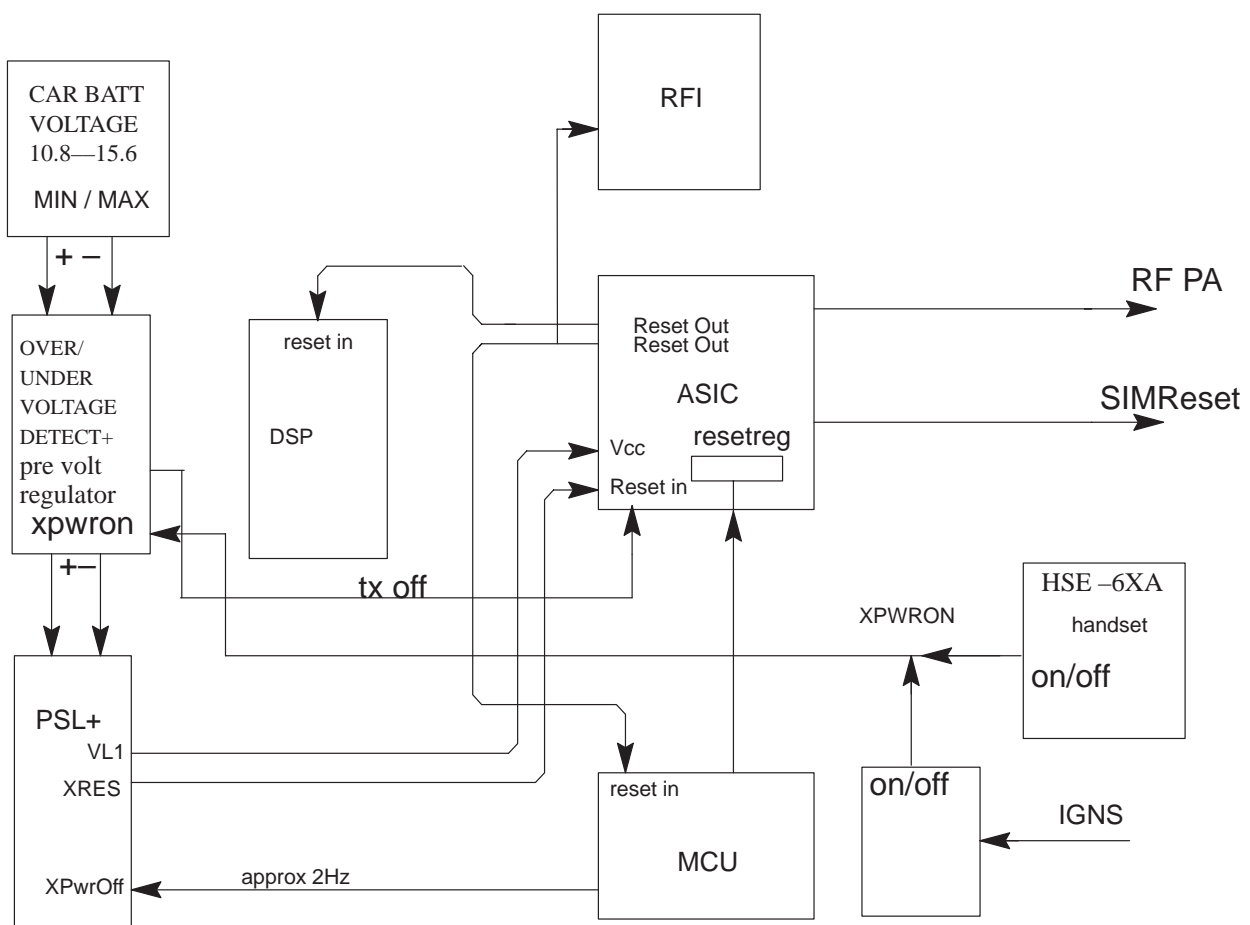

**Figure 2. Reset & Power Control**

There are two different ways to switch power on:

- Pushing the on/off button of the handset the effect of which is to ground the input pin XPWRON of the System Connector or
- Pulling the input IGNS high.



All devices are powered up at the same time. The PSL+ supplies the reset to the ASIC at power up. The ASIC start delivering clock signals the to the DSP and the MCU. After about 20  $\mu$ s the ASIC releases the resets to MCU, RFI and DSP. MCU and RFI reset is released after 256 13 MHz clock cycles. DSP reset release time from DSP clock activation can be selected from 0 to 255 13MHz clock cycles. In our case it is 255. SIM reset release time is according to GSM SIM specifications.


To turn off power for the phone, the user presses the on/off key (or turns off the ignition key of the car). The MCU detects this. The MCU cuts off any ongoing call, exits all tasks, acts inoperative to the user and stops the PSL+ watchdog without resets. After power-down delay, the PSL+ cuts off the supply from all circuitry.

When the IGNS line is connected the phone will turn on when this line goes high. The IGNS circuit pulls the XPWRON low for a approx. 200 msec as if the handset on/off button was being pushed.

The power may be turned off by sending a turn off command on the M2BUS from handset or through the Data Connector.

In the User Interface SW an automatic shutdown feature will be implemented. When no activity have been observed for a user settable period. the phone will turn off thus limiting the risk of draining the car battery.

### Watchdog System

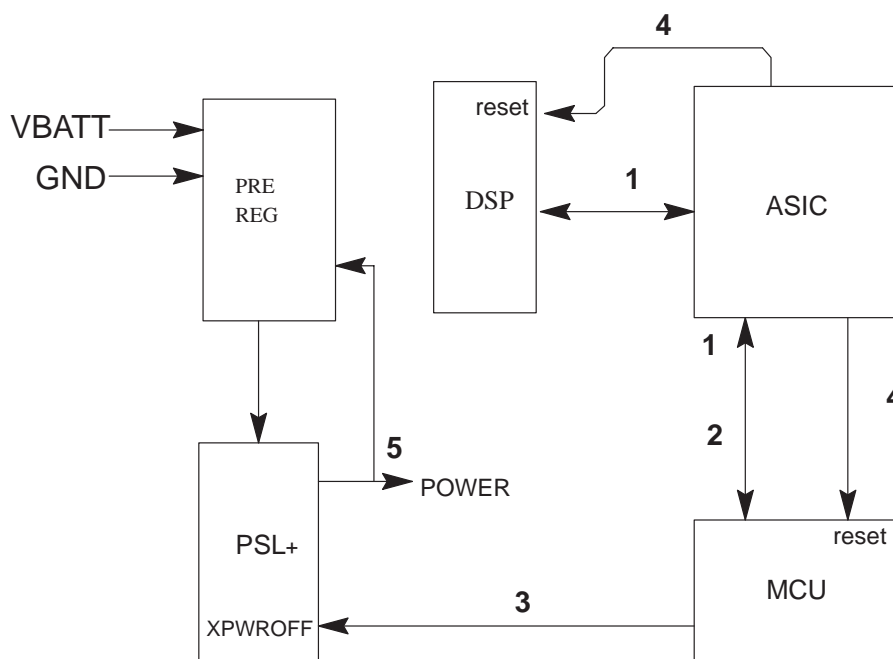

**Figure 3. Watchdog System**

Normal operation:

- 1. MCU tests DSP
- 2. MCU updates ASIC watchdog timer (> 2 Hz)
- 3. MCU pulses the XPWROFF input on the PSL+ (about 2 Hz)

Failed operation:

- 4. ASIC resets MCU and DSP after about 0.5 s failure
- 5. PSL+ switches power off about 1.5 s after the previous XPWROFF pulse

## **CTRLU**

The Control block contains a microcomputer unit (MCU) and three memory circuits (FLASH, SRAM, EEPROM), a 20-bit address bus and an 8-bit data bus.

Main Features of the CTRLU Block

MCU functions:

- system control
- communication control
- handset interface functions
- authentication
- RF monitoring
- power up/down control
- self-test and production testing
- flash loading

### **Main Components**

- Hitachi H8/536

H8/536 is a CMOS microcomputer unit (MCU) comprising a CPU core and on-chip supporting modules with 16-bit architecture. The data bus to outside world has 8 bits.

- 1024k\*8bit FLASH memory

100 ns maximum read access time

contains the main program code for the MCU; part of the DSP program code also located on FLASH

ASIC can address two 4 Mbit memories or one 8 Mbit memory.

- 32k\*8bit SRAM memory

100 ns maximum read access time

- 8k\*8bit EEPROM memory
  - 150 ns maximum read access time
  - contains user defined information
  - there is a register bit on the ASIC which must be set before the write operation to the EEPROM.

### Input Signals of CTRLU

| Name (from)    | Description   |
|----------------|---|
| VL1(PWRU)      | Power supply voltage for CTRLU block                |
| VREF(PWRU)     | Reference voltage for MCU A/D converter             |
| EROMSELX(ASIC) | Chip select for the EEPROM memory                   |
| ROMSELX(ASIC)  | Chip select for the FLASH memory                    |
| ROMAD18(ASIC)  | Chip select for the FLASH memory (FLASH1)           |
| RAMSELX(ASIC)  | Chip select for the SRAM memory                     |
| RESETX(ASIC)   | Reset signal for MCU                                |
| NMI(ASIC)      | Non-maskable interrupt request                      |
| MCUCLK(ASIC)   | Main clock for MCU                                  |
| IRQX(ASIC)     | Interrupt request                                   |
| PCMCDO(AUDIO)  | Audio codec control data receiving                  |
| TRF(RF)        | RF module temperature detection                     |
| VF(data conn.) | Programming voltage for FLASH memory                |
| RXD2           | The use of handsfree monitoring                     |
| (data conn.)   | FLASH programming data input on the production line |
| MMODE          | Minimum mode for FLASH programming                  |

### Output Signals of CTRLU

| Name (from)       | Description                                 |
|-------------------|---|
| XPWROFF(PWRU)     | Power off control, PSL+ watchdog reset      |
| WSTROBEX(ASIC)    | MCU write strobe                            |
| RSTROBEX(ASIC)    | MCU read strobe                             |
| MCUAD(19:0)(ASIC) | 20 bit MCU address bus                      |
| MBUSDET(ASIC)     | MBUS activity detection                     |
| PCMCLK(AUDIO)     | Clock for audio cedec control data transfer |
| PCMCDI(AUDIO)     | Audio codec control data transmitting       |
| XSELPCMC(AUDIO)   | Chip select for audio codec                 |
| TXD2              | Verification output of the programmed       |
| (data connector)  | data of FLASH during programming            |

### Bidirectional Signals of CTRLU

| Name (from)      | Description                  |
|------------------|------------------------------|
| MCUDA(7;0)(ASIC) | MCU's 8 bit data bus         |
| M2BUS            | Asynchronous serial data bus |

### Block Description

– MCU – memories

The MCU has a 20 bits wide address bus A(19:0) and an 8-bit data bus with memories. The address bits A(19:16) are used for chip select decoding. The decoding is done in the ESA ASIC. The ASIC can address two 4 Mbit (or smaller) or one 8 Mbit flash memories. Hitachi HD647536 processor has internal ROM and RAM memories.

– Flash programming

In flash programming a special flash programming box and a PC is needed. Loading is done through the 16 pole Data Connector of the mobile phone. First MCU goes to minimum mode (MBUS command from PC or if MBUS is connected to MMODE line during power up). Then the flash software is loaded from PC to flash loading box. When the loading is complete, flash loading to mobile can be started by MBUS command from PC to the MCU. After that the MCU asks the test box to start flash loading to mobile. The box supplies 12 V programming voltage for flash and starts to send 250 bytes data blocks to the MCU via RXD2 line. The baud rate is 406 kbit/s. The MCU calculates the check sum, sends acknowledge via TXD2 line and sends the data to flash. When all the data are loaded the mobile resets and tells the flash loading box if the loading was successful or not.

– CTRLU – PWRU

MCU controls the watchdog timer in PSL+. It sends a positive pulse at a rate of approximately 2 Hz to XPWROFF pin of the PSL+ to keep the power on. If MCU fails to deliver this pulse, the PSL+ will remove power from the system. When power off is requested by the user or by the MCU SW, (UI SW or CS SW), the MCU leaves the PSL+ watchdog without reset pulses. After the watchdog time has elapsed the PSL+ cuts off the supply voltages from the phone.

– CTRLU – ASIC

MCU and ASIC have a common 8-bit data bus and a 9-bit address bus. Bits A(4:0) are used for normal addressing whereas bits A(19:16) are decoded in ASIC to chip select inputs for CTRLU memories. ASIC controls the main clock, main reset and interrupts to MCU. The internal clock of MCU is half the MCUCLK clock speed. RESETX (produced by ASIC) resets everything in MCU except the contents of the RAM. IRQX is a general purpose interrupt request line from ASIC. After IRQX request the interrupt register of the ASIC is read to find out the reason for interrupt. NMI interrupt is used only to wake up MCU from software standby mode.

– CTRLU – DSPU

MCU and DSP communicate through the ASIC. ASIC has an MCU mailbox and a DSP mailbox. MCU writes data to DSP mailbox where DSP can only read the incoming data. In MCU mailbox the data transfer direction is the opposite. When power is switched on the MCU loads data from the Flash memory to the DSP's external program memory through this mailbox.

– CTRLU – AUDIO

When the the chip select signal XSELPCMC goes low, MCU writes or reads control data to or from the speech codec registers at the rate defined by PCMCLK. PCMCDI is an output data line from MCU to codec and PCMCDO is an input data line from codec to MCU. The data and control flows on separate serial busses.

– CTRLU – RF

MCU has internal 8 channel 10 bit AD converter. Following signals are used to monitor RF: TRF RF temperature (currently not in use)

– CTRLU – ACCESSORIES

M2BUS is used to control external accessories. This interface can also be used for factory testing and maintenance purposes.

– MINIMUM – MODE

This special mode can be reached through a M2BUS command or by connecting the pin MMODE of the Data Connector to the M2BUS while the phone is powered up.

## PWRU

The protection against overvoltage or wrong polarity on the supply lines is included in this block which further creates the supply voltages for the baseband block, for the RF synthesizer and switches the supply to the handset and audio power amplifier.

### Main Components

- Pre regulator  
Stabilizes the input supply voltage to 6.5 V for the PSL+ and supplies regulated power for RF module.
- PSL+ and ASIC  
Generates voltages for baseband and reset signal for the ASIC.  
Contains power on switch, supply voltage detector and watchdog.
- Supply voltage monitor  
Supervises the supply voltage within the specified Window.
- Power switch  
Switches on the supply voltage for the pre-regulator handset and audio power amplifier.

### Input Signals of PWRU

| Name (from)     | Description  |
|-----------------|--|
| XPWRON(handset) | Power on/off button of handset (or IGNS sense ON signal) |
| XPWROFF(CTRLU)  | Power off control, watchdog pulses from MCU              |
| VBATT(sys.conn) | Car battery voltage                                      |
| 8V5_RX_X(RF)    | Regulated voltage from RF module                         |
| IGNS(sys.conn.) | Ignition sense from car ignition key                     |

## Output Signals of PWRU

| Name (from)          | Description   |
|----------------------|---|
| XRES(ASIC)           | Master reset  |
| VL1(CTRLU,ASIC,RFI)  | Logic supply voltage  |
| VL2(DSPU)            | Logic supply voltage  |
| VA1(AUDIO,UIF)       | Analog supply voltage   |
| VA2(RFI)             | Analog supply voltage   |
| VREF(CTRLU,RF)       | Reference voltage 4.65 V $\pm$ 2 %  |
| VBATT_RF (RF; TX+RX) | Supply for RF regulators  |
| VBSW_I(data conn)    | VBATT switched for LF amplifier and for handset   |
| 6V5_RF               | Regulated supply of the baseband that supplies power to (RF synth,TX) a part of the RF module too |
| VBATT_I(RF PA)       | Battery voltage to RF PA, fused and protected against overvoltage                                 |
| VBDET(ASIC)          | Indicates VBATT is within window allowing transmission  |
| IGNDET(ASIC)         | Indicates logic level of ignition sense input line  |
| PAOFF(RF PA)         | Disables RF PA when supply voltage is outside the allowed window                                  |
| ANTC(sys.conn)       | Antenna control, current limited output that follows  |

## Block Description

The PSL+ IC produces the following regulated supply voltages:

- 2 \* VL     150 mA for logic
- VA1        40 mA for audios
- VA2        80 mA for RFI
- VREF       5 mA reference

In addition it has internal watchdog voltage detection. The watchdog will cut off output voltages if it is not reset once every 1.5 ( $\pm$ 0.75) second. The voltage detector resets the phone if the supply voltage falls below 6.4 V .

The IGNS input signal from the System Connector is low pass filtered to remove very short pulses and is then fed to a differentiation circuit which will turn the power on by pulling XPWRON low. The filtered IGNS is also fed to the ASIC allowing the MCU SW to monitor the actual logic state of this pin. The IGNS turn on pulse is in the order of 200 msec.

When the phone is off no part of the circuit is powered up. The phone can only be powered up by pushing the on/off button or pulling the IGNS line high.

When the on/off button is pushed the power FET turns the pre-regulator and PSL+ on. The PSL+ keeps the pre-regulator on. The IGNS circuit provides the same effect as pushing the on/off button.

The phone is turned off by pushing the on/off button. The handset transmits an off message to the MCU which will stop emitting watchdog pulses for the PSL+. The PSL+ times out and the phone turns off.

## DSPU

Main interfaces of the DSP:

- MCU via ASIC mailbox
- ASIC
- audio codec
- data bus interface (DBUS) for accessories
- digital audio interface (DAI) for type approval measurements

Main features of the DSP block:

- speech processing
  - speech coding/decoding
    - RPE-LTP-LPC (Regular pulse excitation long term prediction linear predictive coding)
  - voice activity detection (VAD) for discontinuous transmission (DTX)
  - comfort noise generation during silence
  - acoustic echo cancellation
- channel coding and transmission
  - block coding (with ASIC)
  - convolutional coding
  - interleaving
  - ciphering (with ASIC)
  - burst building and writing it to ASIC



- Reception
  - reading the A/D conversion results from ASIC
  - impulse response calculation
  - matched filtering
  - bit detection (with Viterbi on ASIC)
  - de-interleaving of soft decisions
  - convolutional decoding (with Viterbi)
  - block decoding (with ASIC)
- Adjacent cell monitoring
  - signal strength measurements
  - neighbor timing measurements
  - neighbor parameter reception
- control functions
  - RF controls
    - synthesizer control
    - power ramp programming
    - automatic gain control (AGC)
    - automatic frequency control (AFC)
  - frame structure control
    - controlling the operations during a TDMA frame  
(with ASIC)
    - controlling the multi-frame structure
    - channel configuration control
- test functions
  - functions for RF measurements
  - debugging functions for product development

### **Main Components of DSPU**

- AT&T DSP 1616–X11
  - Digital signal processor with 12 kword internal ROM
- Two 32k \*8 70 ns SRAMs for DSP external memory
- 60.2 MHz crystal oscillator to generate differential small signal clock for the DSP

### Input Signals of DSPU

| Name (from)           | Description                                   |
|-----------------------|---|
| VL1(PWRU)             | Logic supply voltage for DSP clock and buffer |
| VL2(PWRU)             | Logic supply voltage                          |
| DSPCLKEN(ASIC)        | Clock enable for DSP clock oscillator circuit |
| DSP1RSTX(ASIC)        | Reset for the DSP                             |
| PCMDATRCLKX           | PCM data input clock,                         |
| (ASIC)                | DBUS data output clock                        |
| CODEC_CLK             | PCM data output clock                         |
| PCMOUT(AUDIO)         | Received audio in PCM format                  |
| DBUSCLK               | DBUS data output clock                        |
| DBUSSYNC              | DBUS data bit sync clock                      |
| RDA(data conn.)       | DBUS received data                            |
| INT0, INT1(ASIC)      | Interrupts for the DSP                        |
| PCMCOSYCLKX<br>(ASIC) | PCM data bit sync clock                       |

### Output Signals of DSPU

| Name (from)       | Description                                       |
|-------------------|---|
| PCMIN(AUDIO)      | Transmitted audio in PCM format                   |
| IOX(ASIC)         | I/O enable, indicates access to DSP address space |
| RWX(ASIC)         | Read/write X                                      |
| DSPAD(16;9)(ASIC) | Address bus and control signals                   |
| DBUSDET(ASIC)     | RDA line for DBUS activity detection by ASIC      |
| TDA(data conn.)   | DBUS transmitted data                             |

### Bidirectional Signals of DSPU

| Name (from)       | Description     |
|-------------------|-----------------|
| DSPDA(15;0)(ASIC) | 16 bit data bus |

## Block Description of DSPU

The Control unit communicates with the DSP circuitry through a mailbox in the ESA ASIC. The part of the DSP SW that resides in external SRAM is loaded from Flash Prom is software is loaded through this mailbox at start up.

The DSP includes two serial busses. One is used for speech data transfer between the DSP and the codec. The other is used as an external data bus and it is connected to the Data Connector. This bus can be used by data accessories and also as a digital audio interface (DAI) in audio type approval measurements. The clocks (512 kHz main clock and 8 kHz sync. clock) are generated by the ASIC.

In transmit mode the DSP codes the speech and routes the resulting transmit slots to the ESA. The ESA ASIC controls timing, and at specified intervals sends these bits to the RFI for DA conversion.

In digital receive mode the RFI AD converts the IF signal from the RF unit under the control of the ESA. The DSP controls the ESA and receives the converted bits. After channel and speech decoding, bits are converted into an analog signal in the PCM codec, routed and fed to the earpiece/loudspeaker.

The DSP controls the RF module through the ESA ASIC, where all necessary timing functions are implemented, and control I/O lines are provided eg. for synthesizer loading.

The DSP emulator can be connected to DSP pins TCK, TMS, TDO, TDI, GND and VDD.

The DSP clock buffer can be turned off via a control pin on the ASIC to save current when the DSP clock is not needed.

## AUDIO

The AUDIO block consists of an audio codec , conditioning amplifiers for the audio inputs and outputs and a power amplifier for the external loudspeaker.

The codec contains microphone and earpiece amplifiers and all the necessary switches for signal routing. The codec is controlled by the MCU. The PCM data comes from and goes to the DSP.

The power amplifier drives the external loudspeaker for handsfree function, and a highpass filter removes unwanted low frequency noise picked up by the handsfree microphone.

### Main Components of AUDIO

- Class B amplifier built using an op amp and discrete power transistors.
- Audio codec ST5080
- Contains: PCM codec, audio routing switches, microphone and ear-piece amplifiers for 2 connections (internal and external devices) and DTMF generator.

High pass filter/amplifier for the handsfree microphone.

Power amplifier for the external handsfree loudspeaker.

### Input Signals of AUDIO

| Name (from)       | Description   |
|-------------------|---|
| VA1(PWRU)         | Analog supply voltage   |
| VBSW_1(PWRU)      | Switched VBATT supply for the pre-regulator power amplifier (and handset) |
| PCMIN(DSPU)       | Received audio in PCM format  |
| SYNC(ASIC)        | 8 kHz frame sync  |
| CODEC_CLK(ASIC)   | 512 kHz codec main clock  |
| PCMCDI(CTRLU)     | Audio codec control data  |
| PCMCLK(CTRLU)     | Clock for audio codec control data transfer                               |
| XSELPCMC (CTRLU)  | Audio codec chip select   |
| HFMIC(syst.conn.) | External microphone   |
| NOK_OEM(ASIC)     | Control line to set the mic sensitivity according to                      |
|                   | VDA recommendations   |
| MIC(syst.conn)    | Handset microphone  |

### Output Signals of AUDIO

| Name (to)       | Description                     |
|-----------------|---------------------------------|
| PCMOUT(DSPU)    | Transmitted audio in PCM format |
| PCMCDO(CTRLU)   | Audio codec control data        |
| EAR(syst.conn.) | Audio to handset                |
| LSP(syst.conn)  | Audio to handsfree loudspeaker  |

## Block Description of AUDIO

The handset microphone is connected to the codec through an attenuator.

The external handsfree microphone is DC-biased by approx. 8V. The handsfree mic signal is amplified and filtered and fed to the codec.

The gain of the ext. microphone input can be selected to one of two settings, one adjusted for the standard Nokia microphone and a less sensitive one adjusted for the VDA recommended sensitivity.

The microphone signal is A/D converted in the PCM codec (A-law) and delivered to the DSP.

Digital downlink signal from the DSP is fed to the D/A converter of the codec. After the conversion the signal is low pass filtered and fed to an attenuator operating as volume control and routing switches to direct it to the earpiece of the handset or the power amplifier for the loudspeaker.

There are 8 separate volume settings. They cover a range of 15 dB for the earpiece and a range of 31 dB for the handsfree speaker.

The audio codec communicates with the DSP (analog speech) through an SIO (signals: PCMIN, SYNC, CODEC\_CLK and PCMOUT) . The MCU controls the audio codec function through a separate serial bus (signals: PCMCD0, PCMCDI, PCMCLK and XSELPCMC). Gainsetting, routing , tone generation etc in the codec is controlled through writing to registers in the codec. The 512 kHz clock and 8 kHz sync signal are produced by the ASIC clock signals.

The codec generates DTMF tones (key beeps), ringing and warning tones etc. for the external speaker. Some tones come also from the network.

## ASIC

The ASIC takes care of the following functions :

- interface between MCU, DSP and RFI
- hardware accelerator functions to DSP SW
- clock generation, clock distribution and clock disable/enable
- RF controls
- Timers
- M2BUS and D-BUS detect and D-BUS clock and sync generation
- SIM interface
- Control inputs and outputs for the system connector.

### Main Components of ASIC

- ESA ASIC
- RFC buffer, a package of logic level inverters

### Input Signals of ASIC

| Name (from)             | Description   |
|-------------------------|---|
| VL1(PWRU)               | Logic supply voltage  |
| VL2(PWRU)               | Logic supply for SIM reader                                     |
| IOX(DSPU)               | I/O enable, indicates access to DSP address space               |
| RWX(DSPU)               | Read/write X  |
| WSTROBEX (CTRLU)        | MCU's write strobe  |
| RSTROBEX (CTRLU)        | MCU's read strobe   |
| RFC(RF)                 | Reference clock from VCTCXO                                     |
| XRES(PWRU)              | Master reset  |
| DSPAD(16;0)(DSPU)       | Address bus and control signals                                 |
| MCUAD(19;16,4;0)(CTRLU) | MCU's address bus   |
| DAX(RFI)                | Data acknowledge  |
| MBUSDET(CTRLU)          | MBUS activity detection   |
| DBUSDET(DSPU)           | DBUS activity detection   |
| IGNDET(PWRU)            | Logic level of IGNS   |
| VBDET(PWRU)             | Indicating VBATT is within window to allow transmission         |
| SIM_DETECT              | Logic signal indicating that a SIM card is present (SIM reader) |
| PAOFF(PWRU)             | Indicating that operation of the RF PA stage is disabled        |

### Output Signals of ASIC

| Name (to)          | Description                    |
|--------------------|--------------------------------|
| INT0,INT1(DSPU)    | Interrupts for DSP             |
| NMI(CTRLU)         | Not maskable interrupt request |
| IRQX(CTRLU)        | Interrupt request              |
| RESETX (CTRLU,RFI) | Master (power up) reset        |
| DSP1RSTX(DSPU)     | Reset for the DSP              |
| WRX(RFI)           | Write strobe                   |
| RDX(RFI)           | Read strobe                    |
| RFIAD(3;0)(RFI)    | RFI address bus                |
| SCLK(RF)           | Synthesizer load clock         |
| SDATA(RF)          | Synthesizer load data          |

| Name (to)               | Description  |
|-------------------------|--|
| SENAR(RF)               | Receiver synthesizer enable                        |
| SENAT(RF)               | Transmit synthesizer enable                        |
| RXPWR(RF)               | RX circuitry power enable                          |
| TXPWR(RF)               | TX circuitry power enable                          |
| SYNTHPWR(RF)            | Synthesizer circuitry power enable                 |
| TXP(RF)                 | Transmit enable                                    |
| MCUCLK(CTRLU)           | Main clock for MCU                                 |
| DSPCLKEN(DSPU)          | DSP clock circuit enable                           |
| RFICLK(RFI)             | RFI master clock                                   |
| RFI2CLK(RFI)            | RFI sleep clock                                    |
| CODEC_CLK (DSPU,AU-DIO) | PCM data clock                                     |
| PCMDATRCLKX             | Inverted PCM data clock, used as input clock for   |
| (DSPU)                  | codec and DBUS interface                           |
| SYNC(AUDIO)             | Bit sync clock                                     |
| PCMCOSYCLKX (DSPU)      | Bit sync clock, inverted                           |
| DCLK(DSPU)              | DBUS data clock                                    |
| DSYNC(DSPU)             | DBUS bit sync clock                                |
| SIMCLK(UIF)             | SIM data clock                                     |
| VSIM(UIF)               | SIM power control                                  |
| ROMSELX(CTRLU)          | Chip select for the FLASH memory                   |
| ROMAD18 (CTRLU)         | Chip select for the FLASH memory (FLASH1)          |
| EROMSELX (CTRLU)        | Chip select for the EEPROM memory                  |
| RAMSELX(CTRLU)          | Chip select for the SRAM memory                    |
| CRM(sys.conn)           | Car radio mute                                     |
| NOKIA_OEM (AUDIO)       | Set ext. mic. sensitivity to VDA recommended value |
| PA_ADJ                  | Power adjustment for RF PA.                        |
| EAL(sys.conn)           | External alert                                     |

## Bidirectional Signals of ASIC

| Name (from)       | Description          |
|-------------------|----------------------|
| DSPDA(15;0)(DSPU) | 16 bit data bus      |
| MCUDA(7;0)(CTRLU) | MCU's 8 bit data bus |
| RFIDA(11;0)(RFI)  | 12 bit data bus      |
| SIMDATA(UIF)      | Serial data to SIM   |

## Block Description of ASIC

PSL+ supplies the reset to the ASIC at power up. The ASIC starts the clocks to the DSP and the MCU. After about 20  $\mu$ S the ASIC releases the resets to all circuitry. MCU and RFI reset is released after 256 13 MHz clock cycles. DSP reset release time from DSP clock activation can be selected from 0 to 255 13 MHz clock cycles. In our case 255 is selected. SIM reset release time is according to GSM SIM specifications.

Two inverters buffers the 26MHz clock from the VCTCXO to the ASIC to minimize the effect on the clock signal caused by varying load on the clock. In the ASIC the clock is further buffered, divided and gated for the MCU, RFI, SIM. The ASIC. It also generates main and sync clocks for audio codec, DSP's SIOs and DBUS. The clock outputs can be disabled in order to save current when the clock is not needed. The DSP oscillator buffer can be turned off by the ASIC.

Interface to the MCU consists of 8 bit data bus ,5 bit lower address bus, 4 bit upper address bus, RSTRBEX, WSTROBEX, IRQX and NMI. ASIC is in the same memory space as MCU memories (memory mapped on the MCU). The ASIC generates chip select's from the address bits A16–19. There is also M2BUS detector, netfree counter and D–BUS detector in the ASIC. Netfree interrupt IRQX occurs if no activity is detected in M2BUS in about 3 ms. NMI is used to wake up the MCU from sleep mode.

MCU and DSP communicate through ASIC. ASIC has an MCU mailbox and a DSP mailbox. MCU writes data to DSP mailbox where DSP can only read the incoming data. In MCU mailbox the data transfer direction is the opposite. The size of the mailbox is 64 \* 8 bit.

The SIM interface is the electrical interface between the smart card used in the GSM and the MCU via the ASIC. ASIC converts the serial data received from the SIM to parallel data for MCU and converts parallel data from MCU to serial mode for the card. The SIM interface also takes care of the power up and down procedure to the card, frame and parity error checking. The communication between card and ASIC is asynchronous and half duplex. Four signals are used between the ASIC and the SIM card: SIMDATA, SIMCLK, SIMRESET and VSIM. The clock frequency is 3.25 MHz. When there is no data transfer between the SIM card and the



Mobile the clock can be reduced to 1.625 MHz. Some SIM cards also allows the clock to be stopped in that mode. Supply voltage VSIM can be switched off by the ASIC. The supply voltage is 4.65 V. The carddetect input on the ASIC is connected to the carddetect switch of the SIM reader and when the pin goes low (card not present) the ASIC will drive the SIM Interface down in a controlled and well specified manner. The carddetect switch is activated by the SIM-card and wil open/close while the contacts of the SIM card are engaged with the SIM reader.

The interface to the DSP consists of 6 bit address bus, 16 bit data bus, IOX and RWX lines. Data bus is latched using IOX, address bus is not. The ASIC also generates interrupt INT0 when an edge occurs in DBUS line (if the mask bit is off). INT1 is used as RX interrupt and as MFI modulator interrupt to the DSP.

The Viterbi block is used to perform GSM/PCN convolutional decoding and bit detection according to viterbi algorithm. It can be controlled and accessed thoroughly by the DSP.

Coder is used to perform block encoding, decoding, and ciphering according to GSM algorithm A5 (only A5 not A5-2).

The ASIC takes care of the interface between the DSP and the RFI: TX modulator, RX filter, TX and RX sample buffers and controlling state machine. The interface to RFI consists 12 bit data bus, 4 bit address bus, RDX and WRX. There is data acknowledge (DAX) from RFI to ASIC. Also in this block are the serial RF synthesizer interface (SCLK, SDAT) and the digital RF control signals (RXPWR, TXPWR, TXP, SYNTHPWR)

## **RFI**

The RFI block consists of the RFI ASIC and its reference voltage generator. This block is an interface between the RF and baseband sections. The RFI block has the following functions:

- Receive and A/D convert the I and Q signals delivered by the IF amplifier of the RF module
- Produce I and Q TX modulation signals through D/A conversion plus filtering
- Prepare the Automatic Frequency Control signal via D/A conversion
- Prepare TX power ramp TXC via D/A conversion
- Hold AGC setting data in a register

### **Main Components of RFI**

- RFI ASIC
- 4.096 V external voltage reference LM4040 for RFI

### Input Signals of RFI

| Name (from)      | Description             |
|------------------|-------------------------|
| VL1(PWRU)        | Logic supply voltage    |
| VA2(PWRU)        | Analog supply voltage   |
| RESETX(PWRU)     | Master (power up) reset |
| RFIAD(3;0)(ASIC) | RFI address bus         |
| RDX(ASIC)        | Read strobe             |
| WRX(ASIC)        | Write strobe            |
| RFICLK(ASIC)     | RFI master clock        |
| RFI2CLK(ASIC)    | RFI sleep clock         |
| RXQ(RF)          | RX quadrature signal    |
| RXI(RF)          | RX in phase signal      |

### Output Signals of RFI

| Name (to)      | Description   |
|----------------|---|
| DAX(ASIC)      | Data acknowledge  |
| AFC(RF)        | Automatic frequency control voltage                     |
| TXC(RF)        | TX transmit power control voltage                       |
| TXQP, TXQN(RF) | Differential TX quadrature signal                       |
| TXIP, TXIN(RF) | Differential TX in phase signal                         |
| PDATA(5;0)(RF) | Parallel AGC data for controlling the RF AGC amplifiers |
| VREF_2(PWRU)   | Reference used by VBATT window comparator               |

### Bidirectional Signals of RFI

| Name (to)         | Description     |
|-------------------|-----------------|
| RFIDA(11;0)(ASIC) | 12 bit data bus |

### Block Description of RFI

The RFI provides A/D conversion of the in-phase (RXI) and quadrature (RXQ) signals in the receive path. It has got 12 bit sigma-delta A/D converters and the sample rate is 541.667 kHz.

Analog transmit path includes 8 bit D/A converters to generate the in-phase (TXI) and quadrature (TXQ) signals. RFI has differential outputs for TXI and TXQ. The sample rate is 1.0833 MHz.

There is a 11 bit D/A converter for automatic frequency correction. The sample rate is 1.3542 kHz.

Power ramp is done with 10 bit D/A converter. The sample frequency is 1.0833 MHz.

Digital AGC control is done with PDATA outputs.

The RFI has 12 bit data bus to the ASIC. The registers in the RFI are accessed using 4 address bits. Control and clock signals are produced by the ASIC.

The RFI has external 4.096 V voltage reference.

## RF Block Description

The RF block carries out all the RF functions of the transceiver. The RF block works in GSM system.

### Regulators

There are three regulators in the RF unit. The 1'st regulator is used for the synthesizers. The 2'nd regulator is used for the receiver and the transmitter discrete circuits. The 3'rd regulator (8.3V) is used for the TX ramping circuit and RX amplifiers. The regulators reduce the car supply voltage to the fixed 5.0 V and 8.3 V. The receiver, synthesizer and transmitter circuits can be switched ON and OFF separately. Switching sequence timing depends on the operation mode of the phone.

### Power Distribution

All currents in the power distribution diagram (see RF Power Distribution Diagram) are values with the sub modules in "on" condition. Activity percentages in SPEECH mode are 22.5 % for RXPWR, 15.8 % for TXPWR and 100 % for SYNTHPWR. In IDLE mode, activities are 0.36 %, 0.0 % and 1.61 %, respectively. Switching of the supply voltage for each block is controlled independently, and for example TXPWR and RXPWR are not on, at the same time.

### Current Consumption

In the following table the RF current consumption can be seen with different status of the control signals. The VCTCXO is not included in the results.

| SYNTHP<br>WR: | RXPWR: | TXPWR: | TXP: | Typ load<br>current: | Notes:                         |
|---------------|--------|--------|------|----------------------|--------------------------------|
| L             | L      | L      | L    | 0.1 mA               | Leakage current                |
| H             | L      | L      | L    | 45 mA                | Synthesizers and VCTCXO active |
| H             | H      | L      | L    | 60 mA                | Receive mode                   |
| H             | L      | H      | H    | 4500 mA              | Transmission                   |

## Receiver

The received RF signal from the antenna is fed via a duplex filter to the receiver unit. The duplex filters receiver branch is a bandpass filter. The signal is amplified by a discrete low noise preamplifier. The gain of the amplifier is controlled by the AGC control line (PDATA0). The nominal gain of 15 dB is reduced in strong field conditions by about 30 dB. After the preamplifier the signal is filtered by a dielectric filter. The filter and the duplex filter rejects outband spurious signals coming from the antenna and spurious emissions coming from inside the receiver unit. After the filter a second LNA is placed in order to have enough gain before the mixer.

The received signal is down converted by a passive double balanced mixer. The first IF is 71 MHz.

The IF-signal is filtered using a SAW filter. This filter reject adjacent channels signal, intermodulation signals and the second mirror. The AGC dynamic range is split up in two amplifiers. First AGC-amplifier with maximum 45 dB, and second AGC-amplifier with maximum 12 dB gain. Last mentioned amplifier is integrated in the receiver IC. The 57 dB gain is regulated in 3 dB step, using AGC control line PDATA 1-4. The second IF center frequency is 13 MHz. The second IF mixer is integrated in the receiver IC. The 13 MHz filter is a cheap ceramic filter. Also this filter has adjacent channel and intermodulations rejection. Before the 13 MHz IF signal is A/D-converted, the signal is amplified and split up in two quadrature signals, using high and low pass filters.

## Duplex Filter

The duplex filter consists of two filters, RX and TX filter branch. The TX filter is a notch-filter and it rejects the noise power at the RX frequency band and TX harmonic signals. The RX filter (bandpass) rejects outband blocking and spurious signals coming from the antenna.

| Parameter              | Value TX    | Value RX    |
|------------------------|-------------|-------------|
| Center frequency:      | 902.5 Mhz   | 947.5 MHz   |
| Pass band width (BW):  | ±12.5 MHz   | ±12.5 MHz   |
| Insertion loss at BW:  | 1.5 dB max. | 2.6 dB max. |
| Ripple at BW:          | 1.2 dB max. | 1.5 dB max. |
| Terminating impedance: | 50 Ω        | 50 Ω        |
| V.S.W.R. at BW:        | 1.8 max.    | 1.8 max.    |
| TX attenuation:        |             |             |
| • 935...960 MHz        | 30 dB min.  |             |
| • 1780...1830 MHz      | 30 dB min.  |             |
| • 2670...2745 MHz      | 30 dB min.  |             |

| Parameter                | Value TX    | Value RX   |
|--------------------------|-------------|------------|
| RX attenuation:          |             |            |
| • D.C...915 MHz          |             | 35 dB min. |
| • 980...1031 MHz         |             | 23 dB min. |
| • 1870...1920 MHz        |             | 30 dB min. |
| • 2805...2880 MHz        |             | 15 dB min. |
| Permissible input power: | 8.0 W (avg) |            |

### Pre-Amplifier

The pre-amplifier amplifies the received signal coming from the antenna.

| Parameter                      | Value         |
|--------------------------------|---------------|
| Frequency band:                | 935...960 Mhz |
| Supply voltage (min/max):      | 7.65...9.35 V |
| Current consumption (max):     | 10 mA         |
| Insertion gain (min/typ):      | 14.5...15 dB  |
| Gain flatness:                 | ±0.5 dB       |
| Noise figure (max):            | 2.0 dB        |
| Reverse isolation (min):       | 15 dB         |
| Gain reduction PDATA0=1 (typ): | 35 dB         |
| IIP3: (min/typ):               | 0 dBm         |
| Input VSWR; Zo=50 Ω (max):     | 2.0           |
| Output VSWR; Zo=50 Ω (max):    | 2.0           |

### RX Interstage Filters

The RX interstage filter is a dielectric filter. The filter rejects the outband spurious and blocking signals coming from the antenna.

| Parameter                    | Value       |
|------------------------------|-------------|
| Terminating impedance:       | 50 Ω        |
| Operation temperature range: | -25...+85°C |
| Center frequency:            | 947.5 MHz   |
| Bandwidth (BW):              | ±12.5 MHz   |
| Insertion loss in BW (max):  | 2.0 dB      |
| Ripple at BW:                | 1.0 dB      |
| V.S.W.R. at BW:              | 1.8         |
| Attenuation                  |             |
| • D.C...890 MHz (min/max):   | 30...15 dB  |

| Parameter                    | Value       |
|------------------------------|-------------|
| • 890...915 MHz (min/max):   | 12...15 dB  |
| • 980...1031 MHz (min/max):  | 12...15 dB  |
| • 1077...1102 MHz (min/max): | 40...50 dB  |
| • 1870...1920 MHz (min/max): | 30...50 dB  |
| • 1941...2062 MHz (min/max): | 30...48 dB  |
| • 3015...3093 MHz (min/max): | 3.0...12 dB |

### Second LNA

This LAN adds gain before the mixer.

| Parameter                   | Value         |
|-----------------------------|---------------|
| Frequency band :            | 935...960 Mhz |
| Supply Voltage (min/max):   | 7.65...9.35V  |
| Current consumption (max) : | 14mA          |
| Insertion gain (typ)        | 8dB           |
| Gain Flatness:              | +/- 0.5dB     |
| Noise figure (max):         | 2.8dB         |
| IIP3 (typ):                 | 13dBm         |
| Input VSWR; Zo=50 (max)     | 2.0           |
| Output VSWR; Zo=50 (max)    | 2.0           |

### First Mixer

The first mixer is a passive single balanced mixer. The mixer down converts the received RF signal to the 1st IF signal, 71 MHz.

| Parameter                     | Value           |
|-------------------------------|-----------------|
| RX frequency range (min/max): | 935...960 Mhz   |
| LO frequency range (min/max): | 1006...1031 Mhz |
| IF range (typ):               | 71 Mhz          |
| Input intercept point, IIP3   | +10 dBm         |
| LO power level (min):         | 3 dBm           |
| Noise figure (typ):           | 7 dB, SSB       |
| Conversion gain (typ):        | -7 dB           |

### First IF Amplifier

The first IF amplifier is based on discrete components. It compensates for missing amplification in the frontend.

| Parameter                      | Value  |
|--------------------------------|--------|
| Supply voltage (min/typ/max):  | 8.5 V  |
| Current consumption (typ/max): | 20 mA  |
| Frequency range:               | 71 Mhz |
| Conversion gain (typ):         | 16 dB  |
| Noise figure (typ):            | 3 dB   |
| Input intercept point (typ):   | +3 dBm |
| Input compression point (typ): | 0 dBm  |
| Parameter                      | Value  |
| In/out matching (typ):         | 50 Ω   |

### First IF Filter

The channel selectivity of the receiver is split up in first and second IF filters. The 71 MHz filter is a low loss SAW filter from Siemens. The filter has single-ended input and balanced output.

| Parameter                         | Value                   |
|-----------------------------------|-------------------------|
| Center frequency:                 | 71 MHz                  |
| Operation temperature range:      | -20...+80 °C            |
| Input impedance:                  | 3.5 kΩ//6.9 pF balanced |
| Output impedance:                 | 3.4 kΩ//6.7 pF balanced |
| Insertion loss (nom/max):         | 11.5... 13.5 dB         |
| Group delay distortion (nom/max): | 700...1300 ns           |
| 2 dB bandwidth (min):             | ±80 kHz                 |
| 3 dB bandwidth (min):             | ±120 kHz                |
| ±200 kHz (min):                   | 0 dB                    |
| ±400 kHz (min):                   | 23 dB                   |
| ±600 kHz (min):                   | 36 dB                   |
| ±800 kHz (min):                   | 40 dB                   |
| ±1600 kHz (min):                  | 42 dB                   |
| Spurious rejection at fo-26 MHz:  | 60 dB                   |



### AGC Amplifier

The total dynamic AGC range for the receiver is 93 dB. The AGC amplifier from AT&T has 0...45 dB AGC gain. The gain step is adjusted in 3 dB step, using the interface lines data[1]–data[5].

| Parameter                  | Value                    |
|----------------------------|--------------------------|
| Supply voltage (min/max):  | 4.5...5.5 V              |
| Current consumption (max): | 16 mA                    |
| Frequency range (min/max): | 4...100 MHz, 3 dB cutoff |
| Amplifier gain (nom):      | 45 dB                    |

| Parameter                               | Value                    |
|---|--------------------------|
| Amplifier gain control range (min/max): | 0...45 dB                |
| AGC step size:                          | 3 dB                     |
| Noise figure:                           | 10 dB                    |
| Output intercept point (max):           | 10 dB                    |
| Absolute gain inaccuracy (max):         | ±0.5 dB over temp, range |
| Relative gain inaccuracy (max):         | ±0.3 dB                  |

### Receiver IF IC

The receiver integrated circuit is a semi–custom bipolar IC PMB2403 V1.4. The IC consist of the second IF mixer, 12 dB AGC amplifier and two dividers.

| AGC Amplifier + 2nd Mixer             | Value                    |
|---------------------------------------|--------------------------|
| Supply voltage (min/max):             | 4.5...5.5 V              |
| Supply current (max):                 | 31 mA                    |
| Input frequency range (min/max):      | 45...100 MHz             |
| Local freq. range of mixer (min/max): | 170...400 MHz            |
| Conversion gain (nom):                | 12 dB                    |
| Output compression point (min):       | 0.4 V <sub>PP</sub>      |
| AGC gain step (min/max):              | 0...12 dB                |
| Absolute gain inaccuracy (max):       | ±0.5 dB over temp. range |

| Dividers                         | Value         |
|----------------------------------|---------------|
| Input frequency range (min/max): | 180...400 MHz |
| Divider ratio (nom):             | 1/2/4         |
| Input power level (nom):         | -10 dBm       |
| Output power level (min):        | -5 dBm        |

### Second IF Filter

The second IF is a ceramic filter. This filter is inserted to obtain channel selectivity in the receiver.

| Parameter                        | Value         |
|----------------------------------|---------------|
| Terminating impedance (nom):     | 330 $\Omega$  |
| Operating temp. range (min/max): | -30...+85 °C  |
| Center frequency:                | 13 MHz        |
| 1 dB bandwidth (min):            | $\pm 90$ kHz  |
| 5 dB bandwidth (max):            | $\pm 220$ kHz |
| Insertion loss (max):            | 6 dB          |
| Group delay distortion (max):    | 1500 ns at BW |
| Parameter                        | Value         |

| Parameter                     | Value      |
|-------------------------------|------------|
| Attenuation                   |            |
| • fo $\pm 400$ kHz (min/nom): | 25...30 dB |
| • fo $\pm 600$ kHz (min/nom): | 40...45 dB |

### Second IF Amplifier

The second IF amplifier compensates for losses in the gain compensating network, and in the quadrature split.

| Parameter                | Value         |
|--------------------------|---------------|
| Supply voltage:          | 8.5 V         |
| Current consumption:     | 10 mA         |
| Frequency range:         | 13 MHz        |
| Conversion gain:         | 20 dB         |
| Noise figure:            | 3 dB          |
| Input intercept point:   | +3 dBm        |
| Input compression point: | 0 dBm         |
| Input impedance:         | 330 $\Omega$  |
| Output impedance:        | 1000 $\Omega$ |

## Phase Split

The phase splitter consists of two filters, a highpass and lowpass. The phase difference between the two output signals is 90 deg.

| Parameter                          | Value         |
|------------------------------------|---------------|
| Frequency:                         | <i>13 Mhz</i> |
| Imbalance amplitude (max):         | <i>1 dB</i>   |
| Imbalance phase (max):             | <i>2 deg</i>  |
| Attenuation from input RXI or RXQ: | <i>9 dB</i>   |
| Output impedance:                  | <i>470 Ω</i>  |

## Transmitter

The transmitter frequency is generated by mixing the buffered UHF VCO signal by the 116 MHz ( 232 MHz from the VHF VCO divided by 2). Reject the noise in the RX band from the modulator and PA Stage. The mixer is double balanced diode mixer, from the LO port, which is fed by the UHF signal. The final TX frequency is filtered before it is modulated in the modulator.

The TX signal is amplified and filtered before it feeds the integrated power amplifier with app. 8 dBm.

The interstage filters reject the unwanted mixer products, and together with the TX part of the duplex filter, reject the noise in the RX band from the modulator and the P/A.

The power amplifier delivers the transmitter output to the duplex filter, which rejects the harmonics and wideband noise in the RX band. Max output power at the antenna connector: 39dBm=8W

From the RF interface circuit (RFI), the power level and the up- and down ramping is controlled by the TXC signal. The amplitude of this signal, which has a raised cosine form, controls the power level from 13 dBm to 39 dBm. A directional coupler gives the feedback signal in the power control loop, to which the raised cosine is an external signal reference.

## Modulator Circuit

The modulator is a quadrature modulator IC PMB 2200 from Siemens. The RF signal is first doubled and then divided (with two) to get accurate 90 degrees phase shifted signals to the I/Q mixers. After mixing, the signals are combined and amplified. The balanced output is loaded and converted to single ended of a transformer, which also add some bandpass filtering.

| Parameter                     | Value                           |
|-------------------------------|---------------------------------|
| Supply voltage (min/max):     | 4.5...5.5 V                     |
| Supply current (typ/nom/max): | 32...40...48 mA, norm operation |
| Transmit frequency input      | Value                           |

Transmit frequency input:

| Parameter                       | Value         |
|---------------------------------|---------------|
| LO input frequency (min/max):   | 800...970 MHz |
| LO input power level (min/max): | -20...4 dBm   |

Modulator Inputs (I/Q):

| Parameter                                 | Value                    |
|---|--------------------------|
| Input bias current, balanced (max):       | 6.0...12 $\mu A$         |
| External d.c. reference (min/max):        | 2.1...2.6 V              |
| Differential input amplif. (min/typ/max): | 0.8...1.0...1.2 $V_{PP}$ |
| Differential offset voltage (typ/max):    | 1.0...3.0 mV             |
| Input impedance (min):                    | 70 k $\Omega$            |
| Gain unbalance (max):                     | 0.2 dB                   |

Modulator output:

| Parameter                               | Value                              |
|---|------------------------------------|
| Available RF power (min/max):           | -9...-3 dBm, $Z_{LOAD}=200 \Omega$ |
| Available saturated RF power (min/typ): | -5...0 dBm, $Z_{IL}=50 k\Omega$    |
| Suppression of 3rd order prods (min):   | 42 dB                              |
| Single sideband suppression:            | 40 dB                              |

### Up Conversion Mixer

The mixer is a double balanced diode mixer. The local signal coming from the UHF synthesizer is balanced. The RF signal a on 116 MHz is the output from the VHF PLL divided by two in the RX IC.

| Parameter                     | Value           |
|-------------------------------|-----------------|
| Input frequency:              | 116 MHz         |
| LO frequency range (min/max): | 1006...1031 MHz |
| TX frequency range (min/max): | 890...915 MHz   |
| Conversion loss (nom/max):    | 10...12 dB      |
| IIP3 (min):                   | 3.0 dBm         |
| LO – RF isolation (min):      | 20 dB           |
| LO power level (max):         | 6.0 dBm         |

## TX Interstage Filters

The TX interstage filters reject other signals than the final TX frequency from the mixer products. After the modulator they also they also reject the wideband noise from this circuit. Here only the dielectric filter is described. The other filter is realized with discrete components after the mixer.

| Parameter                        | Value        |
|----------------------------------|--------------|
| Terminating impedance:           | 50 Ω         |
| Operating temp. range (min/max): | -25...+85 °C |
| Center frequency:                | 902.5 MHz    |
| Bandwidth BW (min):              | ±12.5 MHz    |
| Insertion loss at BW (nom/max):  | 2.3...3.0 dB |
| Ripple at BW (nom/max):          | 0.5...1.0 dB |
| V.S.W.R. at BW (nom/max):        | 1.7...2.0 dB |
| Attenuation (min/typ)            |              |
| • DC...800 MHz:                  | 30...49 dB   |
| • 935...960 MHz:                 | 12...18 dB   |
| • 1006...1031 MHz:               | 30...48 dB   |
| • 1032...3000 MHz:               | 3...16 dB    |

## TX Amplifiers

The TX amplifier are bipolar transistor amplifiers. They amplifies the filtered TX signal coming from the down conversion mixer.

| TX Amplifier 1 Parameters   | Value         |
|-----------------------------|---------------|
| Operation frequency range:  | 890...915 MHz |
| Supply voltage:             | 5.0 V         |
| Current consumption (nom):  | 15 mA         |
| Gain (min):                 | 11.0 dB       |
| Noise figure (max):         | 3.5 dB        |
| Input VSWR, Zo=50 Ω (max):  | 2.0           |
| Output VSWR, Zo=50 Ω (max): | 2.0           |

| TX Amplifier 2 Parameters  | Value         |
|----------------------------|---------------|
| Operation frequency range: | 890...915 MHz |
| Supply voltage:            | 5.0 V         |
| Current consumption (nom): | 17 mA         |
| Gain (min):                | 11.0 dB       |

| TX Amplifier 2 Parameters                | Value  |
|--|--------|
| Noise figure (max):                      | 3.5 dB |
| Input VSWR, Z <sub>o</sub> =50 Ω (max):  | 2.0    |
| Output VSWR, Z <sub>o</sub> =50 Ω (max): | 2.0    |

### Power Amplifier

The power amplifier is a 3 stage MOS FET integrated module. The device amplifies the TX signal to the desired output level. Nominal operation voltage is 12.5 volt.

| Parameters                                     | Value                                   |
|--|---|
| D.C. supply voltage max:                       | 17 V                                    |
| Current consumption:                           | 6.0 A                                   |
| Operating frequency range:                     | 890...915 MHz                           |
| Operating case temp. range:                    | -30...+110 °C                           |
| Output power (min):                            | 42.3 dBm, normal cond.                  |
| Output power (min):                            | 39.5 dBm, extreme cond.                 |
| Input power (min/max):                         | 3...13 dBm                              |
| Efficiency P <sub>O</sub> =33.5 dBm (min/nom): | 30...35 %                               |
| Input VSWR Z <sub>O</sub> =50 Ω (nom/max):     | 2...3                                   |
| Harmonics (nom/max)                            |   |
| • 2 F <sub>O</sub> :                           | -50...-40 dBc, P <sub>O</sub> =41.1 dBm |
| • 3,4,5 F <sub>O</sub> :                       | -55...-45 dBc, P <sub>O</sub> =41.1 dBm |

### Power Control Circuitry

The power control circuit consists of a power detector, a differential control circuit and a level convert circuit, of which the latter is the interface between the TXC signal from the RFI and the power amplifier control signal. The differential control circuit compares the voltage from the power detector with the TXC signal which has a raised cosine form.

The TX power is controlled in two 'modes'. From the off condition, with an output below -36 dBm, to an output of app. 0 dBm the power amplifier is controlled in an open loop mode. Between app. 0 dBm to the final level, the up- and down ramping is controlled in a closed loop mode.

| Parameters                              | Value       |
|---|-------------|
| Positive supply voltage:                | 8.3 V       |
| Power control range close loop:         | 40 dB       |
| Dynamic range of PA from V cont. (min): | 80 dB       |
| Input control voltage range (min/max):  | 0.3...4.2 V |
| Output control voltage range (min/max): | 0.5...7 V   |

## Frequency Synthesizers

The stable frequency source for the synthesizers and baseband circuits is the voltage controlled temperature compensated crystal oscillator, VCTCXO. The frequency of the VCTCXO is 26 MHz. The frequency of the oscillator is controlled by an AFC voltage, which is generated by the baseband circuits.

The operating frequency range of the UHF synthesizer is from 1006 to 1031 MHz. The UHF VCO is implemented as a module. The UHF synthesizer generates the down conversion signal for the receiver and the up conversion signal for the transmitter.

The operating frequency of the VHF VCO is 232 MHz. This signal is divided by two in the receiver IC and feed back to the PLL circuit. This 116 MHz signal is used in the transmitter mixer and also in the receiver IC, where the signal ones more is divided by two and used in the second mixer of the receiver.

## VCTCXO

The VCTCXO is a module operating at 26 MHz. The 26 MHz signal is used as a reference frequency of the synthesizers and as the clock frequency for the base band circuits.

| Parameters                    | Value                                  |
|-------------------------------|--|
| Operating temperature range:  | -25...+75 °C                           |
| Supply voltage (min/typ/max): | 4.6...4.7...4.9 V                      |
| Supply current (max):         | 2.0 mA                                 |
| Output frequency (nom):       | 26 MHz                                 |
| Output level (min):           | 1.0 V <sub>PP</sub> , clipped sinewave |

| Parameters          | Value                  |
|---------------------|------------------------|
| Harmonics (max):    | -5 dBc                 |
| Load (nom):         | 10 kΩ/10 pF            |
| Frequency stability |                        |
| • temperature:      | ±5.0 ppm, -25...+75 °C |



| Parameters                       | Value   |
|----------------------------------|---|
| • supply voltage:                | $\pm 0.3 \text{ ppm}$ , $4.7 \text{ V} \pm 5 \%$                      |
| • load:                          | $\pm 0.3 \text{ ppm}$ , $\text{load} \pm 10 \%$                       |
| • aging:                         | $\pm 1.0 \text{ ppm}$ , <i>year</i>                                   |
| Nominal voltage for center freq: | $2.35 \text{ V}$  |
| Frequency control (min/max):     | $\pm 8 \dots \pm 17 \text{ ppm}$ , $2.35 \text{ V} \pm 1.5 \text{ V}$ |
| Control sensitivity (max):       | $\pm 11 \text{ ppm}$ , $V$  |
| Frequency tolerance (max):       | $\pm 15 \text{ ppm}$ , $V_C = 2.35 \text{ V}$                         |
| Frequency adjustment (min):      | $\pm 3.0 \text{ ppm}$ , <i>by internal trimmer</i>                    |

### VHF PLL

The VHF PLL consists of the VHF VCO, PLL integrated circuit and loop filter. The output signal, divided by 10, is used for the 2nd mixer of the receiver and for the I/Q modulator of the transmitter.

| Parameters                       | Value                                   |
|----------------------------------|---|
| Start up setting time (max):     | $2.0 \text{ ms}$                        |
| Phase error (nom/max):           | $0.3 \dots 1 \text{ deg.}$ , <i>rms</i> |
| $f_0 \pm 200 \text{ kHz}$ (max): | $-33 \text{ dBc}$                       |
| $f_0 \pm 400 \text{ kHz}$ (max): | $-63 \text{ dBc}$                       |
| $f_0 \pm 600 \text{ kHz}$ (max): | $-78 \text{ dBc}$                       |
| $f_0 \pm 800 \text{ kHz}$ (max): | $-78 \text{ dBc}$                       |
| $f_0 \pm 1.6 \text{ MHz}$ (max): | $-84 \text{ dBc}$                       |
| $f_0 \pm 3.0 \text{ MHz}$ (max): | $-84 \text{ dBc}$                       |

### VHF VCO

The VHF VCO uses a bipolar transistor as a active element and a combination of a chip coil and varactor diode as a resonance circuit.

| Parameters                         | Value                                |
|------------------------------------|--------------------------------------|
| Supply voltage (min/typ/max):      | $4.2 \dots 4.9 \dots 5.0 \text{ V}$  |
| Control voltage (min/max):         | $1.0 \dots 2.9 \dots 4.0 \text{ V}$  |
| Supply current (typ/max):          | $6.0 \dots 8.0 \text{ mA}$           |
| Operation frequency (typ):         | $232 \text{ MHz}$                    |
| Output power level (min/typ/max):  | $-15 \dots -10 \dots -5 \text{ dBm}$ |
| Control voltage sensitivity (typ): | $9 \text{ MHz/V}$                    |
| Phase noise (max)                  |                                      |
| • $f_0 \pm 200 \text{ kHz}$        | $-75 \text{ dB}$                     |

| Parameters                 | Value                                      |
|----------------------------|--|
| • fo ±400 kHz              | -105 dB                                    |
| • fo ±600 kHz              | -117 dB                                    |
| • fo ±800 kHz              | -122 dB                                    |
| • fo ±1.6 MHz              | -132 dB                                    |
| • fo ±3.0 MHz              | -132 dB                                    |
| Pulling figure (max):      | ±1.0 MHz, VSWR<2 any phase                 |
| Pushing figure (max):      | ±1.0 MHz/V                                 |
| Frequency stability (max): | ±1.0 MHz, over temp. range<br>-20...+75 °C |
| Harmonics (max):           | -5 dBc                                     |
| Spurious (max):            | -65 dBc                                    |

### UHF Synthesizer

The UHF Synthesizer consists of a UHF VCO module, synthesizer IC and a loop filter. The output signal is used for the 1st mixer of the receiver and the mixer of the transmitter.

| Parameters                   | Value         |
|------------------------------|---------------|
| Start up setting time (max): | 2.0 ms        |
| Settling time (max):         | 800 μs        |
| Phase error (max):           | 3.0 deg., rms |
| Sidebands (max)              |               |
| • ±200 kHz:                  | -30 dBc       |
| • ±400 kHz:                  | -60 dBc       |
| • ±600 kHz:                  | -75 dBc       |
| • ±800 kHz:                  | -77 dBc       |
| • 1.6 MHz:                   | -87 dBc       |
| • >3.0 MHz:                  | -87 dBc       |

### UHF VCO

The UHF VCO is a module which includes an output amplifier, too.

| Parameters                    | Value                          |
|-------------------------------|--------------------------------|
| Supply voltage (min/typ/max): | 4.5...4.75...5.0 V             |
| Control voltage (min/max):    | 0.5...4.25 V                   |
| Supply current (max):         | 10.0 mA                        |
| Operation frequency range:    | 1006...1031 MHz, 0.5<Vc<4.25 V |

| Parameters                               | Value                      |
|--|----------------------------|
| Output power level:                      | > 6 dBm                    |
| Control volt. sensitivity (min/typ/max): | 10...13...16 MHz/V AG      |
| Phase noise (max)                        |                            |
| • fo ±200 kHz:                           | -110 dBc/Hz                |
| • fo ±600 kHz:                           | -126 dBc/Hz                |
| • fo ±800 kHz:                           | -131 dBc/Hz                |
| • fo ±1.6 MHz:                           | -141 dBc/Hz                |
| • fo ±3.0 MHz:                           | -141 dBc/Hz                |
| Pulling figure (max):                    | ±1.0 MHz, VSWR<2 any phase |
| Pushing figure (max):                    | ±1.0 MHz/V                 |
| Frequency stability (max):               | ±2.0 MHz, over temp. range |
|  | -20...+75 °C               |
| Harmonics (max):                         | -15 dBc                    |
| Spurious (max):                          | -65 dBc                    |

### UHF VCO Buffer

The buffer amplifies the UHF VCO signal. The VCO output signal is divided into the 1st mixer of the receiver and the down conversion mixer of the transmitter. There is one buffer for TX and one buffer for RX.

| Parameters            | Value           |
|-----------------------|-----------------|
| Supply voltage (typ): | 4.5 V           |
| Supply current (typ): | 15 mA           |
| Frequency range:      | 1006...1031 MHz |
| Input power (typ):    | -2 dBm          |
| Output power (typ):   | +6 dBm          |
| Harmonics (max):      | -10 dBc         |

### PLL Circuit

The PLL is a high speed C-MOS IC. The circuit is used in the VHF-PLL and in the UHF synthesizer.

| Parameters                         | Value                           |
|------------------------------------|---------------------------------|
| Supply voltage (min/max):          | 3.0...5.5 V                     |
| Supply current (typ):              | 3.5 mA                          |
| Input frequency single mode (max): | 220 MHz, V <sub>DD</sub> =4.5 V |
| Input reference dual mode (max):   | 65 MHz, V <sub>DD</sub> =4.5 V  |

| Parameters                               | Value                   |
|--|-------------------------|
| Input reference frequency (max):         | 5 MHz, $V_{DD} = 4.5 V$ |
| Clocking frequency (max):                | 5 MHz                   |
| Reference input voltage (min):           | 100 mV <sub>RMS</sub>   |
| Input signal voltage, dual mode (min):   | 180 mV <sub>RMS</sub>   |
| Input signal voltage, single mode (min): | 100 mV <sub>RMS</sub>   |
| Phase detector output curr. (min/max):   | -6...+6 %               |
| Phase detector output volt. (min/max):   | 0.5... $V_{DD}-0.5 V$   |

### Prescaler

The dual modulus prescaler divide the the UHF VCO signal for the PLL circuit. The dividing ratios used is 64 and 65. Two different types, PMB2312 and SA701D, can be used.

| PMB2312 parameters               | Value                          |
|----------------------------------|--------------------------------|
| Supply voltage (min/max):        | 4.5...5.5 V                    |
| Supply current (max):            | 8 mA                           |
| Divide rations (min/max):        | 64/65...128/129 (64/65 in use) |
| Toggle frequency (max):          | 1100 MHz                       |
| Output voltage swing (min):      | 1.0 V <sub>PP</sub>            |
| Input voltage sensitivity (min): | 25 mV <sub>RMS</sub> =1000 MHz |

| SA701D parameters                | Value                                  |
|----------------------------------|--|
| Supply voltage (min/max):        | 2.7...6.0 V                            |
| Supply current (max):            | 4.6 mA                                 |
| Divide rations (min/max):        | 64/65...128/129 (64/65 in use)         |
| Toggle frequency (max):          | 1100 MHz                               |
| Output voltage swing (min):      | 1.6 V <sub>PP</sub> ( $V_{CC}=5.0 V$ ) |
| Input voltage sensitivity (min): | 50 mV <sub>PP</sub> =1000 MHz          |



## Power Distribution Diagram of Baseband

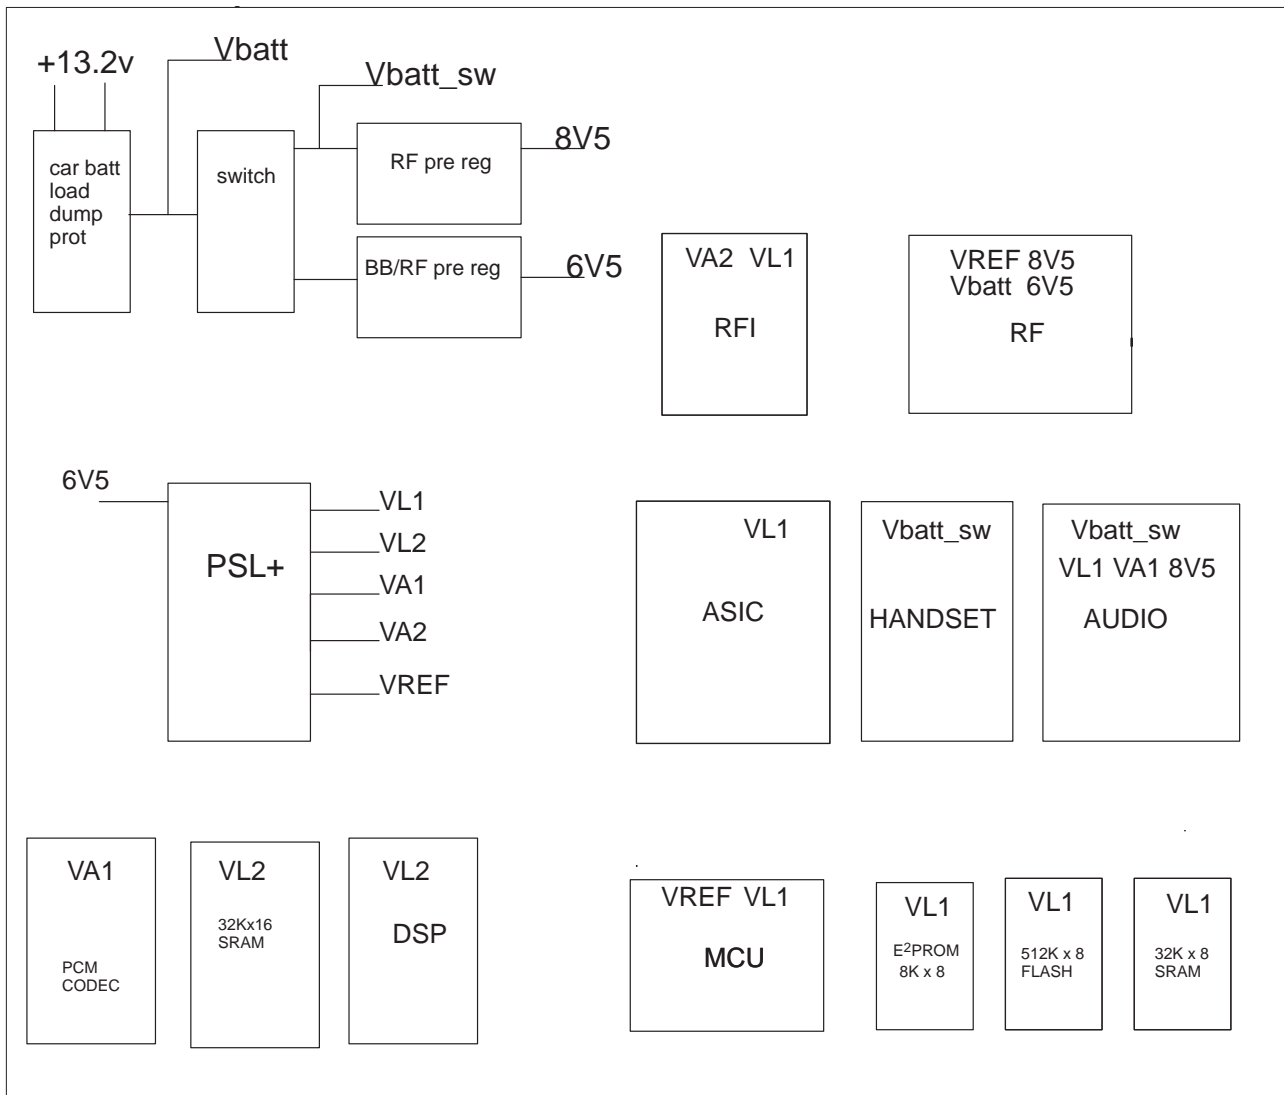


Figure 5. Power Distribution – Baseband

# Block Diagram of RF

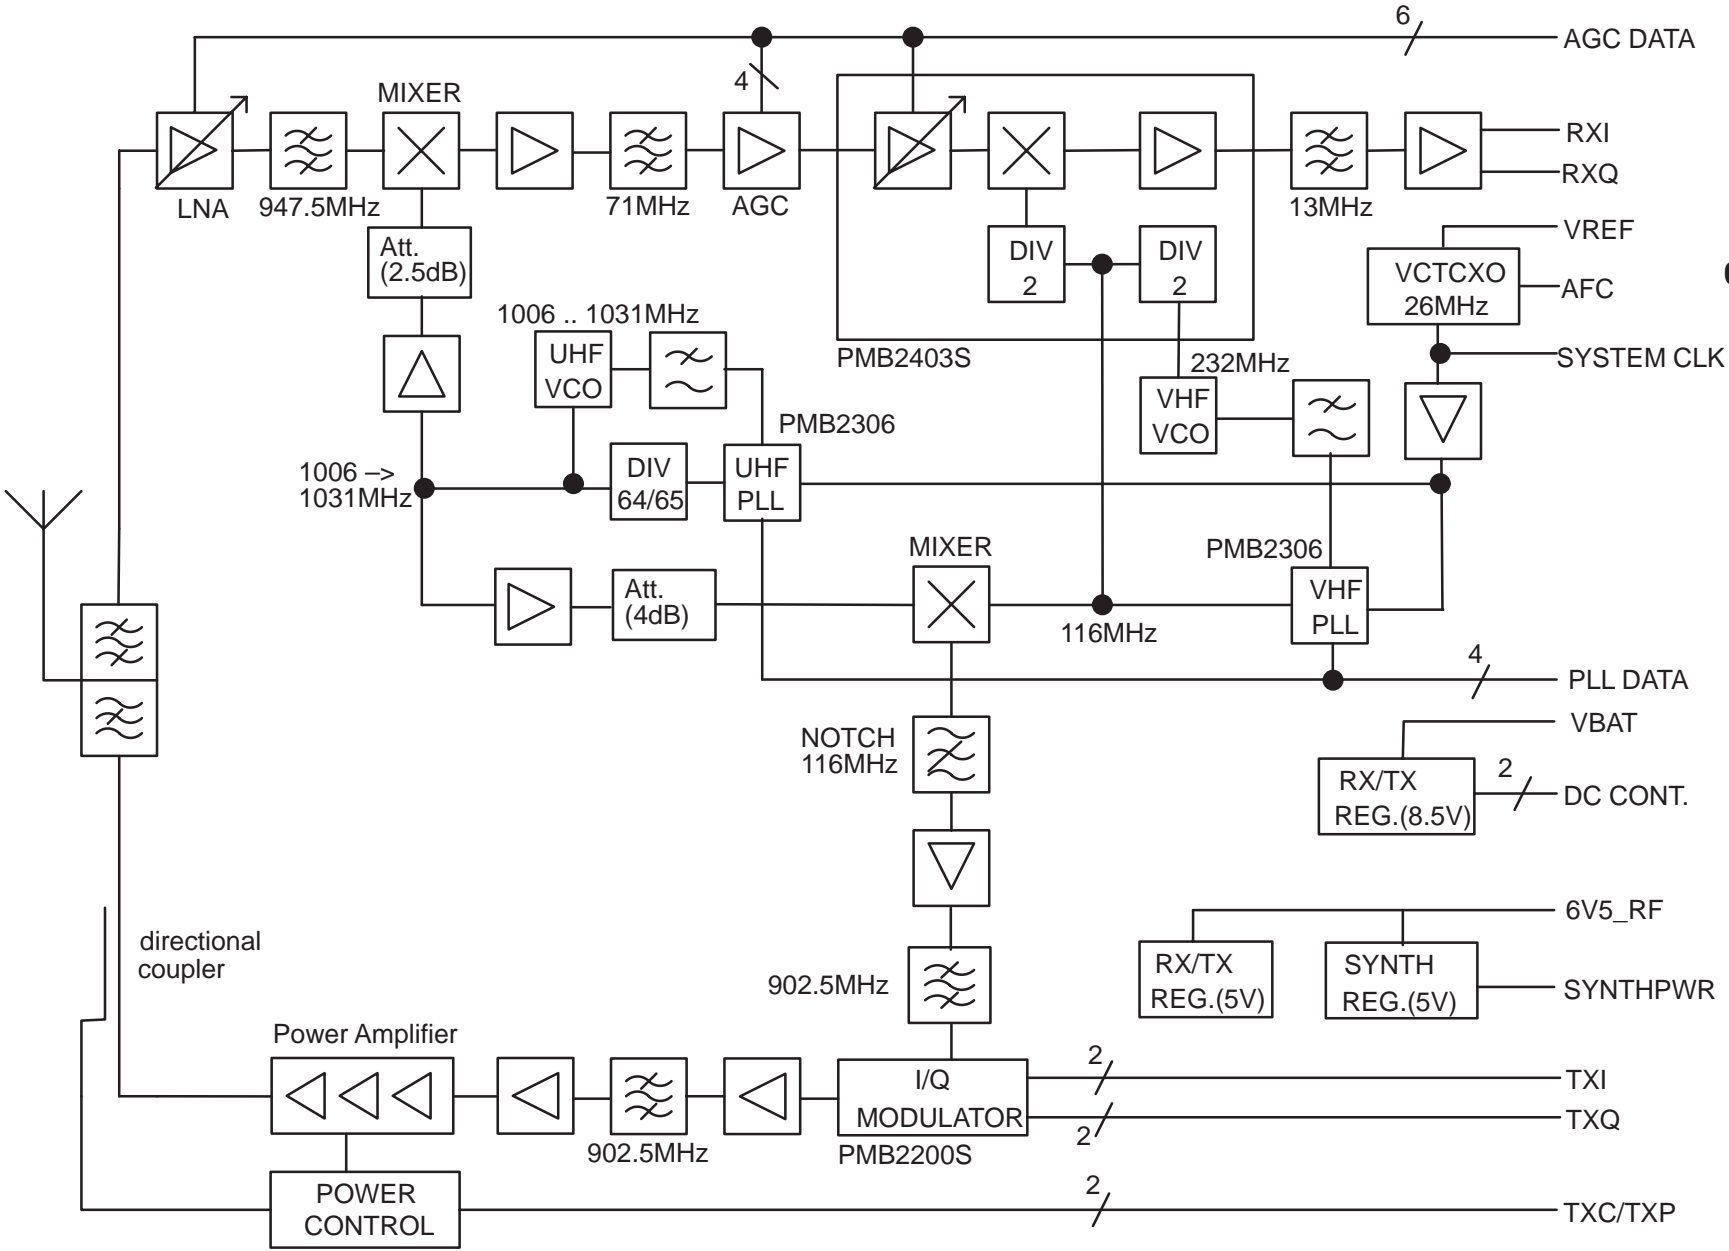


Figure 6. RF Blockdiagram.

## Power Distribution Diagram of RF

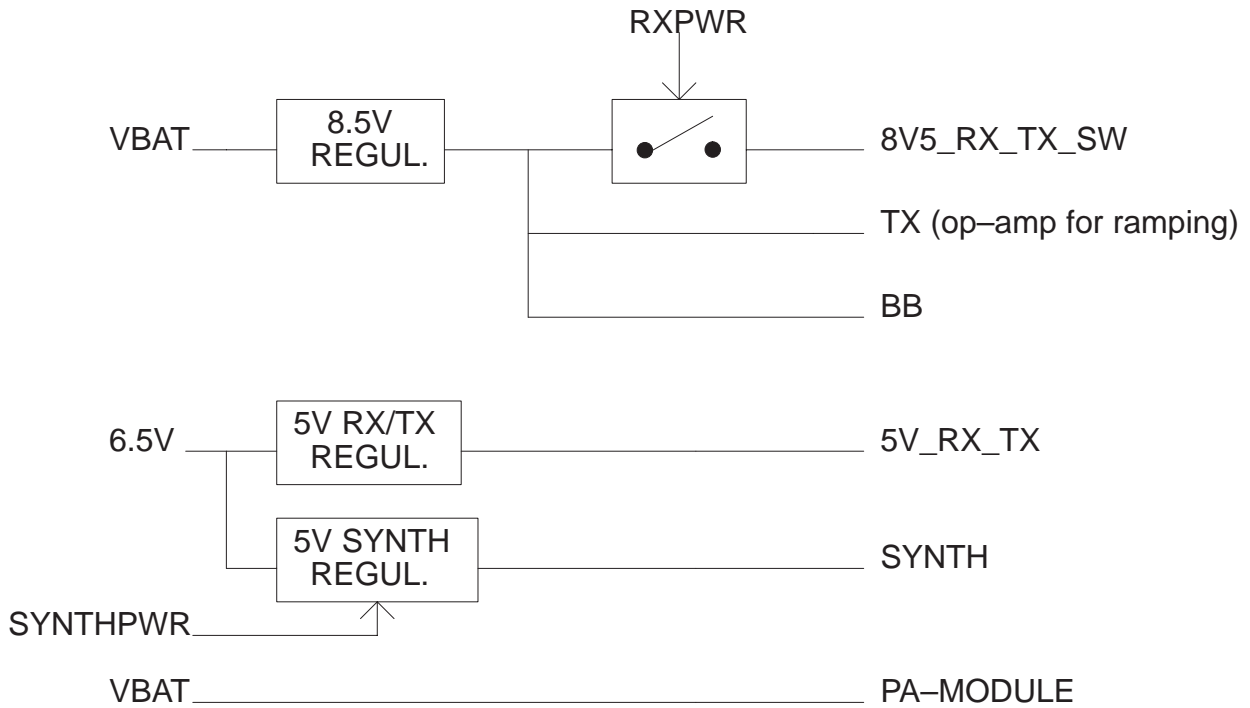


Figure 7. Power Distribution – RF



## Interconnections – RF and BB

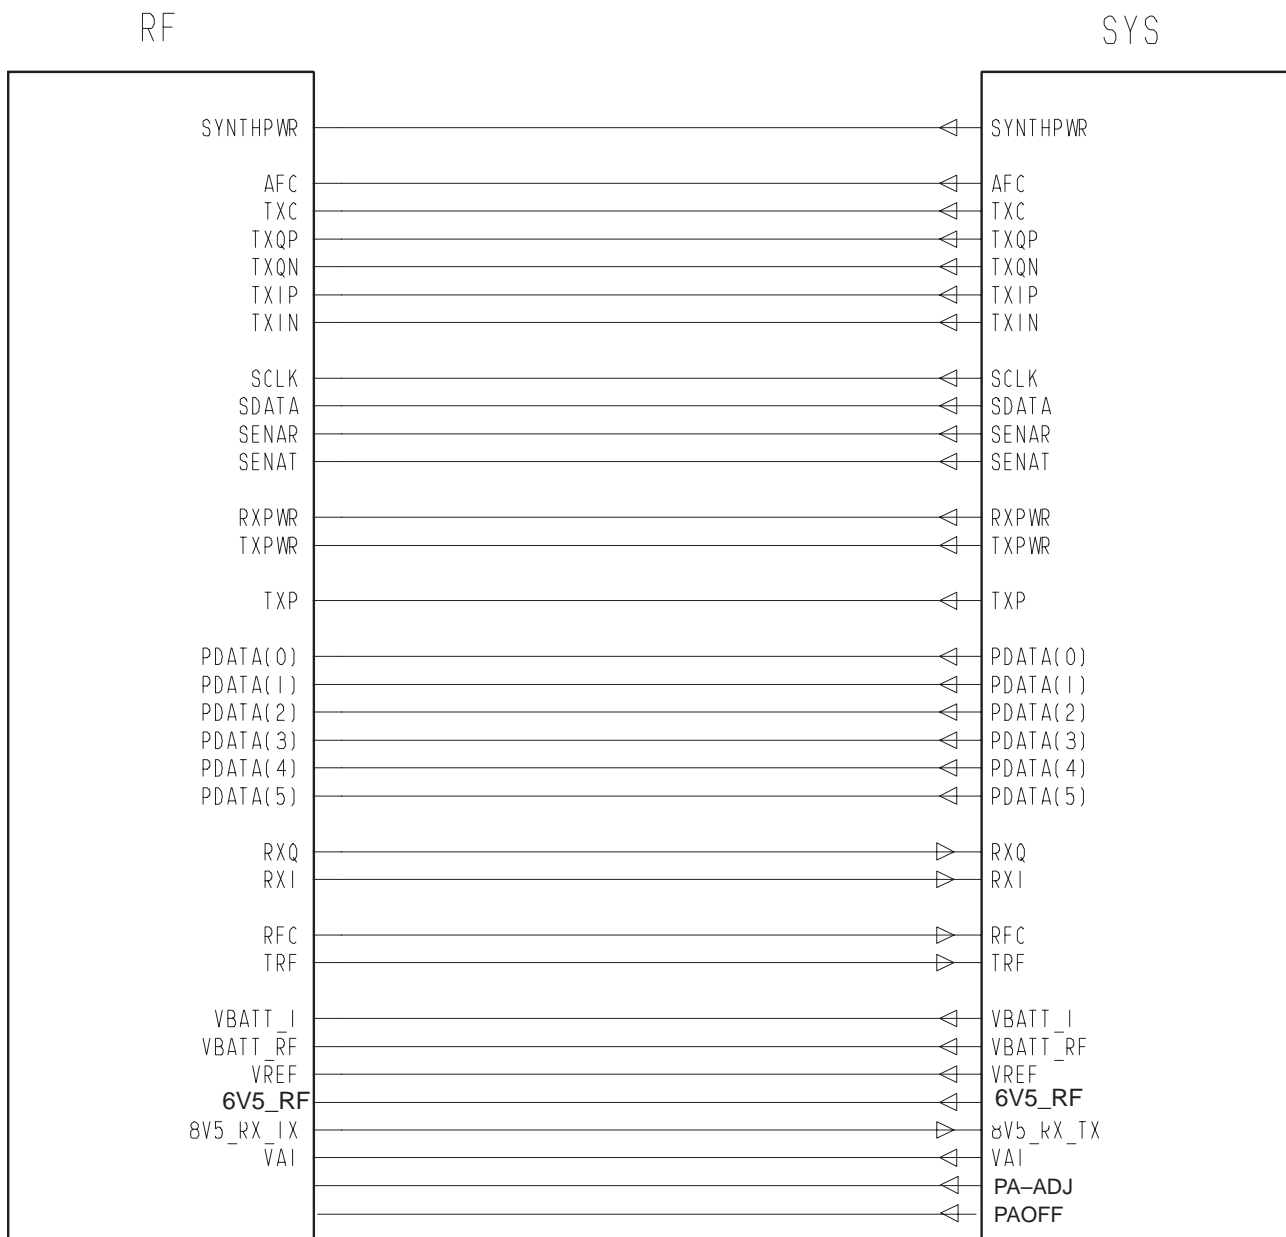


Figure 8. Interconnections – RF and BB

## Part List of GM8 (EDMS Issue: 2.6)

| ITEM | CODE    | DESCRIPTION   | VALUE  | TYPE             |
|------|---------|---------------|--------|------------------|
| R100 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R101 | 1430051 | Chip resistor | 4.7 k  | 5 % 0.063 W 0603 |
| R102 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R103 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R104 | 1430248 | Chip resistor | 3.9 k  | 2 % 0.063 W 0603 |
| R105 | 1430071 | Chip resistor | 22 k   | 5 % 0.063 W 0603 |
| R106 | 1416379 | Melf resistor | 200 k  | 1 % 0.2 W 0204   |
| R108 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R109 | 1430039 | Chip resistor | 1.5 k  | 5 % 0.063 W 0603 |
| R110 | 1430039 | Chip resistor | 1.5 k  | 5 % 0.063 W 0603 |
| R111 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R112 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R113 | 1430001 | Chip resistor | 100    | 5 % 0.063 W 0603 |
| R114 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R115 | 1430151 | Chip resistor | 10     | 5 % 0.063 W 0603 |
| R116 | 1430151 | Chip resistor | 10     | 5 % 0.063 W 0603 |
| R117 | 1430151 | Chip resistor | 10     | 5 % 0.063 W 0603 |
| R118 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R119 | 1430111 | Chip resistor | 1.0 M  | 5 % 0.063 W 0603 |
| R120 | 1430111 | Chip resistor | 1.0 M  | 5 % 0.063 W 0603 |
| R121 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R122 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R123 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R124 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R126 | 1421115 | Melf resistor | 61.9 k | 1 % 0.2 W 0204   |
| R129 | 1430111 | Chip resistor | 1.0 M  | 5 % 0.063 W 0603 |
| R130 | 1430151 | Chip resistor | 10     | 5 % 0.063 W 0603 |
| R131 | 1430009 | Chip resistor | 220    | 5 % 0.063 W 0603 |
| R132 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R133 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R134 | 1430039 | Chip resistor | 1.5 k  | 5 % 0.063 W 0603 |
| R135 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R136 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R137 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R138 | 1820024 | NTC resistor  | 47 k   | 5 % 0.2 W 0805   |
| R139 | 1430071 | Chip resistor | 22 k   | 5 % 0.063 W 0603 |
| R140 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R141 | 1430067 | Chip resistor | 15 k   | 5 % 0.063 W 0603 |
| R142 | 1430049 | Chip resistor | 3.9 k  | 5 % 0.063 W 0603 |
| R143 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R144 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R145 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R146 | 1430071 | Chip resistor | 22 k   | 5 % 0.063 W 0603 |
| R147 | 1430001 | Chip resistor | 100    | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R148 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R149 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R150 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R151 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R152 | 1430091 | Chip resistor | 150 k | 5 % 0.063 W 0603 |
| R153 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R154 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R155 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R156 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R157 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R158 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R159 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R160 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R161 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R162 | 1430019 | Chip resistor | 560   | 5 % 0.063 W 0603 |
| R163 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R164 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R165 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R166 | 1430091 | Chip resistor | 150 k | 5 % 0.063 W 0603 |
| R167 | 1430091 | Chip resistor | 150 k | 5 % 0.063 W 0603 |
| R168 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R169 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R170 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R171 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R172 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R173 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R174 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R175 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R176 | 1430095 | Chip resistor | 220 k | 5 % 0.063 W 0603 |
| R177 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R178 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R179 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R180 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R181 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R182 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R183 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R184 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R185 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R186 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R187 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R188 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R189 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R190 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R191 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R192 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R193 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R194 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R195 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R196 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R197 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R198 | 1430167 | Chip resistor | 47    | 5 % 0.063 W 0603 |
| R199 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R200 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R201 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R202 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R203 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R204 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R205 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R206 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R207 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R208 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R209 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R210 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R211 | 1430047 | Chip resistor | 3.3 k | 5 % 0.063 W 0603 |
| R212 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R213 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R214 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R215 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R216 | 1430298 | Chip resistor | 1.0 M | 2 % 0.063 W 0603 |
| R218 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R219 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R220 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R221 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R222 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R223 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R224 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R225 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R226 | 1430037 | Chip resistor | 1.2 k | 5 % 0.063 W 0603 |
| R242 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R244 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R245 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R248 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R249 | 1430167 | Chip resistor | 47    | 5 % 0.063 W 0603 |
| R250 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R251 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R252 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R253 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R254 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R255 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R256 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R257 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R258 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R259 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R260 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R261 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R262 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R263 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R264 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R265 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R266 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R267 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R268 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R269 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R270 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R271 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R272 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R273 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R274 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R275 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R276 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R277 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R278 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R279 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R300 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R301 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R302 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R303 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R304 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R305 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R306 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R307 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R308 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R309 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R310 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R311 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R312 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R314 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R315 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R316 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R317 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R318 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R319 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R320 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R321 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R322 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R323 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R324 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R325 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R326 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R327 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R328 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R329 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R330 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R331 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R333 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R334 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R335 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R336 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R337 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R338 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R339 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R340 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R341 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R342 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R343 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R344 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R345 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R346 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R350 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R351 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R353 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R354 | 1430039 | Chip resistor | 1.5 k | 5 % 0.063 W 0603 |
| R355 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R356 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R357 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R358 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R359 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R360 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R361 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R362 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R363 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R364 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R365 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R366 | 1430272 | Chip resistor | 39 k  | 2 % 0.063 W 0603 |
| R367 | 1430276 | Chip resistor | 47 k  | 2 % 0.063 W 0603 |
| R368 | 1430288 | Chip resistor | 150 k | 2 % 0.063 W 0603 |
| R369 | 1430294 | Chip resistor | 220 k | 2 % 0.063 W 0603 |
| R370 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R371 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R372 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R373 | 1430270 | Chip resistor | 33 k  | 2 % 0.063 W 0603 |
| R374 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R375 | 1430280 | Chip resistor | 100 k | 2 % 0.063 W 0603 |
| R701 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R702 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R703 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R704 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R705 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R706 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R707 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R708 | 1430144 | Chip jumper   |       | 0603             |
| R709 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |

---

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R710 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R711 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R712 | 1430005 | Chip resistor | 150   | 5 % 0.063 W 0603 |
| R713 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R714 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R716 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R717 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R718 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R720 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R721 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R722 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R723 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R724 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R725 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R726 | 1430163 | Chip resistor | 33    | 5 % 0.063 W 0603 |
| R727 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R728 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R729 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R730 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R731 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R732 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R733 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R734 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R736 | 1430039 | Chip resistor | 1.5 k | 5 % 0.063 W 0603 |
| R738 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R740 | 1430011 | Chip resistor | 270   | 5 % 0.063 W 0603 |
| R741 | 1430200 | Chip resistor | 120   | 2 % 0.063 W 0603 |
| R742 | 1430200 | Chip resistor | 120   | 2 % 0.063 W 0603 |
| R743 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R744 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R745 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R746 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R747 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R749 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R750 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R751 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R752 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R753 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R754 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R756 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R757 | 1430155 | Chip resistor | 15    | 5 % 0.063 W 0603 |
| R758 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R759 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R760 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R762 | 1430007 | Chip resistor | 180   | 5 % 0.063 W 0603 |
| R763 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R764 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R765 | 1430155 | Chip resistor | 15    | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R766 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R770 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R771 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R801 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R802 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R803 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R804 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R805 | 1430037 | Chip resistor | 1.2 k | 5 % 0.063 W 0603 |
| R806 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R807 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R808 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R809 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R810 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R811 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R812 | 1430159 | Chip resistor | 22    | 5 % 0.063 W 0603 |
| R813 | 1430047 | Chip resistor | 3.3 k | 5 % 0.063 W 0603 |
| R814 | 1430057 | Chip resistor | 8.2 k | 5 % 0.063 W 0603 |
| R815 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R816 | 1430063 | Chip resistor | 12 k  | 5 % 0.063 W 0603 |
| R817 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R818 | 1430011 | Chip resistor | 270   | 5 % 0.063 W 0603 |
| R819 | 1430083 | Chip resistor | 68 k  | 5 % 0.063 W 0603 |
| R820 | 1430005 | Chip resistor | 150   | 5 % 0.063 W 0603 |
| R821 | 1430057 | Chip resistor | 8.2 k | 5 % 0.063 W 0603 |
| R822 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R823 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R824 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R825 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R826 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R827 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R828 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R829 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R830 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R831 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R832 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R833 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R834 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R835 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R836 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R837 | 1430053 | Chip resistor | 5.6 k | 5 % 0.063 W 0603 |
| R838 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R839 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R840 | 1430171 | Chip resistor | 68    | 5 % 0.063 W 0603 |
| R841 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R842 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R843 | 1430169 | Chip resistor | 56    | 5 % 0.063 W 0603 |
| R844 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R845 | 1430023 | Chip resistor | 820   | 5 % 0.063 W 0603 |



---

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R846 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R847 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R848 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R849 | 1430005 | Chip resistor | 150   | 5 % 0.063 W 0603 |
| R850 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R851 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R852 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R853 | 1430171 | Chip resistor | 68    | 5 % 0.063 W 0603 |
| R855 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R856 | 1430045 | Chip resistor | 2.7 k | 5 % 0.063 W 0603 |
| R857 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R858 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R859 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R870 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R871 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R872 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R873 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R874 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R876 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R877 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R878 | 1430019 | Chip resistor | 560   | 5 % 0.063 W 0603 |
| R879 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R901 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R902 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R903 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R904 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R905 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R906 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R907 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R908 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R909 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R910 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R911 | 1430169 | Chip resistor | 56    | 5 % 0.063 W 0603 |
| R912 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R913 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R914 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R915 | 1430151 | Chip resistor | 10    | 5 % 0.063 W 0603 |
| R916 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R917 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R918 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R919 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R920 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R921 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R922 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R923 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R924 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R925 | 1430159 | Chip resistor | 22    | 5 % 0.063 W 0603 |
| R926 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |

|      |         |                              |       |                  |
|------|---------|------------------------------|-------|------------------|
| R927 | 1430069 | Chip resistor                | 18 k  | 5 % 0.063 W 0603 |
| R928 | 1430001 | Chip resistor                | 100   | 5 % 0.063 W 0603 |
| R930 | 1430051 | Chip resistor                | 4.7 k | 5 % 0.063 W 0603 |
| R931 | 1430035 | Chip resistor                | 1.0 k | 5 % 0.063 W 0603 |
| R932 | 1430065 | Chip resistor                | 10 k  | 5 % 0.063 W 0603 |
| R933 | 1430043 | Chip resistor                | 2.2 k | 5 % 0.063 W 0603 |
| R934 | 1430169 | Chip resistor                | 56    | 5 % 0.063 W 0603 |
| R935 | 1430001 | Chip resistor                | 100   | 5 % 0.063 W 0603 |
| R936 | 1430065 | Chip resistor                | 10 k  | 5 % 0.063 W 0603 |
| R937 | 1430095 | Chip resistor                | 220 k | 5 % 0.063 W 0603 |
| R938 | 1430009 | Chip resistor                | 220   | 5 % 0.063 W 0603 |
| R939 | 1430073 | Chip resistor                | 27 k  | 5 % 0.063 W 0603 |
| R940 | 1430073 | Chip resistor                | 27 k  | 5 % 0.063 W 0603 |
| R941 | 1430073 | Chip resistor                | 27 k  | 5 % 0.063 W 0603 |
| R942 | 1430021 | Chip resistor                | 680   | 5 % 0.063 W 0603 |
| R943 | 1430065 | Chip resistor                | 10 k  | 5 % 0.063 W 0603 |
| R944 | 1430009 | Chip resistor                | 220   | 5 % 0.063 W 0603 |
| R945 | 1430001 | Chip resistor                | 100   | 5 % 0.063 W 0603 |
| R946 | 1430159 | Chip resistor                | 22    | 5 % 0.063 W 0603 |
| R947 | 1430009 | Chip resistor                | 220   | 5 % 0.063 W 0603 |
| R948 | 1430087 | Chip resistor                | 100 k | 5 % 0.063 W 0603 |
| C100 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C101 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C102 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10  |
| C103 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10  |
| C104 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10  |
| C105 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C106 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C107 | 2604495 | Tantalum cap.<br>7.3x4.4x2.8 | 22 u  | 20 % 16 V        |
| C108 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C109 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C110 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C111 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C112 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V        |
| C113 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C114 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C115 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C116 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V        |
| C117 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V        |
| C118 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V        |
| C119 | 2604329 | Tantalum cap.                | 4.7 u | 20 % 10 V        |

|             |         |                |       |                 |
|-------------|---------|----------------|-------|-----------------|
| 3.5x2.8x1.9 |         |                |       |                 |
| C120        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C121        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C122        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C123        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C124        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C125        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C126        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C127        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C128        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10 |
| C129        | 2604103 | Tantalum cap.  | 4.7 u | 20 % 35 V       |
| 7.3x4.4x2.8 |         |                |       |                 |
| C130        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C131        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C132        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603   |
| C133        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |
| C134        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C135        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C136        | 2604495 | Tantalum cap.  | 22 u  | 20 % 16 V       |
| 7.3x4.4x2.8 |         |                |       |                 |
| C137        | 2604495 | Tantalum cap.  | 22 u  | 20 % 16 V       |
| 7.3x4.4x2.8 |         |                |       |                 |
| C138        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |
| C139        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C149        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C150        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C151        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C152        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C153        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603   |
| C154        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C155        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C156        | 2320071 | Ceramic cap.   | 330 p | 5 % 50 V 0603   |
| C157        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C158        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C159        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C160        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603   |
| C161        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |
| C162        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C163        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |
| C165        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C166        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |

|      |         |                              |       |                 |
|------|---------|------------------------------|-------|-----------------|
| C167 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V       |
| C168 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603   |
| C169 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603   |
| C170 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V       |
| C171 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10 |
| C172 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C173 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C174 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C175 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C177 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C178 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C179 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10 |
| C180 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C181 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V       |
| C182 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C183 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V       |
| C184 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C185 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603   |
| C187 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C188 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C189 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C191 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C192 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C194 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C196 | 2310752 | Ceramic cap.                 | 10 n  | 20 % 50 V 0805  |
| C197 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C198 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C199 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C200 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C201 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C202 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C203 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C204 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C205 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C206 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C207 | 2320097 | Ceramic cap.                 | 3.9 n | 5 % 50 V 0603   |
| C208 | 2320097 | Ceramic cap.                 | 3.9 n | 5 % 50 V 0603   |
| C209 | 2320043 | Ceramic cap.                 | 22 p  | 5 % 50 V 0603   |
| C210 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C211 | 2320043 | Ceramic cap.                 | 22 p  | 5 % 50 V 0603   |
| C212 | 2320097 | Ceramic cap.                 | 3.9 n | 5 % 50 V 0603   |
| C213 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C214 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C215 | 2320043 | Ceramic cap.                 | 22 p  | 5 % 50 V 0603   |

|      |         |              |       |                |
|------|---------|--------------|-------|----------------|
| C216 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C217 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C218 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C219 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C250 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |
| C251 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C252 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C253 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C254 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |
| C255 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C256 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C257 | 2320107 | Ceramic cap. | 10 n  | 5 % 50 V 0603  |
| C258 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C259 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C260 | 2320107 | Ceramic cap. | 10 n  | 5 % 50 V 0603  |
| C261 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |
| C262 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C263 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C264 | 2320107 | Ceramic cap. | 10 n  | 5 % 50 V 0603  |
| C265 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C266 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C267 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C268 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C269 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C270 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C300 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C301 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C302 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C304 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C305 | 2320097 | Ceramic cap. | 3.9 n | 5 % 50 V 0603  |
| C306 | 2320097 | Ceramic cap. | 3.9 n | 5 % 50 V 0603  |
| C307 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C308 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C309 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C310 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C311 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C313 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C314 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C315 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C316 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C317 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C318 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C319 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C320 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C321 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C322 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C323 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C324 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |

|      |         |                              |       |                  |
|------|---------|------------------------------|-------|------------------|
| C325 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C327 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C329 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C350 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C351 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C352 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C353 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C354 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C355 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C356 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C357 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C358 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C359 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C360 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C361 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C702 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C703 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C704 | 2320035 | Ceramic cap.                 | 10 p  | 5 % 50 V 0603    |
| C705 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C706 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C707 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C709 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C710 | 2320025 | Ceramic cap.                 | 3.9 p | 0.25 % 50 V 0603 |
| C711 | 2320045 | Ceramic cap.                 | 27 p  | 5 % 50 V 0603    |
| C712 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C714 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C715 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C716 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C717 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C718 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C719 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C720 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C721 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C722 | 2320027 | Ceramic cap.                 | 4.7 p | 0.25 % 50 V 0603 |
| C725 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C727 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C728 | 2320055 | Ceramic cap.                 | 68 p  | 5 % 50 V 0603    |
| C729 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C732 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |

|             |         |                |       |                  |
|-------------|---------|----------------|-------|------------------|
| C733        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C734        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C735        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |                |       |                  |
| C736        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C738        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C739        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C740        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C741        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C742        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C743        | 2320348 | Ceramic cap.   | 100 p | 2 % 50 V 0603    |
| C744        | 2320348 | Ceramic cap.   | 100 p | 2 % 50 V 0603    |
| C745        | 2310470 | Ceramic cap.   | 270 p | 5 % 50 V 0805    |
| C746        | 2310470 | Ceramic cap.   | 270 p | 5 % 50 V 0805    |
| C747        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C748        | 2320059 | Ceramic cap.   | 100 p | 5 % 50 V 0603    |
| C749        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C750        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C751        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C752        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C753        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C754        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C760        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C761        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C762        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C763        | 2320021 | Ceramic cap.   | 2.7 p | 0.25 % 50 V 0603 |
| C801        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C802        | 2320059 | Ceramic cap.   | 100 p | 5 % 50 V 0603    |
| C803        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805   |
| C804        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C805        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C806        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V        |
| 3.5x2.8x1.9 |         |                |       |                  |
| C807        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C808        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C809        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C810        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C811        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C812        | 2320063 | Ceramic cap.   | 150 p | 5 % 50 V 0603    |
| C813        | 2320055 | Ceramic cap.   | 68 p  | 5 % 50 V 0603    |
| C814        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C815        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C816        | 2307816 | Ceramic cap.   | 47 n  | 20 % 25 V 0805   |
| C817        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C818        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C819        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C820        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C821        | 2320027 | Ceramic cap.   | 4.7 p | 0.25 % 50 V 0603 |

|             |         |               |       |                  |
|-------------|---------|---------------|-------|------------------|
| C822        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C823        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C824        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C825        | 2320019 | Ceramic cap.  | 2.2 p | 0.25 % 50 V 0603 |
| C826        | 2320035 | Ceramic cap.  | 10 p  | 5 % 50 V 0603    |
| C827        | 2604209 | Tantalum cap. | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |       |                  |
| C828        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C829        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C830        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C831        | 2604329 | Tantalum cap. | 4.7 u | 20 % 10 V        |
| 3.5x2.8x1.9 |         |               |       |                  |
| C832        | 2320021 | Ceramic cap.  | 2.7 p | 0.25 % 50 V 0603 |
| C833        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C834        | 2320464 | Ceramic cap.  | 180 p | 5 % 50 V 0603    |
| C835        | 2320464 | Ceramic cap.  | 180 p | 5 % 50 V 0603    |
| C836        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C837        | 2320027 | Ceramic cap.  | 4.7 p | 0.25 % 50 V 0603 |
| C838        | 2320023 | Ceramic cap.  | 3.3 p | 0.25 % 50 V 0603 |
| C839        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C840        | 2320045 | Ceramic cap.  | 27 p  | 5 % 50 V 0603    |
| C841        | 2320035 | Ceramic cap.  | 10 p  | 5 % 50 V 0603    |
| C842        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C843        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |
| C844        | 2604495 | Tantalum cap. | 22 u  | 20 % 16 V        |
| 7.3x4.4x2.8 |         |               |       |                  |
| C845        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |
| C846        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C847        | 2320071 | Ceramic cap.  | 330 p | 5 % 50 V 0603    |
| C848        | 2604103 | Tantalum cap. | 4.7 u | 20 % 35 V        |
| 7.3x4.4x2.8 |         |               |       |                  |
| C849        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C850        | 2604209 | Tantalum cap. | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |       |                  |
| C851        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C852        | 2320039 | Ceramic cap.  | 15 p  | 5 % 50 V 0603    |
| C853        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C854        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C855        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C856        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C857        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C858        | 2320063 | Ceramic cap.  | 150 p | 5 % 50 V 0603    |
| C859        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |
| C863        | 2307816 | Ceramic cap.  | 47 n  | 20 % 25 V 0805   |
| C864        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C866        | 2604329 | Tantalum cap. | 4.7 u | 20 % 10 V        |
| 3.5x2.8x1.9 |         |               |       |                  |
| C901        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |



|             |         |               |        |                  |
|-------------|---------|---------------|--------|------------------|
| C902        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C903        | 2604209 | Tantalum cap. | 1.0 u  | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C904        | 2320071 | Ceramic cap.  | 330 p  | 5 % 50 V 0603    |
| C905        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C906        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C907        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C908        | 2320043 | Ceramic cap.  | 22 p   | 5 % 50 V 0603    |
| C909        | 2320037 | Ceramic cap.  | 12 p   | 5 % 50 V 0603    |
| C910        | 2320041 | Ceramic cap.  | 18 p   | 5 % 50 V 0603    |
| C911        | 2320045 | Ceramic cap.  | 27 p   | 5 % 50 V 0603    |
| C912        | 2320071 | Ceramic cap.  | 330 p  | 5 % 50 V 0603    |
| C913        | 2320071 | Ceramic cap.  | 330 p  | 5 % 50 V 0603    |
| C914        | 2320031 | Ceramic cap.  | 6.8 p  | 0.25 % 50 V 0603 |
| C915        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C916        | 2604209 | Tantalum cap. | 1.0 u  | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C917        | 2604079 | Tantalum cap. | 0.22 u | 20 % 35 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C918        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C919        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C920        | 2604209 | Tantalum cap. | 1.0 u  | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C921        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C922        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C923        | 2310209 | Ceramic cap.  | 2.2 n  | 5 % 50 V 1206    |
| C924        | 2320059 | Ceramic cap.  | 100 p  | 5 % 50 V 0603    |
| C925        | 2320059 | Ceramic cap.  | 100 p  | 5 % 50 V 0603    |
| C926        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C927        | 2320023 | Ceramic cap.  | 3.3 p  | 0.25 % 50 V 0603 |
| C928        | 2320021 | Ceramic cap.  | 2.7 p  | 0.25 % 50 V 0603 |
| C929        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C930        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C931        | 2320027 | Ceramic cap.  | 4.7 p  | 0.25 % 50 V 0603 |
| C932        | 2320023 | Ceramic cap.  | 3.3 p  | 0.25 % 50 V 0603 |
| C933        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C934        | 2320021 | Ceramic cap.  | 2.7 p  | 0.25 % 50 V 0603 |
| C935        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C936        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C937        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C938        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C939        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C940        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C941        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C942        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C943        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C944        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C945        | 2604329 | Tantalum cap. | 4.7 u  | 20 % 10 V        |

3.5x2.8x1.9

|      |         |               |       |               |
|------|---------|---------------|-------|---------------|
| C946 | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603 |
| C947 | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603 |
| C948 | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603 |
| C949 | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603 |
| C950 | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603 |
| C951 | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603 |
| C957 | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603 |
| C958 | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603 |
| C959 | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603 |
| C960 | 2604209 | Tantalum cap. | 1.0 u | 20 % 16 V     |

3.2x1.6x1.6

|      |         |                              |        |                    |
|------|---------|------------------------------|--------|--------------------|
| L100 | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206   | 1206               |
| L101 | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206   | 1206               |
| L102 | 3640001 | Chip coil                    | 10 u   | 20 % 1 A 4.5x4x4.5 |
| L104 | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206   | 1206               |
| L105 | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206   | 1206               |
| L200 | 3641302 | Chip coil                    | 470 n  | 5 % Q=30/25 MHz    |
| L250 | 3606946 | Ferrite bead 0.2r 26r/100mhz | 1206   | 1206               |
| L701 | 3641522 | Chip coil                    | 6. Q n | 20 % Q=50/250 MHz  |
| L702 | 3641522 | Chip coil                    | 6. Q n | 20 % Q=50/250 MHz  |
| L703 | 3641558 | Chip coil                    | 8. Q n | 10 % Q=50 0805     |
| L705 | 3641622 | Chip coil                    | 220 n  | 5 % Q=30/100 MHz 0 |
| L706 | 3641550 | Chip coil                    | 120 n  | 10 % Q=35/150 MHz  |
| L707 | 3641300 | Chip coil                    | 330 n  | 5 % Q=30/25 MHz 10 |
| L708 | 3641300 | Chip coil                    | 330 n  | 5 % Q=30/25 MHz 10 |
| L709 | 3641300 | Chip coil                    | 330 n  | 5 % Q=30/25 MHz 10 |
| L710 | 3641300 | Chip coil                    | 330 n  | 5 % Q=30/25 MHz 10 |
| L711 | 3641550 | Chip coil                    | 120 n  | 10 % Q=35/150 MHz  |
| L713 | 3641306 | Chip coil                    | 1. Q u | 5 % Q=33/25 MHz 10 |
| L715 | 3641526 | Chip coil                    | 12.Q n | 10 % Q=45/250 MHz  |
| L801 | 3641558 | Chip coil                    | 8. Q n | 10 % Q=50 0805     |
| L802 | 3641574 | Chip coil                    | 68.Q n | 5 % Q=40/200 MHz   |
| L803 | 3641558 | Chip coil                    | 8. Q n | 10 % Q=50 0805     |
| L804 | 3641574 | Chip coil                    | 68.Q n | 5 % Q=40/200 MHz 0 |
| L805 | 3641302 | Chip coil                    | 470 n  | 5 % Q=30/25 MHz 10 |
| L806 | 3641558 | Chip coil                    | 8. Q n | 10 % Q=50 0805     |
| L807 | 3641526 | Chip coil                    | 12.Q n | 10 % Q=45/250 MHz  |
| L901 | 3641306 | Chip coil                    | 1. Q u | 5 % Q=33/25 MHz 10 |
| L902 | 3641574 | Chip coil                    | 68.Q n | 5 % Q=40/200 MHz   |
| L903 | 3641302 | Chip coil                    | 470 n  | 5 % Q=30/25 MHz 10 |

|           |         |                                  |                 |                     |
|-----------|---------|----------------------------------|-----------------|---------------------|
| L904<br>0 | 3641520 | Chip coil                        | 3. Q n          | 20 % Q=50/250 MHz   |
| L905      | 3641574 | Chip coil                        | 68.Q n          | 5 % Q=40/200 MHz 0  |
| L906<br>0 | 3641520 | Chip coil                        | 3. Q n          | 20 % Q=50/250 MHz   |
| L907      | 3641558 | Chip coil                        | 8. Q n          | 10 % Q=50 0805      |
| L910      | 3641558 | Chip coil                        | 8. Q n          | 10 % Q=50 0805      |
| G901      | 4352804 | Vco 1006–1031mhz 4.5v/10ma       | g               | GSM                 |
| G902      | 4510038 | SM, VCTCXO 26mhz+–5ppm/–25c/+75c |                 |                     |
| Z701      | 4512001 | Dupl 890–915/935–960mhz          |                 | 39.7x14.839.7x14.8  |
| Z702      | 4550109 | Cer.filt 947.5+–12.5mhz          | 15.5x9.1        | 15.5x9.1            |
| Z703      | 4511026 | Saw filter                       | 71+–0.08 M      | 14.2x8.4            |
| Z704      | 4510009 | Cer.filt 13+–0.09mhz             | 7.2x3.2         | 7.2x3.2             |
| Z801      | 4550107 | Cer.filt 902.5+–12.5mhz          | 11.9x9.5        | 11.9x9.5            |
| Z802      | 4557001 | Cer.filt 902.5+–12.5mhz          | 4.8x3.5         | 4.8x3.5             |
| T700      | 3640415 | Rf–transf. ml 71–130mhz          | 0.1w 1206       | 1206                |
| T802      | 3640417 | Rf transf.ml 800/960mhz          | 0.2w 1206       | 1206                |
| V100      | 4107027 | Zener diode BZX84                | 5 % 16 V 0.3 W  | SOT23               |
| V101      | 4110074 | Schottky diode                   | STPS340U        | 40 V 3 A SOD6       |
| V102      | 4110014 | Sch. diode x 2                   | BAS70–07        | 70 V 15 mA SOT143   |
| V103      | 4106769 | Zener diode BZX84                | 5 % 4.7 V 0.3 W | SOT23               |
| V104      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V105      | 4200877 | Transistor                       | BCX51–16        | pnp 45 V 1.5 A      |
| SOT89     |         |                                  |                 |                     |
| V106      | 4200877 | Transistor                       | BCX51–16        | pnp 45 V 1.5 A      |
| SOT89     |         |                                  |                 |                     |
| V107      | 4110014 | Sch. diode x 2                   | BAS70–07        | 70 V 15 mA SOT143   |
| V108      | 4200877 | Transistor                       | BCX51–16        | pnp 45 V 1.5 A      |
| SOT89     |         |                                  |                 |                     |
| V109      | 4110014 | Sch. diode x 2                   | BAS70–07        | 70 V 15 mA SOT143   |
| V110      | 4202456 | MosFet                           | IRFR9020        | p–ch 50 V 8 A TO252 |
| V111      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V112      | 4103492 | Trans. supr.                     | 15V             | 400 A 5000 W        |
| V113      | 4107027 | Zener diode BZX84                | 5 % 16 V 0.3 W  | SOT23               |
| V115      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V117      | 4200909 | Transistor BC858B/BCW30          | pnp 30 V 100 mA | SOT23               |
| V118      | 4107027 | Zener diode BZX84                | 5 % 16 V 0.3 W  | SOT23               |
| V150      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V151      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V152      | 4200909 | Transistor BC858B/BCW30          | pnp 30 V 100 mA | SOT23               |
| V153      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V154      | 4200877 | Transistor                       | BCX51–16        | pnp 45 V 1.5 A      |
| SOT89     |         |                                  |                 |                     |
| V155      | 4210017 | Transistor                       | MJD3055         | nnp 60 V 10 A TO252 |
| V156      | 4110014 | Sch. diode x 2                   | BAS70–07        | 70 V 15 mA SOT143   |
| V157      | 4200917 | Transistor BC848B/BCW32          | nnp 30 V 100 mA | SOT23               |
| V158      | 4200875 | Transistor                       | BCX54–16        | nnp 45 V 1.5 A      |
| SOT89     |         |                                  |                 |                     |

|       |         |                             |                 |                |           |
|-------|---------|-----------------------------|-----------------|----------------|-----------|
| V159  | 4210007 | Transistor                  | MJD2955         | pnnp 60 V 10 A |           |
| V160  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V161  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V162  | 4100285 | Diode x 2 BAV99             | 70 V 200 mA     |                | SER.SOT23 |
| V200  | 4110014 | Sch. diode x 2              | BAS70-07        | 70 V 15 mA     | SOT143    |
| V201  | 4210079 | Transistor BFS17            | nnp 15 V 50 mA  |                | SOT23     |
| V202  | 4210079 | Transistor BFS17            | nnp 15 V 50 mA  |                | SOT23     |
| V205  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V250  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V251  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V300  | 4110014 | Sch. diode x 2              | BAS70-07        | 70 V 15 mA     | SOT143    |
| V301  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V302  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V303  | 4102998 | Led                         | Green           | 2.2 V 1206     |           |
| V304  | 4102998 | Led                         | Green           | 2.2 V 1206     |           |
| V305  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V306  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V307  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V308  | 4200875 | Transistor                  | BCX54-16        | nnp 45 V 1.5 A |           |
| SOT89 |         |                             |                 |                |           |
| V314  | 4107027 | Zener diode BZX84           | 5 % 16 V 0.3 W  |                | SOT23     |
| V315  | 4107027 | Zener diode BZX84           | 5 % 16 V 0.3 W  |                | SOT23     |
| V350  | 4117998 | Precision voltage reference | 4.096           | 4.096          |           |
| V701  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V702  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V703  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V704  | 4210010 | Transistor BFP183           | nnp 12 V 65 mA  |                | SOT143    |
| V705  | 4201036 | Transistor BFR93A           | nnp 12 V 35 mA  |                | SOT23     |
| V706  | 4201036 | Transistor BFR93A           | nnp 12 V 35 mA  |                | SOT23     |
| V707  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V708  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V709  | 4201036 | Transistor BFR93A           | nnp 12 V 35 mA  |                | SOT23     |
| V801  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V802  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V803  | 4110014 | Sch. diode x 2              | BAS70-07        | 70 V 15 mA     | SOT143    |
| V805  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V806  | 4210010 | Transistor BFP183           | nnp 12 V 65 mA  |                | SOT143    |
| V807  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V808  | 4201036 | Transistor BFR93A           | nnp 12 V 35 mA  |                | SOT23     |
| V809  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V810  | 4210010 | Transistor BFP183           | nnp 12 V 65 mA  |                | SOT143    |
| V811  | 4100285 | Diode x 2 BAV99             | 70 V 200 mA     |                | SER.SOT23 |
| V813  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |
| V901  | 4110062 | Cap. diode BB535            | 30 V 2.1/18.7PF |                | SOD323    |
| V902  | 4201036 | Transistor BFR93A           | nnp 12 V 35 mA  |                | SOT23     |
| V903  | 4200909 | Transistor BC858B/BCW30pnp  | 30 V 100 mA     |                | SOT23     |
| V904  | 4210010 | Transistor BFP183           | nnp 12 V 65 mA  |                | SOT143    |
| V905  | 4200917 | Transistor BC848B/BCW32nnp  | 30 V 100 mA     |                | SOT23     |

|      |         |  |                   |
|------|---------|--|-------------------|
| V906 | 4210010 | Transistor BFP183 npn 12 V 65 mA       | SOT143            |
| V907 | 4200917 | Transistor BC848B/BCW32npn 30 V 100 mA | SOT23             |
| V908 | 4200917 | Transistor BC848B/BCW32npn 30 V 100 mA | SOT23             |
| D200 | 4372212 | IC, ROM DSP1616-X11                    | TQFP100           |
| D201 | 4346012 | IC, SRAM 32kx8 bit 70 ns               | TSO28             |
| D202 | 4346010 | IC, SRAM 32kx8 bit 70 ns T             | SO28              |
| D250 | 0240435 | MCU ROM SW Module                      |                   |
|      | 4340122 | MCU H8/536 16MHz OTP64KX8              | TQFP80            |
|      | 8400469 | ROM Code                               |                   |
|      | 9380149 | Sticker Brady LAT-2-747                | 9.5X9.5           |
| D251 | 4340146 | IC, flash memory E28F008               | TSO40             |
| D252 | 4346010 | IC, SRAM 32kx8 bit 70 ns               | TSO28             |
| D253 | 4342282 | M28c64C150 EEPROM 8KX8 150NS           | TSO28             |
| D300 | 4375070 | IC, ESA GSM/PCN ASIC                   | SQFP144           |
| D301 | 4340126 | IC, 1xnand 2input cmos ssTC7S00F       | SSO5              |
| D302 | 4340126 | IC, 1xnand 2input cmos ssTC7S00F       | SSO5              |
| N100 | 4375588 | IC, PSL+ power supply                  | SO24W             |
| N101 | 4340037 | IC, regulator LM2941S LD<1 V 1 A       | TO263             |
| N102 | 4301182 | IC, 2 x op.amp. LM2902                 | SO14S             |
| N150 | 4343132 | IC, PCM coded/filter ST5080            | SO28W             |
| N151 | 4301182 | IC, 2 x op.amp. LM2902                 | SO14S             |
| N152 | 4347948 | IC, 2 x op.amp. LM258                  | SO8S              |
| N350 | 4370015 | IC, ASIC                               | SQFP64            |
| N701 | 4349630 | IC, v1.4 gsm receiver PMB2403S         | VSO24             |
| N702 | 4349648 | IC, if amp 100mhz W1466BBL             | SSO14             |
| N801 | 4301062 | IC, regulator LP2951AC                 | SO8S              |
| N803 | 4340301 | IC, regulator TK11550M 5.0 V 0.13 A    | SO8S              |
| N804 | 4345678 | IC, 2 x op.amp. MC33076                | SO8S              |
| N805 | 4349706 | IC, modulator PMB2200S                 | VSO20             |
| N807 | 4350085 | Slm-090a mixer 700-1000mhz             |                   |
| N808 | 4347948 | IC, 2 x op.amp. LM258                  | SO8S              |
| N901 | 4349660 | IC, PLL PMB2306T                       | SO14S             |
| N902 | 4349660 | IC, PLL PMB2306T                       | SO14S             |
| N903 | 4342474 | IC, prescaler SA701                    | SO8S              |
| N904 | 4340301 | IC, regulator TK11550M                 | 5.0 V 0.13 A SO8S |
| N905 | 4350037 | IC, pow.amp.                           | 12 V 23 W GSM     |
| N906 | 4350085 | Slm-090a mixer 700-1000mhz             |                   |
| X002 | 4510044 | Crystal 60.2 M                         |                   |
| X100 | 5469009 | System conn 16pol 2x8 stackered        |                   |
| X101 | 5430001 | D25-conn 90'deg metal bracket          |                   |
| X103 | 5400033 | Sim card reader ccm04-5003 6pol        |                   |
| X104 | 5420011 | Connector mini uhf 90'deg <2.5gh       | <2.5GHZ           |
| P001 | 9854082 | PC board GM8184.5x135.9x1.6 m6 1/pa    |                   |

## Part List of GM8 RF/BB module Code 0201102 (EDMS Issue: 3.4)

PWB ver.13

| ITEM | CODE    | DESCRIPTION   | VALUE  | TYPE             |
|------|---------|---------------|--------|------------------|
| R100 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R101 | 1430051 | Chip resistor | 4.7 k  | 5 % 0.063 W 0603 |
| R102 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R103 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R104 | 1430248 | Chip resistor | 3.9 k  | 2 % 0.063 W 0603 |
| R105 | 1430071 | Chip resistor | 22 k   | 5 % 0.063 W 0603 |
| R106 | 1416379 | Melf resistor | 200 k  | 1 % 0.2 W 0204   |
| R107 | 1416033 | Melf resistor | 47.5 k | 1 % 0.2 W 0204   |
| R108 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R109 | 1430039 | Chip resistor | 1.5 k  | 5 % 0.063 W 0603 |
| R110 | 1430039 | Chip resistor | 1.5 k  | 5 % 0.063 W 0603 |
| R111 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R112 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R113 | 1430001 | Chip resistor | 100    | 5 % 0.063 W 0603 |
| R114 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R115 | 1430151 | Chip resistor | 10     | 5 % 0.1 W 0603   |
| R116 | 1430151 | Chip resistor | 10     | 5 % 0.1 W 0603   |
| R117 | 1430151 | Chip resistor | 10     | 5 % 0.1 W 0603   |
| R118 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R119 | 1430111 | Chip resistor | 1.0 M  | 5 % 0.063 W 0603 |
| R120 | 1430111 | Chip resistor | 1.0 M  | 5 % 0.063 W 0603 |
| R121 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R122 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R123 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R124 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R125 | 1416273 | Melf resistor | 150 k  | 1 % 0.2 W 0204   |
| R126 | 1421115 | Melf resistor | 61.9 k | 1 % 0.2 W 0204   |
| R127 | 1416033 | Melf resistor | 47.5 k | 1 % 0.2 W 0204   |
| R128 | 1416033 | Melf resistor | 47.5 k | 1 % 0.2 W 0204   |
| R129 | 1430111 | Chip resistor | 1.0 M  | 5 % 0.063 W 0603 |
| R130 | 1430151 | Chip resistor | 10     | 5 % 0.1 W 0603   |
| R131 | 1430009 | Chip resistor | 220    | 5 % 0.063 W 0603 |
| R132 | 1430035 | Chip resistor | 1.0 k  | 5 % 0.063 W 0603 |
| R133 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R134 | 1430039 | Chip resistor | 1.5 k  | 5 % 0.063 W 0603 |
| R135 | 1430079 | Chip resistor | 47 k   | 5 % 0.063 W 0603 |
| R136 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R137 | 1430065 | Chip resistor | 10 k   | 5 % 0.063 W 0603 |
| R138 | 1820024 | NTC resistor  | 47 k   | 5 % 0.2 W 0805   |
| R139 | 1430071 | Chip resistor | 22 k   | 5 % 0.063 W 0603 |
| R140 | 1430087 | Chip resistor | 100 k  | 5 % 0.063 W 0603 |
| R141 | 1430067 | Chip resistor | 15 k   | 5 % 0.063 W 0603 |
| R142 | 1430049 | Chip resistor | 3.9 k  | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R143 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R144 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R145 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R146 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R147 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R148 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R149 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R150 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R151 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R152 | 1430091 | Chip resistor | 150 k | 5 % 0.063 W 0603 |
| R153 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R154 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R155 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R156 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R157 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R158 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R159 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R160 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R161 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R162 | 1430019 | Chip resistor | 560   | 5 % 0.063 W 0603 |
| R163 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R164 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R165 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R166 | 1430091 | Chip resistor | 150 k | 5 % 0.063 W 0603 |
| R167 | 1430091 | Chip resistor | 150 k | 5 % 0.063 W 0603 |
| R168 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R169 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R170 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R171 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R172 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R173 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R174 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R175 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R176 | 1430095 | Chip resistor | 220 k | 5 % 0.063 W 0603 |
| R177 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R178 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R179 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R180 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R181 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R182 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R183 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R184 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R185 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R186 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R187 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R188 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R189 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R190 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R191 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R192 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R193 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R194 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R195 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R196 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R197 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R198 | 1430167 | Chip resistor | 47    | 5 % 0.063 W 0603 |
| R199 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R200 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R201 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R202 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R203 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R204 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R205 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R206 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R207 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R208 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R209 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R210 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R211 | 1430047 | Chip resistor | 3.3 k | 5 % 0.063 W 0603 |
| R212 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R213 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R214 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R215 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R216 | 1430298 | Chip resistor | 1.0 M | 2 % 0.063 W 0603 |
| R218 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R219 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R220 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R221 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R222 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R223 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R224 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R225 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R226 | 1430037 | Chip resistor | 1.2 k | 5 % 0.063 W 0603 |
| R242 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R244 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R245 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R248 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R249 | 1430167 | Chip resistor | 47    | 5 % 0.063 W 0603 |
| R250 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R251 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R252 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R253 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R254 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R255 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R256 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R257 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |



|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R258 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R259 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R260 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R261 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R262 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R263 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R264 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R265 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R266 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R267 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R268 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R269 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R270 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R271 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R272 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R273 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R274 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R275 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R276 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R277 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R278 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R279 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R300 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R301 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R302 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R303 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R304 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R305 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R306 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R307 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R308 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R309 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R310 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R311 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R312 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R314 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R315 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R316 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R317 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R318 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R319 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R320 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R321 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R322 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R323 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R324 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R325 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R326 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R327 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R328 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R329 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R330 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R331 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R333 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R334 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R335 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R336 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R337 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R338 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R339 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R340 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R341 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R342 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R343 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R344 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R345 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R346 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R350 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R351 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R353 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R354 | 1430039 | Chip resistor | 1.5 k | 5 % 0.063 W 0603 |
| R355 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R356 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R357 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R358 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R359 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R360 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R361 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R362 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R363 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R364 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R365 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R366 | 1430147 | Chip resistor | 39 k  | 1 % 0.063 W 0603 |
| R367 | 1430276 | Chip resistor | 47 k  | 2 % 0.063 W 0603 |
| R368 | 1430033 | Chip resistor | 150 k | 1 % 0.063 W 0603 |
| R369 | 1430294 | Chip resistor | 220 k | 2 % 0.063 W 0603 |
| R370 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R371 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R372 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R373 | 1430059 | Chip resistor | 33 k  | 1 % 0.063 W 0603 |
| R374 | 1430258 | Chip resistor | 10 k  | 2 % 0.063 W 0603 |
| R375 | 1430280 | Chip resistor | 100 k | 2 % 0.063 W 0603 |
| R701 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R702 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R703 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R704 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R705 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R706 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R707 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R708 | 1430144 | Chip jumper   |       | 0603             |
| R709 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R710 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R711 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R712 | 1430005 | Chip resistor | 150   | 5 % 0.063 W 0603 |
| R713 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R714 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R716 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R717 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R718 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R720 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R721 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R722 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R723 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R724 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R725 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R726 | 1430163 | Chip resistor | 33    | 5 % 0.063 W 0603 |
| R727 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R728 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R729 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R730 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R731 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R732 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R733 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R734 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R736 | 1430039 | Chip resistor | 1.5 k | 5 % 0.063 W 0603 |
| R738 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R740 | 1430011 | Chip resistor | 270   | 5 % 0.063 W 0603 |
| R741 | 1430200 | Chip resistor | 120   | 2 % 0.063 W 0603 |
| R742 | 1430200 | Chip resistor | 120   | 2 % 0.063 W 0603 |
| R743 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R744 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R745 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R746 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R747 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R749 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R750 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R751 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R752 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R753 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R754 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R756 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R757 | 1430155 | Chip resistor | 15    | 5 % 0.1 W 0603   |
| R758 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R759 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R760 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R762 | 1430007 | Chip resistor | 180   | 5 % 0.063 W 0603 |
| R763 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R764 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R765 | 1430155 | Chip resistor | 15    | 5 % 0.1 W 0603   |
| R766 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R770 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R771 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R799 | 1430111 | Chip resistor | 1.0 M | 5 % 0.063 W 0603 |
| R801 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R802 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R803 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R804 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R805 | 1430037 | Chip resistor | 1.2 k | 5 % 0.063 W 0603 |
| R806 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R807 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R808 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R809 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R810 | 1430015 | Chip resistor | 470   | 5 % 0.063 W 0603 |
| R811 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R812 | 1430159 | Chip resistor | 22    | 5 % 0.063 W 0603 |
| R813 | 1430047 | Chip resistor | 3.3 k | 5 % 0.063 W 0603 |
| R814 | 1430057 | Chip resistor | 8.2 k | 5 % 0.063 W 0603 |
| R815 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R816 | 1430063 | Chip resistor | 12 k  | 5 % 0.063 W 0603 |
| R817 | 1430079 | Chip resistor | 47 k  | 5 % 0.063 W 0603 |
| R818 | 1430011 | Chip resistor | 270   | 5 % 0.063 W 0603 |
| R819 | 1430083 | Chip resistor | 68 k  | 5 % 0.063 W 0603 |
| R820 | 1430005 | Chip resistor | 150   | 5 % 0.063 W 0603 |
| R821 | 1430057 | Chip resistor | 8.2 k | 5 % 0.063 W 0603 |
| R822 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R823 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R824 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R825 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R826 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R827 | 1430210 | Chip resistor | 7.5 k | 2 % 0.063 W 0603 |
| R828 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R829 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R830 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R831 | 1430142 | Chip resistor | 4.7   | 5 % 0.063 W 0603 |
| R832 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R833 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R834 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R835 | 1430071 | Chip resistor | 22 k  | 5 % 0.063 W 0603 |
| R836 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R837 | 1430053 | Chip resistor | 5.6 k | 5 % 0.063 W 0603 |
| R838 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R839 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |

---

|      |         |               |       |                  |
|------|---------|---------------|-------|------------------|
| R840 | 1430171 | Chip resistor | 68    | 5 % 0.063 W 0603 |
| R841 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R842 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R843 | 1430169 | Chip resistor | 56    | 5 % 0.063 W 0603 |
| R844 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R845 | 1430023 | Chip resistor | 820   | 5 % 0.063 W 0603 |
| R846 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R847 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R848 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R849 | 1430005 | Chip resistor | 150   | 5 % 0.063 W 0603 |
| R850 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R851 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R852 | 1430067 | Chip resistor | 15 k  | 5 % 0.063 W 0603 |
| R853 | 1430171 | Chip resistor | 68    | 5 % 0.063 W 0603 |
| R855 | 1430073 | Chip resistor | 27 k  | 5 % 0.063 W 0603 |
| R856 | 1430045 | Chip resistor | 2.7 k | 5 % 0.063 W 0603 |
| R857 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R858 | 1430049 | Chip resistor | 3.9 k | 5 % 0.063 W 0603 |
| R859 | 1430075 | Chip resistor | 33 k  | 5 % 0.063 W 0603 |
| R870 | 1430013 | Chip resistor | 330   | 5 % 0.063 W 0603 |
| R871 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R872 | 1430087 | Chip resistor | 100 k | 5 % 0.063 W 0603 |
| R873 | 1430001 | Chip resistor | 100   | 5 % 0.063 W 0603 |
| R874 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R876 | 1430043 | Chip resistor | 2.2 k | 5 % 0.063 W 0603 |
| R877 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R878 | 1430019 | Chip resistor | 560   | 5 % 0.063 W 0603 |
| R879 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |
| R901 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R902 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R903 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R904 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R905 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R906 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R907 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R908 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R909 | 1430051 | Chip resistor | 4.7 k | 5 % 0.063 W 0603 |
| R910 | 1430009 | Chip resistor | 220   | 5 % 0.063 W 0603 |
| R911 | 1430169 | Chip resistor | 56    | 5 % 0.063 W 0603 |
| R912 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R913 | 1430055 | Chip resistor | 6.8 k | 5 % 0.063 W 0603 |
| R914 | 1430021 | Chip resistor | 680   | 5 % 0.063 W 0603 |
| R915 | 1430151 | Chip resistor | 10    | 5 % 0.1 W 0603   |
| R916 | 1430077 | Chip resistor | 39 k  | 5 % 0.063 W 0603 |
| R917 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R918 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R919 | 1430035 | Chip resistor | 1.0 k | 5 % 0.063 W 0603 |
| R920 | 1430065 | Chip resistor | 10 k  | 5 % 0.063 W 0603 |

|             |         |                |       |                  |
|-------------|---------|----------------|-------|------------------|
| R921        | 1430065 | Chip resistor  | 10 k  | 5 % 0.063 W 0603 |
| R922        | 1430073 | Chip resistor  | 27 k  | 5 % 0.063 W 0603 |
| R923        | 1430049 | Chip resistor  | 3.9 k | 5 % 0.063 W 0603 |
| R924        | 1430049 | Chip resistor  | 3.9 k | 5 % 0.063 W 0603 |
| R925        | 1430159 | Chip resistor  | 22    | 5 % 0.063 W 0603 |
| R926        | 1430035 | Chip resistor  | 1.0 k | 5 % 0.063 W 0603 |
| R927        | 1430069 | Chip resistor  | 18 k  | 5 % 0.063 W 0603 |
| R928        | 1430001 | Chip resistor  | 100   | 5 % 0.063 W 0603 |
| R930        | 1430051 | Chip resistor  | 4.7 k | 5 % 0.063 W 0603 |
| R931        | 1430035 | Chip resistor  | 1.0 k | 5 % 0.063 W 0603 |
| R932        | 1430065 | Chip resistor  | 10 k  | 5 % 0.063 W 0603 |
| R933        | 1430043 | Chip resistor  | 2.2 k | 5 % 0.063 W 0603 |
| R934        | 1430169 | Chip resistor  | 56    | 5 % 0.063 W 0603 |
| R935        | 1430001 | Chip resistor  | 100   | 5 % 0.063 W 0603 |
| R936        | 1430065 | Chip resistor  | 10 k  | 5 % 0.063 W 0603 |
| R937        | 1430095 | Chip resistor  | 220 k | 5 % 0.063 W 0603 |
| R938        | 1430009 | Chip resistor  | 220   | 5 % 0.063 W 0603 |
| R939        | 1430073 | Chip resistor  | 27 k  | 5 % 0.063 W 0603 |
| R940        | 1430073 | Chip resistor  | 27 k  | 5 % 0.063 W 0603 |
| R941        | 1430073 | Chip resistor  | 27 k  | 5 % 0.063 W 0603 |
| R942        | 1430021 | Chip resistor  | 680   | 5 % 0.063 W 0603 |
| R943        | 1430065 | Chip resistor  | 10 k  | 5 % 0.063 W 0603 |
| R944        | 1430009 | Chip resistor  | 220   | 5 % 0.063 W 0603 |
| R945        | 1430001 | Chip resistor  | 100   | 5 % 0.063 W 0603 |
| R946        | 1430159 | Chip resistor  | 22    | 5 % 0.063 W 0603 |
| R947        | 1430009 | Chip resistor  | 220   | 5 % 0.063 W 0603 |
| R948        | 1430087 | Chip resistor  | 100 k | 5 % 0.063 W 0603 |
| C100        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C101        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C102        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C103        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C104        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C105        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C106        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C107        | 2604495 | Tantalum cap.  | 22 u  | 20 % 16 V        |
| 7.3x4.4x2.8 |         |                |       |                  |
| C108        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C109        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |                |       |                  |
| C110        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |                |       |                  |
| C111        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C112        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V        |
| 3.5x2.8x1.9 |         |                |       |                  |
| C113        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C114        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C115        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C116        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V        |

|             |         |                |       |                 |
|-------------|---------|----------------|-------|-----------------|
| 3.5x2.8x1.9 |         |                |       |                 |
| C117        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C118        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C119        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C120        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C121        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C122        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C123        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C124        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C125        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C126        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C127        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C128        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10 |
| C129        | 2604103 | Tantalum cap.  | 4.7 u | 20 % 35 V       |
| 7.3x4.4x2.8 |         |                |       |                 |
| C130        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C131        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603   |
| C132        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603   |
| C133        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |
| C134        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C135        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C136        | 2604495 | Tantalum cap.  | 22 u  | 20 % 16 V       |
| 7.3x4.4x2.8 |         |                |       |                 |
| C137        | 2604495 | Tantalum cap.  | 22 u  | 20 % 16 V       |
| 7.3x4.4x2.8 |         |                |       |                 |
| C138        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |
| C139        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C149        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V       |
| 3.5x2.8x1.9 |         |                |       |                 |
| C150        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C151        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C152        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C153        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603   |
| C154        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C155        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C156        | 2320071 | Ceramic cap.   | 330 p | 5 % 50 V 0603   |
| C157        | 2310784 | Ceramic cap.   | 100 n | 10 % 25 V 0805  |
| C158        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C159        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603   |
| C160        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603   |
| C161        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V       |
| 3.2x1.6x1.6 |         |                |       |                 |

|      |         |                              |       |                 |
|------|---------|------------------------------|-------|-----------------|
| C162 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C163 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V       |
| C165 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V       |
| C166 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C167 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V       |
| C168 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603   |
| C169 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603   |
| C170 | 2604329 | Tantalum cap.<br>3.5x2.8x1.9 | 4.7 u | 20 % 10 V       |
| C171 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10 |
| C172 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C173 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C174 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C175 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C177 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C178 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C179 | 2517801 | Electrol. cap.               | 330 u | 20 % 25 V 10x10 |
| C180 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C181 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V       |
| C182 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C183 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V       |
| C184 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C185 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603   |
| C187 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C188 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C189 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C191 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C192 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C194 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C196 | 2310752 | Ceramic cap.                 | 10 n  | 20 % 50 V 0805  |
| C197 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603   |
| C198 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C199 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603   |
| C200 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603   |
| C201 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C202 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C203 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C204 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C205 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C206 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805  |
| C207 | 2320097 | Ceramic cap.                 | 3.9 n | 5 % 50 V 0603   |
| C208 | 2320097 | Ceramic cap.                 | 3.9 n | 5 % 50 V 0603   |
| C209 | 2320043 | Ceramic cap.                 | 22 p  | 5 % 50 V 0603   |



|      |         |              |       |                |
|------|---------|--------------|-------|----------------|
| C210 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C211 | 2320043 | Ceramic cap. | 22 p  | 5 % 50 V 0603  |
| C212 | 2320097 | Ceramic cap. | 3.9 n | 5 % 50 V 0603  |
| C213 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C214 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C215 | 2320043 | Ceramic cap. | 22 p  | 5 % 50 V 0603  |
| C216 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C217 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C218 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C219 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C250 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |
| C251 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C252 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C253 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C254 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |
| C255 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C256 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C257 | 2320107 | Ceramic cap. | 10 n  | 5 % 50 V 0603  |
| C258 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C259 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C260 | 2320107 | Ceramic cap. | 10 n  | 5 % 50 V 0603  |
| C261 | 2320083 | Ceramic cap. | 1.0 n | 5 % 50 V 0603  |
| C262 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C263 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C264 | 2320107 | Ceramic cap. | 10 n  | 5 % 50 V 0603  |
| C265 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C266 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C267 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C268 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C269 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C270 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C300 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C301 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C302 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C304 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C305 | 2320097 | Ceramic cap. | 3.9 n | 5 % 50 V 0603  |
| C306 | 2320097 | Ceramic cap. | 3.9 n | 5 % 50 V 0603  |
| C307 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C308 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C309 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C310 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C311 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C313 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C314 | 2320049 | Ceramic cap. | 39 p  | 5 % 50 V 0603  |
| C315 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C316 | 2310784 | Ceramic cap. | 100 n | 10 % 25 V 0805 |
| C317 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |
| C318 | 2320059 | Ceramic cap. | 100 p | 5 % 50 V 0603  |

|      |         |                              |       |                  |
|------|---------|------------------------------|-------|------------------|
| C319 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C320 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C321 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C322 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C323 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C324 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C325 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C327 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C329 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C350 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C351 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C352 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C353 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C354 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C355 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C356 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C357 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C358 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C359 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C360 | 2310784 | Ceramic cap.                 | 100 n | 10 % 25 V 0805   |
| C361 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C702 | 2320059 | Ceramic cap.                 | 100 p | 5 % 50 V 0603    |
| C703 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C704 | 2320035 | Ceramic cap.                 | 10 p  | 5 % 50 V 0603    |
| C705 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C706 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C707 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C709 | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603    |
| C710 | 2320025 | Ceramic cap.                 | 3.9 p | 0.25 % 50 V 0603 |
| C711 | 2320045 | Ceramic cap.                 | 27 p  | 5 % 50 V 0603    |
| C712 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C714 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C715 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C716 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C717 | 2604209 | Tantalum cap.<br>3.2x1.6x1.6 | 1.0 u | 20 % 16 V        |
| C718 | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603    |
| C719 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C720 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |
| C721 | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603    |

|             |         |               |       |                  |
|-------------|---------|---------------|-------|------------------|
| C722        | 2320027 | Ceramic cap.  | 4.7 p | 0.25 % 50 V 0603 |
| C725        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C727        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C728        | 2320055 | Ceramic cap.  | 68 p  | 5 % 50 V 0603    |
| C729        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C732        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C733        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C734        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |
| C735        | 2604209 | Tantalum cap. | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |       |                  |
| C736        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C738        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C739        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C740        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C741        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |
| C742        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C743        | 2320348 | Ceramic cap.  | 100 p | 2 % 50 V 0603    |
| C744        | 2320348 | Ceramic cap.  | 100 p | 2 % 50 V 0603    |
| C745        | 2310470 | Ceramic cap.  | 270 p | 5 % 50 V 0805    |
| C746        | 2310470 | Ceramic cap.  | 270 p | 5 % 50 V 0805    |
| C747        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C748        | 2320059 | Ceramic cap.  | 100 p | 5 % 50 V 0603    |
| C749        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C750        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C751        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C752        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C753        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C754        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C760        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C761        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C762        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C763        | 2320021 | Ceramic cap.  | 2.7 p | 0.25 % 50 V 0603 |
| C799        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C801        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C802        | 2320059 | Ceramic cap.  | 100 p | 5 % 50 V 0603    |
| C803        | 2310784 | Ceramic cap.  | 100 n | 10 % 25 V 0805   |
| C804        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C805        | 2320083 | Ceramic cap.  | 1.0 n | 5 % 50 V 0603    |
| C806        | 2604329 | Tantalum cap. | 4.7 u | 20 % 10 V        |
| 3.5x2.8x1.9 |         |               |       |                  |
| C807        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C808        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C809        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |
| C810        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C811        | 2320049 | Ceramic cap.  | 39 p  | 5 % 50 V 0603    |
| C812        | 2320063 | Ceramic cap.  | 150 p | 5 % 50 V 0603    |
| C813        | 2320055 | Ceramic cap.  | 68 p  | 5 % 50 V 0603    |
| C814        | 2320107 | Ceramic cap.  | 10 n  | 5 % 50 V 0603    |

|             |         |                |       |                  |
|-------------|---------|----------------|-------|------------------|
| C815        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C816        | 2307816 | Ceramic cap.   | 47 n  | 20 % 25 V 0805   |
| C817        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C818        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C819        | 2517801 | Electrol. cap. | 330 u | 20 % 25 V 10x10  |
| C820        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C821        | 2320027 | Ceramic cap.   | 4.7 p | 0.25 % 50 V 0603 |
| C822        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C823        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C824        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C825        | 2320019 | Ceramic cap.   | 2.2 p | 0.25 % 50 V 0603 |
| C826        | 2320035 | Ceramic cap.   | 10 p  | 5 % 50 V 0603    |
| C827        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |                |       |                  |
| C828        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C829        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C830        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C831        | 2604329 | Tantalum cap.  | 4.7 u | 20 % 10 V        |
| 3.5x2.8x1.9 |         |                |       |                  |
| C832        | 2320021 | Ceramic cap.   | 2.7 p | 0.25 % 50 V 0603 |
| C833        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C834        | 2320464 | Ceramic cap.   | 180 p | 5 % 50 V 0603    |
| C835        | 2320464 | Ceramic cap.   | 180 p | 5 % 50 V 0603    |
| C836        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C837        | 2320027 | Ceramic cap.   | 4.7 p | 0.25 % 50 V 0603 |
| C838        | 2320023 | Ceramic cap.   | 3.3 p | 0.25 % 50 V 0603 |
| C839        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C840        | 2320045 | Ceramic cap.   | 27 p  | 5 % 50 V 0603    |
| C841        | 2320035 | Ceramic cap.   | 10 p  | 5 % 50 V 0603    |
| C842        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C843        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C844        | 2604495 | Tantalum cap.  | 22 u  | 20 % 16 V        |
| 7.3x4.4x2.8 |         |                |       |                  |
| C845        | 2320107 | Ceramic cap.   | 10 n  | 5 % 50 V 0603    |
| C846        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C847        | 2320071 | Ceramic cap.   | 330 p | 5 % 50 V 0603    |
| C848        | 2604103 | Tantalum cap.  | 4.7 u | 20 % 35 V        |
| 7.3x4.4x2.8 |         |                |       |                  |
| C849        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C850        | 2604209 | Tantalum cap.  | 1.0 u | 20 % 16 V        |
| 3.2x1.6x1.6 |         |                |       |                  |
| C851        | 2320083 | Ceramic cap.   | 1.0 n | 5 % 50 V 0603    |
| C852        | 2320039 | Ceramic cap.   | 15 p  | 5 % 50 V 0603    |
| C853        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C854        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C855        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C856        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |
| C857        | 2320049 | Ceramic cap.   | 39 p  | 5 % 50 V 0603    |

|             |         |               |        |                  |
|-------------|---------|---------------|--------|------------------|
| C858        | 2320063 | Ceramic cap.  | 150 p  | 5 % 50 V 0603    |
| C859        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C863        | 2307816 | Ceramic cap.  | 47 n   | 20 % 25 V 0805   |
| C864        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C866        | 2604329 | Tantalum cap. | 4.7 u  | 20 % 10 V        |
| 3.5x2.8x1.9 |         |               |        |                  |
| C901        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C902        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C903        | 2604209 | Tantalum cap. | 1.0 u  | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C904        | 2320071 | Ceramic cap.  | 330 p  | 5 % 50 V 0603    |
| C905        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C906        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C907        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C908        | 2320043 | Ceramic cap.  | 22 p   | 5 % 50 V 0603    |
| C909        | 2320037 | Ceramic cap.  | 12 p   | 5 % 50 V 0603    |
| C910        | 2320041 | Ceramic cap.  | 18 p   | 5 % 50 V 0603    |
| C911        | 2320045 | Ceramic cap.  | 27 p   | 5 % 50 V 0603    |
| C912        | 2320071 | Ceramic cap.  | 330 p  | 5 % 50 V 0603    |
| C913        | 2320071 | Ceramic cap.  | 330 p  | 5 % 50 V 0603    |
| C914        | 2320031 | Ceramic cap.  | 6.8 p  | 0.25 % 50 V 0603 |
| C915        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C916        | 2604209 | Tantalum cap. | 1.0 u  | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C917        | 2604079 | Tantalum cap. | 0.22 u | 20 % 35 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C918        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C919        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C920        | 2604209 | Tantalum cap. | 1.0 u  | 20 % 16 V        |
| 3.2x1.6x1.6 |         |               |        |                  |
| C921        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C922        | 2320083 | Ceramic cap.  | 1.0 n  | 5 % 50 V 0603    |
| C923        | 2310209 | Ceramic cap.  | 2.2 n  | 5 % 50 V 1206    |
| C924        | 2320059 | Ceramic cap.  | 100 p  | 5 % 50 V 0603    |
| C925        | 2320059 | Ceramic cap.  | 100 p  | 5 % 50 V 0603    |
| C926        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C927        | 2320023 | Ceramic cap.  | 3.3 p  | 0.25 % 50 V 0603 |
| C928        | 2320021 | Ceramic cap.  | 2.7 p  | 0.25 % 50 V 0603 |
| C929        | 2320107 | Ceramic cap.  | 10 n   | 5 % 50 V 0603    |
| C930        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C931        | 2320027 | Ceramic cap.  | 4.7 p  | 0.25 % 50 V 0603 |
| C932        | 2320023 | Ceramic cap.  | 3.3 p  | 0.25 % 50 V 0603 |
| C933        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C934        | 2320021 | Ceramic cap.  | 2.7 p  | 0.25 % 50 V 0603 |
| C935        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C936        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C937        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |
| C938        | 2320049 | Ceramic cap.  | 39 p   | 5 % 50 V 0603    |

|             |         |                              |       |                    |
|-------------|---------|------------------------------|-------|--------------------|
| C939        | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603      |
| C940        | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603      |
| C941        | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603      |
| C942        | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603      |
| C943        | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603      |
| C944        | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603      |
| C945        | 2604329 | Tantalum cap.                | 4.7 u | 20 % 10 V          |
| 3.5x2.8x1.9 |         |                              |       |                    |
| C946        | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603      |
| C947        | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603      |
| C948        | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603      |
| C949        | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603      |
| C950        | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603      |
| C951        | 2320107 | Ceramic cap.                 | 10 n  | 5 % 50 V 0603      |
| C957        | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603      |
| C958        | 2320083 | Ceramic cap.                 | 1.0 n | 5 % 50 V 0603      |
| C959        | 2320049 | Ceramic cap.                 | 39 p  | 5 % 50 V 0603      |
| C960        | 2604209 | Tantalum cap.                | 1.0 u | 20 % 16 V          |
| 3.2x1.6x1.6 |         |                              |       |                    |
| L100        | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206  | 1206               |
| L101        | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206  | 1206               |
| L102        | 3640001 | Chip coil                    | 10 u  | 20 % 1 A 4.5x4x4.5 |
| L104        | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206  | 1206               |
| L105        | 3641262 | Ferrite bead 30r/100mhz 2a   | 1206  | 1206               |
| L200        | 3641302 | Chip coil                    | 470 n | 5 % Q=30/25 MHz 10 |
| L250        | 3606946 | Ferrite bead 0.2r 26r/100mhz | 1206  | 1206               |
| L701        | 3641522 | Chip coil                    | 6 n   | 20 % Q=50/250 MHz  |
| L702        | 3641522 | Chip coil                    | 6 n   | 20 % Q=50/250 MHz  |
| L703        | 3641558 | Chip coil                    | 8 n   | 10 % Q=50 0805     |
| L705        | 3641622 | Chip coil                    | 220 n | 5 % Q=30/100 MHz 0 |
| L706        | 3641550 | Chip coil                    | 120 n | 10 % Q=35/150 MHz  |
| L707        | 3641300 | Chip coil                    | 330 n | 5 % Q=30/25 MHz 10 |
| L708        | 3641300 | Chip coil                    | 330 n | 5 % Q=30/25 MHz 10 |
| L709        | 3641300 | Chip coil                    | 330 n | 5 % Q=30/25 MHz 10 |
| L710        | 3641300 | Chip coil                    | 330 n | 5 % Q=30/25 MHz    |
| L711        | 3641550 | Chip coil                    | 120 n | 10 % Q=35/150 MHz  |
| L713        | 3641306 | Chip coil                    |       | 5 % Q=33/25 MHz 10 |
| L715        | 3641526 | Chip coil                    | 12 n  | 10 % Q=45/250 MHz  |
| L801        | 3641558 | Chip coil                    | 8 n   | 10 % Q=50 0805     |
| L802        | 3641574 | Chip coil                    | 68 n  | 5 % Q=40/200 MHz   |
| L803        | 3641558 | Chip coil                    | 8 n   | 10 % Q=50 0805     |

|       |         |                                  |              |                     |
|-------|---------|----------------------------------|--------------|---------------------|
| L804  | 3641574 | Chip coil                        | 68 n         | 5 % Q=40/200 MHz 0  |
| L805  | 3641302 | Chip coil                        | 470 n        | 5 % Q=30/25 MHz 10  |
| L806  | 3641558 | Chip coil                        | 8 n          | 10 % Q=50 0805      |
| L807  | 3641526 | Chip coil                        | 12 n         | 10 % Q=45/250 MHz   |
| L901  | 3641306 | Chip coil                        |              | 5 % Q=33/25 MHz 10  |
| L902  | 3641574 | Chip coil                        | 68 n         | 5 % Q=40/200 MHz    |
| L903  | 3641302 | Chip coil                        | 470 n        | 5 % Q=30/25 MHz     |
| L904  | 3641520 | Chip coil                        | 3 n          | 20 % Q=50/250 MHz   |
| L905  | 3641574 | Chip coil                        | 68 n         | 5 % Q=40/200 MHz    |
| L906  | 3641520 | Chip coil                        | 3 n          | 20 % Q=50/250 MHz   |
| L907  | 3641558 | Chip coil                        | 8 n          | 10 % Q=50 0805      |
| L910  | 3641558 | Chip coil                        | 8 n          | 10 % Q=50 0805      |
| G901  | 4352804 | Vco 1006–1031mhz 4.5v/10ma       | gsm          | GSM                 |
| G902  | 4510038 | SM, VCTCXO 26mhz+–5ppm/–25c/+75c |              |                     |
| Z701  | 4512001 | Dupl 890–915/935–960mhz          | 39.7x14.8    | 39.7x14.8           |
| Z702  | 4550109 | Cer.filt 947.5+–12.5mhz          | 15.5x9.1     | 15.5x9.1            |
| Z703  | 4511026 | Saw filter                       | 71+–0.08 M   | 14.2x8.4            |
| Z704  | 4510009 | Cer.filt 13+–0.09mhz             | 7.2x3.2      | 7.2x3.2             |
| Z801  | 4550107 | Cer.filt 902.5+–12.5mhz          | 11.9x9.5     | 11.9x9.5            |
| Z802  | 4557001 | Cer.filt 902.5+–12.5mhz          | 4.8x3.5      | 4.8x3.5             |
| T700  | 3640415 | Rf–transf. ml 71–130mhz          | 0.1w 1206    | 1206                |
| T802  | 3640417 | Rf transf.ml 800/960mhz          | 0.2w 1206    | 1206                |
| V100  | 4107027 | Zener diode                      | BZX84        | 5 % 16V 0.3W        |
| SOT23 |         |                                  |              |                     |
| V101  | 4110074 | Schottky diode                   | STPS340U     | 40 V 3 A SOD6       |
| V102  | 4110014 | Sch. diode x 2                   | BAS70–07     | 70 V 15 mA SOT143   |
| V103  | 4106769 | Zener diode                      | BZX84        | 5 % 4.7V 0.3W       |
| SOT23 |         |                                  |              |                     |
| V104  | 4200917 | Transistor                       | BC848B/BCW32 | npn 30V100mA        |
| SOT23 |         |                                  |              |                     |
| V105  | 4200877 | Transistor                       | BCX51–16     | pnP 45 V 1.5 A      |
| SOT89 |         |                                  |              |                     |
| V106  | 4200877 | Transistor                       | BCX51–16     | pnP 45 V 1.5 A      |
| SOT89 |         |                                  |              |                     |
| V107  | 4110014 | Sch. diode x 2                   | BAS70–07     | 70 V 15 mA SOT143   |
| V108  | 4200877 | Transistor                       | BCX51–16     | pnP 45 V 1.5 A      |
| SOT89 |         |                                  |              |                     |
| V109  | 4110014 | Sch. diode x 2                   | BAS70–07     | 70 V 15 mA SOT143   |
| V110  | 4202456 | MosFet                           |              | p–ch 50 V 8 A TO252 |
| V111  | 4200917 | Transistor                       | BC848B/BCW32 | npn 30V100mA        |
| SOT23 |         |                                  |              |                     |
| V112  | 4103492 | Trans. supr.                     | 15V          | 400 A 5000 W        |

|               |         |                |              |                     |
|---------------|---------|----------------|--------------|---------------------|
| V113<br>SOT23 | 4107027 | Zener diode    | BZX84        | 5 % 16V 0.3W        |
| V115<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V117<br>SOT23 | 4200909 | Transistor     | BC858B/BCW30 | pnnp 30V100mA       |
| V118<br>SOT23 | 4107027 | Zener diode    | BZX84        | 5 % 16V 0.3 W       |
| V150<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V151<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V152<br>SOT23 | 4200909 | Transistor     | BC858B/BCW30 | pnnp 30V100mA       |
| V153<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V154<br>SOT89 | 4200877 | Transistor     | BCX51–16     | pnnp 45 V 1.5 A     |
| V155          | 4210017 | Transistor     | MJD3055      | npn 60 V 10 A TO252 |
| V156          | 4110014 | Sch. diode x 2 | BAS70–07     | 70 V 15 mA SOT143   |
| V157<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V158<br>SOT89 | 4200875 | Transistor     | BCX54–16     | npn 45 V 1.5 A      |
| V159          | 4210007 | Transistor     | MJD2955      | pnnp 60 V 10 A      |
| V160<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V161<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V162          | 4100285 | Diode x 2BAV99 | 70V200mA     | SER.SOT23           |
| V200          | 4110014 | Sch. diode x 2 | BAS70–07     | 70 V 15 mA SOT143   |
| V201          | 4210079 | Transistor     |              | SOT23               |
| V202          | 4210079 | Transistor     |              | SOT23               |
| V205<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V250<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V251<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V300          | 4110014 | Sch. diode x 2 | BAS70–07     | 70 V 15 mA SOT143   |
| V301<br>SOT23 | 4200917 | Transistor     | BC848B/BCW32 | npn 30V100mA        |
| V302<br>SOT23 | 4200909 | Transistor     | BC858B/BCW30 | pnnp 30V100mA       |
| V303          | 4102998 | Led            | Green        | 2.2 V 1206          |
| V304          | 4102998 | Led            | Green        | 2.2 V 1206          |
| V305<br>SOT23 | 4200909 | Transistor     | BC858B/BCW30 | pnnp 30V100mA       |



|                |         |                             |                |                    |
|----------------|---------|-----------------------------|----------------|--------------------|
| V306<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V307<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V308           | 4200875 | Transistor                  | BCX54-16       | npn 45V 1.5A SOT89 |
| V314<br>SOT23  | 4107027 | Zener diode                 | BZX84          | 5 % 16V 0.3W       |
| V315<br>SOT23  | 4107027 | Zener diode                 | BZX84          | 5 % 16V 0.3W       |
| V350           | 4117998 | Precision voltage reference | 4.096          | 4.096              |
| V701<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V702<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V703<br>SOT23  | 4200909 | Transistor                  | BC858B/BCW30   | pnP 30V100mA       |
| V704<br>SOT143 | 4210010 | Transistor                  | BFP183         | npn 12V65mA        |
| V705           | 4210299 | Transistor                  |                | CD745              |
| V706           | 4210299 | Transistor                  |                | CD745              |
| V707<br>SOT23  | 4200909 | Transistor                  | BC858B/BCW30   | pnP 30V100mA       |
| V708<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V709           | 4210299 | Transistor                  |                | CD745              |
| V801<br>SOT23  | 4200909 | Transistor                  | BC858B/BCW30   | pnP 30V100mA       |
| V802<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V803           | 4110014 | Sch. diode x 2              | BAS70-07       | 70 V 15 mA SOT143  |
| V805<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V806<br>SOT143 | 4210010 | Transistor                  | BFP183         | npn 12V65mA        |
| V807           | 4200909 | Transistor                  | BC858B/BCW30   | pnP 30 V100mA SOT  |
| V808           | 4210299 | Transistor                  |                | CD745*             |
| V809<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V810<br>SOT143 | 4210010 | Transistor                  | BFP183         | npn 12V65mA        |
| V811           | 4100285 | Diode x 2 BAV99             | 70V200mA       | SER.SOT23          |
| V813<br>SOT23  | 4200917 | Transistor                  | BC848B/BCW32   | npn 30V100mA       |
| V901           | 4110062 | Cap. diode BB535            | 30V 2.1/18.7PF | SOD323             |
| V902           | 4210299 | Transistor                  |                | CD745*****         |
| V903<br>SOT23  | 4200909 | Transistor                  | BC858B/BCW30   | pnP 30V100mA       |
| V904           | 4210010 | Transistor                  | BFP183         | npn 12V65mA        |

|        |         |                           |                         |                   |
|--------|---------|---------------------------|-------------------------|-------------------|
| SOT143 |         |                           |                         |                   |
| V905   | 4200917 | Transistor                | BC848B/BCW32            | npn 30V100mA      |
| SOT23  |         |                           |                         |                   |
| V906   | 4210010 | Transistor                | BFP183                  | npn 12V65mA       |
| SOT143 |         |                           |                         |                   |
| V907   | 4200917 | Transistor                | BC848B/BCW32            | npn 30V100mA      |
| SOT23  |         |                           |                         |                   |
| V908   | 4200917 | Transistor                | BC848B/BCW32            | npn 30V100mA      |
| SOT23  |         |                           |                         |                   |
| D200   | 4372212 | IC, ROM                   | DSP1616-X11             | TQFP100           |
| D201   | 4346012 | IC, SRAM                  | 32kx8 bit 70 ns         | TSO28             |
| D202   | 4346010 | IC, SRAM                  | 32kx8 bit 70 ns         | TSOP28            |
| D250   | 0240435 | IC, SWMCU                 | SW NME-2A               |                   |
| D251   | 4340146 | IC, flash mem.            |                         | TSO40             |
| D252   | 4346010 | IC, SRAM                  | 32kx8 bit 70 ns         | TSOP28            |
| D253   | 4342282 | M28c64C150 EEPROM         | 8KX8 150NSTSO2          | TSO28             |
| D300   | 4375070 | IC, ESA GSM/PCN ASIC      |                         | SQFP144           |
| D301   | 4340126 | IC, 1xnand 2input cmos    | TC7S00F                 | SSO5              |
| D302   | 4340126 | IC, 1xnand 2input cmos    | TC7S00F                 | SSO5              |
| N100   | 4375588 | IC, PSL+ power supply     |                         | SO24W             |
| N101   | 4340037 | IC, regulator             | LM2941S                 | LD<1 V 1 A TO263  |
| N102   | 4301182 | IC, 2 x op.amp.           | LM2902                  | SO14S             |
| N150   | 4343132 | IC, PCM coded/filter      | ST5080                  | SO28W             |
| N151   | 4301182 | IC, 2 x op.amp.           | LM2902                  | SO14S             |
| N152   | 4347948 | IC, 2 x op.amp.           | LM258                   | SO8S              |
| N350   | 4370015 | IC, ASIC                  |                         | SQFP64            |
| N701   | 4349630 | IC, v1.4 gsm receiver     | PMB2403s                | VSO24             |
| N702   | 4349648 | IC, if amp 100mhz         | W1466BBL                | SSO14             |
| N801   | 4301062 | IC, regulator             | LP2951AC                | SO8S              |
| N803   | 4340301 | IC, regulator             | TK11550M                | 5.0 V 0.13 A SO8S |
| N804   | 4345678 | IC, 2 x op.amp.           | MC33076                 | SO8S              |
| N805   | 4349706 | IC, modulator             | PMB2200S                | VSO20             |
| N807   | 4350085 | Slm-090a mixer            | 700-1000mhz             |                   |
| N808   | 4347948 | IC, 2 x op.amp.           | LM258                   | SO8S              |
| N901   | 4349660 | IC, PLL                   | PMB2306T                | SO14S             |
| N902   | 4349660 | IC, PLL                   | PMB2306T                | SO14S             |
| N903   | 4342474 | IC, prescaler             | SA701                   | SO8S              |
| N904   | 4340301 | IC, regulator             | TK11550M                | 5.0 V 0.13 A SO8S |
| N905   | 4350151 | IC, pow.amp.              | 12 V 16 W               | GSM               |
| N906   | 4350085 | Slm-090a                  | mixer                   | 700-1000mhz       |
| X002   | 4510044 | Crystal                   | 60.2 M                  |                   |
| X100   | 5469009 | System conn               | 16pol                   | 2x8 stackered     |
| X102   | 5430001 | Conn d25m kit met.        | bkt 4-40                | 90deg             |
| X103   | 5400033 | Sim card reader           | ccm04-5003              | 6pol              |
| X104   | 5420011 | Connector mini uhf 90'deg |                         | <2.5GHZ           |
| P001   | 9854082 | Printed Wiring board GM8  | 184.5x135.9x1.6 m6 1/pa |                   |