



For more Hi-Fi manuals and set-up information
please visit www.hifiengine.com

ONKYO® SERVICE MANUAL

SUPER SERVO OPERATION INTEGRATED STEREO AMPLIFIER MODEL A-7070


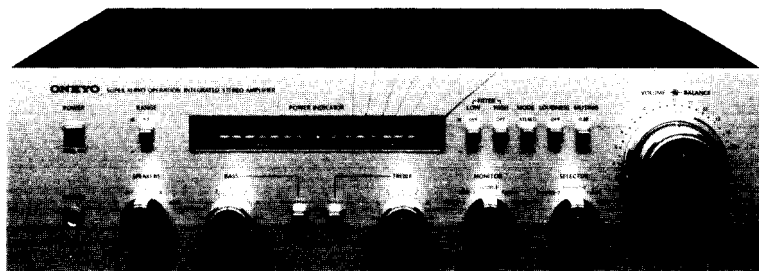


TABLE OF CONTENTS

| ITEM | PAGE |
|----------------------------------|------|
| Specifications | 2 |
| Precautions | 2 |
| Voltage conversion | 2 |
| Block diagram | 3 |
| Circuit description | 3 |
| Component location | 5 |
| Exploded view | 5 |
| PC board view | 7 |
| Schematic diagram | 9 |
| Printed circuit board-parts list | 11 |
| Packing procedures | 12 |

ONKYO®
AUDIO COMPONENTS

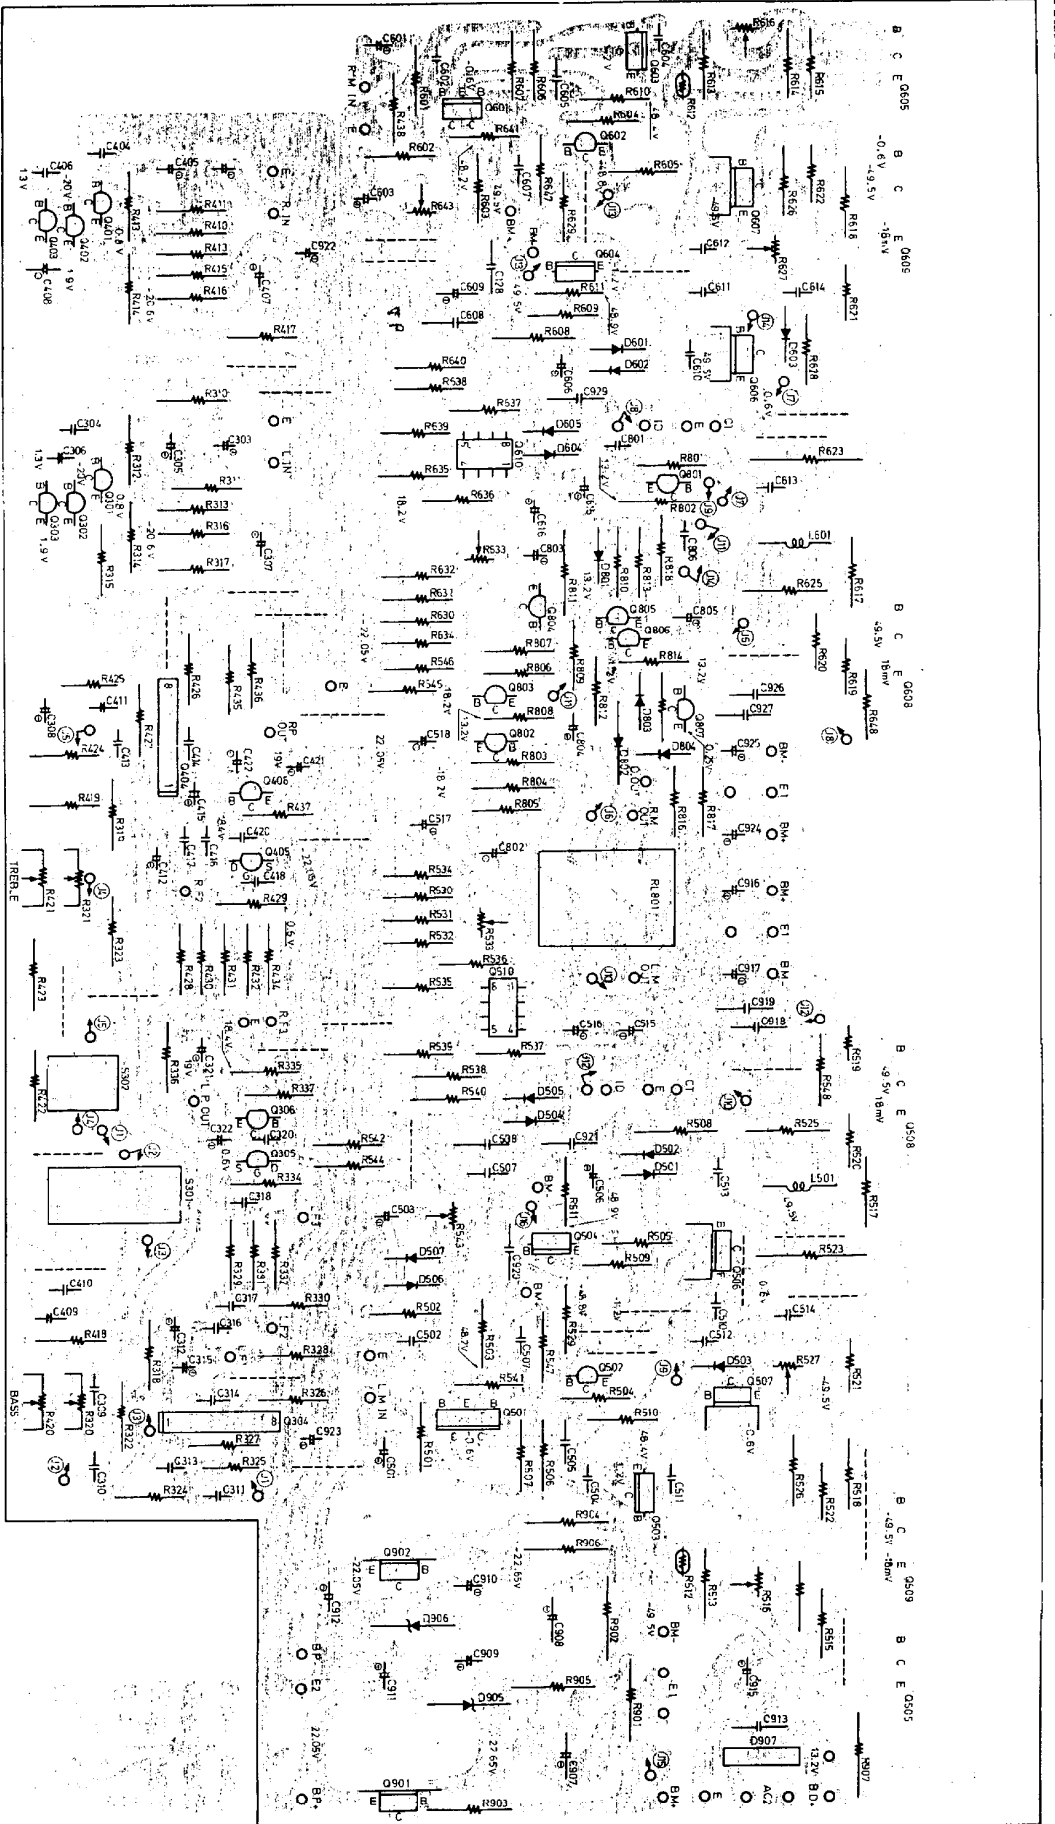

POWER AMPLIFIER ADJUSTMENT

1. Set the all control knobs to standard position.

Standard knob position
 SELECTOR..... AUX
 TAPES MONITOR..... SOURCE
 VOLUME..... MAXIMUM
 BALANCE, BASS/TREBLE..... CENTER
 MODE..... STEREO
 Muting, Loudness, Low Fil./Hi Fil..... OFF
 BASS/TREBLE SHIF..... DEFEAT
 SPEAKER..... A



1. IDLING CURRENT ADJUSTMENT

1. Connect the DC voltmeter between I10 and V_{CT} terminals.
 2. Adjust the voltage to 0.92±0.02V with semi-fixed resistor of R516 and R616
- NOTES: Adjust after switching on for 5 minutes.
 Minimum, Open load

2. SERVO OPERATIONAL AMPLIFIER ADJUSTMENT

1. Place the short circuit across TP terminals of servo operational circuit.
2. Connect the DC voltmeter between V_{CT} and E terminals and confirm the voltage within 0-0.7mV.
3. Remove the short circuit
4. Adjust the voltage to 0±0.1mV with semi-fixed resistor of R733 and R633

3. CURRENT DETECTOR LEVEL ADJUSTMENT



Differentiation Circuit

Apply a tone burst signal to the TAPF-1 terminal, connect a 2 ohm hollow resistor to the speaker terminal and adjust variable resistor R573 and R637 so that the relay is operated at maximum volume. Confirm that the relay is not operated when the 3 ohm hollow resistor is connected.

4. OUTPUT INDICATOR LEVEL ADJUSTMENT

1. Connect the AF oscillator across AUX terminal and AC voltmeter across speaker terminals.
2. Connect the hollow resistor of 8 ohm across speaker terminal. (A)
3. Set the AF oscillator output to 100mV.
4. Adjust the output voltage to 2.3 TV with volume control.
5. Then adjust the semi-fixed resistor of R725 and R726 to light up 7th L.E.D.

NOTES: Adjust after switching on for 5 minutes.
 VOLUME..... Maximum

SPECIFICATIONS

| | |
|--|--|
| Power Output: | 70 watts per channel, min. RMS, at 8 ohms both channels driven, from 20 Hz to 20 kHz, with no more than 0.02% total harmonic distortion. |
| Total Harmonic Distortion: | 0.02% at rated power 0.018% at 1 watt output |
| IM Distortion: | 0.02% at rated power 0.018% at 1 watt output |
| (60 Hz: 7 kHz = 4:1) Frequency Response: | 15 ~ 50,000 Hz (± 1 dB) |
| RIAA Deviation: | 20 ~ 20,000 Hz (± 0.3 dB) |
| Damping Factor: | 50 at 8 ohms |
| Input Sensitivity and Impedance: | PHONE 1 & 2: 2.5mV, 50 kohms TUNER: 150mV, 50 kohms AUX: 150mV, 50 kohms TAPE PLAY 1 & 2: 150mV, 50 kohms |
| Phono Overload: | 200 mV RMS. at 1 kHz, 0.02% THD |
| Tone Control | |
| BASS: | ± 10 dB at 100 Hz (turn over at 400 Hz) |
| TREBLE: | ± 10 dB at 10 kHz (turn over at 2 kHz) |
| Turnover Frequency: | BASS: 400 Hz TREBLE: 2 kHz |
| Filter | LOW: 100 Hz (12 dB/oct.) HIGH: 6 kHz (12 dB/oct.) |

| | |
|------------------------|---|
| Signal to noise ratio: | PHONO: 80 dB (IHF A Network) AUX: 90 dB (IHF A Network) |
| Muting: | -20 dB |
| Loudness: | (-40 dB) +5 dB at 100 Hz +5 dB at 10 kHz |
| Range: | (Ind. switch) $\times 1$ and $\times 0.1$ |
| GENERAL | |
| Power Supply Rating: | AC 120V, 50 Hz (120V model) AC 110, 120, 220/240V, 50, 60Hz |
| Outputs: | SPEAKER A & B, PHONES, TAPE REC 1 & 2 |
| Inputs: | PHONO 1 & 2 TUNER AUX TAPE PLAY 1 & 2 |
| Semiconductors: | 2 FETs, 35 Transistors, 10 ICs, 26 Diodes |
| Dimensions: | 418(W) \times 124(H) \times 396(D) mm 16-1/2" \times 4-15/16" \times 15-5/8" |
| Weight: | 10.3 kg (22.7 lbs.) |

Specifications and features are subject to change without notice for improvement.

PRECAUTIONS

- For continued protection against fire hazard, replace only with same type and same rating fuse.

| | | PARTS NO. |
|---------|-----------|-------------------------|
| AC fuse | 5A (ST-6) | 252050 (110/120V model) |
| | 3A-T | 252003 (220/240V model) |



- Replacement for power amplifier transistors, if necessary, must be made from the same beta (h_{FE}) group as the original type.
- Always disconnect the chassis from power line when soldering.
Turning the power switch OFF is not enough.
Power line leakage passing through the heating element may destroy the transistors.

VOLTAGE CONVERSION (Universal model)


This model is equipped with a universal power transformer to permit operation at either power source of 110, 120, 220 or 240V AC 50/60Hz.

To convert the unit to a different power source voltage, change the plug as illustrated in the drawing below.


CAUTION: DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.




For 110V Operation



For 120V Operation




For 220V Operation



For 240V Operation

BLOCK DIAGRAM

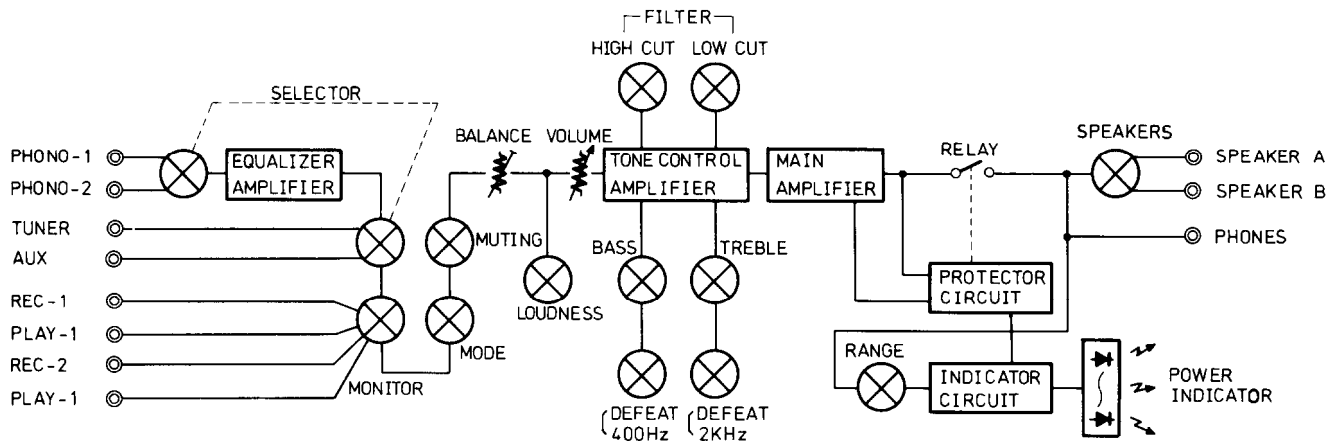

CIRCUIT DESCRIPTION

1. SERVO OPERATIONAL AMPLIFIER

In order to achieve a greater degree of fidelity in waveform transmission, and to remove the large capacitance capacitors (which have questionable effect on the quality of sound) from the NFB, DC amplifier designs are being more and more widely used in amplifiers today. The A-7070, however, has advanced even further by adopting the recently developed Servo Operational Amplifier which features a truly superb quality of sound, and performs considerably better than the now conventional DC amplifiers.

The major circuit feature of the Servo Operational Amplifier (see outline in Fig. 1-1) is the servo feedback loop which has no effect whatsoever on the main signal. In other words, if the signal feedback factor is β_1 and the servo feedback factor β_2 , the $0 \cong \beta_2 \ll \beta_1 \ll 1$ relation holds true within the signal bandwidth, while $\beta_2 \gg 1$ holds true in the subsonic region down to DC. For this purpose, a servo feedback amplifier was necessary. And since it was also necessary to include a high-cut filter, and suppress signal amplifier drift at higher DC gain plus 1/f noise and other subsonic region components, a -6dB/oct high-cut mirror integrating circuit (see Fig. 1-2) has been employed. The V_{ref} in Fig. 1-1 serves as the input voltage required to keep the system output DC voltage at 0V.

In the block diagram for the actual Servo Operational amplifier (see Fig. 1-3), R_f and R_B constitute the signal feedback loop, while A2 and A3 form the servo feedback loop.

Assuming that $A_1, A_2, A_3 \gg 1$, the input/output characteristics $T(\omega)$ may be expressed as,

$$T(\omega) = \frac{R_N(R_f + R_B)}{A_2 \cdot R_f \cdot R_B} \left[\frac{1 + \frac{j\omega}{\omega_1}}{1 + \frac{j\omega}{\omega_2}} \right]$$

where $\omega_0 = \frac{1}{CR}$, $\omega_1 = \frac{\omega_0}{A_2}$, $\omega_2 = \frac{R_f}{R_N} \omega_0$

The frequency response is as shown in Fig. 1.4, ω_2 being about 0.3Hz ~ 2Hz. A3 is phase inverted in order to prevent positive feedback in the DC region.

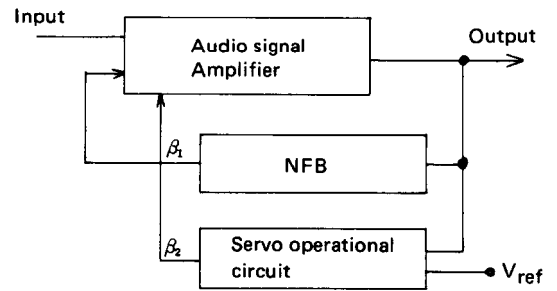


Fig. 1.1

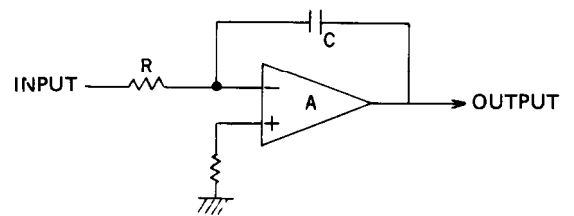


Fig. 1.2

Hence, the subsonic frequencies are effectively cut just as if by coupling capacitor. But unlike capacitors, the output impedance of the servo operational amplifier decreases at lower frequencies (coupling capacitor impedance increases at corresponding frequencies) due to a greater amount of feedback. Since, however, in actual circuits the second stage is driven at a suitable impedance level, and the output impedance of the amplifier itself is made sufficiently large enough (to improve stability) by connecting a resistance γ_0 in series, the output impedance is kept constant at γ_0 with coupling capacitors, on the other hand, the increased impedance at lower frequencies naturally results in an increase in thermal noise (directly related to effective impedance) in the low frequency region.

Although servo feedback circuit integrating capacitors of large leakage current, or high DC resistance and inductance are undesirable, the effects are nowhere near as serious as the insertion of a capacitor in the signal path.

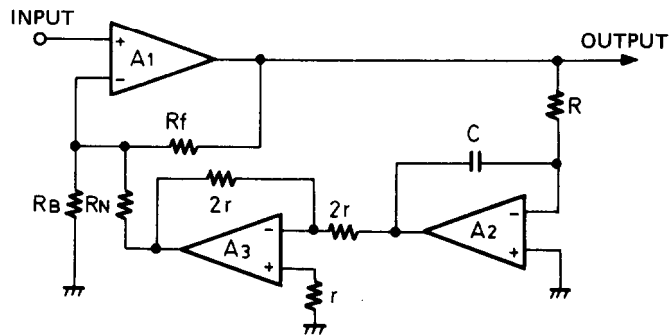


Fig 1.3

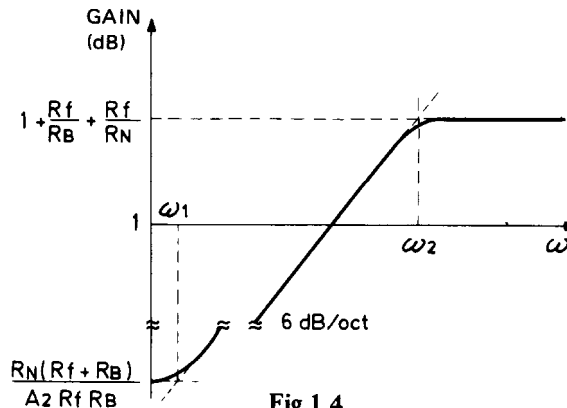


Fig 1.4


2. OUTPUT INDICATOR DRIVER CIRCUIT

Q701 (Q702) and Q703 (Q704) are the power indicator driver ICs. The audio signal applied to pin no.3 of Q701 is first amplified and then applied to the comparator. The LEDs connected to the IC output terminals pin nos.9 ~ 13 are lit up in succession depending on the comparator level. With the inclusion of a second IC, Q703, in the A-7070 the number of power indicator LEDs has been increased to 8.

The Q701 amplifier output, pin no.14, is connected to pin no.14 of Q703, while pin no.6 of Q701 is connected to pin no.4 of Q703, thereby using the comparator divider resistance in a cascade connection. The amplifier circuit in Q703 is not required, so pin no.1 is left open, and pin nos.2 and 3 are connected to ground. The corresponding LEDs will thus light up in succession from D705, D707, and D709, again depending on the comparator level.

The connection from pin no.14 to pin no.1 in Q701 is part of a feedback loop where the feedback resistor R725 (22kΩ) determines the gain of the amplifier, and is consequently used in the adjustment of indicator level.

Pin no.2 of Q701 is connected to the protector circuit. So when the protector circuit is activated as a result of some abnormality in the amplifier circuitry, and for the first 4 seconds (approx.) after the power is switched on, the speaker relay is activated. All of the indicator LEDs light up in unison, and the audio output signal is muted.

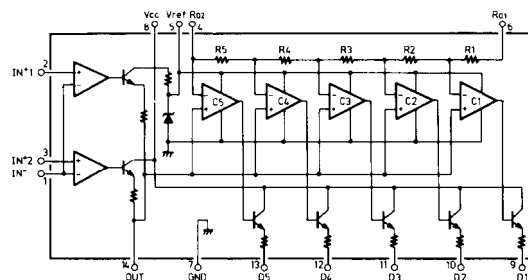

LB1416 EQUIVALENT DIAGRAM

COMPONENT LOCATION – PARTS LIST

120V model

| REF. NO. | CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|----------|-------------|----------------------------------|--|
| 1 | U1 | 12659521 | NAEQ-621, Equalizer ampli. p.c.b. |
| 2 | U2 | 12659522 | NASW-622, Switch p.c.b. |
| 3 | U3 | 12659523 | NASW-623, Switch p.c.b. |
| 4 | U4 | 12659524 | NAVR-624, Volume control p.c.b. |
| 5 | U5 | 12659525 | NAAF-625, Preampli., power ampli., rectifier and protection circuit p.c.b. |
| 6 | U6 | 12659526 | NASW-626, Switch p.c.b. |
| 7 | U7 | 12659527 | NAME-627, Output indicator driver p.c.b. |
| 8 | U8 | 12659529 | NADIS-629, Output indicator p.c.b. |
| 9 | U9 | 12659530 | NAPS-630, Rectifier p.c.b. |
| 10 | Q505, Q605 | 2211256 2211255 or 2210746 | 2SC1815(BL), 2SC1815 (GR) or Thermo ampli. 2SC945A(P) transistor |
| 11 | Q508, Q608 | 2201012 2201013 or | 2SD745(R) or Power ampli. 2SD745(Q) transistor |
| 12 | Q509, Q609 | 2201022 2201023 or | 2SB705(R) or Power ampli. 2SB705(Q) transistor |
| 13 | PL001 | 210057 | PL6.3V, 0.15A, Power indicator lamp |
| 14 | T001 | 230279 | NPT-666D, Power transformer |
| 15 | C001 | 3504012 | UL125V, 103M, UL capacitor |
| 16 | R001, R002 | 441723314 | 330Ω, 2W, Metal oxide film resistor |
| 17 | S001 | 25035135 25035138 or | NPS-111-L100P NPS-111-L103P or Power switch |
| 18 | S002 | 25030124 | NRSM-244-35Y, Speaker selector switch |
| 19 | P001 | 25045018 | LJ-100-H, Stereo headphone jack |
| 20 | P002 | 25060008 | Ground terminal |
| 21 | P003, P004 | 25060029 | NTM-4PRMN05, Speaker terminal |
| 22 | P005-P007 | 25050032 | S-I6444-01, AC outlet |
| 23 | W001 | 253099 | AS-UC-3, Power supply cord |
| 24 | W001a | 270025 | SR-3P-4, Strainrelief |
| 25 | F001 | 252050 | 5A, ST-6, AC fuse |
| 26 | F001a | 250080 | S-N1301, Fuseholder |
| 27 | S003 | 25030125 | NRSM-104-35ZV, Operation block of selector switch |
| 28 | S003a | 25065083 | Wire block of selector switch |
| 29 | S004 | 25030126 | NRSM-105-35ZV, Operation block of tape monitor switch |
| 30 | S004a | 25065084 | Wire of tape monitor switch |
| 32 | A001 | 27110078 | Front bracket |
| 34 | A003 | 27190043A | Holder |
| 35 | A004 | 28130074 | Plate, output indicator |
| 36 | A014 | 27115043A | Side bracket |
| 37 | A015 | 27140267 | Bracket for pc board |
| 38 | A016 | 27160051 | Radiator |
| 40 | A018 | 27130148 | Bracket for power transformer |
| 41 | A019 | 27140268 | Bracket |
| 42 | A031 | 27120155 | Back panel |
| 43 | A032 | 27150096A | Shielded palte for equalizer ampli. |

Universal model


| REF. NO. | CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|----------|-------------|----------------------------------|--|
| 1 | U1 | 12660521A | NAEQ-621a, Equalizer ampli. p.c.b. |
| 2 | U2 | 12659522 | NASW-622, Switch p.c.b. |
| 3 | U3 | 12659523 | NASW-623, Switch p.c.b. |
| 4 | U4 | 12659524 | NAVR-624, Volume control p.c.b. |
| 5 | U5 | 12659525 | NAAF-625, Preampli., power ampli., rectifier and protection circuit p.c.b. |
| 6 | U6 | 12659526 | NASW-626, Switch p.c.b. |
| 7 | U7 | 12659527 | NAME-627, Output indicator driver p.c.b. |
| 8 | U8 | 12659529 | MADIS-629, Output indicator p.c.b. |
| 9 | U9 | 12656530 | NAPS-630, Rectifier p.c.b. |
| 10 | Q505, Q605 | 2211256 2211255 or 2210746 | 2SC1815(BL), 2SC1815 (GR) or Thermo ampli. 2SC945A(P) transistor |
| 11 | Q508, Q608 | 2201012 2201013 or | 2SD745(R) or Power ampli. 2SD745(Q) transistor |
| 12 | Q509, Q609 | 2201022 2201023 or | 2SB705(R) or Power ampli. 2SB705(Q) transistor |
| 13 | PL001 | 210057 | PL6.3V, 0.15A, Power indicator lamp |
| 14 | T001 | 230280 | NPT-666ADGQ, Power transformer |
| 15 | C001, C002 | 3500052 | PME271Y510CEE, IS capacitor |
| 16 | R001, R002 | 441723314 | 330Ω, 2W, Metal oxide film resistor |
| 17 | S001 | 25035051 | NPS-121-L16P, Power switch |
| 18 | S002 | 25030124 | NRSM-244-35Y, Speaker selector switch |
| 19 | P001 | 25045018 | LJ-100-H, Stereo headphone jack |
| 20 | P002 | 25060008 | Ground terminal |
| 21 | P003, P004 | 25060029 | NTM-4PRMN05, Speaker terminal |
| 23 | | 25050018 | PA-125, 3P Inlet |
| 25 | F001 | 252003 252050 | 3A-T, AC fuse (220/240V model) 5A, ST-6 AC fuse (110/120V model) |
| 26 | F001a | 25050021 | X-I7240, Voltage selector sokcet |
| 27 | S003 | 25030125 | NRSM-104-35ZV, Operation block of selector switch |
| 28 | S003a | 25065083 | Wire block of selector switch |
| 29 | S004 | 25030126 | NRSM-105-35ZV, Operation block of tape monitor switch |
| 30 | S004a | 25065084 | Wire of tape monitor switch |
| 32 | A001 | 27110078 | Front bracket |
| 34 | A003 | 27190043A | Holder |
| 35 | A004 | 28130074 | Plate, output indicator |
| 36 | A014 | 27115043A | Side bracket |
| 37 | A015 | 27140267 | Bracket for pc board |
| 38 | A016 | 27160051 | Radiator |
| 39 | A017 | 223012 | RH-14, Bracket |
| 40 | A018 | 27130148 | Bracket for power transformer |
| 41 | A019 | 27140268 | Bracket |
| 42 | A031 | 27120156 | Back panel |
| 43 | A032 | 27150096A | Shielded plate for equalizer ampli. |

EXPLODED VIEW – PARTS LIST


| REF. NO. | PARTS NO. | DESCRIPTION |
|----------|-----------|---|
| 1 | 12659121 | Front panel ass'y (2, 3) |
| 2 | 27210121 | Front panel |
| 3 | 28191037 | Glass, output indicator |
| 4 | 27267048A | Guide, power switch |
| 5 | 27267049A | Guide, push switch (Push switch button ass'y (5, 6, 7) (P.N 1369125)) |
| 6 | 27180037 | Spring, push switch |
| 7 | 28320318 | Push switch button |
| 8 | 28180038 | Spring, power switch |
| 9 | 28320319 | Power switch button |
| | | Power switch ass'y (7, 8, 9) (P.N 1369126) |
| 10 | 28320310 | Volume control knob |
| 11 | 28320311 | Balance control knob |
| 12 | 28320312 | Tone control knob |

| REF. NO. | PARTS NO. | DESCRIPTION |
|----------|-----------|-----------------------------|
| 13 | 28320314 | Selector switch knob |
| 14 | 834130062 | 3STS+6BQ, Tapping screw |
| 15 | 27170054 | Bottom board |
| 16 | 27175009 | Leg |
| 17 | 831130162 | 3STW+16BQ, Tapping screw |
| 18 | 831130082 | 3STW+8BQ, Tapping screw |
| 19 | 28184051 | Top cover |
| | 28140020 | 4t x 10 x 40mm, Cushion |
| 20 | 838440109 | 4TTB+10C(BC), Tap screw |
| 21 | 834430062 | 3STS+6BQ(BC), Tapping screw |
| 22 | 28130074 | Plate, output indicator |
| 23 | 27190043A | Holder |

COMPONENT LOCATION

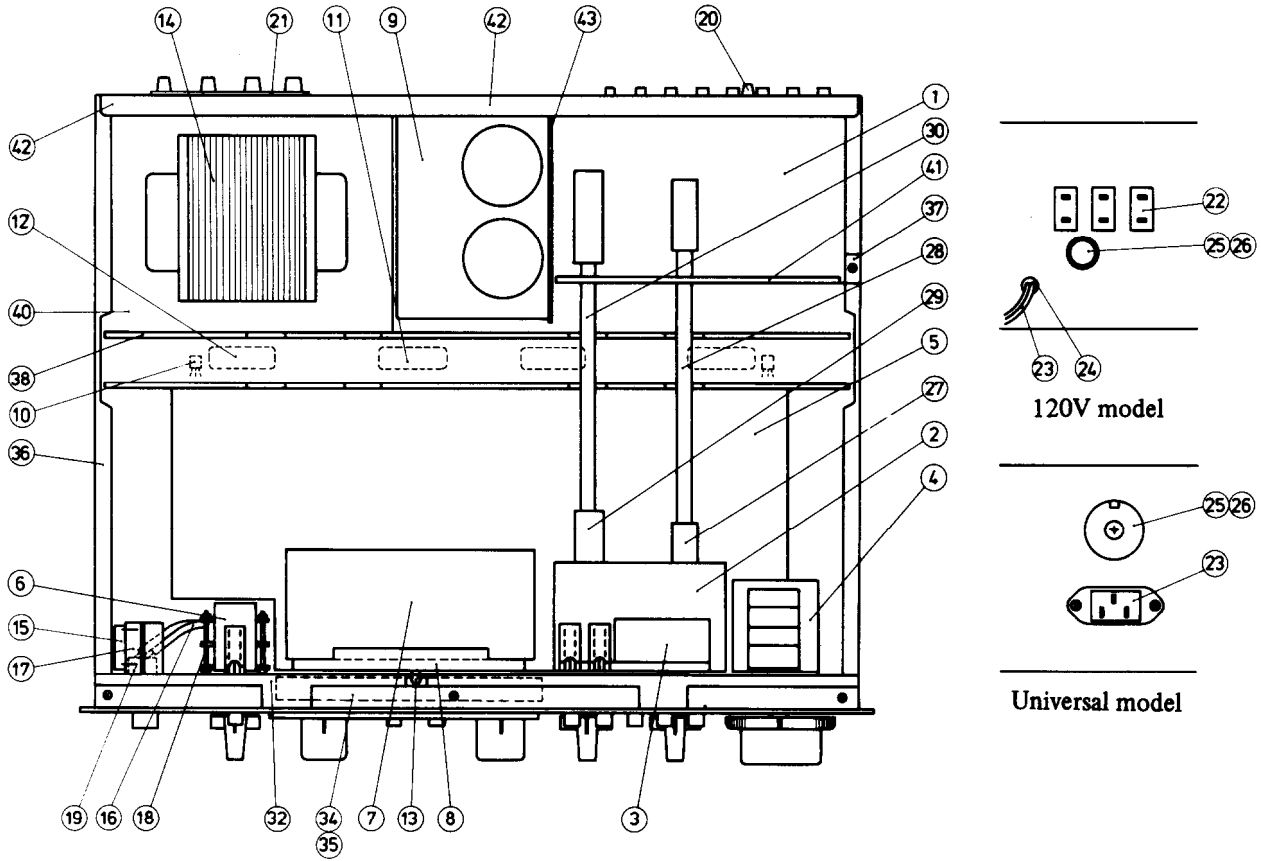

EXPLODED VIEW

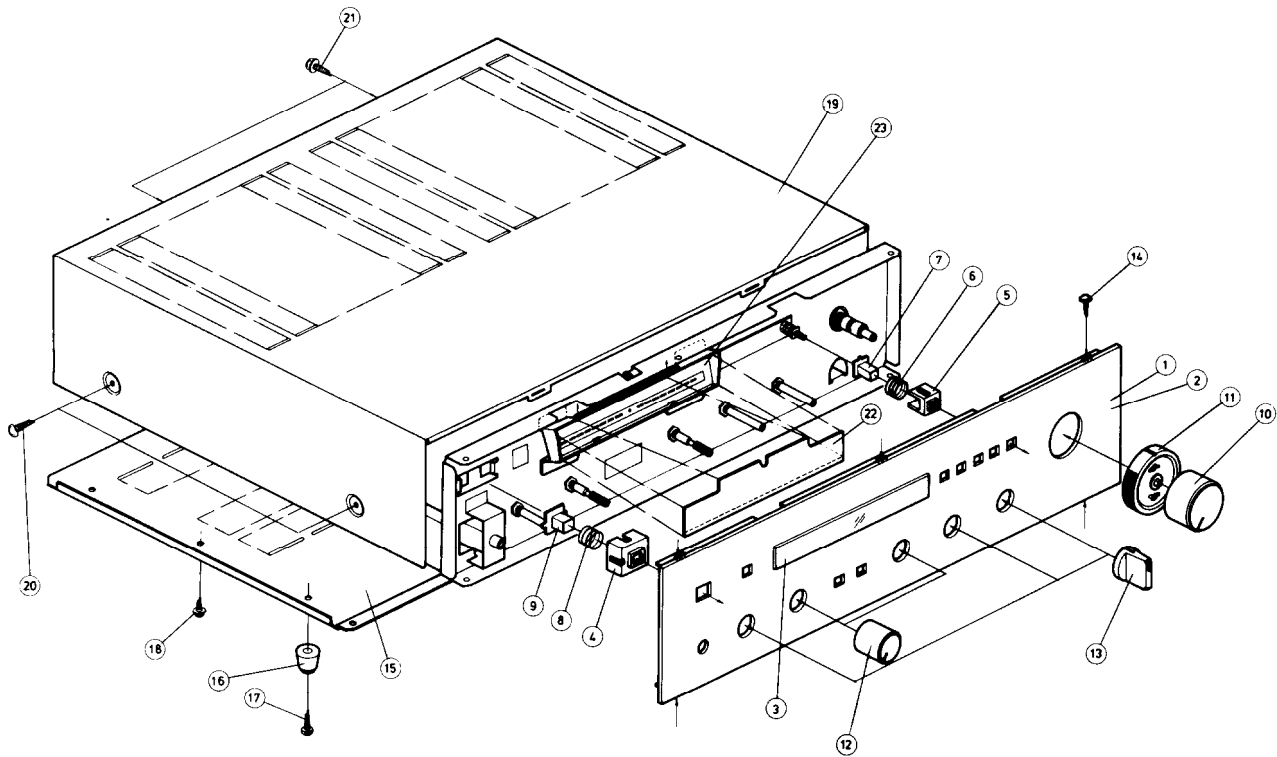

PRINTED CIRCUIT BOARD - PARTS LIST

EQUALIZER AMPLIFIER PC BOARD (NAEQ-621) - PARTS LIST 120V model

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-------------------|--------------------------|
| | ICs | |
| Q101, Q201 | 222471 | HA-1457 |
| | Capacitors | |
| C101, C201 | 392880227 | 2.2 μ F, 50V, LL |
| C104, C204 | 352734701 | 47 μ F, 10V, Elect. |
| C109, C209 | 392880107 | 1 μ F, 50V, LL |
| C930, C931 | 352780331 | 3.3 μ F, 50V, Elect. |
| | Terminals | |
| P101, P102 | 25045041 | NPJ-6PDBL18 |
| P103 | 25045020 | NPJ-4PDBL11 |
| | Switches | |
| S101 | 25065081 | NSS-4445, Selector |
| S102 | 25065082 | NSS-6646, Tape monitor |

EQUALIZER AMPLIFIER PC BOARD (NAEQ-621a) - PARTS LIST Universal model

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-------------------|--------------------------|
| | ICs | |
| Q101, Q201 | 222471 | HA-1457 |
| | Capacitors | |
| C101, C201 | 392880227 | 2.2 μ F, 50V, LL |
| C104, C204 | 352734701 | 47 μ F, 10V, Elect. |
| C109, C209 | 392880107 | 1 μ F, 50V, LL |
| C930, C931 | 352780331 | 3.3 μ F, 50V, Elect. |
| | Terminals | |
| P101, P102 | 25045041 | NPJ-6PDBL18 |
| P103 | 25045020 | NPJ-4PDBL11 |
| | Switches | |
| S101 | 25065081 | NSS-4445, Selector |
| S102 | 25065082 | NSS-6646, Tape monitor |

SWITCH PC BOARD (NASW-622) - PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-------------------|--|
| | Capacitors | |
| C319, C419 | 372328214 | 820pF \pm 5%, 50V, ST |
| | Switches | |
| S301-S305 | 25035111 | NPS-522-L76, Low-cut/High-cut/Mode/Loudness/Muting |

VOLUME CONTROL PC BOARD (NAVR-624) - PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-----------|---|
| R308, R408 | 5104078 | N24RDQ41C500KMN100KBTP35H, Volume/Balance control variable resistor |
| R309, R409 | | |

PREAMPLI., POWER AMPLI., AND PROTECTION CIRCUIT PC BOARD (NAAF-625) - PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|--------------------|--------------------------|
| | ICs | |
| Q304, Q404 | 222471 | HA-1457 |
| Q510, Q610 | 222502 | NJM4558DX |
| | Transistors | |
| Q301, Q401 | 2211782 or 2211783 | 2SA991(F) or 2SA991(E) |
| Q302, Q402 | 2211732 or 2211733 | 2SC1845(F) or 2SC1845(E) |
| Q303, Q403 | 2211792 or 2211793 | 2SA992(F) or 2SA992(E) |
| Q305, Q405 | 2211303 | 2SK68(A) (M) |
| Q306, Q406 | 2211792 or 2211793 | 2SA992(F) or 2SA992(E) |


| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|------------------------|--------------------------------------|--|
| Q501, Q601 | 2211372 or 2211371 | 2SC2259(G) or 2SC2259(F) |
| Q502, Q602 | 2211732 or 2211733 | 2SC1845(F) or 2SC1845(E) |
| Q503, Q603 | 2211742 or 2211743 | 2SA915(L) or 2SA915(M) |
| Q504, Q604 | 2211762 or 2211763 | 2SC1940(L) or 2SC1940(M) |
| Q505, Q605 | 2211256, -2211255 or 2210746 | 2SC1815(BL), 2SC1815(GR) or 2SC945A(P) |
| Q506, Q606 | 2201042 | 2SD381(L) |
| Q507, Q607 | 2201052 | 2SB536(L) |
| Q508, Q608 | 2201012 or 2201013 | 2SD745(R) or 2SD745(Q) |
| Q509, Q609 | 2201022 or 2201023 | 2SB705(R) or 2SB705(Q) |
| Q801 | 2211405, 2211406, 2211802 or 2211803 | 2SC2240(GR), 2SC2240(BL), 2SC1841(F) or 2SC1841(E) |
| Q802, Q803 | 2211255, 2211256 or 2210746 | 2SC1815(GR), 2SC1815(BL) or 2SC945(A)P |
| Q804 | 2210803 | 2SA733(P) |
| Q805 | 2211255, 2211256 or 2210746 | 2SC1815(GR), 2SC1815(BL) or 2SC945(A)P |
| Q806 | 2211163, 2211164, 2211772 or 2211771 | 2SC2120(O), 2SC2120(Y), 2SC2001(L) or 2SC2001(K) |
| Q807 | 2211225, 2211256 or 2210746 | 2SC1815(GR), 2SC1915(BL) or 2SC945(A)P |
| Q901 | 2200663, 2200664, 2201042 or 2201043 | 2SC1626(O), 2SC1626(Y), 2SD381(L) or 2SD381(M) |
| Q902 | 2200673, 2200674, 2201052 or 2201053 | 2SA816(O), 2SA816(Y), 2SB536(L) or 2SB536(M) |
| | Diodes | |
| D501, D502, D601, D602 | 4000031 | M8513A(O) |
| D503-D505 | 223105 | 1S1555 |
| D603-D605 | | |
| D801, D803 | 223105 | 1S1555 |
| D804 | | |
| D802 | 223802 or 223849 | 1S1885 or ERB12-01 |
| D905 | 224069 | 05Z22U |
| D906 | 224069 | 05Z22U |
| D907 | 223853 | MI-151 |
| | Coils | |
| S501, S601 | 231001 | S-1.3B |
| | Capacitors | |
| C303, C403 | 392880227 | 2.2 μ F, 50V, LL |
| C305, C405 | 352723311 | 330 μ F, 6.3V, Elect. |
| C307, C407 | 352721011 | 100 μ F, 6.3V, Elect. |
| C308, C408 | 352750471 | 4.7 μ F, 25V, Elect. |
| C312, C412 | 352741001 | 10 μ F, 16V, Elect. |
| C315, C415 | 392850477 | 4.7 μ F, 25V, LL |
| C321, C421 | 352721011 | 100 μ F, 6.3V, Elect. |
| C322, C422 | 352780221 | 2.2 μ F, 50V, Elect. |
| C506, C606 | 352780331 | 3.3 μ F, 50V, Elect. |
| C509, C609 | 352780471 | 4.7 μ F, 50V, Elect. |
| C513, C613 | 374124735 | 0.047 μ F \pm 10%, 50V, DE |
| C515, C516 | 392853307 | 33 μ F, 25V, LL |
| C615, C616 | 392853307 | 33 μ F, 25V, LL |
| C517, C518 | 352753311 | 330 μ F, 25V, Elect. |
| C802 | 352724711 | 470 μ F, 6.3V, Elect. |
| C803 | 352743301 | 33 μ F, 16V, Elect. |
| C804 | 352780331 | 3.3F, 50V, Elect. |
| C805 | 352741011 | 100 μ F, 16V, Elect. |
| C907 | 352782211 | 220 μ F, 50V, Elect. |
| C908 | 352782211 | 220 μ F, 50V, Elect. |
| C909, C910 | 352751011 | 100 μ F, 25V, Elect. |
| C911, C912 | 352752211 | 220 μ F, 25V, Elect. |
| C915 | 352741021 | 1,000 μ F, 16V, Elect. |

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|------------------|-----------|--|
| C916, C917 | 352770471 | 4.7μF, 63V, Elect. |
| C922, C923 | 352780331 | 3.3μF, 50V, Elect. |
| C924, C925 | 352770471 | 4.7μF, 6.3V, Elect. |
| Resistors | | |
| R320, R420 | 5148033 | N16RGM11C50KB35, Bass control variable |
| R321, R421 | 5148033 | N16RGM11C50KB35, Treble control variable |
| R512, R612 | 4000003 | D22A, Thermistor |
| R516, R616 | 5225026 | N10HR470BD, Semi-fixed |
| R517, R617 | 441521514 | 150Ω, 1/2W, M.O.F. |
| R518, R618 | 441521514 | 150Ω, 1/2W, M.O.F. |
| R519, R619 | 4000049 | 0.27Ω, 5W, Metal plate |
| R520, R620 | 4000047 | 0.47Ω, 5W, Metal plate |
| R521, R621 | 4000047 | 0.47Ω, 5W, Metal plate |
| R522, R622 | 4000049 | 0.27Ω, 5W, Metal plate |
| R523, R624 | 451730564 | 5.6Ω, 2W, Metal |
| R525, R625 | 451630564 | 5.6Ω, 1W, Metal |
| R527, R627 | 5225005 | N10HR2.2KBD, Semi-fixed |
| R533, R633 | 5225070 | N10HR2.2KBDM, Semi-fixed |
| R903, R904 | 441521514 | 150Ω, 1/2W, M.O.F. |
| R907 | 441623314 | 330Ω, 1W, M.O.F. |
| Radiators | | |
| | 27160029 | RAD-07 |
| | 27160011 | RAD-05 |
| Relay | | |
| RL801 | 25065085A | NRL-2PSA-DC12-03 |
| Switches | | |
| S301, S302 | 25035110 | NPS-122-142-L75, Tone defeat |

SWITCH PC BOARD (NASW-626) – PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-----------|--|
| S701 | 25035109 | NPS-122-L74, Output level indicator attenuator |

PACKING PROCEDURES

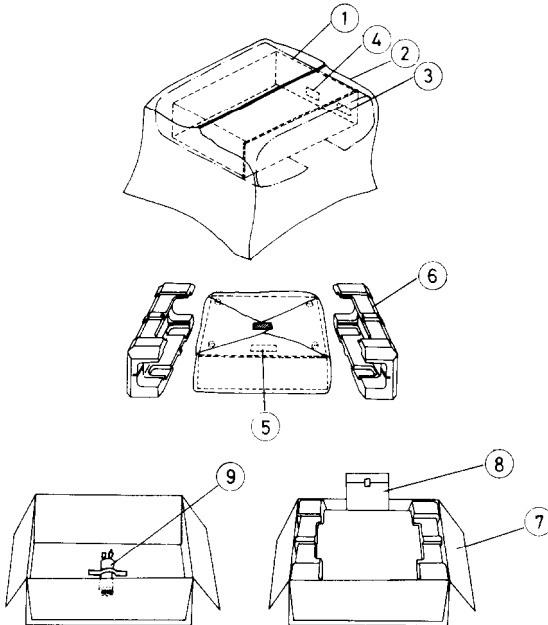

OUTPUT INDICATOR DRIVER PC BOARD (NAME-627) – PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|------------------|--|
| Q701-Q702 | 222564 | LB-1416ONK(R), Power indicator driver IC |
| Q703, Q704 | 222539 | LB-1416, Power indicator driver IC |
| D701, D702 | 223105 | 1S1555, Diode |
| D703 | 224042 or 224043 | 05Z6.2L or 05Z6.2U, Diode |
| C701, C702 | 352751001 | 10μF, 25V, Elect. capacitor |
| C705-C706 | 352750471 | 4.7μF, 25V, Elect. |
| C707-C710 | 352741001 | 10μF, 16V, Elect. |
| C711, C712 | 352750471 | 4.7μF, 25V, Elect. |
| R725, R726 | 5225089 | N10HR30KBC, Semi-fixed resistor |
| R735, R736 | 441625604 | 56Ω, 1W, M.O.F. resistor |

OUTPUT INDICATOR PC BOARD (NADIS-629) – PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-----------|-----------------|
| D705-D718 | 225028 | GL-9PG59, L.E.D |
| D719, D720 | 225029 | GL-9PR9, L.E.D |
| D721 | 225018 | GL-2PR1, L.E.D |

RECTIFIER PC BOARD (NAPS-630) – PARTS LIST

| CIRCUIT NO. | PARTS NO. | DESCRIPTION |
|-------------|-----------|---------------------------------|
| D901-D904 | 223841 | GP-30G, Diode |
| C905, C906 | 3504117 | 21,000μF, 55V, Elect. capacitor |

NOTES:

- Capacitors
 - LL: Low leakage current type electrolytic capacitor
 - DE: Non-inductive polyester film capacitor
 - ST: Polystren film capacitor
- Resistors
 - MOF: Metal oxide film resistor

| REF. NO. | PARTS NO. | DESCRIPTION |
|------------------------|------------|---------------------------------|
| 1 | 29100036 | 850 x 550mm, Poly bag |
| 2 | 29095012 | 500 x 800mm, Protection sheet |
| 3 | 29380040 | Cabinet composite label (USA) |
| 4 | 282969 | Caution label (A) (USA) |
| 5 | 293041 | Caution label (USA) |
| 6 | 29090398 | Pad |
| 7 | 29050268 | Carton box |
| 8 | | Accessory bag complete |
| U.S.A. model | | |
| | 29340313 | Instruction manual |
| | 29365006 | Warranty card |
| | 29358002 | S. S list |
| | 29100006 | 250 x 350mm, Poly bag |
| Universal model | | |
| | 29340314 | Instruction manual |
| | 25055018 | Conversion plug |
| | 252020 | 5A-7T, Fuse |
| | 29100002 | 150 x 80 mm Poly bag for fuse |
| | 29100006 | 250 x 350mm, Poly bag |
| Germany model | | |
| | 29340314 | Instruction manual |
| | 29365005-1 | Warranty card |
| | 29100006 | 250 x 350mm, Poly bag |
| 9 | | Power supply cord (UU) |
| | 253089 | AS-VDE-C, Power supply cord (G) |
| | 29380038 | Voltage tag |
| NOTE: | (USA): | U.S.A. model |
| | (UU): | Universal model |
| | (G): | Germany model |

ONKYO CORPORATION

International Division: No. 24 Mori Bldg., 23-5, 3-chome, Nishi-Shinbashi, Minato-ku, Tokyo, Japan
 Telex: 2423551 ONKYO J. Phone: 03-432-6981

ONKYO U.S.A. CORPORATION

Eastern Office
 42-07 20th Avenue, Long Island City, New York 11105, U.S.A. Phone: (212) 728-4639
 Midwest Office

935 Sivert Drive, Wooddale, Illinois 60191, U.S.A. Phone: (312) 595-2970

ONKYO DEUTSCHLAND GMBH, ELECTRONICS

8034 München-Germering, Industriestrasse 18, West Germany. Telex: 521726 Telefon: (089)-84-5041