


TX-29AD70DP Service Manual

Safety
Specifications
Parts List
Service Information
Adjustments
Self Check
Service Hints
Mechanical View
Disassembly
Location of Controls
Waveforms



Block Diagrams

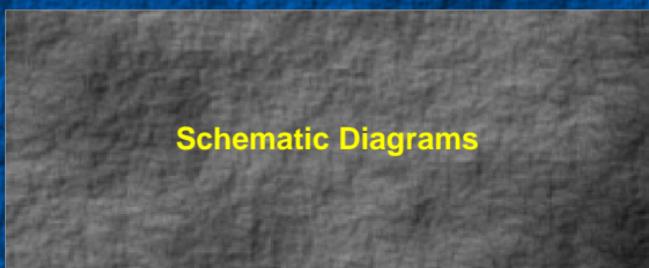

Schematic Diagrams



PCB Views

Service Support

Service and repair of this product is supported by Panasonic's LUCI interface.

This interface provides a link between the TV and a standard PC to allow a number of diagnostic and control functions to be performed.

For more details contact your local Panasonic company.



BACK

EXIT

B1 - PCB

C - PCB

B1 - Schematic

C - Schematic

D - PCB

E - PCB

D - Schematic

E - Schematic

F - PCB

H - PCB

F - Schematic

H - Schematic

J - PCB

K - PCB

J - Schematic

K - Schematic

M2 - PCB

Y - PCB

M2 - Schematic

Y - Schematic



BACK



BACK

Video / Audio

Control

Dolby

BACK

Service Manual



Colour Television

TX-29AD70DP EURO-3H Chassis

SPECIFICATIONS

Power Source :	220–240V AC, 50Hz
Power Consumption :	200W
Standby Power Consumption :	1W
Aerial Impedance :	75Ω unbalanced, Coaxial Type
Receiving System :	PAL-I, PAL – 525/60 MNTSC, NTSC (AV Only)
Receiving Channels :	UHF E21 – E69
Intermediate Frequency :	
Video	39.5 MHz
Sound	33.5 MHz
	32.95 MHz
Colour	35.07 MHz
Video / Audio Terminals :	
Dolby Surround Out	Audio(RCA x 5) 500mV rms, 1kΩ
AV1 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin)
AV1 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ
AV2 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y : 1V p-p 75Ω (21 pin) C : 0.3V p-p 75Ω
AV2 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ Selectable Output (21 Pin)

AV3 IN	S-Video IN Y : 1V p-p 75Ω (4-pin) C : 0.3V p-p 75Ω Audio (RCA x 2) 500mV rms, 10kΩ Video (RCA x 1) 1V p-p 75Ω 30.5kV ± 1kV (zero beam current) A68EHM69X73T 68 cm
High Voltage :	
Picture Tube :	
Audio Output :	
Internal Speakers	2 x 20W (Left/Right) (Music Power) 25W (3D Woofer) (Music Power)
External Speakers	2 x 15W (Surround) (Music Power) 20W (Center) (Music Power)
Headphones	8Ω Impedance
Accessories supplied :	8Ω Impedance Remote Control 2 x R6 (UM3) Batteries TS-350DP Video Cab / Spkr Pack

Dimensions :

Height :	570 mm
Width :	698 mm
Depth :	483 mm

Net Weight :

44kg

Specifications are subject to change without notice.
Weight and dimensions shown are approximate.

Panasonic CS (U.K.) Ltd.
WILLOUGHBY ROAD,
BRACKNELL,
BERKS,
RG12 8FT.

CONTENTS

SAFETY PRECAUTIONS
SERVICE HINTS
SERVICE MODE
ADJUSTMENT PROCEDURE
SELF CHECK
ALIGNMENT SETTINGS
WAVEFORM PATTERN TABLE
BLOCK DIAGRAMS
PARTS LOCATION
REPLACEMENT PARTS LIST
CONDUCTOR VIEWS
SCHEMATIC DIAGRAMS

SAFETY PRECAUTIONS

GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the AC supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the AC outlet.
5. Potentials as high as 31.5kV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the picture tube to the chassis before handling the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazards.

LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis the reading must be infinite.

LEAKAGE CURRENT HOT CHECK

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a $2\text{k}\Omega 10\text{W}$ resistor in series with an exposed metallic part on the receiver and an earth such as a water pipe.

3. Use an AC voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed Metallic part and check the voltage at each point.
5. Reverse the AC plug at the outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 1.4 Vrms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

HOT CHECK CIRCUIT

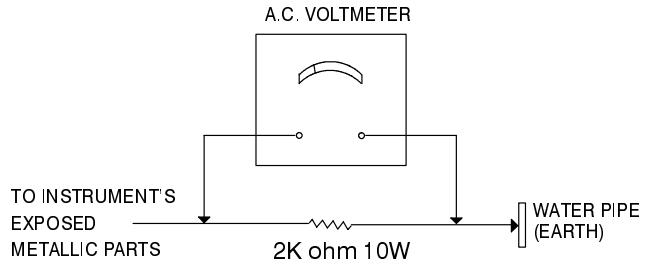


Fig.1

X-RADIATION WARNING

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service ensure that the jig is capable of handling 31.5kV without causing X-Radiation.

NOTE : It is important to use an accurate periodically calibrated high voltage meter

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate $30.5\text{kV} \pm 1\text{kV}$ if the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X-Radiation possibility, it is essential to use the specified tube.

SERVICE HINTS

HOW TO REMOVE THE REAR COVER

1. Remove the 9 screws (A) as shown in Fig.2/Fig.3.


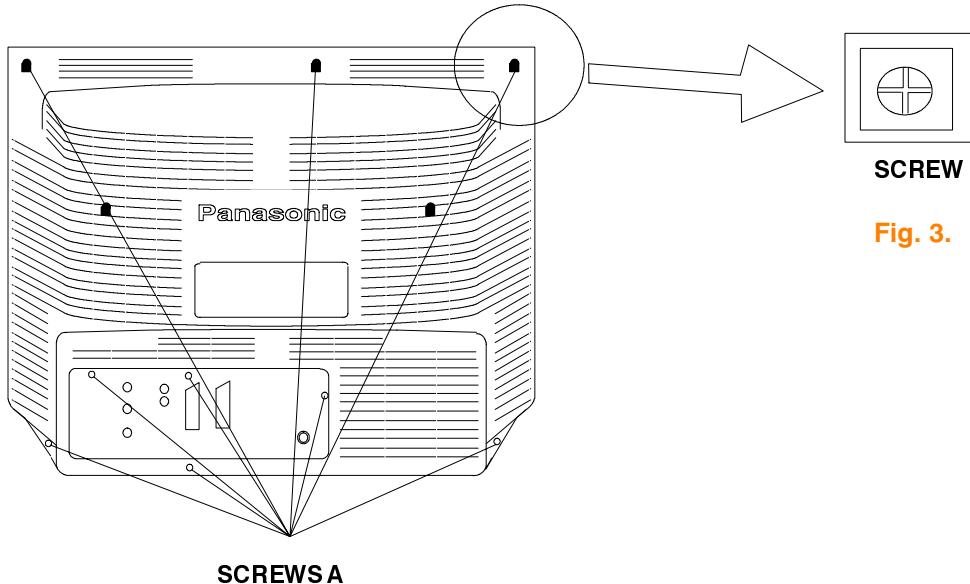


Fig. 2.

Fig. 3.

LOCATION OF CONTROLS

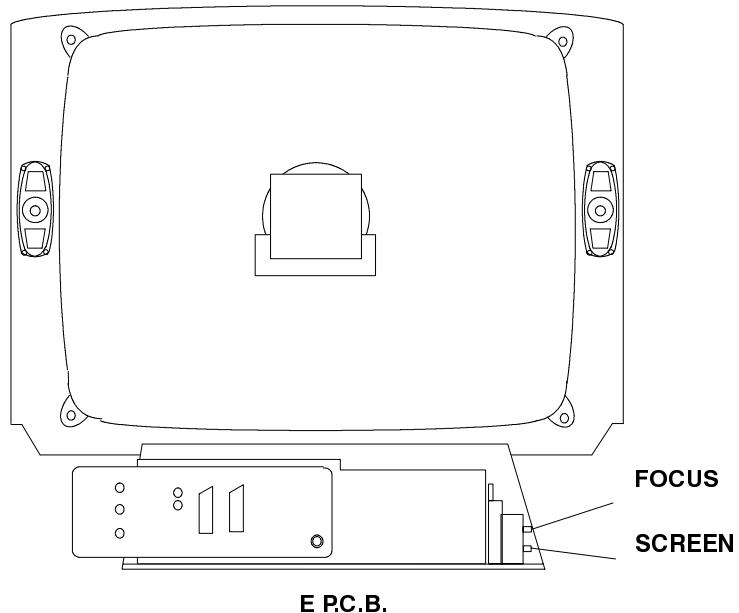

E P.C.B.

Fig. 4.

SERVICE MODE

The remote control is used for entering and storing adjustments, with the exception of cut-off adjustments which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the CCU variants as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the Reveal button on the remote control and at the same time press the Volume down on the customer controls at the front of the TV, this will place the TV into the Service Mode.
2. Press the RED / GREEN buttons to step down / up through the functions.
3. Press the YELLOW / BLUE buttons to alter the function values.
4. Press the STORE button on the preset panel after each adjustment has been made to store the required values.
5. To exit the Service Mode press the Normalisation button.


NOTE: This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels and analogue levels into the Memory Pack and then upload them onto another EURO-3H TV set.

USING THE MEMORY PACK

TV to Memory Pack process


1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:-

3. Press the blue button on the remote control. The screen will show:-

4. Press the STORE button on the TV. The screen will show:-


5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2-3 minutes to complete and when finished the screen will show:-


Memory Pack to TV Process


1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:-

3. Press the STORE button on the TV. The screen will show:-

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2-3 minutes to complete and when finished the screen will show:-

5. The tuning information from the Memory Pack has now been copied into the TV
6. To exit from the Service Mode switch off the TV.
7. The process has now been completed and the Memory Pack can now be removed.

Errors

If an error occurs while using the Memory Pack the TV will detect this and the screen will show:-



If this happens then switch off the TV and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

SERVICE MODE


The remote control is used for entering and storing adjustments, with the exception of cut-off adjustments which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the CCU variants as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the Reveal button on the remote control and at the same time press the Volume down on the customer controls at the front of the TV, this will place the TV into the Service Mode.
2. Press the RED / GREEN buttons to step down / up through the functions.
3. Press the YELLOW / BLUE buttons to alter the function values.
4. Press the STORE button on the preset panel after each adjustment has been made to store the required values.
5. To exit the Service Mode press the Normalisation button.

NOTE: This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels and analogue levels into the Memory Pack and then upload them onto another EURO-3H TV set.

USING THE MEMORY PACK


TV to Memory Pack process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:-

3. Press the blue button on the remote control. The screen will show:-

4. Press the STORE button on the TV. The screen will show:-


5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2-3 minutes to complete and when finished the screen will show:-


Memory Pack to TV Process


1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:-

3. Press the STORE button on the TV. The screen will show:-

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2-3 minutes to complete and when finished the screen will show:-

5. The tuning information from the Memory Pack has now been copied into the TV
6. To exit from the Service Mode switch off the TV.
7. The process has now been completed and the Memory Pack can now be removed.

Errors

If an error occurs while using the Memory Pack the TV will detect this and the screen will show:-



If this happens then switch off the TV and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

Alignment Settings

(The figures used below are nominal and used for representative purposes only)

Alignment Function		Settings / Special features
Vertical amplitude	V-AMP 038	Optimum setting
Vertical linearity	V-LIN 022	
V-Pos.	V-POS 005	Optimum setting
Horizontal amplitude	H-AMP 043	Optimum setting
Horizontal position	H-POS 035	
EW-amplitude	E/W-AMP 1 020	Optimum setting
EW-amplitude	E/W-AMP 2 015	Optimum setting
Trapezium-comp	TRAPEZ-1 004	Optimum setting
Vert. DC.	VERT. D.C. 008	Not to be adjusted.
Text Position	TEXT POSITION 060	Optimum setting
Cutoff	---	Enter Service Mode and step through to Cutoff, connect an oscilloscope to the Blue Cathode and adjust the screen VR of the FBT to get $150 \pm 5V$ at the base of the Cutoff pulse.
Cutoff RGB	CUTOFF RGB 032 032 032	Press the GREEN button to step through the settings. Adjust for optimum.
White RGB	WHITE RGB 032 032 032	Press the GREEN button to step through the settings. Adjust for optimum.
Sub Brightness	SUB BRIGHT 000	Optimum setting

ADJUSTMENT PROCEDURE

Item/Preparation	Adjustments																				
Supply Voltage Check <ol style="list-style-type: none"> 1. Receive a standard test pattern 2. Set the controls: Brightness Minimum Contrast Minimum Volume Minimum 	<p>1. Confirm the following voltages.</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; width: 30%;">E PCB</th> <th style="text-align: right; width: 30%;">D PCB</th> </tr> </thead> <tbody> <tr> <td>U5B 5 ± 0.5V</td> <td>U5A 5.1 + 0.12/-0.1V</td> </tr> <tr> <td>U8A 8 ± 0.5V</td> <td>U5SB 5 ± 0.25V</td> </tr> <tr> <td>U9 9 ± 0.5V</td> <td>TP1 15 ± 0.7V</td> </tr> <tr> <td>U12 11.8 ± 0.5V</td> <td>U16 16.1 ± 0.8V</td> </tr> <tr> <td></td> <td>U22 22.5 ± 1V</td> </tr> <tr> <td></td> <td>U38 19 ± 1V</td> </tr> <tr> <td></td> <td>TP2 47.5 ± 2.5V</td> </tr> <tr> <td></td> <td>U150 150 ± 1V</td> </tr> <tr> <td></td> <td>U200 204 ± 10V</td> </tr> </tbody> </table>	E PCB	D PCB	U5B 5 ± 0.5V	U5A 5.1 + 0.12/-0.1V	U8A 8 ± 0.5V	U5SB 5 ± 0.25V	U9 9 ± 0.5V	TP1 15 ± 0.7V	U12 11.8 ± 0.5V	U16 16.1 ± 0.8V		U22 22.5 ± 1V		U38 19 ± 1V		TP2 47.5 ± 2.5V		U150 150 ± 1V		U200 204 ± 10V
E PCB	D PCB																				
U5B 5 ± 0.5V	U5A 5.1 + 0.12/-0.1V																				
U8A 8 ± 0.5V	U5SB 5 ± 0.25V																				
U9 9 ± 0.5V	TP1 15 ± 0.7V																				
U12 11.8 ± 0.5V	U16 16.1 ± 0.8V																				
	U22 22.5 ± 1V																				
	U38 19 ± 1V																				
	TP2 47.5 ± 2.5V																				
	U150 150 ± 1V																				
	U200 204 ± 10V																				

SELF CHECK

Self check is used to automatically check the Bus lines and Hexadecimal code of the TV set.

To enter the Self Check mode press Function down button, on the Preset Panel, at the same time pressing the Status button, on the Remote Control, and the screen will show:-

When exiting Self Check the customer settings will return to factory setup.

0 — ok	Test Byte	8 — ok	Col Decoder (M)	16 — --	Col Decoder (P)	Hex codes
1 — ok	Lst Power	9 — ok	Clock generator	17 — --	Q - PIP	00
2 — ok	U5 Det	10 — ok	V - Processor	18 — ok	Not Used	70
3 — ok	Protector	11 — ok	DFU	19 — ok	Not Used	EE
4 — ok	Not Used	12 — ok	Display Processor	20 — ok	EAROM	41
5 — ok	Not Used	13 — ok	RGB Processor	21 — ok	Audio Matrix	10
6 — ok	Not Used	14 — ok	Deflection IC	22 — ok	Video Matrix	A8
7 — ok	Not Used	15 — ok	MSP	23 — ok	Tuner	04


If the CCU ports have been checked and found to be incorrect or not located then "—" will appear in place of "OK".

WAVEFORM PATTERN TABLE


NOTE: All waveforms have been taken using a standard colour bar pattern.

RED DRIVE TPY1	GREEN DRIVE TPY2	BLUE DRIVE TPY3
RED OUTPUT IC 603 PIN 24	GREEN OUTPUT IC 603 PIN 22	BLUE OUTPUT IC 603 PIN 20
HORIZONTAL SYNC IC 3501 PIN 4	VERTICAL SYNC IC 3501 PIN 3	VERT OUTPUT IC (INPUT) IC 451 PIN 1
LUMINANCE IN IC601 PIN 26	CHROMINANCE IN IC601 PIN 25	VERTICAL OUTPUT (DRIVE) IC 451 PIN 9
HORIZONTAL OUTPUT IC401 PIN 20		


VIDEO AND AUDIO SIGNAL PROCESSING BLOCK DIAGRAM

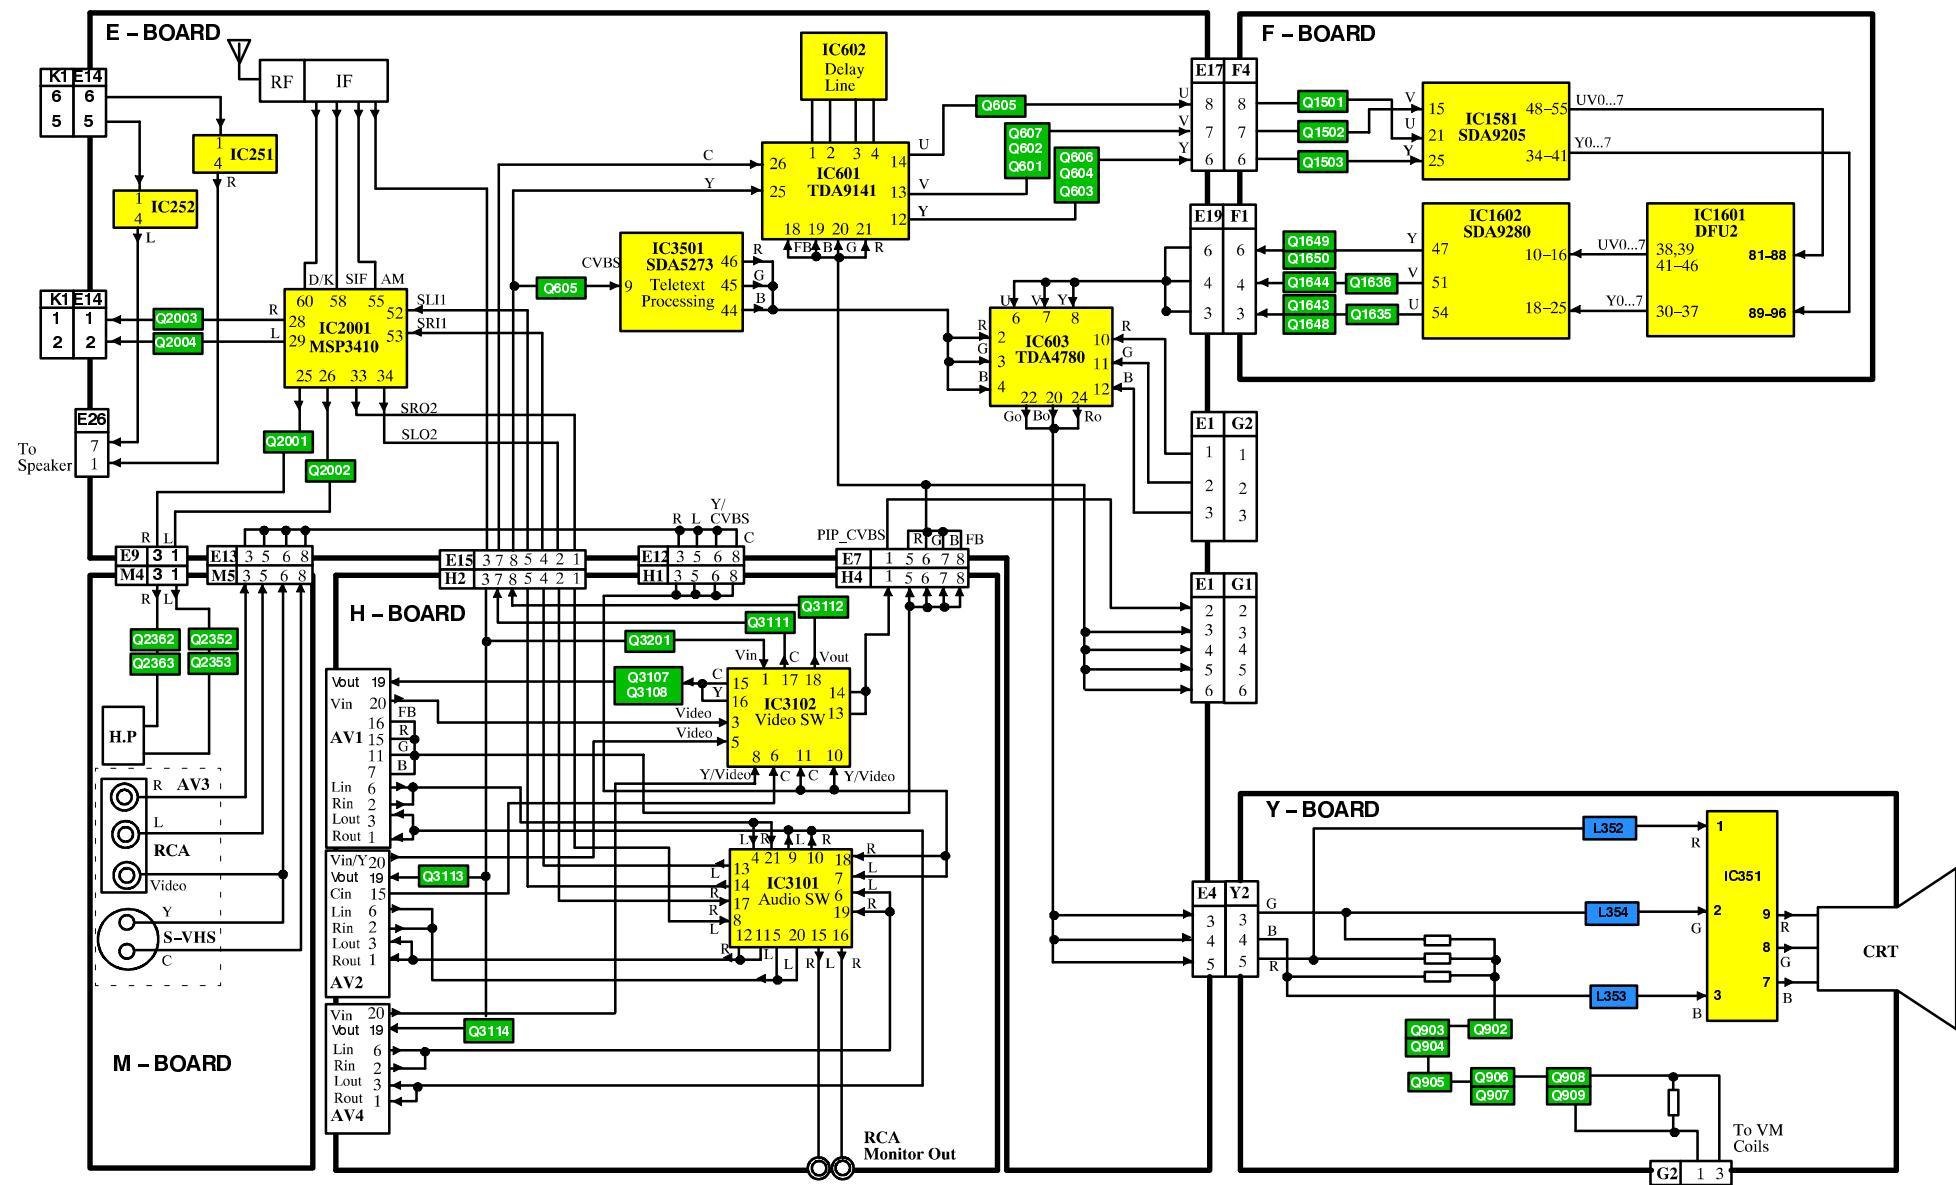

CONTROL BLOCK DIAGRAM

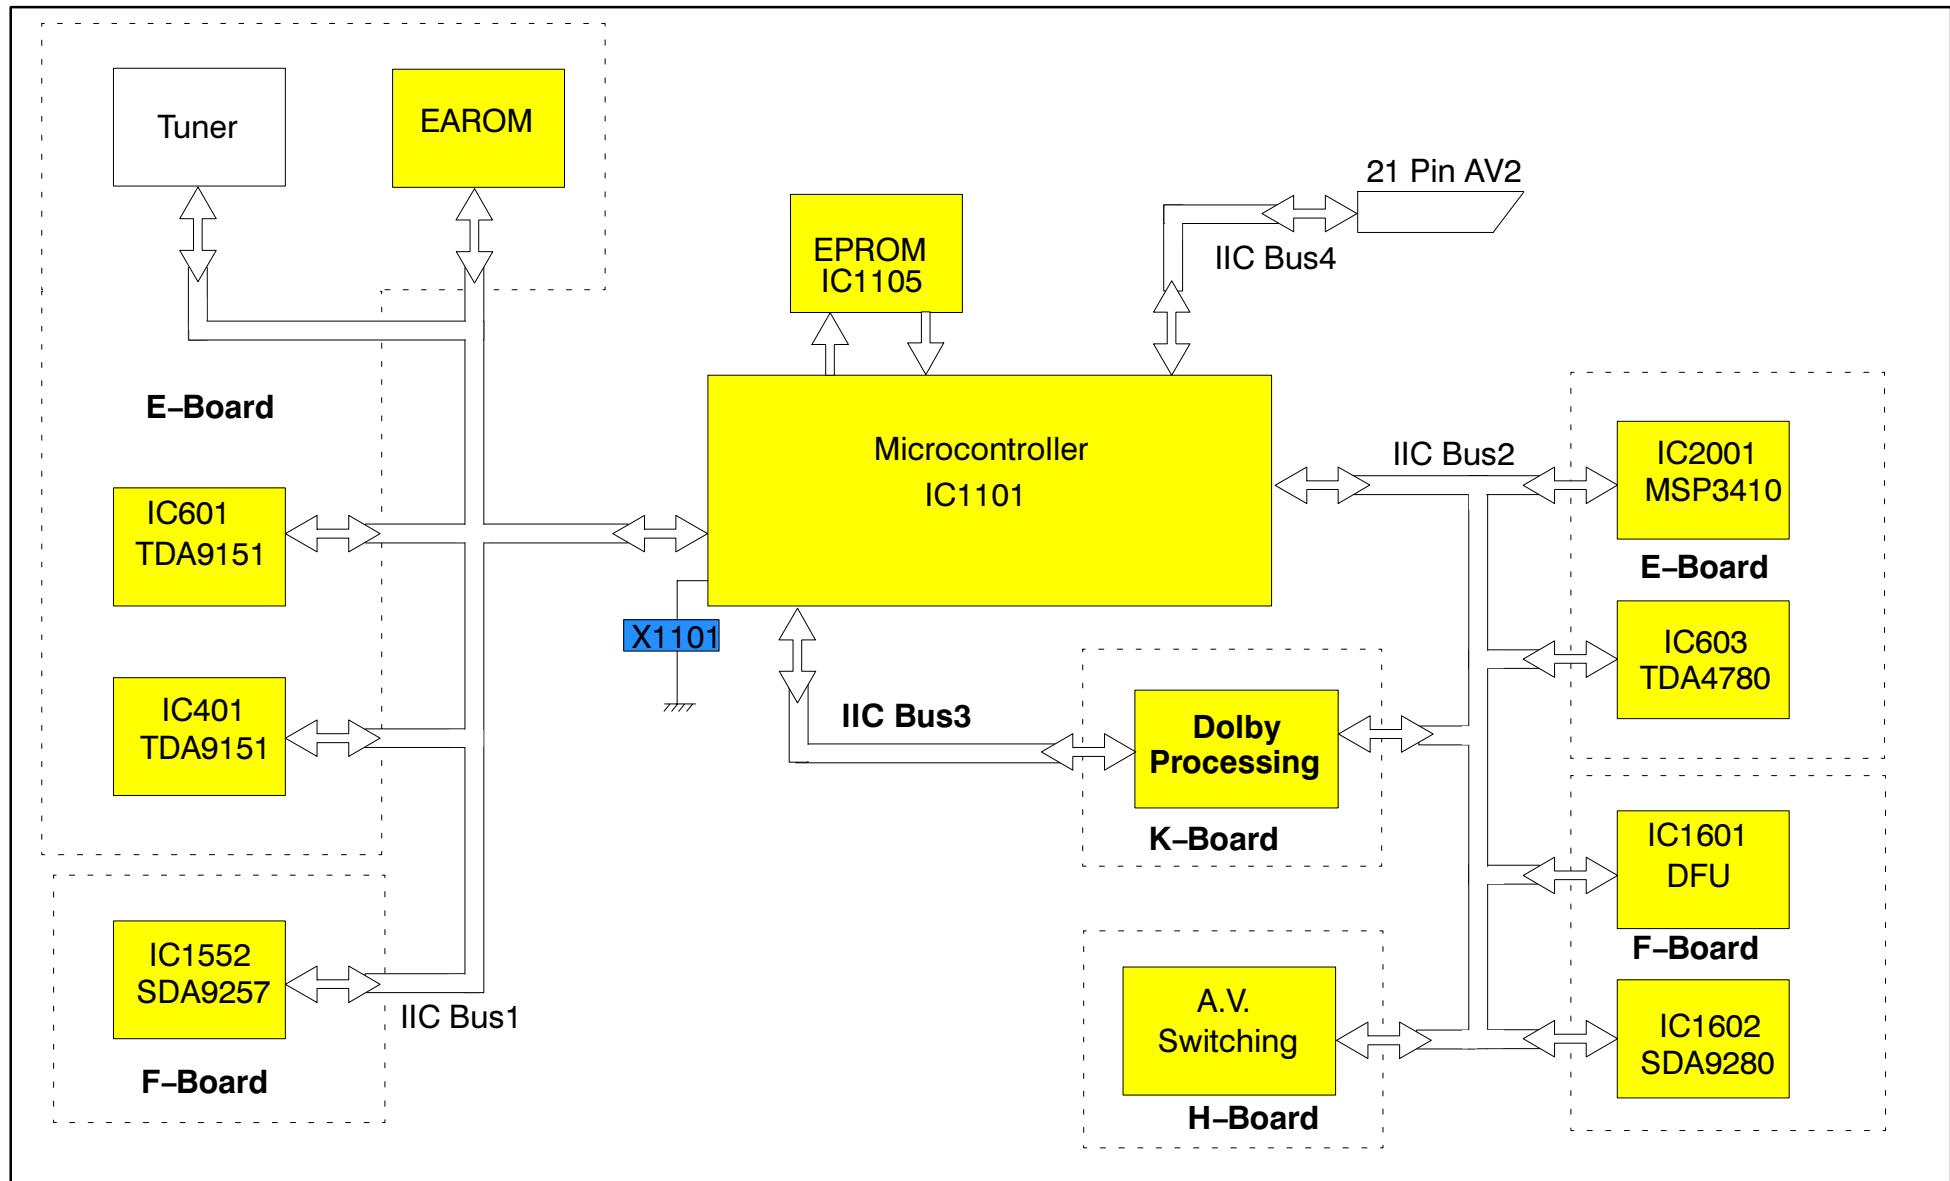



DOLBY PRO LOGIC PROCESSING

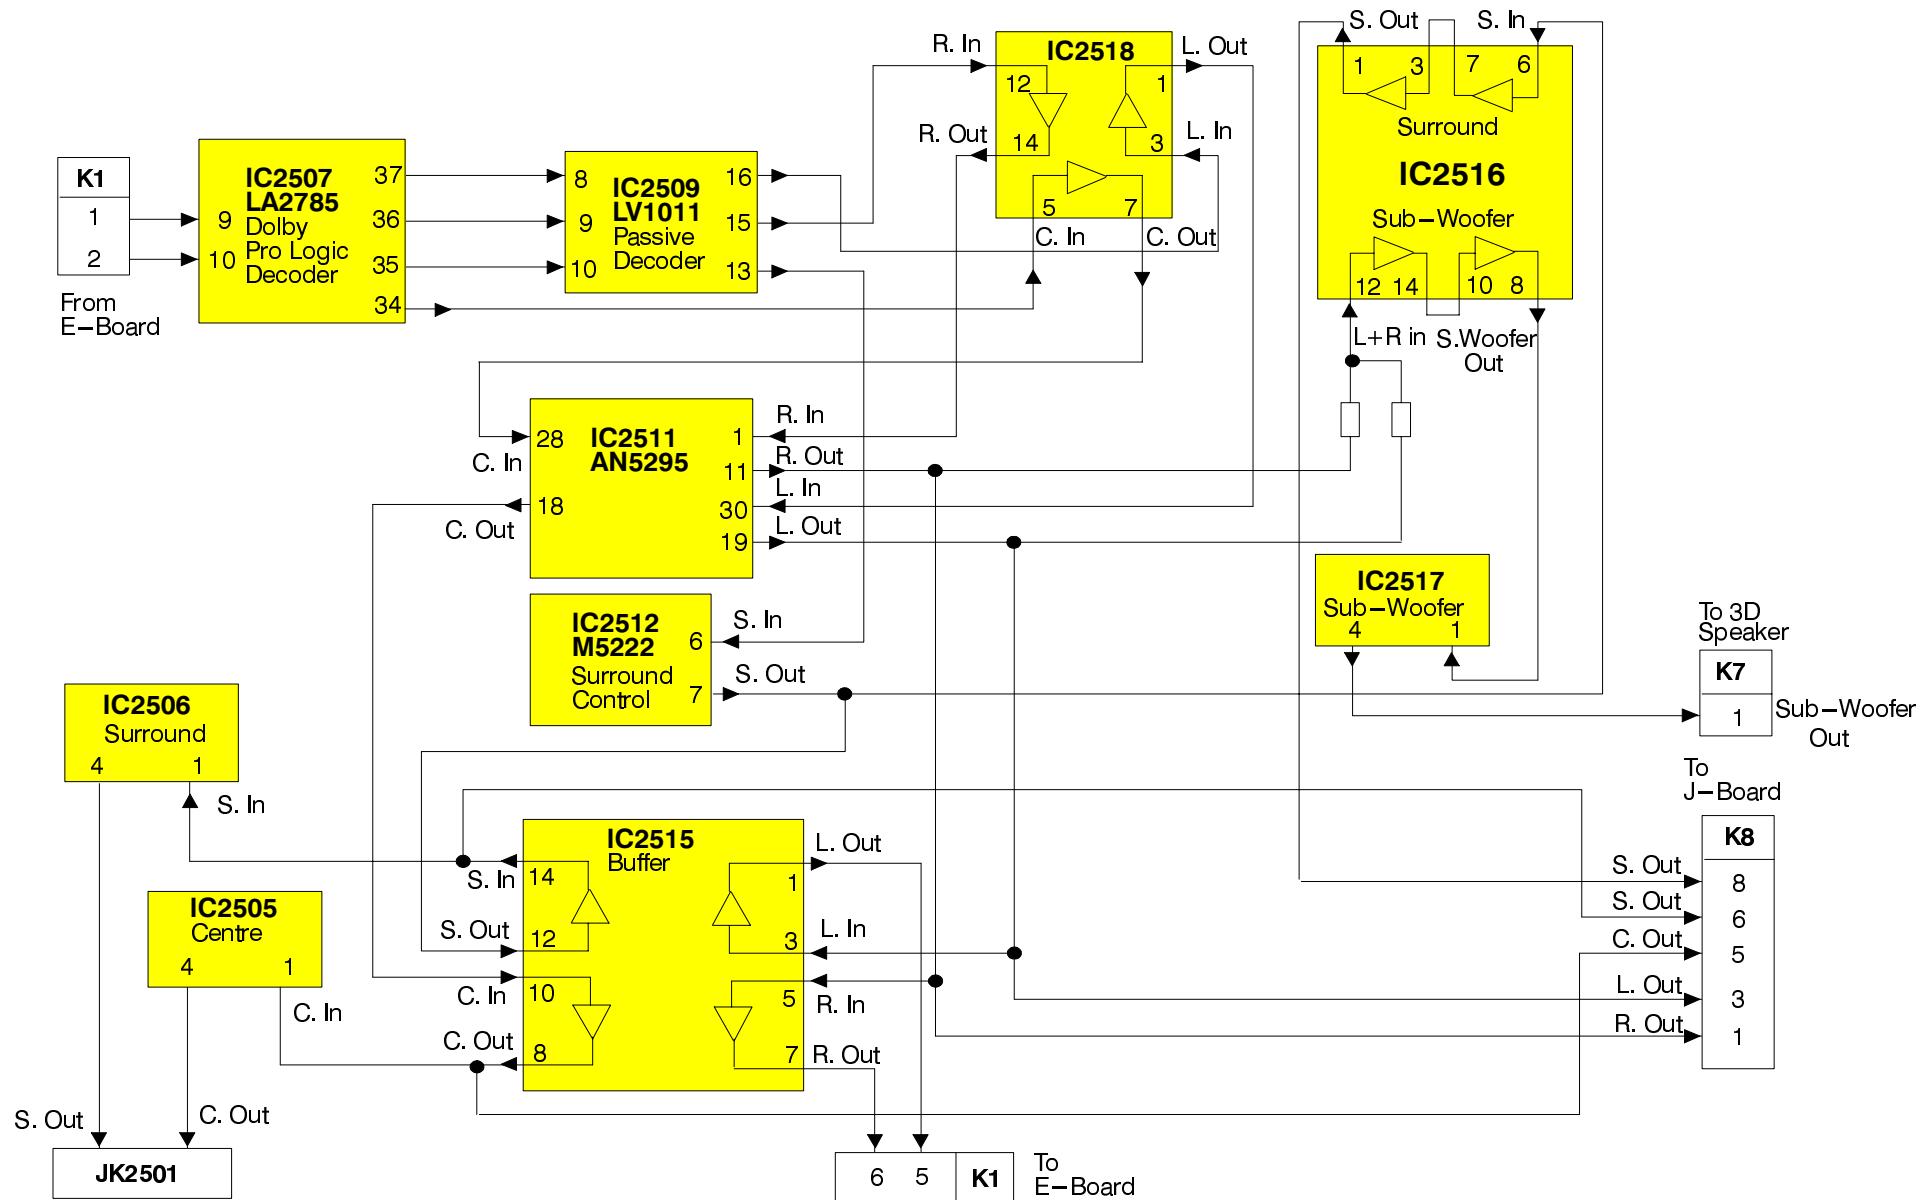

PARTS LOCATION

NOTE :

The numbers on the exploded view below refer to the miscellaneous section of the Replacement Parts List.

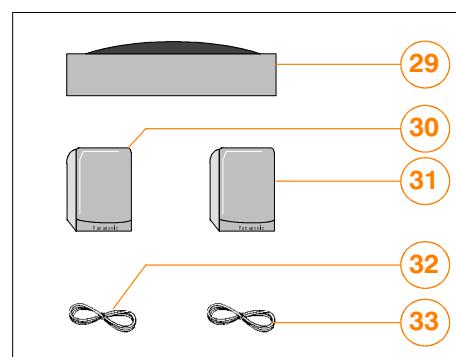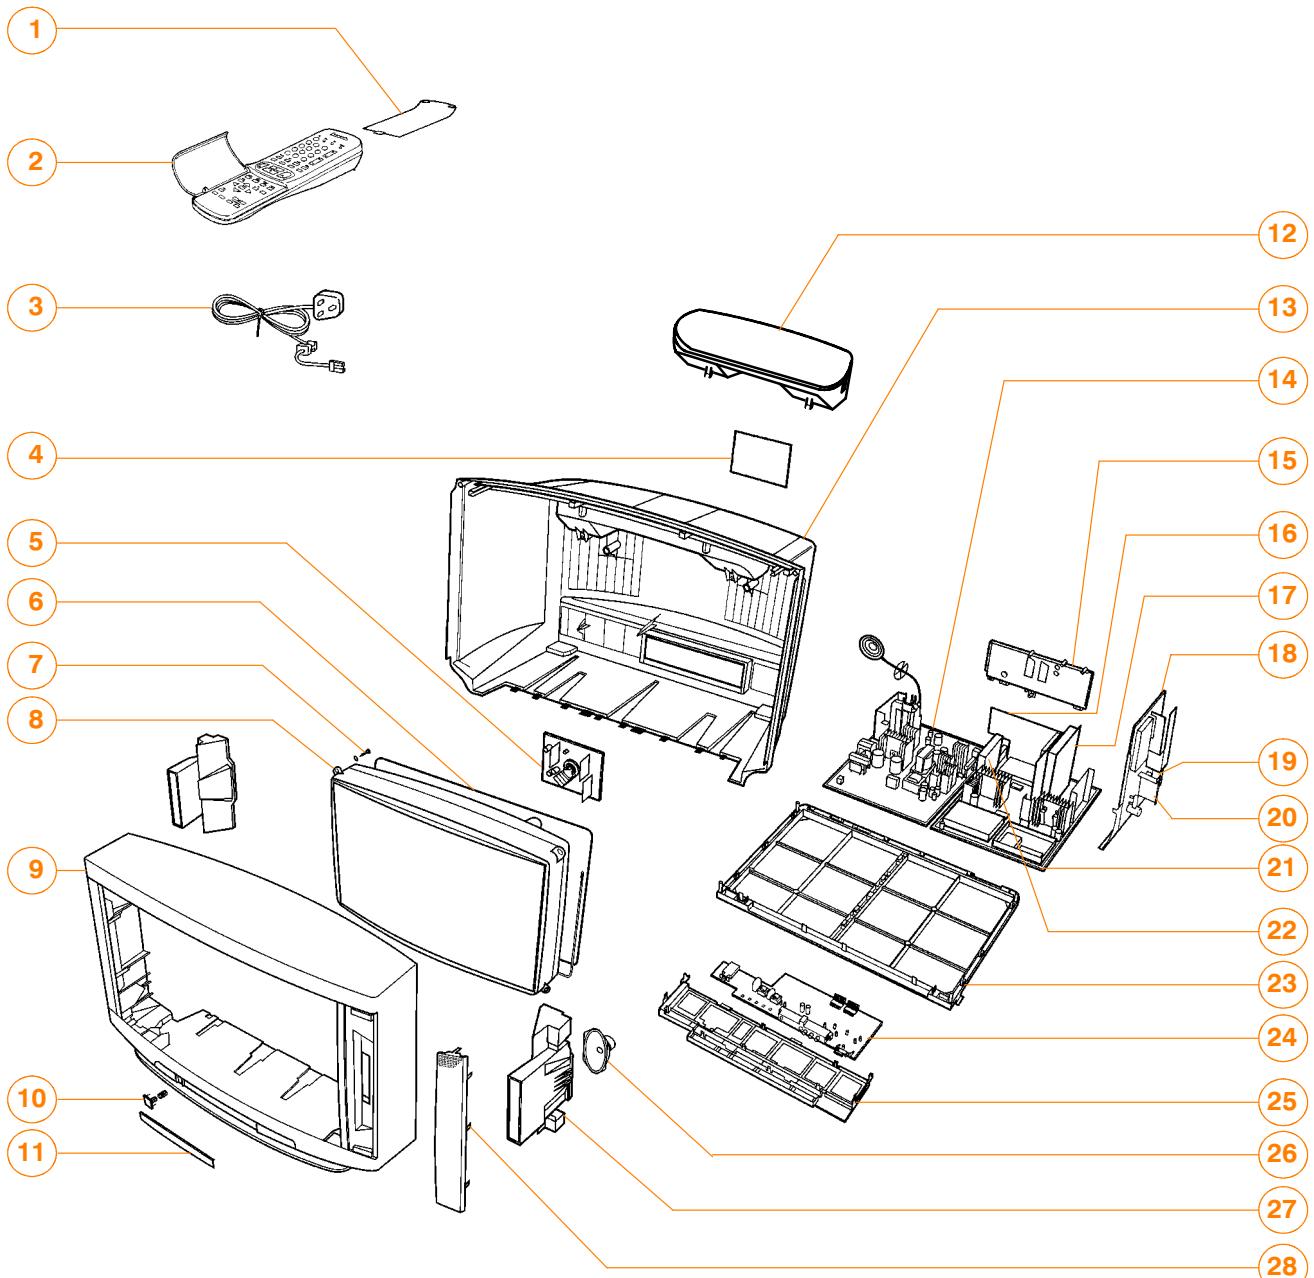

REPLACEMENT PARTS LIST

Important Safety Notice

Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.

Ref No.	Part No.	Description
MISCELLANEOUS COMPONENTS		
1)	UR51EC780	BATTERY COVER (REMOTE)
2)	EUR51926	REMOTE CONTROL
3)	TSX8E0018	POWER CORD
4)	TBM8E1747	MODEL LABEL
5)	TNPA0292AN	Y P.C.B.
6)	TLK8E05135	DEGAUSS COIL
7)	THT1009R	CRT FIXING SCREW
8)	A68EHM69X73T	CRT
9)	TKY8E082	CABINET
10)	TKP8E1149	DOOR LID
11)	TBX8E033	POWER BUTTON
12)	EAB10102B2	3D SUB WOOFER SPEAKER
13)	TKU8E00271	BACK COVER
14)	TNPA0295AP	D P.C.B.
15)	TKP8E1221-1	AV PANEL
16)	TNPA0293AF	H P.C.B.
17)	TNPA0294AD	F P.C.B.
18)	TNPA0370AE	K P.C.B.
19)	TNPA0458AA	J P.C.B.
20)	TNP8EC002AC	C P.C.B.
21)	TNPA0298AA	B P.C.B.
22)	TNPH0063BF	E P.C.B.
23)	TMX8E014	CHASSIS FRAME
24)	TNPA0348AD	M P.C.B.
25)	TMW8E023	CONTROL BRACKET
26)	EAGG1218E2	SPEAKER
27)	TKK8E026	SPEAKER REFLECTOR
28)	TKP8E1144	SPEAKER NET
29)	EAS8E050-B	DOLBY CENTER SPEAKER
30)	EAS8E002-A	DOLBY REAR SPEAKER
31)	EAS8E002-A	DOLBY REAR SPEAKER
32)	TSX8E0015S	DOLBY SPEAKER WIRE 12M
33)	TSX8E0015S	DOLBY SPEAKER WIRE 12M
TBM8E1532-2 PRESET PANEL		
ENV87D02G3	TUNER	
TBM8E1749-1	AV LABEL	
TBM8E1728	PANASONIC BADGE	
TEK6940	LID CATCHER	
TKP8E1161	FRONT PANEL LEFT	
TKP8E1167	FRONT PANEL RIGHT	
TLT100K991R	COIL	
TMW8E017	L.E.D.HOLDER	
TMX8E015	PCB SUPPORT BRACKET	
TPC8E4648	OUTER CARTON	
TPD8E617	CUSHION TOP	
TPD8E618	CUSHION BOTTOM	
TPD8E629	CUSHION SET	
TQB8E2387-1	INST BOOK	
UM-3DJ-2P	BATTERY SET	
31221212478	FIX CLIP	
F9-4-220	RELAY	
TES4537	SPRING	
832AG11D-ESL	I.C.SOCKET	
PCS-068A-1	68 PIN I.C.SOCKET	
ERC12GK825	SOLID 0.5W 10% 8M2 Ω	
ERDS1TJ6R8	CARBON 0.5W 5% 6R8 Ω	

Ref No.	Part No.	Description
INTEGRATED CIRCUITS		
IC101	LA7577N	V.I.F
IC102	TLT220K991R	COIL
IC251	TDA2030AV	AUDIO AMPLIFIER
IC252	TDA2030AV	AUDIO AMPLIFIER
IC351	TDA6111	RGB OUTPUT
IC361	TDA6111	RGB OUTPUT
IC371	TDA6111	RGB OUTPUT
IC401	TDA9151-B	DEFLECTION CONTROL
IC451	TDA8350Q/N5	VERTICAL OUTPUT
IC601	TDA9143-N1	COLOUR DECODER
IC602	TDA4665-V4	DELAY LINE
IC603	TDA4780/V4	RGB VIDEO PROCESSOR
IC801	AN8029	POWER SUPPLY
IC845	SE140N	ERROR AMPLIFIER
IC851	TL431ACLPM	REGULATOR
IC852	TL431ACLPM	REGULATOR
IC1051	RPM-637CBRS1	LED RECEIVER
IC1101	SDA30C164-2	MICRO PROCESSOR
IC1102	S-80745AL-Z	RESET
IC1103	MN1280R	RESET
IC1104	X24C0302AY	EAROM
IC1105	27C2001-209	EPROM
IC1301	SAA4961	COMB FILTER
IC1551	SN74F04DR	CLOCK
IC1552	SDA9257	CLOCK GENERATOR
IC1581	SDA9205-2GEG	A/D CONVERTER
IC1601	UPD93213GF	DFU
IC1602	SDA9280B22GE	VIDEO PROCESSOR
IC1701	MB87D202A	VIDEO PROCESSOR
IC1721	SDA9251-2XGE	RAM
IC1722	SDA9251-2XGE	RAM
IC1723	SDA9251-2XGE	RAM
IC1724	SDA9251-2XGE	RAM
IC1725	SDA9251-2XGE	RAM
IC1726	SDA9251-2XGE	RAM
IC1727	SDA9251-2XGE	RAM
IC2001	MSP3410DPPB4	AUDIO PROCESSOR
IC2501	STR10006-M	SWITCHABLE POWER SUPPLY
IC2502	L78M12MRB	12V REGULATOR
IC2503	L78M05MRB	5V REGULATOR
IC2505	TDA2030AV	AUDIO AMPLIFIER
IC2506	TDA2030AV	AUDIO AMPLIFIER
IC2507	LA2785	DOLBY ENCODER
IC2508	AN7809FLB	9V REGULATOR
IC2509	LV1011	DOLBY MATRIX
IC2511	AN5295NK	AUDIO CONTROL
IC2512	M5222P	SURROUND VOLUME CONTROL
IC2513	MC68HC-E01	MICRO PROCESSOR
IC2514	MN1280R	RESET
IC2515	AN6554	OPERATIONAL AMPLIFIER
IC2516	AN6554	OPERATIONAL AMPLIFIER
IC2517	TDA2030AV	AUDIO AMPLIFIER
IC2518	AN6554	OPERATIONAL AMPLIFIER
I2801	AN6554NSF-E2	OPERATIONAL AMPLIFIER
IC3101	TEA6420	AUDIO SWITCH
IC3102	TEA6415C	VIDEO SWITCH
IC3501	SDA5273S/134	MEGA TEXT
IC3502	M514256B70RS	DRAM
IC3801	AN7808LB	8V REGULATOR
IC3803	AN7805LB	5V REGULATOR
IC3804	AN7809FLB	9V REGULATOR
IC3805	AN78L08TA	8V REGULATOR

Ref No.	Part No.	Description			
CAPACITORS					
C002	ECUV1H102JCX	S.M.CAP	50V	1nF	
C003	ECA1HM101GB	ELECT	50V	100 μ F	
C004	ECUV1H102JCX	S.M.CAP	50V	1nF	
C005	ECUV1H102JCX	S.M.CAP	50V	1nF	
C006	ECUV1H102JCX	S.M.CAP	50V	1nF	
C007	ECUV1H102JCX	S.M.CAP	50V	1nF	
C009	ECA1HMR22GB	ELECT	50V	0.22 μ F	
C010	ECUV1H102KBX	S.M.CAP	50V	1nF	
C014	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C015	ECUV1H390JCX	S.M.CAP	50V	39pF	
C016	ECUV1H390JCX	S.M.CAP	50V	39pF	
C017	ECA1CM470GB	ELECT	16V	47 μ F	
C019	ECUV1H561JCX	S.M.CAP	50V	560pF	
C020	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C022	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C023	ECUV1H681JCX	S.M.CAP	50V	680pF	
C024	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C025	ECUV1H101JCX	S.M.CAP	50V	100pF	
C026	ECUV1H681JCX	S.M.CAP	50V	680pF	
C101	ECUV1H151JCX	S.M.CAP	50V	150pF	
C103	ECUV1H100DCX	S.M.CAP	50V	10pF	
C107	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C108	ECUV1H102KBX	S.M.CAP	50V	1nF	
C110	ECUV1H102KBX	S.M.CAP	50V	1nF	
C112	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C113	ECUV1H102KBX	S.M.CAP	50V	1nF	
C114	ECUV1H102KBX	S.M.CAP	50V	1nF	
C116	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C117	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C118	ECUV1H331JCX	S.M.CAP	50V	330pF	
C119	ECEA1HKA2R2	ELECT	50V	2.2 μ F	
C120	ECEA1HKAR47	ELECT	50V	0.47 μ F	
C122	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C123	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C124	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C126	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C127	ECEA1HKAR47	ELECT	50V	0.47 μ F	
C128	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C129	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C130	ECUV1H121JCX	S.M.CAP	50V	120pF	
C131	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C132	ECUV1H270JPX	S.M.CAP	50V	27pF	
C133	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C135	ECEA1CKA100	ELECT	16V	10 μ F	
C137	ECEA1HKA010	ELECT	50V	1 μ F	
C138	ECUV1H102KBX	S.M.CAP	50V	1nF	
C139	ECUV1H390JPX	S.M.CAP	50V	39pF	
C140	ECUV1H150JCX	S.M.CAP	50V	15pF	
C141	ECUV1H683ZFX	S.M.CAP	50V	68nF	
C143	ECEA1CKA100	ELECT	16V	10 μ F	
C144	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C251	ECQM1H474J	FILM	50V	470nF	
C252	ECUV1H222JCX	S.M.CAP	50V	2.2nF	
C255	ECEA1CN100	ELECT	16V	10 μ F	
C256	ECA1HM2R2GB	ELECT	50V	2.2 μ F	
C257	ECA1HM100GB	ELECT	50V	10 μ F	
C258	ECQM1H474J	FILM	50V	470nF	
C259	ECUV1H222JCX	S.M.CAP	50V	2.2nF	
C262	ECEA1CN100	ELECT	16V	10 μ F	
C263	ECA1HM2R2GB	ELECT	50V	2.2 μ F	
C264	ECA1HM100GB	ELECT	50V	10 μ F	
C267	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C268	ECUV1H223ZFX	S.M.CAP	50V	22nF	
C269	ECA1EM222GB	ELECT	25V	2.2 μ F	
C270	ECA1EM222GB	ELECT	25V	2.2 μ F	
C271	ECA1HM010GB	ELECT	50V	1 μ F	
C272	ECA1HM010GB	ELECT	50V	1 μ F	
C273	ECA1HM010GB	ELECT	50V	1 μ F	
C274	ECA1HM010GB	ELECT	50V	1 μ F	
C277	ECEA1HU471	ELECT	50V	470 μ F	
Ref No.	Part No.	Description			
C280	ECUV1H562KBX	S.M.CAP	50V	5.6nF	
C281	ECUV1H561JCX	S.M.CAP	50V	560pF	
C282	ECUV1H561JCX	S.M.CAP	50V	560pF	
C283	ECUV1H561JCX	S.M.CAP	50V	560pF	
C352	ECUV1H224ZFX	S.M.CAP	50V	0.22 μ F	
C353	ECUV1H103KBX	S.M.CAP	50V	10nF	
C354	ECKC2H103J	CERAMIC	50V	10nF	▲
C355	ECKC2H102J	CERAMIC	500V	1nF	▲
C362	ECUV1H224ZFX	S.M.CAP	50V	0.22 μ F	
C363	ECUV1H103KBX	S.M.CAP	50V	10nF	
C364	ECKC2H103J	CERAMIC	50V	10nF	▲
C365	ECKC2H102J	CERAMIC	500V	1nF	▲
C372	ECUV1H224ZFX	S.M.CAP	50V	0.22 μ F	
C373	ECUV1H103KBX	S.M.CAP	50V	10nF	
C374	ECKC2H103J	CERAMIC	50V	10nF	▲
C375	ECKC2H102J	CERAMIC	500V	1nF	▲
C381	ECA1HM101GB	ELECT	50V	100 μ F	
C382	ECA0JM471GB	ELECT	6.3V	470 μ F	
C383	ECUV1H103KBX	S.M.CAP	50V	10nF	
C384	ECQM2104KZ	FILM	250V	100nF	
C385	ECEA2EU220	ELECT	250V	22 μ F	
C386	ECKC3D152J	CERAMIC	2KV	1.5nF	▲
C395	ECQM1H104J	FILM	50V	100nF	
C402	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C403	ECA1AM332E	ELECT	10V	3.3 μ F	
C404	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C405	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C406	ECUV1H471JCX	S.M.CAP	50V	470pF	
C409	ECUV1H101JCX	S.M.CAP	50V	100pF	
C413	ECUV1H561KBX	S.M.CAP	50V	560pF	
C451	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C452	ECA1EM332E	ELECT	25V	3.3 μ F	
C453	ECEA1HU101	ELECT	50V	100 μ F	
C455	ECEA1HN100	ELECT	50V	10 μ F	
C456	ECQV1H104JZ3	FILM	100V	100nF	
C457	ECUV1H102JCX	S.M.CAP	50V	1nF	
C462	ECKC3A471J	CERAMIC	1KV	470pF	▲
C463	ECUV1H102KBX	S.M.CAP	50V	1nF	
C464	ECKC1H102J	CERAMIC	50V	1000pF	
C501	ECQM1H224J	FILM	50V	220nF	
C502	ECQM2683JZ	FILM	250V	68nF	
C503	ECKC2H102J	CERAMIC	500V	1nF	▲
C504	ECQB1H223K	FILM	50V	22nF	
C506	ECKC2H102J	CERAMIC	500V	1nF	▲
C552	ECWH15H392J	FILM	1500V	3.9nF	
C553	ECQP1104JZW	FILM	100V	0.10 μ F	
C555	ECWH15H432J	FILM	1500V	4300 μ F	
C556	ECEA2CNR47SB	ELECT	160V	R47 μ F	
C557	ECKC2H331J	CERAMIC	500V	330pF	▲
C558	ECA2EM330B	ELECT	250V	33 μ F	
C559	ECKC2H101J	CERAMIC	500V	100pF	▲
C560	ECA1EM332E	ELECT	25V	3.3 μ F	
C561	ECKC2H561J	CERAMIC	500V	560pF	▲
C562	ECA1JM330B	ELECT	63V	33 μ F	
C563	TAC7A2D564JC	CERAMIC	1500V	0.56 μ F	
C564	ECKC1H472J	CERAMIC	50V	4.7nF	
C565	ECQP1823JZW	FILM	100V	82nF	
C571	ECQV1H105JZ	FILM	50V	1 μ F	
C572	ECWH15H472J	FILM	1500V	4700 μ F	
C573	ECQF4153JZH	FILM	400V	15nF	
C574	TAC1114Z684A	CERAMIC	100V	0.68 μ F	
C575	TAC1114Z564A	CERAMIC	100V	0.56 μ F	
C581	ECQF4123JZH	FILM	400V	12nF	
C584	ECKC3D221JB	CERAMIC	2KV	220pF	
C585	ECKC3A471J	CERAMIC	1KV	470pF	▲
C586	ECKC1H103JB	CERAMIC	50V	10nF	
C601	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C602	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C603	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C604	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C605	ECUV1H104ZFX	S.M.CAP	50V	100nF	

Ref No.	Part No.	Description		
C606	ECUV1H104ZFX	S.M.CAP	50V	100nF
C608	ECUV1H104ZFX	S.M.CAP	50V	100nF
C609	ECUV1H180JCX	S.M.CAP	50V	18pF
C610	ECUV1H150JCX	S.M.CAP	50V	15pF
C611	ECUV1H104ZFX	S.M.CAP	50V	100nF
C612	ECUV1H332ZFX	S.M.CAP	50V	3.3nF
C613	ECUV1C474ZFX	S.M.CAP	16V	0.47μF
C614	ECUV1H332ZFX	S.M.CAP	50V	3.3nF
C615	ECUV1H104ZFX	S.M.CAP	50V	100nF
C616	ECUV1H104ZFX	S.M.CAP	50V	100nF
C617	ECA1CM220GB	ELECT	16V	22μF
C618	ECUV1H104ZFX	S.M.CAP	50V	100nF
C619	ECUV1H104ZFX	S.M.CAP	50V	100nF
C620	ECUV1H104ZFX	S.M.CAP	50V	100nF
C621	ECUV1H104ZFX	S.M.CAP	50V	100nF
C622	ECUV1H104ZFX	S.M.CAP	50V	100nF
C623	ECUV1H103ZFX	S.M.CAP	50V	10nF
C624	ECUV1H103ZFX	S.M.CAP	50V	10nF
C625	ECUV1H103ZFX	S.M.CAP	50V	10nF
C626	ECUV1H103ZFX	S.M.CAP	50V	10nF
C627	ECUV1H103ZFX	S.M.CAP	50V	10nF
C628	ECUV1H103ZFX	S.M.CAP	50V	10nF
C629	ECUV1H103ZFX	S.M.CAP	50V	10nF
C630	ECUV1H103ZFX	S.M.CAP	50V	10nF
C631	ECUV1H103ZFX	S.M.CAP	50V	10nF
C632	ECUV1H103ZFX	S.M.CAP	50V	10nF
C633	ECUV1H470JCX	S.M.CAP	50V	47pF
C634	ECA1CM221GB	ELECT	16V	220μF
C635	ECA1HM220GB	ELECT	50V	22μF
C636	ECA1HM010GB	ELECT	50V	1μF
C637	ECQM1H224J	FILM	50V	220nF
C638	ECA1HM010GB	ELECT	50V	1μF
C639	ECQM1H224J	FILM	50V	220nF
C640	ECQM1H224J	FILM	50V	220nF
C641	ECQM1H224J	FILM	50V	220nF
C642	ECA1AM470GB	ELECT	10V	47μF
C643	ECUV1H104ZFX	S.M.CAP	50V	100nF
C644	ECA1CM470GB	ELECT	16V	47μF
C645	ECUV1H104ZFX	S.M.CAP	50V	100nF
C646	ECUV1H104ZFX	S.M.CAP	50V	100nF
C647	ECEA1CN470	ELECT	16V	47μF
C648	ECEA1CN470	ELECT	16V	47μF
C651	ECUV1H820JCX	S.M.CAP	50V	82pF
C654	ECUV1H393KBX	S.M.CAP	50V	39nF
C655	ECUV1E563KBX	S.M.CAP	25V	56nF
C657	ECUV1C474ZFX	S.M.CAP	16V	0.47μF
C659	ECUV1H821KBX	S.M.CAP	50V	820pF
C661	ECUV1H103ZFX	S.M.CAP	50V	10nF
C662	ECUV1H470JCX	S.M.CAP	50V	47pF
C663	ECUV1H150JCX	S.M.CAP	50V	15pF
C664	ECUV1H103ZFX	S.M.CAP	50V	10nF
C703	ECUV1C224KBX	S.M.CAP	16V	220nF
C752	ECKC2H103J	CERAMIC	50V	10nF
C803	ECQE2A474MWB	FILM	100V	0.47μF
C804	222233510154	CAPACITOR		0.15μF
C806	ECQE6104K	FILM	600V	100nF
C807	ECQB1H473K	FILM	50V	47nF
C808	ECQB1H333J	FILM	50V	33nF
C810	222233510154	CAPACITOR		0.15μF
C811	ECQB1H104J	FILM	50V	100nF
C812	ECQB1H562K	FILM	50V	5.6nF
C813	ECKC2H472J	CERAMIC	500V	4.7nF
C814	ECKC2H472J	CERAMIC	500V	4.7nF
C815	ECA1CM331B	ELECT	16V	330μF
C816	ECQB1H122J	FILM	50V	1.2nF
C817	ECKC2H472J	CERAMIC	500V	4.7nF
C818	ECKC2H472J	CERAMIC	500V	4.7nF
C819	ECOS2GG181NG	ELECT	400V	180μF
C820	ECOS2GG181NG	ELECT	400V	180μF
C821	ECQB1H222J	FILM	50V	2200pF
C822	ECKC3D102J	CERAMIC	2KV	1nF
C823	EEUFA1V221B	CERAMIC	35V	220pF

Ref No.	Part No.	Description		
C824	ECQB1H121KF3	FILM	50V	0pF
C826	ECQB1H473K	FILM	50V	47nF
C827	ECKCNS332J	CERAMIC	1K2V	3.3nF
C830	ECQE4105JFW	FILM	400V	1μF
C831	ECKC3D471JB	CERAMIC	2KV	470pF
C833	ECQB1H682K	FILM	50V	6.8nF
C834	ECQB1H471KF3	FILM	50V	470pF
C835	ECQB1H152K	FILM	50V	1.5nF
C848	ECKC2H471J	CERAMIC	500V	470pF
C849	ECKC2H471J	CERAMIC	500V	470pF
C851	ECQM1H104J	FILM	50V	100nF
C852	ECKC3D102J	CERAMIC	2KV	1nF
C853	ECA1CM471GB	ELECT	16V	470μF
C854	ECA1EM471GB	ELECT	25V	470μF
C855	ECEA1HU102	ELECT	50V	1000μF
C856	ECEA1HU471	ELECT	50V	470μF
C857	ECA1EM471GB	ELECT	25V	470μF
C858	ECOS2EA271BB	ELECT	250V	270pF
C859	ECKC2H471J	CERAMIC	500V	470pF
C861	ECOS2EA221AB	ELECT	250V	220μF
C863	ECA1EM222GB	ELECT	25V	2.2μF
C864	ECA0JM102GB	ELECT	6.3V	1μF
C866	ECA1HM101GB	ELECT	50V	100μF
C867	ECA1CM222GB	ELECT	16V	2200μF
C868	ECA1CM100GB	ELECT	16V	10μF
C871	ECA0JM102GB	ELECT	6.3V	1μF
C872	ECA1CM222GB	ELECT	16V	2200μF
C901	ECUV1H030CCX	S.M.CAP	50V	30pF
C902	ECA1VM101GB	ELECT	35V	100μF
C903	ECA1CM470GB	ELECT	16V	47μF
C904	ECUV1H103ZFX	S.M.CAP	50V	10nF
C905	ECA1CM100GB	ELECT	16V	10μF
C906	ECUV1H151JCX	S.M.CAP	50V	150pF
C908	ECUV1H151JCX	S.M.CAP	50V	150pF
C909	ECKC2H472J	CERAMIC	500V	4.7nF
C910	ECKC2H472J	CERAMIC	500V	4.7nF
C911	ECUV1H151JCX	S.M.CAP	50V	150pF
C912	ECEA2EU220	ELECT	250V	22μF
C913	ECA1HM101GB	ELECT	50V	100μF
C914	ECA1HM101GB	ELECT	50V	100μF
C915	ECA1CM471GB	ELECT	16V	470μF
C916	ECEA2EU220	ELECT	250V	22μF
C917	ECA1HM100GB	ELECT	50V	10μF
C918	ECUV1H103ZFX	S.M.CAP	50V	10nF
C919	ECCR2H680J	CERAMIC	500V	68pF
C1051	ECKC1H101J	CERAMIC	50V	100pF
C1052	ECA1VM470B	ELECT	35V	47μF
C1053	ECKC1H103JB	CERAMIC	50V	10nF
C1102	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1103	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1104	ECA0JM101G	ELECT	6.3V	100μF
C1105	ECUV1H330JCX	S.M.CAP	50V	33pF
C1106	ECUV1H330JCX	S.M.CAP	50V	33pF
C1107	ECUV1H391JCX	S.M.CAP	50V	390pF
C1108	ECUV1H103ZFX	S.M.CAP	50V	10nF
C1109	ECUV1H472KBX	S.M.CAP	50V	4.7nF
C1110	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1111	ECUV1H101JCX	S.M.CAP	50V	100pF
C1112	ECUV1H103ZFX	S.M.CAP	50V	10nF
C1114	ECUV1H102JCX	S.M.CAP	50V	1nF
C1115	ECUV1H102JCX	S.M.CAP	50V	1nF
C1126	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1127	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1129	ECA1AM470GB	ELECT	10V	47μF
C1130	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1131	ECUV1H101JCX	S.M.CAP	50V	100pF
C1133	ECUV1C184KBX	S.M.CAP	16V	0.18μF
C1134	ECUV1H103KBX	S.M.CAP	50V	10nF
C1135	ECUV1H103ZFX	S.M.CAP	50V	10nF
C1136	ECUV1H101JCX	S.M.CAP	50V	100pF
C1137	ECUV1H102KBX	S.M.CAP	50V	1nF
C1138	ECUV1H104ZFX	S.M.CAP	50V	100nF

Ref No.	Part No.	Description		
C1302	ECUV1H150JCX	S.M.CAP	50V	15pF
C1304	ECUV1H103ZFX	S.M.CAP	50V	10nF
C1305	ECA1HM101GB	ELECT	50V	100μF
C1306	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1307	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1308	ECA1HM101GB	ELECT	50V	100μF
C1309	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1310	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1311	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1312	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1313	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1314	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1315	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1316	ECA1HM101GB	ELECT	50V	100μF
C1317	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1318	ECA1HM101GB	ELECT	50V	100μF
C1321	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1322	ECUV1H101JCX	S.M.CAP	50V	100pF
C1323	ECA1HM101GB	ELECT	50V	100μF
C1324	ECA1HM101GB	ELECT	50V	100μF
C1325	ECUV1H103ZFX	S.M.CAP	50V	10nF
C1326	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1327	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1508	ECUV1H103KBX	S.M.CAP	50V	10nF
C1509	ECA1CM100GB	ELECT	16V	10μF
C1518	ECA1HM101GB	ELECT	50V	100μF
C1519	ECA1CM470GB	ELECT	16V	47μF
C1520	ECA1CM470GB	ELECT	16V	47μF
C1521	ECUV1H390JCX	S.M.CAP	50V	39pF
C1524	ECUV1H221JCX	S.M.CAP	50V	220pF
C1525	ECUV1H391JCX	S.M.CAP	50V	390pF
C1528	ECUV1H390JCX	S.M.CAP	50V	39pF
C1529	ECUV1H221JCX	S.M.CAP	50V	220pF
C1531	ECUV1H391JCX	S.M.CAP	50V	390pF
C1532	ECUV1H151JCX	S.M.CAP	50V	150pF
C1533	ECUV1H750JCX	S.M.CAP	50V	75pF
C1534	ECUV1H391JCX	S.M.CAP	50V	390pF
C1537	ECA0JM102GB	ELECT	6.3V	1μF
C1552	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1554	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1555	ECA0JM331GB	ELECT	6.3V	330μF
C1556	ECUV1H270JCX	S.M.CAP	50V	27pF
C1557	ECUV1H270JCX	S.M.CAP	50V	27pF
C1559	ECUV1H103KBX	S.M.CAP	50V	10nF
C1560	ECUV1H103KBX	S.M.CAP	50V	10nF
C1561	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1562	ECA0JM331GB	ELECT	6.3V	330μF
C1564	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1575	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1576	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1577	ECA1CM470GB	ELECT	16V	47μF
C1579	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1580	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1583	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1584	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1585	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1586	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1588	ECA1CM470GB	ELECT	16V	47μF
C1590	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1591	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1592	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1593	ECA1CM470GB	ELECT	16V	47μF
C1594	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1595	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1596	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1599	ECA1CM470GB	ELECT	16V	47μF
C1601	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1602	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1603	ECUV1H103KBX	S.M.CAP	50V	10nF
C1604	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1605	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1606	ECUV1H104ZFX	S.M.CAP	50V	100nF

Ref No.	Part No.	Description		
C1607	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1608	ECA1CM470GB	ELECT	16V	47μF
C1610	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1611	ECUV1H103KBX	S.M.CAP	50V	10nF
C1612	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1613	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1614	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1616	ECUV1H152JCX	S.M.CAP	50V	1.5pF
C1617	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1618	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1619	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1620	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1621	ECA1CM470GB	ELECT	16V	47μF
C1622	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1625	ECA1CM470GB	ELECT	16V	47μF
C1641	ECA1CM470GB	ELECT	16V	47μF
C1642	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1701	ECA1CM470GB	ELECT	16V	47μF
C1702	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1703	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1704	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1705	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1706	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1707	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1708	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1709	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1710	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1711	ECUV1H103KBX	S.M.CAP	50V	10nF
C1712	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1713	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1714	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1721	ECA1CM470GB	ELECT	16V	47μF
C1722	ECA1CM470GB	ELECT	16V	47μF
C1723	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1724	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1725	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1726	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1727	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1728	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1729	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1730	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1731	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1732	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1733	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1734	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1735	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1736	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1740	ECUV1H102KBX	S.M.CAP	50V	1nF
C2001	ECA1CM100GB	ELECT	16V	10μF
C2002	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2003	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2004	ECUV1H102JCX	S.M.CAP	50V	1nF
C2005	ECUV1H391JCX	S.M.CAP	50V	390pF
C2006	ECUV1H391JCX	S.M.CAP	50V	390pF
C2007	ECUV1H102JCX	S.M.CAP	50V	1nF
C2008	ECUV1H102JCX	S.M.CAP	50V	1nF
C2009	ECUV1H102JCX	S.M.CAP	50V	1nF
C2010	ECUV1H102JCX	S.M.CAP	50V	1nF
C2011	ECUV1H102JCX	S.M.CAP	50V	1nF
C2012	ECUV1H102JCX	S.M.CAP	50V	1nF
C2014	ECQM1H334J	FILM	50V	330nF
C2017	ECA1CM100GB	ELECT	16V	10μF
C2018	ECA1CM100GB	ELECT	16V	10μF
C2019	ECA1CM221GB	ELECT	16V	220μF
C2020	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2021	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2022	ECA1HM3R3GB	ELECT	50V	3.3μF
C2023	ECUV1H471JCX	S.M.CAP	50V	470pF
C2024	ECUV1H471JCX	S.M.CAP	50V	470pF
C2025	ECUV1H221JCX	S.M.CAP	50V	220pF
C2026	ECUV1H221JCX	S.M.CAP	50V	220pF
C2027	ECUV1H221JCX	S.M.CAP	50V	220pF

Ref No.	Part No.	Description	Ref No.	Part No.	Description		
C2028	ECUV1H221JCX	S.M.CAP	50V 220pF	C2460	ECA1HM010GB	ELECT	50V 1μF
C2029	ECUV1H221JCX	S.M.CAP	50V 220pF	C2461	ECA1HM100GB	ELECT	50V 10μF
C2030	ECUV1H221JCX	S.M.CAP	50V 220pF	C2464	ECA1HM100GB	ELECT	50V 10μF
C2031	ECUV1H104ZFX	S.M.CAP	50V 100nF	C2467	ECA1HM100GB	ELECT	50V 10μF
C2032	ECA1CM100GB	ELECT	16V 10μF	C2468	ECA1HM010GB	ELECT	50V 1μF
C2034	ECUV1H070DCX	S.M.CAP	50V 7pF	C2469	ECA1HM010GB	ELECT	50V 1μF
C2035	ECUV1H560JCX	S.M.CAP	50V 56pF	C2470	ECA1HM100GB	ELECT	50V 10μF
C2042	ECUV1H104ZFX	S.M.CAP	50V 100nF	C2471	ECA1CM102B	ELECT	16V 1μF
C2043	ECA1CM100GB	ELECT	16V 10μF	C2472	ECA1HM100GB	ELECT	50V 10μF
C2044	ECUV1H010CCX	S.M.CAP	50V 1pF	C2473	ECUV1H103ZFX	S.M.CAP	50V 10nF
C2045	ECUV1H010CCX	S.M.CAP	50V 1pF	C2474	ECUV1H103ZFX	S.M.CAP	50V 10nF
C2050	ECUV1H223ZFX	S.M.CAP	50V 22nF	C2475	ECUV1H330JCX	S.M.CAP	50V 33pF
C2051	ECUV1H223ZFX	S.M.CAP	50V 22nF	C2476	ECUV1H330JCX	S.M.CAP	50V 33pF
C2052	ECUV1H103ZFX	S.M.CAP	50V 10nF	C2477	ERJ6GEYJ183	S.M.CARB	0.1W 5% 18KΩ
C2053	ECUV1H103ZFX	S.M.CAP	50V 10nF	C2478	ECA1HM220GB	ELECT	50V 22μF
C2054	ECA1CM331B	ELECT	16V 330μF	C2479	ECEA1HN010UB	ELECT	50V 1μF
C2055	ECA1CM102E	ELECT	16V 1μF	C2480	ECEA1HN010UB	ELECT	50V 1μF
C2058	ECUV1H683ZFX	S.M.CAP	50V 68nF	C2481	ECEA1HN010UB	ELECT	50V 1μF
C2059	ECUV1H102KBX	S.M.CAP	50V 1nF	C2482	ECEA1HN010UB	ELECT	50V 1μF
C2060	ECUV1H102KBX	S.M.CAP	50V 1nF	C2484	ECUV1H103KBX	S.M.CAP	50V 10nF
C2351	ECA1CM471GB	ELECT	16V 470μF	C2485	ECA1HMR22GB	ELECT	50V 0.22μF
C2352	ECA1CM471GB	ELECT	16V 470μF	C2486	ECUV1H103KBX	S.M.CAP	50V 10nF
C2353	ECA1HM4R7GB	ELECT	50V 4.7μF	C2487	ECA1HMR22GB	ELECT	50V 0.22μF
C2354	ECKC1H103JB	CERAMIC	50V 10nF	C2488	ECUV1H103KBX	S.M.CAP	50V 10nF
C2355	ECA1HMR33GB	ELECT	50V 0.33μF	C2489	ECUV1H104ZFX	S.M.CAP	50V 100nF
C2356	ECKC1H103JB	CERAMIC	50V 10nF	C2490	ECEA1HU101	ELECT	50V 100μF
C2360	ECKC1H103JB	CERAMIC	50V 10nF	C2491	ECA1HM100GB	ELECT	50V 10μF
C2361	ECA1CM471GB	ELECT	16V 470μF	C2492	ECUV1H103KBX	S.M.CAP	50V 10nF
C2362	ECA1CM471GB	ELECT	16V 470μF	C2493	ECA1HMR22GB	ELECT	50V 0.22μF
C2363	ECA1HM4R7GB	ELECT	50V 4.7μF	C2494	ECA1HM4R7GB	ELECT	50V 4.7μF
C2364	ECKC1H103JB	CERAMIC	50V 10nF	C2495	ECA1HM100GB	ELECT	50V 10μF
C2365	ECA1HMR33GB	ELECT	50V 0.33μF	C2502	ECOS2GA101BB	ELECT	400V 100μF
C2366	ECKC1H103JB	CERAMIC	50V 10nF	C2504	ECKC3D471JB	CERAMIC	2KV 470pF
C2401	ECA1HM101GB	ELECT	50V 100μF	C2505	ECKC2H103J	CERAMIC	50V 10nF
C2402	ECUV1H393KBX	S.M.CAP	50V 39nF	C2506	ECQB1H333J	FILM	50V 33nF
C2405	ECA1HM4R7GB	ELECT	50V 4.7μF	C2507	ECQB1H683K	FILM	50V 68nF
C2406	ECA1HM4R7GB	ELECT	50V 4.7μF	C2508	ECA1CM221GB	ELECT	16V 220μF
C2407	ECA1HM4R7GB	ELECT	50V 4.7μF	C2509	ECA1CM221GB	ELECT	16V 220μF
C2408	ECA1HM4R7GB	ELECT	50V 4.7μF	C2510	ECKCWS471J	CERAMIC	400V 470pF
C2409	ECA1HM4R7GB	ELECT	50V 4.7μF	C2511	EEUFA1E331LB	CERAMIC	25V 330pF
C2415	ECUV1H103ZFX	S.M.CAP	50V 10nF	C2512	ECA1CHG102B	ELECT	16V 1μF
C2416	ECUV1H562KBX	S.M.CAP	50V 5.6nF	C2513	ECA1HM010GB	ELECT	50V 1μF
C2418	ECQM1H104J	FILM	50V 100nF	C2514	ECA1HM010GB	ELECT	50V 1μF
C2420	ECUV1H104ZFX	S.M.CAP	50V 100nF	C2517	ECKC3A471J	CERAMIC	1KV 470pF
C2421	ECA1HHG101B	ELECT	50V 100μF	C2518	EEUFA1E331LB	CERAMIC	25V 330pF
C2422	EEUFA1V221LB	CERAMIC	35V 220pF	C2520	EEUFA1H471E	CERAMIC	50V 470pF
C2423	ECUV1H104ZFX	S.M.CAP	50V 100nF	C2521	ECQM1H104J	FILM	50V 100nF
C2424	ECA1HHG220B	ELECT	50V 22μF	C2522	ECEA1HN010UB	ELECT	50V 1μF
C2425	ECUV1H103KBX	S.M.CAP	50V 10nF	C2523	ECUV1H101JCX	S.M.CAP	50V 100pF
C2426	ECUV1H101JCX	S.M.CAP	50V 100pF	C2524	ECA1HM330B	ELECT	50V 33μF
C2429	ECUV1H101JCX	S.M.CAP	50V 100pF	C2525	ECUV1H103ZFX	S.M.CAP	50V 10nF
C2432	ECUV1H561JCX	S.M.CAP	50V 560pF	C2526	ECA1VM102GB	ELECT	35V 1μF
C2433	ECUV1H561JCX	S.M.CAP	50V 560pF	C2527	ECUV1H222KBX	S.M.CAP	50V 2.2nF
C2434	ECUV1H561JCX	S.M.CAP	50V 560pF	C2528	ECA1VM102GB	ELECT	35V 1μF
C2435	ECUV1H561JCX	S.M.CAP	50V 560pF	C2529	ECUV1H103ZFX	S.M.CAP	50V 10nF
C2436	ECUV1H561JCX	S.M.CAP	50V 560pF	C2531	ECQM1H474J	FILM	50V 470nF
C2437	ECA1HM100GB	ELECT	50V 10μF	C2532	ECEA1HN010UB	ELECT	50V 1μF
C2438	ECA1HM010GB	ELECT	50V 1μF	C2533	ECUV1H101JCX	S.M.CAP	50V 100pF
C2439	ECA1HM010GB	ELECT	50V 1μF	C2534	ECA1HM330B	ELECT	50V 33μF
C2440	ECA1HM100GB	ELECT	50V 10μF	C2535	ECUV1H103ZFX	S.M.CAP	50V 10nF
C2441	ECUV1H393KBX	S.M.CAP	50V 39nF	C2536	ECA1VM221B	ELECT	35V 220μF
C2442	ECUV1H393KBX	S.M.CAP	50V 39nF	C2537	ECUV1H222KBX	S.M.CAP	50V 2.2nF
C2443	ECUV1H050CCX	S.M.CAP	50V 5pF	C2538	ECA1VM101GB	ELECT	35V 100μF
C2444	ECUV1H393KBX	S.M.CAP	50V 39nF	C2539	ECUV1H103ZFX	S.M.CAP	50V 10nF
C2445	ECEA1HN010UB	ELECT	50V 1μF	C2541	ECQM1H474J	FILM	50V 470nF
C2446	ECEA1HN010UB	ELECT	50V 1μF	C2542	ECUV1H332KBX	S.M.CAP	50V 3.3nF
C2449	ECA1HM100GB	ELECT	50V 10μF	C2543	ECUV1H332KBX	S.M.CAP	50V 3.3nF
C2450	ECUV1H222KBX	S.M.CAP	50V 2.2nF	C2544	ECUV1H223ZFX	S.M.CAP	50V 22nF
C2451	ECEA1HN010UB	ELECT	50V 1μF	C2545	ECUV1H473ZFX	S.M.CAP	50V 47nF
C2455	ECA1HM010GB	ELECT	50V 1μF	C2546	ECA1CM221GB	ELECT	16V 220μF
C2456	ECA1HM330B	ELECT	50V 33μF	C2547	ECA1HM100GB	ELECT	50V 10μF
C2459	ECA1HM010GB	ELECT	50V 1μF				

Ref No.	Part No.	Description		
C2548	ECA1HM100GB	ELECT	50V	10µF
C2549	ECA1HM100GB	ELECT	50V	10µF
C2550	ECA1HM100GB	ELECT	50V	10µF
C2551	ECA1CM221GB	ELECT	16V	220µF
C2552	ECEA1VN100UB	ELECT	35V	10µF
C2553	ECEA1VN100UB	ELECT	35V	10µF
C2554	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2555	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2556	ECA1HMR47GB	ELECT	50V	0.47µF
C2557	ECA1HM4R7GB	ELECT	50V	4.7µF
C2558	ECA1HMR47GB	ELECT	50V	0.47µF
C2559	ECA1HM4R7GB	ELECT	50V	4.7µF
C2560	ECUV1C154KBX	S.M.CAP	16V	0.15µF
C2561	ECA1HM3R3GB	ELECT	50V	3.3µF
C2562	ECUV1C154KBX	S.M.CAP	16V	0.15µF
C2563	ECUV1C154KBX	S.M.CAP	16V	0.15µF
C2564	ECA1HM3R3GB	ELECT	50V	3.3µF
C2565	ECUV1C154KBX	S.M.CAP	16V	0.15µF
C2566	ECA1HM4R7GB	ELECT	50V	4.7µF
C2567	ECA1HMR47GB	ELECT	50V	0.47µF
C2568	ECA1HM4R7GB	ELECT	50V	4.7µF
C2569	ECA1HMR47GB	ELECT	50V	0.47µF
C2570	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2571	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2572	ECA1HM470GB	ELECT	50V	47µF
C2573	ECQM1H474J	FILM	50V	470nF
C2574	ECUV1H681JCX	S.M.CAP	50V	680pF
C2575	ECA1HM010GB	ELECT	50V	1µF
C2576	ECA1HM010GB	ELECT	50V	1µF
C2577	ECA1CM221GB	ELECT	16V	220µF
C2578	ECA1HM2R2GB	ELECT	50V	2.2µF
C2579	ECUV1H103ZFX	S.M.CAP	50V	10nF
C2580	ECEA1HN010UB	ELECT	50V	1µF
C2581	ECA1HM100GB	ELECT	50V	10µF
C2582	ECUV1H103ZFX	S.M.CAP	50V	10nF
C2583	ECA1CM221GB	ELECT	16V	220µF
C2584	ECA1HM010GB	ELECT	50V	1µF
C2585	ECUV1H333KBX	S.M.CAP	50V	33nF
C2586	ECUV1H152JCX	S.M.CAP	50V	1.5pF
C2587	ECUV1H333KBX	S.M.CAP	50V	33nF
C2588	ECA1CM221GB	ELECT	16V	220µF
C2589	ECUV1H330JCX	S.M.CAP	50V	33pF
C2590	ECUV1H330JCX	S.M.CAP	50V	33pF
C2591	ECEA1HN3R3UB	ELECT	50V	3R3µF
C2594	ECEA1HN3R3UB	ELECT	50V	3R3µF
C2595	ECEA1HN010UB	ELECT	50V	1µF
C2596	ECUV1H103ZFX	S.M.CAP	50V	10nF
C2597	ECA1CM471GB	ELECT	16V	470µF
C2700	ECUV1H102KBX	S.M.CAP	50V	1nF
C2701	ECEA1HN010UB	ELECT	50V	1µF
C2702	ECA1CM470GB	ELECT	16V	47µF
C2703	ECEA1HN010UB	ELECT	50V	1µF
C2704	ECEA1HN010UB	ELECT	50V	1µF
C2705	ECUV1H101JCX	S.M.CAP	50V	100pF
C2706	ECUV1H101JCX	S.M.CAP	50V	100pF
C2707	ECUV1H101JCX	S.M.CAP	50V	100pF
C2708	ECEA1HN010UB	ELECT	50V	1µF
C2801	ECA1HM010GB	ELECT	50V	1µF
C2802	ECA1HM010GB	ELECT	50V	1µF
C2803	ECA1HM010GB	ELECT	50V	1µF
C2804	ECA1HM010GB	ELECT	50V	1µF
C2805	ECA1CM100GB	ELECT	16V	10µF
C2806	ECA1HM010GB	ELECT	50V	1µF
C2807	ECUV1H222KBX	S.M.CAP	50V	2.2nF
C2808	ECA1HM010GB	ELECT	50V	1µF
C2809	ECUV1H222KBX	S.M.CAP	50V	2.2nF
C2810	ECA1HM010GB	ELECT	50V	1µF
C2811	ECUV1H222KBX	S.M.CAP	50V	2.2nF
C2812	ECA1HM010GB	ELECT	50V	1µF
C2813	ECUV1H222KBX	S.M.CAP	50V	2.2nF
C2814	ECA1HM101GB	ELECT	50V	100µF
C2815	ECA1CM471GB	ELECT	16V	470µF

Ref No.	Part No.	Description		
C3001	ECKC1H561J	CERAMIC	50V	560pF
C3002	ECKC1H561J	CERAMIC	50V	560pF
C3005	ECCR1H151J	CERAMIC	50V	150pF
C3101	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3111	ECUV1H102JCX	S.M.CAP	50V	1nF
C3113	ECA1HM470GB	ELECT	50V	47µF
C3114	ECA1CM470GB	ELECT	16V	47µF
C3115	ECEA1HNR47UB	ELECT	50V	0.47µF
C3117	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3119	ECA1HM470GB	ELECT	50V	47µF
C3120	ECA1CM470GB	ELECT	16V	47µF
C3123	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3126	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3128	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3130	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3131	ECUV1H473KBX	S.M.CAP	50V	47nF
C3132	ECA1CM470GB	ELECT	16V	47µF
C3133	ECA1CM470GB	ELECT	16V	47µF
C3134	ECA1CM470GB	ELECT	16V	47µF
C3136	ECA1CM470GB	ELECT	16V	47µF
C3137	ECA1HM470GB	ELECT	50V	47µF
C3138	ECA1HM470GB	ELECT	50V	47µF
C3143	ECUV1H561JCX	S.M.CAP	50V	560pF
C3146	ECUV1H561JCX	S.M.CAP	50V	560pF
C3148	ECA1HM4R7GB	ELECT	50V	4.7µF
C3149	ECUV1H561JCX	S.M.CAP	50V	560pF
C3150	ECA1HM4R7GB	ELECT	50V	4.7µF
C3151	ECUV1H561JCX	S.M.CAP	50V	560pF
C3154	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3156	ECA1CM470GB	ELECT	16V	47µF
C3158	ECUV1H102JCX	S.M.CAP	50V	1nF
C3160	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3162	ECA1CM471GB	ELECT	16V	470µF
C3163	ECA1HMR47GB	ELECT	50V	0.47µF
C3165	ECA1HM470GB	ELECT	50V	47µF
C3169	ECUV1H102JCX	S.M.CAP	50V	1nF
C3170	ECUV1H561JCX	S.M.CAP	50V	560pF
C3172	ECUV1H561JCX	S.M.CAP	50V	560pF
C3173	ECA1HMR47GB	ELECT	50V	0.47µF
C3174	ECUV1H561JCX	S.M.CAP	50V	560pF
C3178	ECUV1H561JCX	S.M.CAP	50V	560pF
C3180	ECA1HMR47GB	ELECT	50V	0.47µF
C3181	ERJ6GEY0R00	S.M.CARB	0.1W	5%
C3182	ECUV1H102JCX	S.M.CAP	50V	1nF
C3183	ERJ6GEY0R00	S.M.CARB	0.1W	5%
C3184	ECUV1H473KBX	S.M.CAP	50V	47nF
C3185	ERJ6GEY0R00	S.M.CARB	0.1W	5%
C3186	ECEA1HNR47UB	ELECT	50V	0.47µF
C3187	ECA1HM470GB	ELECT	50V	47µF
C3188	ECEA1CN470	ELECT	16V	47µF
C3190	ECA1HMR47GB	ELECT	50V	0.47µF
C3191	ECA1HM470GB	ELECT	50V	47µF
C3192	ECUV1H473KBX	S.M.CAP	50V	47nF
C3201	ECA1HM010GB	ELECT	50V	1µF
C3202	ECUV1H473ZFX	S.M.CAP	50V	47nF
C3203	ECA1CM100GB	ELECT	16V	10µF
C3204	ECUV1H473ZFX	S.M.CAP	50V	47nF
C3351	ECA1HM101GB	ELECT	50V	100µF
C3501	ECUV1H220JCX	S.M.CAP	50V	22pF
C3502	ECUV1H220JCX	S.M.CAP	50V	22pF
C3503	ECEA1HKN010	ELECT	50V	1µF
C3504	ECUV1H224ZFX	S.M.CAP	50V	0.22µF
C3510	ECUV1H103ZFX	S.M.CAP	50V	10nF
C3511	ECA1HM101GB	ELECT	50V	100µF
C3512	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3514	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3515	ECA0JM331GB	ELECT	6.3V	330µF
C3516	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3521	ECA1HM101GB	ELECT	50V	100µF
C3522	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3801	ECA1HM010GB	ELECT	50V	1µF
C3802	ECUV1H104ZFX	S.M.CAP	50V	100nF

Ref No.	Part No.	Description		
C3803	ECA1CM471GB	ELECT	16V	470 μ F
C3807	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3808	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3809	ECA0JM101G	ELECT	6.3V	100 μ F
C3810	ECUV1H103KBX	S.M.CAP	50V	10nF
C3812	ECA1CM221GB	ELECT	16V	220 μ F
DIODES				
D001	MA4020	DIODE		
D002	MA4020	DIODE		
D251	MA165TA5	DIODE 1SS133T-77		
D252	MA165TA5	DIODE 1SS133T-77		
D253	MA165TA5	DIODE 1SS133T-77		
D254	MA165TA5	DIODE 1SS133T-77		
D351	ERA15-04V3	COIL		
D352	ERA15-04V3	COIL		
D361	ERA15-04V3	COIL		
D362	ERA15-04V3	COIL		
D371	ERA15-04V3	COIL		
D372	ERA15-04V3	COIL		
D387	MA2160LFS	DIODE		
D401	MA165TA5	DIODE 1SS133T-77		
D451	MA4056	DIODE		
D452	MA2330-ALF	DIODE		
D453	TVSEM01ZV0	DIODE		
D502	1SS254T-77	DIODE		
D503	EU02	DIODE		
D504	EU02	DIODE		
D531	1SS254T-77	DIODE		
D532	1SS254T-77	DIODE		
D533	1SS254T-77	DIODE		
D551	EU02	DIODE		
D556	AU02V0	DIODE		
D557	ERC91-02L9	DIODE		
D558	AU02V0	DIODE		
D559	MTZJT-7736A	DIODE		
D560	1SS252T-77	DIODE		
D561	1SS254T-77	DIODE		
D563	RH3GLF102	DIODE		
D571	FMV-3GULF027	DIODE		
D574	1SS252T-77	DIODE		
D575	1SS252T-77	DIODE		
D602	MA165TA5	DIODE 1SS133T-77		
D603	MA165TA5	DIODE 1SS133T-77		
D604	MA4062	DIODE		
D706	MA165TA5	DIODE 1SS133T-77		
D707	MA188TA	DIODE		
D806	TF361MALF3	DIODE		
D807	RBV-608LF-B	DIODE		
D808	1SS254T-77	DIODE		
D809	ERA22-02V3	DIODE		
D810	MA2160LFS	DIODE		
D812	MTZJT-775.6B	DIODE		
D813	MA700TA5	DIODE		
D814	AU01ZV0	DIODE		
D815	PC123FY2	DIODE		
D817	D5L60F4015	DIODE		
D818	TMPG10G3	DIODE		
D819	ERA81004V3	DIODE		
D820	MA4100	DIODE		
D821	EU02AV0	DIODE		
D822	MTZJT-7718C	DIODE		
D845	1SS254T-77	DIODE		
D846	TVSS1WBS20	DIODE		
D847	ERA15-01V1	DIODE		
D848	ERB32-02E	DIODE RU30LFS1		
D849	FMGG26S	DIODE		
D850	EU02	DIODE		
D851	FMGG2CS	DIODE		
D852	MTZJT-779.1C	DIODE		

Ref No.	Part No.	Description		
D853	1SS254T-77	DIODE		
D854	1SS254T-77	DIODE		
D855	D10SC6MRL	DIODE		
D857	FML22SLF610	DIODE		
D860	1SS254T-77	DIODE		
D861	MTZJT-7713B	DIODE		
D901	1SS254T-77	DIODE		
D902	1SS254T-77	DIODE		
D903	1SS254T-77	DIODE		
D1051	LN81RPHL	DIODE		
D1052	AU01V0	DIODE		
D1053	AU01V0	DIODE		
D1054	AU01V0	DIODE		
D1055	AU01V0	DIODE		
D1056	AU01V0	DIODE		
D1057	AU01V0	DIODE		
D1102	MA4051	DIODE		
D1107	MTZJT-775.6A	DIODE		
D1108	1SS254T-77	DIODE		
D1109	1SS254T-77	DIODE		
D1113	MA4051	DIODE		
D1552	RLS72TE-11	DIODE OR PMLL4148		
D2003	MA4091	DIODE		
D2004	MA165TA5	DIODE 1SS133T-77		
D2005	MA723TA5	DIODE		
D2006	MA723TA5	DIODE		
D2007	MA165TA5	DIODE 1SS133T-77		
D2008	MA165TA5	DIODE 1SS133T-77		
D2421	1SS355TE-17	DIODE		
D2422	1SS355TE-17	DIODE		
D2480	1SS355TE-17	DIODE		
D2501	D5L60F4015	DIODE		
D2502	EG01CV0	DIODE		
D2503	EU02	DIODE		
D2504	TVSEH1V0	DIODE		
D2505	MTZJT-778.2A	DIODE		
D2506	EU02	DIODE		
D2507	EU02	DIODE		
D2510	EU02	DIODE		
D2511	RU4AMLF-M1	DIODE		
D2512	1SS355TE-17	DIODE		
D2513	1SS254T-77	DIODE		
D2514	1SS355TE-17	DIODE		
D2515	1SS355TE-17	DIODE		
D2517	1SS254T-77	DIODE		
D2518	1SS254T-77	DIODE		
D2519	1SS254T-77	DIODE		
D2520	1SS254T-77	DIODE		
D2521	1SS254T-77	DIODE		
D2522	1SS254T-77	DIODE		
D2523	1SS254T-77	DIODE		
D2524	MTZJT-7712C	DIODE		
D2525	MTZJT-7712C	DIODE		
D2526	MTZJT-7712C	DIODE		
D2527	MTZJT-7712C	DIODE		
D2528	UDZTE-176.8B	DIODE		
D2529	1SS355TE-17	DIODE		
D2530	1SS355TE-17	DIODE		
D2531	1SS355TE-17	DIODE		
D2801	RLS73TE-11	COIL		
D3101	PMLL5242B	DIODE		
D3105	PMLL5242B	DIODE		
D3107	PMLL5242B	DIODE		
D3109	PMLL5242B	DIODE		
D3110	PMLL5242B	DIODE		
D3111	PMLL5242B	DIODE		
D3112	PMLL5242B	DIODE		
D3115	PMLL5242B	DIODE		
D3117	PMLL5242B	DIODE		
D3120	RLS72TE-11	DIODE OR PMLL4148		
D3351	1SS254T-77	DIODE		
D3501	MA4030	DIODE		

Ref No.	Part No.	Description	
D3801	MA4043	DIODE	
D3802	MTZJT-778.2A	DIODE	
D3803	ERA81004V3	DIODE	
D3805	MA4091	DIODE	
D3806	MA165TA5	DIODE 1SS133T-77	
D3807	MA165TA5	DIODE 1SS133T-77	

FUSES

F532	TR5-T1250	FUSE	▲
F801	XBA2C50TH15	FUSE	
F845	TR5-T2000	FUSE	▲
F846	TR5-T1250	FUSE	▲
F8011	EYF52BC	FUSE HOLDER	
F8012	EYF52BC	FUSE HOLDER	

TERMINALS AND LINKS

JA1	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA10	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA2	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA3	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA4	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA5	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA6	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA7	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA8	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JA9	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JC1	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JC2	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JC3	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JK2501	TJB8E013	6 PIN PUSH TERMINAL			
JK2502	TJB8E015	RCA TERMINAL (3P)			
JK2503	TJB8E014	RCA TERMINAL (2P)			
JK3001	TJB16656	A.V.TERMINAL			
JSE012	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE015	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE022	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE023	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE024	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE025	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE028	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE042	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE050	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE056	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE057	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE058	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE062	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE064	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE066	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSE09	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF001	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF002	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF004	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF005	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF015	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF026	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF038	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF040	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF041	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF045	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF046	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF049	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF050	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF054	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF056	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF059	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF061	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSF062	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSH01	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω

Ref No.	Part No.	Description			
JSH010	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
JSH02	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
J1	ERD25TC0T	CARBON	0.25W	5%	0Ω
J2	ERD25TC0T	CARBON	0.25W	5%	0Ω
COILS					
LC1503	ELKTR391CA	DELAY LINE			
LC1507	EXCEMT103DTM	COIL			
LC1508	EXCEMT103DTM	COIL			
LC1509	EXCEMT103DTM	COIL			
LC1510	EXCEMT103DTM	COIL			
LC1601	ELKTR391CA	DELAY LINE			
LC1602	ELKTR391CA	DELAY LINE			
LC1603	ELKTR391CA	DELAY LINE			
LC1609	ELKTR560BA	DELAY LINE			
L002	TLT047K991R	COIL			
L004	TLT047K991R	COIL			
L005	TLT047K991R	COIL			
L101	ELESNR56MA	COIL			
L104	ELESN6R8KA	COIL			
L105	ELESN2R2KA	COIL			
L106	EIV7EN201B	COIL			
L107	EIV7EN200B	COIL			
L252	EXCELSA35T	COIL			
L253	EXCELSA35T	COIL			
L254	EXCELSA35T	COIL			
L255	EXCELSA35T	COIL			
L351	SDL5000	DELAY LINE			
L352	EXCELDR25V	COIL			
L361	SDL5000	DELAY LINE			
L362	EXCELDR25V	COIL			
L371	SDL5000	DELAY LINE			
L372	EXCELDR25V	COIL			
L381	TLT220K991R	COIL			
L401	EXCELDR35V	COIL			
L402	EXCELDR35V	COIL			
L451	EXCELDR35V	COIL			
L552	EXCELSA35T	COIL			
L553	EXCELSA35T	COIL			
L554	EXCELDR35V	COIL			
L555	EXCELDR35C	COIL			
L571	ELC18B271E	COIL			
L572	ELHKL0B025B	COIL			
L573	ELHKL0B026B	COIL			
L575	ELC18B271E	COIL			
L601	TLT047K991R	COIL			
L602	TLT047K991R	COIL			
L603	TLT047K991R	COIL			
L605	EXCELDR25V	COIL			
L801	ELF18D486D	COIL			
L802	ELF18D486D	COIL			
L807	ELF18D856A	COIL			
L808	EXCELSA35T	COIL			
L809	EXCELDR35C	COIL			
L810	EXCELSA39V	COIL			
L811	EXCELSA39V	COIL			
L812	EXCELDR35V	COIL			
L813	EXCELDR35V	COIL			
L817	EXCELDR35V	COIL			
L845	EXCELSA35T	COIL			
L847	EXCELSA35B	COIL			
L848	EXCELSA35T	COIL			
L850	EXCELSA35T	COIL			
L851	EXCELSA35B	COIL			
L852	EXCELSA35T	COIL			
L853	EXCELSA35T	COIL			
L854	ELEIE150KA	COIL			
L856	EXCELSA35T	COIL			
L861	EXCELSA35T	COIL			
L862	EXCELSA35T	COIL			
L1102	EXCELDR35V	COIL			

Ref No.	Part No.	Description
L1103	EXCELDR35V	COIL
L1104	EXCELSA35T	COIL
L1105	ELEXT4R7KA	COIL
L1301	TLT330K991R	COIL
L1302	TLT100K991R	COIL
L1303	TLT101K991R	COIL
L1304	TLT100K991R	COIL
L1306	TLT101K991R	COIL
L1307	ERD25TC0T	CARBON 0.25W 5% 0Ω
L1501	EXCELDR35V	COIL
L1502	TLT033K991R	COIL
L1503	TLT033K991R	COIL
L1504	TLT033K991R	COIL
L1552	EXCELDR35V	COIL
L1553	EXCELDR35V	COIL
L1575	EXCELDR35V	COIL
L1576	EXCELDR35V	COIL
L1601	EXCELDR35V	COIL
L1602	EXCELDR35V	COIL
L1603	TLT100K991R	COIL
L1604	TLT100K991R	COIL
L1605	TLT100K991R	COIL
L1606	TLT100K991R	COIL
L1607	EXCELDR35V	COIL
L1641	EXCELDR35V	COIL
L1701	EXCELDR35V	COIL
L1721	EXCELDR35V	COIL
L1722	EXCELDR35V	COIL
L2001	TLT047K991R	COIL
L2003	EXCELDR35V	COIL
L2005	TLT068K991R	COIL
L2351	ELEBR6R8KA	COIL
L2361	ELEBR6R8KA	COIL
L2501	EXCELSA35T	COIL
L2502	EXCELSA35T	COIL
L2503	EXCELSA35T	COIL
L2504	EXCELSA35T	COIL
L2505	5770206400	COIL
L2506	5770206400	COIL
L2507	5770206400	COIL
L2508	TLT100K991R	COIL
L2509	TLT100K991R	COIL
L2510	TLT100K991R	COIL
L2511	EXCELSA35T	COIL
L2512	EXCELSA35T	COIL
L2513	EXCELSA35T	COIL
L2514	5770206400	COIL
L3001	ELEBR6R8KA	COIL
L3002	ELEBR6R8KA	COIL
L3003	ELEBR470KA	COIL
L3107	EXCELDR35V	COIL
L3108	EXCELDR35V	COIL
L3109	EXCELDR35V	COIL
L3110	EXCELDR35V	COIL
L3111	EXCELDR35V	COIL
L3112	EXCELDR35V	COIL
L3113	EXCELDR35V	COIL
L3114	EXCELDR35V	COIL
L3503	EXCELDR35V	COIL
L3507	EXCELDR35V	COIL
L3509	EXCELDR35V	COIL
L3511	TLT100K991R	COIL

TRANSISTORS

Q008	BC847B	TRANSISTOR OR 2SD601ATX
Q101	BC847B	TRANSISTOR OR 2SD601ATX
Q102	BF370-126	TRANSISTOR
Q103	BC847B	TRANSISTOR OR 2SD601ATX
Q104	BF370-126	TRANSISTOR
Q105	BC847B	TRANSISTOR OR 2SD601ATX

Ref No.	Part No.	Description
Q106	BC847B	TRANSISTOR OR 2SD601ATX
Q109	BC860B	TRANSISTOR
Q251	BC847B	TRANSISTOR OR 2SD601ATX
Q252	BC847B	TRANSISTOR OR 2SD601ATX
Q401	BC847B	TRANSISTOR OR 2SD601ATX
Q502	2SC2925STA	TRANSISTOR
Q531	BC547B	TRANSISTOR
Q532	BC547B	TRANSISTOR
Q533	BC547B	TRANSISTOR
Q535	BC547B	TRANSISTOR
Q551	BC547B	TRANSISTOR
Q552	2SC5144LBMA1	TRANSISTOR
Q553	2SC1473-RN	TRANSISTOR
Q554	2SC1473-RN	TRANSISTOR
Q573	BC557B	TRANSISTOR
Q574	2SD1265AOPLB	TRANSISTOR
Q601	BC847B	TRANSISTOR OR 2SD601ATX
Q602	BC857B	TRANSISTOR OR 2SB709ATX
Q603	BC847B	TRANSISTOR OR 2SD601ATX
Q604	BC857B	TRANSISTOR OR 2SB709ATX
Q605	BC857B	TRANSISTOR OR 2SB709ATX
Q607	BC847B	TRANSISTOR OR 2SD601ATX
Q608	BC847B	TRANSISTOR OR 2SD601ATX
Q609	BC847B	TRANSISTOR OR 2SD601ATX
Q610	BC847B	TRANSISTOR OR 2SD601ATX
Q611	BC847B	TRANSISTOR OR 2SD601ATX
Q612	BC847B	TRANSISTOR OR 2SD601ATX
Q801	2SK1489MAT	TRANSISTOR
Q803	2SD965-R	TRANSISTOR
Q804	2SA719-TA	TRANSISTOR
Q845	2SA684R	TRANSISTOR
Q846	BC547B	TRANSISTOR
Q847	BC557B	TRANSISTOR
Q848	BC547B	TRANSISTOR
Q849	2SA1018QTA	TRANSISTOR
Q850	2SD1474PLB	TRANSISTOR
Q851	BC547B	TRANSISTOR
Q852	BC547B	TRANSISTOR
Q901	BC847B	TRANSISTOR OR 2SD601ATX
Q902	BC847B	TRANSISTOR OR 2SD601ATX
Q903	BC847B	TRANSISTOR OR 2SD601ATX
Q904	BC857B	TRANSISTOR OR 2SB709ATX
Q905	BC847B	TRANSISTOR OR 2SD601ATX
Q906	BC847B	TRANSISTOR OR 2SD601ATX
Q907	BC857B	TRANSISTOR OR 2SB709ATX
Q908	2SA1535ARLB	TRANSISTOR
Q909	2SC3944ARLB	TRANSISTOR
Q1052	BC557B	TRANSISTOR
Q1101	BC847B	TRANSISTOR OR 2SD601ATX
Q1102	BC847B	TRANSISTOR OR 2SD601ATX
Q1103	BC847B	TRANSISTOR OR 2SD601ATX
Q1108	BC847B	TRANSISTOR OR 2SD601ATX
Q1112	2SC3757QRTX	TRANSISTOR
Q1191	BC847B	TRANSISTOR OR 2SD601ATX
Q1301	BC847B	TRANSISTOR OR 2SD601ATX
Q1303	BC847B	TRANSISTOR OR 2SD601ATX
Q1304	BC847B	TRANSISTOR OR 2SD601ATX
Q1501	BC847B	TRANSISTOR OR 2SD601ATX
Q1502	BC847B	TRANSISTOR OR 2SD601ATX
Q1503	BC847B	TRANSISTOR OR 2SD601ATX
Q1575	BC847B	TRANSISTOR OR 2SD601ATX
Q1642	BC847B	TRANSISTOR OR 2SD601ATX
Q1643	BC847B	TRANSISTOR OR 2SD601ATX
Q1644	BC857B	TRANSISTOR OR 2SB709ATX
Q1647	BC847B	TRANSISTOR OR 2SD601ATX
Q1648	BC857B	TRANSISTOR OR 2SB709ATX
Q1649	BC857B	TRANSISTOR OR 2SB709ATX
Q2001	BC860B	TRANSISTOR
Q2002	BC860B	TRANSISTOR
Q2003	BC860B	TRANSISTOR
Q2004	BC860B	TRANSISTOR
Q2005	BC857B	TRANSISTOR OR 2SB709ATX

Ref No.	Part No.	Description			
Q2006	BC857B	TRANSISTOR OR 2SB709ATX			
Q2351	BC547B	TRANSISTOR			
Q2352	BC547B	TRANSISTOR			
Q2353	BC557B	TRANSISTOR			
Q2361	BC547B	TRANSISTOR			
Q2362	BC547B	TRANSISTOR			
Q2363	BC557B	TRANSISTOR			
Q2480	BC847B	TRANSISTOR OR 2SD601ATX			
Q2501	BC557B	TRANSISTOR			
Q2502	2SA684R	TRANSISTOR			
Q2504	BC847B	TRANSISTOR OR 2SD601ATX			
Q2505	BC857B	TRANSISTOR OR 2SB709ATX			
Q2506	BC847B	TRANSISTOR OR 2SD601ATX			
Q2507	BC847B	TRANSISTOR OR 2SD601ATX			
Q2508	BC857B	TRANSISTOR OR 2SB709ATX			
Q2509	BC847B	TRANSISTOR OR 2SD601ATX			
Q2510	BC857B	TRANSISTOR OR 2SB709ATX			
Q2511	BC847B	TRANSISTOR OR 2SD601ATX			
Q2512	BC857B	TRANSISTOR OR 2SB709ATX			
Q2513	BC847B	TRANSISTOR OR 2SD601ATX			
Q2514	BC847B	TRANSISTOR OR 2SD601ATX			
Q2515	BC857B	TRANSISTOR OR 2SB709ATX			
Q2516	BC847B	TRANSISTOR OR 2SD601ATX			
Q2518	BC847B	TRANSISTOR OR 2SD601ATX			
Q2801	BC847B	TRANSISTOR OR 2SD601ATX			
Q3105	BC847B	TRANSISTOR OR 2SD601ATX			
Q3106	BC847B	TRANSISTOR OR 2SD601ATX			
Q3107	BC857B	TRANSISTOR OR 2SB709ATX			
Q3108	BC847B	TRANSISTOR OR 2SD601ATX			
Q3113	BC847B	TRANSISTOR OR 2SD601ATX			
Q3115	BC857B	TRANSISTOR OR 2SB709ATX			
Q3201	BC847B	TRANSISTOR OR 2SD601ATX			
Q3351	BC847B	TRANSISTOR OR 2SD601ATX			
Q3352	BC857B	TRANSISTOR OR 2SB709ATX			
Q3501	BC847B	TRANSISTOR OR 2SD601ATX			
Q3502	BC847B	TRANSISTOR OR 2SD601ATX			
Q3503	2SC3130TX	TRANSISTOR			
Q3801	2SD1474PLB	TRANSISTOR			

RESISTOR

RL806	TSE1885-1	RELAY			
R003	ERJ6GEYJ223	S.M.CARB 0.1W	5%	22KΩ	
R006	ERJ6GEYJ393	S.M.CARB 0.1W	5%	39KΩ	
R011	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R012	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R101	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R102	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R104	ERJ6GEYJ123	S.M.CARB 0.1W	5%	12KΩ	
R105	ERJ6GEYJ272	S.M.CARB 0.1W	5%	2K7Ω	
R108	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω	
R110	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R111	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R112	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R113	ERJ6GEYJ563	S.M.CARB 0.1W	5%	56KΩ	
R114	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R115	ERJ6GEYJ222	S.M.CARB 0.1W	5%	2K2Ω	
R116	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R118	ERJ6GEYJ473	S.M.CARB 0.1W	5%	47KΩ	
R119	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ	
R122	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R123	ERJ6GEYJ122	S.M.CARB 0.1W	5%	1K2Ω	
R124	ERJ6GEYJ681	S.M.CARB 0.1W	5%	680Ω	
R125	ERJ6GEYJ122	S.M.CARB 0.1W	5%	1K2Ω	
R126	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R127	ERJ6GEYJ121	S.M.CARB 0.1W	5%	120Ω	
R128	ERJ6GEYJ271	S.M.CARB 0.1W	5%	270Ω	
R129	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω	
R131	ERJ6GEYJ332	S.M.CARB 0.1W	5%	3K3Ω	
R133	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R135	ERJ6GEYJ222	S.M.CARB 0.1W	5%	2K2Ω	

Ref No.	Part No.	Description			
R137	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R138	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R141	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R142	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180Ω
R143	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R144	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ
R145	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R146	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R147	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R148	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68KΩ
R149	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R151	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R153	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R251	ERJ6GEYJ2R2	SM.CARB0.	0.125W	5%	2R2Ω
R252	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R253	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R254	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R255	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R256	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R257	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R258	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R259	ERG3JS120	METAL	3W	5%	12Ω ▲
R260	ERJ6GEYJ2R2	SM.CARB0.	0.125W	5%	2R2Ω
R261	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R262	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R263	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R264	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R265	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R266	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R267	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω
R268	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω
R269	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R270	ERG3JS120	METAL	3W	5%	12Ω ▲
R350	ERQ12AJ151P	FUSIBLE	12W	5%	150Ω ▲
R351	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R352	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R354	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R355	ERG2FJ823	METAL	2W	5%	82KΩ ▲
R356	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R357	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R358	ERDS1TJ821	CARBON	0.5W	5%	820Ω
R359	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330KΩ
R360	ERDS1TJ103	CARBON	0.5W	5%	10KΩ
R361	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R362	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R364	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R365	ERG2FJ823	METAL	2W	5%	82KΩ ▲
R366	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R367	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R368	ERDS1TJ821	CARBON	0.5W	5%	820Ω
R369	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R370	ERQ1CKPR33	METAL	0.5W	10%	R33Ω ▲
R371	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R372	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R374	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R375	ERG2FJ823	METAL	2W	5%	82KΩ ▲
R376	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R377	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R378	ERDS1TJ821	CARBON	0.5W	5%	820Ω
R379	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R380	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R381	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω
R383	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R390	ERDS1TJ184	CARBON	0.5W	5%	180K
R401	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R402	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R403	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R406	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R407	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R408	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R409	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R410	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω

Ref No.	Part No.	Description			
R411	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12KΩ
R412	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R451	ERJ6GEYJ302	S.M.CARB	0.1W	5%	3K0Ω
R452	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56KΩ
R453	ERG2FJ820	METAL	2W	5%	82Ω ▲
R454	ERX12SJR82P	METAL	12W	5%	R82Ω
R455	ERX12SJR82P	METAL	12W	5%	R82Ω
R456	ERQ14AJ220	FUSIBLE	14W	5%	22Ω ▲
R457	ERDS1TJ223	CARBON	0.5W	5%	22KΩ
R458	ERG1SJ272	METAL	1W	5%	2K7Ω ▲
R459	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R504	ERD25TJ271	CARBON	0.25W	5%	270Ω
R505	ERG3SJS330	METAL	3W	5%	33Ω ▲
R506	ERDS1TJ152	CARBON	0.5W	5%	1K5Ω
R507	ERDS1TJ152	CARBON	0.5W	5%	1K5Ω
R531	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R532	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R533	ERD25TJ683	CARBON	0.25W	5%	68KΩ
R534	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R535	ERD25TJ472	CARBON	0.25W	5%	4K7Ω
R536	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R539	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R540	ERD25TJ183	CARBON	0.25W	5%	18KΩ
R541	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R542	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R543	ERD25TJ222	CARBON	0.25W	5%	2K2Ω
R547	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R551	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R552	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R553	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R554	ERX3SJSR27H	METAL	3W	5%	R27Ω
R555	ERD25TJ682	CARBON	0.25W	5%	6K8Ω
R556	ERO50PKF2802	METAL	50W	1%	28KΩ ▲
R557	ERD25TJ333	CARBON	0.25W	5%	33KΩ
R558	ERO50PKF4532	METAL	50W	1%	45KΩ ▲
R559	ERD25TJ273	CARBON	0.25W	5%	27KΩ
R562	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R564	ERDS1TJ394	CARBON	0.5W	5%	390KΩ
R565	ERQ14AJW2R2	FUSIBLE	14W	5%	2R2Ω ▲
R566	ERDS1TJ183	CARBON	0.5W	5%	18KΩ
R567	ERG2ANJ223	METAL	2W	5%	22KΩ
R568	ERQ12HJ330	METAL	0.5W	5%	33Ω ▲
R569	ERDS1TJ120	CARBON	0.5W	5%	12Ω
R570	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R571	ERX3FJ2R7H	METAL	3W	5%	2R7Ω
R572	ERG3FJ821	METAL	3W	5%	82Ω ▲
R574	ERG3FJ151	METAL	3W	5%	150Ω ▲
R579	ERD25TJ274	CARBON	0.25W	5%	270KΩ
R580	ERD25TJ563	CARBON	0.25W	5%	56KΩ
R581	ERD25TJ104	CARBON	0.25W	5%	100KΩ
R582	ERD25TJ225	CARBON	0.25W	5%	2M2Ω
R583	ERD25TJ225	CARBON	0.25W	5%	2M2Ω
R584	ERD25TJ152	CARBON	0.25W	5%	1K5Ω
R585	TSF19201	FS LINK			▲
R587	ERD25TJ222	CARBON	0.25W	5%	2K2Ω
R588	ERD25TJ222	CARBON	0.25W	5%	2K2Ω
R589	ERDS1TJ100	CARBON	0.5W	5%	10Ω
R601	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R602	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R603	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R604	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R605	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R606	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R609	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R610	ERJ6GEYJ823	S.M.CARB	0.1W	55	82KΩ
R612	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R613	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R615	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R616	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R617	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R618	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R619	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω

Ref No.	Part No.	Description			
R620	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R621	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R624	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R625	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R626	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R627	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R628	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R629	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R630	ERJ6GEYJ270	SM.CARB0.125W		5%	27Ω
R632	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R633	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R634	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R635	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R636	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R637	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R639	EVNDXAA03B32	CONTROL			300Ω
R640	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R643	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R644	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R645	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270Ω
R646	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R647	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R648	ERJ6GEYJ150	S.M.CARB	0.1W	5%	15Ω
R649	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R651	ERJ6GEYJ225	SM.CARB0.125W		5%	2M2Ω
R652	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R653	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R654	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R655	ERJ6GEYJ243	SM.CARB0.125W		5%	24KΩ
R656	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R657	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R658	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R659	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R660	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R661	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R662	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R663	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R664	ERC14GJ206V	SOLID	14W	5%	20MΩ
R665	ERC14GJ206V	SOLID	14W	5%	20MΩ
R666	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R667	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R668	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R711	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330KΩ
R712	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R714	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8Ω
R715	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R716	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R717	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R718	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R753	ERD25TJ183	CARBON	0.25W	5%	18KΩ
R805	232266296706	THERMISTOR			
R807	ERD25TJ104	CARBON	0.25W	5%	100KΩ
R809	ERF10ZK4R7	WOUND	10W	5%	4R7Ω ▲
R810	ERD25TJ223	CARBON	0.25W	5%	22KΩ
R811	ERD25TJ391	CARBON	0.25W	5%	390Ω
R812	ERD25TJ681	CARBON	0.25W	5%	680Ω
R814	ERD25TJ332	CARBON	0.25W	5%	3K3Ω
R815	ERD25TJ150	CARBON	0.25W	5%	15Ω
R816	ERDS1TJ470	CARBON	0.5W	5%	47Ω
R818	ERD25TJ331	CARBON	0.25W	5%	330Ω
R820	ERG3FJ223	METAL	3W	5%	22KΩ ▲
R821	ERG3FJ223	METAL	3W	5%	22KΩ ▲
R822	ERD25TJ391	CARBON	0.25W	5%	390Ω
R823	ERX2SJR22	METAL	2W	5%	R22Ω
R824	ERX2SJR22	METAL	2W	5%	R22Ω
R825	ERX2SJR22	METAL	2W	5%	R22Ω
R827	ERDS1FJ100	CARBON	0.5W	5%	10Ω
R828	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R829	ERD25TJ471	CARBON	0.25W	5%	470Ω
R831	ERD75TAJ825	CARBON	0.75W	5%	8M2Ω ▲
R832	ERG1SJ331	METAL	1W	5%	330Ω ▲
R835	ERD25TJ220	CARBON	0.25W	5%	22Ω

Ref No.	Part No.	Description				
R836	ERD25TJ100	CARBON	0.25W	5%	10Ω	
R837	ERD25TJ153	CARBON	0.25W	5%	15KΩ	
R838	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R847	ERQ1CKP82	METAL	1W	5%	R82Ω	▲
R853	ERO25CKF1002	METAL	0.25W	1%	10KΩ	▲
R854	ERDS1TJ153	CARBON	0.5W	5%	15KΩ	
R855	ERD25TJ472	CARBON	0.25W	5%	4K7Ω	
R856	ERD25TJ473	CARBON	0.25W	5%	47KΩ	
R858	ERO25CKF1002	METAL	0.25W	1%	10KΩ	▲
R862	ERD25TJ472	CARBON	0.25W	5%	4K7Ω	
R863	ERG3FJ680	METAL	3W	5%	68Ω	▲
R864	ERDS1TJ103	CARBON	0.5W	5%	10KΩ	
R865	ERG3FJ680	METAL	3W	5%	68Ω	▲
R867	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R870	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R873	ERDS1TJ3R3	CARBON	0.5W	5%	3R3Ω	
R876	ERD25TJ562	CARBON	0.25W	5%	5K6Ω	
R877	ERO25CKF1022	METAL	25W	1%	10KΩ	▲
R878	ERO25CKF1002	METAL	0.25W	1%	10KΩ	▲
R883	ERD25TJ103	CARBON	0.25W	5%	10KΩ	
R885	ERD25TJ103	CARBON	0.25W	5%	10KΩ	
R886	ERF10ZK4R7	WOUND	10W	5%	4R7Ω	▲
R888	ERDS1TJ393	CARBON	0.5W	5%	39KΩ	
R889	ERD25TJ392	CARBON	0.25W	5%	3K9Ω	
R890	ERX3SJR56	METAL	3W	5%	R56Ω	
R891	ERD25TJ103	CARBON	0.25W	5%	10KΩ	
R892	ERD25TJ222	CARBON	0.25W	5%	2K2Ω	
R905	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω	
R906	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56KΩ	
R907	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2Ω	
R908	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R909	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R910	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω	
R911	ERD25TJ561	CARBON	0.25W	5%	560Ω	
R913	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ	
R914	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R915	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8Ω	
R916	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω	
R918	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R919	ERQ14AJW390	FUSIBLE	14W	5%	39Ω	▲
R920	ERQ14AJW390	FUSIBLE	14W	5%	39Ω	▲
R922	ERD25TJ683	CARBON	0.25W	5%	68KΩ	
R923	ERD25TJ683	CARBON	0.25W	5%	68KΩ	
R924	ERDS1FYJ390	CARBON	0.5W	5%	39Ω	▲
R925	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0Ω	
R926	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0Ω	
R927	ERD25TJ122	CARBON	0.25W	5%	1K2Ω	
R928	ERD25TJ2R7	CARBON	0.25W	5%	2R7Ω	
R929	ERDS1FYJ221	CARBON	0.5W	5%	220Ω	
R930	ERD25TJ2R7	CARBON	0.25W	5%	2R7Ω	
R931	ERDS1FYJ390	CARBON	0.5W	5%	39Ω	▲
R932	ERDS1FYJ101	CARBON	0.5W	5%	100Ω	▲
R933	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R934	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R935	ERQ14AJW3R9	FUSIBLE	14W	5%	3R9Ω	▲
R936	ERQ1CJP102	METAL	1W	5%	1KΩ	▲
R937	ERQ14AJW100	METAL	0.25W	5%	10Ω	▲
R938	ERD25TJ122	CARBON	0.25W	5%	1K2Ω	
R1054	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R1057	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R1058	ERD25TJ471	CARBON	0.25W	5%	470Ω	
R1059	ERD25TJ103	CARBON	0.25W	5%	10KΩ	
R1061	ERD25TJ103	CARBON	0.25W	5%	10KΩ	
R1062	ERD25TJ222	CARBON	0.25W	5%	2K2Ω	
R1063	ERD25TJ222	CARBON	0.25W	5%	2K2Ω	
R1064	ERD25TJ332	CARBON	0.25W	5%	3K3Ω	
R1065	ERD25TJ512	CARBON	0.25W	5%	5K1Ω	
R1066	ERD25TJ912	CARBON	0.25W	5%	9K1Ω	
R1101	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1102	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1103	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	

Ref No.	Part No.	Description				
R1104	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1105	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1106	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1107	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1108	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1111	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1112	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1113	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1116	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1117	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1118	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1119	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1120	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1121	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1122	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1123	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1124	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1125	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1126	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1127	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1128	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω	
R1129	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω	
R1133	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1134	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1135	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0Ω	
R1136	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω	
R1137	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω	
R1138	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1140	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1142	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1145	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1150	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1151	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1152	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1153	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1154	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1156	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8Ω	
R1163	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5Ω	
R1164	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1169	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1170	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω	
R1171	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8Ω	
R1172	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω	
R1174	ERDS1TJ561	CARBON	0.5W	5%	560Ω	
R1182	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1183	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1184	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1185	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1186	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1188	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R1190	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0Ω	
R1191	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ	
R1192	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ	
R1193	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1194	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1301	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1302	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω	
R1305	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1306	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1307	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω	
R1308	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1MΩ	
R1313	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0Ω	
R1315	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1317	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180Ω	
R1318	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180Ω	
R1319	ERJ6GEYOR00	S.M.CARB	0.1W	5%	0Ω	
R1320	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1321	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1322	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1323	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1324	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	

Ref No.	Part No.	Description				
R1325	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1326	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1327	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω	
R1328	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1329	ERJ6GEYJ0R00	S.M.CARB	0.1W	5%	0Ω	
R1337	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω	
R1340	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω	
R1501	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1502	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1504	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120Ω	
R1507	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω	
R1508	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120Ω	
R1510	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1511	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω	
R1513	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω	
R1515	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1516	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1517	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1518	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1519	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1520	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1523	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1550	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω	
R1551	ERJ6GEYJ180	S.M.CARB	0.1W	5%	18Ω	
R1552	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1554	ERJ6GEYJ180	S.M.CARB	0.1W	5%	18Ω	
R1555	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω	
R1560	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1561	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1562	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1563	ERJ6GEYJ180	S.M.CARB	0.1W	5%	18Ω	
R1568	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω	
R1570	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω	
R1572	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω	
R1575	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω	
R1576	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω	
R1577	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω	
R1578	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω	
R1581	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1605	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1606	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1608	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1620	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1621	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1622	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1624	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R1625	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270Ω	
R1626	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω	
R1627	ERJ6GEYJ622	SM.CARB0.125W		5%	6K2Ω	
R1628	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω	
R1629	ERJ6GEYJ201	S.M.CARB	0.1W	5%	200Ω	
R1630	ERJ6GEYJ181	S.M.CARB	0.1W	5%	180Ω	
R1631	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R1632	ERJ6GEYJ133	SM.CARB0.125W		5%	13KΩ	
R1633	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω	
R1634	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R1641	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1643	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1644	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1646	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω	
R1647	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω	
R1648	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1649	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1650	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1652	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1653	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1654	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1656	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R1659	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1662	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1666	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R1667	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	

Ref No.	Part No.	Description				
R1668	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω	
R1679	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ	
R1680	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ	
R1681	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R1682	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω	
R1683	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω	
R1688	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω	
R1701	ERJ6GEYJ180	S.M.CARB	0.1W	5%	18Ω	
R1703	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1704	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R1705	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ	
R1706	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ	
R1707	ERJ6GEYJ180	S.M.CARB	0.1W	5%	18Ω	
R1710	ERJ6GEYJ180	S.M.CARB	0.1W	5%	18Ω	
R1713	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω	
R1716	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R1724	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω	
R1730	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω	
R1777	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω	
R1778	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω	
R2001	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ	
R2002	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2004	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ	
R2005	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R2006	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R2007	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ	
R2008	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R2009	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R2010	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R2011	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R2012	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω	
R2013	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R2014	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2015	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R2016	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2017	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω	
R2018	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2019	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2020	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω	
R2021	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R2022	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2023	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R2024	ERD25TJ221	CARBON	0.25W	5%	220Ω	
R2027	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ	
R2038	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω	
R2040	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ	
R2041	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ	
R2044	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2045	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω	
R2351	ERQ14AJW100	METAL	0.25W	5%	10Ω	▲
R2352	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R2353	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R2354	ERD25TJ473	CARBON	0.25W	5%	47KΩ	
R2355	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2356	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2357	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2358	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2359	ERD25TJ271	CARBON	0.25W	5%	270Ω	
R2360	ERD25TJ183	CARBON	0.25W	5%	18KΩ	
R2361	ERD25TJ100	CARBON	0.25W	5%	10Ω	
R2371	ERQ14AJW100	METAL	0.25W	5%	10Ω	▲
R2372	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R2373	ERD25TJ101	CARBON	0.25W	5%	100Ω	
R2374	ERD25TJ473	CARBON	0.25W	5%	47KΩ	
R2375	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2376	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2377	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2378	ERD25TJ102	CARBON	0.25W	5%	1KΩ	
R2379	ERD25TJ271	CARBON	0.25W	5%	270Ω	
R2380	ERD25TJ183	CARBON	0.25W	5%	18KΩ	
R2381	ERD25TJ100	CARBON	0.25W	5%	10Ω	

Ref No.	Part No.	Description			
R2401	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56KΩ
R2402	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56KΩ
R2403	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2404	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2405	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R2406	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω
R2408	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R2409	ERJ6GEYJ1R0	SM.CARB0.125W		5%	1R0Ω
R2410	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2411	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω
R2412	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R2413	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2416	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2417	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2418	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2419	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2420	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2421	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2422	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2423	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2424	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R2425	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2426	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2427	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2428	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω
R2430	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R2431	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R2434	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2435	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2436	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2437	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2438	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2439	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2440	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2441	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2442	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2443	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2444	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2445	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2446	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2447	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R2448	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ
R2449	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2450	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2451	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2452	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R2453	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220KΩ
R2454	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220KΩ
R2455	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2456	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω
R2457	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2458	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2459	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2460	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2461	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2462	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2463	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2464	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω
R2465	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2466	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820Ω
R2467	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2468	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2469	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R2470	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2471	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2472	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2473	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2474	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2475	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2476	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2477	ERJ6GEYJ474	S.M.CARB	0.1W	5%	470KΩ
R2478	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω

Ref No.	Part No.	Description			
R2479	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2480	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2481	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2482	ERJ6GEYJ474	S.M.CARB	0.1W	5%	470KΩ
R2483	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω
R2484	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2485	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2486	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2487	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2488	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1MΩ
R2489	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R2490	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R2491	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R2492	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R2493	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R2494	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27KΩ
R2495	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2496	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2497	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R2498	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2499	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2502	ERDS1TJ154	CARBON	0.5W	5%	150K
R2503	ERDS1TJ184	CARBON	0.5W	5%	180K
R2504	ERG5FJ473	METAL	5W	5%	47KΩ ▲
R2505	ERG1FJ101P	METAL	1W	5%	100Ω ▲
R2506	ERG1FJ101P	METAL	1W	5%	100Ω ▲
R2507	ERD2FCVJ4R7P	CARBON	2W	5%	4R7Ω
R2508	ERW12PKR33	WOUND	0.5W	10%	R33Ω ▲
R2509	ERD2FCVJ4R7P	CARBON	2W	5%	4R7Ω
R2510	TSF19252	FS LINK			▲
R2511	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2512	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2513	TSF19252	FS LINK			▲
R2514	TSF19632	FS LINK			▲
R2515	ERG3FJ101	METAL	3W	5%	100Ω ▲
R2516	ERG3FJ101	METAL	3W	5%	100Ω ▲
R2517	ERDS1TJ2R2	CARBON	0.5W	5%	2R2Ω
R2518	ERD25TJ101	CARBON	0.25W	5%	100Ω
R2519	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2520	ERDS1TJ103	CARBON	0.5W	5%	10KΩ
R2521	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R2522	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω
R2523	ERG3FJ471	METAL	3W	5%	470Ω ▲
R2524	ERG3FJ471	METAL	3W	5%	470Ω ▲
R2525	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12KΩ
R2526	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2527	ERJ6GEYJ2R2	SM.CARB0.125W		5%	2R2Ω
R2528	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22KΩ
R2529	ERJ6GEYJ122	S.M.CARB	0.1W	5%	1K2Ω
R2530	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12KΩ
R2531	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2532	ERJ6GEYJ2R2	SM.CARB0.125W		5%	2R2Ω
R2534	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2535	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2536	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R2537	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2538	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R2539	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2540	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2541	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2542	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2543	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2544	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2545	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R2546	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ
R2547	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2548	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R2549	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47KΩ
R2550	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1MΩ
R2554	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ
R2564	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R2565	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ

Ref No.	Part No.	Description		
R2566	ERJ6GEYJ224	S.M.CARB	0.1W	5% 220KΩ
R2569	ERJ6GEYJ223	S.M.CARB	0.1W	5% 22KΩ
R2570	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2571	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2572	ERJ6GEYJ472	S.M.CARB	0.1W	5% 4K7Ω
R2573	ERJ6GEYJ124	S.M.CARB	0.1W	5% 120KΩ
R2574	ERJ6GEYJ124	S.M.CARB	0.1W	5% 120KΩ
R2575	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R2576	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R2577	ERJ6GEYJ183	S.M.CARB	0.1W	5% 18KΩ
R2578	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2579	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2580	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2581	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2582	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2583	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2584	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2585	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2586	ERJ6GEYJ561	S.M.CARB	0.1W	5% 560Ω
R2587	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2588	ERJ6GEYJ222	S.M.CARB	0.1W	5% 2K2Ω
R2589	ERJ6GEYJ392	S.M.CARB	0.1W	5% 3K9Ω
R2590	ERJ6GEYJ822	S.M.CARB	0.1W	5% 8K2Ω
R2591	ERJ6GEYJ153	S.M.CARB	0.1W	5% 15KΩ
R2592	ERJ6GEYJ333	S.M.CARB	0.1W	5% 33KΩ
R2593	ERJ6GEYJ683	S.M.CARB	0.1W	5% 68KΩ
R2594	ERJ6GEYJ124	S.M.CARB	0.1W	5% 120KΩ
R2596	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2597	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2598	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2703	ERJ6GEYJ473	S.M.CARB	0.1W	5% 47KΩ
R2704	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2705	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R2706	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R2707	ERJ6GEYJ391	S.M.CARB	0.1W	5% 390Ω
R2708	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2709	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2710	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2711	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2712	ERJ6GEYJ622	SM.CARB0.125W		5% 6K2Ω
R2713	ERJ6GEYJ622	SM.CARB0.125W		5% 6K2Ω
R2714	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2715	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2716	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2717	ERJ6GEYJ622	SM.CARB0.125W		5% 6K2Ω
R2718	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2801	ERJ6GEYJ473	S.M.CARB	0.1W	5% 47KΩ
R2802	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2803	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R2804	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2805	ERJ6GEYJ563	S.M.CARB	0.1W	5% 56KΩ
R2806	ERJ6GEYJ154	S.M.CARB	0.1W	5% 150KΩ
R2807	ERJ6GEYJ474	S.M.CARB	0.1W	5% 470KΩ
R2808	ERJ6GEYJ393	S.M.CARB	0.1W	5% 39KΩ
R2809	ERJ6GEYJ184	S.M.CARB	0.1W	5% 180KΩ
R2810	ERJ6GEYJ184	S.M.CARB	0.1W	5% 180KΩ
R2811	ERJ6GEYJ393	S.M.CARB	0.1W	5% 39KΩ
R2812	ERJ6GEYJ474	S.M.CARB	0.1W	5% 470KΩ
R2813	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R2814	ERJ6GEYJ184	S.M.CARB	0.1W	5% 180KΩ
R2815	ERJ6GEYJ333	S.M.CARB	0.1W	5% 33KΩ
R2816	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2817	ERJ6GEYJ473	S.M.CARB	0.1W	5% 47KΩ
R2818	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2819	ERJ6GEYJ473	S.M.CARB	0.1W	5% 47KΩ
R2820	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2821	ERJ6GEYJ473	S.M.CARB	0.1W	5% 47KΩ
R2822	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R2823	ERJ6GEYJ473	S.M.CARB	0.1W	5% 47KΩ
R3006	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3114	ERJ6GEYJ681	S.M.CARB	0.1W	5% 68Ω
R3115	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ

Ref No.	Part No.	Description		
R3117	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3118	ERJ6GEYJ681	S.M.CARB	0.1W	5% 680Ω
R3126	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R3127	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R3128	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3129	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3130	ERJ6GEYJ681	S.M.CARB	0.1W	5% 680Ω
R3131	ERJ6GEYJ681	S.M.CARB	0.1W	5% 680Ω
R3132	ERD2FCVG100T	CARBON	2W	2% 10Ω
R3133	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3134	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3135	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3136	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3137	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3138	ERJ6GEYJ470	S.M.CARB	0.1W	5% 47Ω
R3139	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3140	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3141	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3142	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3143	ERJ6GEYJ333	S.M.CARB	0.1W	5% 33KΩ
R3144	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3145	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3146	ERJ6GEYJ333	S.M.CARB	0.1W	5% 33KΩ
R3147	ERJ6GEYJ153	S.M.CARB	0.1W	5% 15KΩ
R3148	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3149	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3150	ERJ6GEYJ470	S.M.CARB	0.1W	5% 47Ω
R3151	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3152	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3153	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3154	ERD2FCVG100T	CARBON	2W	2% 10Ω
R3158	ERJ6GEYJ470	S.M.CARB	0.1W	5% 47Ω
R3159	ERJ6GEYJ681	S.M.CARB	0.1W	5% 680Ω
R3160	ERJ6GEYJ563	S.M.CARB	0.1W	5% 56KΩ
R3161	ERJ6GEYJ121	S.M.CARB	0.1W	5% 120Ω
R3162	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3163	ERJ6GEYJ153	S.M.CARB	0.1W	5% 15KΩ
R3165	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R3167	ERJ6GEYJ103	S.M.CARB	0.1W	5% 10KΩ
R3178	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R3180	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R3182	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R3184	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R3185	ERJ6GEYJ333	S.M.CARB	0.1W	5% 33KΩ
R3186	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3187	ERJ6GEYJ333	S.M.CARB	0.1W	5% 33KΩ
R3188	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3192	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R3193	ERJ6GEY0R00	S.M.CARB	0.1W	5% 0Ω
R3194	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3195	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω
R3196	ERJ6GEYJ470	S.M.CARB	0.1W	5% 47Ω
R3197	ERD2FCVG100T	CARBON	2W	2% 10Ω
R3198	ERJ6GEYJ470	S.M.CARB	0.1W	5% 47Ω
R3199	ERJ6GEYJ470	S.M.CARB	0.1W	5% 47Ω
R3200	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3201	ERJ6GEYJ332	S.M.CARB	0.1W	5% 3K3Ω
R3202	ERJ6GEYJ332	S.M.CARB	0.1W	5% 3K3Ω
R3205	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3206	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3207	ERJ6GEYJ104	S.M.CARB	0.1W	5% 100KΩ
R3208	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3209	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3210	ERJ6GEYJ152	S.M.CARB	0.1W	5% 1K5Ω
R3211	ERJ6GEYJ152	S.M.CARB	0.1W	5% 1K5Ω
R3212	ERJ6GEYJ123	S.M.CARB	0.1W	5% 12KΩ
R3213	ERJ6GEYJ101	S.M.CARB	0.1W	5% 100Ω
R3214	ERJ6GEYJ153	S.M.CARB	0.1W	5% 15KΩ
R3215	ERD2FCVG100T	CARBON	2W	2% 10Ω
R3216	ERJ6GEYJ680	S.M.CARB	0.1W	5% 68Ω
R3217	ERJ6GEYJ102	S.M.CARB	0.1W	5% 1KΩ
R3218	ERJ6GEYJ750	S.M.CARB	0.1W	5% 75Ω

Ref No.	Part No.	Description			
R3226	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3227	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3228	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3229	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3230	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3231	ERD2FCVG100T	CARBON	2W	2%	10Ω
R3232	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω
R3233	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R3236	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3237	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3238	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3239	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3240	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3351	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3352	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R3353	ERJ6GEYJ474	S.M.CARB	0.1W	5%	470KΩ
R3354	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3355	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω
R3501	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R3502	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3503	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3505	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R3506	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R3507	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R3508	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R3509	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3513	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3514	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3515	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3516	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R3517	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3518	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3520	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R3521	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3522	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3523	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3526	ERD25TC0T	CARBON	0.25W	5%	0Ω
R3531	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R3532	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω
R3534	ERD25TJ181	CARBON	0.25W	5%	180Ω
R3536	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3539	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω

Ref No.	Part No.	Description			
R3540	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R3541	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R3542	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R3802	ERG3FJ100	METAL	3W	5%	10Ω ▲
R3803	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R3804	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω

SWITCHES

S801	ESB91232A	SWITCH	▲
S1051	EVQ23405R	SWITCH	
S1052	EVQ23405R	SWITCH	
S1053	EVQ23405R	SWITCH	
S1054	EVQ23405R	SWITCH	
S1055	EVQ23405R	SWITCH	

TRANSFORMERS

T501	TLHA003	TRANSFORMER	
T551	ZTFH65015A	F.B.T.	▲
T801	ETP35KAN615U	TRANSFORMER	▲
T802	ETS49AH137ND	TRANSFORMER	
T803	ETQ19K55AY	TRANSFORMER	
T2502	ETS35AA3J7AC	TRANSFORMER	

FILTERS

X102	EFCV4155A3	CERAMIC FILTER	
X104	J3352K	SAW FILTER	
X106	EFCT6R0MW5	FILTER	
X601	TSSA024	CRYSTAL	
X602	TSSA025	CRYSTAL	
X1101	TAF10020	CRYSTAL	
X1551	TSSA009	CRYSTAL	
X2001	4730007158	CRYSTAL	
X2501	TAF10059	CRYSTAL	
X2502	TAFCSA4.00MG	CRYSTAL	
X3501	TSSA009	CRYSTAL	

SCHEMATIC DIAGRAM FOR MODELS

TX-29AD70DP

(Euro-3H Chassis)

IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

Notes

1. RESISTOR
All resistors are carbon 1/4W resistor, unless marked as follows:
Unit of resistance is OHM (Ω) (K=1,000, M=1,000,000).
2. CAPACITORS
All capacitors are ceramic 50V, unless marked as follows:
Unit of capacitance is μF , unless otherwise stated.
3. COIL
Unit of inductance is μH , unless otherwise stated.
4. Components marked 'L' on the schematic diagram shows leadless parts.
5. TEST POINT
 : Test Point position
6. EARTH SYMBOL
 : Chassis Earth (Cold)  : Line Earth (Hot)
7. VOLTAGE MEASUREMENT
Voltage is measured by a DC voltmeter.
Measurement conditions are as follows:
Power source AC 220V–240V, 50Hz
Receiving Signal Colour Bar signal (RF)
All customer controls Maximum position
8.  : Indicates the Video signal path
 : Indicates the Audio signal path
 : Indicates the Vertical/Horizontal signal path
9. This schematic diagram is the latest at the time of printing and is subject to change without notice.


Remarks

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD. Take the following precautions:


Precautions


- a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- b. Do not short-circuit the hot and cold circuits as electrical components may be damaged.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously, as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.


B BOARD 
TNPA0298

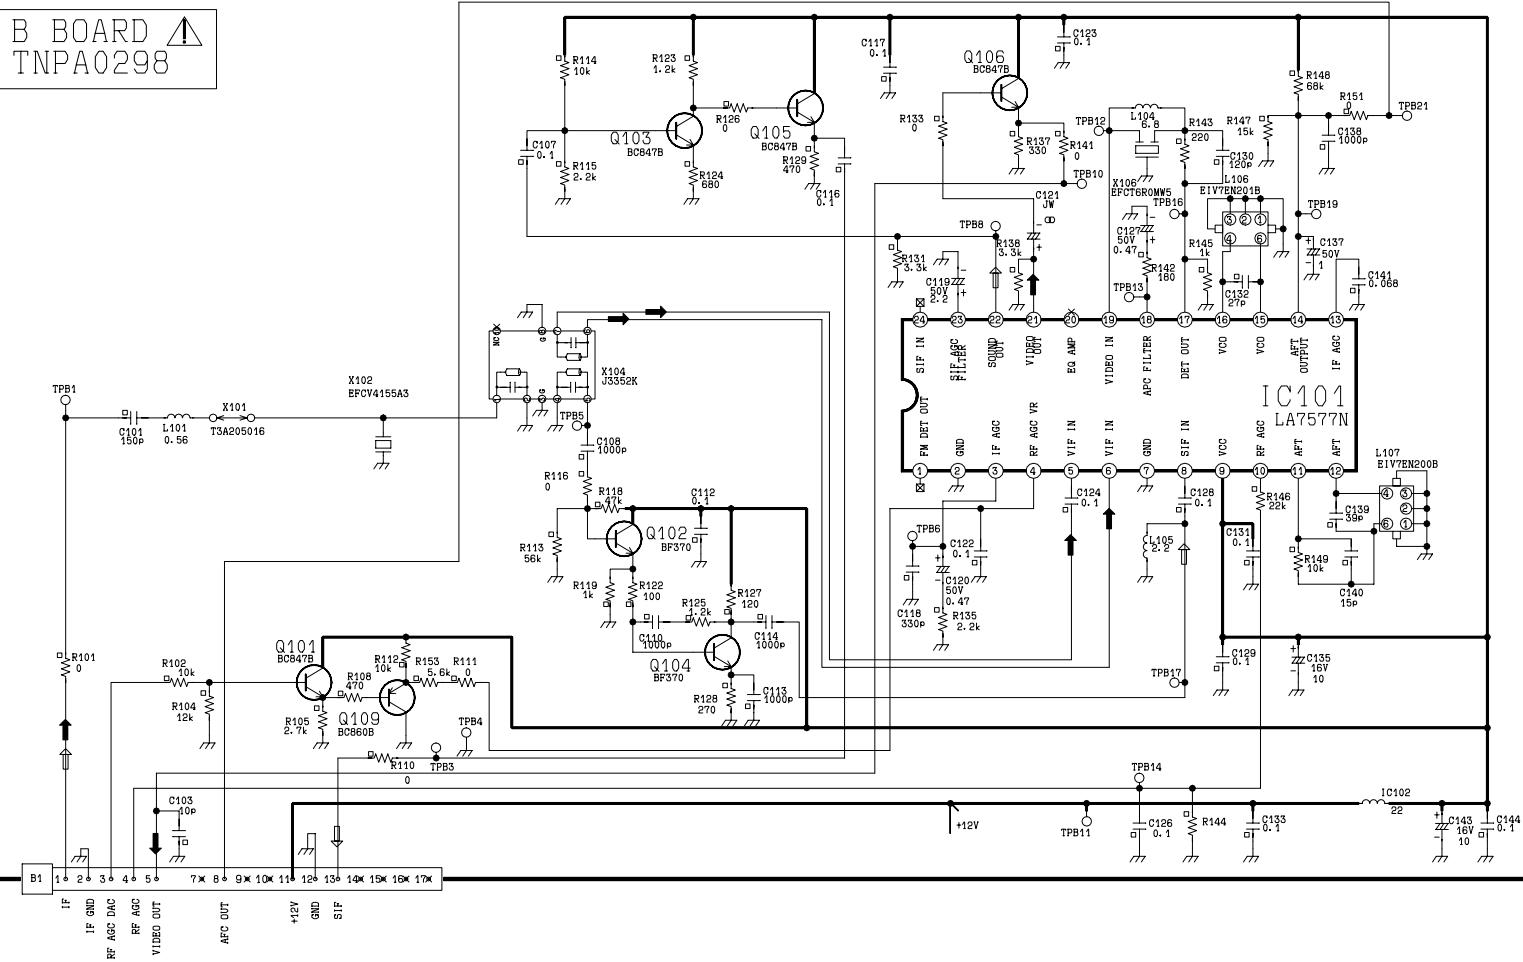


C BOARD 
TNP8EC002

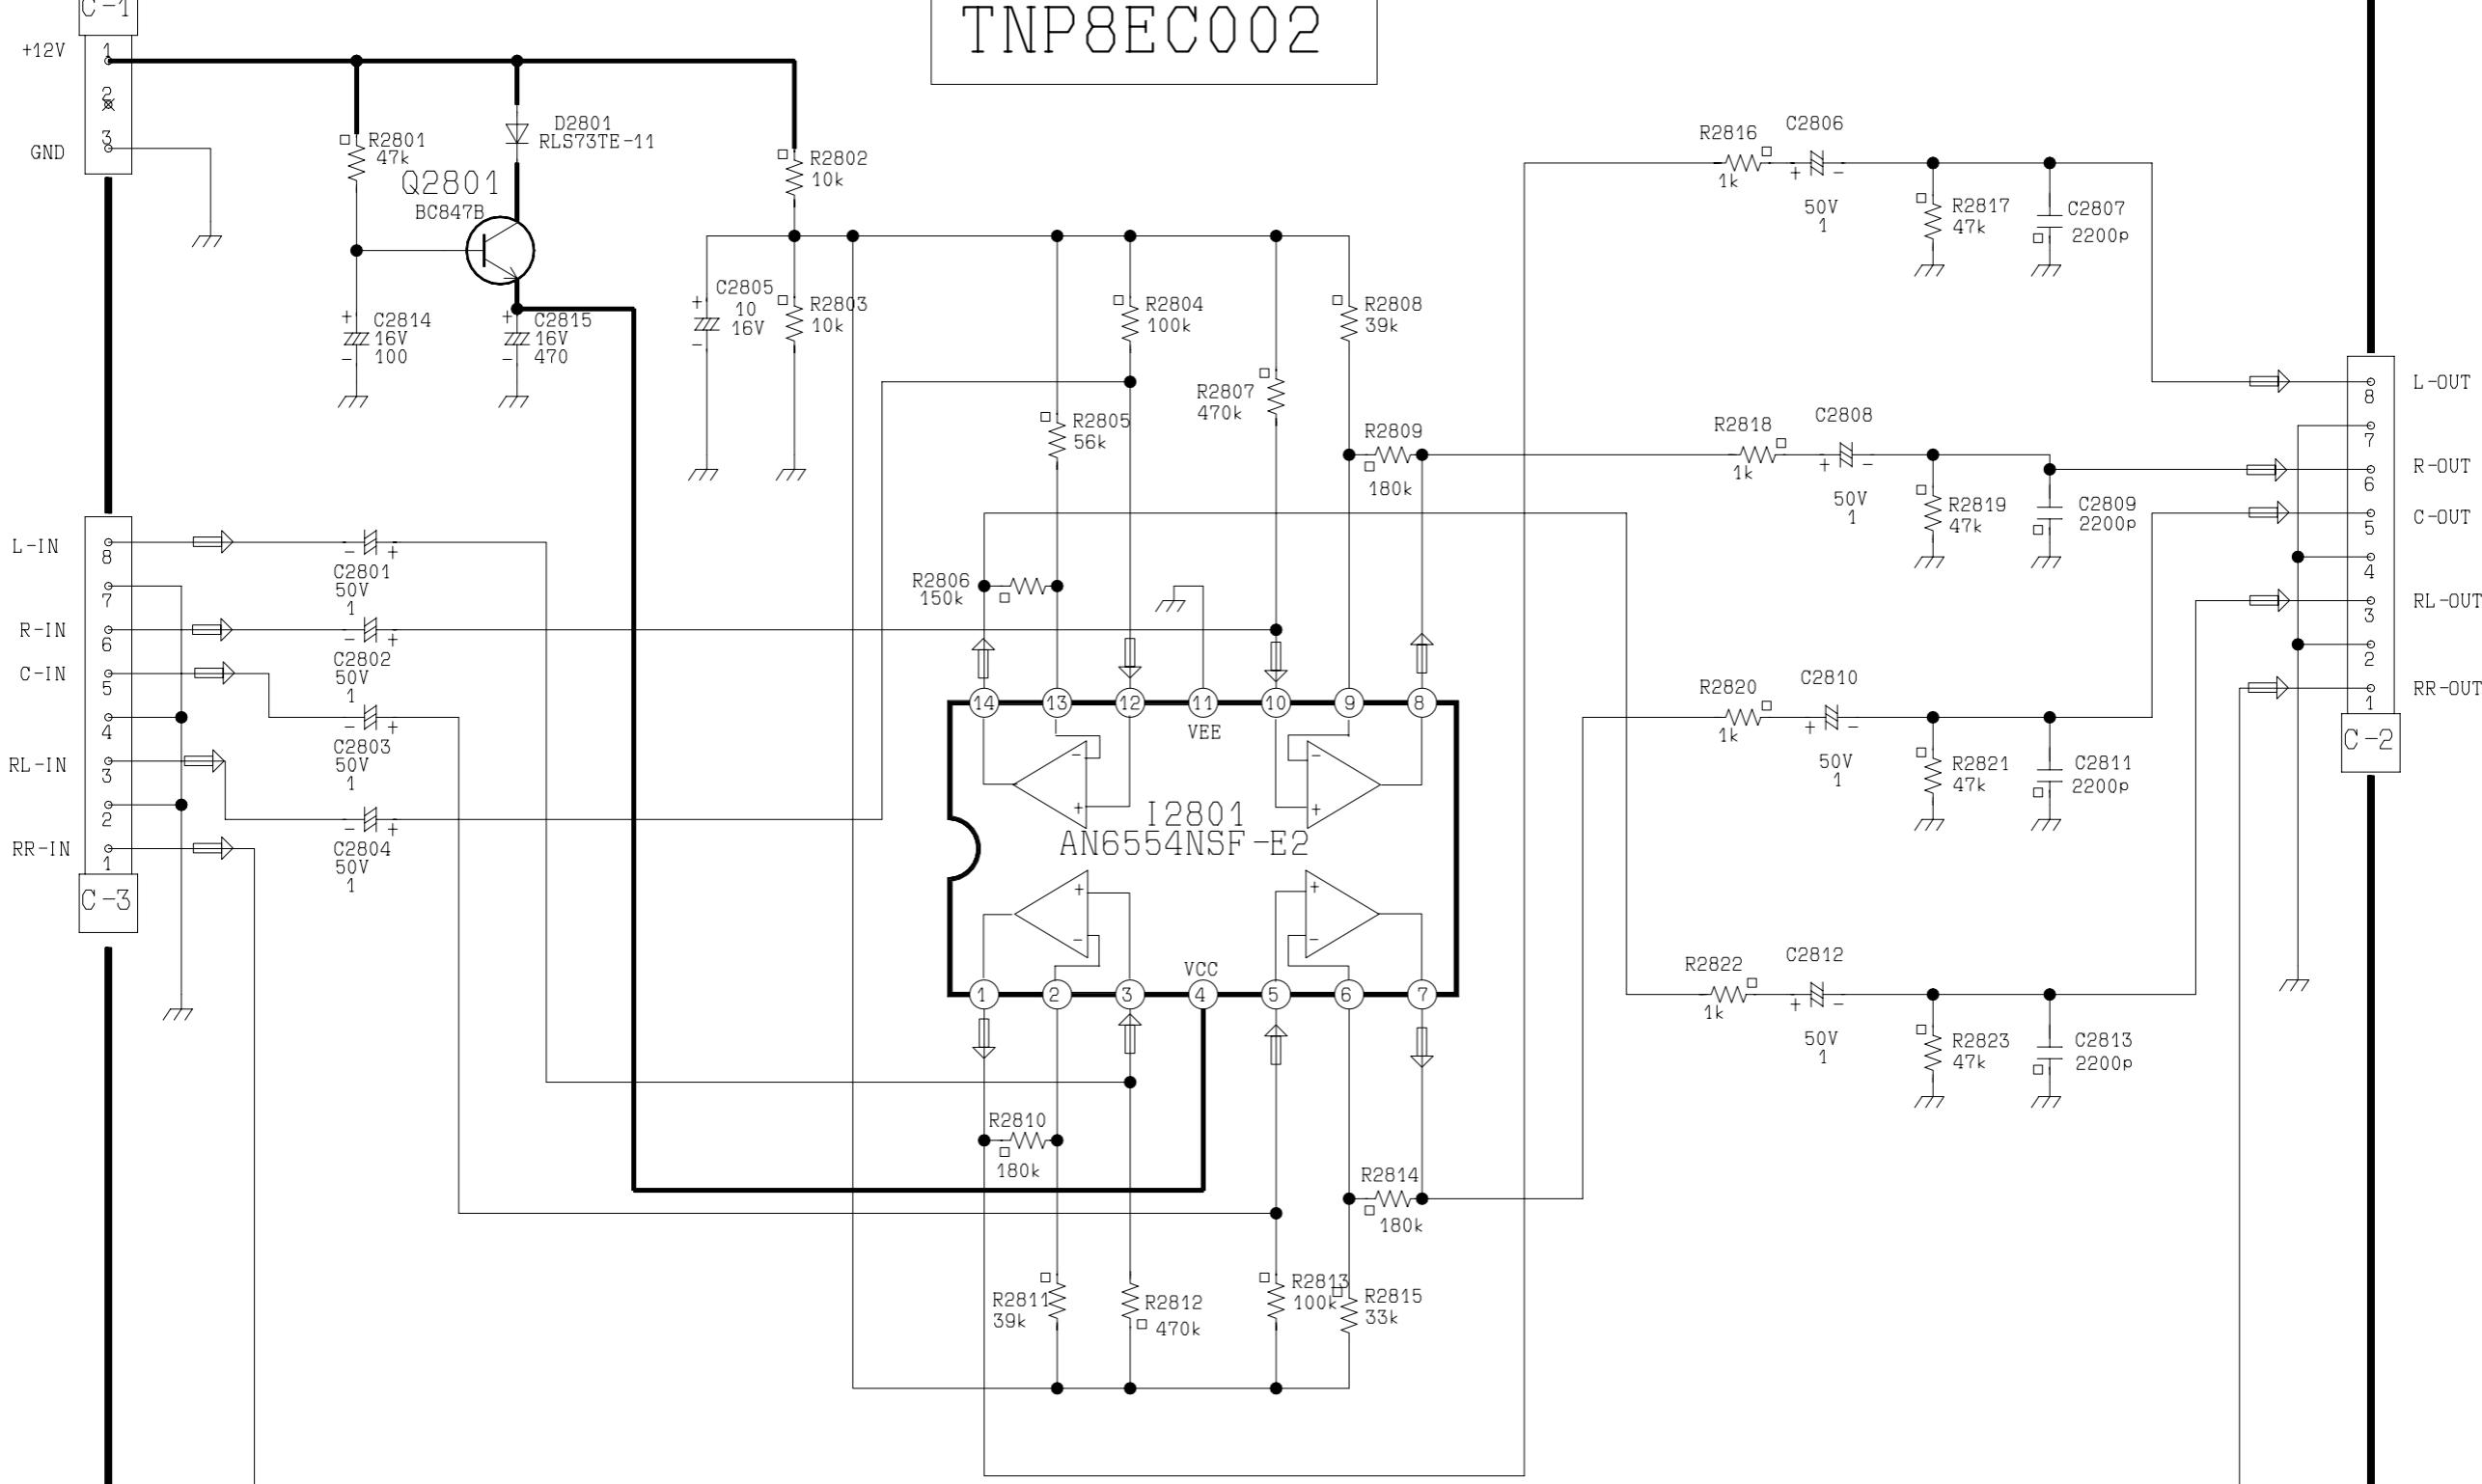


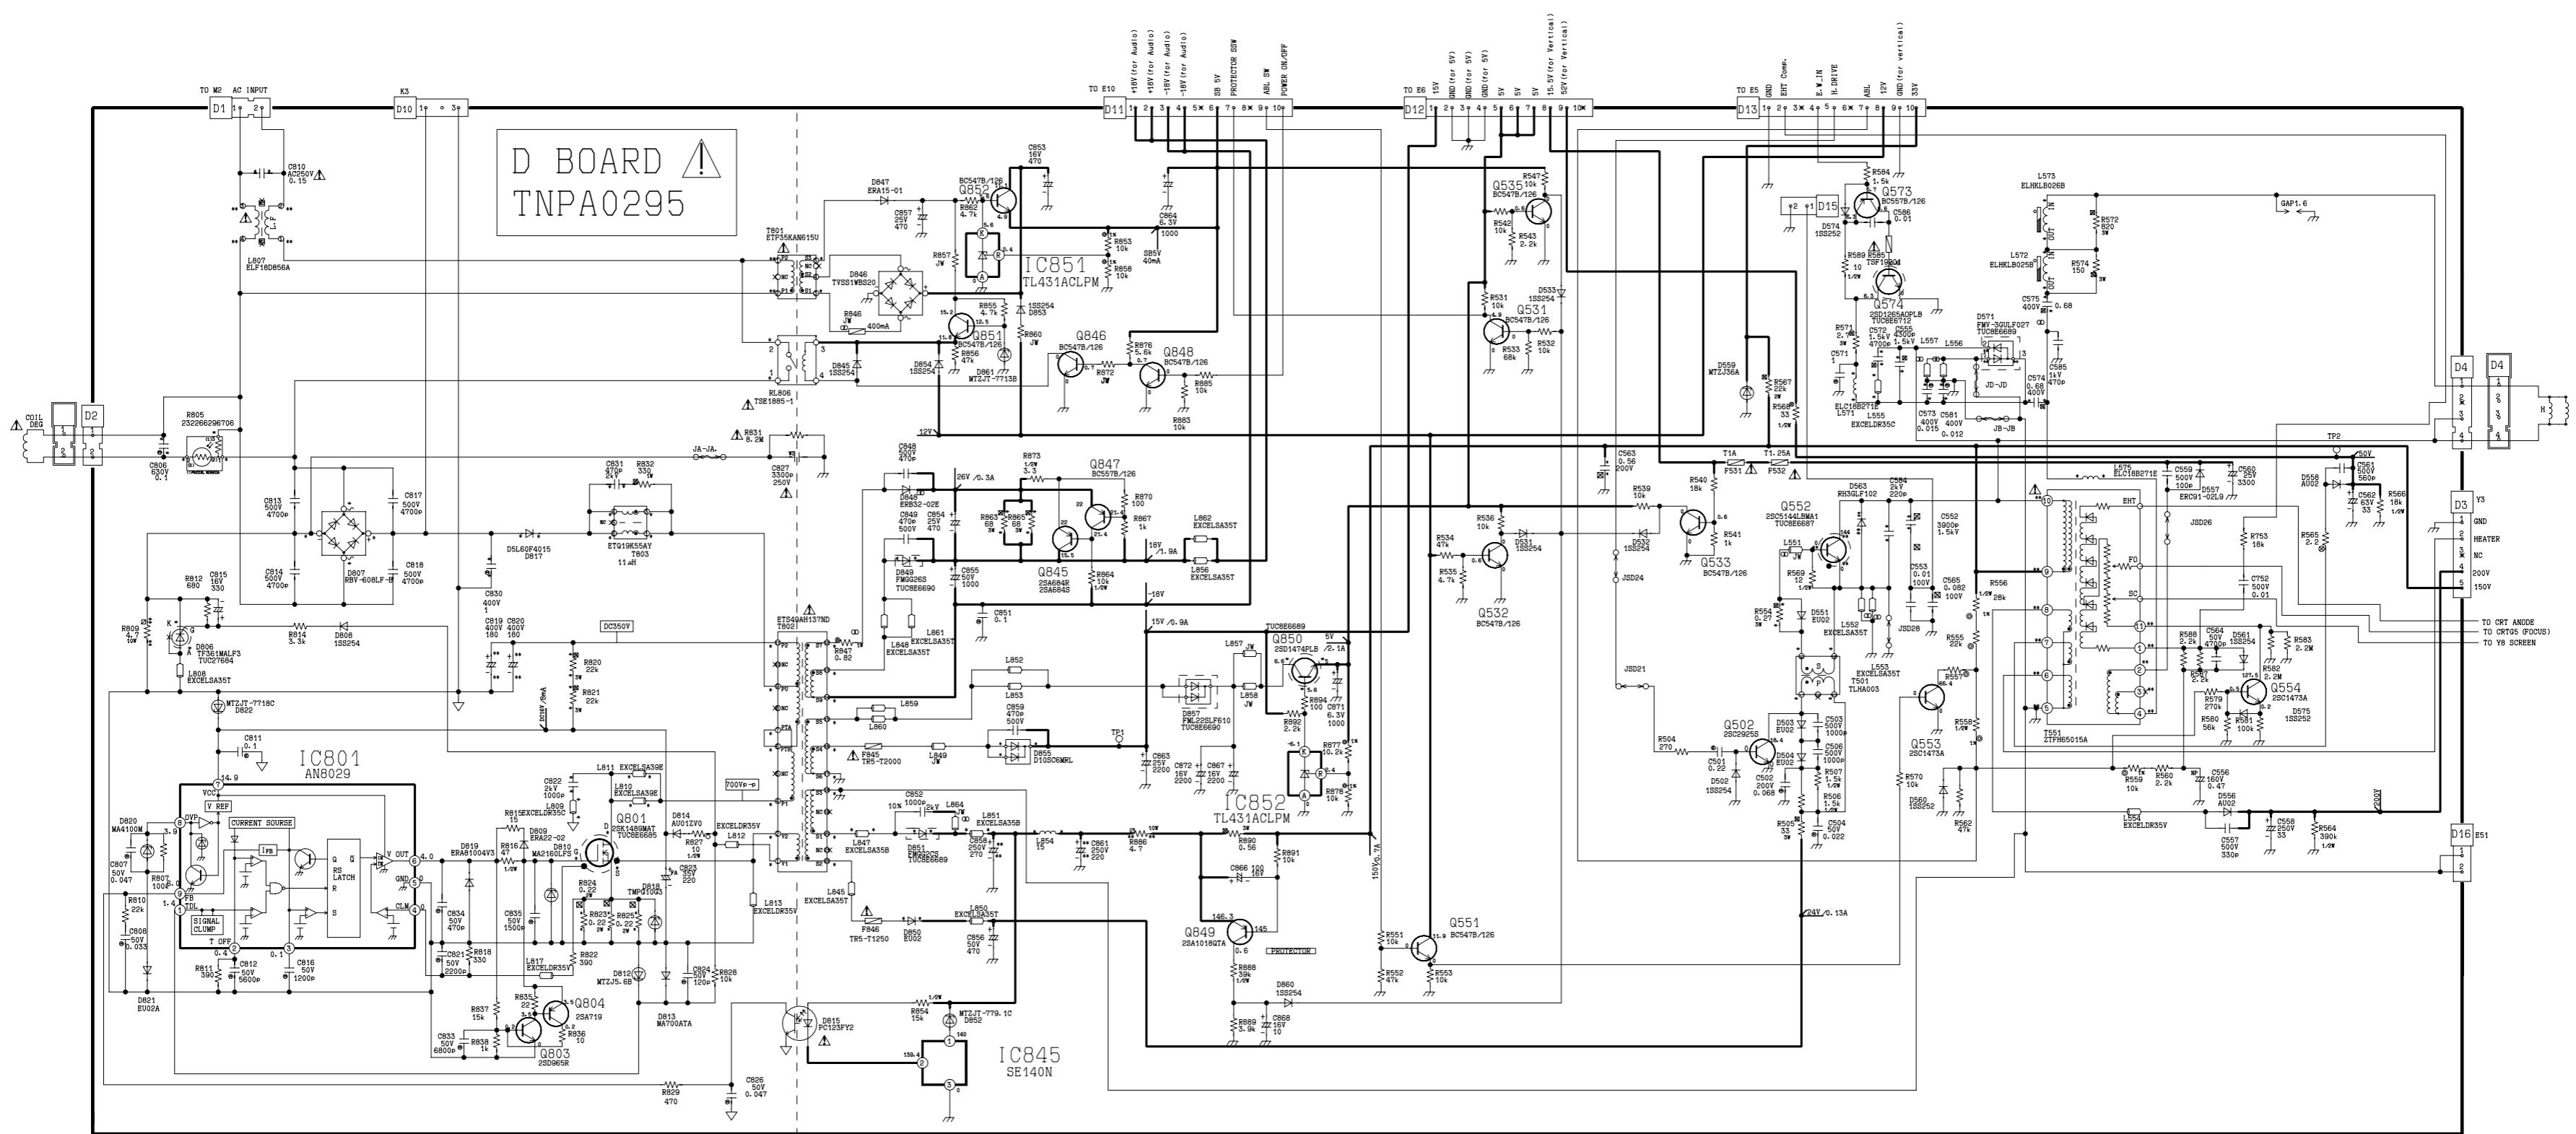

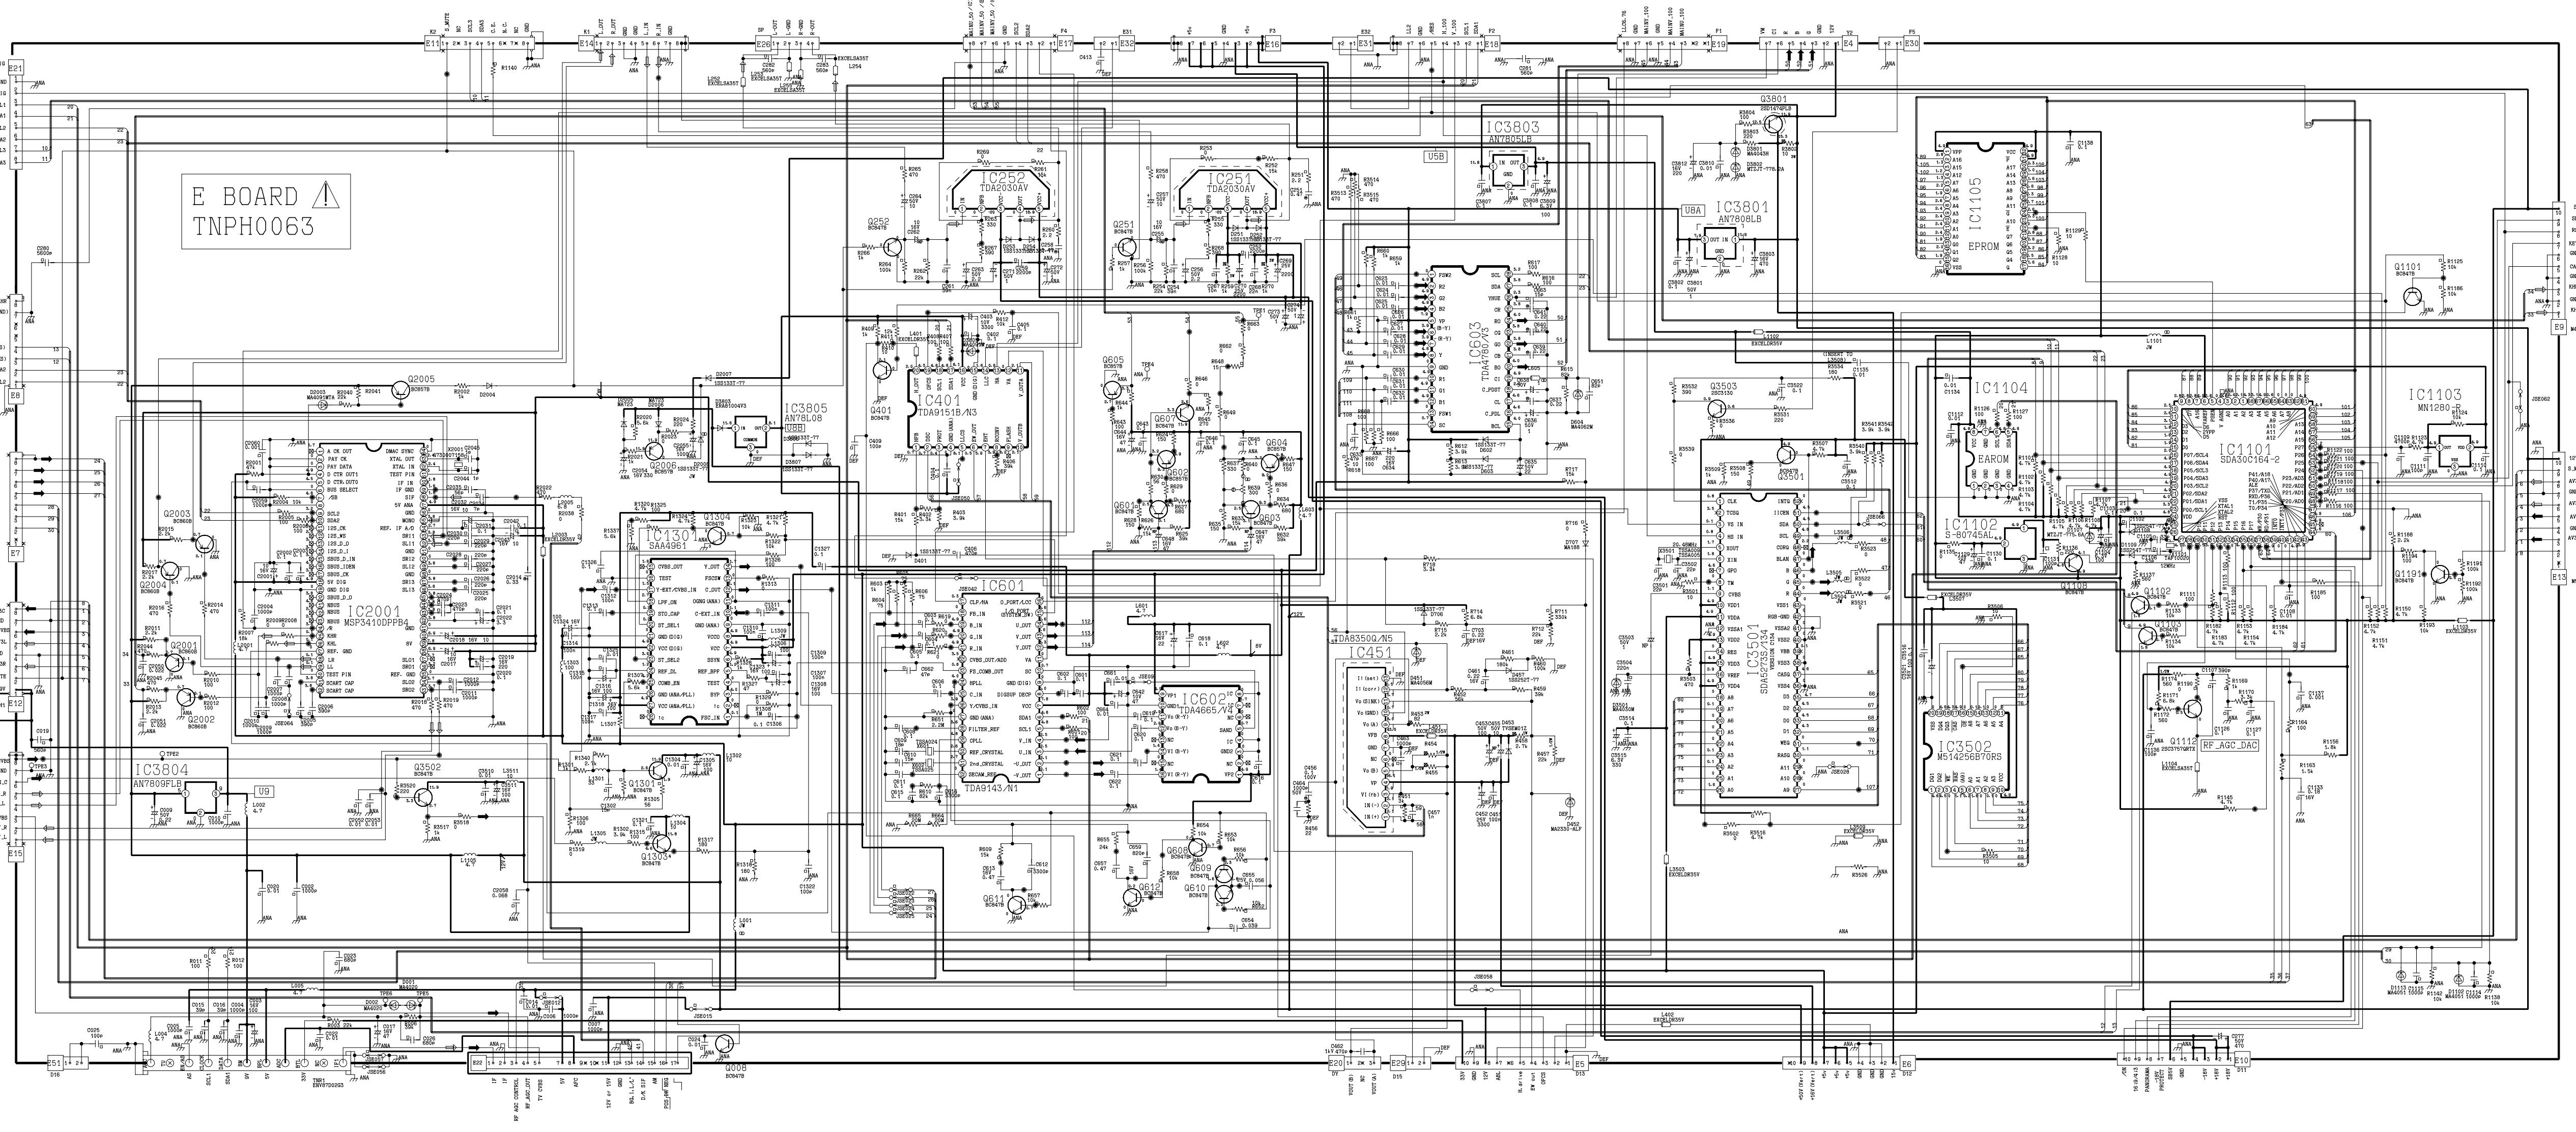


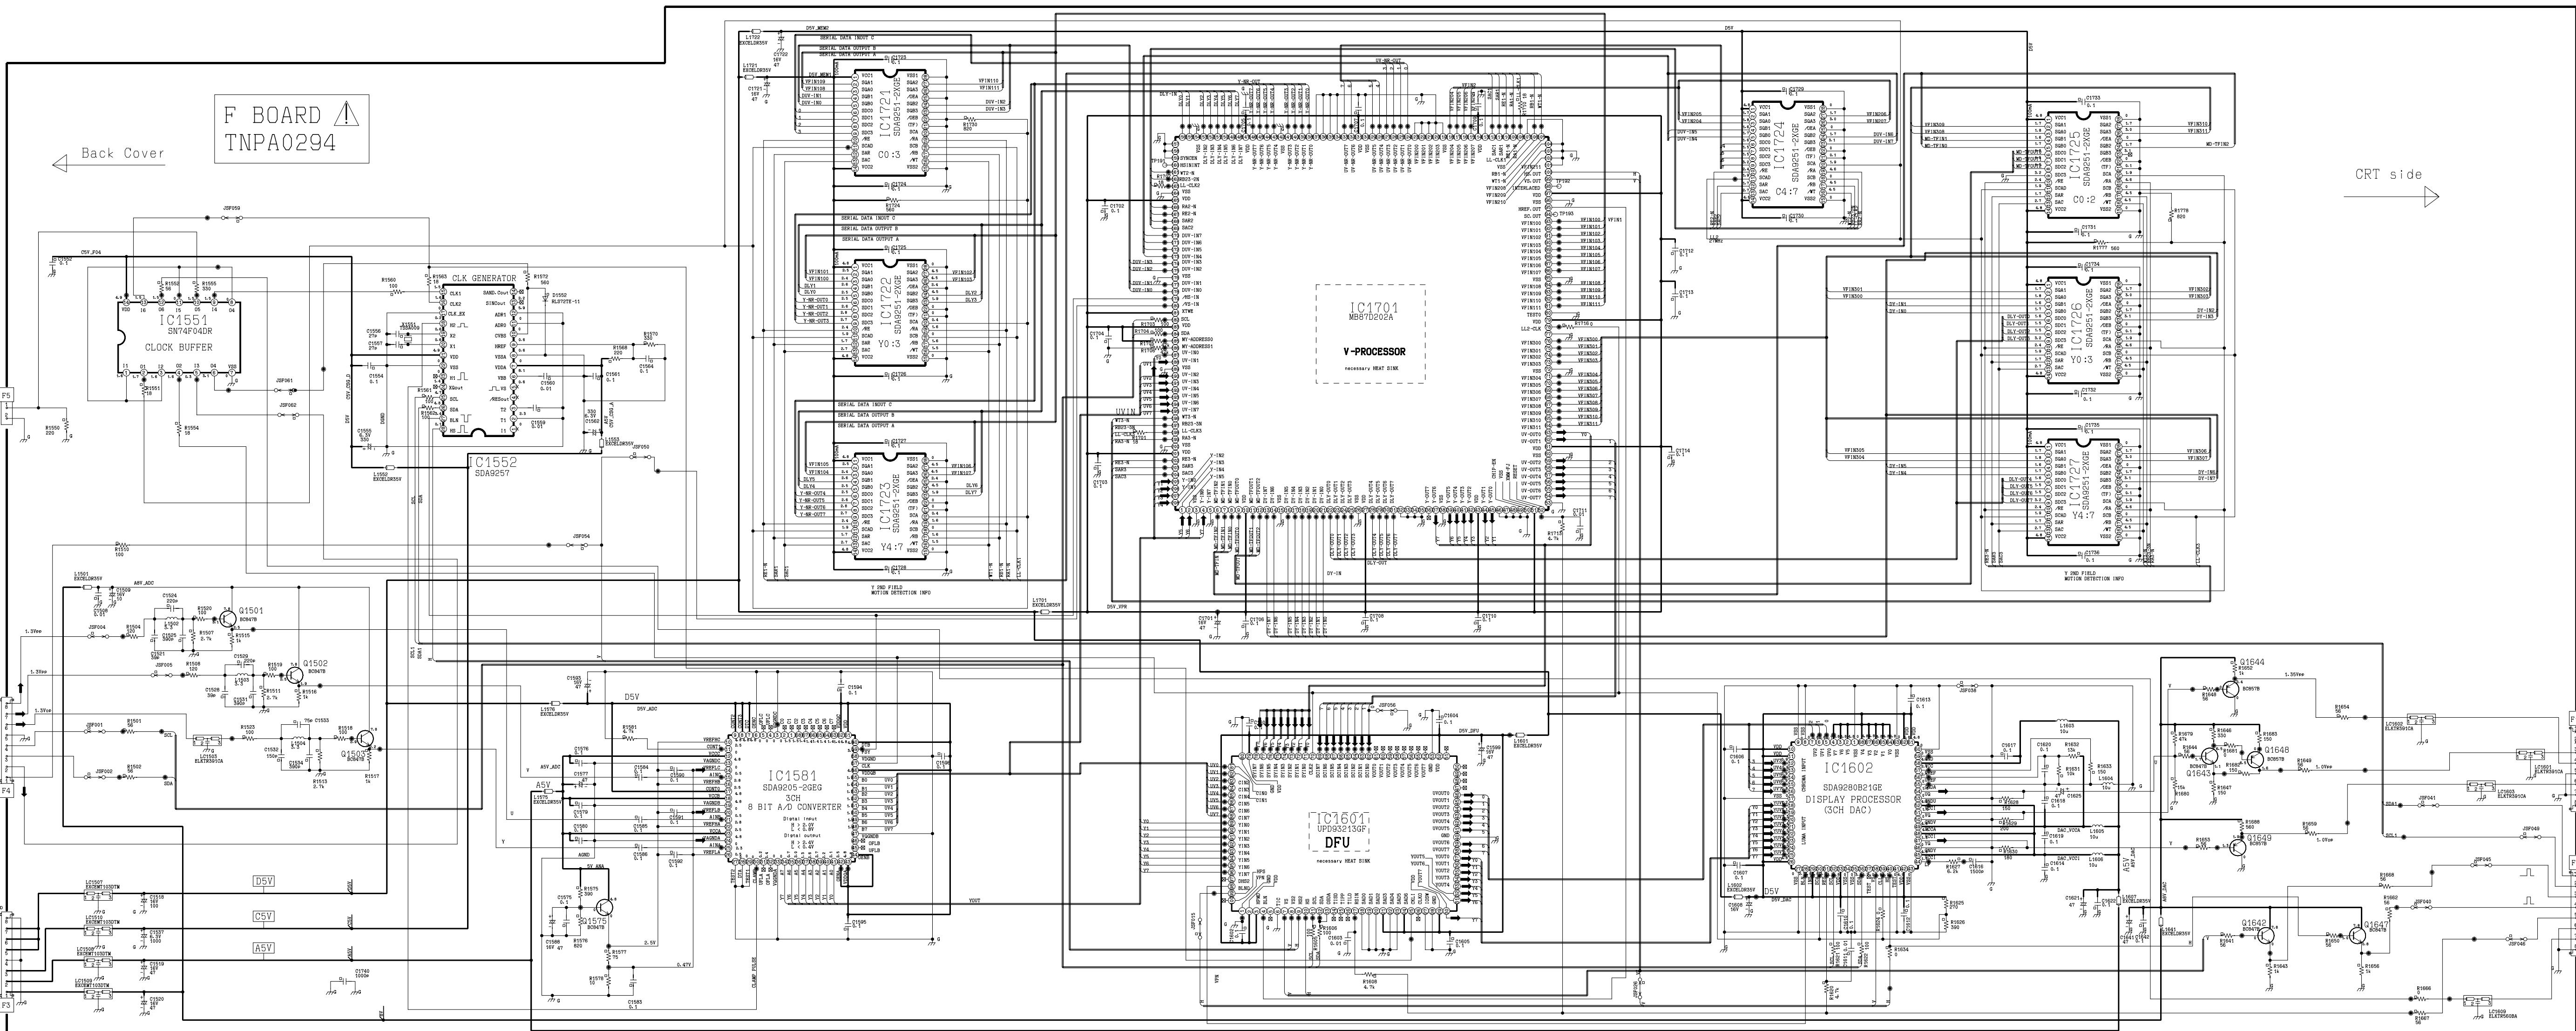



H BOARD !
TNPA0293

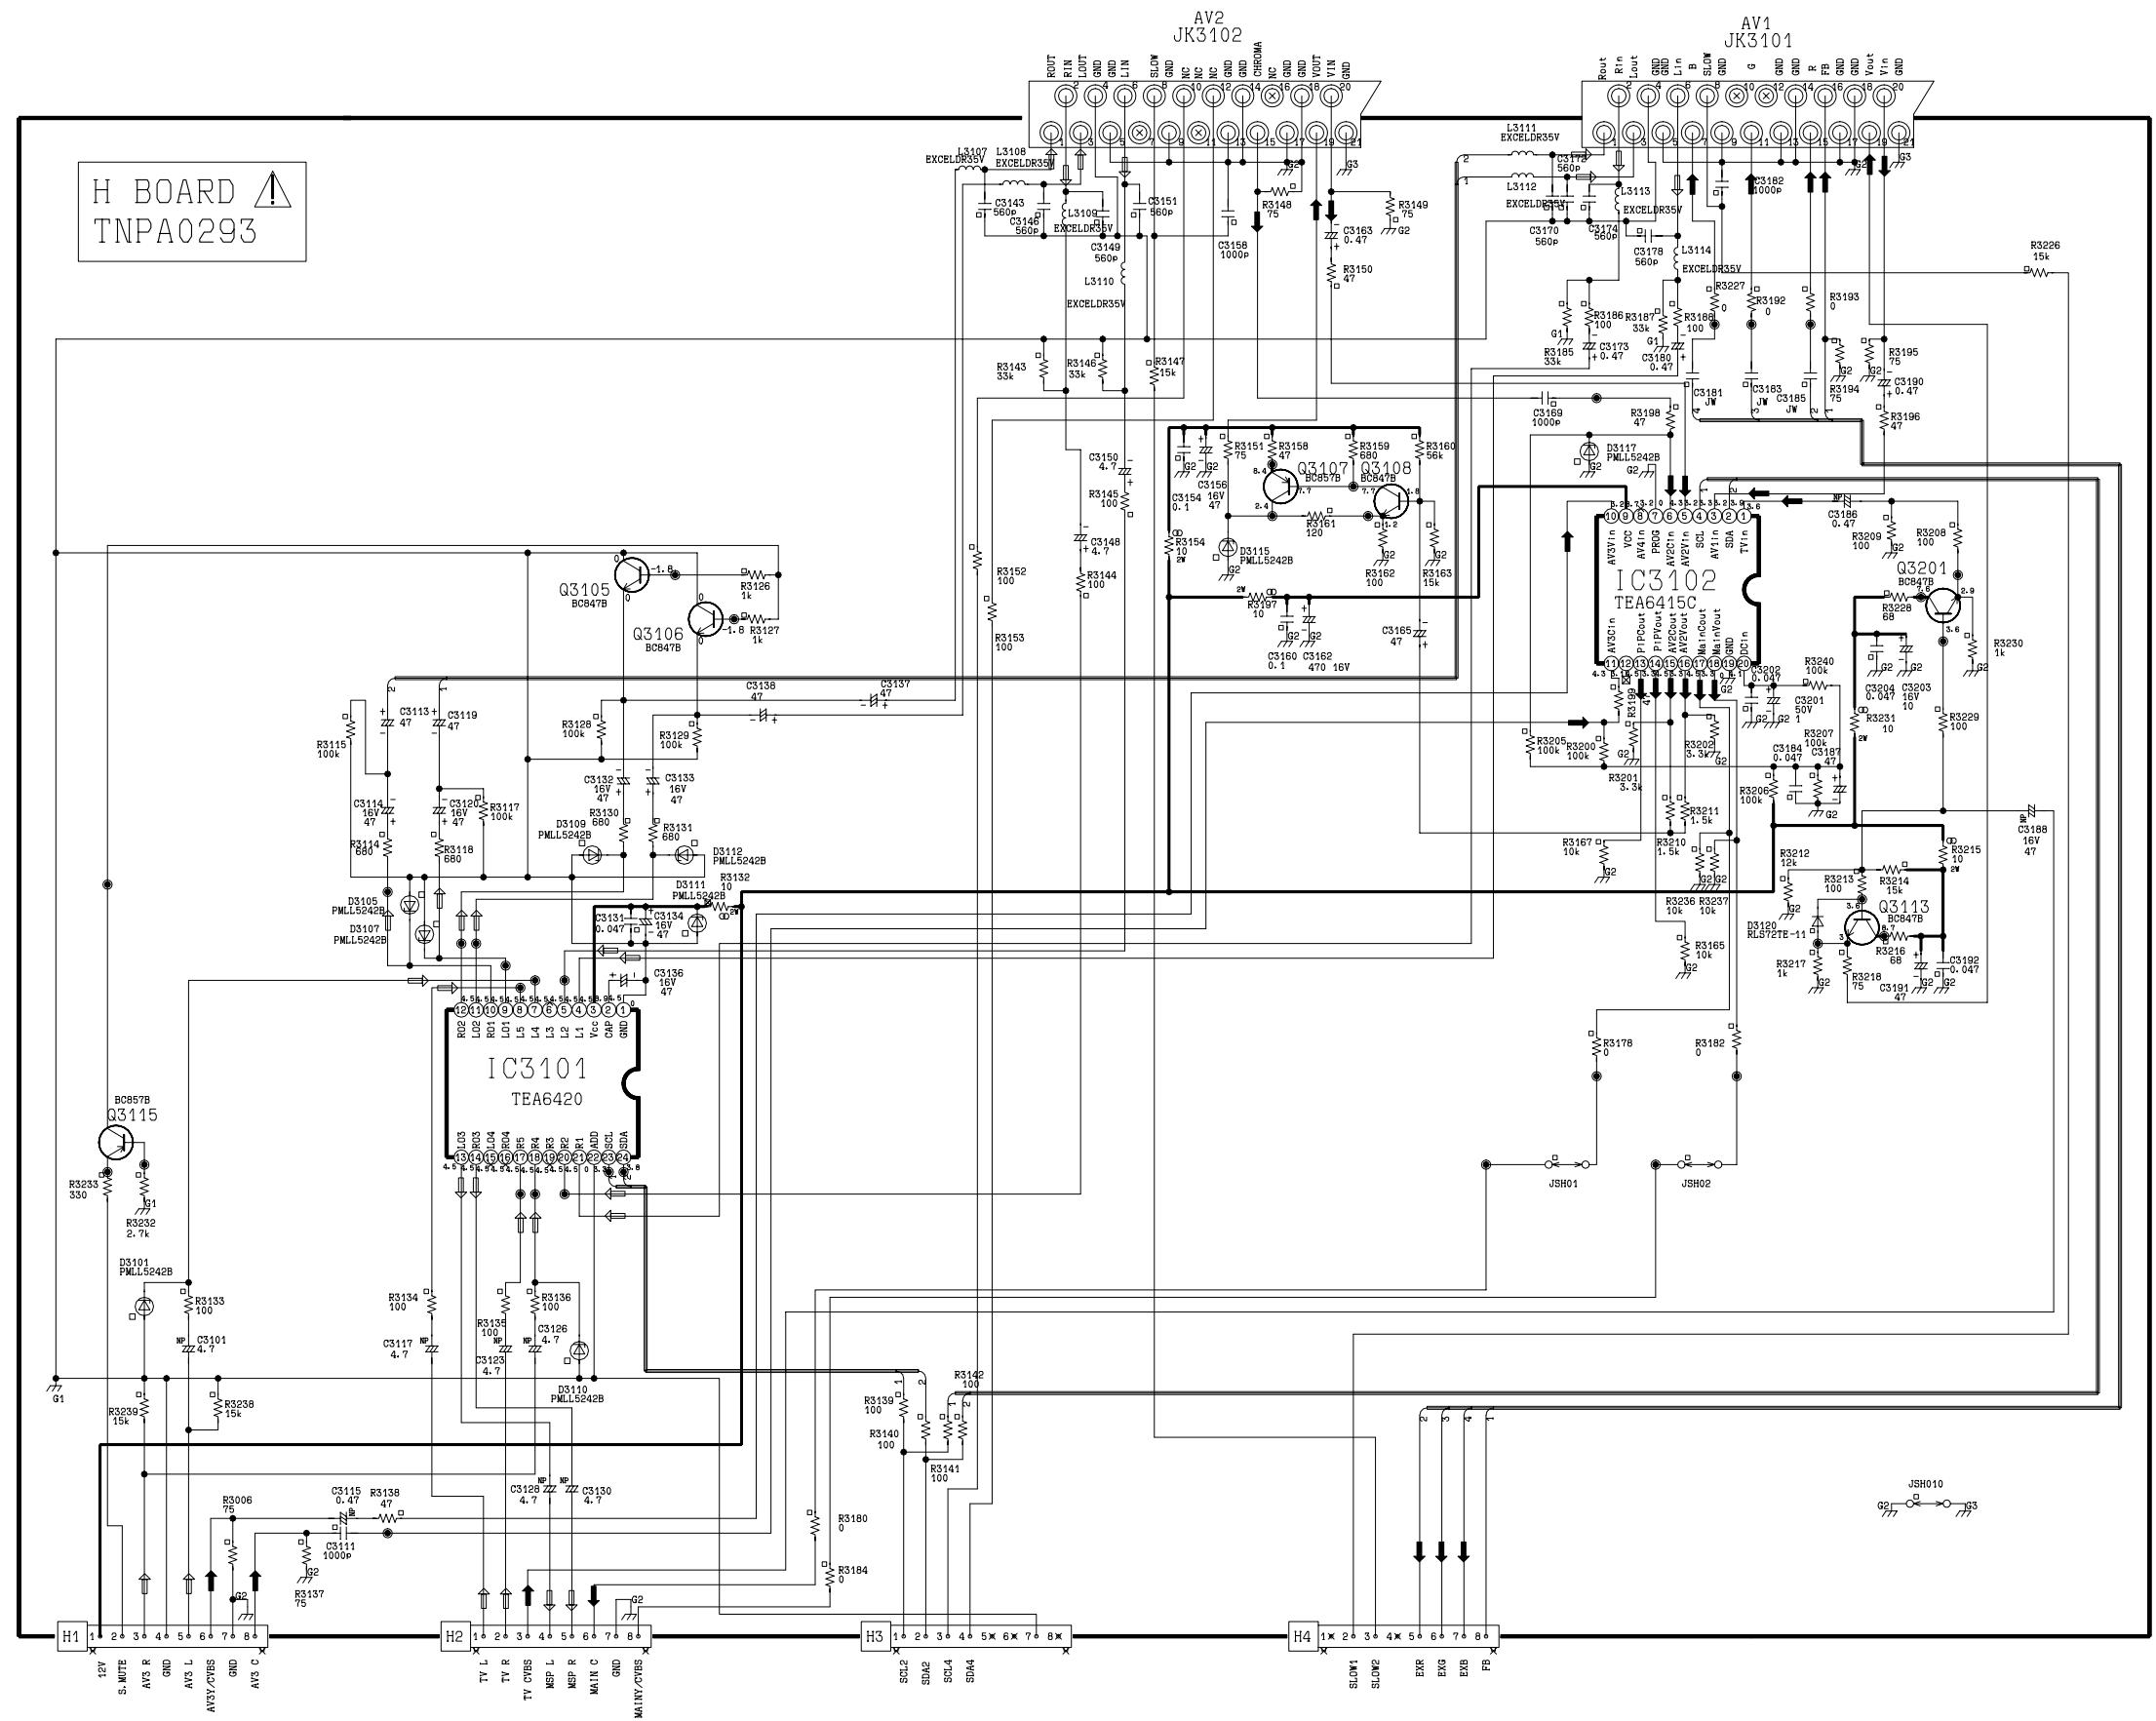



J BOARD ▲
TNPA0458

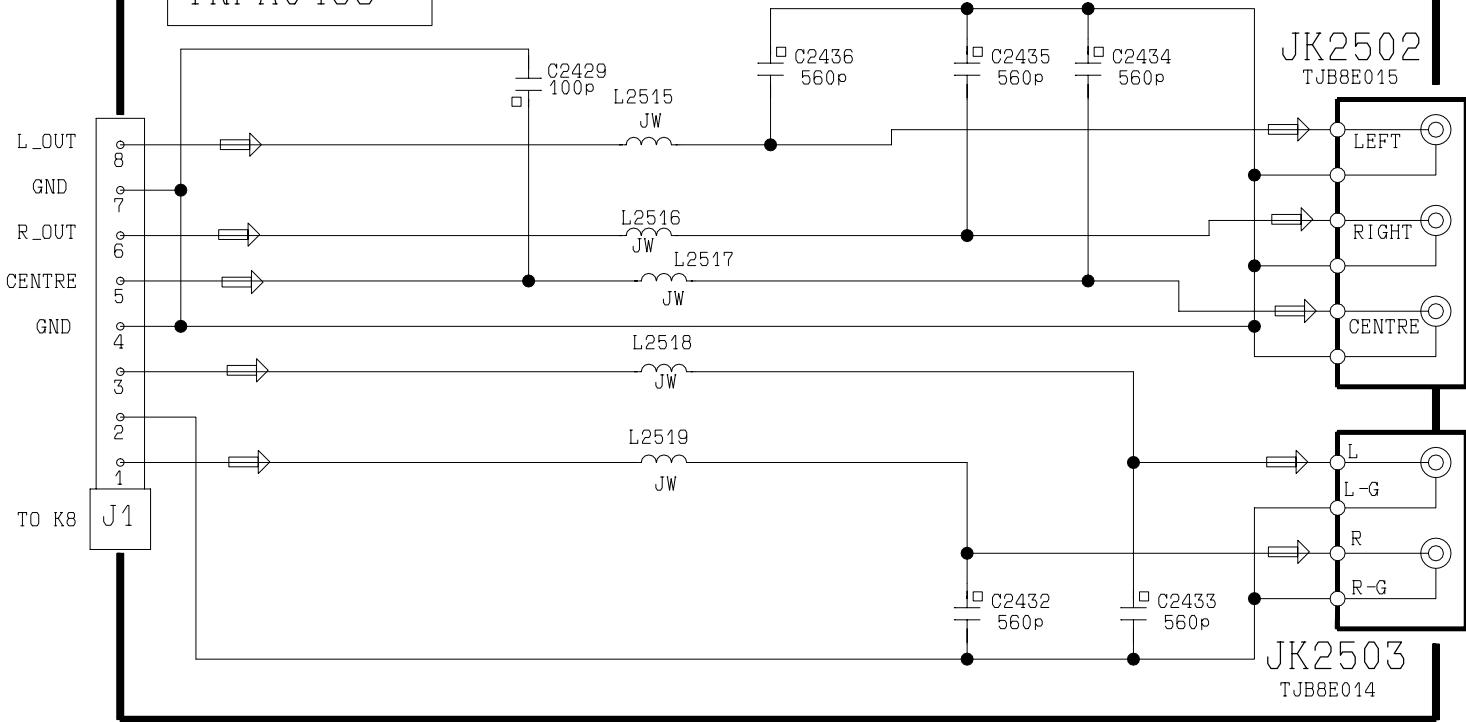

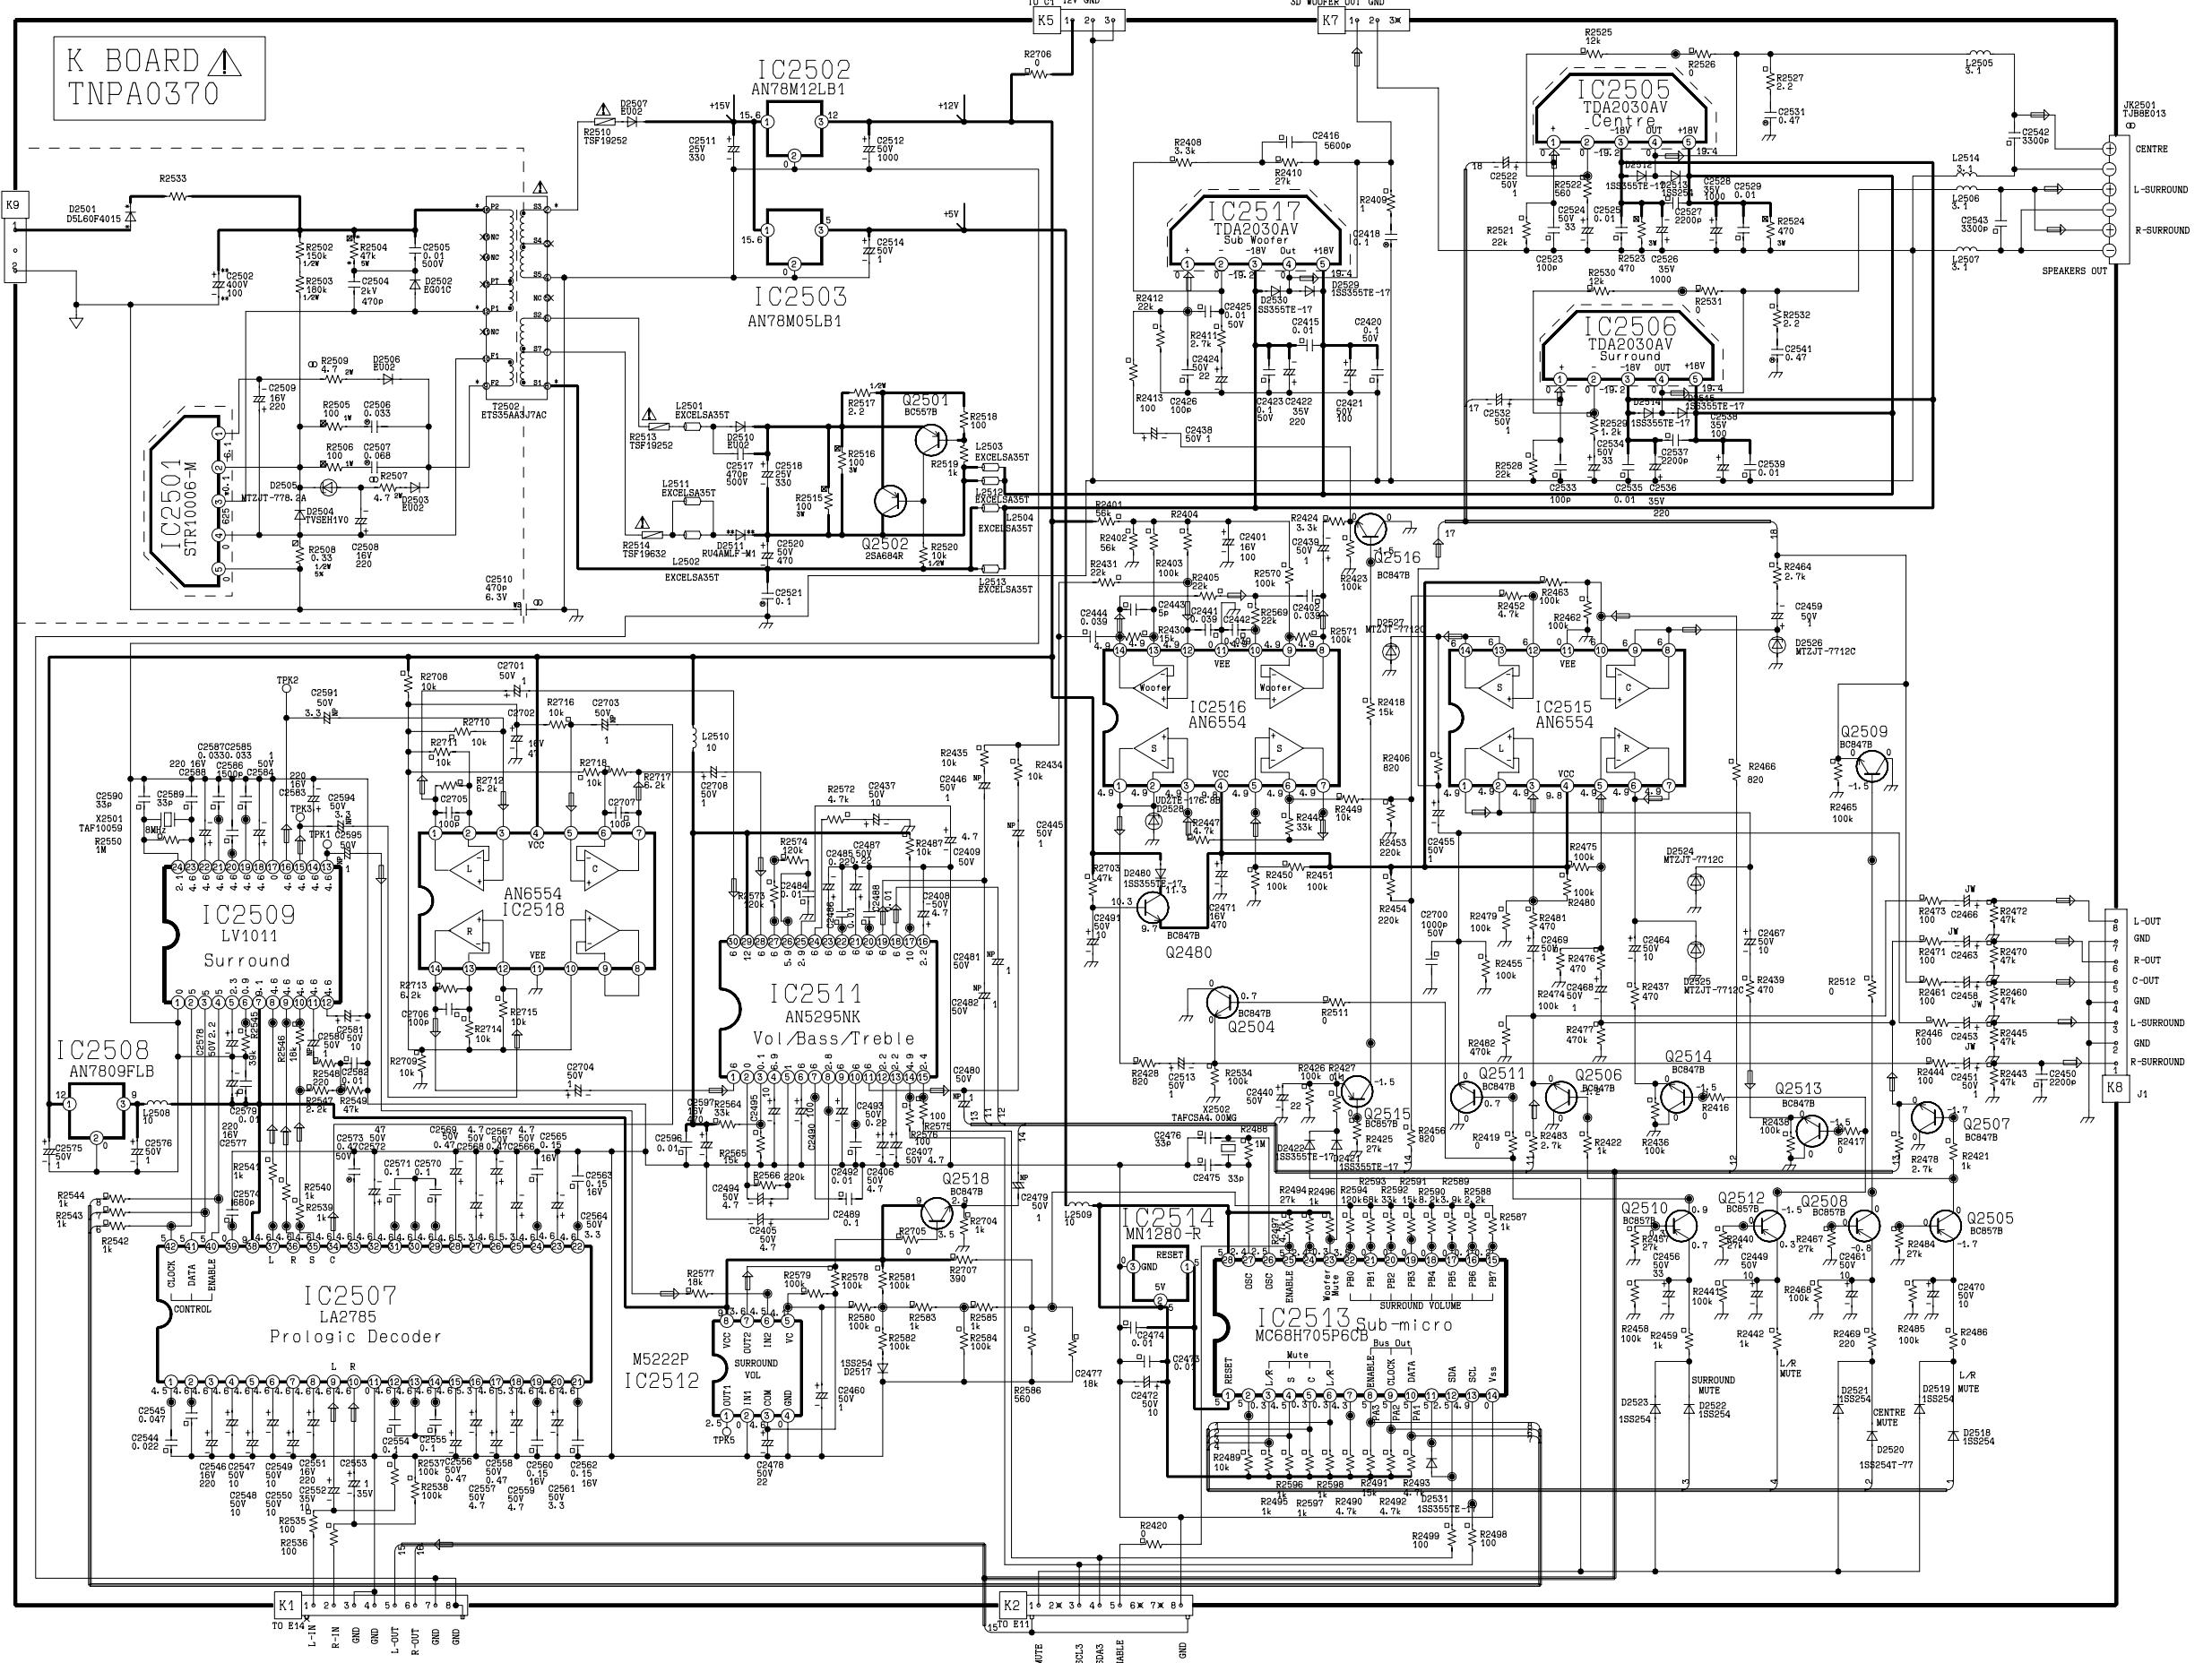

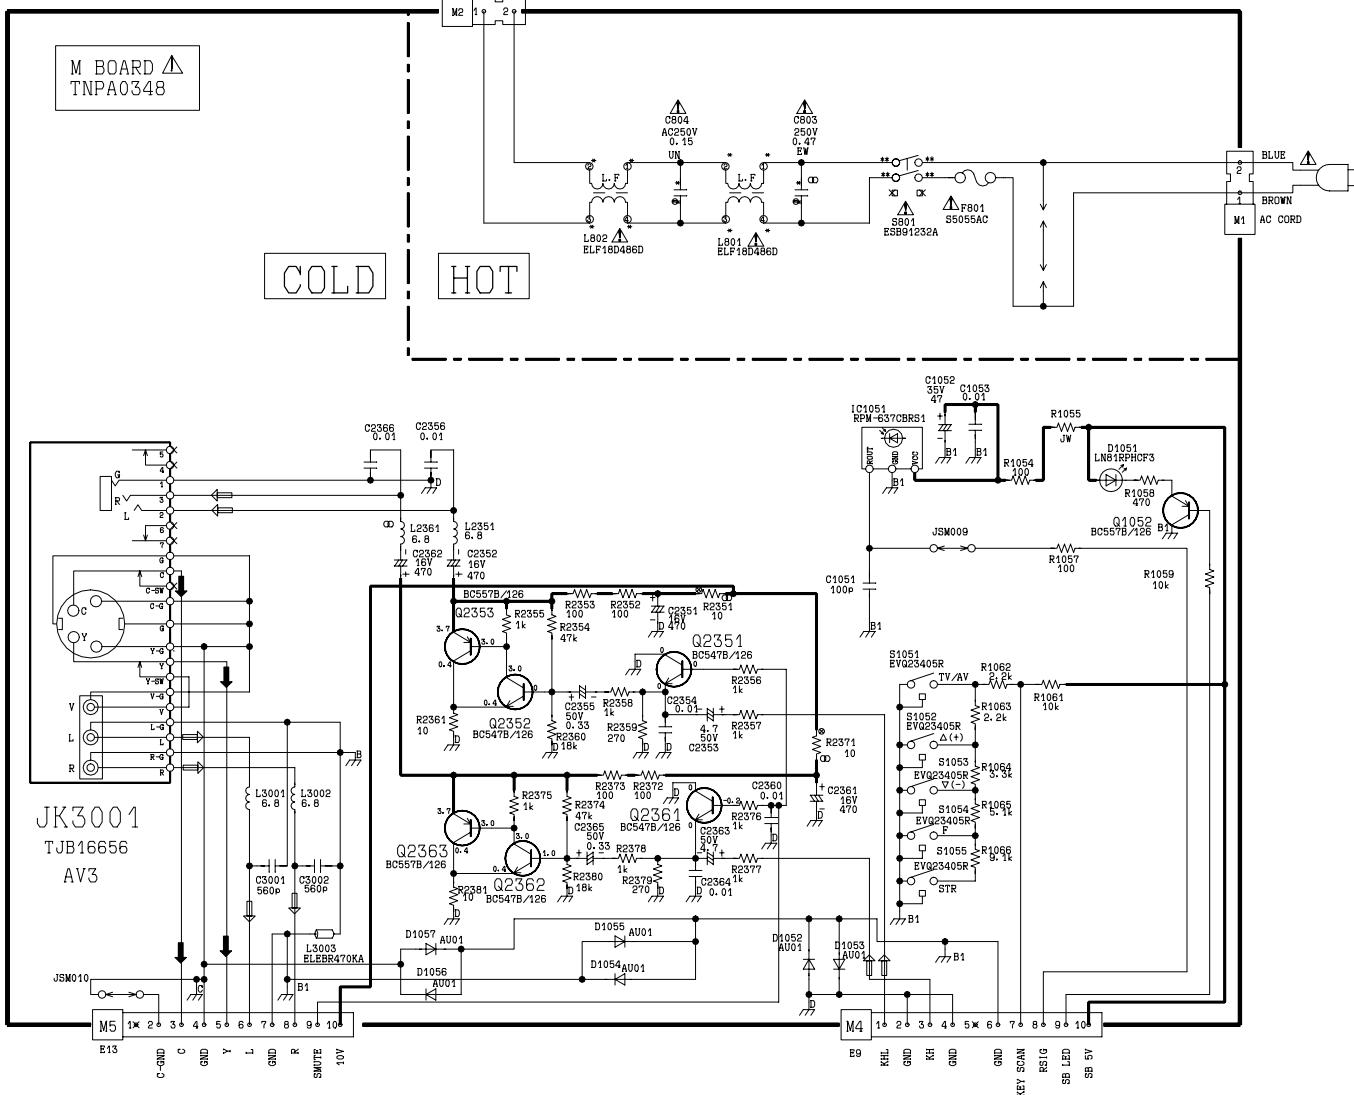

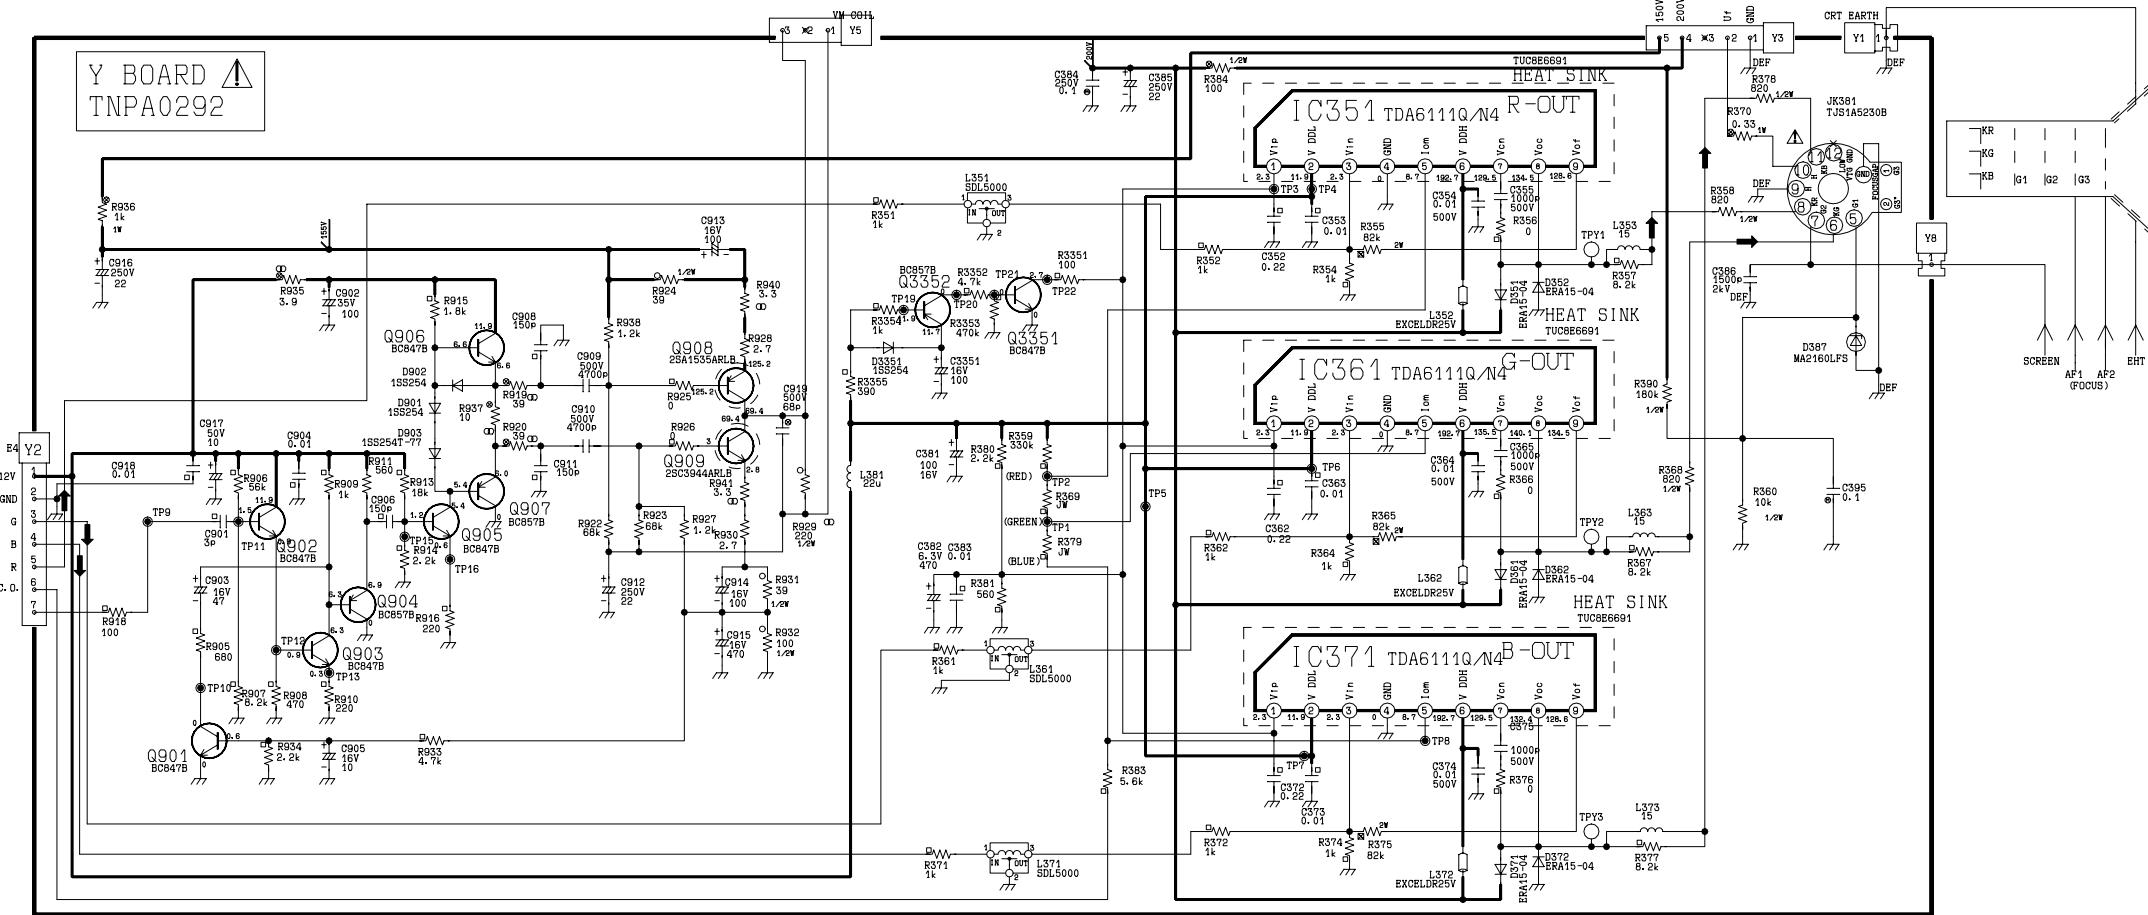

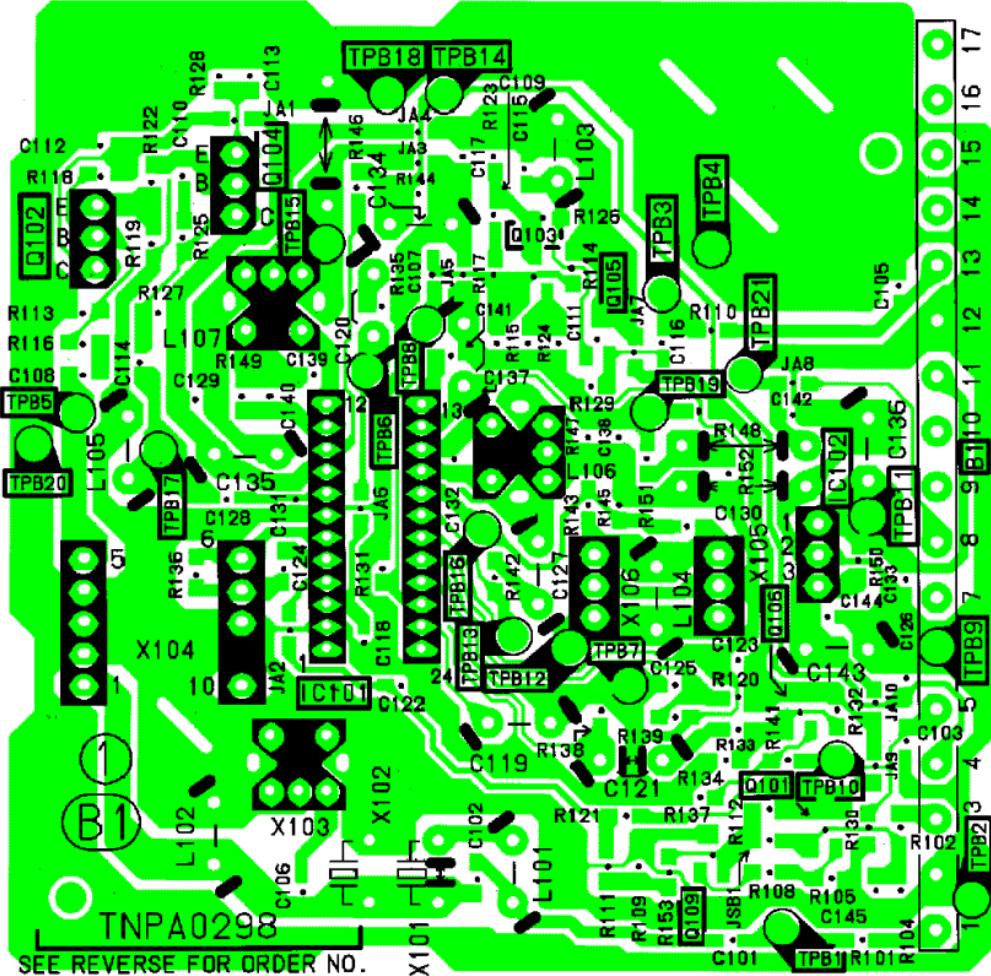

TNPA0298

SEE REVERSE FOR ORDER NO.

1 2 3 4 5 6 7 8 9 0



C-3

C

1

TNP8EC002

R2806

R2803

R2808

R2805 R2822

R2804

14

[IC2801]

R2811

R2810

R2813

R2812

R2807

R2802

R2801

R2815

R2801

C2803

C2804

C2805

C2806

C2807

C2808

C2809

R2814

R2816

R2817

R2818

R2819

R2820

R2821

R2822

R2823

C2812

C2808

C2806

C2805

C2804

C2803

C2802

C2801

C2800

JC2

JC1

R2816

R2817

R2818

R2819

R2820

R2821

R2822

C2815

D2801

Q2801

Q2801

Q2801

Q2801

Q2801

Q2801

Q2801

C-2

C-1

C2811 C2813

C2814

C2815

C2816

C2817

C2818



C2819



C2820



C2821

C2822


C2823

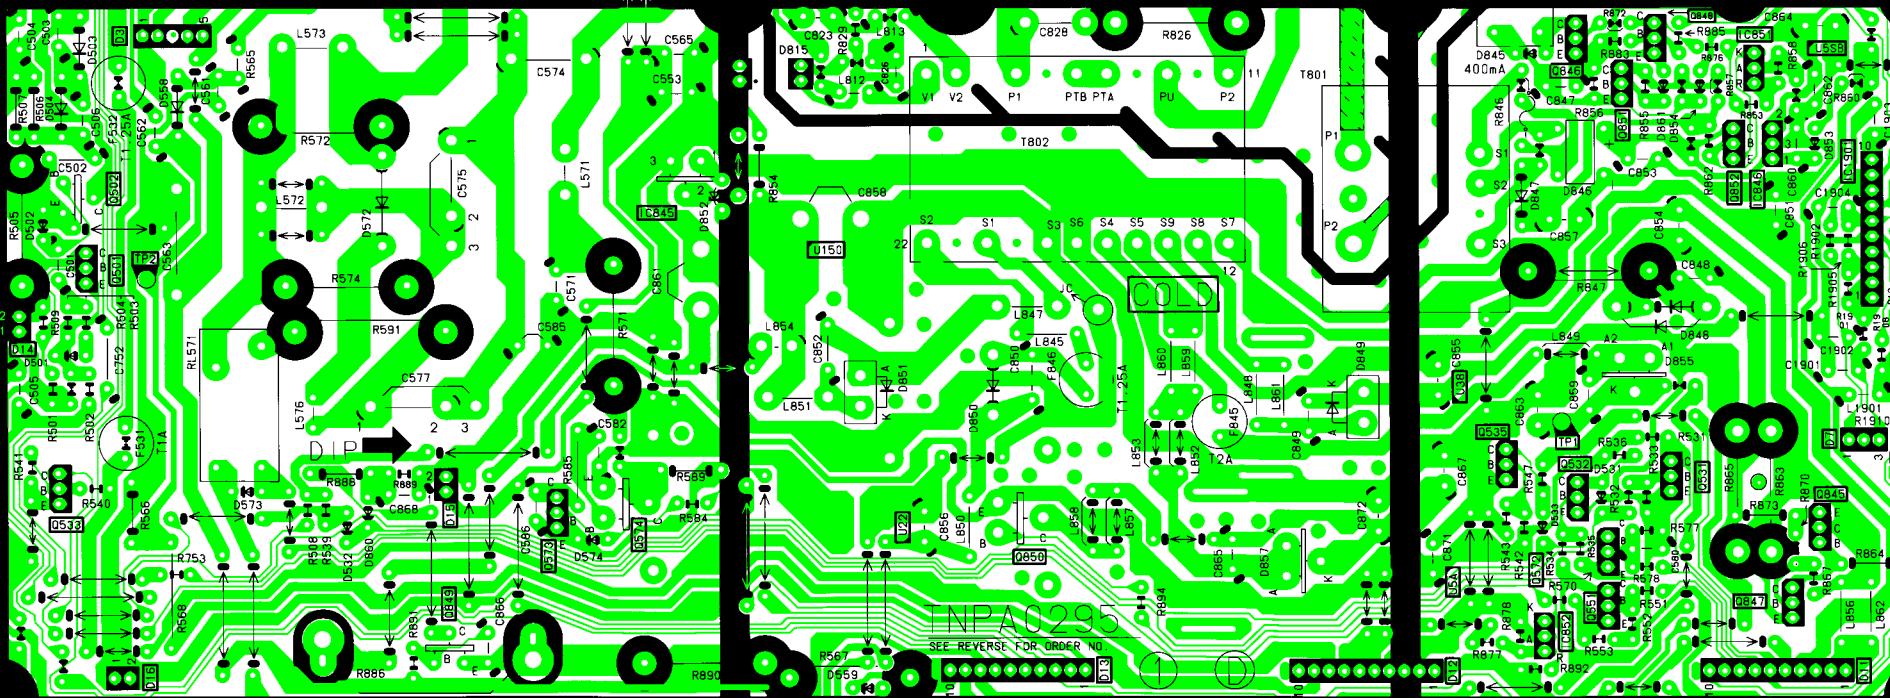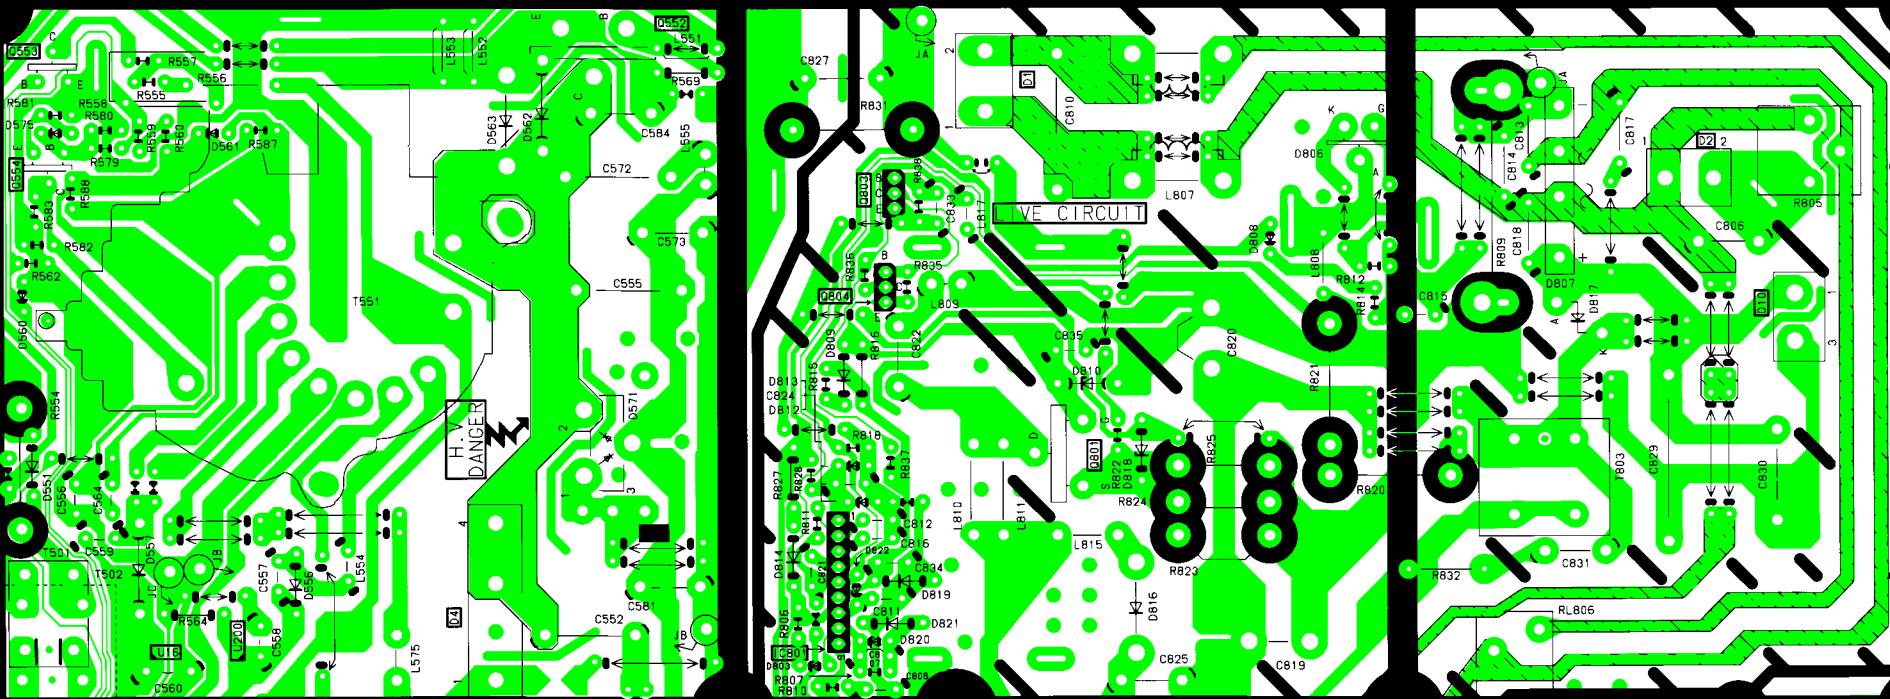

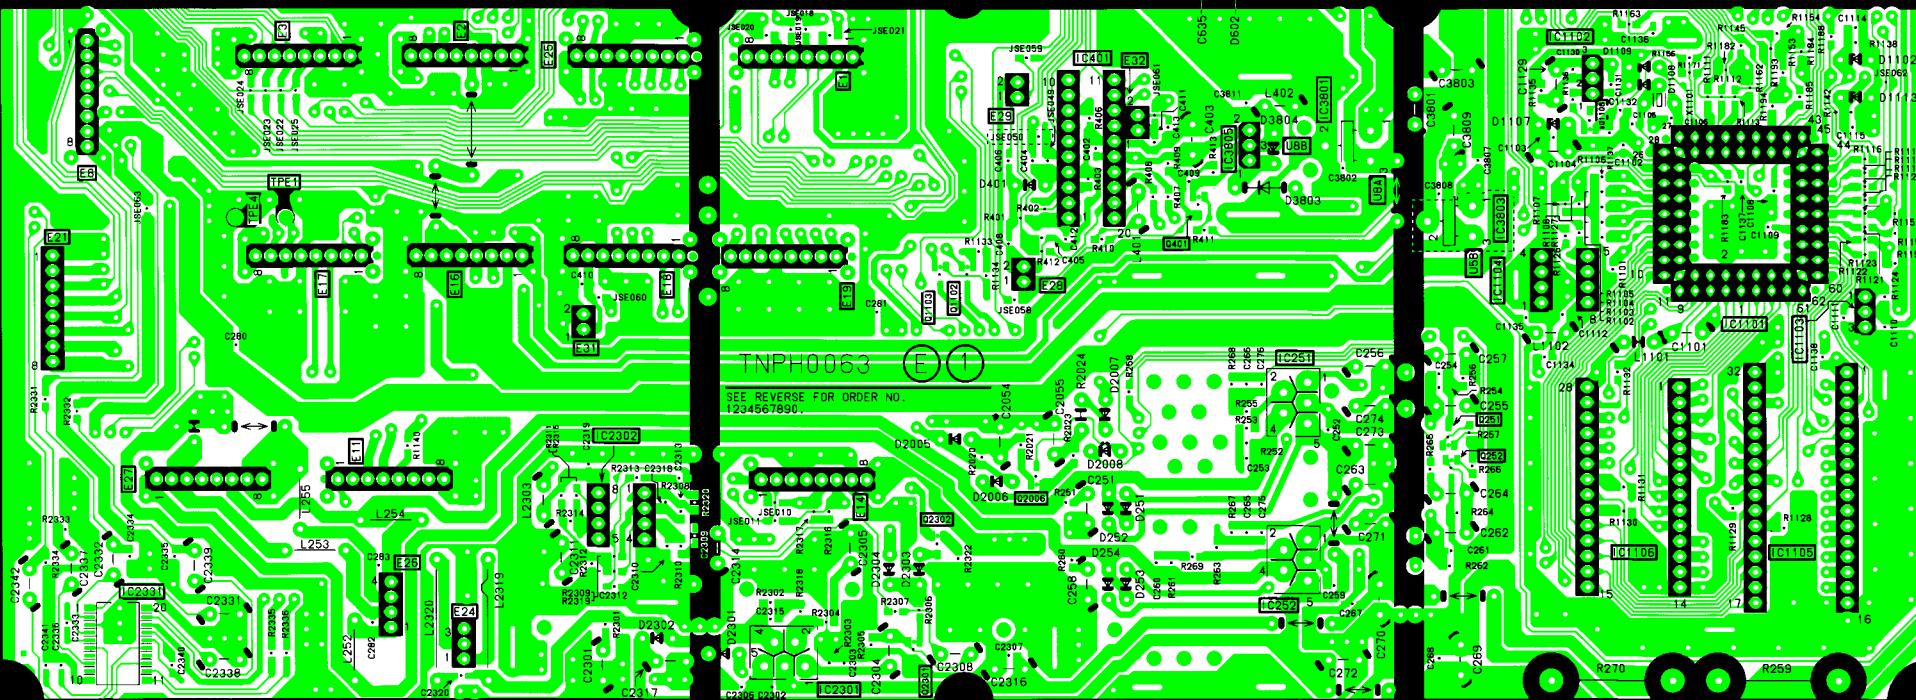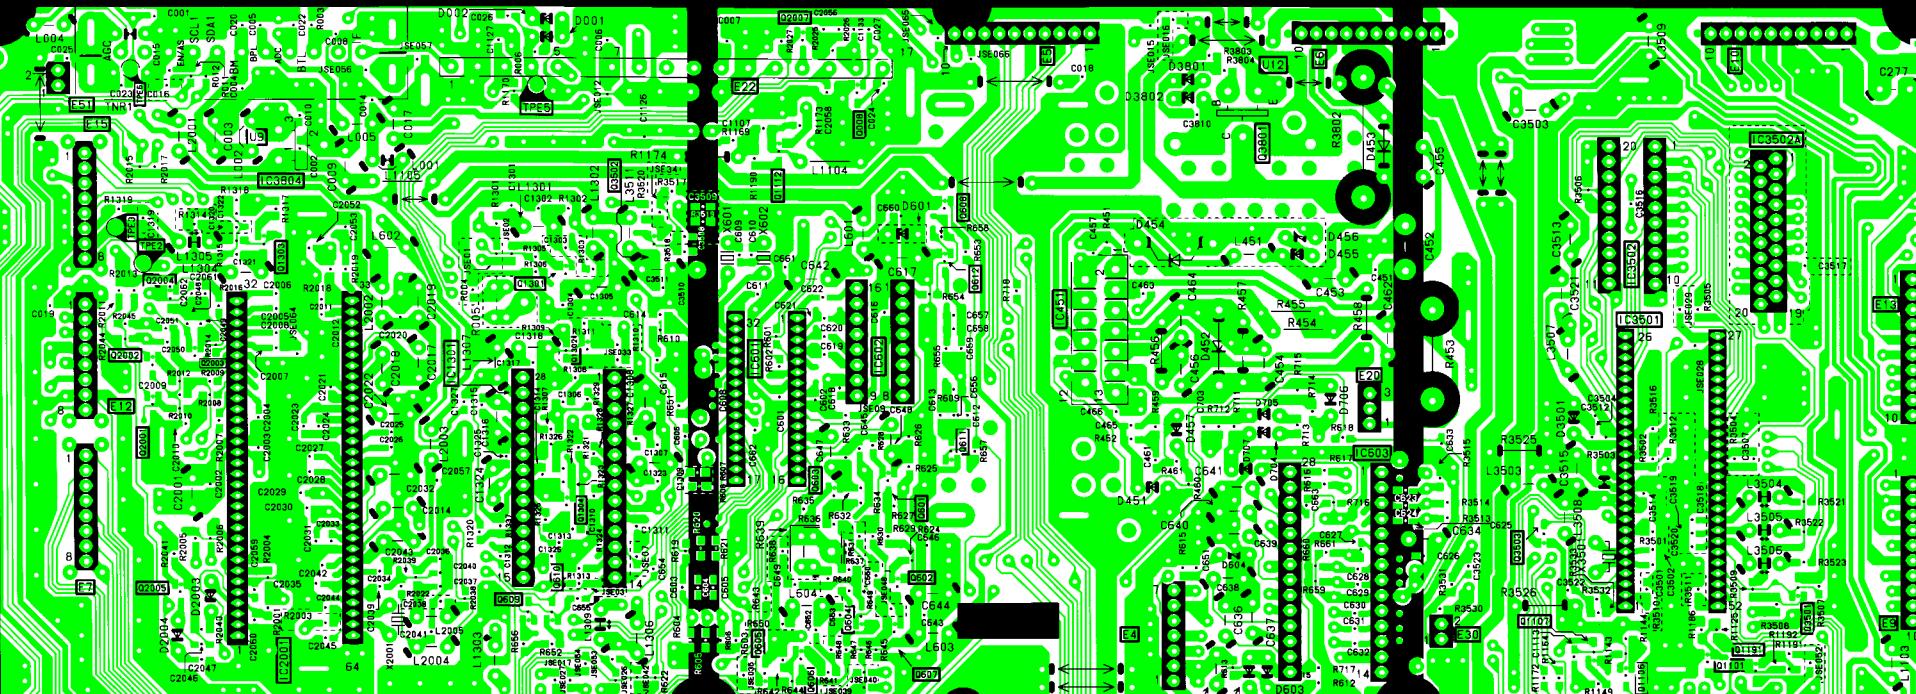

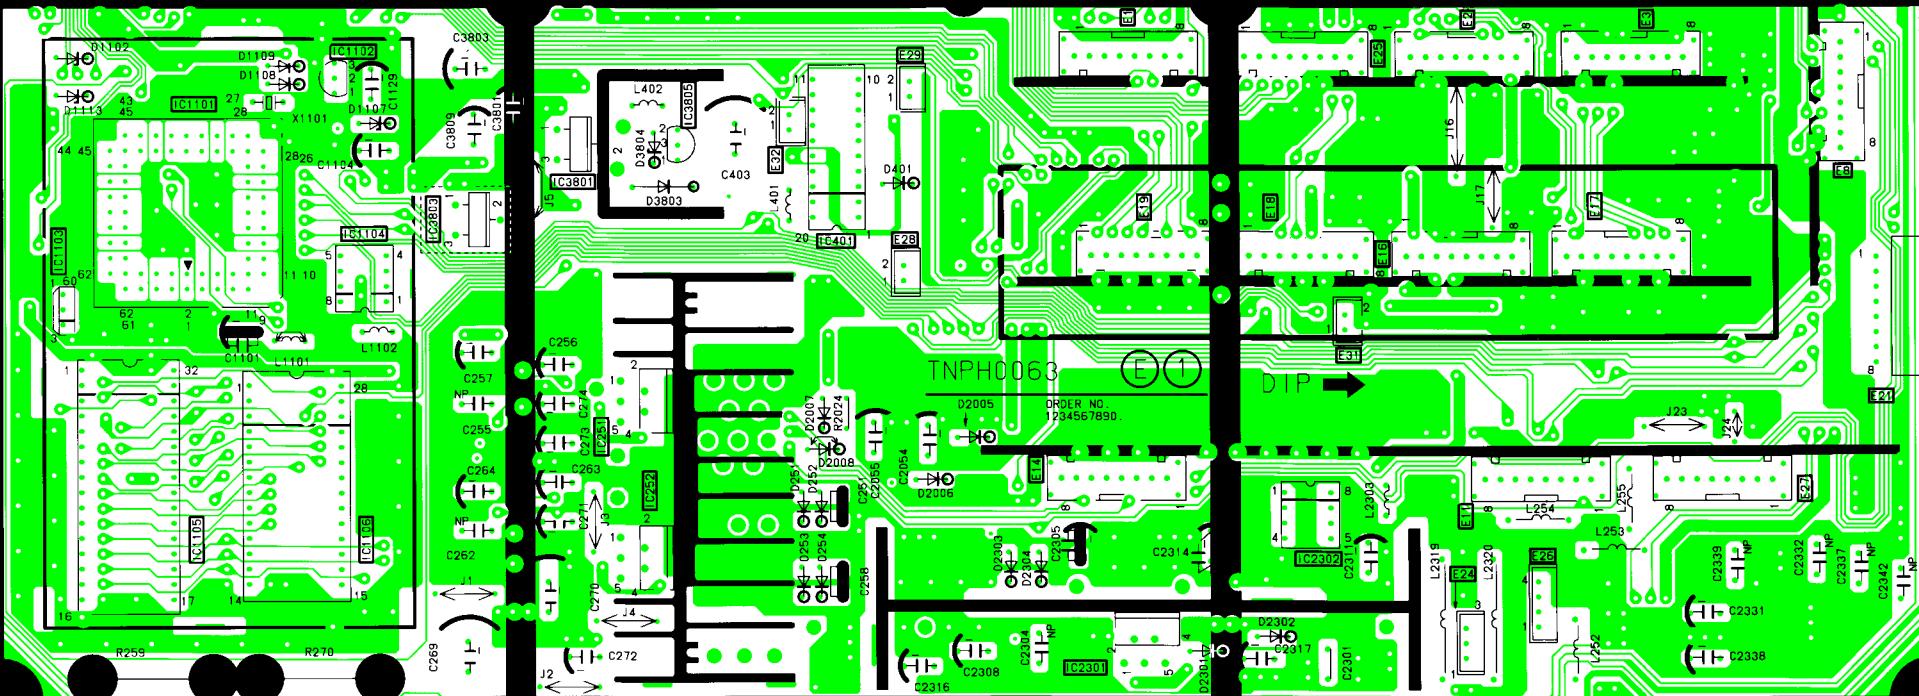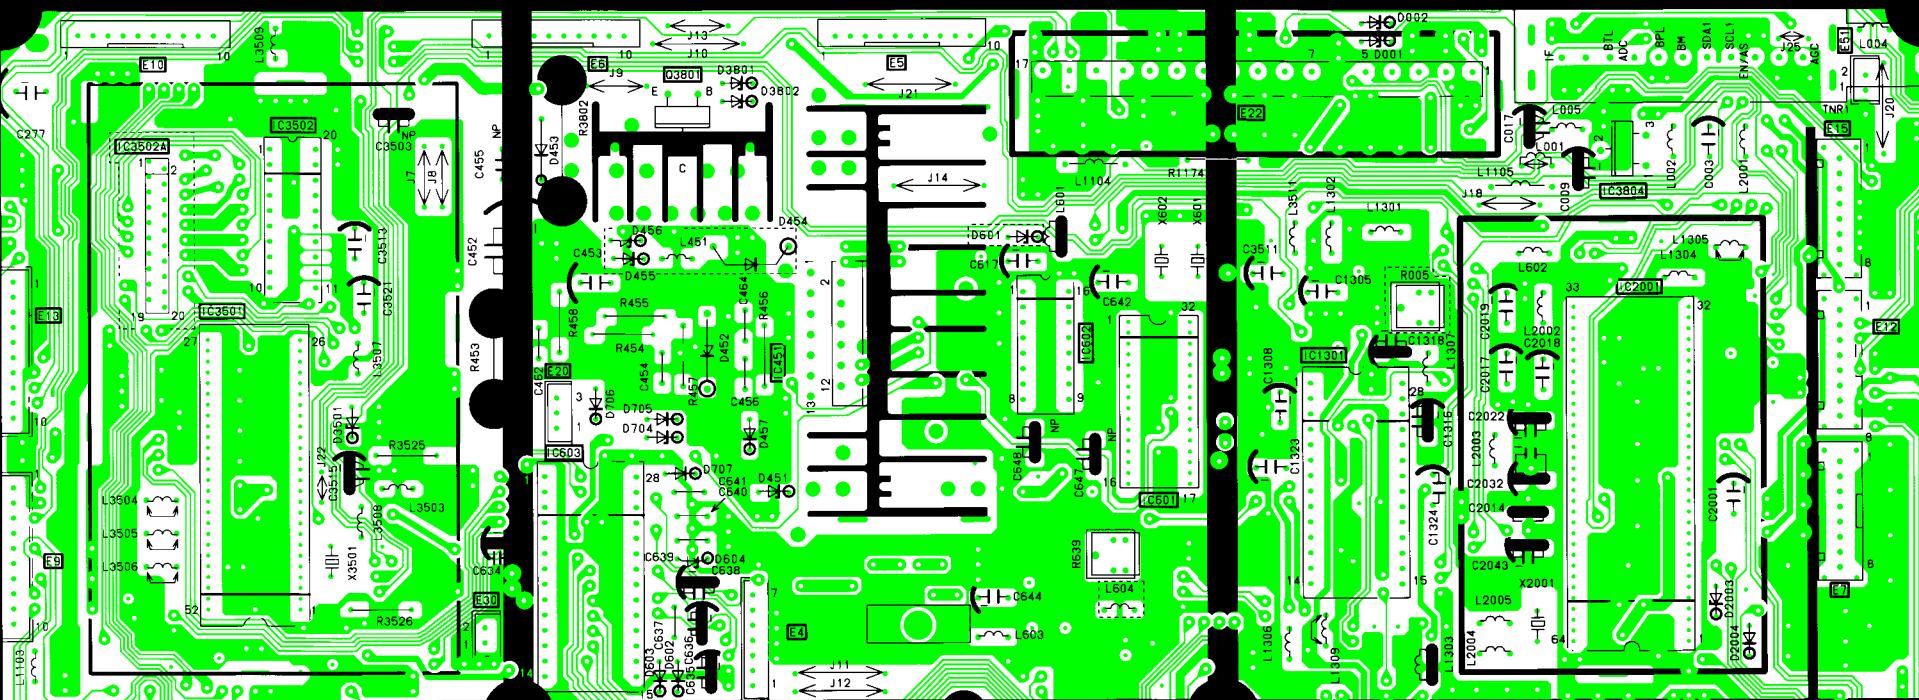



TNPA0294

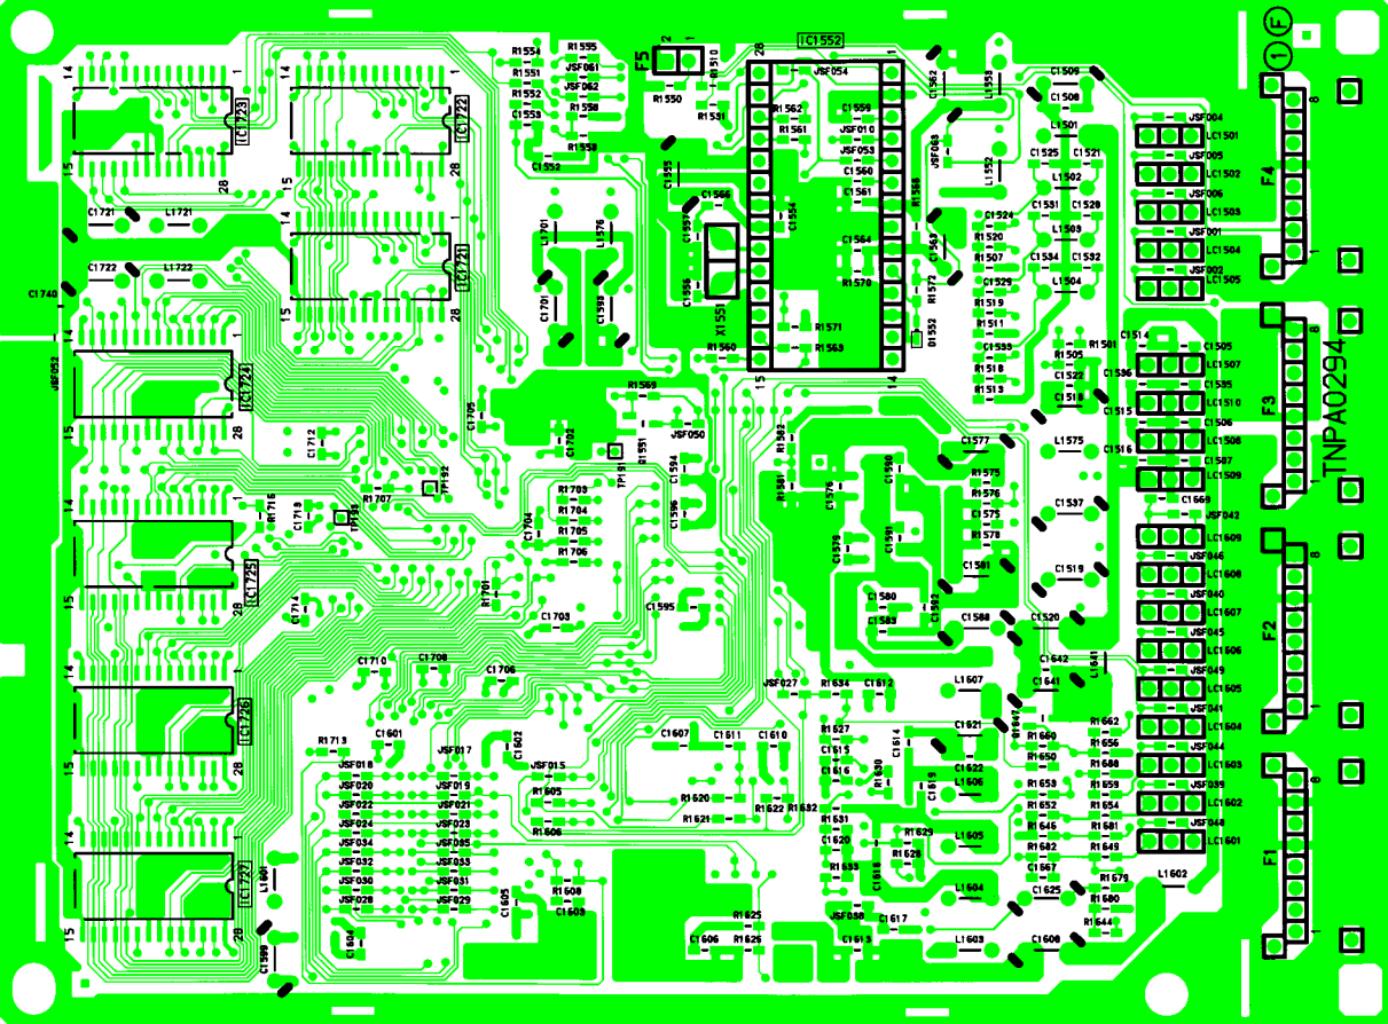



TNPA0293


SEE REVERSE FOR ORDER NO.

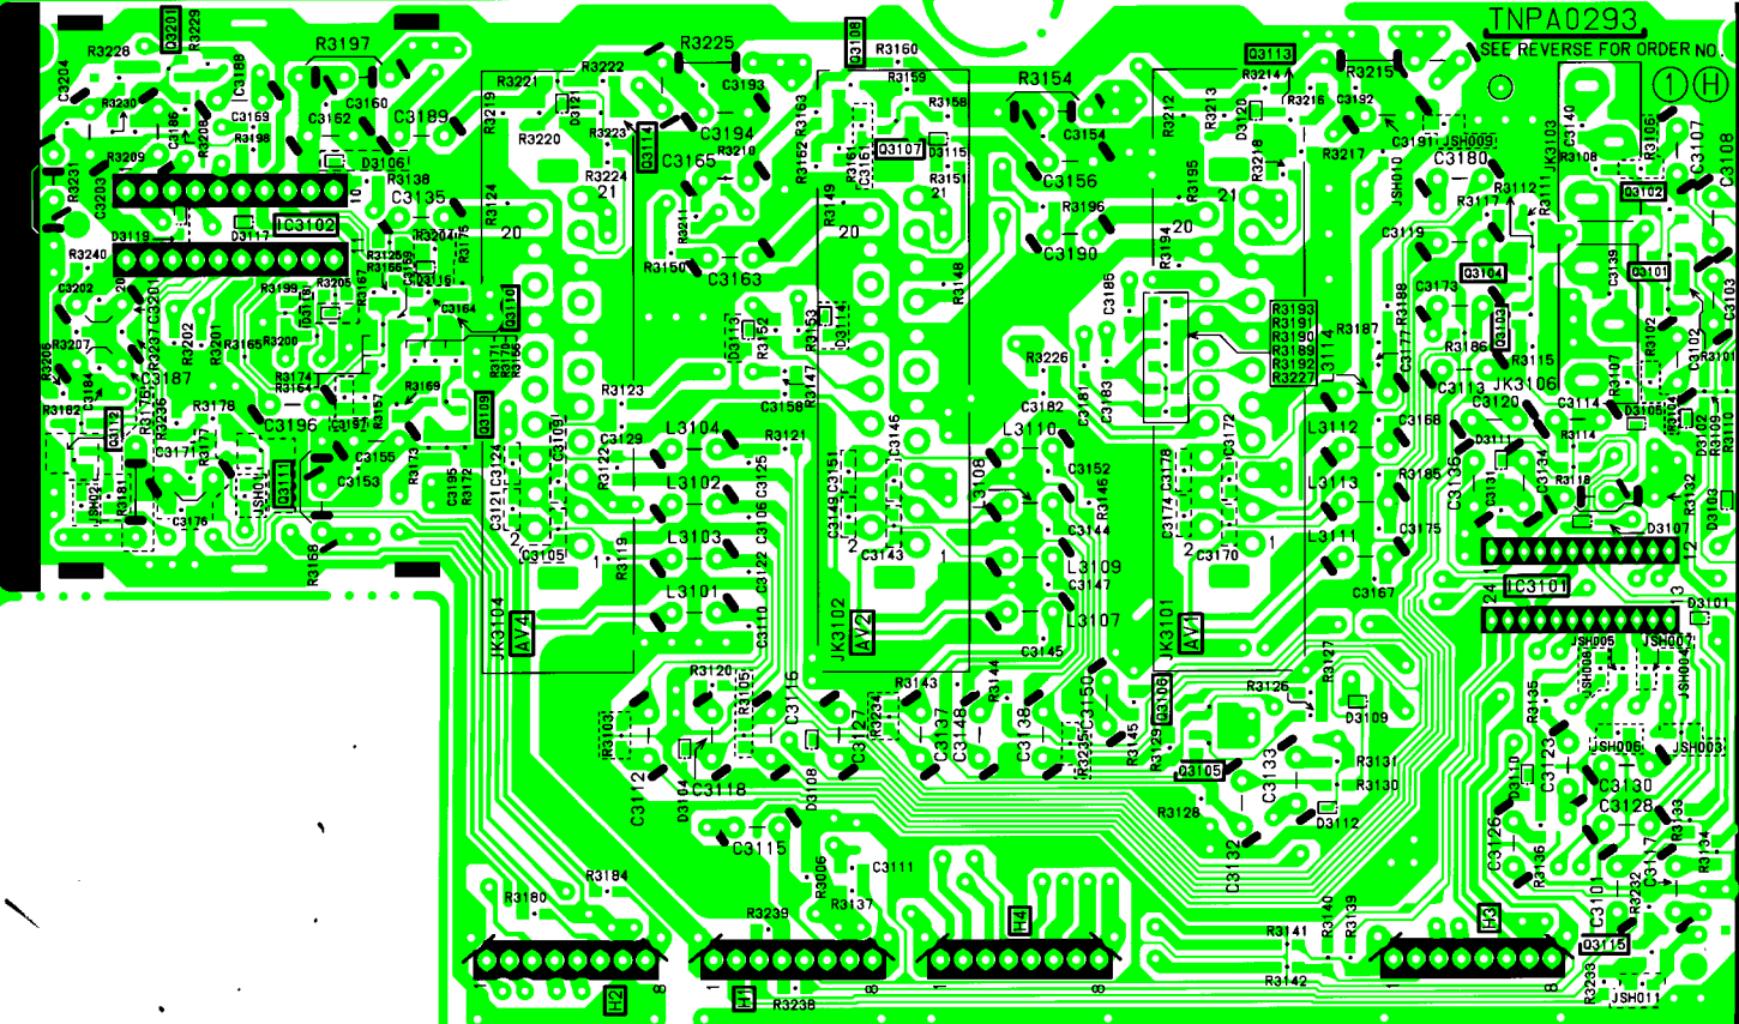

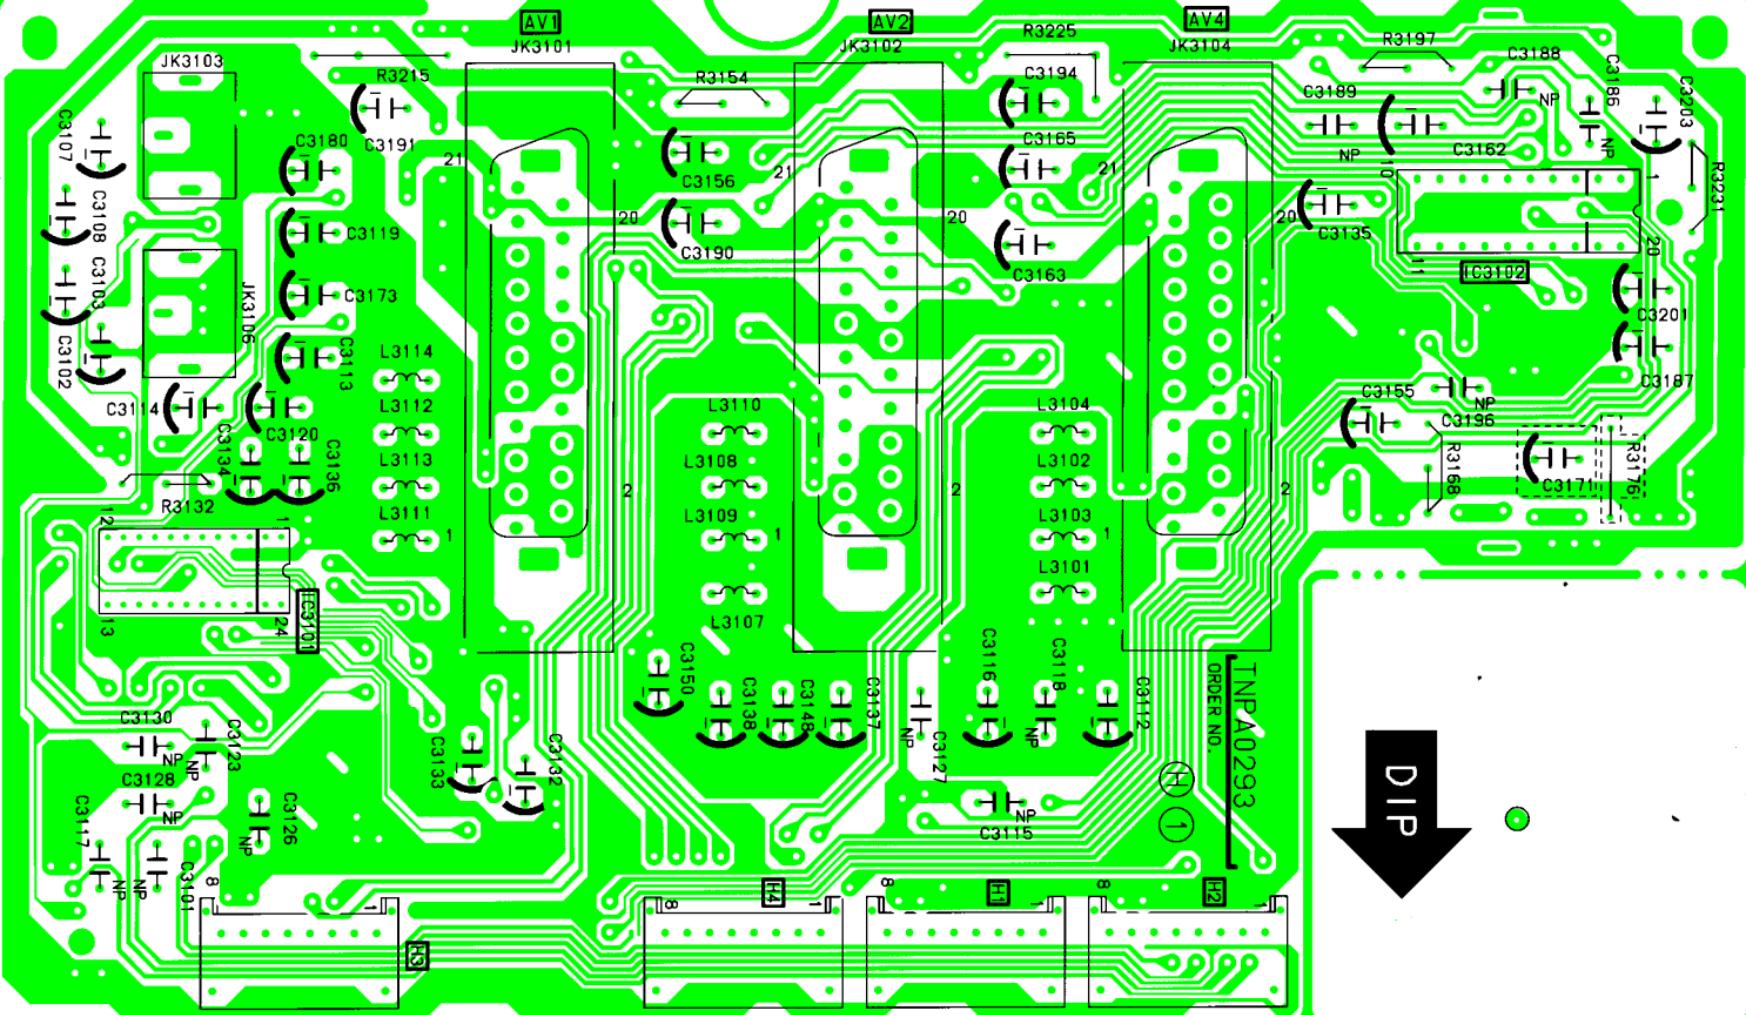

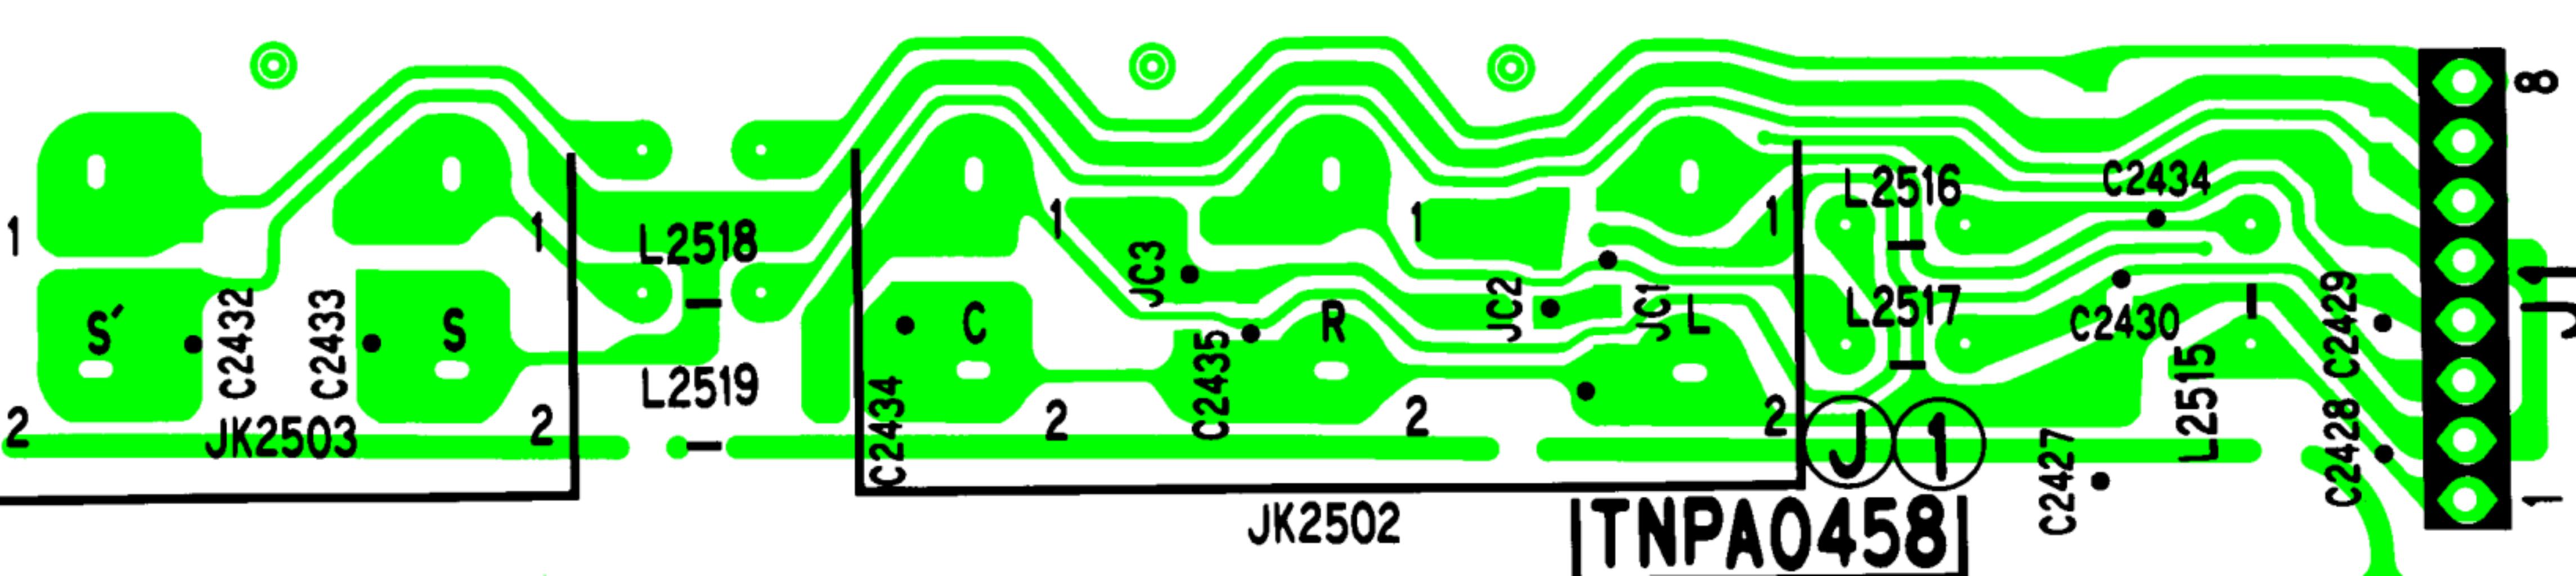

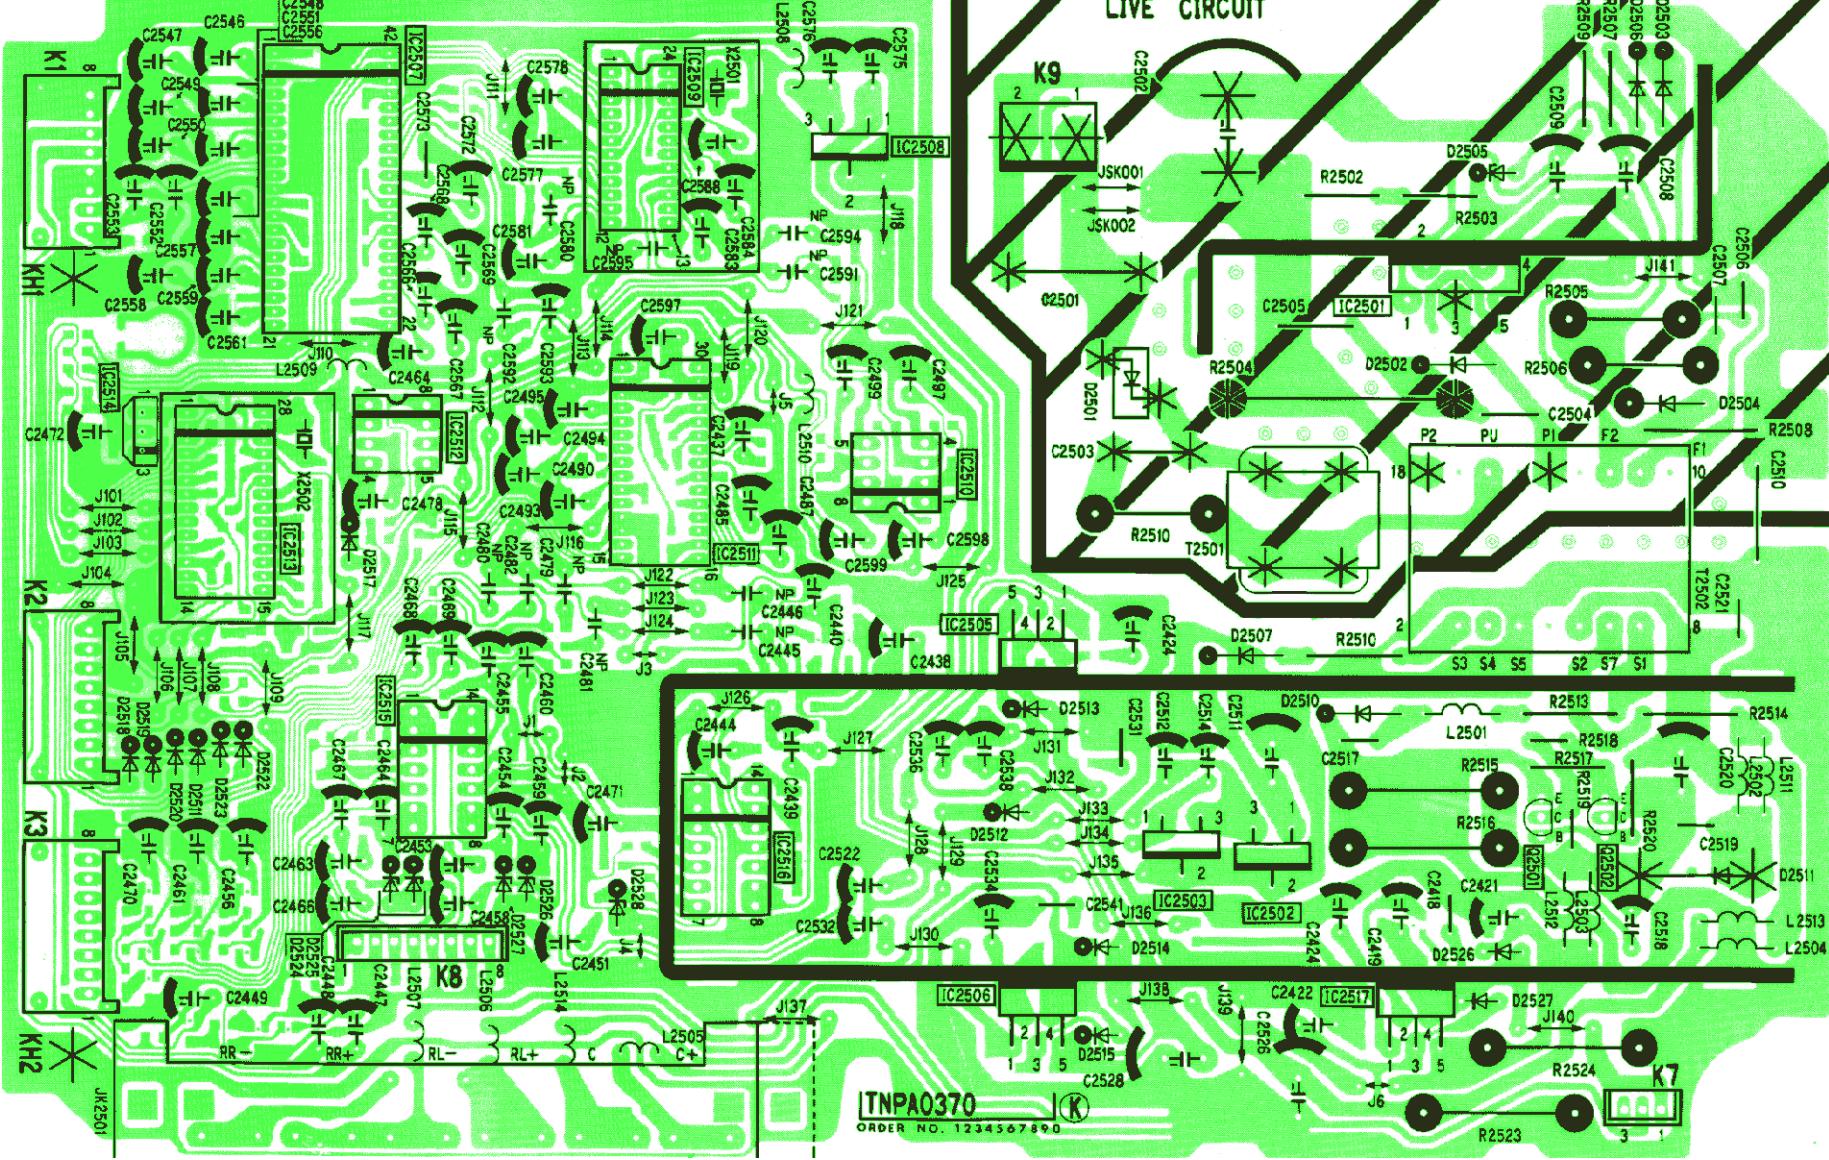

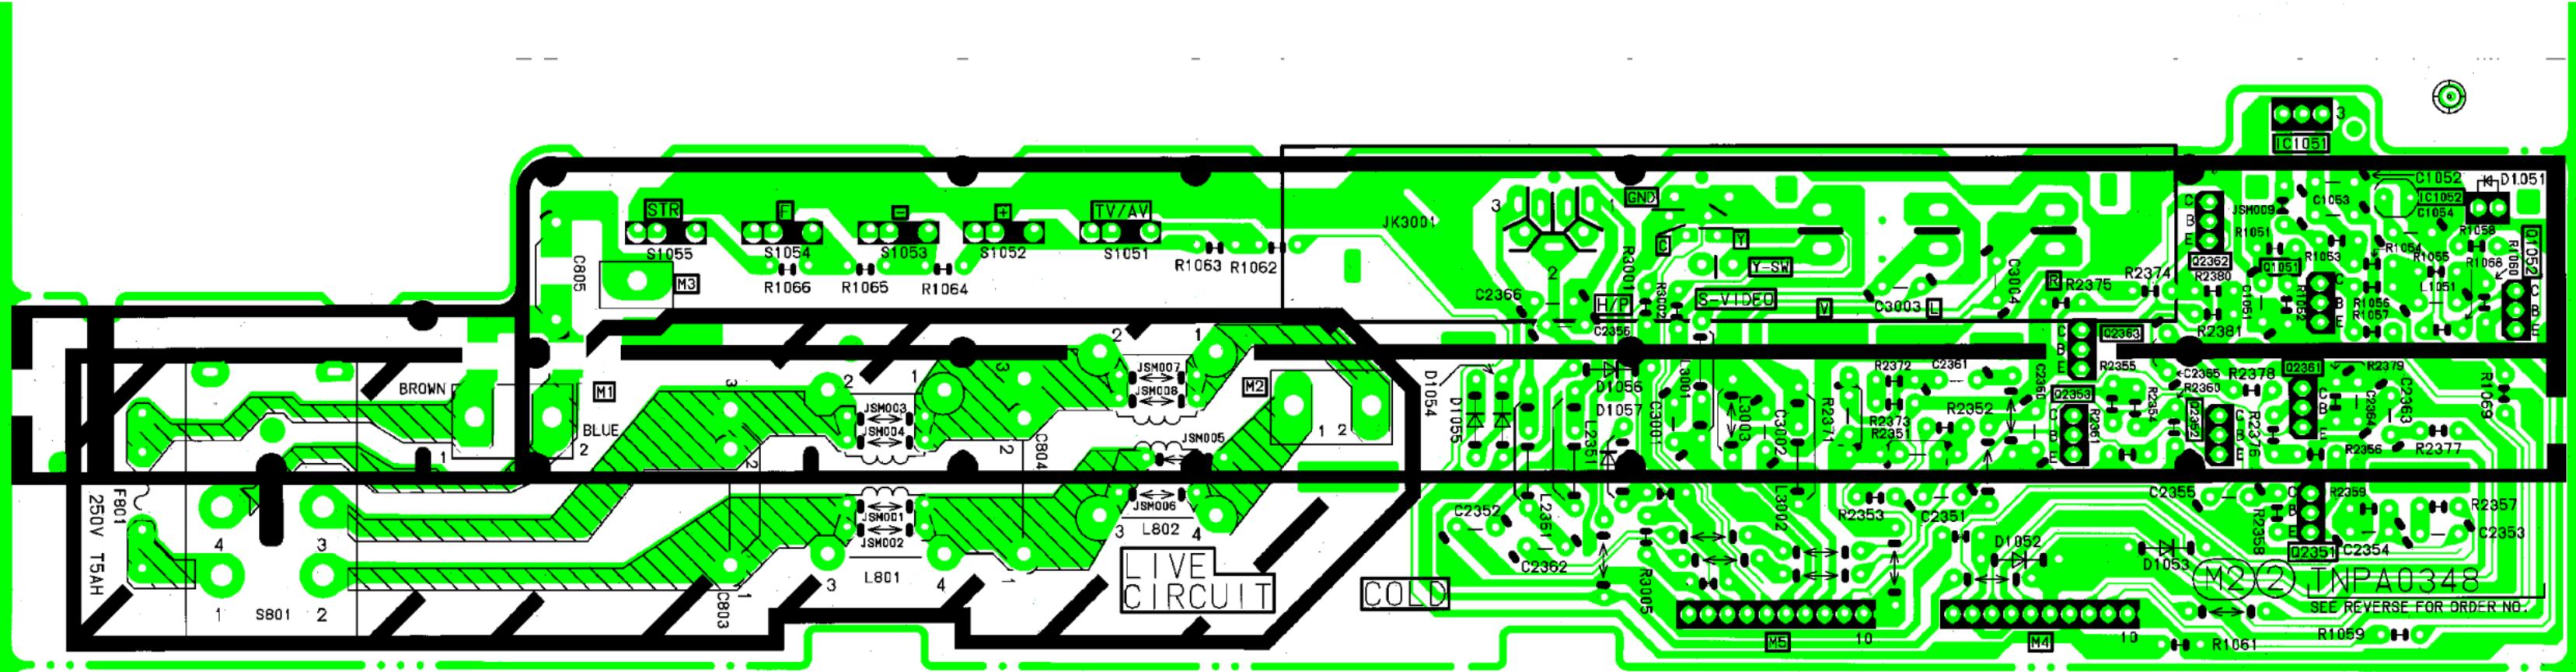

DIP

TNPA0348 M22

TNPA0292

SEE REVERSE FOR ORDER NO.

(2) Y

H.V. DANGER

JK381

