

# TX-28XD3L Service Manual

Safety

Specifications

Parts List

Service  
Information

Adjustments

Self Check

Service Hints

Mechanical  
View

Disassembly

Location of  
Controls

Waveforms

Block Diagrams

Schematic Diagrams

PCB Views

## Service Support

Service and repair of this product is supported by Panasonic's LUCI interface.

This interface provides a link between the TV and a standard PC to allow a number of diagnostic and control functions to be performed.

For more details contact your local Panasonic company.

  
BACK

**EXIT**

Video / Audio

Control



BACK

B - PCB

E - PCB

Y - PCB



BACK

B - Schematic

E - Schematic

N - Schematic

P - Schematic

Y - Schematic



BACK

# Service Manual



## Colour Television TX-28XD3L

## EURO-2M Chassis

### SPECIFICATIONS

<b>Power Source :</b>	220-240V AC, 50Hz
<b>Power Consumption :</b>	96W
<b>Standby Power Consumption :</b>	1W
<b>Aerial Impedance :</b>	75Ω unbalanced, Coaxial Type
<b>Receiving System :</b>	PAL-I, PAL 525/60, MNTSC, NTSC (AV Only)
<b>Receiving Channels :</b>	VHF A - S20 UHF E21 - E69 CATV S21 - S41 (HYPERBAND)
<b>Intermediate Frequency :</b>	Video 39.5 MHz Sound 33.5 MHz 32.95 MHz Colour 35.07 MHz
<b>Video / Audio Terminals :</b>	Audio Monitor Out Audio(RCA x 2)500mV rms,1kΩ
AV1 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin)
AV1 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ

AV2 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y : 1V p-p 75Ω (21 pin) C : 0.3V p-p 75Ω
AV2 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ
AV3 IN	Audio (RCA x 2)500mV rms,10kΩ Video (RCA x 1)1V p-p 75Ω
<b>High Voltage :</b>	28kV ± 1kV (zero beam current)
<b>Picture Tube :</b>	A66ECF50X32 66cm
<b>Audio Output :</b>	Speaker 2 x 20W (Music Power) 8Ω Impedance
Headphones	8Ω Impedance

**Accessories supplied :** Remote Control  
VS-XD3/A Video Cabinet  
2 x R6 (UM3) Batteries

**Dimensions :**  
Height : 596.5mm  
Width : 778mm  
Depth : 481.5mm

**Net Weight :** 35kg

Specifications are subject to change without notice.  
Weight and dimensions shown are approximate.

# CONTENTS

- SAFETY PRECAUTIONS .....
- SERVICE HINTS .....
- SERVICE POSITION .....
- SERVICE MODE .....
- ADJUSTMENT PROCEDURE .....
- SELF CHECK .....
- ALIGNMENT SETTINGS .....
- WAVEFORM PATTERN TABLE .....
- BLOCK DIAGRAMS .....
- PARTS LOCATION .....
- REPLACEMENT PARTS LIST .....
- SCHEMATIC DIAGRAMS .....
- CONDUCTOR VIEWS .....

## Safety Precautions

### General Guide Lines

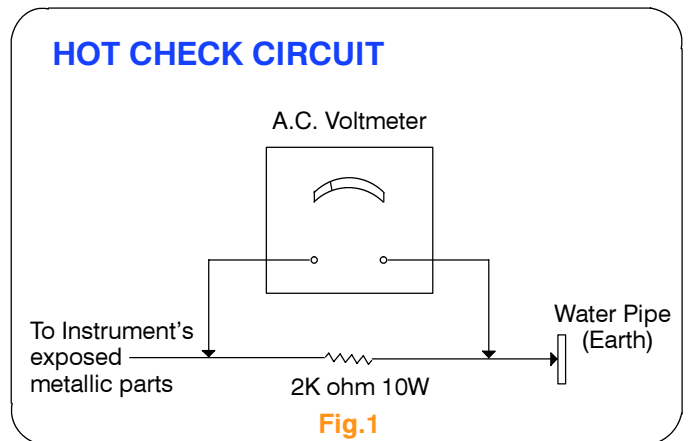
1. It is advisable to insert an isolation transformer in the AC supply before servicing a hot chassis.
  2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
  3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
  4. When the receiver is not being used for a long period of time, unplug the power cord from the AC outlet.
  5. Potentials as high as 29kV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the picture to the chassis before handling the tube.
  6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazards.
4. Check each exposed Metallic part and check the voltage at each point.
  5. Reverse the AC plug at the outlet and repeat each of the above measurements.
  6. The potential at any point should not exceed 1.4 Vrms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

### Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis the reading must be infinite.

### Leakage Current Hot Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 2k ohm 10W resistor in series with an exposed metallic part on the receiver and an earth such as a water pipe.
3. Use an AC voltmeter with high impedance to measure the potential across the resistor.



### X-Radiation Warning

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service ensure that the jig is capable of handling 29kV without causing X-Radiation.


**NOTE :** It is important to use an accurate periodically calibrated high voltage meter

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate 28kV  $\pm$ 1kV if the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent an X-Radiation possibility, it is essential to use the specified tube.

## SERVICE HINTS

### HOW TO REMOVE THE REAR COVER

1. Remove the 14 screws (A) as shown in Fig.2/Fig.3.

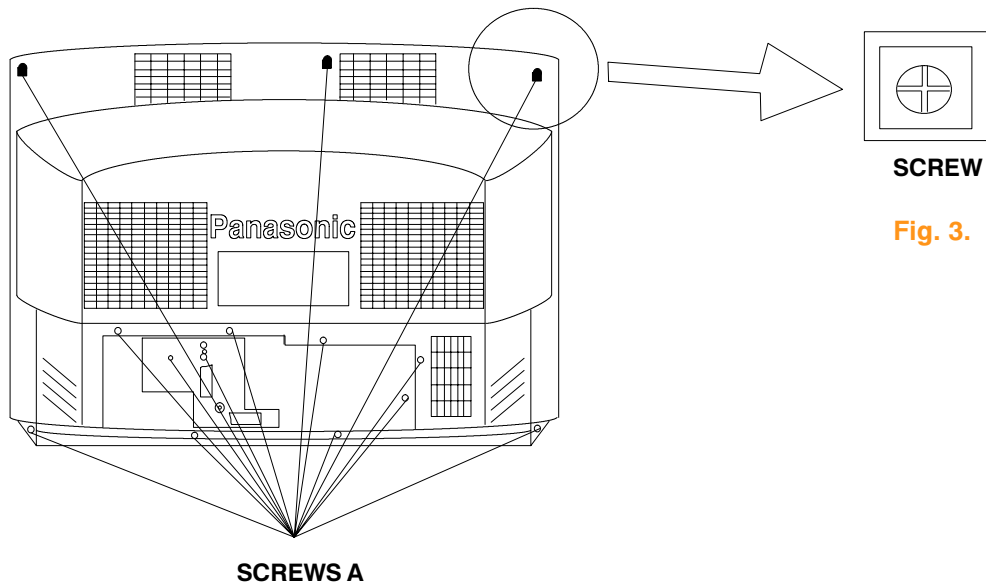


**Fig. 2.**

**SCREW**

**Fig. 3.**

## LOCATION OF CONTROLS

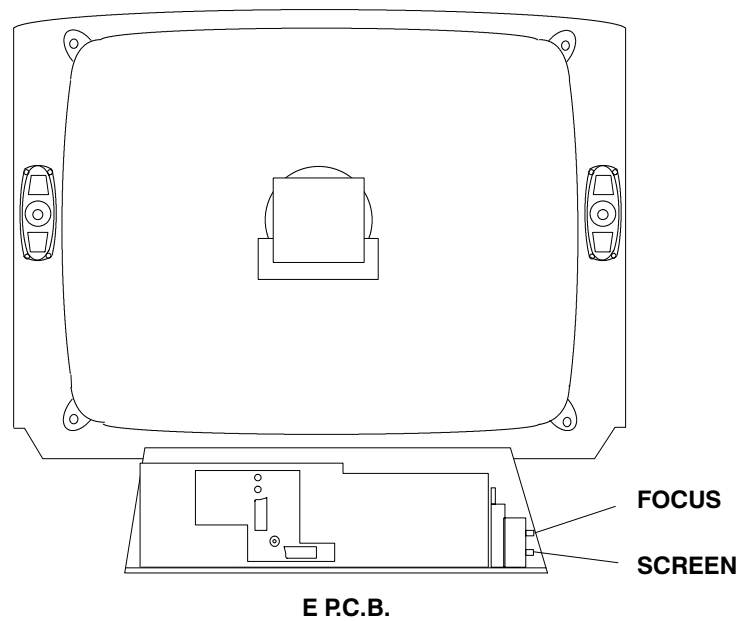

**Fig. 4.**



## HOW TO MOVE THE CHASSIS INTO SERVICE POSITION

1. Remove the bead clumper (Fig.8.) from the mains lead and screw into the left hand speaker box screw hole **A** shown in Fig.5.
2. Release the N-PCB from the cabinet Fig.6.
3. Hold and lift the rear of the E-PCB chassis and gently pull the chassis toward you.
4. Release the respective wiring clips and rotate the chassis clockwise (Fig.7.), moving the EHT lead around the left side of the CRT neck.
5. Lift the front of the E-PCB chassis and insert chassis frame pin **C** into cabinet hole **B** shown in Fig.6. and Fig.10.
6. Insert bead clumper into chassis frame hole **E** shown in Fig.9. and Fig.10.
7. After servicing ensure all wiring is returned to its original position before returning the receiver to the customer.

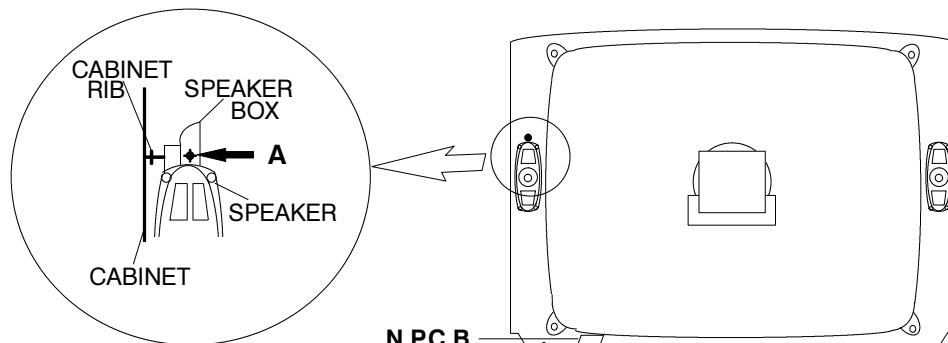


Fig. 5.

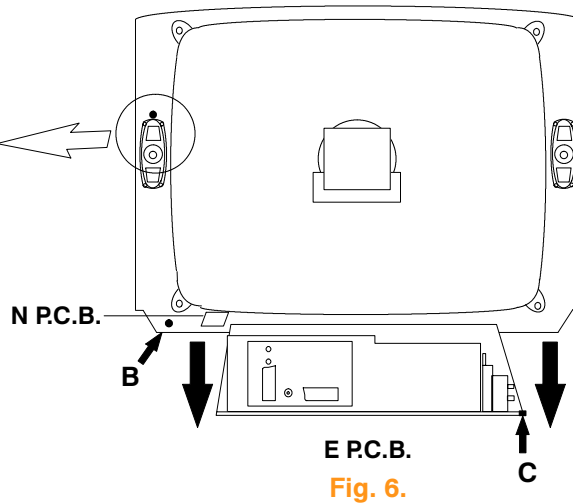


Fig. 6.

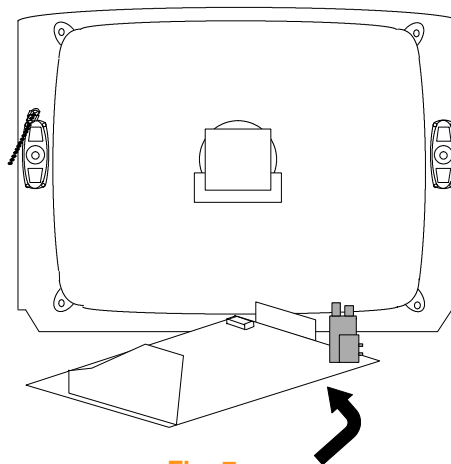


Fig. 7.

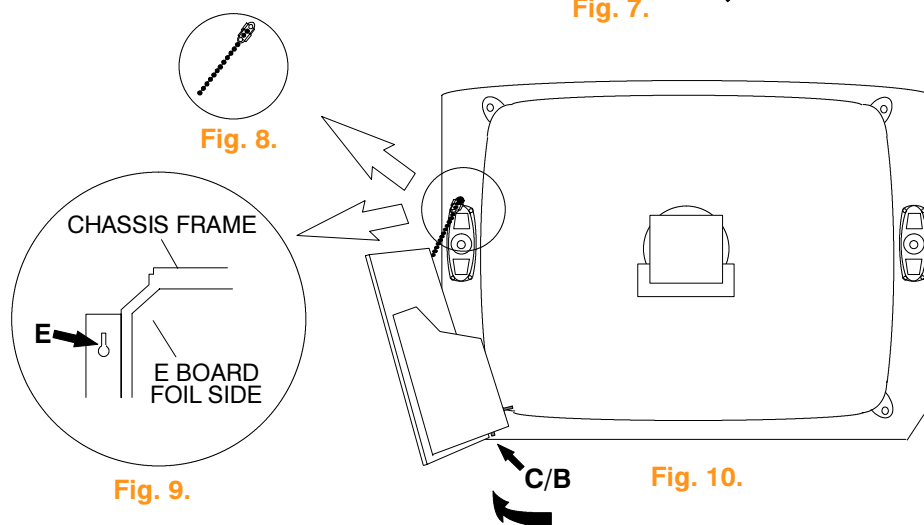


Fig. 9.

Fig. 10.

## SERVICE MODE

The remote control is used for entering and storing adjustments, with the exception of cut-off adjustments which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the CCU variants as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the Reveal button on the remote control and at the same time press the Volume down on the customer controls at the front of the TV, this will place the TV into the Service Mode.
2. Press the RED / GREEN buttons to step down / up through the functions.
3. Press the YELLOW / BLUE buttons to alter the function values.
4. Press the STORE button on the preset panel after each adjustment has been made to store the required values.
5. To exit the Service Mode press the Normalisation button.

**NOTE:** This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels and analogue levels into the Memory Pack and then upload them onto another EURO-2M TV set.

## USING THE MEMORY PACK

### TV to Memory Pack process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:-

Program  
External>>TV

3. Press the blue button on the remote control. The screen will show:-

Program  
TV>>External

4. Press the STORE button on the TV. The screen will show:-

Storing

5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2-3 minutes to complete and when finished the screen will show:-

OK!

### Memory Pack to TV Process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:-

Program  
External>>TV

3. Press the STORE button on the TV. The screen will show:-

Loading

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2-3 minutes to complete and when finished the screen will show:-

OK!

5. The tuning information from the Memory Pack has now been copied into the TV
6. To exit from the Service Mode switch off the TV.
7. The process has now been completed and the Memory Pack can now be removed.

## ERRORS

If an error occurs while using the Memory Pack the TV will detect this and the screen will show:-

Program  
Error!

If this happens then switch off the TV and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

## ADJUSTMENT PROCEDURE

Item/Preparation	Adjustments
<b>+B SET-UP</b> 1. Receive a test pattern 2. Set the controls: Brightness           Minimum Contrast             Minimum Volume                Minimum	1. Set the +B voltage up as follows: Adjust <b>R811</b> so that <b>B2</b> shows $147V \pm 1V$ 2. Confirm the following voltages. <b>B1</b> 200 $\pm$ 10V <b>B6</b> 12 $\pm$ 0.5V <b>B3</b> 27 $\pm$ 1V <b>B7</b> 5 + 0.1/-0.25V <b>B4</b> 41 $\pm$ 1V <b>B8</b> 5 $\pm$ 0.25V <b>B5</b> 15.5 $\pm$ 1V <b>U33</b> 31 $\pm$ 1V
<b>RF AGC</b> 1. Receive a test pattern. 2. Connect an oscilloscope between the tuner RF AGC and ground. 3. Set the oscilloscope gain range to 1V/div.	1. Check that the noise becomes large when the RF AGC VR <b>R126</b> is turned counterclockwise. After the check turn it clockwise. 2. Gradually turn the RF AGC VR anti-clockwise, and set the RF AGC VR to the point where the RF AGC voltage is just falling to a point where this voltage drops by 0.2V from the maximum value.
<b>CUT OFF</b> 1. Receive a test pattern. 2. Degauss the tube externally. 3. Set the TV into Service Mode 1. 4. Select Cutoff DC mode.	1. Confirm then value is 128 and select Ug2 mode noting colour with largest value. 2. Turn the screen VR until a colour reaches 20~ 30. 3. Connect an oscilloscope to the cathode with the biggest value colour. 4. Select Cutoff DC mode and adjust Cutoff pulse to $159V \pm 5V$ . 5. Disconnect the oscilloscope and adjust the screen to whichever colour reaches $70 \pm 30$ first.

## SELF CHECK

Self check is used to automatically check the Bus lines and Hexadecimal code of the TV set.

To enter the Self Check mode press Function down button, on the Preset Panel, at the same time pressing the Status button, on the Remote Control, and the screen will show:-

When exiting Self Check the customer settings will return to factory setup.

1 — ok	Tuner	11 — --	Dolby IC for C/R	21 — ok	P SBLED
2 — ok	VIF	12 — ok	P S MODE	22 — ok	P OFF
3 — ok	EEPROM	13 — ok	P TA0	23 — ok	P DEFL
4 — --	Sound AV switch1	14 — ok	P TA1	24 — ok	P RAM
5 — ok	Video AV switch1	15 — ok	P TA2		
6 — ok	VDP	16 — ok	P TA3		
7 — ok	TPU	17 — ok	P SDA		
8 — ok	MSP	18 — ok	P SCL1		
9 — --	Dolby Sub	19 — ok	P SCL 3		
10 — --	Dolby IC for L/R	20 — ok	P SCL4		
				Hex codes	
				0A CE 34 94 95	

If the CCU ports have been checked and found to be incorrect then "--" will appear in place of "OK".

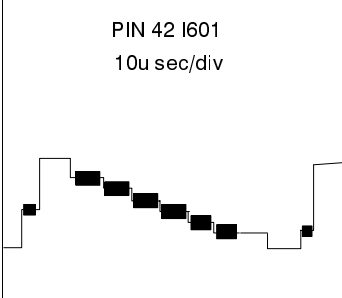
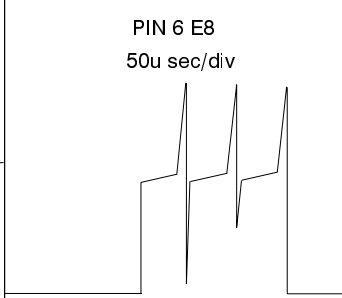
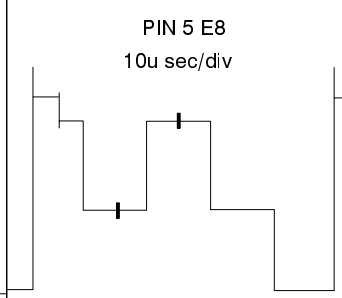
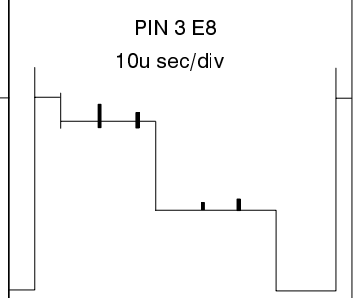
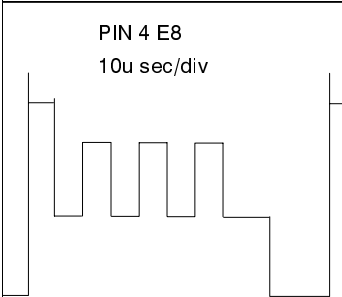
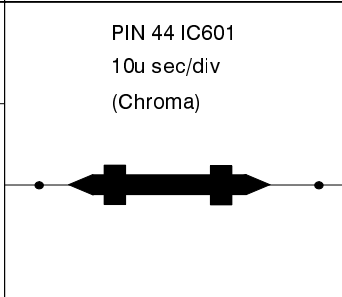
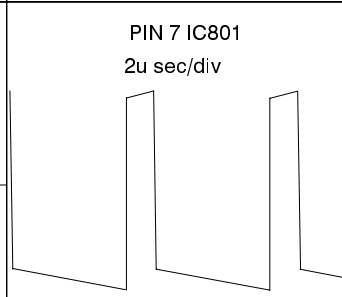
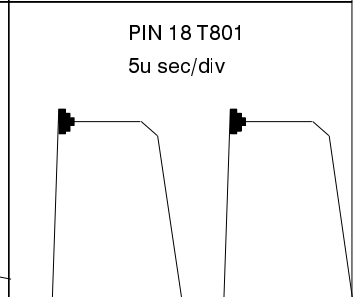
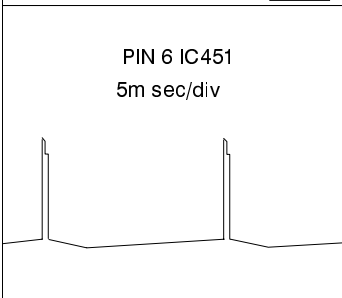
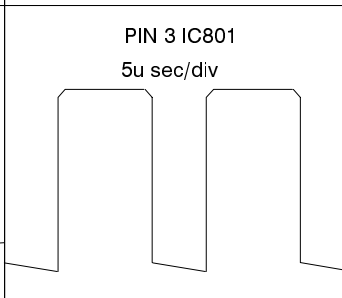
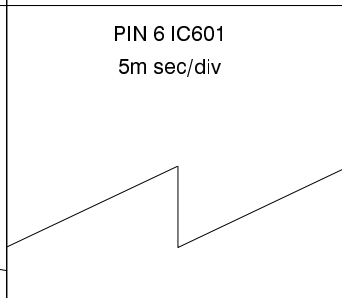
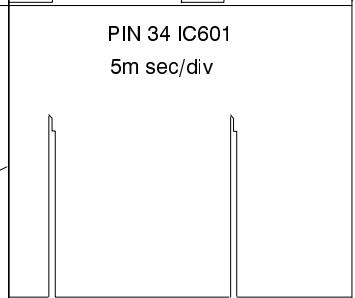
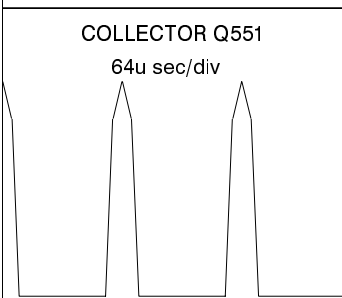
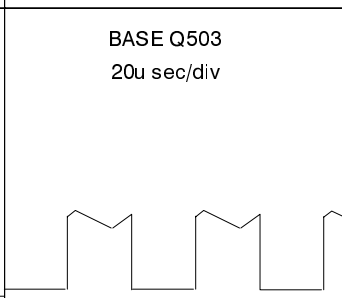
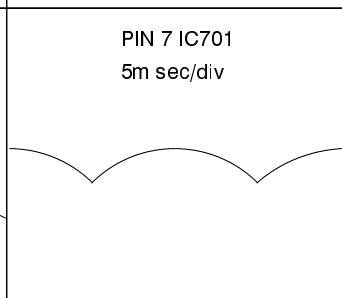
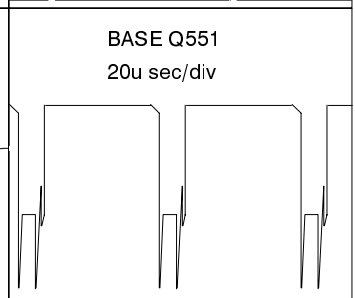
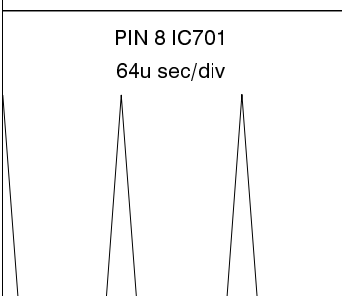
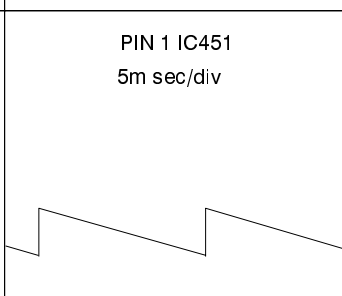
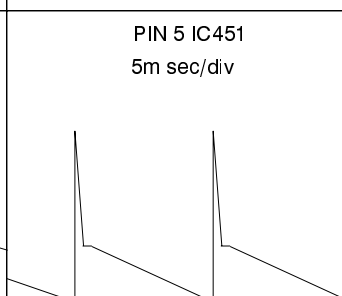
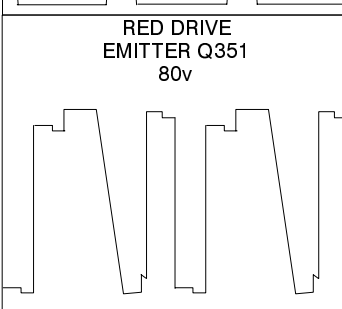
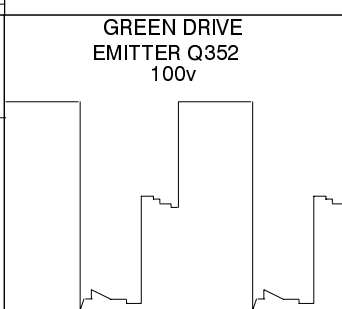
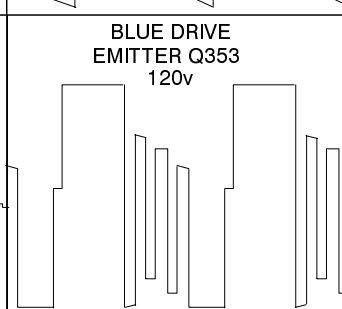


## ALIGNMENT SETTINGS


(The figures used below are nominal and used for representative purposes only)

Alignment Function		Settings / Special features
1. Vertical amplitude	V-AMP 051	Optimum setting
2. Vertical symmetry	V-SYM 013	
3. Vertical linearity	V-LIN 012	
4. Vert. D.C.	Vert. D.C. 000	No adjustment
5. V-Pos.	V. Pos. 003	Optimum setting
6. Horizontal amplitude	H-AMP -033	Optimum setting
7. Horizontal position	H-POS 049	
8. Text Position	TEXT POSITION 045	Optimum setting
9. EW-amplitude	E-W-AMP 1 -058	Optimum setting
10. EW-amplitude	E-W-AMP 2 023	Optimum setting
11. Trapezium-comp	TRAPEZ-1 -014	Optimum setting
12. Trapezium- comp	TRAPEZ-2 012	Optimum setting
13. Colour VCO	Colour VCO 015	Optimum setting
14. Cut-off DC	Cut-off DC 050	No adjustment
15. Ug2 Test	Ug 2 Test 107 021 023	Select Cutoff DC in ServiceMode and confirm the value is 128. Select Ug 2 Test noting colour with largest value, adjust on FBT until a colour reaches 20 ~ 30. Connect an oscilloscope to the cathode of the biggest value colour, select Cutoff DC mode and adjust get Cutoff pulse voltage to 159±5V. Disconnect the oscilloscope and adjust the screen to whichever colour reaches 70±30 first.
16. Cutoff	Cutoff 045 055 050	Press the GREEN button to step through the settings. Adjust for optimum.
17. White	White 224 255 237	Press the GREEN button to step through the settings. Adjust for optimum.


## WAVEFORM PATTERN TABLE

<p>PIN 42 I601 10u sec/div</p> 	<p>PIN 6 E8 50u sec/div</p> 	<p>PIN 5 E8 10u sec/div</p> 	<p>PIN 3 E8 10u sec/div</p> 
<p>PIN 4 E8 10u sec/div</p> 	<p>PIN 44 IC601 10u sec/div (Chroma)</p> 	<p>PIN 7 IC801 2u sec/div</p> 	<p>PIN 18 T801 5u sec/div</p> 
<p>PIN 6 IC451 5m sec/div</p> 	<p>PIN 3 IC801 5u sec/div</p> 	<p>PIN 6 IC601 5m sec/div</p> 	<p>PIN 34 IC601 5m sec/div</p> 
<p>COLLECTOR Q551 64u sec/div</p> 	<p>BASE Q503 20u sec/div</p> 	<p>PIN 7 IC701 5m sec/div</p> 	<p>BASE Q551 20u sec/div</p> 
<p>PIN 8 IC701 64u sec/div</p> 	<p>PIN 1 IC451 5m sec/div</p> 	<p>PIN 5 IC451 5m sec/div</p> 	
<p>RED DRIVE EMITTER Q351 80v</p> 	<p>GREEN DRIVE EMITTER Q352 100v</p> 	<p>BLUE DRIVE EMITTER Q353 120v</p> 	


# VIDEO BLOCK DIAGRAM

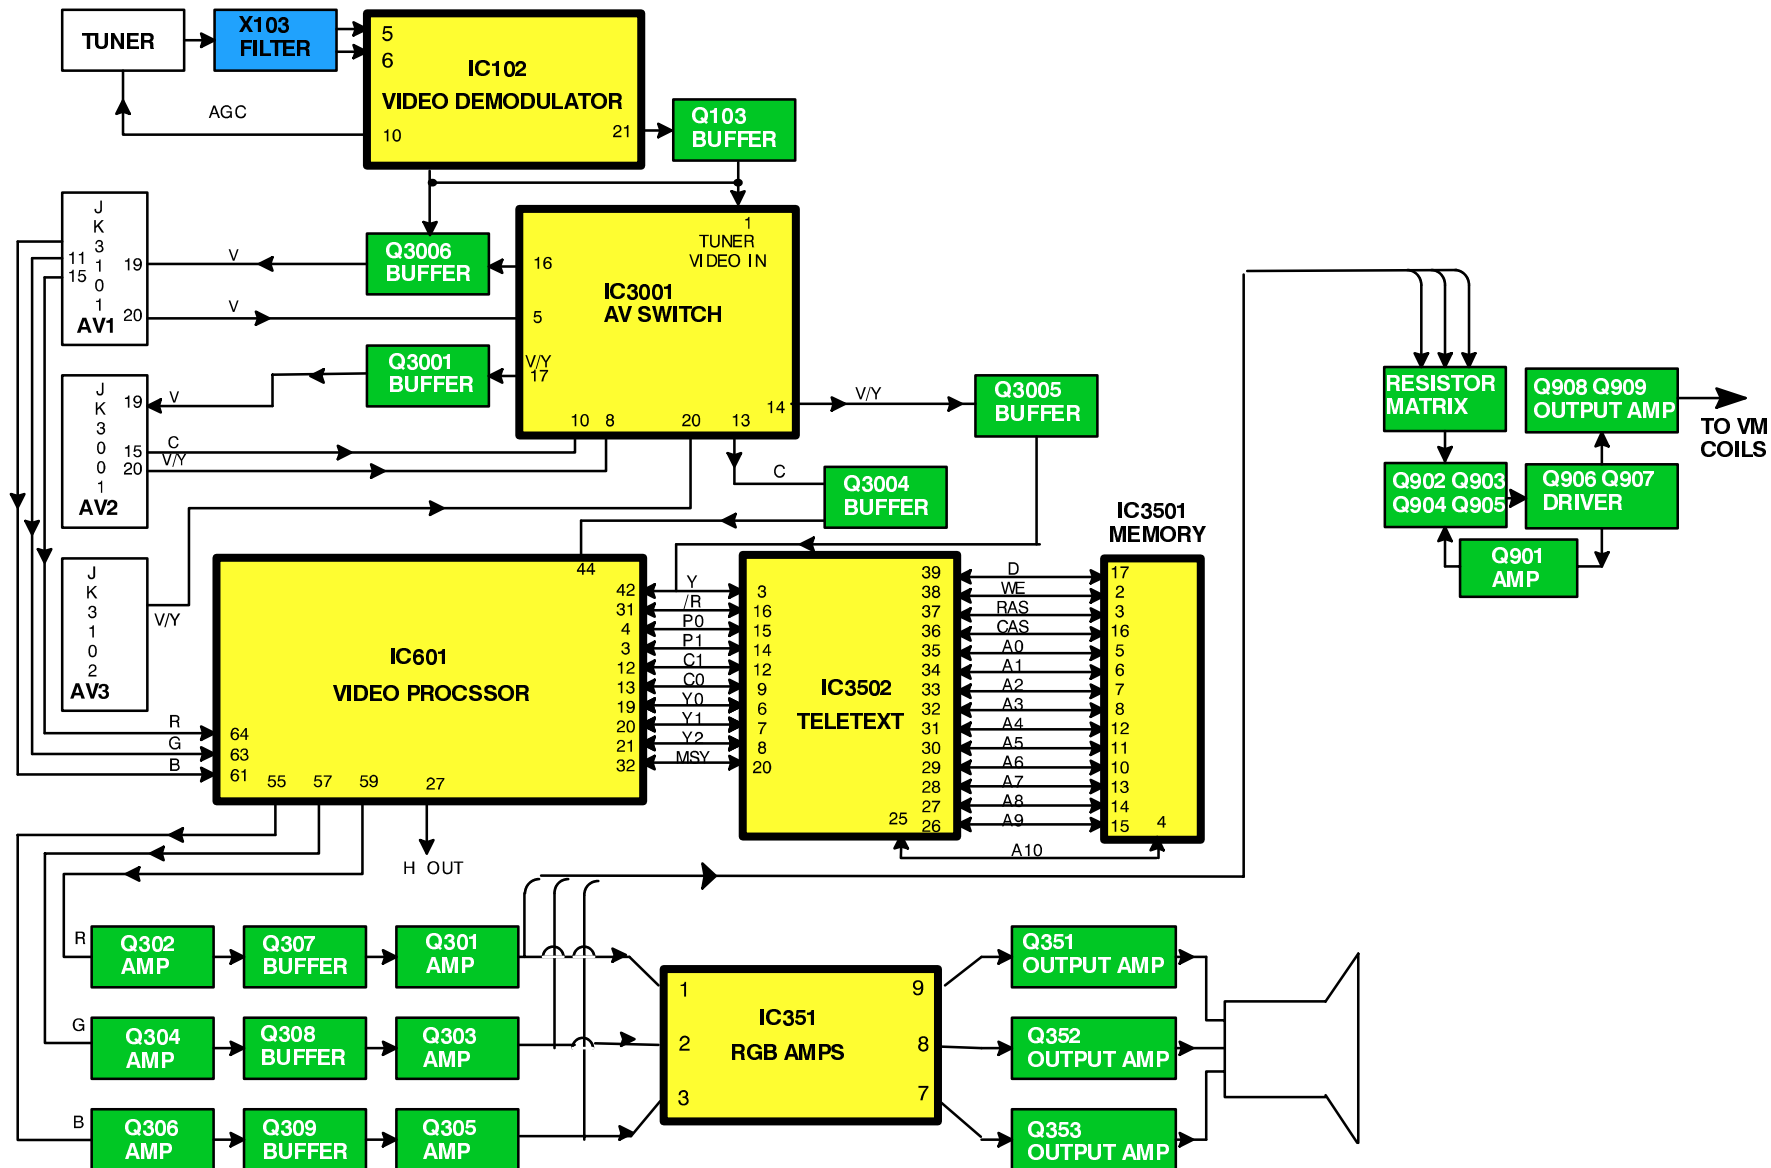

# AUDIO BLOCK DIAGRAM

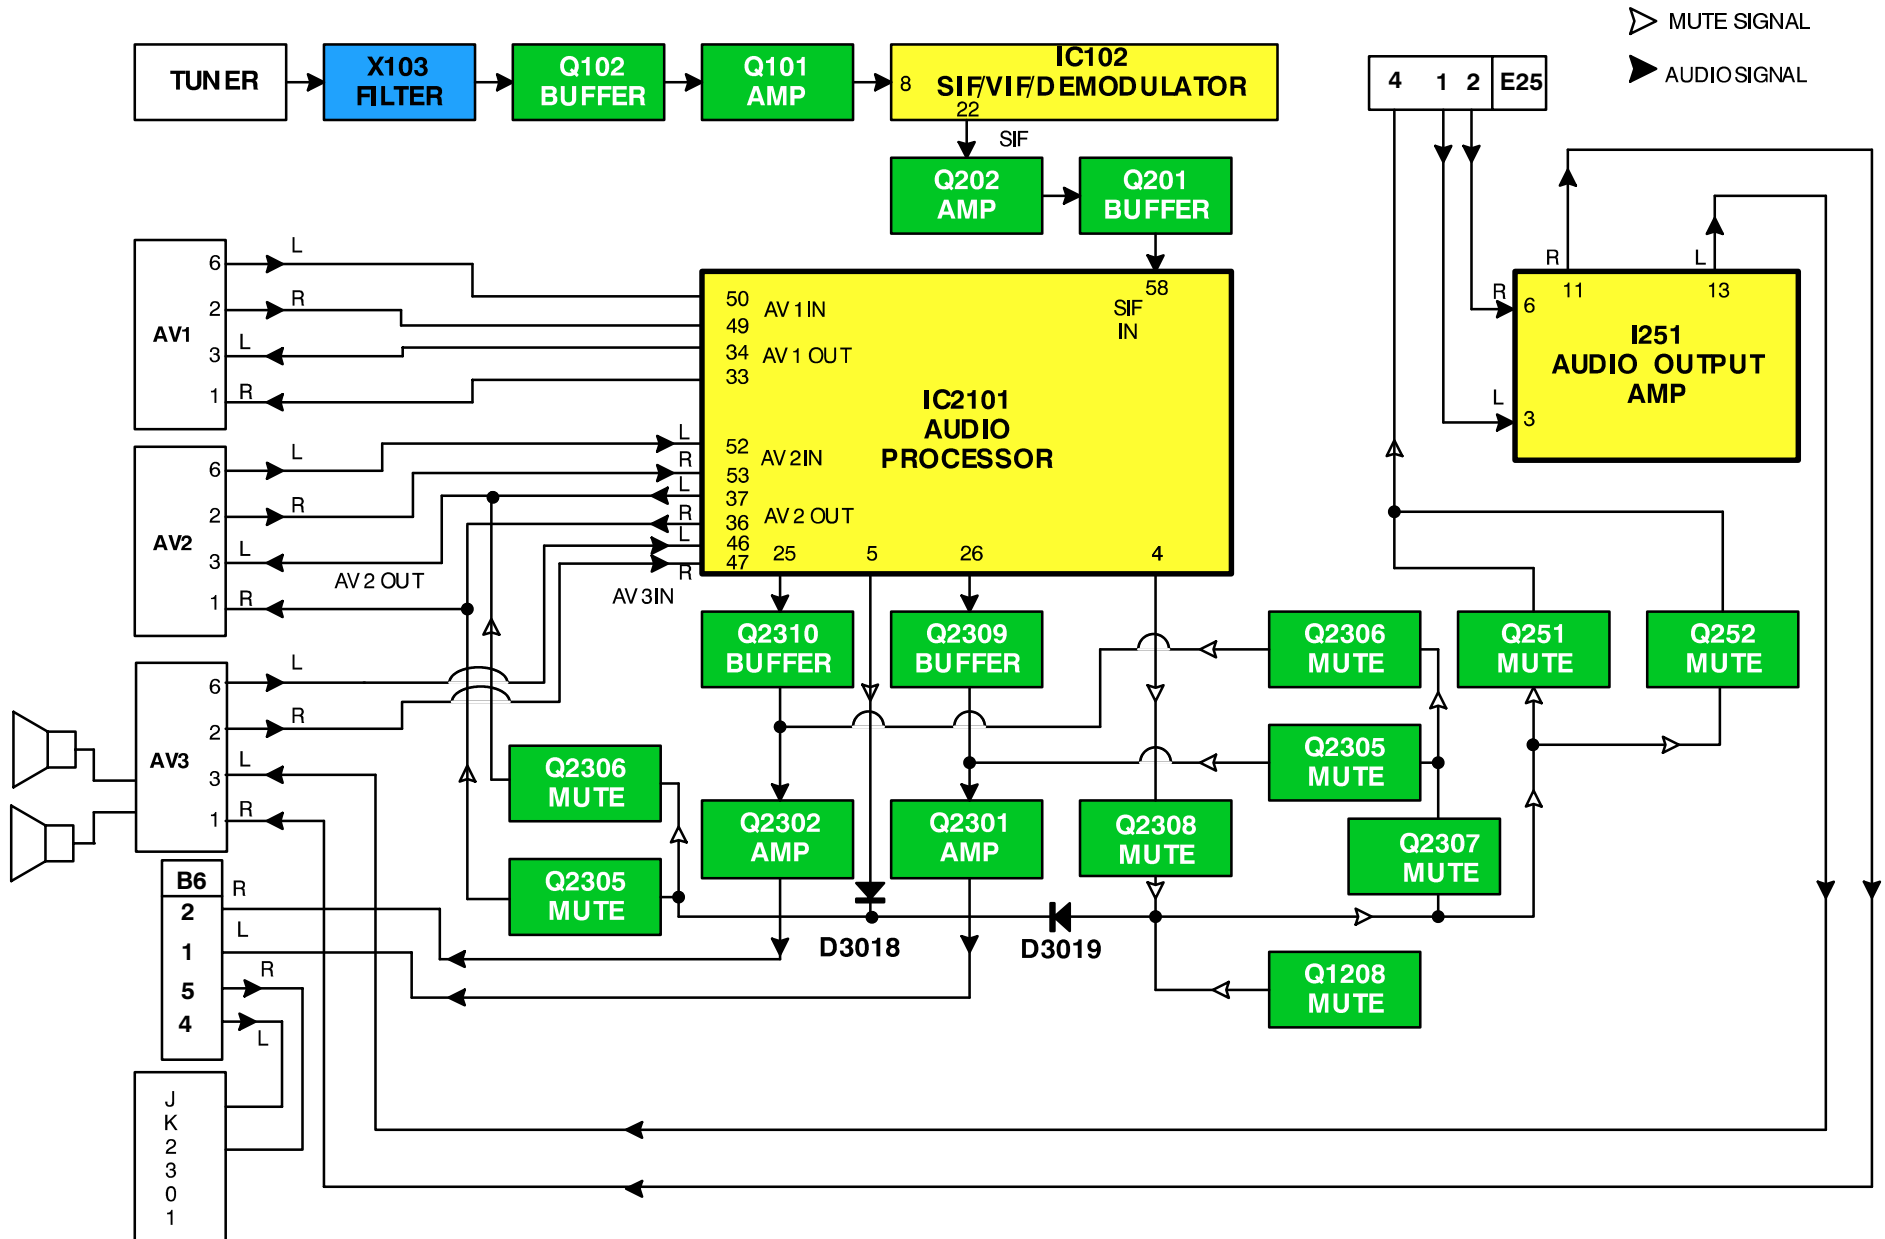


## POWER SUPPLY AND CONTROL BLOCK DIAGRAM

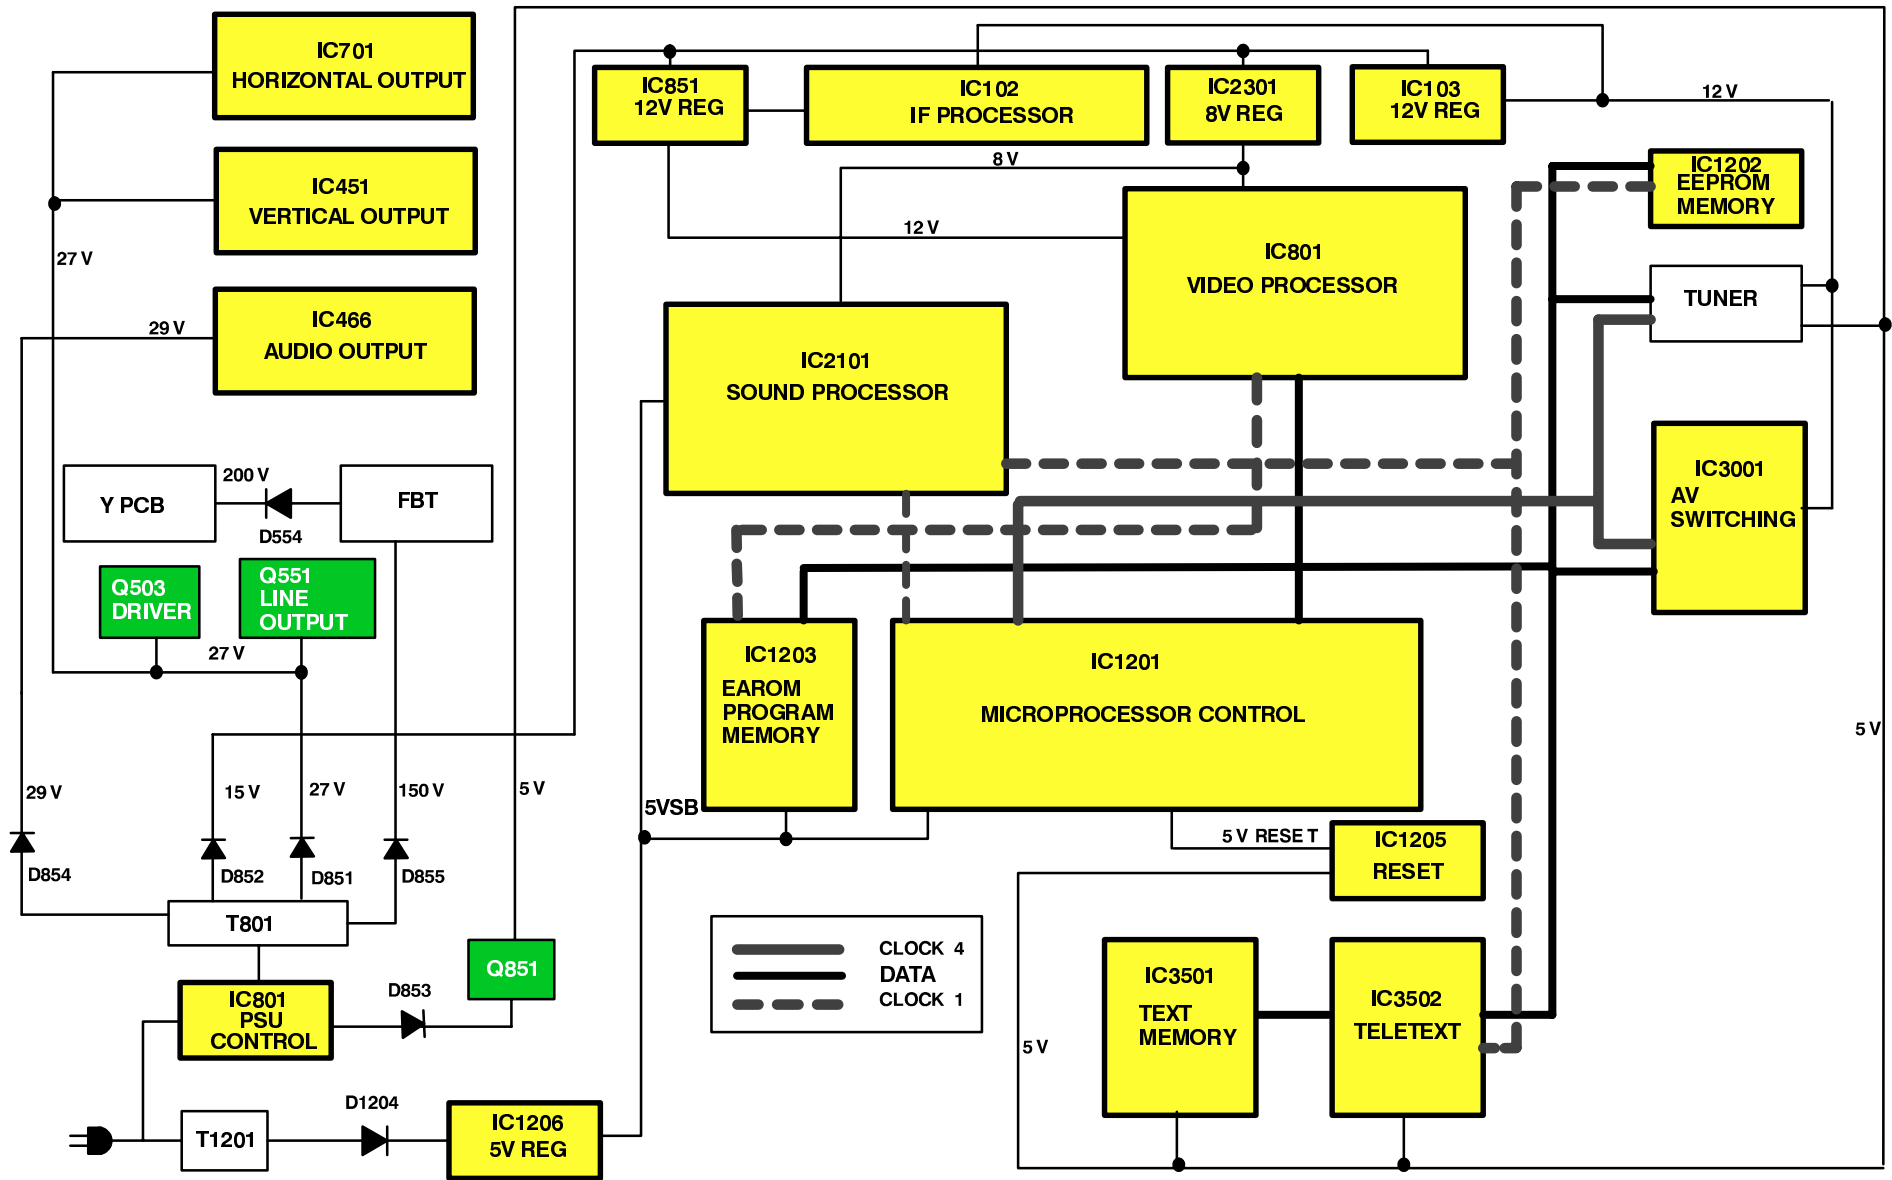

## PARTS LOCATION

**NOTE :**

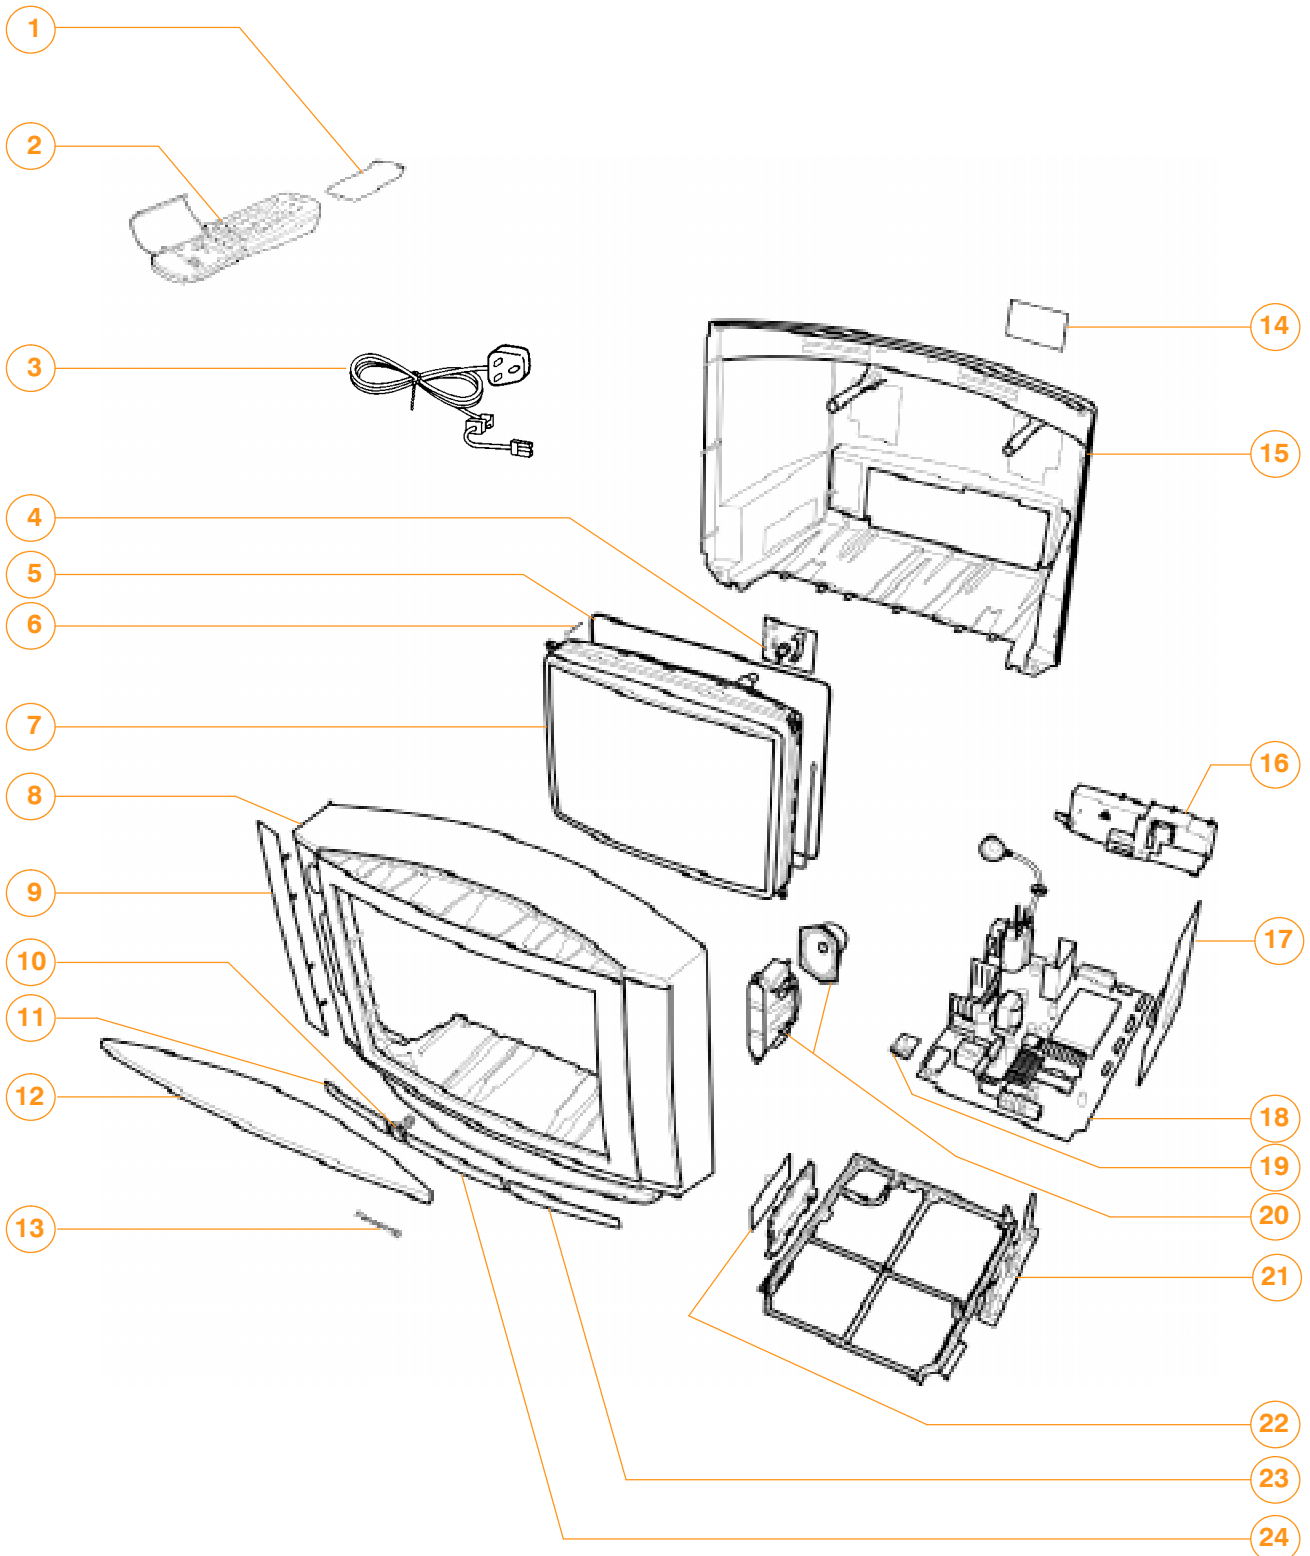The numbers on the exploded view below refer to the miscellaneous section of the Replacement Parts List.





## REPLACEMENT PARTS LIST

### Important Safety Notice

Components identified by ▲ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

Ref No.	Part No.	Description
<b>MISCELLANEOUS COMPONENTS</b>		
1)	UR51EC780	BATTERY COVER (REMOTE)
2)	EUR51920	REMOTE CONTROL
3)	TSX8E0018	POWER CORD <span style="color: red;">▲</span>
4)	TNP117070AS	Y P.C.B. <span style="color: red;">▲</span>
5)	TLK8E05125	DEGAUSS COIL <span style="color: red;">▲</span>
6)	VP17005-32	CRT FIXING SCREW
7)	A66ECF50X32	CRT <span style="color: red;">▲</span>
8)	TKY8E160	CABINET <span style="color: red;">▲</span>
9)	TKP8E1169	SPEAKER NET
10)	TBX8E045	POWER BUTTON (DARK WALNUT)
11)	TKP8E1184	LEFT PANEL (DARK WALNUT)
12)	TKP8E1182	TOP PANEL (DARK WALNUT)
13)	TBM8E1728	PANASONIC BADGE
14)	TBM8E1667	MODEL LABEL
15)	TKU8E00320	BACK COVER <span style="color: red;">▲</span>
16)	TKP8E1165	AV COVER <span style="color: red;">▲</span>
17)	TNP8EB007AA	B P.C.B. <span style="color: red;">▲</span>
18)	TNP8EE008AG	E P.C.B. <span style="color: red;">▲</span>
19)	TNP8EN014AA	N P.C.B. <span style="color: red;">▲</span>
20)	EAG1216A2	SPEAKER
21)	TMX8E010	CHASSIS BRACKET
22)	TNP8EP013AB	P .P.C.B. <span style="color: red;">▲</span>
23)	TKP8E1186	RIGHT PANEL (DARK WALNUT)
24)	TKP8E1180	DOOR LID (DARK WALNUT)
	TBM8E1615	PRESET LABEL
	TEK6940	LID CATCHER
	TES8E015	POWER BUTTON SPRING
	TMW8E020	LED HOLDER
	TMW8E020-1	LED HOLDER
	ENG27501G	TUNER
	TPC8E4611	OUTER CARTON
	TPD8E633	TOP CUSHION
	TPD8E634	BOTTOM CUSHION
	TQB8E2306	INST BOOK <span style="color: red;">▲</span>
	VS-XD3/A	VIDEO CABINET
	UM-3DEP-2P	BATTERY
	31221212478	FIX CLIP
	TES4537	SPRING
	F9-4-220	RELAY
	SVM100	COIL
	ERC12GK825	SOLID 0.5W 10% 8M2Ω
<b>INTEGRATED CIRCUITS</b>		
IC103	L78M12MRB	12V REGULATOR
IC104	AN78L09TA	9V REGULATOR
IC251	LA4280-TV	AUDIO OUTPUT
IC351	TDA6103Q-N3	R.G.B.AMPLIFIER
IC451	LA7845N	VERTICAL OUTPUT
IC601	VDP3108APPA1	VIDEO PROCESSOR
IC701	TEA2031A	HORIZONTAL OUTPUT
IC801	TDA4601	POWER SUPPLY
IC851	L78M12MRB	12V REGULATOR
IC1061	RPM-637CBRL	LED RECEIVER
IC1201	CCU30001-07	CENTRAL CONTROL UNIT
IC1202	27C010-002AV	EPROM
IC1203	X24LM0401AE	EAROM
IC1205	MN1280R	RESET
IC2101	MSP3410BPPF7	AUDIO PROCESSOR
IC2301	AN78L08TA	8V REGULATOR
IC3001	TEA6415C	VIDEO SWITCH
IC3501	UD61256DC-08	DYNAMIC RAM
IC3502	TPU3040-20	TEXT PROCESSOR
<b>CAPACITORS</b>		
C124	ECEA1CKA470	ELECT 16V 47μF
C130	ECA1HMR47GB	ELECT 50V 0.47μF
C135	ECUV1H103ZFX	S.M.CAP 50V 10nF

Ref No.	Part No.	Description
C136	ECA1CM100GB	ELECT 16V 10pF
C137	ECA1EM101GB	ELECT 25V 1μF
C138	ECUV1H103ZFX	S.M.CAP 50V 10nF
C139	ECUV1H390JCX	S.M.CAP 50V 39pF
C140	ECUV1H390JCX	S.M.CAP 50V 39pF
C141	ECUV1H103ZFX	S.M.CAP 50V 10nF
C144	ECA1HMR33GB	ELECT 50V 0.33μF
C145	ECUV1H103ZFX	S.M.CAP 50V 10nF
C146	ECUV1H104ZFX	S.M.CAP 50V 100nF
C147	ECUV1H102KBX	S.M.CAP 50V 1nF
C148	ECEA1HKAR22	ELECT 50V 0.22μF
C149	ECA1EM470GB	ELECT 25V 47pF
C150	ECUV1H103ZFX	S.M.CAP 50V 10nF
C151	ECUV1H104ZFX	S.M.CAP 50V 100nF
C154	ECA1CM221GB	ELECT 16V 220pF
C170	ECUV1H331KBX	S.M.CAP 50V 330pF
C201	ECUV1H070DCX	S.M.CAP 50V 7pF
C202	ECUV1H070DCX	S.M.CAP 50V 7pF
C203	ECUV1H470JX	S.M.CAP 50V 47pF
C204	ECUV1H560JCX	S.M.CAP 50V 56pF
C205	ECUV1H100DCX	S.M.CAP 50V 10pF
C207	ECUV1H220JCX	S.M.CAP 50V 22pF
C209	ECUV1H103ZFX	S.M.CAP 50V 10nF
C210	ECUV1H103ZFX	S.M.CAP 50V 10nF
C211	ECUV1H103ZFX	S.M.CAP 50V 10nF
C251	ECA1EM330B	ELECT 25V 33pF
C252	ECUV1H223KBX	S.M.CAP 50V 22nF
C253	ECA1HM4R7GB	ELECT 50V 4.7μF
C254	222236516474	FILM 160V 470nF
C255	ECEA1EGE101	ELECT 25V 100μF
C256	ECUV1H223KBX	S.M.CAP 50V 22nF
C257	ECA1HM4R7GB	ELECT 50V 4.7μF
C258	ECA1EM330B	ELECT 25V 33pF
C259	222236516474	FILM 160V 470nF
C260	ECA1VM102GE	ELECT 35V 1nF
C261	ECA1VM102GE	ELECT 35V 1nF
C262	222236516274	FILM 160V 270nF
C263	ECA1HM010GB	ELECT 50V 1pF
C264	ECEA1HGE222	ELECT 50V 2200μF
C265	222236516274	FILM 160V 270nF
C266	ECA1HM010GB	ELECT 50V 1pF
C267	ECUV1H104KBX	S.M.CAP 50V 100nF
C268	ECUV1H104KBX	S.M.CAP 50V 100nF
C271	ECUV1H561KBX	S.M.CAP 50V 560pF
C301	ECA1CM470GB	ELECT 16V 47μF
C302	ECUV1H104ZFX	S.M.CAP 50V 100nF
C303	ECUV1H104ZFX	S.M.CAP 50V 100nF
C310	ECUV1H104ZFX	S.M.CAP 50V 100nF
C351	ECUV1H270JCX	S.M.CAP 50V 27pF
C352	ECUV1H100CCX	S.M.CAP 50V 10pF
C353	ECUV1H180JCX	S.M.CAP 50V 18pF
C354	ECQM2104KZ	FILM 250V 100nF
C355	ECUV1H222JCX	S.M.CAP 50V 2.2nF
C356	ECUV1H222JCX	S.M.CAP 50V 2.2nF
C357	ECUV1H222JCX	S.M.CAP 50V 2.2nF
C358	222236516224	FILM 160V 220nF
C360	ECKC3D152J	CERAMIC 2KV 1.5nF <span style="color: red;">▲</span>
C361	ECA1HMR47GB	ELECT 50V 0.47μF
C364	ECUV1H103ZFX	S.M.CAP 50V 10nF
C366	ECA1CM100GB	ELECT 16V 10pF
C451	ECUV1H102JX	S.M.CAP 50V 1nF
C452	ECUV1H102ZFX	S.M.CAP 50V 1nF
C453	ECUV1H472KBX	S.M.CAP 50V 4.7nF
C454	ECUV1H104ZFX	S.M.CAP 50V 100nF
C455	ECEA1VGE222	ELECT 35V 2200μF
C456	ECEA1HGE221	ELECT 50V 220μF
C457	ECUV1H223KBX	S.M.CAP 50V 22nF
C458	ECQM1H273J	FILM 50V 27nF
C459	222236516224	FILM 160V 220nF
C460	222236516105	FILM 160V 1μF
C462	ECEA1VGE332	ELECT 35V 3300μF

Ref No.	Part No.	Description		
C462	ECEA1VGE332	ELECT	35V 3300µF	
C501	ECA1AM330GB	ELECT	10V 33µF	
C506	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C508	222236516105	FILM	160V 1µF	
C509	ECEA1HGE101	ELECT	50V 100µF	
C510	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C511	ECQM2683JZ	FILM	250V 68nF	
C551	222237544182	CAPACITOR	1.8nF	
C552	ECWH15H102H	FILM	1500V 100pF	
C554	ECWF2H514J	FILM	500V 510nF	△
C555	ECWH12H103J	FILM	1250V 10nF	△
C556	ECQM4333JC	FILM	400V 33nF	
C559	ECWF2H684J	FILM	500V 680nF	△
C560	ECEA2GGE2R2	ELECT	400V 2.2µF	
C562	ECKC2H101J	CERAMIC	500V 100pF	△
C563	ECEA2EU220	ELECT	250V 22µF	
C564	ECEA2AU2R2	ELECT	100V 2.2µF	
C565	ECQP1H273J	FILM	100V 2700µF	
C601	ECUV1H271JCX	S.M.CAP	50V 270pF	
C602	ECUV1H121JCX	S.M.CAP	50V 120pF	
C603	ECUV1H471JCX	S.M.CAP	50V 470pF	
C604	ECA0JM102GB	ELECT	6.3V 1µF	
C605	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C606	ECUV1H040CCX	S.M.CAP	50V 4pF	
C607	ECUV1H040CCX	S.M.CAP	50V 4pF	
C608	ECUV1H683ZFX	S.M.CAP	50V 68nF	
C609	ECA1CM470GB	ELECT	16V 47µF	
C610	ECUV1H683ZFX	S.M.CAP	50V 68nF	
C611	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C612	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C613	ECUV1H102JCX	S.M.CAP	50V 1nF	
C614	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C615	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C616	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C618	ECUV1H473ZFX	S.M.CAP	50V 47nF	
C619	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C620	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C621	ECA1CM100GB	ELECT	16V 10µF	
C622	ECA1CM100GB	ELECT	16V 10µF	
C623	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C624	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C625	ECEA1HNR47	ELECT	50V 0.47µF	
C626	ECA0JM102GB	ELECT	6.3V 1µF	
C627	ECUV1H100DCX	S.M.CAP	50V 10pF	
C628	ECUV1H470JCX	S.M.CAP	50V 47pF	
C629	ECUV1H101JCX	S.M.CAP	50V 100pF	
C630	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C631	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C632	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C633	ECUV1H102JCX	S.M.CAP	50V 1nF	
C636	ECUV1H101JCX	S.M.CAP	50V 100pF	
C637	ECUV1H102KBX	S.M.CAP	50V 1nF	
C638	ECUV1H181JCX	S.M.CAP	50V 180pF	
C639	ECUV1H561KBX	S.M.CAP	50V 560pF	
C701	ECEA1HGE101	ELECT	50V 100µF	
C702	ECUV1H103KBX	S.M.CAP	50V 10nF	
C703	ECEA1HGE100	ELECT	50V 10µF	
C704	ECQB1H223K	FILM	50V 22nF	
C705	ECQB1H102J	FILM	50V 1nF	
C801	ECUV1H101JCX	S.M.CAP	50V 100pF	
C802	ECQE6104K	FILM	600V 100nF	△
C803	ECUV1H560JX	S.M.CAP	50V 56pF	
C804	ECA1HM101GB	ELECT	50V 100µF	
C805	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C806	ECEA1HU101	ELECT	50V 100µF	
C807	ECEA1EGE101	ELECT	25V 100µF	
C808	ECQB1H103J	FILM	50V 10nF	
C809	ECQB1H103J	FILM	50V 10nF	
C811	ECEA1HN010	ELECT	50V 1µF	
C815	ECKC2H472J	CERAMIC	500V 4.7nF	△
C816	ECKC3D222JB	CERAMIC	2KV 2200pF	△
C817	ECQB1H223K	FILM	50V 22nF	
C818	ECKC2H472J	CERAMIC	500V 4.7nF	△
C820	ECOS2GG181NG	ELECT	400V 180µF	△
C821	ECKWNA332MECC	CERAMIC	250V 3.3nF	
C841	222233510224	CAPACITOR	0.22µF	
C851	ECKC2H681J	CERAMIC	500V 680pF	△
C852	ECEA1HU102	ELECT	50V 1000µF	
C853	ECEA1EGE222	ELECT	25V 2200µF	
C854	ECEA1HGE102	ELECT	50V 1000µF	
C855	ECKC3D471JB	CERAMIC	2KV 470pF	△

Ref No.	Part No.	Description		
C856	ECEA1EGE222	ELECT	25V 2200µF	
C857	ECEA2EU101	ELECT	250V 100µF	
C858	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C859	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C860	ECA1CM471GB	ELECT	16V 470µF	
C861	ECOS2EA221AB	ELECT	250V 220µF	
C862	ECA1CM471GB	ELECT	16V 470µF	
C901	ECUV1H030CCX	S.M.CAP	50V 30pF	
C902	ECA1VM101GB	ELECT	35V 100µF	
C903	ECA1CM470GB	ELECT	16V 47µF	
C904	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C905	ECA1HM4R7GB	ELECT	50V 4.7µF	
C906	ECUV1H471KBX	S.M.CAP	50V 470pF	
C907	ECUV1H271JCX	S.M.CAP	50V 270pF	
C908	ECUV1H151JCX	S.M.CAP	50V 150pF	
C909	ECKC2H472J	CERAMIC	500V 4.7nF	△
C910	ECKC2H472J	CERAMIC	500V 4.7nF	△
C911	ECUV1H151JCX	S.M.CAP	50V 150pF	
C912	ECEA2CU100	ELECT	160V 10µF	
C913	ECA1HM101GB	ELECT	50V 100µF	
C914	ECA1HM101GB	ELECT	50V 100µF	
C915	ECA1CM471GB	ELECT	16V 470µF	
C916	ECEA2CU100	ELECT	160V 10µF	
C1061	ECA0JM101G	ELECT	6.3V 100µF	
C1062	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C1201	ECUV1H332KBX	S.M.CAP	50V 3.3nF	
C1202	ECUV1H332KBX	S.M.CAP	50V 3.3nF	
C1203	ECUV1H332KBX	S.M.CAP	50V 3.3nF	
C1204	ECUV1H332KBX	S.M.CAP	50V 3.3nF	
C1205	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C1206	ECA1HM4R7GB	ELECT	50V 4.7µF	
C1207	ECUV1H472KBX	S.M.CAP	50V 4.7nF	
C1208	ECUV1H390JCX	S.M.CAP	50V 39pF	
C1209	ECUV1H390JCX	S.M.CAP	50V 39pF	
C1210	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C1211	ECUV1H470JCX	S.M.CAP	50V 47pF	
C1212	ECA1CM470GB	ELECT	16V 47µF	
C1213	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C1214	ECA1CM470GB	ELECT	16V 47µF	
C1215	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C1217	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C1219	ECA1CM471GB	ELECT	16V 470µF	
C1220	ECUV1H103ZFX	S.M.CAP	50V 10nF	
C1221	ECA0JM102GB	ELECT	6.3V 1µF	
C1222	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C1223	ECA1HM101GB	ELECT	50V 100µF	
C1224	ECA0JM222GB	ELECT	6.3V 2.2µF	
C1225	ECA0JM472GE	ELECT	6.3V 4.7µF	
C1226	ECA1HM101GB	ELECT	50V 100µF	
C1227	ECA1VM221B	ELECT	35V 220µF	
C1228	ECA1EM101GB	ELECT	25V 1µF	
C2101	ECUV1H223KBX	S.M.CAP	50V 22nF	
C2102	ECUV1H391KBX	S.M.CAP	50V 390pF	
C2103	ECUV1H102KBX	S.M.CAP	50V 1nF	
C2104	ECUV1H102KBX	S.M.CAP	50V 1nF	
C2107	ECUV1H391KBX	S.M.CAP	50V 390pF	
C2108	ECA1HM101GB	ELECT	50V 100µF	
C2109	ECUV1H223KBX	S.M.CAP	50V 22nF	
C2110	ECA1CM100GB	ELECT	16V 10µF	
C2111	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2112	ECA1CM100GB	ELECT	16V 10µF	
C2113	ECUV1H102KBX	S.M.CAP	50V 1nF	
C2114	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2115	ECUV1H471KBX	S.M.CAP	50V 470pF	
C2116	ECA1HM3R3GB	ELECT	50V 3.3µF	
C2117	ECUV1H471KBX	S.M.CAP	50V 470pF	
C2118	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2119	ECA1CM100GB	ELECT	16V 10µF	
C2120	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2121	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2122	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2123	ECA1CM100GB	ELECT	16V 10µF	
C2125	ECUV1H010CCX	S.M.CAP	50V 1pF	
C2126	ECUV1H010CCX	S.M.CAP	50V 1pF	
C2307	ECA1CM470GB	ELECT	16V 47µF	
C2308	ECA1CM470GB	ELECT	16V 47µF	
C2310	ECA1CM470GB	ELECT	16V 47µF	
C2312	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2313	ECUV1H103KBX	S.M.CAP	50V 10nF	
C2314	ECUV1H104ZFX	S.M.CAP	50V 100nF	
C2315	ECUV1H103KBX	S.M.CAP	50V 10nF	

Ref No.	Part No.	Description
C2316	ECUV1H103ZFX S.M.CAP	50V 10nF
C2317	ECA1CM470GB ELECT	16V 47µF
C2318	ECUV1H222KBX S.M.CAP	50V 2.2nF
C2319	ECUV1H222KBX S.M.CAP	50V 2.2nF
C2651	ECUV1H103KBX S.M.CAP	50V 10nF
C2652	ECUV1H103KBX S.M.CAP	50V 10nF
C3001	ECA1HMR47GB ELECT	50V 0.47µF
C3002	ECA1HMR47GB ELECT	50V 0.47µF
C3003	ECA1EM4R7GB ELECT	25V 4.7µF
C3004	ECA1HM4R7GB ELECT	50V 4.7µF
C3005	ECA1HM4R7GB ELECT	50V 4.7µF
C3006	ECUV1H473ZFX S.M.CAP	50V 47nF
C3007	ECA1HM470GB ELECT	50V 47µF
C3011	ECUV1H473ZFX S.M.CAP	50V 47nF
C3012	ECA1CM470GB ELECT	16V 47µF
C3013	ECUV1H104ZFX S.M.CAP	50V 100nF
C3014	ECUV1H104ZFX S.M.CAP	50V 100nF
C3017	ECEA1CN470 ELECT	16V 47µF
C3018	ECUV1H102KBX S.M.CAP	50V 1nF
C3019	ECUV1H102KBX S.M.CAP	50V 1nF
C3021	ECUV1H102KBX S.M.CAP	50V 1nF
C3023	ECA1CM470GB ELECT	16V 47µF
C3024	ECUV1H473ZFX S.M.CAP	50V 47nF
C3025	ECUV1H102KBX S.M.CAP	50V 1nF
C3026	ECA1CM470GB ELECT	16V 47µF
C3027	ECA1CM470GB ELECT	16V 47µF
C3028	ECUV1H221JX S.M.CAP	50V 220pF
C3029	ECUV1H221JX S.M.CAP	50V 220pF
C3030	ECUV1H221JX S.M.CAP	50V 220pF
C3031	ECUV1H221JX S.M.CAP	50V 220pF
C3032	ECA1HMR47GB ELECT	50V 0.47µF
C3033	ECA1HMR47GB ELECT	50V 0.47µF
C3034	ECUV1H221JX S.M.CAP	50V 220pF
C3035	ECUV1H221JX S.M.CAP	50V 220pF
C3036	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3037	ECUV1H561JCX S.M.CAP	50V 560pF
C3038	ECA1CM470GB ELECT	16V 47µF
C3039	ECA1CM470GB ELECT	16V 47µF
C3040	ECA1HMR47GB ELECT	50V 0.47µF
C3041	ECA1HMR47GB ELECT	50V 0.47µF
C3043	ECA1HM4R7GB ELECT	50V 4.7µF
C3045	ECUV1H104ZFX S.M.CAP	50V 100nF
C3049	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3050	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3051	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3052	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3053	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3054	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3055	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3056	ECUV1H101JCX S.M.CAP	50V 100pF
C3062	ECUV1H104ZFX S.M.CAP	50V 100nF
C3071	ECUV1H104ZFX S.M.CAP	50V 100nF
C3073	ECUV1H222KBX S.M.CAP	50V 2.2nF
C3151	ECUV1H561JCX S.M.CAP	50V 560pF
C3152	ECUV1H561JCX S.M.CAP	50V 560pF
C3501	ECUV1H104ZFX S.M.CAP	50V 100nF
C3502	ECA1HM101GB ELECT	50V 100µF
C3503	ECUV1H103ZFX S.M.CAP	50V 10nF
C3504	ECUV1H102JCX S.M.CAP	50V 1nF
C3505	ECUV1H104ZFX S.M.CAP	50V 100nF
C3506	ECA1CM470GB ELECT	16V 47µF
C3507	ECA1CM470GB ELECT	16V 47µF
C3508	ECUV1H473ZFX S.M.CAP	50V 47nF
C3509	ECUV1H103ZFX S.M.CAP	50V 10nF
C3510	ECA0JM102GB ELECT	6.3V 1µF
C3511	ECUV1H103ZFX S.M.CAP	50V 10nF

## DIODES

D251	MA2180TP	DIODE
D253	RB721Q40T77	DIODE
D254	RB721Q40T77	DIODE
D310	MA165TA5	DIODE 1SS133T-77
D311	MA29TA5	DIODE
D312	MA29TA5	DIODE
D357	MA165TA5	DIODE 1SS133T-77
D358	MA165TA5	DIODE 1SS133T-77
D359	MA165TA5	DIODE 1SS133T-77
D360	MA4150	DIODE
D451	MA165TA5	DIODE 1SS133T-77
D452	MA165TA5	DIODE 1SS133T-77

Ref No.	Part No.	Description
D454	ERA15-02V3	DIODE
D456	MA2160BLFS	DIODE
D470	MA4020	DIODE
D501	MA165TA5	DIODE 1SS133T-77
D502	EU02	DIODE
D504	MA165TA5	DIODE 1SS133T-77
D551	ERD07-15L7	DIODE
D552	TVSRU2AM	DIODE
D554	AU02V0	DIODE
D556	MA165TA5	DIODE 1SS133T-77
D601	MA165TA5	DIODE 1SS133T-77
D602	MA165TA5	DIODE 1SS133T-77
D604	MA165TA5	DIODE 1SS133T-77
D605	MA165TA5	DIODE 1SS133T-77
D606	MA165TA5	DIODE 1SS133T-77
D609	MA165TA5	DIODE 1SS133T-77
D701	MA165TA5	DIODE 1SS133T-77
D702	MTZJT-775.6C	DIODE
D707	MTZJT-775.6C	DIODE
D804	ERA15-02V3	DIODE
D805	EU02	DIODE
D806	RBV4-08	DIODE
D807	EU02	DIODE
D809	MA165TA5	DIODE 1SS133T-77
D814	MA165TA5	DIODE 1SS133T-77
D851	EU02	DIODE
D852	ERD32-02L7	DIODE
D853	FML22SLF610	DIODE
D854	RU4AMLF-M1	DIODE
D855	RU4BLF-L1	DIODE
D856	MTZJT-774.7A	DIODE
D857	MTZJ33B	DIODE
D858	MA29TA5	DIODE
D901	MA165TA5	DIODE 1SS133T-77
D902	MA165TA5	DIODE 1SS133T-77
D904	MA165TA5	DIODE 1SS133T-77
D906	RLS72TE-11	DIODE OR PMLL4148
D1203	MA170	DIODE
D1204	SLR56UR3FLF	LED
D1205	MA165TA5	DIODE 1SS133T-77
D1206	MTZJT-778.2C	DIODE
D1207	MA165TA5	DIODE 1SS133T-77
D1208	MA165TA5	DIODE 1SS133T-77
D1209	MA165TA5	DIODE 1SS133T-77
D1210	MA165TA5	DIODE 1SS133T-77
D1211	MTZJT-775.1C	DIODE
D1212	MA170	DIODE
D1213	MA165TA5	DIODE 1SS133T-77
D1214	MA170	DIODE
D1216	MTZJT-778.2C	DIODE
D2303	MA165TA5	DIODE 1SS133T-77
D2304	MTZJT-779.1C	DIODE
D3001	MTZJT-7712C	DIODE
D3003	MTZJT-778.2C	DIODE
D3004	MA4100	DIODE
D3005	MTZJT-7712C	DIODE
D3006	MTZJT-7712C	DIODE
D3007	MTZJT-7712C	DIODE
D3008	MTZJT-778.2C	DIODE
D3009	MTZJT-778.2C	DIODE
D3010	MTZJT-778.2C	DIODE
D3011	MTZJT-778.2C	DIODE
D3012	MTZJT-7712C	DIODE
D3013	MTZJT-7712C	DIODE
D3014	MTZJT-7712C	DIODE
D3015	MTZJT-7712C	DIODE
D3016	MTZJT-7712C	DIODE
D3018	MA165TA5	DIODE 1SS133T-77
D3019	MA165TA5	DIODE 1SS133T-77
D3501	MA165TA5	DIODE 1SS133T-77

## FUSES

F840	2153.15H	FUSE	▲
F851	TR5-T1250	FUSE	▲
F852	TR5-T2000	FUSE	▲
F853	TR5-T2000	FUSE	▲
F8401	EYF52BC	FUSE HOLDER	
F8402	EYF52BC	FUSE HOLDER	

Ref No.	Part No.	Description
<b>SOCKETS</b>		
H1202	832AG11D—ESL	I.C.SOCKET
<b>TERMINALS AND LINKS</b>		
JA.1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.1	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.11	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.12	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.14	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.15	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.16	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.17	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.2	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.22	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.24	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.25	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.29	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.3	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.4	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.5	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.6	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.7	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA.8	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA.9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA33	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA34	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JA35	ERJ8GEY0R00	S.M.CARB .125W 5% 0Ω
JA36	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB11	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB14	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB15	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB16	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB17	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB23	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB24	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB25	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB29	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB32	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB34	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB35	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB36	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB37	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB38	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB39	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB40	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB41	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB42	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB43	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB44	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB45	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB46	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB47	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω

Ref No.	Part No.	Description
JB48	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB49	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB50	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB51	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB52	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB53	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB54	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB55	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB56	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB57	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB58	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB59	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB61	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB62	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB63	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB64	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB65	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB66	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB67	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB68	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB69	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB70	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB71	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB72	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB73	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB74	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB75	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB77	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB79	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB8	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB80	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB81	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JB9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JK2301	TJB18644	AV TERMINAL
JK3001	TJS8E007	21PIN TERMINAL
JK3101	TJS8E007	21PIN TERMINAL
JK3102	TJB16673	AV TERMINAL
JSB1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSB12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSB13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSB14	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSB2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSB4	EXCELSA35T	COIL
JSE011	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE012	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE013	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE014	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE015	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE016	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE031	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE032	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE036	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
JSE038	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
J104	EXCELSA35T	COIL
J106	EXCELSA35T	COIL
J107	EXCELSA35T	COIL
J169	EXCELSA35T	COIL
<b>COILS</b>		
L001	TLT100K991R	COIL
L111	TLT101K991R	COIL
L112	EXCELSA35T	COIL
L113	EXCELSA35T	COIL
L114	TLT100K991R	COIL
L130	ELESN8R2KA	COIL
L132	ELESN8R2KA	COIL
L202	TLT068K991R	COIL
L251	EXCELSA35T	COIL
L301	TLT047K991R	COIL
L302	EXCEMT101BT	COIL
L303	EXCEMT101BT	COIL
L304	EXCEMT101BT	COIL
L352	SDL—4101	COIL
L353	SDL—4101	COIL
L354	SDL—4101	COIL
L552	ELH5L437	COIL
L553	ELC08D055	COIL
L554	297—23293	COIL

Ref No.	Part No.	Description
L601	TLT047K991R	COIL
L602	EXCELDR35V	COIL
L603	TLT047K991R	COIL
L604	EXCELDR35V	COIL
L606	TLT015K991R	COIL
L607	EXCELSA35T	COIL
L701	ELC10D006	COIL
L801	EXCELSA24T	COIL
L802	TLT022K991R	COIL
L804	ELESN4R7KA	COIL
L805	298-82858002	COIL
L841	ELF18D490F	COIL
L851	EXCELDR35V	COIL
L852	EXCELSA35T	COIL
L853	ELEIE470KA	COIL
L854	ELEIN470KA	COIL
L855	ELEIN470KA	COIL
L856	ELEIN470KA	COIL
L901	EXCELSA24T	COIL
L902	EXCELSA24T	COIL
L1201	TLT047K991R	COIL
L1202	TLT047K991R	COIL
L1203	TLT047K991R	COIL
L1204	EXCELDR35V	COIL
L2101	TLT100K991R	COIL
L2102	TLT039K991R	COIL
L2103	EXCELSA35T	COIL
L2104	EXCELSA35T	COIL
L3151	EXCEMT101BT	COIL
L3152	EXCEMT101BT	COIL
L3153	EXCEMT101BT	COIL
L3154	EXCEMT101BT	COIL
L3155	ELEBT6R8KA	COIL
L3156	ELEBT6R8KA	COIL
L3158	EXCELSA39V	COIL
L3501	EXCELDR35V	COIL
L3502	EXCELDR35V	COIL
L3503	ELESN4R7KA	COIL
L3504	EXCELSA35T	COIL
<b>TRANSISTORS</b>		
Q201	BC847B	TRANSISTOR OR 2SD601ATX
Q202	BC847B	TRANSISTOR OR 2SD601ATX
Q251	2SD1328STX	TRANSISTOR
Q252	2SD1328STX	TRANSISTOR
Q301	BC857B	TRANSISTOR OR 2SB709ATX
Q302	BC847B	TRANSISTOR OR 2SD601ATX
Q303	BC857B	TRANSISTOR OR 2SB709ATX
Q304	BC847B	TRANSISTOR OR 2SD601ATX
Q305	BC857B	TRANSISTOR OR 2SB709ATX
Q306	BC847B	TRANSISTOR OR 2SD601ATX
Q307	BC847B	TRANSISTOR OR 2SD601ATX
Q308	BC847B	TRANSISTOR OR 2SD601ATX
Q309	BC847B	TRANSISTOR OR 2SD601ATX
Q310	BC847B	TRANSISTOR OR 2SD601ATX
Q311	BC847B	TRANSISTOR OR 2SD601ATX
Q351	2SA1767	TRANSISTOR
Q352	2SA1767	TRANSISTOR
Q353	2SA1767	TRANSISTOR
Q451	BC847B	TRANSISTOR OR 2SD601ATX
Q501	BC847B	TRANSISTOR OR 2SD601ATX
Q502	BC847B	TRANSISTOR OR 2SD601ATX
Q503	2SD836-AL	TRANSISTOR
Q504	BC847B	TRANSISTOR OR 2SD601ATX
Q551	2SD1577LB	TRANSISTOR
Q552	2SC1473-RN	TRANSISTOR
Q701	BC857B	TRANSISTOR OR 2SB709ATX
Q802	S2000NLBMA	TRANSISTOR
Q851	2SD1273PLB	TRANSISTOR ALT 2SD2396/JM3
Q852	TFD312SOF632	DIODE
Q901	BC847B	TRANSISTOR OR 2SD601ATX
Q902	BC847B	TRANSISTOR OR 2SD601ATX
Q903	BC847B	TRANSISTOR OR 2SD601ATX
Q904	BC857B	TRANSISTOR OR 2SB709ATX
Q905	BC847B	TRANSISTOR OR 2SD601ATX
Q906	BC847B	TRANSISTOR OR 2SD601ATX
Q907	BC857B	TRANSISTOR OR 2SB709ATX
Q908	2SB940APLB	TRANSISTOR
Q909	2SD1264APLB	TRANSISTOR
Q1202	BC847B	TRANSISTOR OR 2SD601ATX

Ref No.	Part No.	Description
Q1205	BC847B	TRANSISTOR OR 2SD601ATX
Q1206	BC847B	TRANSISTOR OR 2SD601ATX
Q1207	BC847B	TRANSISTOR OR 2SD601ATX
Q1208	BC857B	TRANSISTOR OR 2SB709ATX
Q1211	BC547B	TRANSISTOR
Q1212	BC847B	TRANSISTOR OR 2SD601ATX
Q1213	BC847B	TRANSISTOR OR 2SD601ATX
Q2101	BC860B	TRANSISTOR
Q2102	BC860B	TRANSISTOR
Q2301	BC857B	TRANSISTOR OR 2SB709ATX
Q2302	BC857B	TRANSISTOR OR 2SB709ATX
Q2305	2SD1328STX	TRANSISTOR
Q2306	2SD1328STX	TRANSISTOR
Q2307	BC860B	TRANSISTOR
Q2308	BC857B	TRANSISTOR OR 2SB709ATX
Q2309	BC860B	TRANSISTOR
Q2310	BC860B	TRANSISTOR
Q3001	2SC1318-S	TRANSISTOR
Q3004	BC847B	TRANSISTOR OR 2SD601ATX
Q3005	BC847B	TRANSISTOR OR 2SD601ATX
Q3006	2SC1318-S	TRANSISTOR
Q3011	BC857B	TRANSISTOR OR 2SB709ATX
Q3012	2SD1328STX	TRANSISTOR
Q3013	2SD1328STX	TRANSISTOR
<b>RESISTOR</b>		
RL1201	TSE1885-1	RELAY
R.378	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R.379	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R.380	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R.604	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R.622	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R.925	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R.926	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R130	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R131	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R132	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R133	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R134	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R136	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R201	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R203	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R204	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R205	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R206	ERJ6GEYJ681	S.M.CARB 0.1W 5% 680Ω
R207	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R208	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R209	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R210	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R251	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R252	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R253	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R254	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R255	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R256	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R257	ERJ6GEYJ100	S.M.CARB 0.1W 5% 10Ω
R258	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R259	ERJ6GEYJ100	S.M.CARB 0.1W 5% 10Ω
R260	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R261	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R262	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R265	ERD25TJ2R2	CARBON 0.25W 5% 2R2Ω
R266	ERD25TJ2R2	CARBON 0.25W 5% 2R2Ω
R267	ERF7ZK4R7	WOUND 7W 10% 4R7Ω Δ
R271	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R272	ERF7ZK4R7	WOUND 7W 10% 4R7Ω Δ
R273	ERD25TJ273	CARBON 0.25W 5% 27KΩ
R301	ERJ6GEYJ750	S.M.CARB 0.1W 5% 75Ω
R302	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R303	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R304	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R305	ERJ6GEYJ750	S.M.CARB 0.1W 5% 75Ω
R306	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R307	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R308	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R309	ERJ6GEYJ750	S.M.CARB 0.1W 5% 75Ω
R310	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R311	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R312	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R313	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω

Ref No.	Part No.	Description
R314	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R315	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R316	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R321	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R322	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R323	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R324	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R351	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R352	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R353	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R354	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R355	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R356	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R357	ERG1FJ683P	METAL 1W 5% 68KΩ Δ
R358	ERG1FJ683P	METAL 1W 5% 68KΩ Δ
R359	ERG1FJ683P	METAL 1W 5% 68KΩ Δ
R363	ERD25TJ103	CARBON 0.25W 5% 10KΩ
R364	ERD25TJ103	CARBON 0.25W 5% 10KΩ
R365	ERD25TJ103	CARBON 0.25W 5% 10KΩ
R366	ERDS1TJ472	CARBON 0.5W 5% 4K7Ω
R367	ERDS1TJ472	CARBON 0.5W 5% 4K7Ω
R368	ERDS1TJ472	CARBON 0.5W 5% 4K7Ω
R369	ERD25TJ203	CARBON 0.25W 5% 20KΩ
R370	ERJ6GEYJ822	S.M.CARB 0.1W 5% 8K2Ω
R372	ERQ12AJ121	FUSIBLE 0.5W 5% 120Ω Δ
R373	ERJ6GEYJ220	S.M.CARB 0.1W 5% 22Ω
R374	ERD25TJ274	CARBON 0.25W 5% 270KΩ
R375	ERJ6GEYJ684	S.M.CARB 0.1W 5% 680KΩ
R376	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18KΩ
R377	ERQ1CJP4R7	FUSIBLE 1W 5% 4R7Ω Δ
R381	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R382	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R383	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R451	ERJ6GEYJ393	S.M.CARB 0.1W 5% 39KΩ
R452	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R453	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R455	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R456	ERJ6GEYJ123	S.M.CARB 0.1W 5% 12KΩ
R457	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R458	ERD25TJ1R5	CARBON 0.25W 5% 1R5Ω
R459	ERJ6GEYJ680	S.M.CARB 0.1W 5% 68Ω
R460	ERJ6GEYJ513	S.M.CARB 0.1W 5% 51KΩ
R461	ERDS1TJ471	CARBON 0.5W 5% 470Ω
R462	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R463	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R464	ERW12PKR68	WIREWOUND0.5W 10% R68Ω Δ
R465	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R466	ERO25CKF1801	METAL 0.25W 1% 1K8Ω Δ
R467	ERO25CKF1801	METAL 0.25W 1% 1K8Ω Δ
R470	ERD25TJ512	CARBON 0.25W 5% 5K1Ω
R471	ERDS1TJ152	CARBON 0.5W 5% 1K5Ω
R472	ERDS1TJ4R7	CARBON 0.5W 5% 4R7Ω
R501	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R502	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R503	ERJ6GEYJ333	S.M.CARB 0.1W 5% 33KΩ
R504	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R506	ERD25TJ560	CARBON 0.25W 5% 56Ω
R507	ERQ14AJ5R6	FUSIBLE 14W 5% 5R6Ω Δ
R509	ERDS1TJ152	CARBON 0.5W 5% 1K5Ω
R510	ERDS1TJ152	CARBON 0.5W 5% 1K5Ω
R511	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R512	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R513	ERJ6GEYJ123	S.M.CARB 0.1W 5% 12KΩ
R514	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R551	ERW2PKR47	WIREWOUND2W 10% 0R47Ω Δ
R553	ERG1SJ152	METAL 1W 5% 1K5Ω
R554	ERQ14AJW101	METAL 0.25W 5% 100Ω Δ
R558	ERDS1TJ124	CARBON 0.5W 5% 120KΩ
R561	ERJ6GEYJ563	S.M.CARB 0.1W 5% 56KΩ
R562	ERJ6GEYJ225	S.M.CARB 0.125W 5% 2M2Ω
R563	ERJ6GEYJ225	S.M.CARB 0.125W 5% 2M2Ω
R564	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R566	ERJ6GEYJ682	S.M.CARB 0.1W 5% 6K8Ω
R567	ERJ6GEYJ274	S.M.CARB 0.1W 5% 270KΩ
R601	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R602	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R603	ERJ6GEYJ750	S.M.CARB 0.1W 5% 75Ω
R605	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18KΩ
R606	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R607	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R608	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω

Ref No.	Part No.	Description
R609	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R610	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R611	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R612	ERJ6GEYJ123	S.M.CARB 0.1W 5% 12KΩ
R613	ERJ6GEYJ271	S.M.CARB 0.1W 5% 270Ω
R614	ERJ6GEYJ470	S.M.CARB 0.1W 5% 47Ω
R615	ERJ6GEYJ333	S.M.CARB 0.1W 5% 33KΩ
R616	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15KΩ
R618	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R619	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R623	ERJ6GEYJ821	S.M.CARB 0.1W 5% 820Ω
R701	ERQ12AJ101	FUSIBLE 0.5W 5% 100Ω Δ
R702	ERQ12HJ8R2	METAL 0.5W 5% 8R2Ω Δ
R703	ERG2FJ821	METAL 2W 5% 820Ω Δ
R704	ERJ6GEYJ563	S.M.CARB 0.1W 5% 56KΩ
R705	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R706	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R707	ERJ6GEYJ182	S.M.CARB 0.1W 5% 1K8Ω
R708	ERJ6GEYJ393	S.M.CARB 0.1W 5% 39KΩ
R709	ERJ6GEYJ393	S.M.CARB 0.1W 5% 39KΩ
R710	ERJ6GEYJ273	S.M.CARB 0.1W 5% 27KΩ
R711	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R712	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R713	ERG1SJ101	METAL 1W 5% 100Ω
R801	ERG3FJ682H	METAL 3W 5% 6K8Ω Δ
R802	ERG2FJ472	METAL 2W 5% 4K7Ω Δ
R803	ERX12SJWR47	METAL 12W 5% R47Ω
R804	ERJ6GEYJ682	S.M.CARB 0.1W 5% 6K8Ω
R805	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R807	ERO25CKF1201	METAL 0.25W 1% 1K2Ω Δ
R808	232266296706	THERMISTOR
R809	ERO25CKF1332	METAL 0.25W 1% 13KΩ Δ
R810	ERD25TJ103	CARBON 0.25W 5% 10KΩ
R811	EVMESA00B33	CONTROL 3KΩ
R812	ERDS1TJ220	CARBON 0.5W 5% 22Ω
R813	ERD50FJ274	CARBON 0.5W 5% 270KΩ
R814	ERF7ZK2R7	WOUND 7W 20% 2R7Ω Δ
R815	ERDS1TJ563	CARBON 0.5W 5% 56KΩ
R817	ERG3FJ470	METAL 3W 5% 47Ω Δ
R818	ERD50FJ104	CARBON 0.5W 5% 100KΩ
R819	ERD50FJ184	CARBON 0.5W 5% 180KΩ
R820	ERD75TAJ825	CARBON 0.75W 5% 8M2Ω Δ
R841	ERC12ZGK335D	SOLID 0.5W 10% 3M3Ω
R852	ERJ6GEYJ271	S.M.CARB 0.1W 5% 270Ω
R853	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R854	ERDS1TJ474	CARBON 0.5W 5% 470KΩ
R855	ERG2FJ223	METAL 2W 5% 22KΩ Δ
R856	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R901	ERJ6GEYJ562	S.M.CARB 0.1W 5% 5K6Ω
R902	ERJ6GEYJ562	S.M.CARB 0.1W 5% 5K6Ω
R903	ERJ6GEYJ562	S.M.CARB 0.1W 5% 5K6Ω
R904	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R905	ERJ6GEYJ681	S.M.CARB 0.1W 5% 680Ω
R906	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R907	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R908	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R909	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R910	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R911	ERJ6GEYJ152	S.M.CARB 0.1W 5% 1K5Ω
R913	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18KΩ
R914	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R915	ERJ6GEYJ182	S.M.CARB 0.1W 5% 1K8Ω
R916	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R917	ERJ6GEYJ121	S.M.CARB 0.1W 5% 120Ω
R919	ERQ14AJ390	FUSIBLE 0.25W 5% 39Ω Δ
R920	ERQ14AJ390	FUSIBLE 0.25W 5% 39Ω Δ
R921	ERD25TJ471	CARBON 0.25W 5% 470Ω
R922	ERD25TJ393	CARBON 0.25W 5% 39KΩ
R923	ERD25TJ393	CARBON 0.25W 5% 39KΩ
R924	ERDS1FJ390	CARBON 0.5W 5% 39Ω Δ
R927	ERD25TJ471	CARBON 0.25W 5% 470Ω
R928	ERD25TJ5R6	CARBON 0.25W 5% 5R6Ω
R929	ERDS1FJ471	CARBON 0.5W 5% 470Ω Δ
R930	ERD25TJ5R6	CARBON 0.25W 5% 5R6Ω
R931	ERDS1FJ390	CARBON 0.5W 5% 39Ω Δ
R932	ERDS1FJ101	CARBON 0.5W 5% 100Ω Δ
R933	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R934	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R935	ERQ14AJ3R9	FUSIBLE 0.25W 5% 3R9Ω Δ
R936	ERQ1CJP331	METAL 1W 5% 330Ω Δ






Ref No.	Part No.	Description			
R3071	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3150	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3151	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3152	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3153	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3154	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ
R3155	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3156	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3157	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ
R3158	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3502	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3504	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3505	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3508	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18KΩ
R3511	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3512	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
 <b>SWITCHES</b>					
S.351	0330550049	CRT SOCKET			
S801	ESB91232A	SWITCH			▲




Ref No.	Part No.	Description	
S1201	EVQ23405R	SWITCH	
S1202	EVQ23405R	SWITCH	
S1203	EVQ23405R	SWITCH	
S1204	EVQ23405R	SWITCH	
S1205	EVQ23405R	SWITCH	
 <b>TRANSFORMERS</b>			
T501	5270103200	TRANSFORMER	
T551	ZTFH44011A	F.B.T.	▲
T801	TLP8E1004	TRANSFORMER	▲
T1201	ETP35KAN61ZU	TRANSFORMER	
 <b>FILTERS</b>			
X601	TSS2169-B	CRYSTAL	
X1201	TSS120M2	CRYSTAL	
X2101	4730007158	CRYSTAL	




# SCHEMATIC DIAGRAM FOR MODEL TX-28XD3L (EURO-2M CHASSIS)

## IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

## Notes

- RESISTOR**  
All resistors are carbon 1/4W resistor, unless marked.  
Unit of resistance is OHM ( $\Omega$ ) (K=1,000, M=1,000,000).
- CAPACITOR**  
All capacitors are ceramic 50V capacitors, unless marked, the unit of capacitance is  $\mu$ F unless otherwise stated.
- COIL**  
Unit of inductance is  $\mu$ H, unless otherwise stated.
- TEST POINT**  
 : Test Point position
- EARTH SYMBOL**  
 : Chassis Earth (Cold)  
 : Line Earth (Hot)
- VOLTAGE MEASUREMENT**  
Voltage is measured by a DC voltmeter.  
Measurement conditions are as follows:

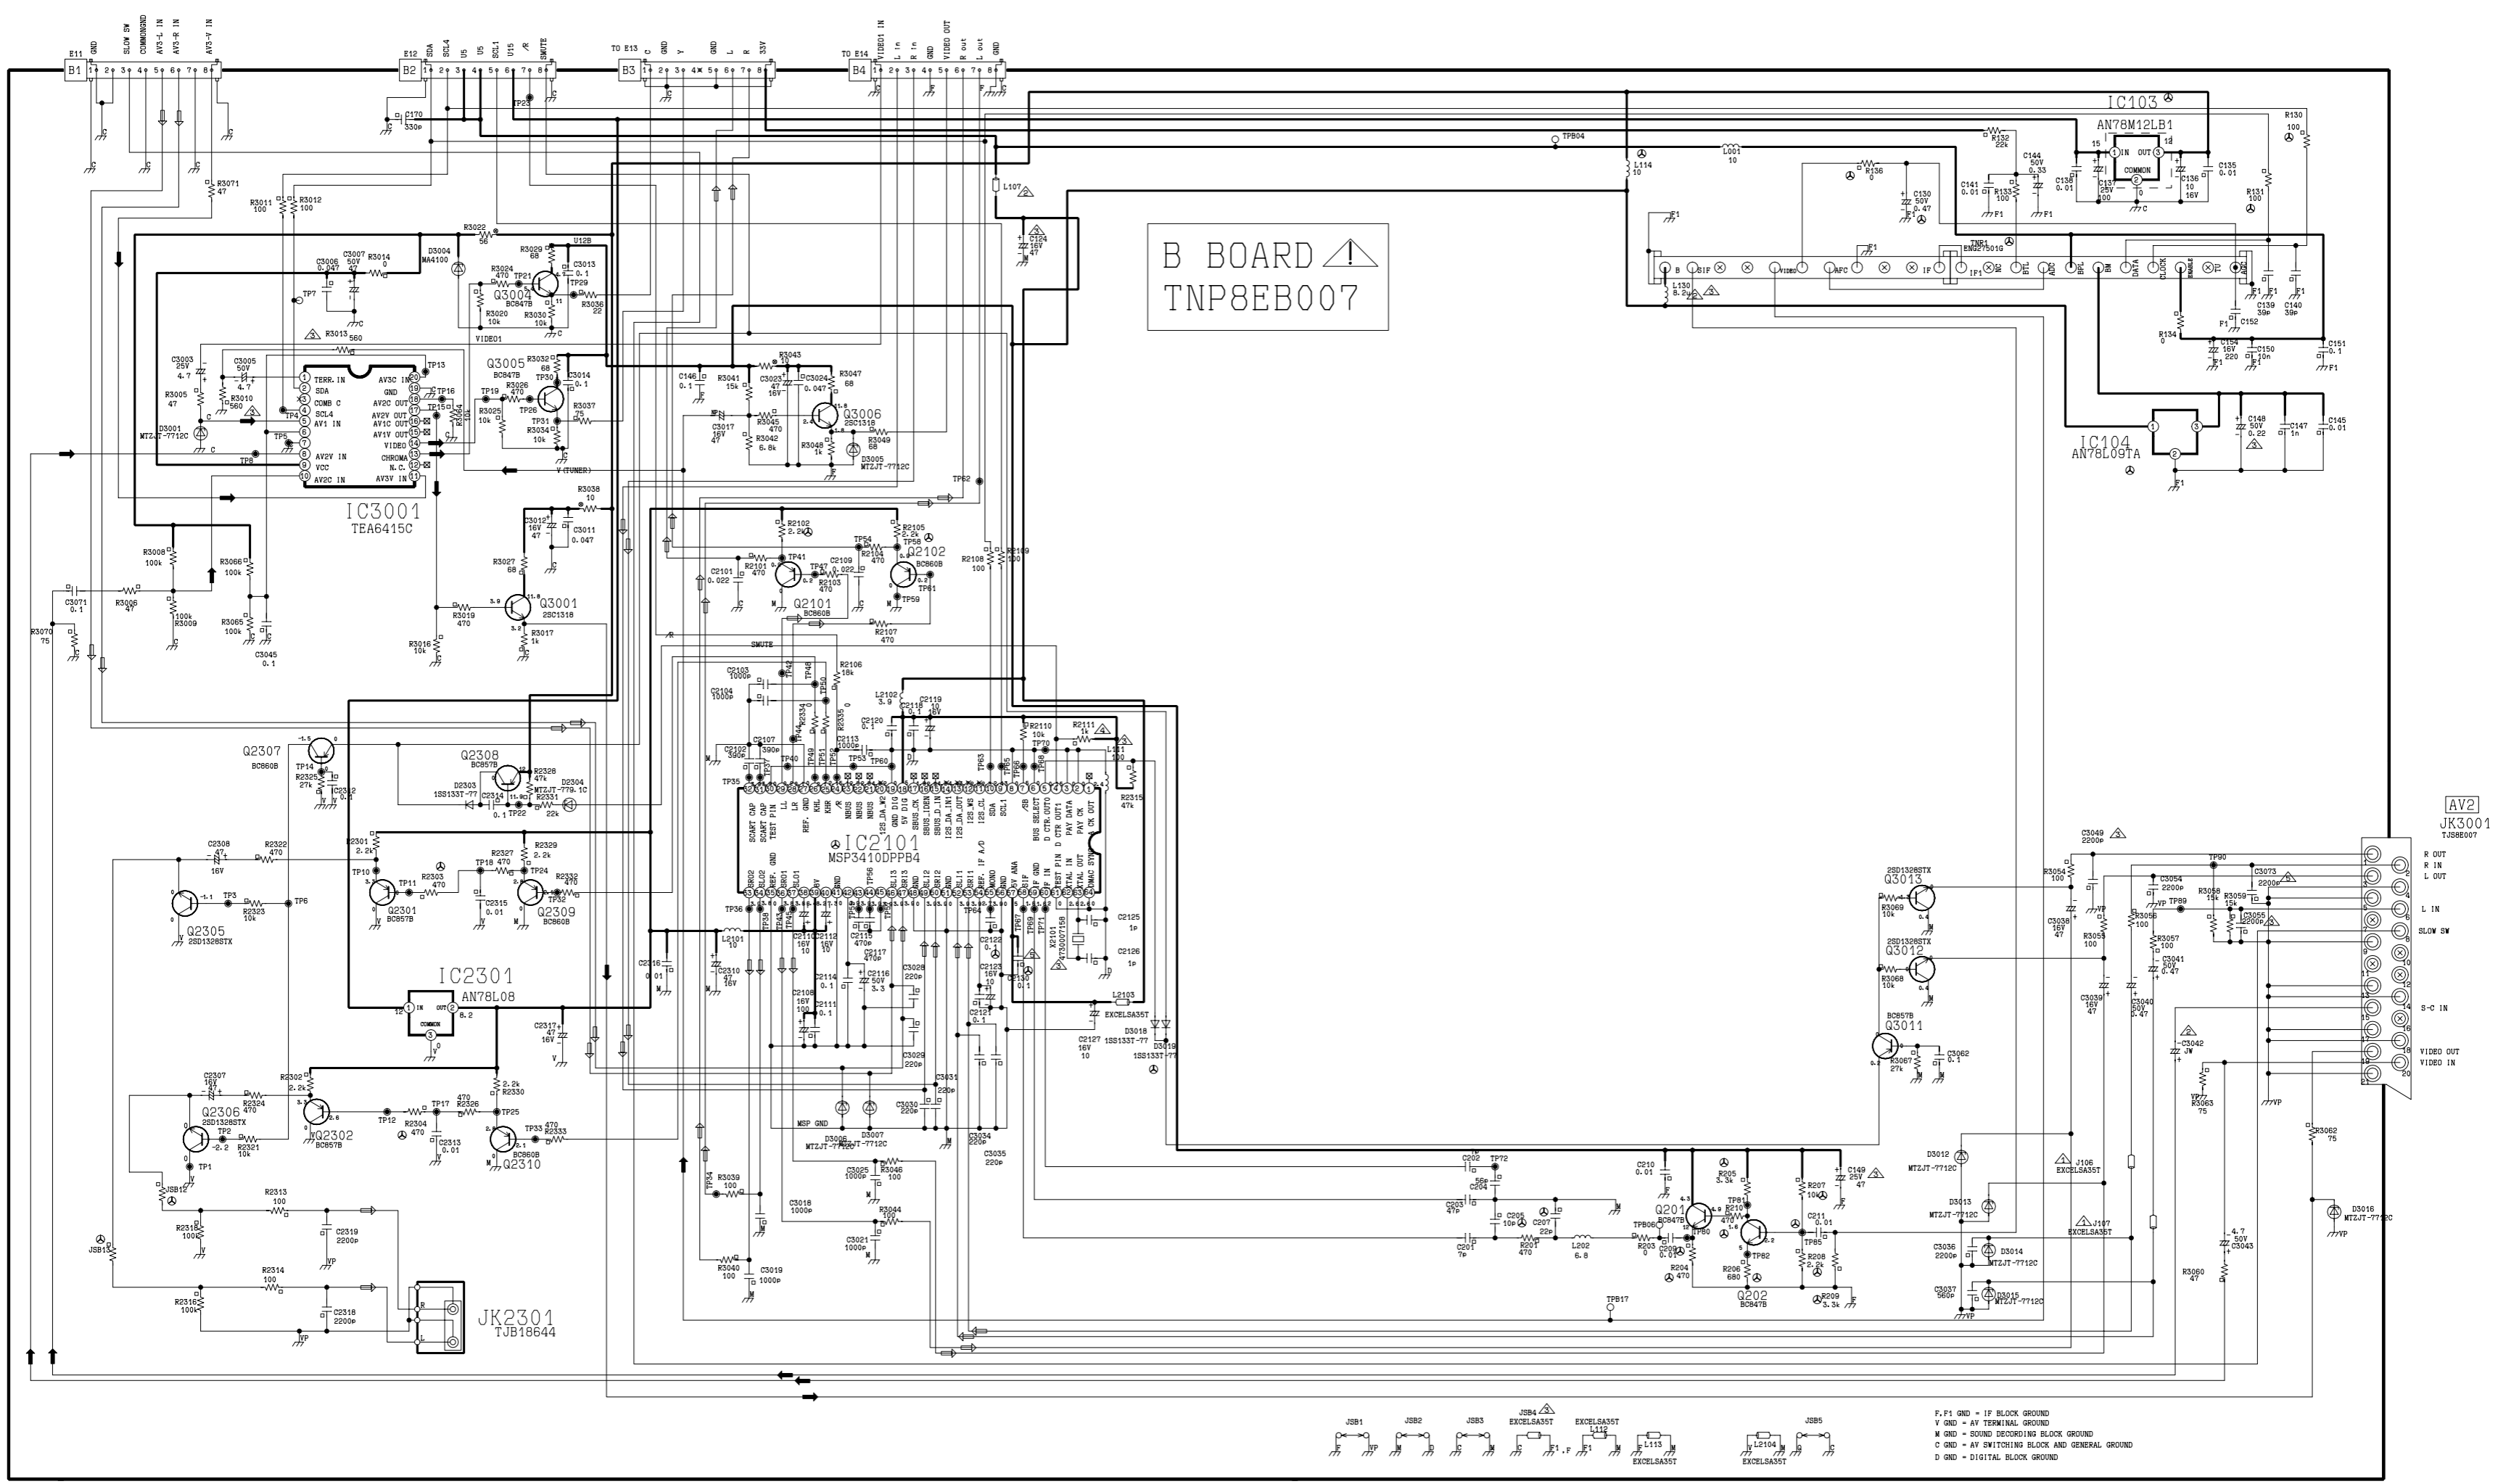
Power source	AC 220-240V, 50Hz
Receiving Signal	Colour Bar signal (RF)
All customer controls	Maximum position
-  : Indicates the Video signal path  
 : Indicates the Audio signal path  
 : Indicates the Vertical/Horizontal signal path
- This schematic diagram is the latest at the time of printing and is subject to change without notice.

## Precautions

- Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- Do not short-circuit the hot and cold circuits as electrical components may be damaged.
- Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously, as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- Make sure to disconnect the power plug before removing the chassis.

## Remarks


- The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD.



B BOARD  
TNP8EB007


AV2  
JK3001  
TNP8EB007

F.P1 GND - IF BLOCK GROUND  
Y GND - AV TERMINAL GROUND  
M GND - SOUND RECORDING BLOCK GROUND  
C GND - AV SWITCHING BLOCK AND GENERAL GROUND  
D GND - DIGITAL BLOCK GROUND




JK3102  
TJB16673

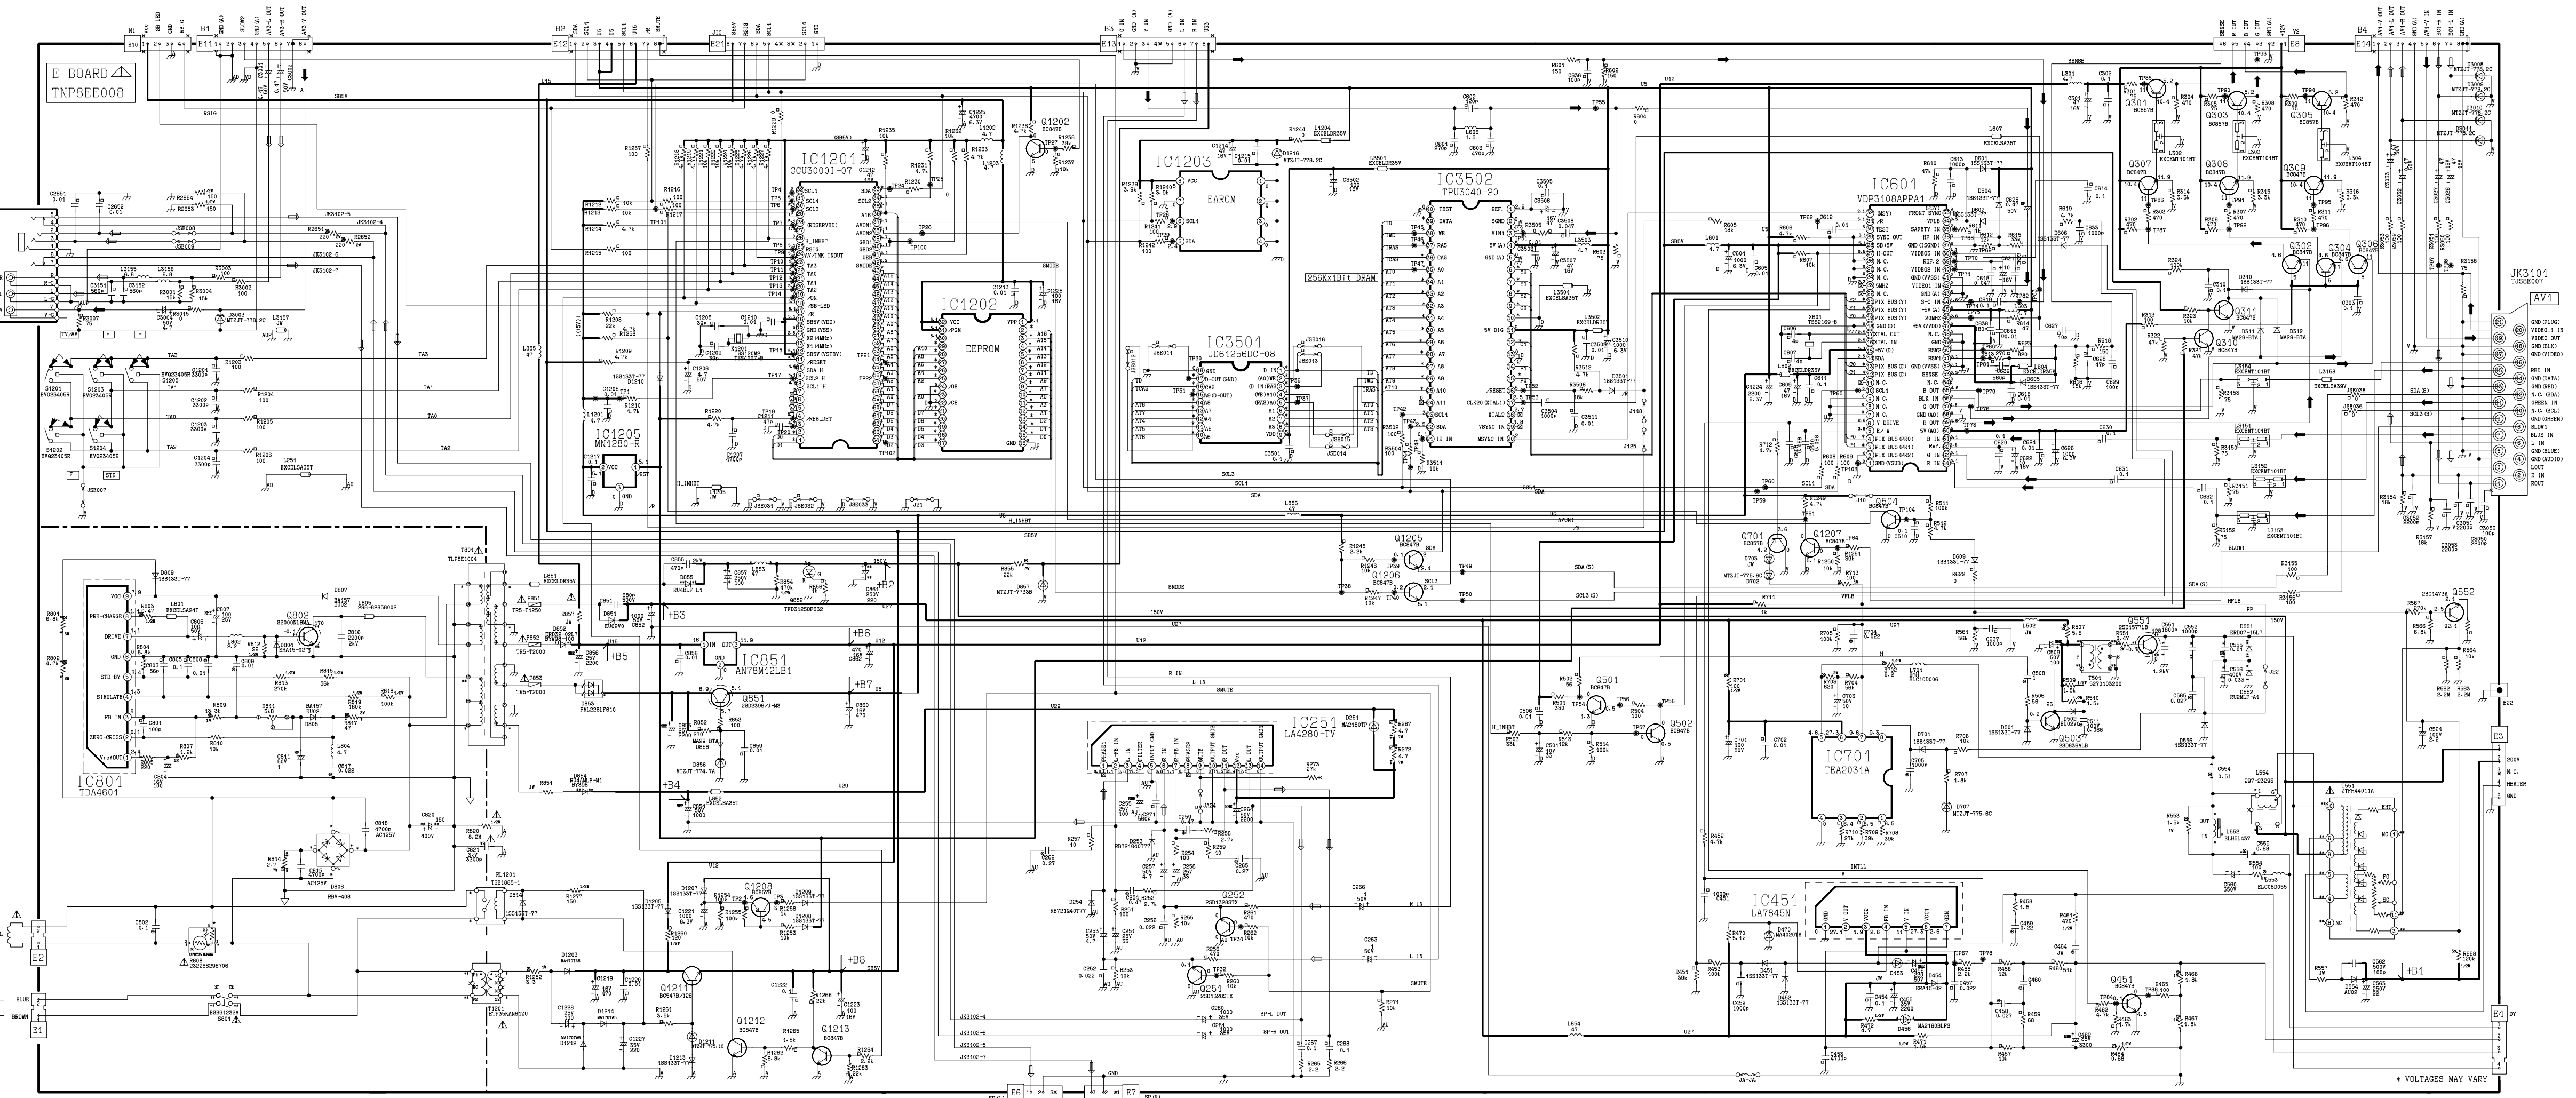AC\_CORD





\* VOLTAGES MAY VARY

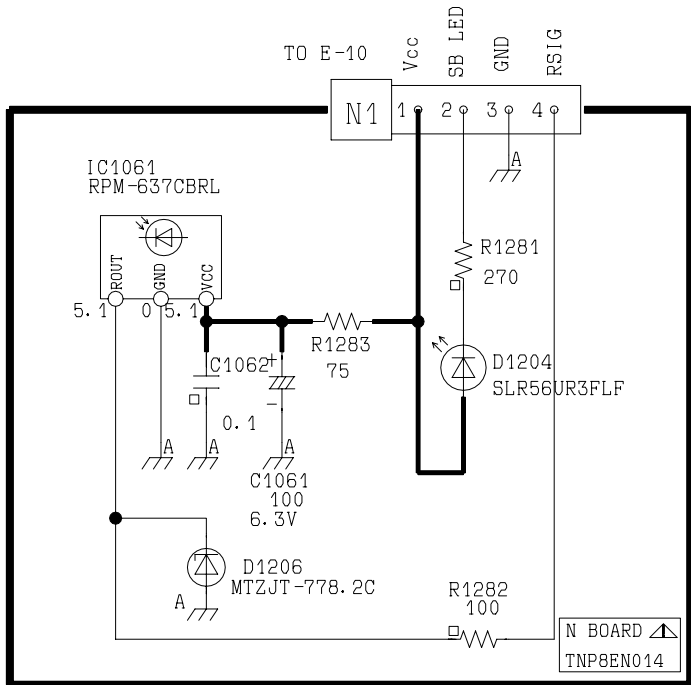






P BOARD ⚠  
TNP8EP013

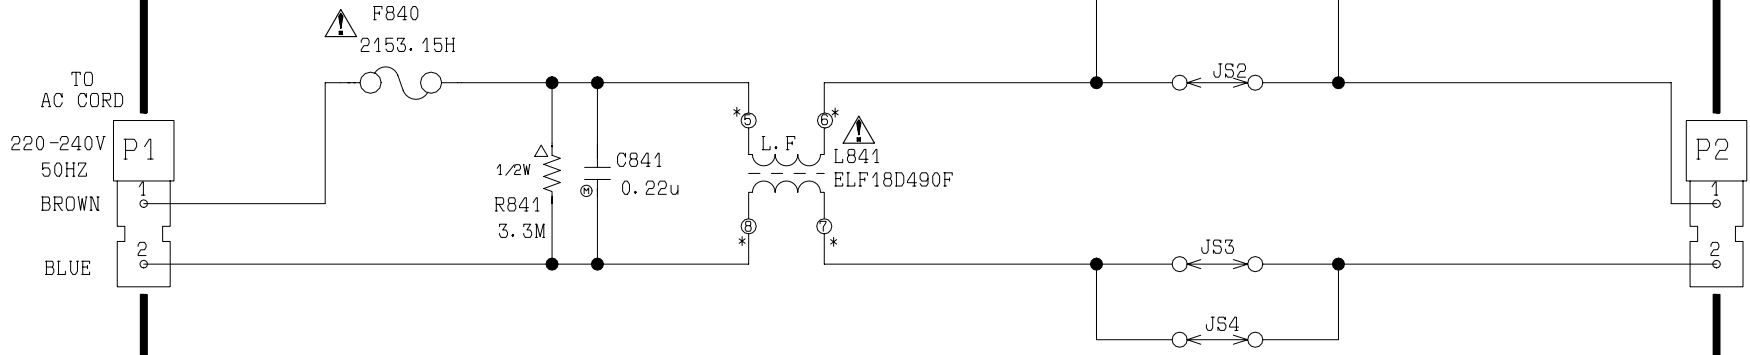


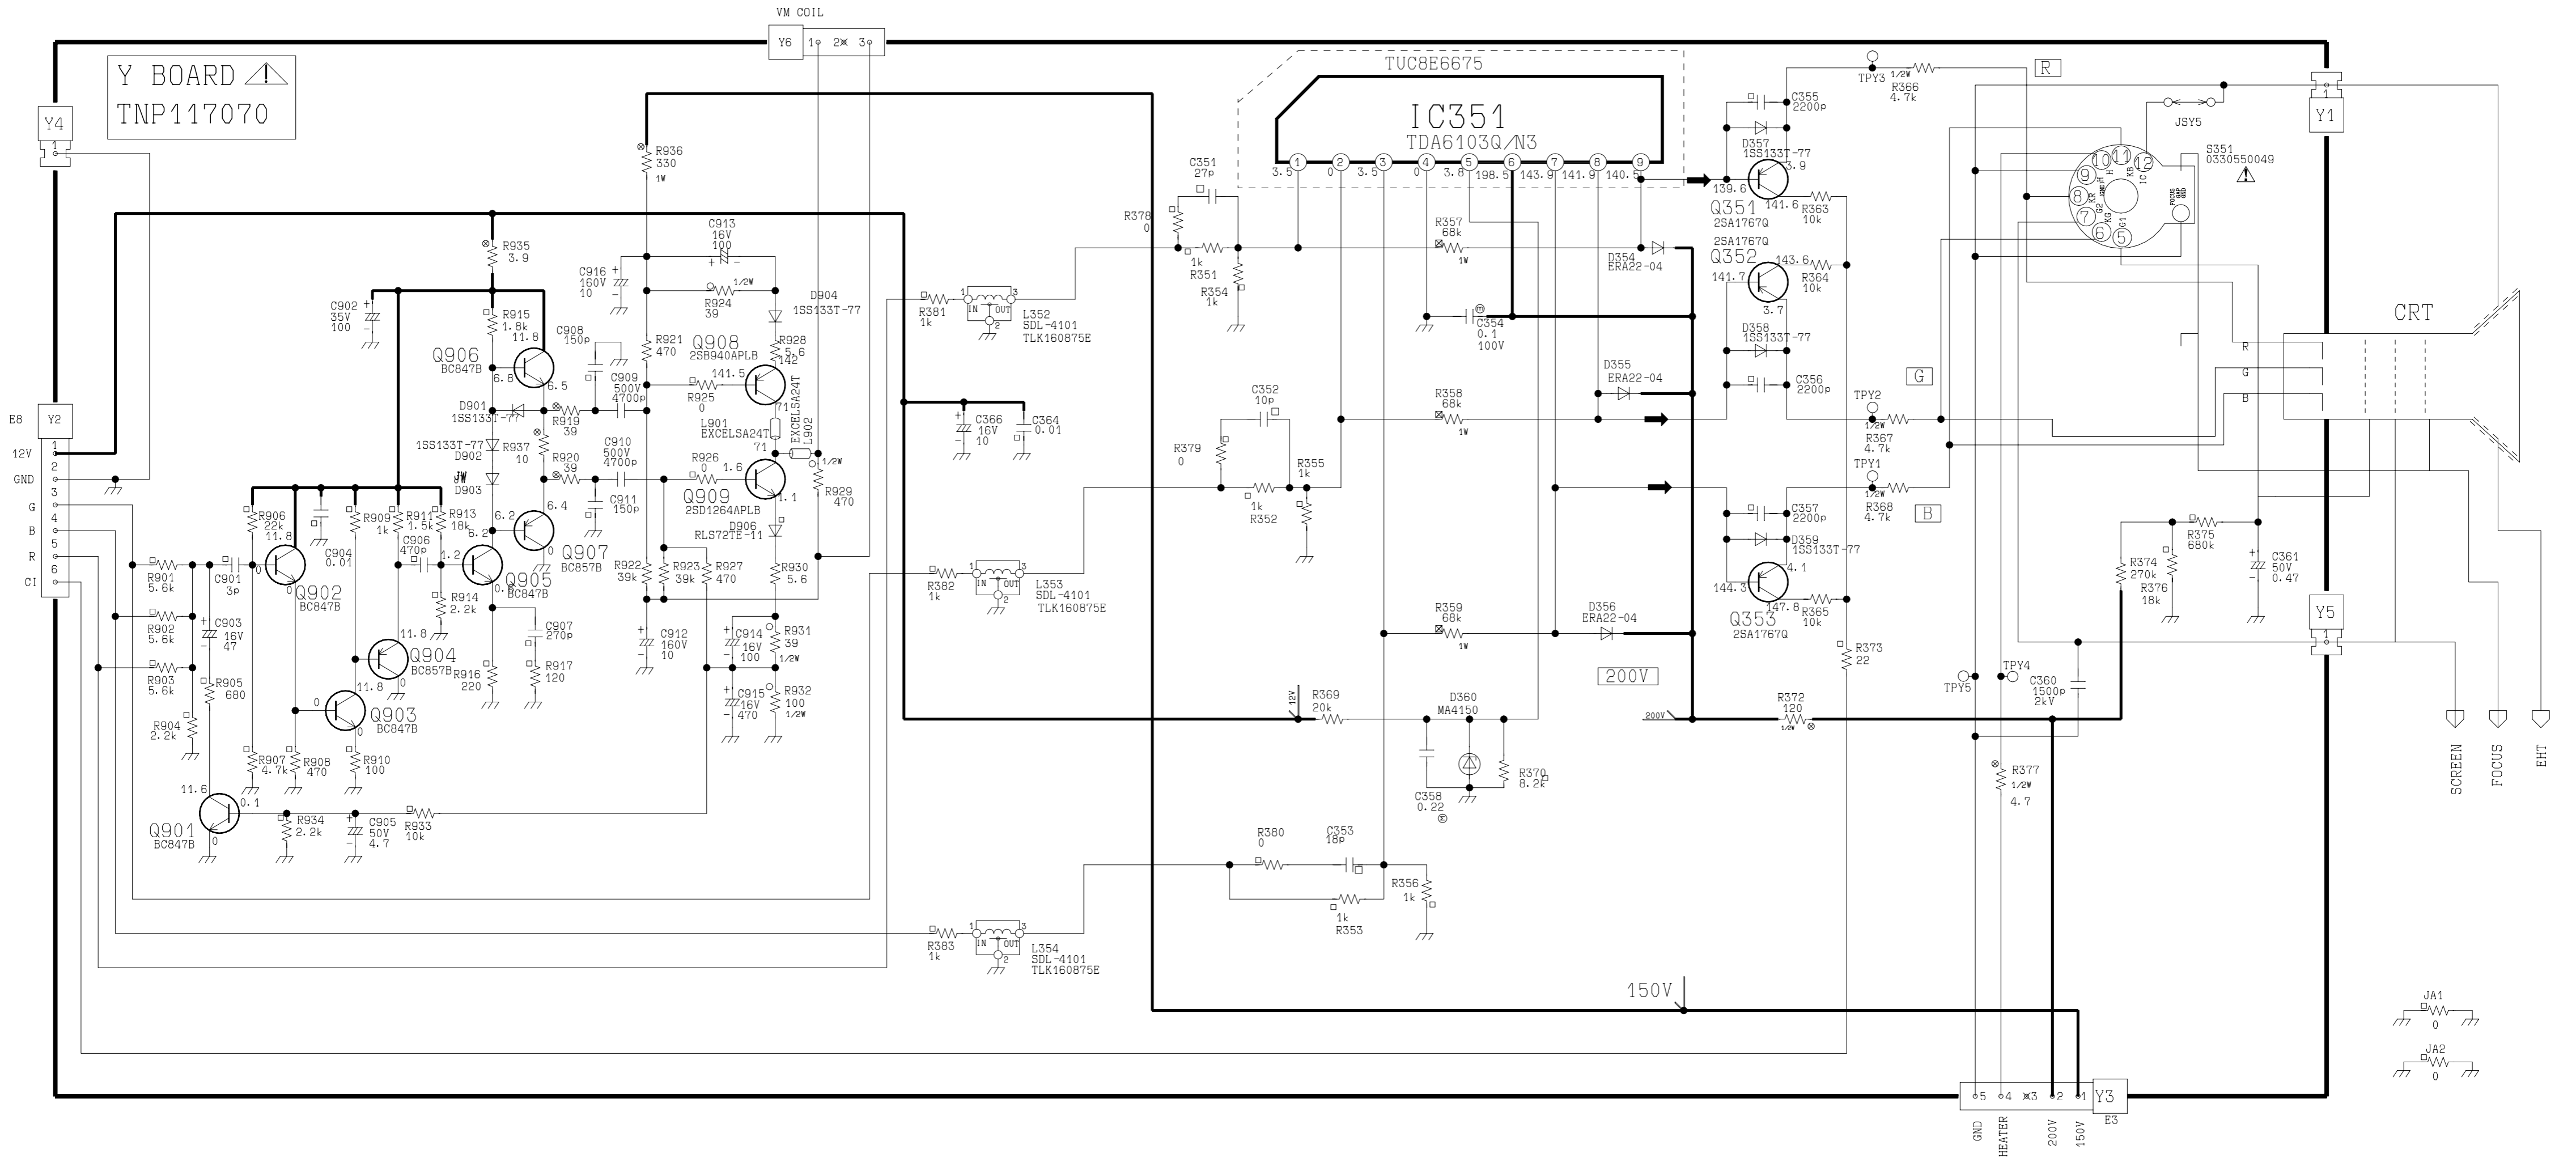



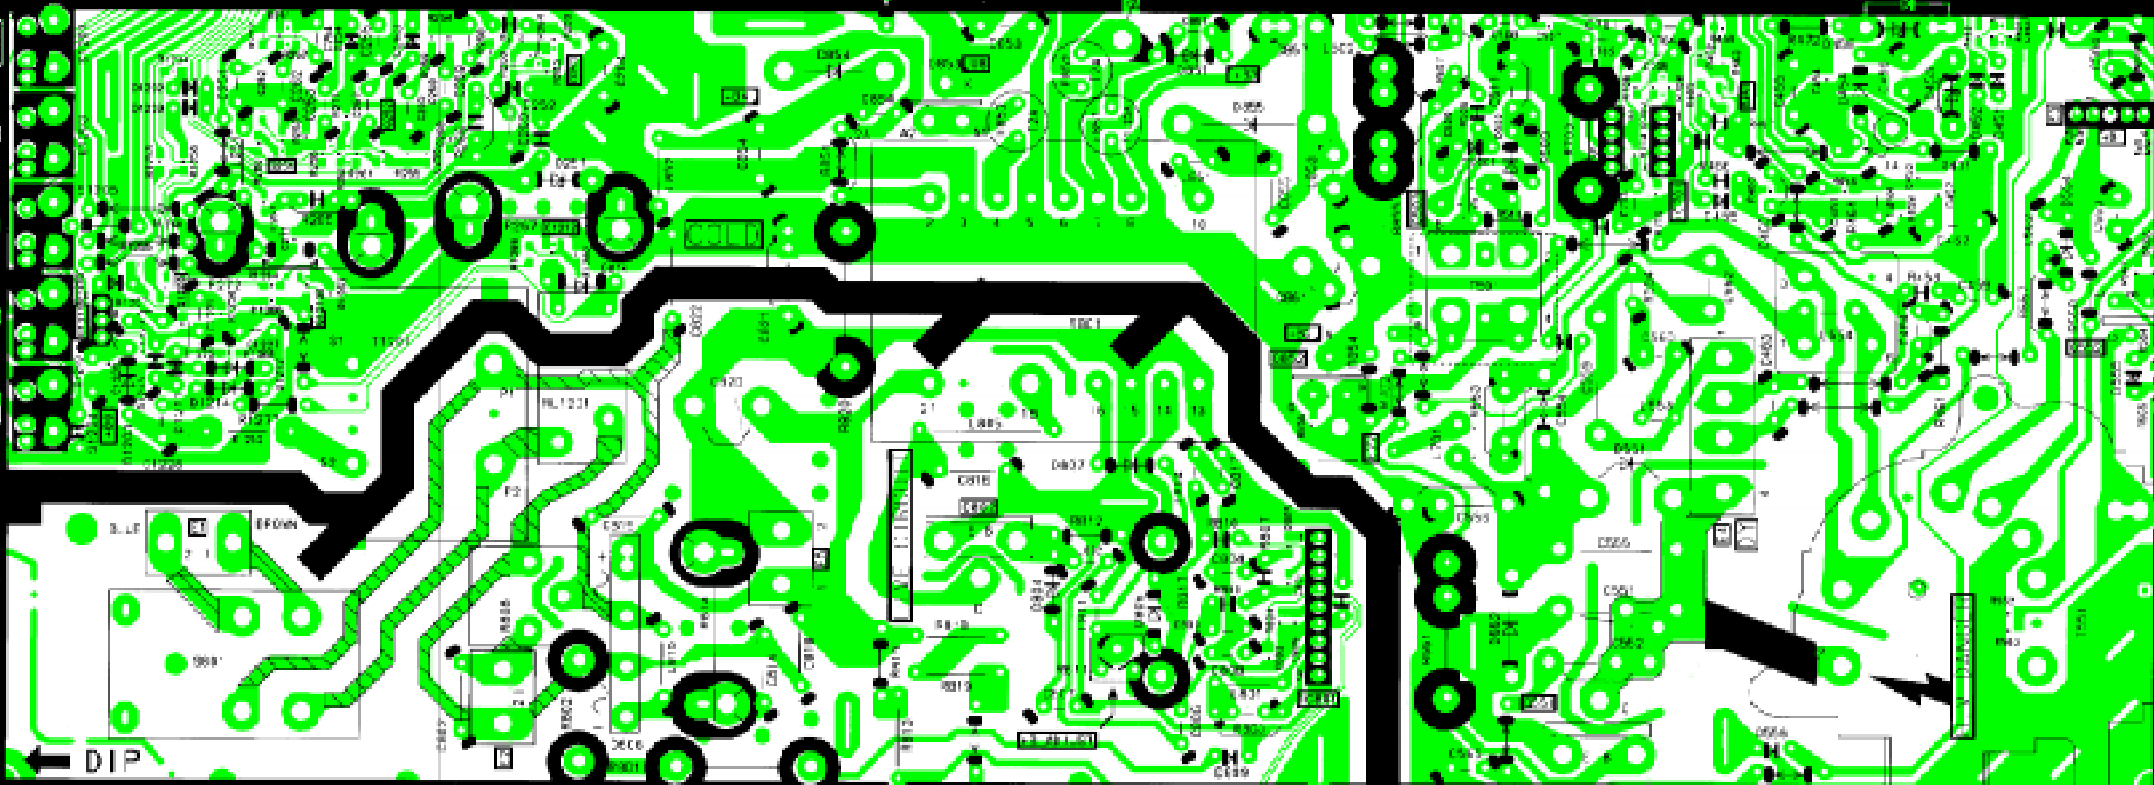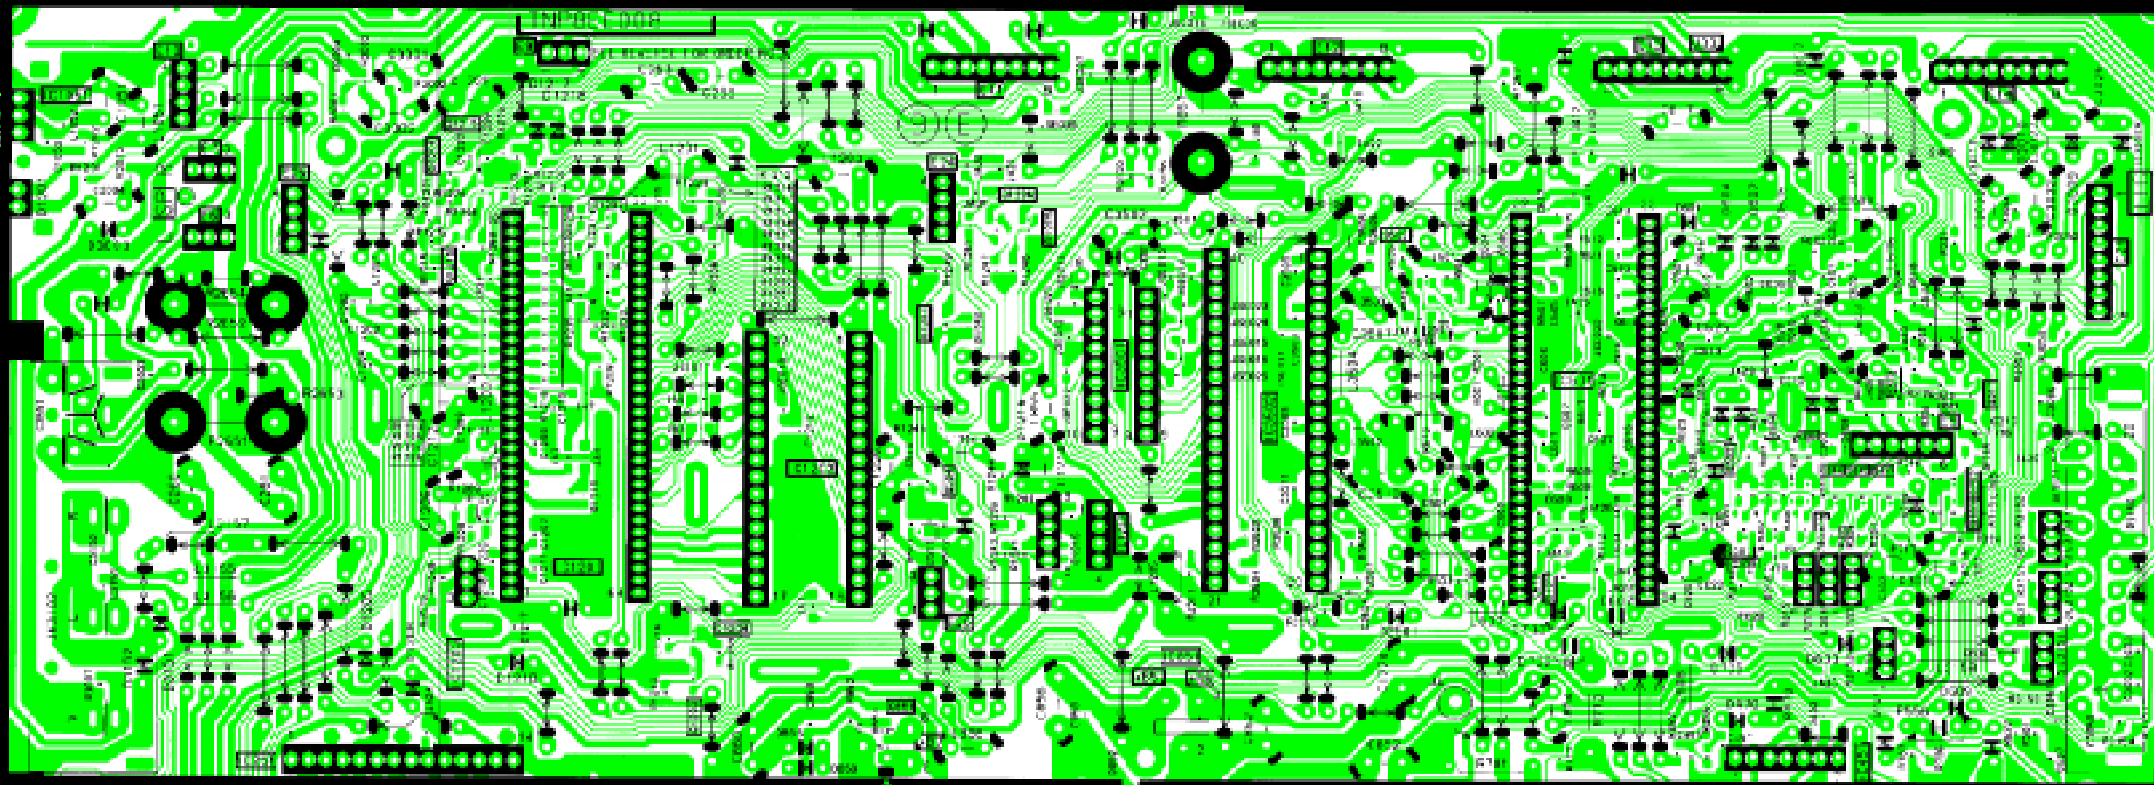

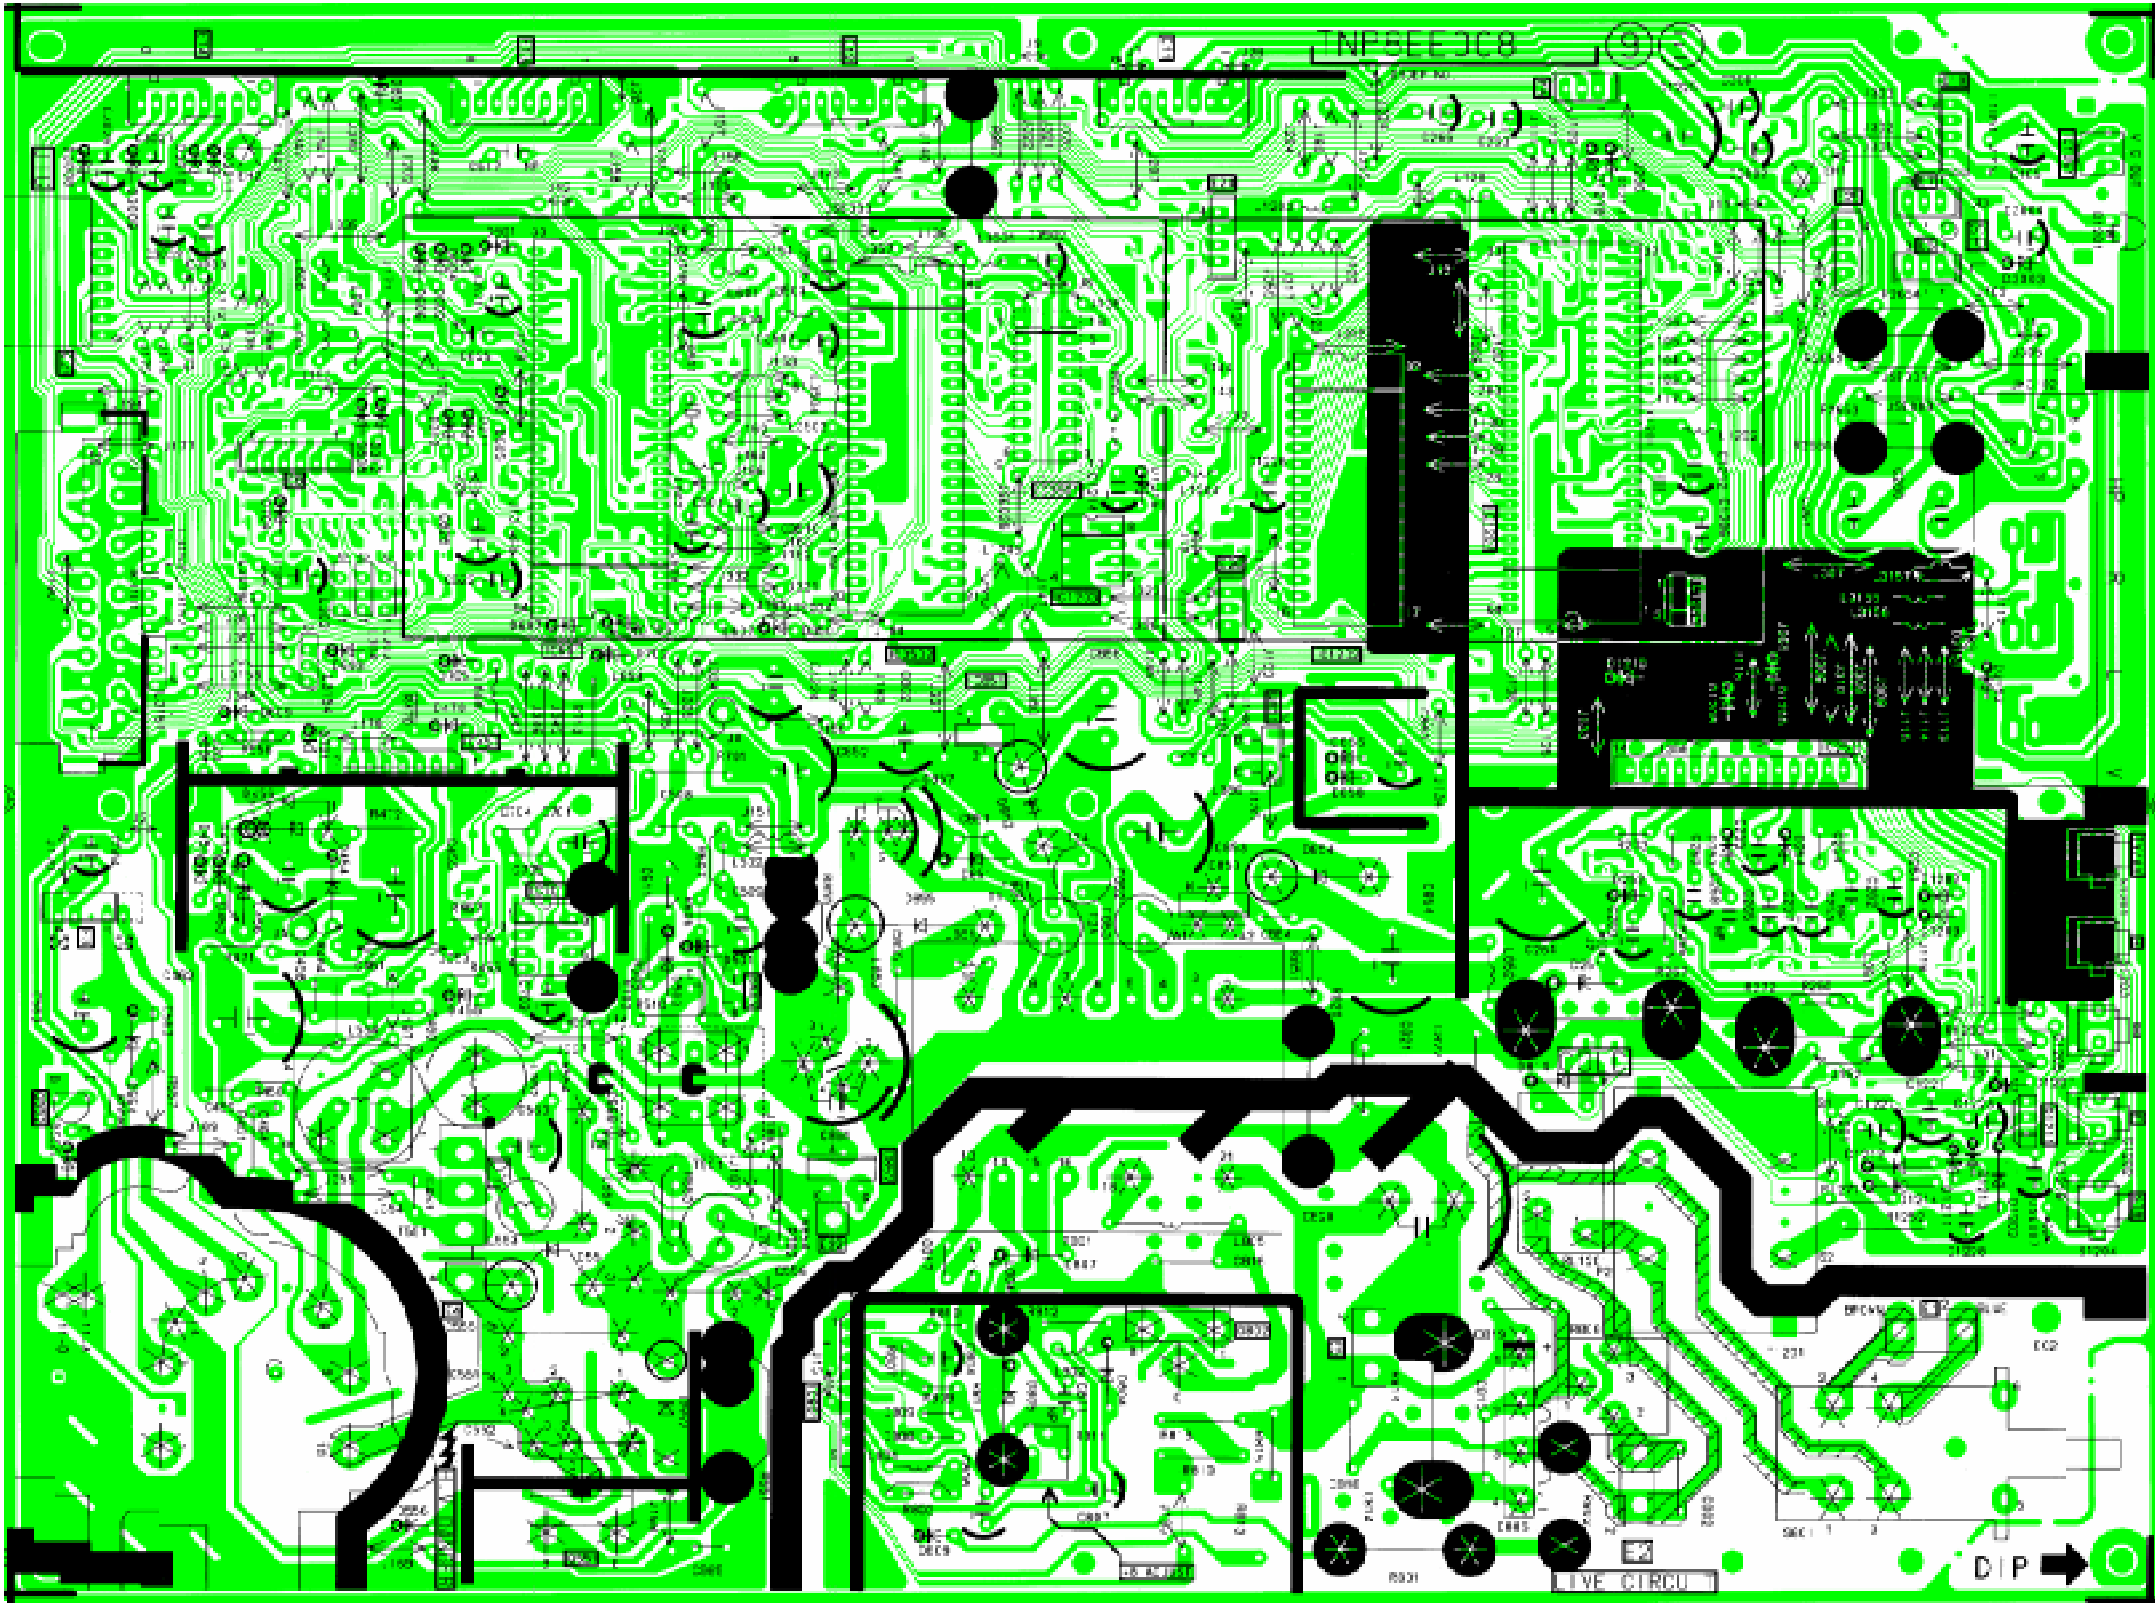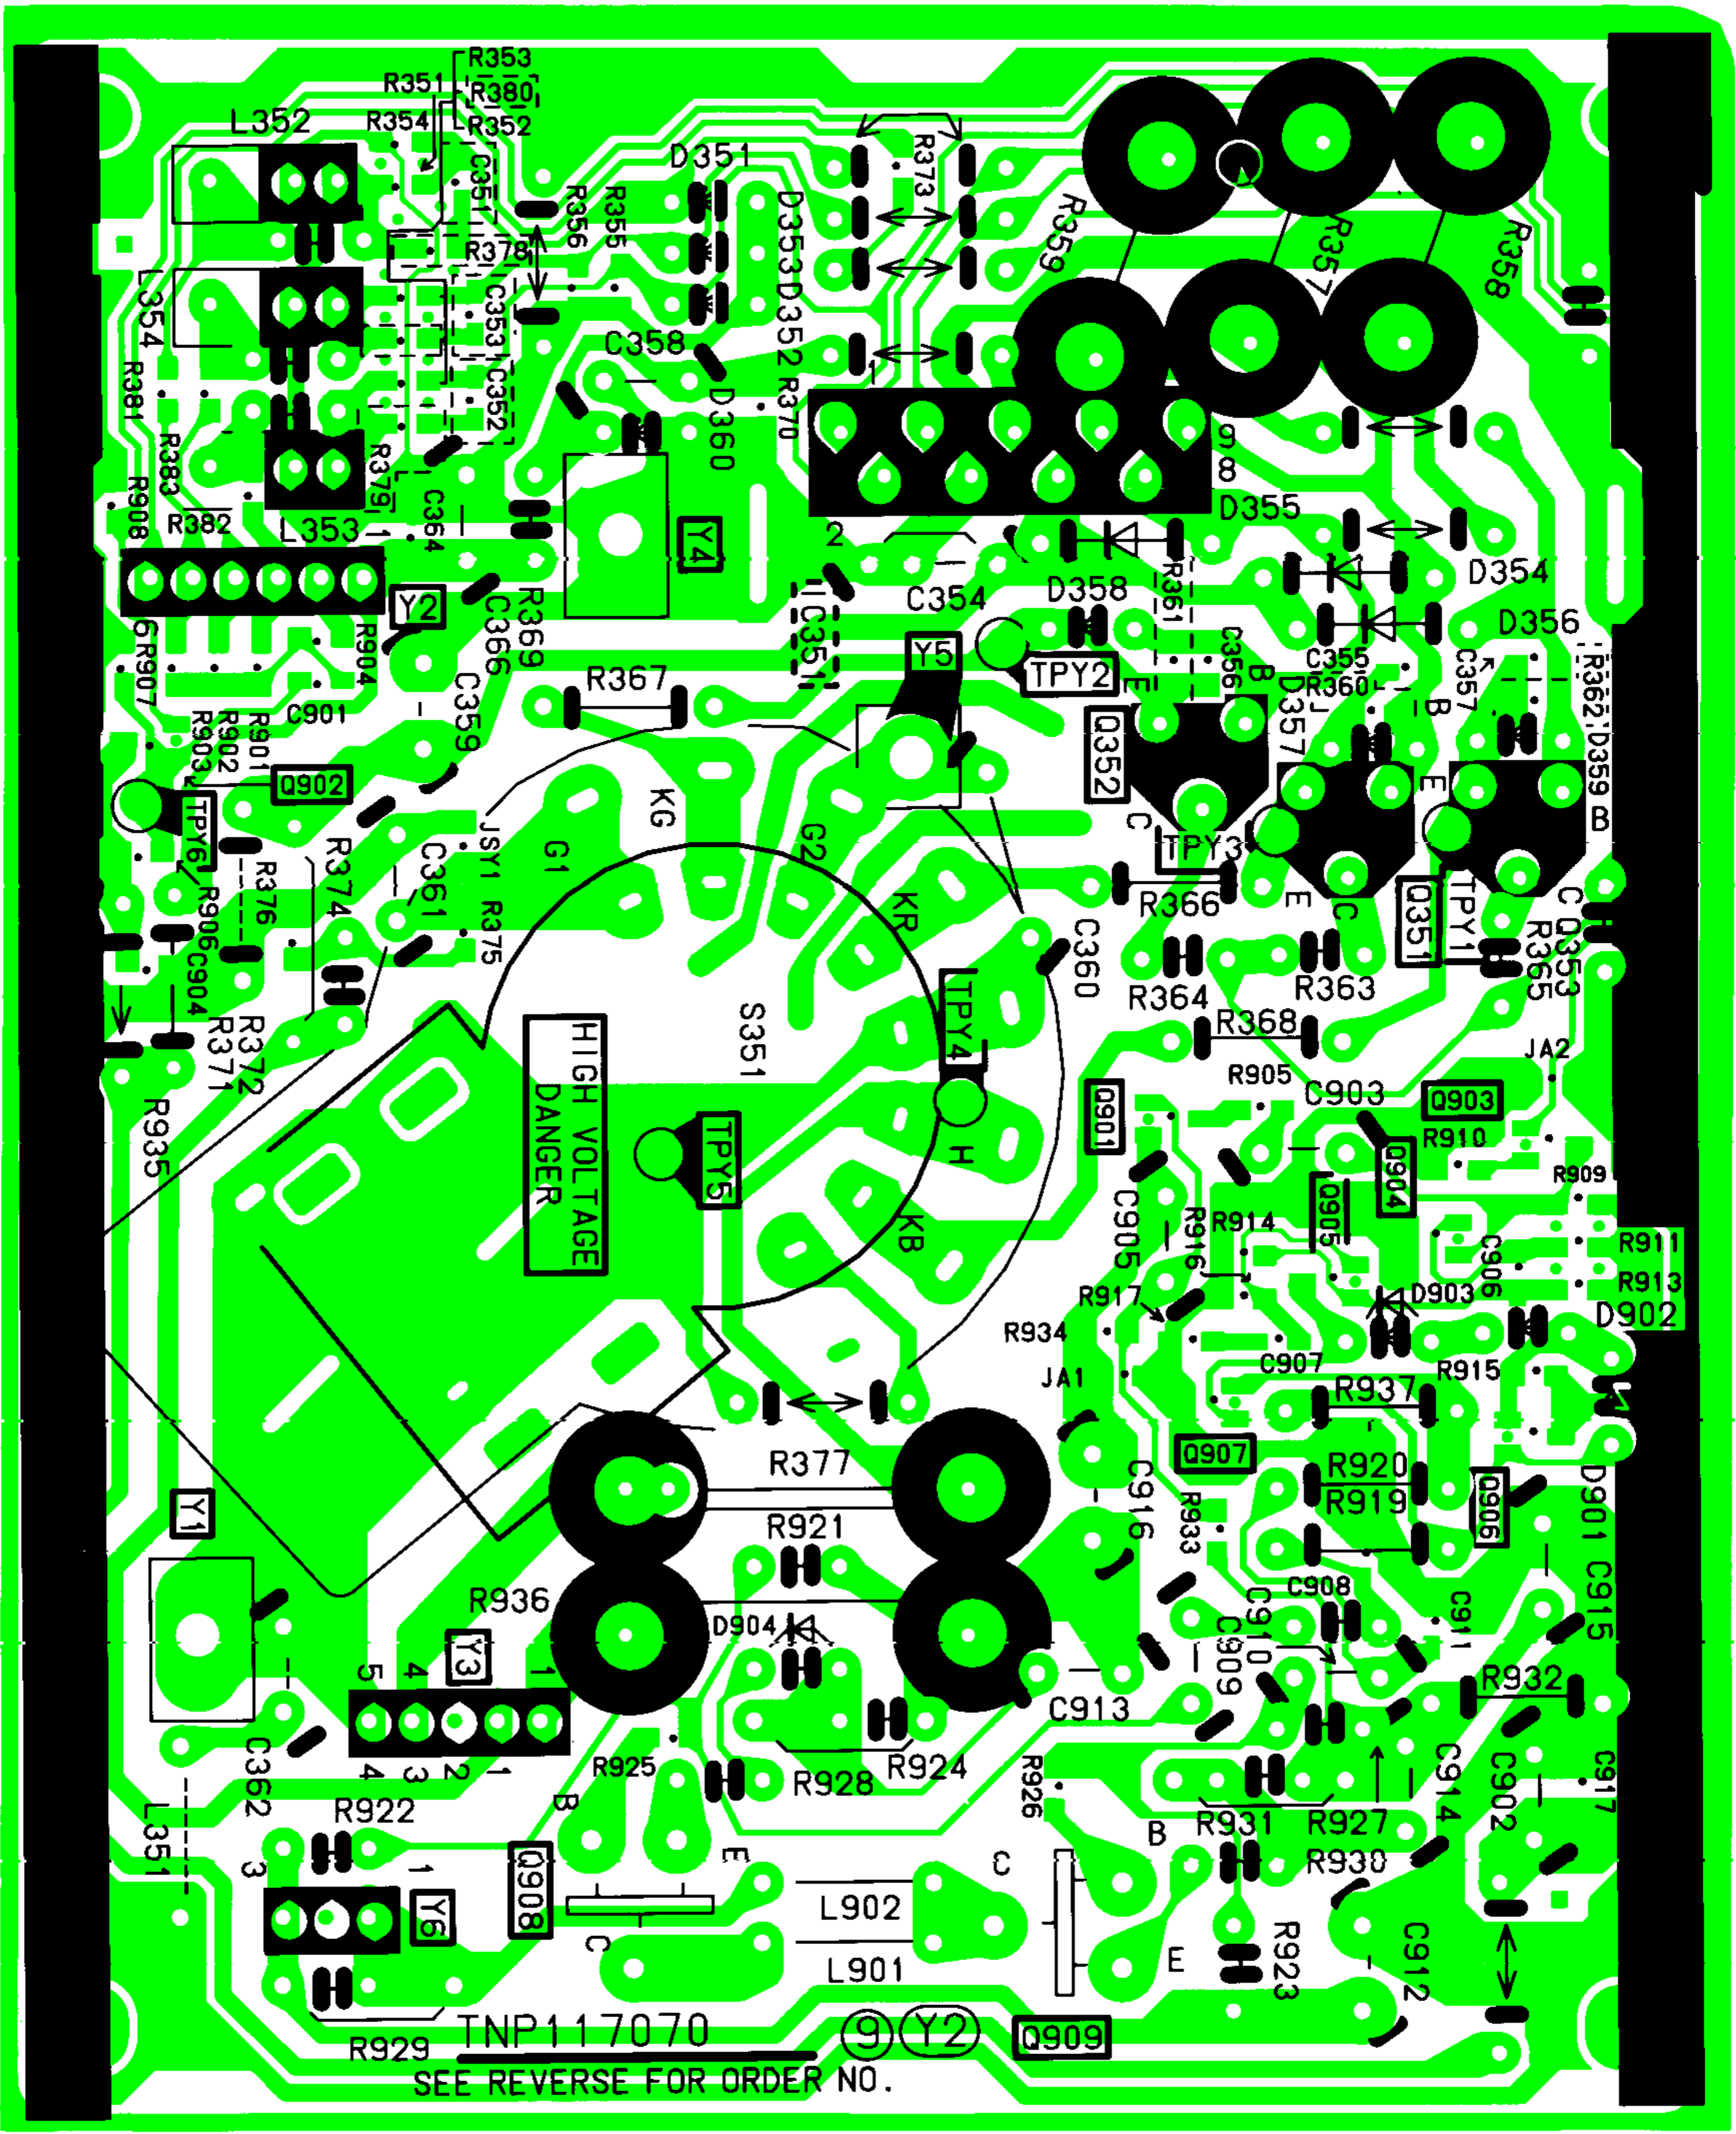



HIGH VOLTAGE  
DANGER

R929 TNP117070

SEE REVERSE FOR ORDER NO.

9 Y2

Q909