

# TX-28/25XD60F Service Manual

Safety

Specifications

Parts List

Service  
Information

Adjustments

Self Check

Service Hints

Mechanical  
View

Disassembly

Location of  
Controls

Waveforms

Block Diagrams

Schematic Diagrams

PCB Views

## Service Support

Service and repair of this product is supported by Panasonic's LUCI interface.

This interface provides a link between the TV and a standard PC to allow a number of diagnostic and control functions to be performed.

For more details contact your local Panasonic company.

  
BACK

EXIT

Video / Audio

Control



BACK

B2 - PCB

D - PCB

E - PCB

F2 - PCB

H - PCB

Y - PCB

B2 - Schematic

D - Schematic

E - Schematic

F2 - Schematic

H - Schematic

M3 - Schematic

Y - Schematic



BACK



BACK

# Service Manual



## Colour Television

# TX-28XD60F TX-25XD60F

# EURO-3H Chassis

### SPECIFICATIONS

(Information in brackets {} refers to TX-25XD60F)

**Power Source :** 220-240V AC, 50Hz  
**Power Consumption :** 155W {150W}  
**Standby Power Consumption :** 1W  
**Aerial Impedance :** 75Ω unbalanced, Coaxial Type  
**Receiving System :** PAL-I, B, G, D, K, H, PAL 60, SECAM B, G, D, K, L/L', MNTSC, NTSC (AV Only)

#### Receiving Channels :

VHF E2 - E12	VHF H1 - H2 (ITALY)
VHF A - H (ITALY)	VHF R1 - R2
VHF R3 - R5	VHF R6 - R12
UHF E21 - E69	CATV (S01 - S05)
CATV S1 - S10 (M1 - M10)	CATV S11 - S20 (U1 - U10)
CATV S21 - S41 (HYPERBAND)	

#### Intermediate Frequency :

Video	38.9 MHz, 34MHz
Sound	32.9MHz, 33.4 MHz
	33.16 MHz, 32.4 MHz, 40.4MHz
Colour	34.47 MHz, 34.5 MHz, 34.65 MHz

#### Video / Audio Terminals :

<b>AUDIO MONITOR OUT</b>	Audio(RCA x 2)	500mV rms, 1kΩ
AV1 IN	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 10kΩ
	RGB (21 pin)	
AV1 OUT	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 1kΩ
AV2 IN	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 10kΩ
	S-Video IN	Y : 1V p-p 75Ω
	(21 pin)	C : 0.3V p-p 75Ω
AV2 OUT	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 1kΩ
AV3 IN	Audio (RCA x 2)	500mV rms, 10kΩ
	Video (RCA x 1)	1V p-p 75Ω
<b>High Voltage :</b>		28.5kV ± 1kV (zero beam current)

#### Audio Output :

Speaker 2 x 20W (Music Power)  
8 Ω Impedance

Headphones 8 Ω Impedance

**Accessories supplied :** Remote Control  
2 x R6 (UM3) Batteries

#### Dimensions :

Height : 596.5 mm {550mm}  
 Width : 778 mm {730mm}  
 Depth : 481.5 mm {479mm}  
**Net Weight :** 35kg {30kg}

Specifications are subject to change without notice.  
 Weight and dimensions shown are approximate.

### TECHNISCHE DATEN

(Werte in Klammern gelten {} nur für TX-25XD60F)

**Netzspannung :** 220-240V AC, 50Hz  
**Leistungsaufnahme :** 155W {150W}  
**Standby Leistungsaufnahme :** 1W  
**Antennenimpedanz :** 75Ω asymmetrisch, Koaxial - Typ  
**Empfangssystem :** PAL-I, B, G, D, K, H, PAL 60, SECAM B, G, D, K, L/L', MNTSC, NTSC (nur AV Eingang)

#### Empfangsbereiche :

VHF E2 - E12	VHF H1 - H2 (ITALY)
VHF A - H (ITALY)	VHF R1 - R2
VHF R3 - R5	VHF R6 - R12
UHF E21 - E69	CATV (S01 - S05)
CATV S1 - S10 (M1 - M10)	CATV S11 - S20 (U1 - U10)
CATV S21 - S41 (HYPERBAND)	

#### Zwischenfrequenz :

Video	38.9 MHz, 34MHz
Sound	32.9MHz, 33.4 MHz
	33.16 MHz, 32.4 MHz, 40.4MHz
Colour	34.47 MHz, 34.5 MHz, 34.65 MHz

#### Colour

#### Video / Audio Anschlüsse :

<b>AUDIO MONITOR OUT</b>	Audio(RCA x 2)	500mV rms, 1kΩ
AV1 EINGANG	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 10kΩ
	RGB (21 pin)	
AV1 AUSGANG	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 1kΩ
AV2 EINGANG	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 10kΩ
	S-Video IN	Y : 1V p-p 75Ω
	(21 pin)	C : 0.3V p-p 75Ω
AV2 AUSGANG	Video (21 pin)	1V p-p 75Ω
	Audio (21 pin)	500mV rms 1kΩ
AV3 EINGANG	Audio (RCA x 2)	500mV rms, 10kΩ
	Video (RCA x 1)	1V p-p 75Ω
<b>Hochspannung :</b>		28.5kV ± 1kV (bei Nullstrahlstrom)

#### Ton Ausgangsleistung :

2 x 20W (Musikleistung)

**Lautsprecher** 8 Ω Impedanz

Kopfhörer 8 Ω Impedanz

**Mitgel. Zubehör :** Fernbedienung

2 x R6 (UM3) Batterien

#### Abmessungen :

Höhe : 596.5 mm {550mm}

Breite : 778 mm {730mm}

Tiefe : 481.5 mm {479mm}

**Gewicht :** 35kg {30kg}

Änderungen der technischen Daten vorbehalten.

Gewichte und Abmessungen sind Näherungsangaben.

## CONTENTS

SAFETY PRECAUTIONS .....
SERVICE HINTS .....
SERVICE MODE .....
ADJUSTMENT PROCEDURE .....
SELF CHECK .....
ALIGNMENT SETTINGS .....
WAVEFORM PATTERN TABLE .....
BLOCK DIAGRAMS .....
PARTS LOCATION .....
REPLACEMENT PARTS LIST .....
CONDUCTOR VIEWS .....
SCHEMATIC DIAGRAMS .....

## SAFETY PRECAUTIONS

### GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the AC supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the AC outlet.
5. Potentials as high as 29.5kV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the picture tube to the chassis before handling the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazards.

### LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis the reading must be infinite.

## INHALT

SICHERHEITSVORKEHRUNGEN .....
SERVICE HINWEISE .....
ABGLEICHVERFAHREN .....
ABGLEICH .....
SELF CHECK .....
ABGLEICHTABELLE .....
SIGNALE TABELLE .....
SCHALTBILD BLOCK .....
EXPLOSIONSZEICHNUNG .....
ERSATZTEILLISTE .....
ANSICHT DER LEITERBAHNEN .....
SCHALTBILD SCHEMA .....

## SICHERHEITSVORKEHRUNGEN

### ALLGEMEINE RICHTLINIEN

1. Es ist empfehlenswert einen Trenntransformator in die Stromversorgung zu schalten, bevor Reparaturen an einem Gerät vorgenommen werden, dessen Chassis unter Spannung steht.
2. Bei der Durchführung von Servicearbeiten dürfen die ursprünglichen Kabelanschlüsse nicht vertauscht werden. Dies gilt insbesondere für die Anschlüsse im Hochspannungsteil. Hat sich ein Kurzschluß ereignet, dann sind alle Teile, an denen Spuren von Überhitzung sichtbar sind, auszuwechseln.
3. Nach Beenden der Servicearbeiten ist sicherzustellen, daß alle Sicherheitsvorrichtungen, wie Isolationsstege, Isolationspapiere, Abschirmungen und Isolations R-C Glieder wieder richtig eingesetzt sind.
4. Wenn der Fernseher während längerer Zeit nicht in Betrieb gesetzt wird, sollte der Netzstecker aus der Netzsteckdose gezogen werden.
5. Im Betrieb sind Spannungen bis zu 29.5kV in diesem Gerät vorhanden. Die Inbetriebnahme des Fernsehers ohne aufgesetzte Rückwand bringt die Gefahr eines elektrischen Schlages von der Fernseher – Stromversorgung mit sich. Servicearbeiten sollten daher auch nie durch Personen versucht werden, die nicht in vollem Umfang mit den Sicherheitsvorkehrungen beim Umgang mit Hochspannungsgeräten vertraut sind. Vor der Handhabung mit der Bildröhre ist die Anode der Bildröhre immer an dem Empfängerchassis zu entladen.
6. Nach Beenden der Servicearbeiten sind die folgenden Kriechstrom-Prüfungen durchzuführen, um den Kunden vor der Gefahr eines elektrischen Schlages zu schützen.

### MESSUNG DES ISOLATIONSWIDERSTANDES IM ABGESCHALTETEN ZUSTAND

1. Den Netzstecker aus der Netzsteckdose ziehen und die beiden Steckerstifte kurzschließen.
2. Den Geräteschalter des Fernsehgerätes einschalten.
3. Mit einem Ohmmeter den Widerstandswert zwischen dem überbrückten Netzkabelstecker und jedem zugänglichen Metallteil am Gehäuse des Fernsehgerätes, wie Schraubenköpfe, Antennen, Achsen der Regler, Griffassungen usw. messen. Wenn ein zugängliches Metallteil keine Rückleitung zum Chassis hat, muß die Anzeige unendlich betragen.

## LEAKAGE CURRENT HOT CHECK

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 2kΩ 10W resistor in series with an exposed metallic part on the receiver and an earth such as a water pipe.
3. Use an AC voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed Metallic part and check the voltage at each point.
5. Reverse the AC plug at the outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 1.4 Vrms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

## MESSUNG DES KRIECHSTROMS IM EINGESCHALTETEN ZUSTAND

1. Den Netzstecker direkt in eine Netsteckdose stecken. Für diese Messung keinen Trenntransformator verwenden.
2. Einen 2k Ω / 10W–Widerstand in Serie mit einem von außen zugänglichen Metallteil am Fernsehgerät und einer guten, Erdung z.B Wasserleitung, anschließen.
3. Ein Wechselstrom–Voltmeter mit einem Meßbereich von 1000 Ohm.Volt oder größer verwenden, um die Spannung über den Widerstand zu messen.
4. Jedes zugängliche Metallteil prüfen, und an jedem Punkt dies Spannung messen.
5. Den Netzstecker umgekehrt in die Steckdose stecken und jede der obigen Messungen wiederholen.
6. Die Spannung darf an keinem der Punkte 1.4V eff. überschreiten. Wird dieser Wert nicht eingehalten, besteht die Gefahr eines elektrischen Schlages, und das Fernsehgerät sollte daher repariert und nachgeprüft werden, bevor es an den Kunden zurückgegeben wird.

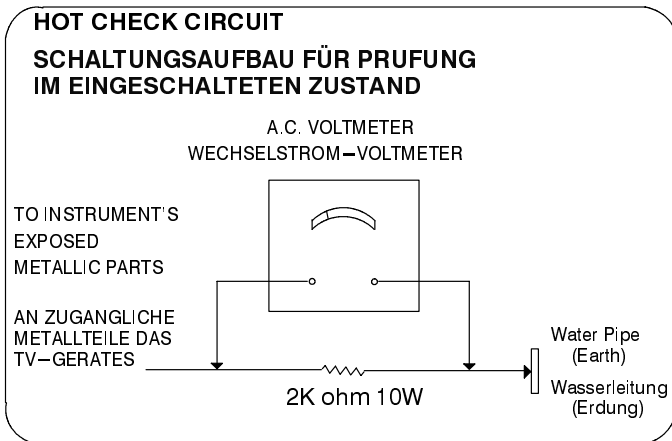


Fig.1.  
Abb.1.

## X–RADIATION WARNING

1. The potential sources of X–Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service ensure that the jig is capable of handling 29.5kV without causing X–Radiation.

## NOTE : It is important to use an accurate periodically calibrated high voltage meter

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate 28.5kV ± 1kV if the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X–Radiation possibility, it is essential to use the specified tube.

## RÖNTGENSTRAHLUNG ACHTUNG :

1. Potentielle Quellen von Röntgenstrahlung in Fernsehgeräten sind das Hochspannungsteil und die Bildröhre.
2. Bei Verwendung eines Bildröhren–Prüfgerätes für den Service ist sicherzustellen, daß es für die Belastung von 29.5kV geeignet ist, ohne daß eine Röntgenstrahlung verursacht wird.


## ANMERKUNG : Es ist wichtig, daß ein präzises, regelmäßig geprüftes Voltmeter verwendet wird.

1. Helligkeit auf Minimum stellen.
2. Die Hochspannung messen. Die Anzeige des Instrumentes sollte 28.5kV ± 1kV Falls die Anzeige diese Toleranzgrenzen überschreitet, ist die sofortige Behebung nötig, um die Möglichkeit vorzeitigen Komponentenausfalls zu verhüten.
3. Um die Möglichkeit von Röntgenstrahlung zu begrenzen, ist es wichtig, daß nur die vorgeschriebene Bildröhre verwendet wird.

## SERVICE HINTS

### HOW TO REMOVE THE REAR COVER

1. Remove the 9 screws (A) as shown in Fig.2/Fig.3.

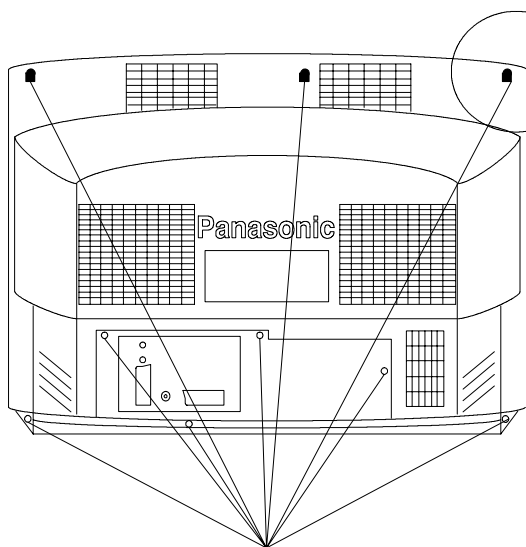


SCREWS A  
SCHRAUBEN A

Fig. 2.  
Abb. 2.

## SERVICE HINWEISE

### ENTFERNEN DER GERÄTERÜCKWAND

1. Die 9 Schrauben (A) entfernen, siehe Abb.2/Abb.3.




SCREW  
SCHRAUBEN

Fig. 3.  
Abb. 3.

## LOCATION OF CONTROLS

## LAGE DER EINSTELLREGLER

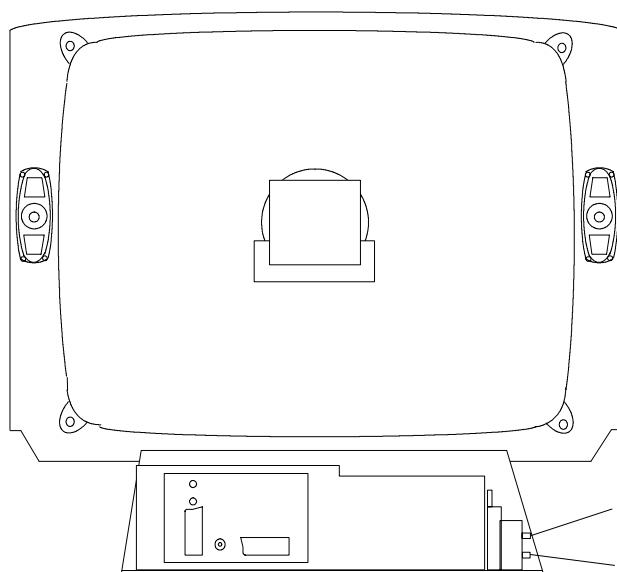

E P.C.B.

Fig. 4.  
Abb. 4.

FOCUS  
FOKUSREGLER

SCREEN  
SCHIRMGITTERREGLER

## SERVICE MODE

The remote control is used for entering and storing adjustments, with the exception of cut-off adjustments which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the CCU variants as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the Reveal button on the remote control and at the same time press the Volume down on the customer controls at the front of the TV, this will place the TV into the Service Mode.
2. Press the RED / GREEN buttons to step down / up through the functions.
3. Press the YELLOW / BLUE buttons to alter the function values.
4. Press the STORE button on the preset panel after each adjustment has been made to store the required values.
5. To exit the Service Mode press the Normalisation button.

**NOTE:** This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels and analogue levels into the Memory Pack and then upload them onto another EURO-3H TV set.

## USING THE MEMORY PACK

### TV to Memory Pack process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:—

Program  
External>>TV

3. Press the blue button on the remote control. The screen will show:—

Program  
TV>>External

4. Press the STORE button on the TV. The screen will show:—

Storing

5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2-3 minutes to complete and when finished the screen will show:—

OK!

### Memory Pack to TV Process

1. Plug the memory pack into the lower of the two 21 pin terminals at the back of the TV and switch the TV on. If the TV has only one 21 pin connector then this will be able to accept the memory pack.
2. Go into the Service Mode as explained above. The screen will show:—

Program  
External>>TV

3. Press the STORE button on the TV. The screen will show:—

Loading

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2-3 minutes to complete and when finished the screen will show:—

OK!

5. The tuning information from the Memory Pack has now been copied into the TV
6. To exit from the Service Mode switch off the TV.
7. The process has now been completed and the Memory Pack can now be removed.

## Errors

If an error occurs while using the Memory Pack the TV will detect this and the screen will show:—

Program  
Error!

If this happens then switch off the TV and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

# ABGLEICHVERFAHREN

Die Fernbedienung dient zum Eingeben und Abspeichern der Einstellwerte, mit Ausnahme der Sperrpunkteinstellung, die grundsätzlich vor den hier beschriebenen Einstellungen vorgenommen werden muss. Die Einstellung erfolgt entsprechend dem Bildschirm–Display. Auf dem Bildschirm–Display erscheinen auch die CCU–Varianten sowie die ungefähren Einstellwerte. Die Einstellfolge für den Service–Modus ist nachstehend beschrieben.

- Um in den Service–Mode zu gelangen, gehen sie bitte wie folgt vor.
  - Stellen sie im Toneinstellungs–Menü die Bässe auf Maximum und die Höhen auf Minimum.
  - Halten sie die REVEAL–Taste auf der Fernbedienung gedrückt und drücken zusätzlich die Taste –/v im Bedienteil des TV–Gerätes. Auf dem Bildschirm erscheint die entsprechende Anzeige für den Service–Mode.
- Die einzelnen Funktionen mit Hilfe der ROTEN und GRÜNEN Taste anwählen.
- Mit der GELBEN und BLAUEN Taste die Werte der einzelnen Funktionen ändern.
- Nach jeder Einstellung die Taste STR auf der Fernbedienung oder am Bedienfeld drücken, um die geänderten Werte abzuspeichern.
- Zum Verlassen des Service–Modus die "N"–Taste auf der Fernbedienung drücken

**HINWEIS:** Dieses FS–Gerät bietet auch die Möglichkeit eines Memory Pack, mit dem Sie die gewählten Fernsehkanäle abspeichern und auf jedes beliebige EURO3H FS –Gerät umkopieren können.

## Kopieren der Einstelldaten vom FS–Gerät in das Memory Pack

- Das Memory Pack in die AV2–Buchse an der Rückseite des FS–Gerätes stecken und das Gerät einschalten.
- Wie schon oben beschrieben auf Service–Modus umschalten. Auf dem Bildschirm erscheint:

Program  
External>>TV

- Nun die blaue Taste an der Fernbedienung betätigen. Auf dem Bildschirm erscheint:

Program  
TV>>External

- Die Taste STORE am Fernseher drücken. Der Bildschirm meldet nun:

Storing

- Die im FS–Gerät abgespeicherten Kanal–Einstelldaten werden nun in das Memory Pack überspielt. bei abgeschlossener Datenübertragung meldet der Bildschirm:

OK!

## Kopieren der Einstelldaten vom Memory Pack in das FS–Gerät

- Das Memory Pack in die AV2–Buchse an der Rückseite des FS–Gerätes stecken und das Gerät einschalten.
- Wie schon oben beschrieben auf Service–Modus umschalten. Auf dem Bildschirm erscheint:

Program  
External>>TV

- Die Taste STORE am Fernseher drücken. Der Bildschirm meldet nun:

Loading

- Die im Memory Pack abgespeicherten Einstelldaten werden nun in das FS–Gerät überspielt. bei abgeschlossener Datenübertragung meldet der Bildschirm:

OK!

- Die Kanal–Einstelldaten sind damit vom Memory Pack in das FS–Gerät überspielt.
- Zum Verlassen des Service–Modus die "N"–Taste auf der Fernbedienung drücken
- Der Kopiervorgang ist somit abgeschlossen, und das Memory Pack kann von der Steckerleiste abgezogen werden.

## Fehler

Falls beim Gebrauch des Memory Packs Fehler auftreten, zeigt das FS–Gerät dies auf dem Bildschirm mit der folgenden Meldung an:

Program  
Error!

In diesem Fall muss der Service–Modus durch Drücken der "N"–Taste auf der Fernbedienung verlassen und anschliessend der Vorgang wiederholt werden. Falls weiterhin Fehlermeldungen erscheinen, müssen die Anschlusskontakte zwischen FS–Gerät und Memory Pack sowie die 9V Batterie im Memory Pack kontrolliert werden.



## ADJUSTMENT PROCEDURE

Item/Preparation	Adjustments																				
<b>Supply Voltage Check</b> 1. Receive a standard test pattern 2. Set the controls: Brightness      Minimum Contrast         Minimum Volume            Minimum	1. Confirm the following voltages. <table style="width: 100%; border: none;"> <tr> <td style="text-align: center;"><b>E PCB</b></td> <td style="text-align: center;"><b>D PCB</b></td> </tr> <tr> <td><b>U5B</b> 5 ± 0.5V</td> <td><b>U5A</b> 5.1 ± 0.12V</td> </tr> <tr> <td><b>U8A</b> 8 ± 0.5V</td> <td><b>U5SB</b> 5 ± 0.25V</td> </tr> <tr> <td><b>U9</b> 9 ± 0.5V</td> <td><b>TP1</b> 15 ± 0.7V</td> </tr> <tr> <td><b>U12</b> 11.8 ± 0.5V</td> <td><b>U16</b> 18.2 ± 0.8V</td> </tr> <tr> <td></td> <td><b>U22</b> 22.5 ± 1V</td> </tr> <tr> <td></td> <td><b>U38</b> 39 ± 1V</td> </tr> <tr> <td></td> <td><b>TP2</b> 54 ± 2.5V</td> </tr> <tr> <td></td> <td><b>U150</b> 150 ± 1V</td> </tr> <tr> <td></td> <td><b>U200</b> 200 ± 10V</td> </tr> </table>	<b>E PCB</b>	<b>D PCB</b>	<b>U5B</b> 5 ± 0.5V	<b>U5A</b> 5.1 ± 0.12V	<b>U8A</b> 8 ± 0.5V	<b>U5SB</b> 5 ± 0.25V	<b>U9</b> 9 ± 0.5V	<b>TP1</b> 15 ± 0.7V	<b>U12</b> 11.8 ± 0.5V	<b>U16</b> 18.2 ± 0.8V		<b>U22</b> 22.5 ± 1V		<b>U38</b> 39 ± 1V		<b>TP2</b> 54 ± 2.5V		<b>U150</b> 150 ± 1V		<b>U200</b> 200 ± 10V
<b>E PCB</b>	<b>D PCB</b>																				
<b>U5B</b> 5 ± 0.5V	<b>U5A</b> 5.1 ± 0.12V																				
<b>U8A</b> 8 ± 0.5V	<b>U5SB</b> 5 ± 0.25V																				
<b>U9</b> 9 ± 0.5V	<b>TP1</b> 15 ± 0.7V																				
<b>U12</b> 11.8 ± 0.5V	<b>U16</b> 18.2 ± 0.8V																				
	<b>U22</b> 22.5 ± 1V																				
	<b>U38</b> 39 ± 1V																				
	<b>TP2</b> 54 ± 2.5V																				
	<b>U150</b> 150 ± 1V																				
	<b>U200</b> 200 ± 10V																				

## ABGLEICH

Vorbereitung	Abgleich																				
<b>Prüfen der Versorgungsspannung</b> 1. Testbild empfangen. 2. Helligkeit auf Minimum Kontrast auf Minimum Lautstärke auf Minimum	1. Folgende Spannungen sind zu überprüfen : <table style="width: 100%; border: none;"> <tr> <td style="text-align: center;"><b>E PCB</b></td> <td style="text-align: center;"><b>D PCB</b></td> </tr> <tr> <td><b>U5B</b> 5 ± 0.5V</td> <td><b>U5A</b> 5.1 ± 0.12V</td> </tr> <tr> <td><b>U8A</b> 8 ± 0.5V</td> <td><b>U5SB</b> 5 ± 0.25V</td> </tr> <tr> <td><b>U9</b> 9 ± 0.5V</td> <td><b>TP1</b> 15 ± 0.7V</td> </tr> <tr> <td><b>U12</b> 11.8 ± 0.5V</td> <td><b>U16</b> 18.2 ± 0.8V</td> </tr> <tr> <td></td> <td><b>U22</b> 22.5 ± 1V</td> </tr> <tr> <td></td> <td><b>U38</b> 39 ± 1V</td> </tr> <tr> <td></td> <td><b>TP2</b> 54 ± 2.5V</td> </tr> <tr> <td></td> <td><b>U150</b> 150 ± 1V</td> </tr> <tr> <td></td> <td><b>U200</b> 200 ± 10V</td> </tr> </table>	<b>E PCB</b>	<b>D PCB</b>	<b>U5B</b> 5 ± 0.5V	<b>U5A</b> 5.1 ± 0.12V	<b>U8A</b> 8 ± 0.5V	<b>U5SB</b> 5 ± 0.25V	<b>U9</b> 9 ± 0.5V	<b>TP1</b> 15 ± 0.7V	<b>U12</b> 11.8 ± 0.5V	<b>U16</b> 18.2 ± 0.8V		<b>U22</b> 22.5 ± 1V		<b>U38</b> 39 ± 1V		<b>TP2</b> 54 ± 2.5V		<b>U150</b> 150 ± 1V		<b>U200</b> 200 ± 10V
<b>E PCB</b>	<b>D PCB</b>																				
<b>U5B</b> 5 ± 0.5V	<b>U5A</b> 5.1 ± 0.12V																				
<b>U8A</b> 8 ± 0.5V	<b>U5SB</b> 5 ± 0.25V																				
<b>U9</b> 9 ± 0.5V	<b>TP1</b> 15 ± 0.7V																				
<b>U12</b> 11.8 ± 0.5V	<b>U16</b> 18.2 ± 0.8V																				
	<b>U22</b> 22.5 ± 1V																				
	<b>U38</b> 39 ± 1V																				
	<b>TP2</b> 54 ± 2.5V																				
	<b>U150</b> 150 ± 1V																				
	<b>U200</b> 200 ± 10V																				

## SELF CHECK

Self check is used to automatically check the Bus lines and Hexadecimal code of the TV set.

To enter the Self Check mode press Function down button, on the Preset Panel, at the same time pressing the Status button, on the Remote Control, and the screen will show: –

When exiting Self Check the customer settings will return to factory setup.

## SELBSTDIAGNOSE

1) Die Selbstdiagnose dient zum automatischen Prüfen der Bus-Leitungen sowie des Hexadezimalcodes des FS-Geräts. Zum Umschalten auf Selbstdiagnose nach dem Drücken der "F"-Taste die "Lautstärke Minus" Taste am Bedienfeld des FS-Geräts und gleichzeitig die Taste "Status" an der Fernbedienung drücken; auf dem Bildschirm erscheint hierauf: –

2) Nach der Selbstdiagnose wird das Gerät automatisch auf sämtliche werkseitigen Standardeinstellungen zurückgesetzt: –

<table style="width: 100%; border: none;"> <tr><td>0 — ok</td><td>Test Byte</td></tr> <tr><td>1 — ok</td><td>Lst Power</td></tr> <tr><td>2 — ok</td><td>U5 Det</td></tr> <tr><td>3 — ok</td><td>Protector</td></tr> <tr><td>4 — ok</td><td>Not Used</td></tr> <tr><td>5 — ok</td><td>Not Used</td></tr> <tr><td>6 — ok</td><td>Not Used</td></tr> <tr><td>7 — ok</td><td>Not Used</td></tr> </table>	0 — ok	Test Byte	1 — ok	Lst Power	2 — ok	U5 Det	3 — ok	Protector	4 — ok	Not Used	5 — ok	Not Used	6 — ok	Not Used	7 — ok	Not Used	<table style="width: 100%; border: none;"> <tr><td>8 — ok</td><td>Col Decoder (M)</td></tr> <tr><td>9 — ok</td><td>Clock generator</td></tr> <tr><td>10 — ok</td><td>V – Processor</td></tr> <tr><td>11 — ok</td><td>DFU</td></tr> <tr><td>12 — ok</td><td>Display Processor</td></tr> <tr><td>13 — ok</td><td>RGB Processor</td></tr> <tr><td>14 — ok</td><td>Deflection IC</td></tr> <tr><td>15 — ok</td><td>MSP</td></tr> </table>	8 — ok	Col Decoder (M)	9 — ok	Clock generator	10 — ok	V – Processor	11 — ok	DFU	12 — ok	Display Processor	13 — ok	RGB Processor	14 — ok	Deflection IC	15 — ok	MSP	<table style="width: 100%; border: none;"> <tr><td>16 — --</td><td>Col Decoder (P)</td></tr> <tr><td>17 — --</td><td>Q – PIP</td></tr> <tr><td>18 — ok</td><td>Not Used</td></tr> <tr><td>19 — ok</td><td>Not Used</td></tr> <tr><td>20 — ok</td><td>EAROM</td></tr> <tr><td>21 — ok</td><td>Audio Matrix</td></tr> <tr><td>22 — ok</td><td>Video Matrix</td></tr> <tr><td>23 — ok</td><td>Tuner</td></tr> </table>	16 — --	Col Decoder (P)	17 — --	Q – PIP	18 — ok	Not Used	19 — ok	Not Used	20 — ok	EAROM	21 — ok	Audio Matrix	22 — ok	Video Matrix	23 — ok	Tuner	<p style="text-align: center;">Hex codes</p> <table style="width: 100%; border: none;"> <tr><td style="text-align: center;">09</td></tr> <tr><td style="text-align: center;">73</td></tr> <tr><td style="text-align: center;">A4</td></tr> <tr><td style="text-align: center;">BF</td></tr> <tr><td style="text-align: center;">BB</td></tr> <tr><td style="text-align: center;">BF</td></tr> <tr><td style="text-align: center;">33</td></tr> </table>	09	73	A4	BF	BB	BF	33
0 — ok	Test Byte																																																									
1 — ok	Lst Power																																																									
2 — ok	U5 Det																																																									
3 — ok	Protector																																																									
4 — ok	Not Used																																																									
5 — ok	Not Used																																																									
6 — ok	Not Used																																																									
7 — ok	Not Used																																																									
8 — ok	Col Decoder (M)																																																									
9 — ok	Clock generator																																																									
10 — ok	V – Processor																																																									
11 — ok	DFU																																																									
12 — ok	Display Processor																																																									
13 — ok	RGB Processor																																																									
14 — ok	Deflection IC																																																									
15 — ok	MSP																																																									
16 — --	Col Decoder (P)																																																									
17 — --	Q – PIP																																																									
18 — ok	Not Used																																																									
19 — ok	Not Used																																																									
20 — ok	EAROM																																																									
21 — ok	Audio Matrix																																																									
22 — ok	Video Matrix																																																									
23 — ok	Tuner																																																									
09																																																										
73																																																										
A4																																																										
BF																																																										
BB																																																										
BF																																																										
33																																																										

If the CCU ports have been checked and found to be incorrect or not located then "--" will appear in place of "OK".

Wenn der Hauptprozessor (CCU) an den Anschlüssen einen

Fehler erkennt, oder der entsprechende Anschluss nicht belegt ist, zeigt die entsprechende Position -- anstelle von OK an.

## Alignment Settings

(The figures used below are nominal and used for representative purposes only)

The remote control is used for entering and storing adjustments. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press and hold the Reveal button on the remote control and at the same time press the  $\text{--/v}$  button on the customer controls at the front of the TV, this will place the TV into the Service Mode.
2. Press the RED / GREEN buttons to step up / down through the functions.
3. Press the YELLOW / BLUE buttons to alter the function values.
4. Press the STORE button after each adjustment has been made to store the required values.
5. To exit the Service Mode press the Normalisation button.

Alignment Function		Settings / Special features
Vertical amplitude	V-AMP 038	Optimum setting
Vertical linearity	V-LIN 022	
V-Pos.	V-POS 005	Optimum setting
Horizontal amplitude	H-AMP 043	Optimum setting
Horizontal position	H-POS 035	
EW-amplitude	E/W-AMP 1 020	Optimum setting
EW-amplitude	E/W-AMP 2 015	Optimum setting
Trapezium-comp	TRAPEZ-1 004	Optimum setting
Vert. DC.	VERT. D.C. 008	Not to be adjusted.
Text Position	TEXT POSITION 060	Optimum setting
Cutoff	---	Enter Service Mode and step through to Cutoff, connect an oscilloscope to the Blue Cathode and adjust the screen VR of the FBT to get $150\pm 5V$ at the base of the Cutoff pulse.
Cutoff RGB	CUTOFF RGB 032 032 032	Press the GREEN button to step through these settings. Adjust for optimum.
White RGB	WHITE RGB 032 032 032	Press the GREEN button to step through these settings. Adjust for optimum.
Sub Brightness	SUB BRIGHT 000	Optimum setting

## Abgleichtabelle

(Die angegebenen Werte sind Mittelwerte und Können individuell nach oben oder unten nach dem korrekten Abgleich abweichen)














Die Fernbedienung dient zum Eingeben und Abspeichern der Einstellwerte. Die Einstellfolge für den Service-Modus ist nachstehend beschrieben.

1. Den Tiefenregler auf Höchststellung und den Höhenregler auf Mindeststellung stellen. Nachdem die F-Taste am Bedienfeld des FS-Gerätes gedrückt wurde, die Die Taste "Lautstärke Minus" am FS-Gerät drücken und gleichzeitig die Taste "Reveal" auf der Fernbedienung betätigen. Hierdurch wird das FS-Gerät auf Service-Modus geschaltet.
2. Die einzelnen Funktionen mit Hilfe der ROTEN und GRÜNEN Taste anwählen.
3. Mit der GELBEN und BLAUEN Taste die Werte der einzelnen Funktionen ändern.
4. Nach jeder Einstellung die Taste STR auf der Fernbedienung oder am Bedienfeld drücken, um die geänderten Werte abzuspeichern.
5. Zum Verlassen des Service-Modus die "N"-Taste auf der Fernbedienung drücken

Abgleichfunktion		Einstellung/Besondere Merkmale
Vertikale Amplitude	V-AMP 038	Optimale Einstellung
Vertical linearität	V-LIN 022	
V-Pos.	V-POS 005	Optimale Einstellung
Horizontale Amplitude	H-AMP 043	Optimale Einstellung
Horizontale position	H-POS 035	
OW-amplitude	E/W-AMP 1 020	Optimale Einstellung
OW-amplitude	E/W-AMP 2 015	Optimale Einstellung
Trapez-Kompensation	TRAPEZ-1 004	Optimale Einstellung
Vert. DC.	VERT. D.C. 008	Nicht einstellen
Text Position	TEXT POSITION 060	Optimale Einstellung
Cutoff	---	Den Service Mode aktivieren und auf Cutoff gehen. Oscilloscope an Blaukathode anschliessen und mit dem "Screen" -Regler am Zeilentrafo die untere Spitze des Cutoff-Pulses auf 150V +/- 5V einstellen.
Cutoff RGB	CUTOFF RGB 032 032 032	Die Einstellungen mit Hilfe der GRÜNEN Taste anwählen. Optimale Einstellung.
White RGB	WHITE RGB 032 032 032	Die Einstellungen mit Hilfe der GRÜNEN Taste anwählen. Optimale Einstellung.
Grundhelligket	SUB BRIGHT 000	Optimale Einstellung


# WAVEFORM PATTERN TABLE

**NOTE: All waveforms have been taken using a standard colour bar pattern**


<p><b>RED DRIVE</b> TPY1</p>  <p>64µs 130V</p>	<p><b>GREEN DRIVE</b> TPY2</p>  <p>64µs 100V</p>	<p><b>BLUE DRIVE</b> TPY3</p>  <p>64µs 100V</p>
<p><b>RED OUTPUT</b> IC 603 PIN 24</p>  <p>64µs 2.8V</p>	<p><b>GREEN OUTPUT</b> IC 603 PIN 22</p>  <p>64µs 2.7V</p>	<p><b>BLUE OUTPUT</b> IC 603 PIN 20</p>  <p>64µs 2.8V</p>
<p><b>HORIZONTAL SYNC</b> IC 3501 PIN 4</p>  <p>64µs 2.5V</p>	<p><b>VERTICAL SYNC</b> IC 3501 PIN 3</p>  <p>20ms 4.2V</p>	<p><b>VERT OUTPUT IC (INPUT)</b> IC 451 PIN 1</p>  <p>20ms 1.2V</p>
<p><b>LUMINANCE IN</b> IC601 PIN 26</p>  <p>64µs 1V</p>	<p><b>CHROMINANCE IN</b> IC601 PIN 25</p>  <p>64µs 0.6V</p>	<p><b>VERTICAL OUTPUT (DRIVE)</b> IC 451 PIN 9</p>  <p>20ms 40V</p>
<p><b>HORIZONTAL OUTPUT</b> IC401 PIN 20</p>  <p>64µs 3.8V</p>		

# VIDEO AND AUDIO SIGNAL PROCESSING BLOCK DIAGRAM

## BILD SIGNAL / TON SIGNAL BLOCKSCHEMA

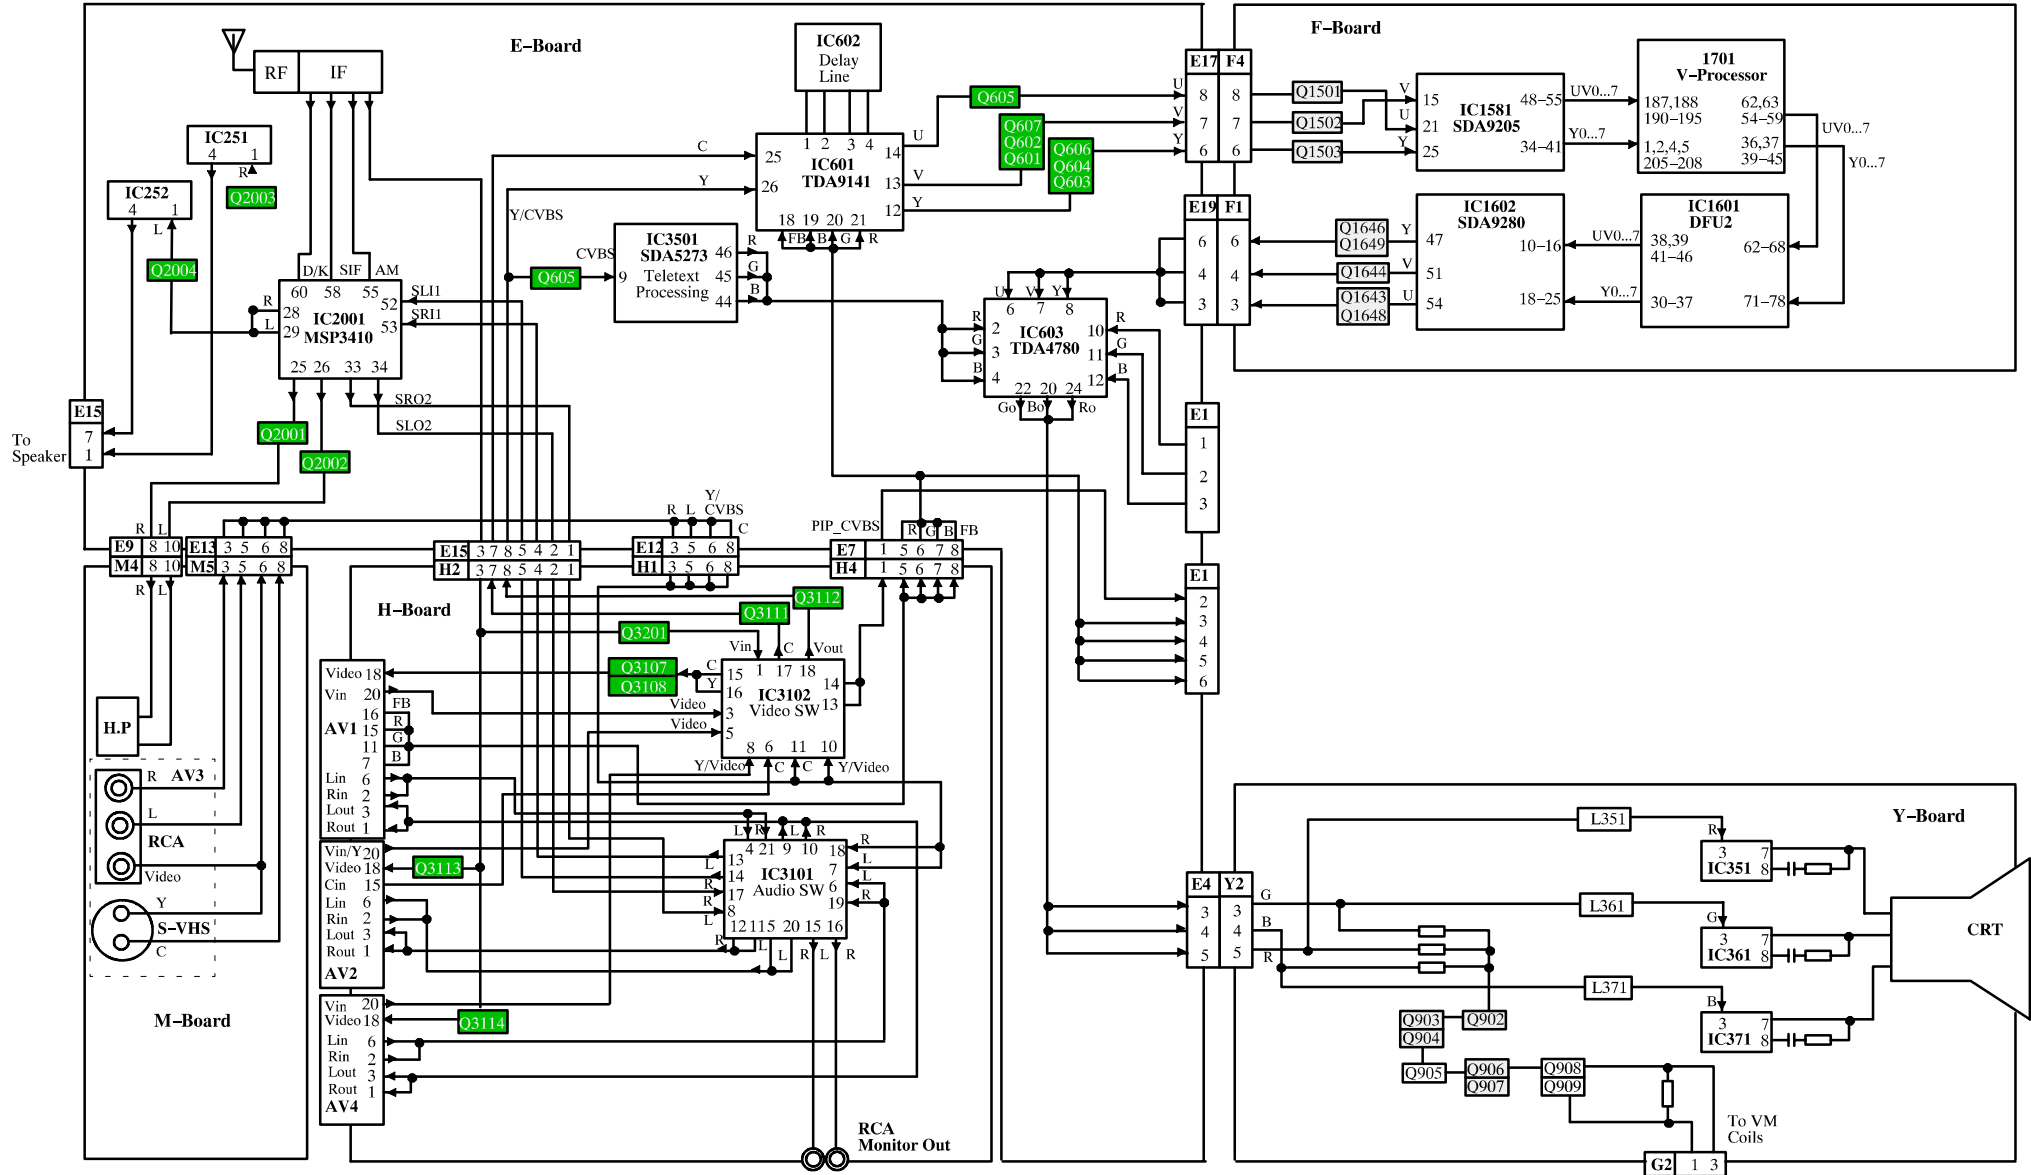

# CONTROL BLOCK DIAGRAM STROMVERSORGUNGS BLOCKSCHEMA

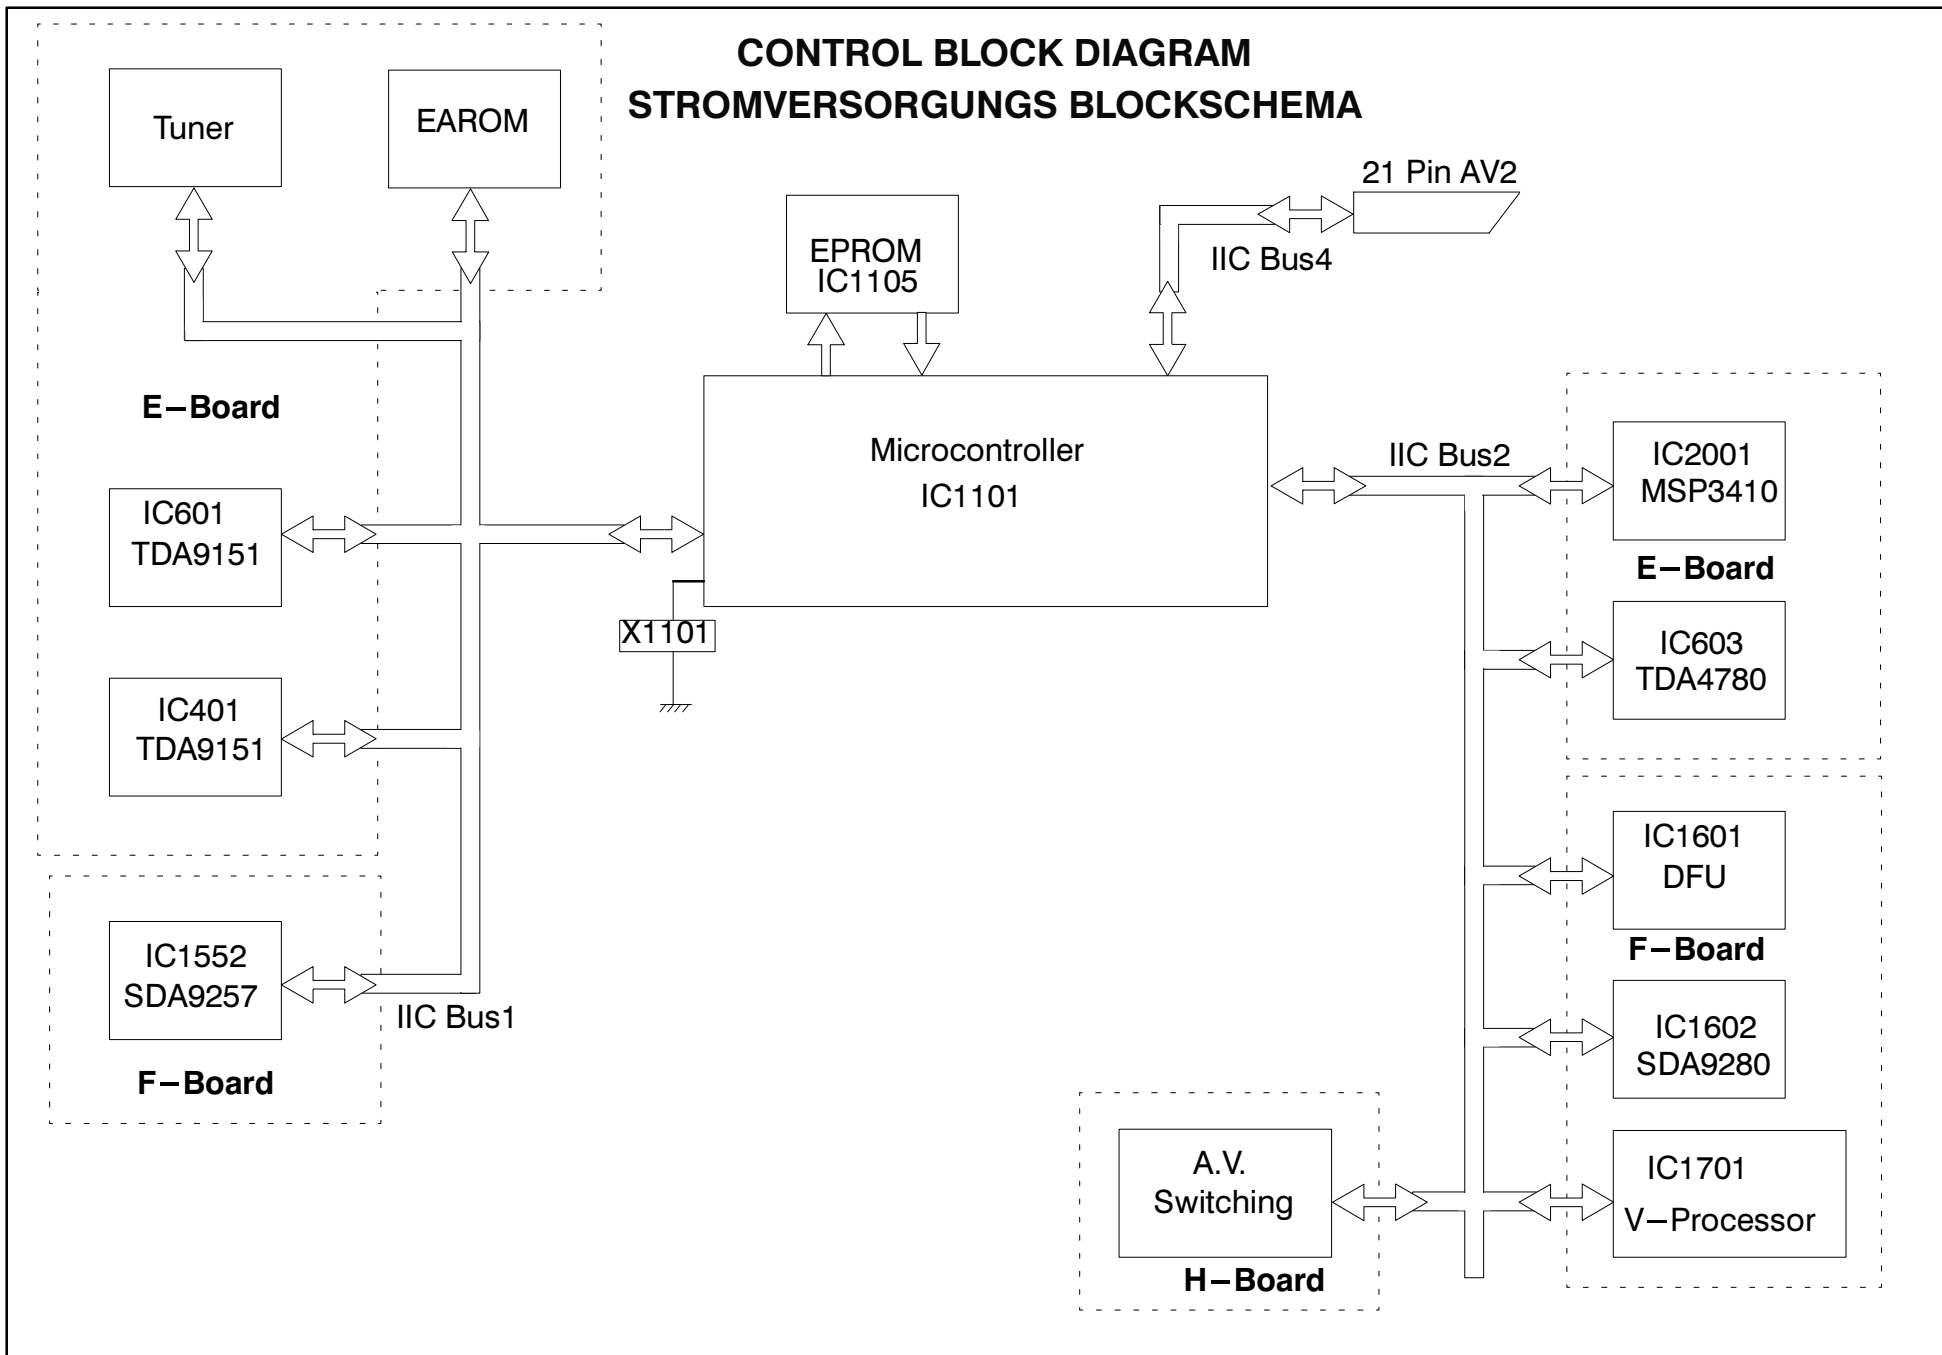

## PARTS LOCATION


### NOTE :

The numbers on the exploded view below refer to the miscellaneous section of the Replacement Parts List.

## EXPLOSIONSZEICHNUNG

### Anmerking :

Die Nummer auf den mechanischen Teilen zeigt die Bezugsnummer der Ersatzteilliste an.

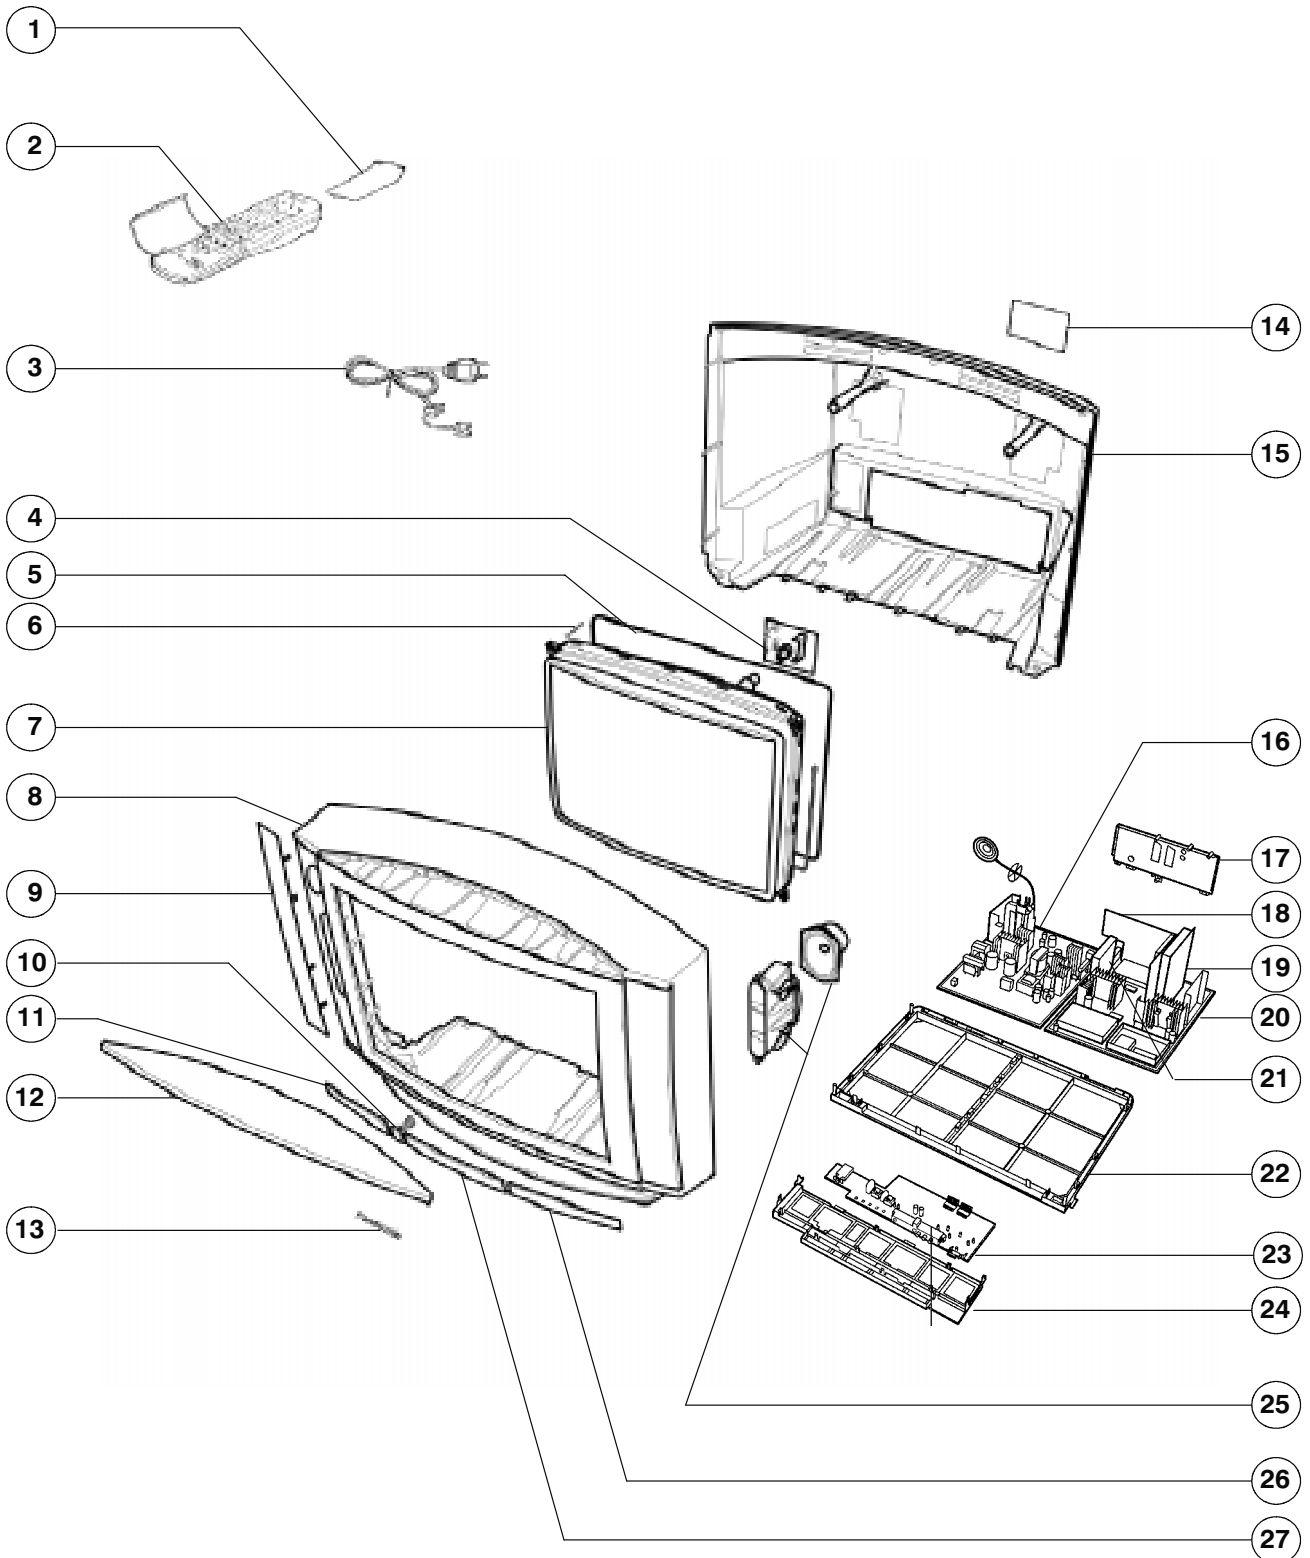

## REPLACEMENT PARTS LIST

### Important Safety Notice

Components identified by  $\Delta$  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

Ref No.	Part No.	Description
<b>MISCELLANEOUS COMPONENTS</b>		
1)	UR51EC780	BATTERY COVER (REMOTE)
2)	EUR51923	REMOTE CONTROL
3)	TSX8E022	POWER CORD $\Delta$
4)	*****	SEE DIFFERENCE LIST
5)	*****	SEE DIFFERENCE LIST
6)	VP17005-32	SCREW
7)	*****	SEE DIFFERENCE LIST
8)	*****	SEE DIFFERENCE LIST
9)	*****	SEE DIFFERENCE LIST
10))	*****	SEE DIFFERENCE LIST
11)	*****	SEE DIFFERENCE LIST
12)	*****	SEE DIFFERENCE LIST
13)	TBM8E1728	PANASONIC BADGE
14)	*****	SEE DIFFERENCE LIST
15)	*****	SEE DIFFERENCE LIST
16)	*****	SEE DIFFERENCE LIST
17)	TKP8E1166	REAR AV COVER
18)	TNPA0293AB	H P.C.B. $\Delta$
19)	TNPA0756AA	F-P.C.B. $\Delta$
20)	*****	SEE DIFFERENCE LIST
21)	TNPA0317AB	B P.C.B. $\Delta$
22)	TMX8E014	CHASSIS FRAME
23)	TNPA0766AA	M-PRINT $\Delta$
24)	TMW8E025	CONTROL BRACKET
25)	EAG1216A2	SPEAKER
26)	*****	SEE DIFFERENCE LIST
27)	TKP8E1170	DOOR LID (BLACK)
TNR1	ENV57D03G3	TUNER $\Delta$
MOD5	TES4537	SPRING
MOD6	TES4537	SPRING
MOE11	F9-4-220	RELAY
MOE12	TES4537	SPRING
MOF9	TUX8E033	H/SINK
	ERC12GK825	SOLID 0.5W 10% 8M2 $\Omega$
	PCS-068A-1	68 PIN I.C. SOCKET
	TBM8E1616	PRE-SET LABEL
	TBM8E1675	REAR AV LABEL
	TBX8E040	POWER BUTTON BLACK
	TEK6940	LID CATCHER
	TES8E015	POWER BUTTON SPRING
	TMW8E020-1	LED HOLDER
	TMX8E015	PCB SUPPORT BRACKET
	TQB8E2405A	GERMAN INST BOOK $\Delta$
	TQB8E2405B	DUTCH INST BOOK $\Delta$
	TQB8E2405C	ITALIAN INST BOOK $\Delta$
	TQB8E2405D	FRENCH INST BOOK $\Delta$
	TQB8E2405E	SPANISH INST BOOK $\Delta$
	TQB8E2405F	SWEDISH INST BOOK $\Delta$
	TQB8E2405G	NORWEGIAN INST BOOK $\Delta$
	TQB8E2405H	SUOMI INST BOOK $\Delta$
	TQB8E2405K	DANISH INST BOOK $\Delta$
	UM-3DJ-2P	BATTERY-SET
<b>CAPACITORS</b>		
C002	ECUV1H102JCX	S.M.CAP 50V 1nF
C003	ECA1HM101GB	ELECT 50V 100pF
C004	ECUV1H102JCX	S.M.CAP 50V 1nF
C005	ECUV1H102JCX	S.M.CAP 50V 1nF
C006	ECUV1H102JCX	S.M.CAP 50V 1nF

Ref No.	Part No.	Description
C007	ECUV1H102JCX	S.M.CAP 50V 1nF
C009	ECA1HMR22GB	ELECT 50V 0.22 $\mu$ F
C010	ECUV1H102KBX	S.M.CAP 50V 1nF
C014	ECUV1H103ZFX	S.M.CAP 50V 10nF
C015	ECUV1H390JCX	S.M.CAP 50V 39pF
C016	ECUV1H390JCX	S.M.CAP 50V 39pF
C017	ECA1CM470GB	ELECT 16V 47 $\mu$ F
C019	ECUV1H561JCX	S.M.CAP 50V 560pF
C020	ECUV1H103ZFX	S.M.CAP 50V 10nF
C022	ECUV1H103ZFX	S.M.CAP 50V 10nF
C023	ECUV1H681JCX	S.M.CAP 50V 680pF
C024	ECUV1H103ZFX	S.M.CAP 50V 10nF
C025	ECUV1H101JCX	S.M.CAP 50V 100pF
C026	ECUV1H681JCX	S.M.CAP 50V 680pF
C101	ECUV1H104ZFX	S.M.CAP 50V 100nF
C106	ECUV1H104ZFX	S.M.CAP 50V 100nF
C108	ECUV1H104ZFX	S.M.CAP 50V 100nF
C109	ECUV1H104ZFX	S.M.CAP 50V 100nF
C111	ECUV1H103ZFX	S.M.CAP 50V 10nF
C113	ECUV1H393KBX	S.M.CAP 50V 39nF
C115	ECUV1H104ZFX	S.M.CAP 50V 100nF
C116	ECUV1H030CPX	S.M.CAP 50V 30pF
C117	ECUV1H070DTX	S.M.CAP 50V 70pF
C118	ECEA1CKA100	ELECT 16V 10 $\mu$ F
C120	ECEA1HKA2R2	ELECT 50V 2.2 $\mu$ F
C121	ECEA1HKA2R2	ELECT 50V 2.2 $\mu$ F
C122	ECUV1C105ZFX	S.M.CAP 16V 1000nF
C123	ECEA1HKA2R2	ELECT 50V 2.2 $\mu$ F
C124	ECUV1H471JCX	S.M.CAP 50V 470pF
C125	ECUV1H104ZFX	S.M.CAP 50V 100nF
C126	ECUV1H104ZFX	S.M.CAP 50V 100nF
C127	ECEA1CKA100	ELECT 16V 10 $\mu$ F
C128	ECUV1H102KBX	S.M.CAP 50V 1nF
C129	ECEA1CKA100	ELECT 16V 10 $\mu$ F
C130	ECUV1H104ZFX	S.M.CAP 50V 100nF
C131	ECUV1H102KBX	S.M.CAP 50V 1nF
C132	ECUV1H102KBX	S.M.CAP 50V 1nF
C133	ECUV1H102KBX	S.M.CAP 50V 1nF
C134	ECUV1H104ZFX	S.M.CAP 50V 100nF
C135	ECEA1CKA100	ELECT 16V 10 $\mu$ F
C136	ECUV1H104ZFX	S.M.CAP 50V 100nF
C137	ECUV1H100DCX	S.M.CAP 50V 10pF
C138	ECUV1H151JCX	S.M.CAP 50V 150pF
C139	ECUV1H104ZFX	S.M.CAP 50V 100nF
C140	ECUV1H151JCX	S.M.CAP 50V 150pF
C142	ECUV1H100DCX	S.M.CAP 50V 10pF
C143	ECUV1H220JCX	S.M.CAP 50V 22pF
C144	ECUV1H151JCX	S.M.CAP 50V 150pF
C145	ECUV1H151JCX	S.M.CAP 50V 150pF
C146	ECUV1H120JCX	S.M.CAP 50V 12pF
C148	ECUV1H103ZFX	S.M.CAP 50V 10nF
C150	ECEA1CKA100	ELECT 16V 10 $\mu$ F
C151	ECUV1H104ZFX	S.M.CAP 50V 100nF
C152	ECUV1H104ZFX	S.M.CAP 50V 100nF
C153	ECUV1H120JCX	S.M.CAP 50V 12pF
C158	ECUV1H103ZFX	S.M.CAP 50V 10nF
C159	ECUV1H080CCX	S.M.CAP 50V 80pF
C251	ECQM1H474J	FILM 50V 470nF
C252	ECUV1H222JCX	S.M.CAP 50V 2.2nF
C254	ECUV1H393KBX	S.M.CAP 50V 39nF
C255	ECEA1CN100	ELECT 16V 10 $\mu$ F
C257	ECA1HM100GB	ELECT 50V 10pF
C258	ECQM1H474J	FILM 50V 470nF



Ref No.	Part No.	Description			
C259	ECUV1H222JCX	S.M.CAP	50V	2.2nF	
C261	ECUV1H393KBX	S.M.CAP	50V	39nF	
C262	ECEA1CN100	ELECT	16V	10µF	
C264	ECA1HM100GB	ELECT	50V	10pF	
C267	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C268	ECUV1H223ZFX	S.M.CAP	50V	22nF	
C269	ECA1EM222GB	ELECT	25V	2.2nF	
C270	ECA1EM222GB	ELECT	25V	2.2nF	
C271	ECA1HM010GB	ELECT	50V	1pF	
C272	ECA1HM010GB	ELECT	50V	1pF	
C273	ECA1HM010GB	ELECT	50V	1pF	
C274	ECA1HM010GB	ELECT	50V	1pF	
C275	ECUV1C184KBX	S.M.CAP	16V	0.18µF	
C276	ECUV1C184KBX	S.M.CAP	16V	0.18µF	
C277	ECEA1HU471	ELECT	50V	470µF	
C280	ECUV1H562KBX	S.M.CAP	50V	5.6nF	
C281	ECUV1H561JCX	S.M.CAP	50V	560pF	
C282	ECUV1H561JCX	S.M.CAP	50V	560pF	
C283	ECUV1H561JCX	S.M.CAP	50V	560pF	
C352	ECUV1H224ZFX	S.M.CAP	50V	0.22µF	
C353	ECUV1H103KBX	S.M.CAP	50V	10nF	
C354	ECKC2H103J	CERAMIC	50V	10nF	△
C355	ECKC2H102J	CERAMIC	500V	1nF	△
C362	ECUV1H224ZFX	S.M.CAP	50V	0.22µF	
C363	ECUV1H103KBX	S.M.CAP	50V	10nF	
C364	ECKC2H103J	CERAMIC	50V	10nF	△
C365	ECKC2H102J	CERAMIC	500V	1nF	△
C372	ECUV1H224ZFX	S.M.CAP	50V	0.22µF	
C373	ECUV1H103KBX	S.M.CAP	50V	10nF	
C374	ECKC2H103J	CERAMIC	50V	10nF	△
C375	ECKC2H102J	CERAMIC	500V	1nF	△
C381	ECA1HM101GB	ELECT	50V	100pF	
C382	ECA1CM471GB	ELECT	16V	470pF	
C383	ECUV1H103KBX	S.M.CAP	50V	10nF	
C384	ECQM2104KZ	FILM	250V	100nF	
C385	ECEA2EU220	ELECT	250V	22µF	
C386	ECKC3D152J	CERAMIC	2KV	1.5nF	△
C395	ECQM1H104J	FILM	50V	100nF	
C402	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C403	ECA1AM332E	ELECT	10V	3.3nF	
C404	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C405	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C406	ECUV1H471JCX	S.M.CAP	50V	470pF	
C409	ECUV1H101JCX	S.M.CAP	50V	100pF	
C413	ECUV1H561KBX	S.M.CAP	50V	560pF	
C451	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C452	ECA1EM332E	ELECT	25V	3.3nF	
C453	ECEA1HU101	ELECT	50V	100µF	
C455	ECA1HEN100B	ELECT	50V	10pF	
C456	ECQV1104JZ3	FILM	100V	0.1µF	
C457	ECUV1H102JCX	S.M.CAP	50V	1nF	
C462	ECKC3A471J	CERAMIC	1KV	470pF	△
C463	ECUV1H102KBX	S.M.CAP	50V	1nF	
C464	ECKC1H102J	CERAMIC	50V	1000pF	
C501	ECQM1H224J	FILM	50V	220nF	
C502	ECQM2683JZ	FILM	250V	68nF	
C503	ECKC2H102J	CERAMIC	500V	1nF	△
C504	ECQB1H223K	FILM	50V	22nF	
C506	ECKC2H102J	CERAMIC	500V	1nF	△
C552	ECWH15H392J	FILM	3500V	3.9nF	
C553	ECQP1104JZW	FILM	100V	0.10µF	
C555	ECWH15H472J	FILM	1500V	4700µF	
C556	ECEA2CNR47SB	ELECT	160V	R47µF	
C557	ECKC2H331J	CERAMIC	500V	330pF	△
C558	ECA2EM330B	ELECT	250V	33pF	
C559	ECKC2H101J	CERAMIC	500V	100pF	△
C560	ECA1EM332E	ELECT	25V	3.3nF	
C561	ECKC2H561J	CERAMIC	500V	560pF	△
C562	ECA1JM330B	ELECT	63V	33pF	
C563	ECWF2564JBK	FILM	200V	0.56µF	
C564	ECKC1H472J	CERAMIC	50V	4.7nF	

Ref No.	Part No.	Description			
C565	ECQP1823JZW	FILM	100V	82nF	
C571	ECQV1H105JZ	FILM	50V	1µF	
C572	ECWH15H472J	FILM	1500V	4700µF	
C573	ECQF4153JZH	FILM	400V	15nF	
C574	ECWF4684JBB	FILM	400V	0.68µF	
C575	ECWF4684JBB	FILM	400V	0.68µF	
C581	ECQF4123JZH	FILM	400V	12nF	
C584	ECKC3D391J	CERAMIC	2KV	390pF	△
C585	ECKC3A471J	CERAMIC	1KV	470pF	△
C586	ECKC1H103JB	CERAMIC	50V	10nF	
C588	ECKC1H471J	CERAMIC	50V	470pF	
C601	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C602	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C603	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C604	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C605	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C606	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C608	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C609	ECUV1H180JCX	S.M.CAP	50V	18pF	
C610	ECUV1H150JCX	S.M.CAP	50V	15pF	
C611	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C612	ECUV1H332ZFX	S.M.CAP	50V	3.3nF	
C613	ECUV1C474ZFX	S.M.CAP	16V	0.47µF	
C614	ECUV1H332ZFX	S.M.CAP	50V	3.3nF	
C615	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C616	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C617	ECA1CM220GB	ELECT	16V	22µF	
C618	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C619	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C620	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C621	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C622	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C623	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C624	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C625	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C626	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C627	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C628	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C629	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C630	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C631	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C632	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C633	ECUV1H470JCX	S.M.CAP	50V	47pF	
C634	ECA1CM221GB	ELECT	16V	220pF	
C635	ECA1HM220GB	ELECT	50V	22pF	
C636	ECA1HM010GB	ELECT	50V	1pF	
C637	ECQM1H224J	FILM	50V	220nF	
C638	ECA1HM010GB	ELECT	50V	1pF	
C639	ECQM1H224J	FILM	50V	220nF	
C640	ECQM1H224J	FILM	50V	220nF	
C641	ECQM1H224J	FILM	50V	220nF	
C642	ECA1AM470GB	ELECT	10V	47pF	
C643	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C644	ECA1CM470GB	ELECT	16V	47µF	
C645	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C646	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C647	ECEA1CN470	ELECT	16V	47µF	
C648	ECEA1CN470	ELECT	16V	47µF	
C651	ECUV1H820JCX	S.M.CAP	50V	82pF	
C654	ECUV1H393KBX	S.M.CAP	50V	39nF	
C655	ECUV1E563KBX	S.M.CAP	25V	56nF	
C657	ECUV1C474ZFX	S.M.CAP	16V	0.47µF	
C659	ECUV1H821KBX	S.M.CAP	50V	820pF	
C661	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C662	ECUV1H470JCX	S.M.CAP	50V	47pF	
C663	ECUV1H150JCX	S.M.CAP	50V	15pF	
C664	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C703	ECUV1C224KBX	S.M.CAP	16V	220nF	
C752	ECKC2H103J	CERAMIC	50V	10nF	△
C803	ECQE2A474MWB	FILM	100V	0.47µF	
C804	ECQU2A154MN	FILM	250V	150nF	

Ref No.	Part No.	Description			
C806	ECQE6104K	FILM	600V	100nF	△
C807	ECQB1H473K	FILM	50V	47nF	
C808	ECQB1H333J	FILM	50V	33nF	
C810	222233510154	CAPACITOR		0.15µF	
C811	ECQB1H104J	FILM	50V	100nF	
C812	ECQB1H562K	FILM	50V	5.6nF	
C813	ECKC2H472J	CERAMIC	500V	4.7nF	△
C814	ECKC2H472J	CERAMIC	500V	4.7nF	△
C815	ECA1CM331B	ELECT	16V	330pF	
C816	ECQB1H122J	FILM	50V	1.2nF	
C817	ECKC2H472J	CERAMIC	500V	4.7nF	△
C818	ECKC2H472J	CERAMIC	500V	4.7nF	△
C819	ECOS2GG181NG	ELECT	400V	180µF	△
C820	ECOS2GG181NG	ELECT	400V	180µF	△
C821	ECQB1H222J	FILM	50V	2200pF	
C822	ECKC3D471JB	CERAMIC	2KV	470pF	△
C824	ECQB1H121KF3	FILM	50V	0pF	
C826	ECQB1H473K	FILM	50V	47nF	
C827	ECKCNS332J	CERAMIC	1.2KV	3.3nF	△
C830	ECQE4105JFW	FILM	400V	1.0µF	
C831	ECKC3D471JB	CERAMIC	2KV	470pF	△
C833	ECQB1H682K	FILM	50V	6.8nF	
C835	ECQB1H332K	FILM	50V	3.3nF	
C848	ECKC2H471J	CERAMIC	500V	470pF	△
C849	ECKC2H471J	CERAMIC	500V	470pF	△
C851	ECQM1H104J	FILM	50V	100nF	
C852	ECKC3D222JB	CERAMIC	2KV	2200pF	△
C853	ECA1CM471GB	ELECT	16V	470pF	
C854	ECA1EM471GB	ELECT	25V	470pF	
C855	ECEA1HU102	ELECT	50V	1000µF	
C856	ECEA1HU471	ELECT	50V	470µF	
C857	ECA1EM471GB	ELECT	25V	470pF	
C858	ECOS2EA271BB	ELECT	250V	270pF	
C859	ECKC2H471J	CERAMIC	500V	470pF	△
C861	ECOS2EA221AB	ELECT	250V	220µF	
C863	ECA1EM222GB	ELECT	25V	2.2nF	
C864	ECA0JM102GB	ELECT	6.3V	1nF	
C866	ECA1HM101GB	ELECT	50V	100pF	
C867	ECA1CM222GB	ELECT	16V	2200µF	
C868	ECA1CM100GB	ELECT	16V	10pF	
C871	ECA0JM102GB	ELECT	6.3V	1nF	
C872	ECA1CM222GB	ELECT	16V	2200µF	
C874	ECKC1H102J	CERAMIC	50V	1000pF	
C901	ECUV1H030CCX	S.M.CAP	50V	30pF	
C902	ECA1VM101GB	ELECT	35V	100pF	
C903	ECKC1H103JB	CERAMIC	50V	10nF	
C904	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C905	ECA1CM100GB	ELECT	16V	10pF	
C906	ECUV1H102KBX	S.M.CAP	50V	1nF	
C908	ECUV1H151JCX	S.M.CAP	50V	150pF	
C909	ECKC2H472J	CERAMIC	500V	4.7nF	△
C910	ECKC2H472J	CERAMIC	500V	4.7nF	△
C911	ECUV1H151JCX	S.M.CAP	50V	150pF	
C912	ECEA2EU220	ELECT	250V	22µF	
C913	ECA1HM101GB	ELECT	50V	100pF	
C914	ECA1HM101GB	ELECT	50V	100pF	
C915	ECA1CM471GB	ELECT	16V	470pF	
C916	ECEA2EU220	ELECT	250V	22µF	
C917	ECA1HM100GB	ELECT	50V	10pF	
C918	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C919	ECCR2H680J	CERAMIC	500V	68pF	
C1051	ECKC1H101J	CERAMIC	50V	100pF	
C1052	ECA1VM470B	ELECT	35V	47pF	
C1053	ECKC1H103JB	CERAMIC	50V	10nF	
C1102	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1103	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1104	ECA0JM101G	ELECT	6.3V	100pF	
C1105	ECUV1H330JCX	S.M.CAP	50V	33pF	
C1106	ECUV1H330JCX	S.M.CAP	50V	33pF	
C1107	ECUV1H391JCX	S.M.CAP	50V	390pF	
C1108	ECUV1H103ZFX	S.M.CAP	50V	10nF	

Ref No.	Part No.	Description			
C1109	ECUV1H472KBX	S.M.CAP	50V	4.7nF	
C1110	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1111	ECUV1H101JCX	S.M.CAP	50V	100pF	
C1112	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1114	ECUV1H102JCX	S.M.CAP	50V	1nF	
C1115	ECUV1H102JCX	S.M.CAP	50V	1nF	
C1126	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1127	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1129	ECA1AM470GB	ELECT	10V	47pF	
C1130	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1131	ECUV1H101JCX	S.M.CAP	50V	100pF	
C1133	ECUV1C184KBX	S.M.CAP	16V	0.18µF	
C1134	ECUV1H103KBX	S.M.CAP	50V	10nF	
C1135	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1136	ECUV1H101JCX	S.M.CAP	50V	100pF	
C1137	ECUV1H102KBX	S.M.CAP	50V	1nF	
C1138	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1304	ECUV1H103ZFX	S.M.CAP	50V	10nF	
C1305	ECA1HM101GB	ELECT	50V	100pF	
C1317	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1321	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1322	ECUV1H101JCX	S.M.CAP	50V	100pF	
C1327	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1508	ECUV1H103KBX	S.M.CAP	50V	10nF	
C1509	ECA1VM470B	ELECT	35V	47pF	
C1518	ECA1HM101GB	ELECT	50V	100pF	
C1519	ECA1HM101GB	ELECT	50V	100pF	
C1520	ECA1HM101GB	ELECT	50V	100pF	
C1524	ERJ6GEY0R00	S.M.CARB	0.1W	5%	Ω
C1525	ECUV1H221JCX	S.M.CAP	50V	220pF	
C1529	ERJ6GEY0R00	S.M.CARB	0.1W	5%	Ω
C1531	ECUV1H221JCX	S.M.CAP	50V	220pF	
C1532	ECUV1H680JCX	S.M.CAP	50V	68pF	
C1533	ECUV1H560JCX	S.M.CAP	50V	56pF	
C1534	ECUV1H271JCX	S.M.CAP	50V	270pF	
C1537	ECA0JM102GB	ELECT	6.3V	1nF	
C1538	ECUV1H151JCX	S.M.CAP	50V	150pF	
C1539	ECUV1H152JCX	S.M.CAP	50V	1.5pF	
C1540	ECUV1H151JCX	S.M.CAP	50V	150pF	
C1541	ECUV1H152JCX	S.M.CAP	50V	1.5pF	
C1542	ECUV1H101JCX	S.M.CAP	50V	100pF	
C1543	ECUV1H391JCX	S.M.CAP	50V	390pF	
C1552	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1553	ECUV1H270JCX	S.M.CAP	50V	27pF	
C1554	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1555	ECA0JM331GB	ELECT	6.3V	330pF	
C1556	ECUV1H270JCX	S.M.CAP	50V	27pF	
C1557	ECUV1H270JCX	S.M.CAP	50V	27pF	
C1558	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1559	ECUV1H103KBX	S.M.CAP	50V	10nF	
C1560	ECUV1H103KBX	S.M.CAP	50V	10nF	
C1561	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1562	ECA0JM331GB	ELECT	6.3V	330pF	
C1564	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1575	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1576	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1577	ECA1HM101GB	ELECT	50V	100pF	
C1579	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1580	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1583	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1584	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1585	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1586	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1588	ECA1VM470B	ELECT	35V	47pF	
C1590	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1591	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1592	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1593	ECA1HM101GB	ELECT	50V	100pF	
C1594	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1595	ECUV1H104ZFX	S.M.CAP	50V	100nF	
C1596	ECUV1H104ZFX	S.M.CAP	50V	100nF	

Ref No.	Part No.	Description		
C1599	ECA1HM101GB	ELECT	50V	100pF
C1601	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1602	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1603	ECUV1H103KBX	S.M.CAP	50V	10nF
C1604	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1605	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1606	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1607	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1608	ECA1HM101GB	ELECT	50V	100pF
C1610	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1611	ECUV1H103KBX	S.M.CAP	50V	10nF
C1612	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1613	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1614	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1616	ECUV1H152JCX	S.M.CAP	50V	1.5pF
C1617	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1618	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1619	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1620	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1621	ECA1HM101GB	ELECT	50V	100pF
C1622	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1625	ECEA1CN470	ELECT	16V	47µF
C1626	ECUV1H100DCX	S.M.CAP	50V	10pF
C1627	ECUV1H330JCX	S.M.CAP	50V	33pF
C1628	ECUV1H271JCX	S.M.CAP	50V	270pF
C1629	ECUV1H100DCX	S.M.CAP	50V	10pF
C1630	ECUV1H330JCX	S.M.CAP	50V	33pF
C1631	ECUV1H271JCX	S.M.CAP	50V	270pF
C1632	ECUV1H020CCX	S.M.CAP	50V	2pF
C1633	ECUV1H050DCX	S.M.CAP	50V	5pF
C1634	ECUV1H470JCX	S.M.CAP	50V	47pF
C1641	ECA1VM470B	ELECT	35V	47pF
C1642	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1671	ECUV1H330JCX	S.M.CAP	50V	33pF
C1701	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1702	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1703	ECUV1H103ZFX	S.M.CAP	50V	10nF
C1704	ECUV1H104ZFX	S.M.CAP	50V	100nF
C1705	ECA1HM101GB	ELECT	50V	100pF
C1706	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2001	ECA1CM100GB	ELECT	16V	10pF
C2002	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2003	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2004	ECUV1H102JCX	S.M.CAP	50V	1nF
C2005	ECUV1H391JCX	S.M.CAP	50V	390pF
C2006	ECUV1H391JCX	S.M.CAP	50V	390pF
C2007	ECUV1H102JCX	S.M.CAP	50V	1nF
C2008	ECUV1H102JCX	S.M.CAP	50V	1nF
C2009	ECUV1H102JCX	S.M.CAP	50V	1nF
C2010	ECUV1H102JCX	S.M.CAP	50V	1nF
C2011	ECUV1H102JCX	S.M.CAP	50V	1nF
C2012	ECUV1H102JCX	S.M.CAP	50V	1nF
C2014	ECQM1H334J	FILM	50V	330nF
C2017	ECA1CM100GB	ELECT	16V	10pF
C2018	ECA1CM100GB	ELECT	16V	10pF
C2019	ECA1CM221GB	ELECT	16V	220pF
C2020	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2021	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2022	ECA1HM3R3GB	ELECT	50V	3.3µF
C2023	ECUV1H471JCX	S.M.CAP	50V	470pF
C2024	ECUV1H471JCX	S.M.CAP	50V	470pF
C2025	ECUV1H221JCX	S.M.CAP	50V	220pF
C2026	ECUV1H221JCX	S.M.CAP	50V	220pF
C2027	ECUV1H221JCX	S.M.CAP	50V	220pF
C2028	ECUV1H221JCX	S.M.CAP	50V	220pF
C2029	ECUV1H221JCX	S.M.CAP	50V	220pF
C2030	ECUV1H221JCX	S.M.CAP	50V	220pF
C2031	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2032	ECA1CM100GB	ELECT	16V	10pF
C2034	ECUV1H070DCX	S.M.CAP	50V	7pF
C2035	ECUV1H560JCX	S.M.CAP	50V	56pF
C2036	ECUV1H100DCX	S.M.CAP	50V	10pF

Ref No.	Part No.	Description		
C2037	ECUV1H220JCX	S.M.CAP	50V	22pF
C2039	ECUV1H070DCX	S.M.CAP	50V	7pF
C2040	ECUV1H560JCX	S.M.CAP	50V	56pF
C2041	ECUV1H560JCX	S.M.CAP	50V	56pF
C2042	ECUV1H104ZFX	S.M.CAP	50V	100nF
C2043	ECA1CM100GB	ELECT	16V	10pF
C2044	ECUV1H010CCX	S.M.CAP	50V	1pF
C2045	ECUV1H010CCX	S.M.CAP	50V	1pF
C2050	ECUV1H223ZFX	S.M.CAP	50V	22nF
C2051	ECUV1H223ZFX	S.M.CAP	50V	22nF
C2052	ECUV1H103ZFX	S.M.CAP	50V	10nF
C2053	ECUV1H103ZFX	S.M.CAP	50V	10nF
C2054	ECA1CM331B	ELECT	16V	330pF
C2055	ECA1CM331B	ELECT	16V	330pF
C2058	ECUV1H683ZFX	S.M.CAP	50V	68nF
C2059	ECUV1H102KBX	S.M.CAP	50V	1nF
C2060	ECUV1H102KBX	S.M.CAP	50V	1nF
C2351	ECA1CM471GB	ELECT	16V	470pF
C2352	ECA1CM471GB	ELECT	16V	470pF
C2353	ECA1HM4R7GB	ELECT	50V	4.7µF
C2354	ECKC1H103JB	CERAMIC	50V	10nF
C2355	ECA1HMR33GB	ELECT	50V	0.33µF
C2356	ECKC1H103JB	CERAMIC	50V	10nF
C2360	ECKC1H103JB	CERAMIC	50V	10nF
C2361	ECA1CM471GB	ELECT	16V	470pF
C2362	ECA1CM471GB	ELECT	16V	470pF
C2363	ECA1HM4R7GB	ELECT	50V	4.7µF
C2364	ECKC1H103JB	CERAMIC	50V	10nF
C2365	ECA1HMR33GB	ELECT	50V	0.33µF
C2366	ECKC1H103JB	CERAMIC	50V	10nF
C3001	ECKC1H561J	CERAMIC	50V	560pF
C3002	ECKC1H561J	CERAMIC	50V	560pF
C3005	ECKC1H151J	CERAMIC	50V	150pF
C3101	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3102	ECA1HM470GB	ELECT	50V	47µF
C3103	ECA1CM470GB	ELECT	16V	47µF
C3107	ECA1HM470GB	ELECT	50V	47µF
C3108	ECA1CM470GB	ELECT	16V	47µF
C3111	ECUV1H102JCX	S.M.CAP	50V	1nF
C3113	ECA1HM470GB	ELECT	50V	47µF
C3114	ECA1CM470GB	ELECT	16V	47µF
C3115	ECEA1HNR47UB	ELECT	50V	0.47µF
C3117	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3119	ECA1HM470GB	ELECT	50V	47µF
C3120	ECA1CM470GB	ELECT	16V	47µF
C3123	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3126	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3128	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3130	ECEA1HN4R7UB	ELECT	50V	4.7µF
C3131	ECUV1H473KBX	S.M.CAP	50V	47nF
C3132	ECA1CM470GB	ELECT	16V	47µF
C3133	ECA1CM470GB	ELECT	16V	47µF
C3134	ECA1CM470GB	ELECT	16V	47µF
C3136	ECA1CM470GB	ELECT	16V	47µF
C3137	ECA1HM470GB	ELECT	50V	47µF
C3138	ECA1HM470GB	ELECT	50V	47µF
C3139	ECUV1H222JCX	S.M.CAP	50V	2.2nF
C3140	ECUV1H222JCX	S.M.CAP	50V	2.2nF
C3143	ECUV1H561JCX	S.M.CAP	50V	560pF
C3146	ECUV1H561JCX	S.M.CAP	50V	560pF
C3148	ECA1HM4R7GB	ELECT	50V	4.7µF
C3149	ECUV1H561JCX	S.M.CAP	50V	560pF
C3150	ECA1HM4R7GB	ELECT	50V	4.7µF
C3151	ECUV1H561JCX	S.M.CAP	50V	560pF
C3154	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3156	ECA1CM470GB	ELECT	16V	47µF
C3158	ECUV1H102JCX	S.M.CAP	50V	1nF
C3160	ECUV1H104ZFX	S.M.CAP	50V	100nF
C3162	ECA1CM471GB	ELECT	16V	470pF
C3163	ECA1HMR47GB	ELECT	50V	0.47µF
C3165	ECA1HM470GB	ELECT	50V	47µF
C3169	ECUV1H102JCX	S.M.CAP	50V	1nF

Ref No.	Part No.	Description
C3170	ECUV1H561JCX	S.M.CAP 50V 560pF
C3172	ECUV1H561JCX	S.M.CAP 50V 560pF
C3173	ECA1HMR47GB	ELECT 50V 0.47µF
C3174	ECUV1H561JCX	S.M.CAP 50V 560pF
C3178	ECUV1H561JCX	S.M.CAP 50V 560pF
C3180	ECA1HMR47GB	ELECT 50V 0.47µF
C3181	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
C3182	ECUV1H102JCX	S.M.CAP 50V 1nF
C3183	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
C3184	ECUV1H473KBX	S.M.CAP 50V 47nF
C3185	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
C3186	ECEA1HNR47UB	ELECT 50V 0.47µF
C3187	ECA1HM470GB	ELECT 50V 47µF
C3188	ECEA1CN470	ELECT 16V 47µF
C3190	ECA1HMR47GB	ELECT 50V 0.47µF
C3191	ECA1HM470GB	ELECT 50V 47µF
C3192	ECUV1H473KBX	S.M.CAP 50V 47nF
C3201	ECA1HM010GB	ELECT 50V 1pF
C3202	ECUV1H473ZFX	S.M.CAP 50V 47nF
C3203	ECA1CM100GB	ELECT 16V 10pF
C3204	ECUV1H473ZFX	S.M.CAP 50V 47nF
C3351	ECA1HM101GB	ELECT 50V 100pF
C3501	ECUV1H220JCX	S.M.CAP 50V 22pF
C3502	ECUV1H220JCX	S.M.CAP 50V 22pF
C3503	ECEA1HKN010	ELECT 50V 1µF
C3504	ECUV1H224ZFX	S.M.CAP 50V 0.22µF
C3510	ECUV1H103ZFX	S.M.CAP 50V 10nF
C3511	ECA1HM101GB	ELECT 50V 100pF
C3512	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3514	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3515	ECA0JM331GB	ELECT 6.3V 330pF
C3516	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3521	ECA1HM101GB	ELECT 50V 100pF
C3522	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3801	ECA1HM010GB	ELECT 50V 1pF
C3802	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3803	ECA1CM471GB	ELECT 16V 470pF
C3807	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3808	ECUV1H104ZFX	S.M.CAP 50V 100nF
C3809	ECA0JM101G	ELECT 6.3V 100pF
C3810	ECUV1H103KBX	S.M.CAP 50V 10nF
C3812	ECA1CM221GB	ELECT 16V 220pF

## DIODES

D001	MA4020	DIODE
D002	MA4020	DIODE
D103	BA582	DIODE
D104	BA582	DIODE
D251	MA165TA5	DIODE 1SS133T-77
D252	MA165TA5	DIODE 1SS133T-77
D253	MA165TA5	DIODE 1SS133T-77
D254	MA165TA5	DIODE 1SS133T-77
D351	ERA15-04V3	COIL
D352	ERA15-04V3	COIL
D361	ERA15-04V3	COIL
D362	ERA15-04V3	COIL
D371	ERA15-04V3	COIL
D372	ERA15-04V3	COIL
D387	MA2160LFS	DIODE
D401	MA165TA5	DIODE 1SS133T-77
D451	MA4056	DIODE
D452	MA2330-ALF	DIODE
D453	TVSEM01ZV0	DIODE
D502	1SS254T-77	DIODE
D503	EU02	DIODE
D504	EU02	DIODE
D531	1SS254T-77	DIODE
D532	1SS254T-77	DIODE
D533	1SS254T-77	DIODE
D551	EU02	DIODE
D556	AU02V0	DIODE
D557	ERC91-02L9	DIODE

Ref No.	Part No.	Description
D558	AU02V0	DIODE
D559	MTZJT-7736A	DIODE
D560	1SS252T-77	DIODE
D561	1SS254T-77	DIODE
D563	RH3GLF102	DIODE
D571	FMV-3GULF027	DIODE
D574	1SS252T-77	DIODE
D575	1SS252T-77	DIODE
D602	MA165TA5	DIODE 1SS133T-77
D603	MA165TA5	DIODE 1SS133T-77
D604	MA4062	DIODE
D706	MA165TA5	DIODE 1SS133T-77
D707	MA188TA	DIODE
D806	TF361MALF3	DIODE
D807	D6SB80LF-B	DIODE
D808	1SS254T-77	DIODE
D809	ERA22-02V3	DIODE
D810	MA2160LFS	DIODE
D812	MTZJT-775.6B	DIODE
D813	MA700TA5	DIODE
D814	AU01ZV0	DIODE
D815	PC123FY2	DIODE
D817	D5L60F4015	DIODE
D818	TMPG10G3	DIODE
D819	ERA81004V3	DIODE
D820	MA4100	DIODE
D821	EU02AV0	DIODE
D822	MTZJT-7718C	DIODE
D845	1SS254T-77	DIODE
D846	TVSS1WBS20	DIODE
D847	ERA15-01V1	DIODE
D848	EU02	DIODE
D849	FMGG26S	DIODE
D850	EU02	DIODE
D851	FMGG2CS	DIODE
D852	MTZJT-779.1C	DIODE
D853	1SS254T-77	DIODE
D854	1SS254T-77	DIODE
D855	D10SC6MRL	DIODE
D857	FML22SLF610	DIODE
D860	1SS254T-77	DIODE
D861	MTZJT-7713B	DIODE
D862	MA4104	DIODE
D901	1SS254T-77	DIODE
D902	1SS254T-77	DIODE
D903	1SS254T-77	DIODE
D1051	SLR56UR3FLF	LED
D1052	AU01V0	DIODE
D1053	AU01V0	DIODE
D1054	AU01V0	DIODE
D1055	AU01V0	DIODE
D1056	AU01V0	DIODE
D1057	AU01V0	DIODE
D1102	MA4051	DIODE
D1107	MTZJT-775.6A	DIODE
D1108	1SS254T-77	DIODE
D1109	1SS254T-77	DIODE
D1113	MA4051	DIODE
D1552	MA151ATX	DIODE
D2005	MA723TA5	DIODE
D2006	MA723TA5	DIODE
D3101	PMLL5242B	DIODE
D3102	PMLL5242B	DIODE
D3103	PMLL5242B	DIODE
D3105	PMLL5242B	DIODE
D3107	PMLL5242B	DIODE
D3109	PMLL5242B	DIODE
D3110	PMLL5242B	DIODE
D3111	PMLL5242B	DIODE
D3112	PMLL5242B	DIODE
D3115	PMLL5242B	DIODE
D3117	PMLL5242B	DIODE

Ref No.	Part No.	Description			
D3120	RLS72TE-11	DIODE OR PMLL4148			
D3351	1SS254T-77	DIODE			
D3501	MA4030	DIODE			
D3801	MA4043	DIODE			
D3802	MTZJT-778.2A	DIODE			
D3803	ERA81004V3	DIODE			
D3805	MA4091	DIODE			
D3806	MA165TA5	DIODE 1SS133T-77			
D3807	MA165TA5	DIODE 1SS133T-77			
<b>FUSES</b>					
F532	TR5-T1250	FUSE		△	
F801	XBA2C50TH15	FUSE			
F845	TR5-T2000	FUSE		△	
F846	TR5-T1250	FUSE		△	
F8011	EYF52BC	FUSE HOLDER			
F8012	EYF52BC	FUSE HOLDER			
<b>INTEGRATED CIRCUITS</b>					
IC101	TDA9814TV3	VIF			
IC1051	RPM-637CBRL	LED RECEIVER			
IC1101	SDA30C164-2	MICRO PROCESSOR			
IC1102	S-80745AL-Z	RESET			
IC1103	MN1280R	RESET			
IC1551	SN74F04DR	CLOCK			
IC1552	SDA9257	CLOCK GENERATOR			
IC1581	SDA9205-2GEG	A/D CONVERTER			
IC1601	UPD93213GF	DFU			
IC1602	SDA9280B22GE	VIDEO PROCESSOR			
IC1701	SDA9255GEG	VIDEO PROCESSOR			
IC2001	MSP3410DPPB4	AUDIO PROCESSOR			
IC251	TDA2030AV	AUDIO AMPLIFIER			
IC252	TDA2030AV	AUDIO AMPLIFIER			
IC3101	TEA6420	AUDIO SWITCH			
IC3102	TEA6415C	VIDEO SWITCH			
IC3501	SDA5273S/134	MEGA TEXT			
IC3502	M514256B70RS	DRAM			
IC351	TDA6111	RGB OUTPUT			
IC361	TDA6111	RGB OUTPUT			
IC371	TDA6111	RGB OUTPUT			
IC3801	AN7808LB	8V REGULATOR			
IC3803	AN7805LB	5V REGULATOR			
IC3804	AN7809FLB	9V REGULATOR			
IC3805	AN78L08TA	8V REGULATOR			
IC401	TDA9151-B	DEFLECTION CONTROL			
IC451	TDA8350Q/N5	VERTICAL OUTPUT			
IC601	TDA9143-N1	COLOUR DECODER			
IC602	TDA4665-V4	DELAY LINE			
IC603	TDA4780	RGB VIDEO PROCESSOR			
IC845	SE140N	ERROR AMPLIFIER			
IC851	TL431ACLPM	REGULATOR			
IC852	TL431ACLPM	REGULATOR			
<b>TERMINALS AND LINKS</b>					
JA2	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JA3	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JA5	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JA6	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JA7	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JA8	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JA9	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JK3001	TJBA039	A/V TERMINAL			
JSB3	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE010	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE011	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE012	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE015	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE022	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE023	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE024	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	

Ref No.	Part No.	Description			
JSE025	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE028	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE03	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE042	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE050	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE056	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE057	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE058	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE062	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE064	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE066	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE07	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSE091	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF001	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF002	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF003	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF004	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF005	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF006	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF008	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF011	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF012	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF014	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF015	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF026	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF036	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF039	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF040	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF041	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF042	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF044	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF045	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF046	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF048	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF049	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF050	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF051	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF055	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF056	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF057	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF064	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF066	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF072	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF073	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF075	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF076	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF077	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF080	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF081	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF086	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF087	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF088	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF089	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF090	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSF091	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSH004	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSH005	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSH01	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSH010	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
JSH02	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
<b>COILS</b>					
LC1507	EXCEMT103DTM	COIL			
LC1508	EXCEMT103DTM	COIL			
LC1509	EXCEMT103DTM	COIL			
LC1510	EXCEMT103DTM	COIL			
LC1610	ELKTR560BA	DELAY LINE			
L002	TLT047K991R	COIL			
L004	TLT047K991R	COIL			
L005	TLT047K991R	COIL			
L102	TLT056K991R	COIL			
L103	EQV7EN203B	COIL			

Ref No.	Part No.	Description
L105	ELESNR22MA	COIL
L107	ELESNR22MA	COIL
L108	ELESNR22MA	COIL
L109	EIL7EN015Q	COIL
L110	EQL7EN022Q	COIL
L113	EIL7EN015Q	COIL
L252	EXCELSA35T	COIL
L253	EXCELSA35T	COIL
L254	EXCELSA35T	COIL
L255	EXCELSA35T	COIL
L351	SDL5000	DELAY LINE
L352	EXCELD25V	COIL
L353	TLT150K991R	COIL
L361	SDL5000	DELAY LINE
L362	EXCELD25V	COIL
L363	TLT150K991R	COIL
L371	SDL5000	DELAY LINE
L372	EXCELD25V	COIL
L373	TLT150K991R	COIL
L381	TLT220K991R	COIL
L401	EXCELD35V	COIL
L402	EXCELD35V	COIL
L451	EXCELD35V	COIL
L552	EXCELSA35T	COIL
L553	EXCELSA35T	COIL
L554	EXCELD35V	COIL
L555	ERD25TC0T	CARBON 0.25W 5% 0Ω
L556	EXCELSA24T	COIL
L557	EXCELSA24T	COIL
L571	ELC18B221L	COIL
L572	ELHKL025B	COIL
L573	ELHKL026B	COIL
L575	ELC18B271E	COIL
L601	TLT047K991R	COIL
L602	TLT047K991R	COIL
L603	TLT047K991R	COIL
L605	EXCELD25V	COIL
L801	ELF18D424F	COIL
L802	ELF18D424F	COIL
L807	ELF18D860D	LINE FILTER
L808	EXCELSA35T	COIL
L809	EXCELD35V	COIL
L810	EXCELSA39V	COIL
L811	EXCELSA39V	COIL
L812	EXCELD35V	COIL
L813	EXCELD35V	COIL
L817	EXCELD35V	COIL
L845	EXCELSA35T	COIL
L847	EXCELSA35B	COIL
L848	EXCELSA35T	COIL
L850	EXCELSA35T	COIL
L851	EXCELSA35B	COIL
L852	EXCELSA35T	COIL
L853	EXCELSA35T	COIL
L854	ELEIE150KA	COIL
L856	EXCELSA35T	COIL
L861	EXCELSA35T	COIL
L862	EXCELSA35T	COIL
L864	EXCELD35V	COIL
L1102	EXCELD35V	COIL
L1103	EXCELD35V	COIL
L1104	EXCELSA35T	COIL
L1105	ELEXT4R7KA	COIL
L1302	TLT100K991R	COIL
L1304	TLT100K991R	COIL
L1307	ERD25TC0T	CARBON 0.25W 5% 0Ω
L1501	EXCELD35V	COIL
L1504	TLT018K991R	COIL
L1505	ELESN120JA	COIL
L1506	ELESN120JA	COIL
L1507	ELESN3R3JA	COIL
L1552	EXCELD35V	COIL

Ref No.	Part No.	Description
L1553	EXCELD35V	COIL
L1575	EXCELD35V	COIL
L1576	EXCELD35V	COIL
L1601	EXCELD35V	COIL
L1602	EXCELD35V	COIL
L1603	TLT100K991R	COIL
L1604	TLT100K991R	COIL
L1605	TLT100K991R	COIL
L1606	TLT100K991R	COIL
L1607	EXCELD35V	COIL
L1621	ELESN3R3JA	COIL
L1622	ELESN3R3JA	COIL
L1623	TLT022K991R	COIL
L1641	EXCELD35V	COIL
L1701	EXCELD35V	COIL
L2001	TLT047K991R	COIL
L2003	EXCELD35V	COIL
L2004	TLT068K991R	COIL
L2005	TLT068K991R	COIL
L2351	ELEBR6R8KA	COIL
L2361	ELEBR6R8KA	COIL
L3001	ELEBR6R8KA	COIL
L3002	ELEBR6R8KA	COIL
L3003	ELEBR470KA	COIL
L3107	EXCELD35V	COIL
L3108	EXCELD35V	COIL
L3109	EXCELD35V	COIL
L3110	EXCELD35V	COIL
L3111	EXCELD35V	COIL
L3112	EXCELD35V	COIL
L3113	EXCELD35V	COIL
L3114	EXCELD35V	COIL
L3503	EXCELD35V	COIL
L3507	EXCELD35V	COIL
L3509	EXCELD35V	COIL
L3511	TLT100K991R	COIL

## TRANSISTORS

Q008	BC847B	TRANSISTOR OR 2SD601ATX
Q101	BC847B	TRANSISTOR OR 2SD601ATX
Q102	BC847B	TRANSISTOR OR 2SD601ATX
Q103	BC847B	TRANSISTOR OR 2SD601ATX
Q104	BC847B	TRANSISTOR OR 2SD601ATX
Q105	BC847B	TRANSISTOR OR 2SD601ATX
Q106	BF799E6327	CHIPTRANSISTOR
Q107	BC847B	TRANSISTOR OR 2SD601ATX
Q108	BC847B	TRANSISTOR OR 2SD601ATX
Q109	BC860B	TRANSISTOR
Q251	BC847B	TRANSISTOR OR 2SD601ATX
Q252	BC847B	TRANSISTOR OR 2SD601ATX
Q401	BC847B	TRANSISTOR OR 2SD601ATX
Q502	2SC2925STA	TRANSISTOR
Q531	BC547B	TRANSISTOR
Q532	BC547B	TRANSISTOR
Q533	BC547B	TRANSISTOR
Q535	BC547B	TRANSISTOR
Q551	BC547B	TRANSISTOR
Q552	2SC5418001TV	TRANSISTOR
Q553	2SC1473-RN	TRANSISTOR
Q554	2SC1473-RN	TRANSISTOR
Q573	BC557B	TRANSISTOR
Q574	2SD1265AOPLB	TRANSISTOR
Q601	BC847B	TRANSISTOR OR 2SD601ATX
Q602	BC857B	TRANSISTOR OR 2SB709ATX
Q603	BC847B	TRANSISTOR OR 2SD601ATX
Q604	BC857B	TRANSISTOR OR 2SB709ATX
Q605	BC857B	TRANSISTOR OR 2SB709ATX
Q606	BC847B	TRANSISTOR OR 2SD601ATX
Q607	BC847B	TRANSISTOR OR 2SD601ATX
Q608	BC847B	TRANSISTOR OR 2SD601ATX
Q609	BC847B	TRANSISTOR OR 2SD601ATX

Ref No.	Part No.	Description
Q610	BC847B	TRANSISTOR OR 2SD601ATX
Q611	BC847B	TRANSISTOR OR 2SD601ATX
Q612	BC847B	TRANSISTOR OR 2SD601ATX
Q801	2SK1365LBMAT	TRANSISTOR
Q803	2SD965-R	TRANSISTOR
Q804	2SA719-TA	TRANSISTOR
Q845	2SA684R	TRANSISTOR
Q846	BC547B	TRANSISTOR
Q847	BC557B	TRANSISTOR
Q848	BC547B	TRANSISTOR
Q849	2SA1018QTA	TRANSISTOR
Q850	2SD1474PLB	TRANSISTOR
Q851	BC547B	TRANSISTOR
Q852	BC547B	TRANSISTOR
Q901	BC847B	TRANSISTOR OR 2SD601ATX
Q902	BC847B	TRANSISTOR OR 2SD601ATX
Q903	BC847B	TRANSISTOR OR 2SD601ATX
Q904	BC857B	TRANSISTOR OR 2SB709ATX
Q905	BC847B	TRANSISTOR OR 2SD601ATX
Q906	BC847B	TRANSISTOR OR 2SD601ATX
Q907	BC857B	TRANSISTOR OR 2SB709ATX
Q908	2SA1535ARLB	TRANSISTOR
Q909	2SC3944ARLB	TRANSISTOR
Q1052	BC557B	TRANSISTOR
Q1101	BC847B	TRANSISTOR OR 2SD601ATX
Q1102	BC847B	TRANSISTOR OR 2SD601ATX
Q1103	BC847B	TRANSISTOR OR 2SD601ATX
Q1108	BC847B	TRANSISTOR OR 2SD601ATX
Q1112	2SC3757QRTX	TRANSISTOR
Q1191	BC847B	TRANSISTOR OR 2SD601ATX
Q1301	BC847B	TRANSISTOR OR 2SD601ATX
Q1303	BC847B	TRANSISTOR OR 2SD601ATX
Q1501	BC847B	TRANSISTOR OR 2SD601ATX
Q1502	BC847B	TRANSISTOR OR 2SD601ATX
Q1503	BC847B	TRANSISTOR OR 2SD601ATX
Q1505	BC847B	TRANSISTOR OR 2SD601ATX
Q1561	BC847B	TRANSISTOR OR 2SD601ATX
Q1575	BC847B	TRANSISTOR OR 2SD601ATX
Q1635	BC857B	TRANSISTOR OR 2SB709ATX
Q1636	BC857B	TRANSISTOR OR 2SB709ATX
Q1642	BC847B	TRANSISTOR OR 2SD601ATX
Q1643	BC847B	TRANSISTOR OR 2SD601ATX
Q1644	BC857B	TRANSISTOR OR 2SB709ATX
Q1647	BC847B	TRANSISTOR OR 2SD601ATX
Q1648	BC857B	TRANSISTOR OR 2SB709ATX
Q1649	BC857B	TRANSISTOR OR 2SB709ATX
Q1650	BC857B	TRANSISTOR OR 2SB709ATX
Q2001	BC860B	TRANSISTOR
Q2002	BC860B	TRANSISTOR
Q2003	BC860B	TRANSISTOR
Q2004	BC860B	TRANSISTOR
Q2006	BC857B	TRANSISTOR OR 2SB709ATX
Q2007	BC847B	TRANSISTOR OR 2SD601ATX
Q2351	BC547B	TRANSISTOR
Q2352	BC547B	TRANSISTOR
Q2353	BC557B	TRANSISTOR
Q2361	BC547B	TRANSISTOR
Q2362	BC547B	TRANSISTOR
Q2363	BC557B	TRANSISTOR
Q3101	BC847B	TRANSISTOR OR 2SD601ATX
Q3102	BC847B	TRANSISTOR OR 2SD601ATX
Q3105	BC847B	TRANSISTOR OR 2SD601ATX
Q3106	BC847B	TRANSISTOR OR 2SD601ATX
Q3107	BC857B	TRANSISTOR OR 2SB709ATX
Q3108	BC847B	TRANSISTOR OR 2SD601ATX
Q3113	BC847B	TRANSISTOR OR 2SD601ATX
Q3115	BC857B	TRANSISTOR OR 2SB709ATX
Q3201	BC847B	TRANSISTOR OR 2SD601ATX
Q3351	BC847B	TRANSISTOR OR 2SD601ATX
Q3352	BC857B	TRANSISTOR OR 2SB709ATX
Q3501	BC847B	TRANSISTOR OR 2SD601ATX
Q3502	BC847B	TRANSISTOR OR 2SD601ATX

Ref No.	Part No.	Description
Q3503	2SC3130TX	TRANSISTOR
Q3801	2SD1474PLB	TRANSISTOR
<b>RESISTOR</b>		
RL806	TSE1885-1	TRANSISTOR
R003	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R006	ERJ6GEYJ393	S.M.CARB 0.1W 5% 39KΩ
R011	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R012	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R101	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R102	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R103	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R104	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R105	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R106	ERJ6GEYJ680	S.M.CARB 0.1W 5% 68Ω
R107	ERJ6GEYJ123	S.M.CARB 0.1W 5% 12KΩ
R109	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R110	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R111	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R113	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R115	ERJ6GEYJ121	S.M.CARB 0.1W 5% 120Ω
R117	ERJ6GEYJ683	S.M.CARB 0.1W 5% 68KΩ
R118	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R119	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R120	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R121	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R122	EVNDXAA03B24	CONTROL 20KΩ
R123	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R124	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R125	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R126	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R127	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R128	ERJ6GEYJ181	S.M.CARB 0.1W 5% 180Ω
R130	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R132	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R133	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R134	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R135	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R136	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R137	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R138	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R139	ERJ6GEYJ154	S.M.CARB 0.1W 5% 150KΩ
R141	ERJ6GEYJ330	S.M.CARB 0.1W 5% 33Ω
R142	ERJ6GEYJ271	S.M.CARB 0.1W 5% 270Ω
R143	ERJ6GEYJ123	S.M.CARB 0.1W 5% 12KΩ
R144	ERJ6GEYJ152	S.M.CARB 0.1W 5% 1K5Ω
R145	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R146	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R147	ERJ6GEYJ122	S.M.CARB 0.1W 5% 1K2Ω
R148	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18KΩ
R149	ERJ6GEYJ682	S.M.CARB 0.1W 5% 6K8Ω
R150	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R151	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R152	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R154	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R156	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R157	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R159	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15KΩ
R251	ERJ6GEYJ2R2	SM.CARB0.125W 5% 2R2Ω
R252	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15KΩ
R253	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R254	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R255	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R256	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R257	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R258	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R259	ERG3SJS120	METAL 3W 2% 12Ω ▲
R260	ERJ6GEYJ2R2	SM.CARB0.125W 5% 2R2Ω
R261	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15KΩ
R262	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R263	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω

Ref No.	Part No.	Description			
R264	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R265	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R266	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R267	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R268	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R269	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R270	ERG3SJS120	METAL	3W	2%	12Ω
R350	ERQ12AJ151P	FUSABLE	12W	5%	150Ω
R351	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R352	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R354	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R355	ERG2FJ823	METAL	2W	5%	82KΩ
R356	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R357	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2Ω
R358	ERDS1TJ821	CARBON	0.5W	5%	820Ω
R359	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330KΩ
R360	ERDS1TJ103	CARBON	0.5W	5%	10KΩ
R361	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R362	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R364	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R365	ERG2FJ823	METAL	2W	5%	82KΩ
R366	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R367	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2Ω
R368	ERDS1TJ821	CARBON	0.5W	5%	820Ω
R369	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R371	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R372	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R374	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R375	ERG2FJ823	METAL	2W	5%	82KΩ
R376	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R377	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2Ω
R378	ERDS1TJ821	CARBON	0.5W	5%	820Ω
R379	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R380	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R381	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560Ω
R383	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R385	ERQ12HKR39	METAL	0.5W	5%	R39Ω
R390	ERDS1TJ184	CARBON	0.5W	5%	180K
R401	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R402	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R403	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R406	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R407	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R408	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R409	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R410	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R411	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12KΩ
R412	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R451	ERJ6GEYJ302	S.M.CARB	0.1W	5%	3K0Ω
R452	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56KΩ
R453	ERG3FJX820D	METAL	3W	X%	82Ω
R454	ERX12SJ1R0	RESISTOR	12W	5%	1R0Ω
R455	ERX12SJR82P	RESISTOR	12W	5%	R82Ω
R456	ERQ14AJ220	FUSABLE	14W	5%	22Ω
R457	ERDS1TJ223	CARBON	0.5W	5%	22KΩ
R458	ERG1SJ272	METAL	1W	5%	2.7KΩ
R459	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R504	ERD25TJ271	S.M.CARB	0.25W	5%	270Ω
R505	ERG3SJS330	METAL	3W	X%	33Ω
R506	ERDS1TJ152	CARBON	0.5W	5%	1K5Ω
R507	ERDS1TJ152	CARBON	0.5W	5%	1K5Ω
R531	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R532	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R533	ERD25TJ683	CARBON	0.25W	5%	68KΩ
R534	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R535	ERD25TJ472	CARBON	0.25W	5%	4K7Ω
R536	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R539	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R540	ERD25TJ183	CARBON	0.25W	5%	18KΩ
R541	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R542	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R543	ERD25TJ222	CARBON	0.25W	5%	2K2Ω

Ref No.	Part No.	Description			
R547	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R551	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R552	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R553	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R554	ERX3SJSR27H	RESISTOR	3W	X%	R27Ω
R555	ERO25CKF2802	METAL	25W	1%	28KΩ
R556	ERO50PKF2802	METAL	50W	1%	28KΩ
R557	ERO25CKF1073	METAL	25W	1%	107KΩ
R559	ERO25CKF1002	METAL	0.25W	1%	10KΩ
R560	ERD25TJ222	CARBON	0.25W	5%	2K2Ω
R562	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R564	ERDS1TJ394	CARBON	0.5W	5%	390KΩ
R565	ERQ14AJW2R2	FUSABLE	14W	X%	2R2Ω
R566	ERDS1TJ183	CARBON	0.5W	5%	18KΩ
R567	ERG2ANJ223	METAL	2W	5%	22KΩ
R568	ERQ12HJ330	METAL	0.5W	5%	33Ω
R569	ERDS1TJ120	CARBON	0.5W	5%	12Ω
R570	ERD25TJ103	CARBON	0.25W	5%	10KΩ
R571	ERX3FJ2R7H	RESISTOR	3W	5%	2R7Ω
R572	ERG3FJ821	METAL	3W	5%	820Ω
R574	ERG3FJ151	METAL	3W	5%	150Ω
R579	ERD25TJ274	CARBON	0.25W	5%	270KΩ
R580	ERD25TJ563	CARBON	0.25W	5%	56KΩ
R581	ERD25TJ104	CARBON	0.25W	5%	100KΩ
R582	ERD25TJ225	CARBON	0.25W	5%	2M2Ω
R583	ERD25TJ225	CARBON	0.25W	5%	2M2Ω
R584	ERD25TJ152	CARBON	0.25W	5%	1K5Ω
R585	ERDS1TJ100	CARBON	0.5W	5%	10Ω
R587	ERD25TJ222	CARBON	0.25W	5%	2K2Ω
R588	ERD25TJ222	CARBON	0.25W	5%	2K2Ω
R589	TSF19201	FS LINK			
R601	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R602	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R603	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R604	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R605	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R606	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R609	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R610	ERJ6GEYJ823	S.M.CARB	0.1W	5%	82KΩ
R612	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R613	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R615	ERJ6GEYJ823	S.M.CARB	0.1W	5%	82KΩ
R616	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R617	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R618	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R619	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R620	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R621	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R624	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R625	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R626	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R627	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R628	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R629	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R630	ERJ6GEYJ560	S.M.CARB	0.1W	5%	56Ω
R632	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39KΩ
R633	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R634	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R635	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R636	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R637	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R639	EVNDXAA03B32	CONTROL			300Ω
R640	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R641	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R642	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270Ω
R643	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R644	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R645	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270Ω
R646	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R647	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R648	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R649	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω



Ref No.	Part No.	Description			
R651	ERJ6GEYJ225	SM.CARBO.125W	5%	2.2MΩ	
R652	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R653	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R654	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R655	ERJ6GEYJ243	SM.CARBO.125W	5%	24KΩ	
R656	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R657	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R658	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R659	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ	
R660	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ	
R661	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ	
R663	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R664	ERC14GJ206V	SOLID 14W	5%	20MΩ	
R665	ERC14GJ206V	SOLID 14W	5%	20MΩ	
R666	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R667	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R668	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R711	ERJ6GEYJ224	S.M.CARB 0.1W	5%	220KΩ	
R712	ERJ6GEYJ223	S.M.CARB 0.1W	5%	22KΩ	
R714	ERJ6GEYJ682	S.M.CARB 0.1W	5%	6K8Ω	
R715	ERJ6GEYJ222	S.M.CARB 0.1W	5%	2K2Ω	
R716	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R717	ERJ6GEYJ153	S.M.CARB 0.1W	5%	15KΩ	
R718	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R753	ERD25TJ333	CARBON 0.25W	5%	33KΩ	
R805	232266296706	THERMISTOR			
R807	ERD25TJ104	CARBON 0.25W	5%	100KΩ	
R809	ERF10ZK4R7	WOUND 10W	5%	4R7Ω	△
R810	ERD25TJ223	CARBON 0.25W	5%	22KΩ	
R811	ERD25TJ391	CARBON 0.25W	5%	390Ω	
R812	ERD25TJ681	CARBON 0.25W	5%	680Ω	
R814	ERD25TJ332	CARBON 0.25W	5%	3K3Ω	
R815	ERD25TJ150	CARBON 0.25W	5%	15Ω	
R816	ERDS1TJ470	CARBON 0.5W	5%	47Ω	
R818	ERD25TJ331	CARBON 0.25W	5%	330Ω	
R820	ERG3FJ223	METAL 3W	5%	22KΩ	△
R821	ERG3FJ223	METAL 3W	5%	22KΩ	△
R822	ERD25TJ391	CARBON 0.25W	5%	390Ω	
R823	ERX2SJR22	RESISTOR 2W	5%	R22Ω	
R824	ERX2SJR22	RESISTOR 2W	5%	R22Ω	
R825	ERX2SJR22	RESISTOR 2W	5%	R22Ω	
R827	ERDS1FJ100	CARBON 0.5W	5%	10Ω	
R828	ERD25TJ103	CARBON 0.25W	5%	10KΩ	
R829	ERD25TJ471	CARBON 0.25W	5%	470Ω	
R831	ERD75TAJ825	CARBON 0.75W	5%	8M2Ω	△
R832	ERG1SJ331	METAL 1W	5%	330Ω	△
R835	ERD25TJ220	CARBON 0.25W	5%	22Ω	
R836	ERD25TJ100	CARBON 0.25W	5%	10Ω	
R837	ERD25TJ153	CARBON 0.25W	5%	15KΩ	
R838	ERD25TJ102	CARBON 0.25W	5%	1KΩ	
R847	ERQ1CKPR82	METAL 1W	5%	R82Ω	△
R853	ERO25CKF1002	METAL 0.25W	1%	10KΩ	△
R854	ERDS1TJ153	CARBON 0.5W	5%	15KΩ	
R855	ERD25TJ472	CARBON 0.25W	5%	4K7Ω	
R856	ERD25TJ473	CARBON 0.25W	5%	47KΩ	
R858	ERO25CKF1002	METAL 0.25W	1%	10KΩ	△
R862	ERD25TJ472	CARBON 0.25W	5%	4K7Ω	
R863	ERG3FJ680	METAL 3W	5%	68Ω	△
R864	ERDS1TJ103	CARBON 0.5W	5%	10KΩ	
R865	ERG3FJ680	METAL 3W	5%	68Ω	△
R867	ERD25TJ102	CARBON 0.25W	5%	1KΩ	
R870	ERD25TJ101	CARBON 0.25W	5%	100Ω	
R873	ERDS1TJ3R3	CARBON 0.5W	5%	3R3Ω	
R876	ERD25TJ562	CARBON 0.25W	5%	5K6Ω	
R877	ERO25CKF1052	METAL 25W	1%	10KΩ	△
R878	ERO25CKF1002	METAL 0.25W	1%	10KΩ	△
R883	ERD25TJ103	CARBON 0.25W	5%	10KΩ	
R885	ERD25TJ103	CARBON 0.25W	5%	10KΩ	
R886	ERF10ZK4R7	WOUND 10W	5%	4R7Ω	△
R888	ERDS1TJ393	CARBON 0.5W	5%	39KΩ	
R889	ERD25TJ392	CARBON 0.25W	5%	3K9Ω	

Ref No.	Part No.	Description			
R890	ERX3SJR56	RESISTOR 3W	5%	R56Ω	
R891	ERD25TJ103	CARBON 0.25W	5%	10KΩ	
R892	ERD25TJ222	CARBON 0.25W	5%	2K2Ω	
R897	ERO25CKF1503	METAL 0.25W	1%	15Ω	△
R898	ERO25CKF1002	METAL 0.25W	1%	10KΩ	△
R905	ERJ6GEYJ681	S.M.CARB 0.1W	5%	680Ω	
R906	ERJ6GEYJ393	S.M.CARB 0.1W	5%	39KΩ	
R907	ERJ6GEYJ822	S.M.CARB 0.1W	5%	8K2Ω	
R908	ERJ6GEYJ471	S.M.CARB 0.1W	5%	470Ω	
R909	ERJ6GEYJ102	S.M.CARB 0.1W	5%	1KΩ	
R910	ERJ6GEYJ221	S.M.CARB 0.1W	5%	220Ω	
R911	ERD25TJ561	CARBON 0.25W	5%	560Ω	
R913	ERJ6GEYJ153	S.M.CARB 0.1W	5%	15KΩ	
R914	ERJ6GEYJ222	S.M.CARB 0.1W	5%	2K2Ω	
R915	ERJ6GEYJ681	S.M.CARB 0.1W	5%	680Ω	
R916	ERJ6GEYJ331	S.M.CARB 0.1W	5%	330Ω	
R918	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R919	ERQ14AJW390	FUSABLE 14W	X%	39Ω	△
R920	ERQ14AJW390	FUSABLE 14W	X%	39Ω	△
R922	ERD25TJ683	CARBON 0.25W	5%	68KΩ	
R923	ERD25TJ683	CARBON 0.25W	5%	68KΩ	
R924	ERDS1FYJ390	CARBON 0.5W	5%	39Ω	△
R925	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R926	ERJ6GEY0R00	S.M.CARB 0.1W	5%	0Ω	
R927	ERD25TJ122	CARBON 0.25W	5%	1K2Ω	
R928	ERD25TJ2R7	CARBON 0.25W	5%	2R7Ω	
R929	ERDS1FYJ221	CARBON 0.5W	5%	220Ω	
R930	ERD25TJ2R7	CARBON 0.25W	5%	2R7Ω	
R931	ERDS1FYJ390	CARBON 0.5W	5%	39Ω	△
R932	ERDS1FYJ101	CARBON 0.5W	5%	100Ω	△
R933	ERJ6GEYJ223	S.M.CARB 0.1W	5%	22KΩ	
R934	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R935	ERQ14AJW3R9	FUSABLE 14W	X%	3R9Ω	△
R936	ERQ1CJP102	METAL 1W	5%	1KΩ	△
R937	ERQ14AJW100	METAL 0.25W	5%	10Ω	△
R938	ERD25TJ122	CARBON 0.25W	5%	1K2Ω	
R940	ERD25TJ3R3	CARBON 0.25W	5%	3R3Ω	
R941	ERD25TJ3R3	CARBON 0.25W	5%	3R3Ω	
R1054	ERD25TJ101	CARBON 0.25W	5%	100Ω	
R1057	ERD25TJ101	CARBON 0.25W	5%	100Ω	
R1058	ERD25TJ471	CARBON 0.25W	5%	470Ω	
R1059	ERD25TJ103	CARBON 0.25W	5%	10KΩ	
R1061	ERD25TJ103	CARBON 0.25W	5%	10KΩ	
R1062	ERD25TJ222	CARBON 0.25W	5%	2K2Ω	
R1063	ERD25TJ222	CARBON 0.25W	5%	2K2Ω	
R1064	ERD25TJ332	CARBON 0.25W	5%	3K3Ω	
R1065	ERD25TJ512	CARBON 0.25W	5%	5K1Ω	
R1066	ERD25TJ912	CARBON 0.25W	5%	9K1Ω	
R1101	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1102	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1103	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1104	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1105	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1106	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1107	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1108	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1111	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1112	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1113	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1116	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1117	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1118	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1119	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1120	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1121	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1122	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1123	ERJ6GEYJ472	S.M.CARB 0.1W	5%	4K7Ω	
R1124	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R1125	ERJ6GEYJ103	S.M.CARB 0.1W	5%	10KΩ	
R1126	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	
R1127	ERJ6GEYJ101	S.M.CARB 0.1W	5%	100Ω	

Ref No.	Part No.	Description
R1128	ERJ6GEYJ100	S.M.CARB 0.1W 5% 10Ω
R1129	ERJ6GEYJ100	S.M.CARB 0.1W 5% 10Ω
R1133	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1134	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1135	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R1136	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R1137	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1138	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1142	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1145	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1150	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1151	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1152	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1153	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1154	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1156	ERJ6GEYJ182	S.M.CARB 0.1W 5% 1K8Ω
R1163	ERJ6GEYJ152	S.M.CARB 0.1W 5% 1K5Ω
R1164	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1169	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R1170	ERJ6GEYJ332	S.M.CARB 0.1W 5% 3K3Ω
R1171	ERJ6GEYJ682	S.M.CARB 0.1W 5% 6K8Ω
R1172	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1174	ERDS1TJ561	CARBON 0.5W 5% 560Ω
R1182	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1183	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1184	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1185	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1186	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1188	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R1190	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R1191	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R1192	ERJ6GEYJ104	S.M.CARB 0.1W 5% 100KΩ
R1193	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1194	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1301	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R1302	ERJ6GEYJ392	S.M.CARB 0.1W 5% 3K9Ω
R1305	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1306	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1315	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1317	ERJ6GEYJ181	S.M.CARB 0.1W 5% 180Ω
R1318	ERJ6GEYJ181	S.M.CARB 0.1W 5% 180Ω
R1319	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R1340	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R1504	ERJ6GEYJ121	S.M.CARB 0.1W 5% 120Ω
R1507	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R1508	ERJ6GEYJ121	S.M.CARB 0.1W 5% 120Ω
R1510	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1511	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R1513	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R1515	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1516	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1517	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1518	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1519	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1520	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1523	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1550	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R1554	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1555	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R1556	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1557	ERJ6GEYJ680	S.M.CARB 0.1W 5% 68Ω
R1559	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1560	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1561	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1562	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1564	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1565	ERJ6GEYJ562	S.M.CARB 0.1W 5% 5K6Ω
R1566	ERJ6GEYJ392	S.M.CARB 0.1W 5% 3K9Ω
R1567	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1568	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R1570	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R1572	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω

Ref No.	Part No.	Description
R1575	ERJ6GEYJ391	S.M.CARB 0.1W 5% 390Ω
R1576	ERJ6GEYJ821	S.M.CARB 0.1W 5% 820Ω
R1577	ERJ6GEYJ750	S.M.CARB 0.1W 5% 75Ω
R1578	ERJ6GEYJ100	S.M.CARB 0.1W 5% 10Ω
R1581	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R1582	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R1583	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1584	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1587	ERJ6GEYJ223	S.M.CARB 0.1W 5% 22KΩ
R1605	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1606	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1608	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1620	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1621	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1622	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1627	ERJ6GEYJ622	SM.CARB0.125W 5% 6.2KΩ
R1628	ERJ6GEYJ161	SM.CARB0.125W 5% 160Ω
R1629	ERJ6GEYJ201	S.M.CARB 0.1W 5% 200Ω
R1630	ERJ6GEYJ181	S.M.CARB 0.1W 5% 180Ω
R1631	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R1632	ERJ6GEYJ133	SM.CARB0.125W 5% 13KΩ
R1633	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R1634	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1635	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1636	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1637	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1638	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1639	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1641	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1643	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R1644	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1646	ERJ6GEYJ331	S.M.CARB 0.1W 5% 330Ω
R1647	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R1648	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1649	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1650	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1652	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1653	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1654	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1656	ERJ6GEYJ102	S.M.CARB 0.1W 5% 1KΩ
R1657	ERJ6GEYJ471	S.M.CARB 0.1W 5% 470Ω
R1658	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1659	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1662	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1666	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R1667	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1668	ERJ6GEYJ560	S.M.CARB 0.1W 5% 56Ω
R1669	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R1670	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R1671	ERJ6GEYJ272	S.M.CARB 0.1W 5% 2K7Ω
R1672	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R1673	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R1674	ERJ6GEYJ221	S.M.CARB 0.1W 5% 220Ω
R1679	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R1680	ERJ6GEYJ153	S.M.CARB 0.1W 5% 15KΩ
R1681	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R1682	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R1683	ERJ6GEYJ151	S.M.CARB 0.1W 5% 150Ω
R1688	ERJ6GEYJ561	S.M.CARB 0.1W 5% 560Ω
R1701	ERJ6GEYJ472	S.M.CARB 0.1W 5% 4K7Ω
R1702	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R1703	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R2001	ERJ6GEYJ473	S.M.CARB 0.1W 5% 47KΩ
R2004	ERJ6GEYJ103	S.M.CARB 0.1W 5% 10KΩ
R2005	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R2006	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R2007	ERJ6GEYJ183	S.M.CARB 0.1W 5% 18KΩ
R2008	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R2009	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0Ω
R2010	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω
R2011	ERJ6GEYJ222	S.M.CARB 0.1W 5% 2K2Ω
R2012	ERJ6GEYJ101	S.M.CARB 0.1W 5% 100Ω

Ref No.	Part No.	Description			
R2013	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2014	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2015	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2016	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2017	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2Ω
R2018	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2019	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2020	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R2021	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2022	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2023	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2025	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12KΩ
R2026	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6Ω
R2027	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R2038	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R2039	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2044	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2045	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R2351	ERQ14AJW100	METAL	0.25W	5%	10Ω
R2352	ERD25TJ101	CARBON	0.25W	5%	100Ω
R2353	ERD25TJ101	CARBON	0.25W	5%	100Ω
R2354	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R2355	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2356	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2357	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2358	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2359	ERD25TJ271	CARBON	0.25W	5%	270Ω
R2360	ERD25TJ183	CARBON	0.25W	5%	18KΩ
R2361	ERD25TJ100	CARBON	0.25W	5%	10Ω
R2371	ERQ14AJW100	METAL	0.25W	5%	10Ω
R2372	ERD25TJ101	CARBON	0.25W	5%	100Ω
R2373	ERD25TJ101	CARBON	0.25W	5%	100Ω
R2374	ERD25TJ473	CARBON	0.25W	5%	47KΩ
R2375	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2376	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2377	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2378	ERD25TJ102	CARBON	0.25W	5%	1KΩ
R2379	ERD25TJ271	CARBON	0.25W	5%	270Ω
R2380	ERD25TJ183	CARBON	0.25W	5%	18KΩ
R2381	ERD25TJ100	CARBON	0.25W	5%	10Ω
R3006	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3101	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3102	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3107	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3108	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3109	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3110	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3114	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3115	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3117	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3118	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3126	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3127	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3128	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3129	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3130	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3131	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3132	ERD2FCVVG100T	CARBON	2W	2%	10Ω
R3133	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3134	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3135	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3136	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3137	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3138	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3139	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3140	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3141	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3142	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3143	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ
R3144	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3145	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3146	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ

Ref No.	Part No.	Description			
R3147	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3148	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3149	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3150	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3151	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3152	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3153	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3154	ERD2FCVVG100T	CARBON	2W	2%	10Ω
R3158	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3159	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680Ω
R3160	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56KΩ
R3161	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120Ω
R3162	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3163	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3165	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3167	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3178	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3180	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3182	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3184	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3185	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ
R3186	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3187	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33KΩ
R3188	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3192	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3193	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3194	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3195	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3196	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3197	ERD2FCVVG100T	CARBON	2W	2%	10Ω
R3198	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3199	ERJ6GEYJ470	S.M.CARB	0.1W	5%	47Ω
R3200	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3201	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R3202	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3Ω
R3205	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3206	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3207	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3208	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3209	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3210	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5Ω
R3211	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5Ω
R3212	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12KΩ
R3213	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3214	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3215	ERD2FCVVG100T	CARBON	2W	2%	10Ω
R3216	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3217	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3218	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75Ω
R3226	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3227	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3228	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68Ω
R3229	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3230	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3231	ERD2FCVVG100T	CARBON	2W	2%	10Ω
R3232	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7Ω
R3233	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330Ω
R3236	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3237	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10KΩ
R3238	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3239	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15KΩ
R3240	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100KΩ
R3351	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω
R3352	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R3353	ERJ6GEYJ474	S.M.CARB	0.1W	5%	470KΩ
R3354	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3355	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω
R3501	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R3502	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3503	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3505	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω
R3506	ERJ6GEYJ100	S.M.CARB	0.1W	5%	10Ω

Ref No.	Part No.	Description			
R3507	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R3508	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150Ω
R3509	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3513	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3514	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3515	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470Ω
R3516	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7Ω
R3517	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1KΩ
R3518	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3520	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R3521	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3522	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3523	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3526	ERD25TC0T	CARBON	0.25W	5%	0Ω
R3531	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R3532	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390Ω
R3534	ERD25TJ181	CARBON	0.25W	5%	180Ω
R3536	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3539	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0Ω
R3540	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R3541	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R3542	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9Ω
R3802	ERG3FJ100	METAL	3W	5%	10Ω
R3803	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220Ω
R3804	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100Ω

### SWITCHES

S801	ESB91232A	SWITCH			
S1051	EVQ23405R	SWITCH			

### DIFFERENCES FOR TX-25XD60F

#### MISCELLANEOUS COMPONENTS

4)	TNPA0292AP	Y-PC.B.			
5)	TLK8E05120	DEGAUSS COIL			
7)	A59ECF50X71	CRT			
8)	TKY8E151-2	CABINET			
9)	TKP8E1168	SPEAKER NET			
12)	TKP8E1171	TOP PANEL (BLACK)			
14)	TQF8E2533	MODEL LABEL			
15)	TKU8E00310	BACK COVER			
16)	TNPA0295AS	D PC.B.			
20)	TNPH0063BJ	E PC.B.			
26)	TKP8E1201	RIGHT PANEL (BLACK)			
11)	TKP8E1173	LEFT PANEL (BLACK)			
	TPC8E4613	OUTER CARTON			
	TPD8E631	TOP CUSHION			
	TPD8E632	BOTTOM CUSHION			

### CAPACITORS

C256	ECA1HM100GB	ELECT	50V	10pF	
C263	ECA1HM100GB	ELECT	50V	10pF	

### INTEGRATED CIRCUITS

IC1104	X24C0301EM	EAROM			
IC1105	27C2001501AB	EPROM			

### RESISTOR

R558	ERD25TJ823	CARBON	0.25W	5%	82KΩ
------	------------	--------	-------	----	------

Ref No.	Part No.	Description
S1052	EVQ23405R	SWITCH
S1053	EVQ23405R	SWITCH
S1054	EVQ23405R	SWITCH
S1055	EVQ23405R	SWITCH

### TRANSFORMERS

T501	TLHA003	TRANSFORMER
T551	ZTFH65013A	F.B.T.
T801	ETP35KAN615U	TRANSFORMER
T802	ETS49AH137ND	TRANSFORMER
T803	ETQ19K55AY	TRANSFORMER

### FILTERS

X101	EFCT6504BF	FILTER
X102	EFCT5M7MW3	FILTER
X103	EFCT6R0MW5	FILTER
X104	K3953-M100	SAW FILTER
X105	K9456M	SAW FILTER
X106	EFCV3195T6	CERAMIC FILTER
X107	EFCT7004BF	CERAMIC FILTER
X109	EFCV4045T4	CERAMIC FILTER
X601	TSSA024	CRYSTAL
X602	TSSA025	CRYSTAL
X1101	TAF10020	CRYSTAL
X1551	TSSA009	CRYSTAL
X2001	4730007158	CRYSTAL
X3501	TSSA009	CRYSTAL

### DIFFERENCES FOR TX-28XD60F

#### MISCELLANEOUS COMPONENTS

4)	TNPA0292AF	Y PC.B.			
5)	TLK8E05125	DEGAUSS COIL			
7)	A66ECF61X71	CRT			
8)	TKY8E161	CABINET			
9)	TKP8E1169	SPEAKER NET			
12)	TKP8E1172	TOP PANEL (BLACK)			
14)	TQF8E2558	MODEL LABEL			
15)	TKU8E00320	BACK COVER			
16)	TNPA0295AJ	D PC.B.			
20)	TNPH0063AJ	E PC.B.			
26)	TKP8E1199	RIGHT PANEL (BLACK)			
11)	TKP8E1175	LEFT PANEL (BLACK)			
	TPC8E4587	OUTER CARTON			
	TPD8E633	TOP CUSHION			
	TPD8E634	BOTTOM CUSHION			

### CAPACITORS

C256	ECA1HM330B	ELECT	50V	33pF	
C263	ECA1HM330B	ELECT	50V	33pF	

### INTEGRATED CIRCUITS

IC1104	X24C0302EN	EAROM			
IC1105	27C2001501AA	EPROM			

### RESISTOR

R558	ERO50PKF4532	METAL	50W	1%	45KΩ
------	--------------	-------	-----	----	------

**NOTE:**

For models with the dark walnut finish please refer to the TX-28XD60F/A and TX-25XD60F/A Difference Lists and for Models with the light mahogany please refer to the TX-28XD60F/B AND TX-25XD60F/B

**DIFFERENCES FOR TX-25XD60F/A**

Ref No.	Part No.	Description	
<b>MISCELLANEOUS COMPONENTS</b>			
4)	TNPA0292AP	Y-PC.B.	△
5)	TLK8E05120	DEGAUSS COIL	△
7)	A59ECF50X71	CRT	
8)	TKY8E151-2	CABINET	△
9)	TKP8E1168	SPEAKER NET	
10)	TBX8E045	POWER BUTTON (DARK WOOD)	
11)	TKP8E1192	LEFT PANEL (DARK WOOD)	
12)	TKP8E1190	TOP PANEL (DARK WOOD)	
14)	TQF8E2534	MODEL LABEL	
15)	TKU8E00310	BACK COVER	△
16)	TNPA0295AS	D P.C.B.	△
20)	TNPH0063BL	E P.C.B.	△
26)	TKP8E1202	RIGHT PANEL (DARK WOOD)	
27)	TKP8E1173	DOOR LID (DARK WOOD)	
	TPC8E4613	OUTER CARTON	
	TPD8E631	TOP CUSHION	
	TPD8E632	BOTTOM CUSHION	
<b>INTEGRATED CIRCUITS</b>			
IC1104	X24C0301EM	EAROM	
IC1105	27C2001-AB	EPROM	
<b>RESISTOR</b>			
R558	ERD25TJ823	CARBON 0.25W	5% 82KΩ

**DIFFERENCES FOR TX-28XD60F/A**

Ref No.	Part No.	Description	
<b>MISCELLANEOUS COMPONENTS</b>			
4)	TNPA0292AF	Y P.C.B.	△
5)	TLK8E05125	DEGAUSS COIL	△
7)	A66ECF61X71	CRT	△
8)	TKY8E161	CABINET	△
9)	TKP8E1169	SPEAKER NET	
10)	TBX8E040	POWER BUTTON (DARK WOOD)	
11)	TKP8E1184	LEFT PANEL (DARK WOOD)	
12)	TKP8E1182	TOP PANEL (DARK WOOD)	
14)	TQF8E2539	MODEL LABEL	
15)	TKU8E00320	BACK COVER	△
16)	TNPA0295AR	D P.C.B.	△
20)	TNPH0063BH	E P.C.B.	△
26)	TKP8E1203	RIGHT PANEL (DARK WOOD)	
27)	TKP8E1180	DOOR LID (DARK WOOD)	
	TPC8E4587	OUTER CARTON	
	TPD8E633	TOP CUSHION	
	TPD8E634	BOTTOM CUSHION	
<b>INTEGRATED CIRCUITS</b>			
IC1104	X24C0302EN	EAROM	
IC1105	27C2001501AA	EPROM	
<b>RESISTOR</b>			
R558	ERO50PKF4532	METAL 50W	1% 45KΩ △

**DIFFERENCES FOR TX-25XD60F/B**


Ref No.	Part No.	Description	
<b>MISCELLANEOUS COMPONENTS</b>			
4)	TNPA0292AP	Y-PC.B.	△
5)	TLK8E05120	DEGAUSS COIL	△
7)	A59ECF50X71	CRT	
8)	TKY8E151-2	CABINET	△
9)	TKP8E1168	SPEAKER NET	
10)	TBX8E046	POWER BUTTON (LIGHT WOOD)	
11)	TKP8E1193	LEFT PANEL (LIGHT WOOD)	
12)	TKP8E1191	TOP PANEL (LIGHT WOOD)	
14)	TQF8E2535	MODEL LABEL	
15)	TKU8E00310	BACK COVER	△
16)	TNPA0295AS	D P.C.B.	△
20)	TNPH0063BL	E P.C.B.	△
26)	TKP8E1196	RIGHT PANEL (LIGHT WOOD)	
27)	TKP8E1181	DOOR LID (LIGHT WOOD)	
	TPC8E4613	OUTER CARTON	
	TPD8E631	TOP CUSHION	
	TPD8E632	BOTTOM CUSHION	
<b>INTEGRATED CIRCUITS</b>			
IC1104	X24C0301BM	EAROM	
IC1105	27C2001-503	EPROM	
<b>RESISTOR</b>			
R558	ERD25TJ823	CARBON 0.25W	5% 82KΩ

**DIFFERENCES FOR TX-28XD60F/B**







Ref No.	Part No.	Description	
<b>MISCELLANEOUS COMPONENTS</b>			
4)	TNPA0292AF	Y P.C.B.	△
5)	TLK8E05125	DEGAUSS COIL	△
7)	A66ECF61X71	CRT	△
8)	TKY8E161	CABINET	△
9)	TKP8E1169	SPEAKER NET	
10)	TBX8E046	POWER BUTTON (LIGHT WOOD)	
11)	TKP8E1185	LEFT PANEL (LIGHT WOOD)	
12)	TKP8E1183	TOP PANEL (LIGHT WOOD)	
14)	TQF8E2540	MODEL LABEL	
15)	TKU8E00320	BACK COVER	△
16)	TNPA0295AR	D P.C.B.	△
20)	TNPH0063BH	E P.C.B.	△
26)	TKP8E1188	RIGHT PANEL (LIGHT WOOD)	
27)	TKP8E1181	DOOR LID (LIGHT WOOD)	
	TPC8E4587	OUTER CARTON	
	TPD8E633	TOP CUSHION	
	TPD8E634	BOTTOM CUSHION	
<b>INTEGRATED CIRCUITS</b>			
IC1104	X24C0302BN	EAROM	
IC1105	27C2001501AC	EPROM	
<b>RESISTOR</b>			
R558	ERO50PKF4532	METAL 50W	1% 45KΩ △

# SCHEMATIC DIAGRAM FOR MODELS TX-28XD60F TX-25XD60F (Euro-3H Chassis)

## IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

## Notes

- RESISTOR**  
All resistors are carbon 1/4W resistor, unless marked as follows:  
Unit of resistance is OHM ( $\Omega$ ) (K=1,000, M=1,000,000).
- CAPACITORS**  
All capacitors are ceramic 50V, unless marked as follows:  
Unit of capacitance is  $\mu$ F, unless otherwise stated.
- COIL**  
Unit of inductance is  $\mu$ H, unless otherwise stated.
- Components marked 'L' on the schematic diagram shows leadless parts.
- TEST POINT**  
 : Test Point position
- EARTH SYMBOL**  
 : Chassis Earth (Cold)  : Line Earth (Hot)
- VOLTAGE MEASUREMENT**  
Voltage is measured by a DC voltmeter.  
Measurement conditions are as follows:  
Power source AC 220V-240V, 50Hz  
Receiving Signal Colour Bar signal (RF)  
All customer controls Maximum position
-  : Indicates the Video signal path  
 : Indicates the Audio signal path  
 : Indicates the Vertical/Horizontal signal path
- This schematic diagram is the latest at the time of printing and is subject to change without notice.

## Remarks

- The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD. Take the following precautions:

## Precautions







- Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- Do not short-circuit the hot and cold circuits as electrical components may be damaged.
- Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously, as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- Make sure to disconnect the power plug before removing the chassis.

# ZEICHENERKLÄRUNG FÜR MODELL TX-28XD60F TX-25XD60F (Euro-3H Chassis)

## WICHTIGER SICHERHEITSHINWEIS

Teile, die mit einem Hinweis  gekennzeichnet sind, sind wichtig für die Sicherheit. Sollte ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.

## Anmerkung

- WIDERSTÄNDE**  
Alle 1/4Watt Widerstände sind Kohlewiderstände, Abweichungen sind folgt gekennzeichnet.  
Die Maßeinheit ist OHM ( $\Omega$ ) (K=1,000 M=1,000,000)
- KONDENSATOREN**  
Alle Kondensatoren sind Keramikausführungen  
Spannungsfestigkeit 50V. Abweichungen sind wie folgt gekennzeichnet.  
Die Maßeinheit ist  $\mu$ F, wenn keine anderen Bezeichnungen genannt sind
- SPULEN**  
Die Maßeinheit ist  $\mu$ H, Abweichungen sind gekennzeichnet.  
Mit 'L' gekennzeichnete Teile sind ohne Anschlußdrähte.
- TESTPUNKTE**  
 : Kennzeichnung der Testpunktposition
- MASSE SYMBOL**  
 : Erdung am Chassis  : Erdung an Masse-Leitung
- SPANNUNGSMESSUNG**  
Spannungsmessungen sind mit einem DC-Voltmeter durchzuführen. Die Meßbedingungen sind folgende:  
Netzspannung AC 220V-240V 50Hz  
Wiedergabe Signal Farbbalken-Testbild  
Alle übrigen Einstellungen für Benutzer Sollangaben
-  : Videosignalweg  
 : Audiosignalweg  
 : Signalweg für Hor/Vert. Synchronsignale
- Änderungen im Laufe der Fertigung sind möglich.


## Bemerkungen

- Das Schaltnetzteil enthält Bereiche, die direkt mit dem Netz verbunden sind. Diese Bereiche sind im Schalplan mit HOT gekennzeichnet. Alle anderen Schaltungen sind mit COLD gekennzeichnet und haben keine direkte Verbindung mit dem Netz.

## Für den netzverbundenen Bereich (HOT) sind folgende Vorsichtsmaßnahmen zu beachten:


- Weder die Leitungen im heißen noch Leitungen im kalten und im kalten Bereich gleichzeitig berühren. Es besteht die Gefahr eines elektrischen Schlages.
- Keinesfalls die Leitungen im heißen Bereich mit denen im kalten Bereich verbinden oder kurzschließen. Dies kann zur Zerstörung von Bauteilen oder Sicherungen führen. Außerdem ist die elektrische Betriebssicherheit des Gerätes nicht mehr gegeben.
- Keine Messinstrumente gleichzeitig an Leitungen im heißen und kalten Bereich anschließen. Sicherungen könnten zerstört werden. Die Erde des Messinstrumentes immer mit der des zu prüfenden Schaltkreises verbinden.
- Vor Ausbau des Chassis, Stecker aus der Netzsteckdose ziehen.

B BOARD  
TNPA0317

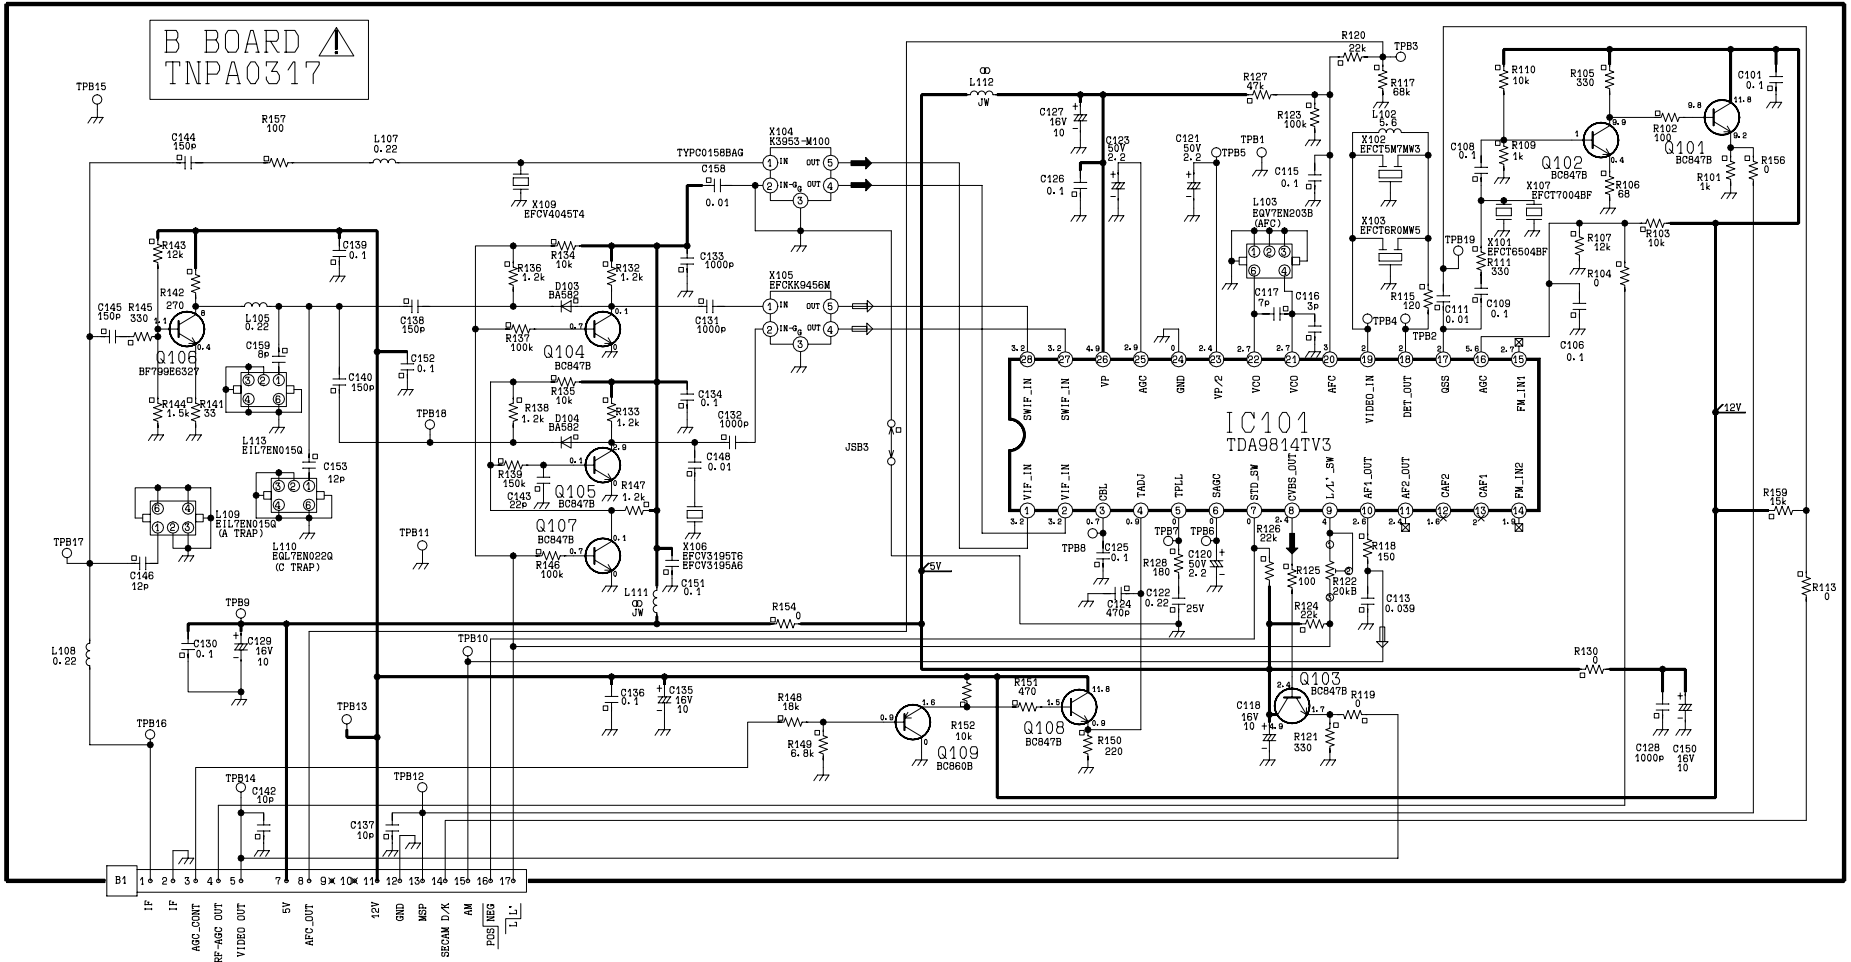

- 1 IF
- 2 IF
- 3 ARC\_OUT
- 4 RF-ARC\_OUT
- 5 VIDEO\_OUT
- 6
- 7 AFC\_OUT
- 8 5V
- 9 12V
- 10 GND
- 11 MSP
- 12 SECAM D/K
- 13 PGM/NEG
- 14 L
- 15
- 16
- 17




# D BOARD TNPA0295

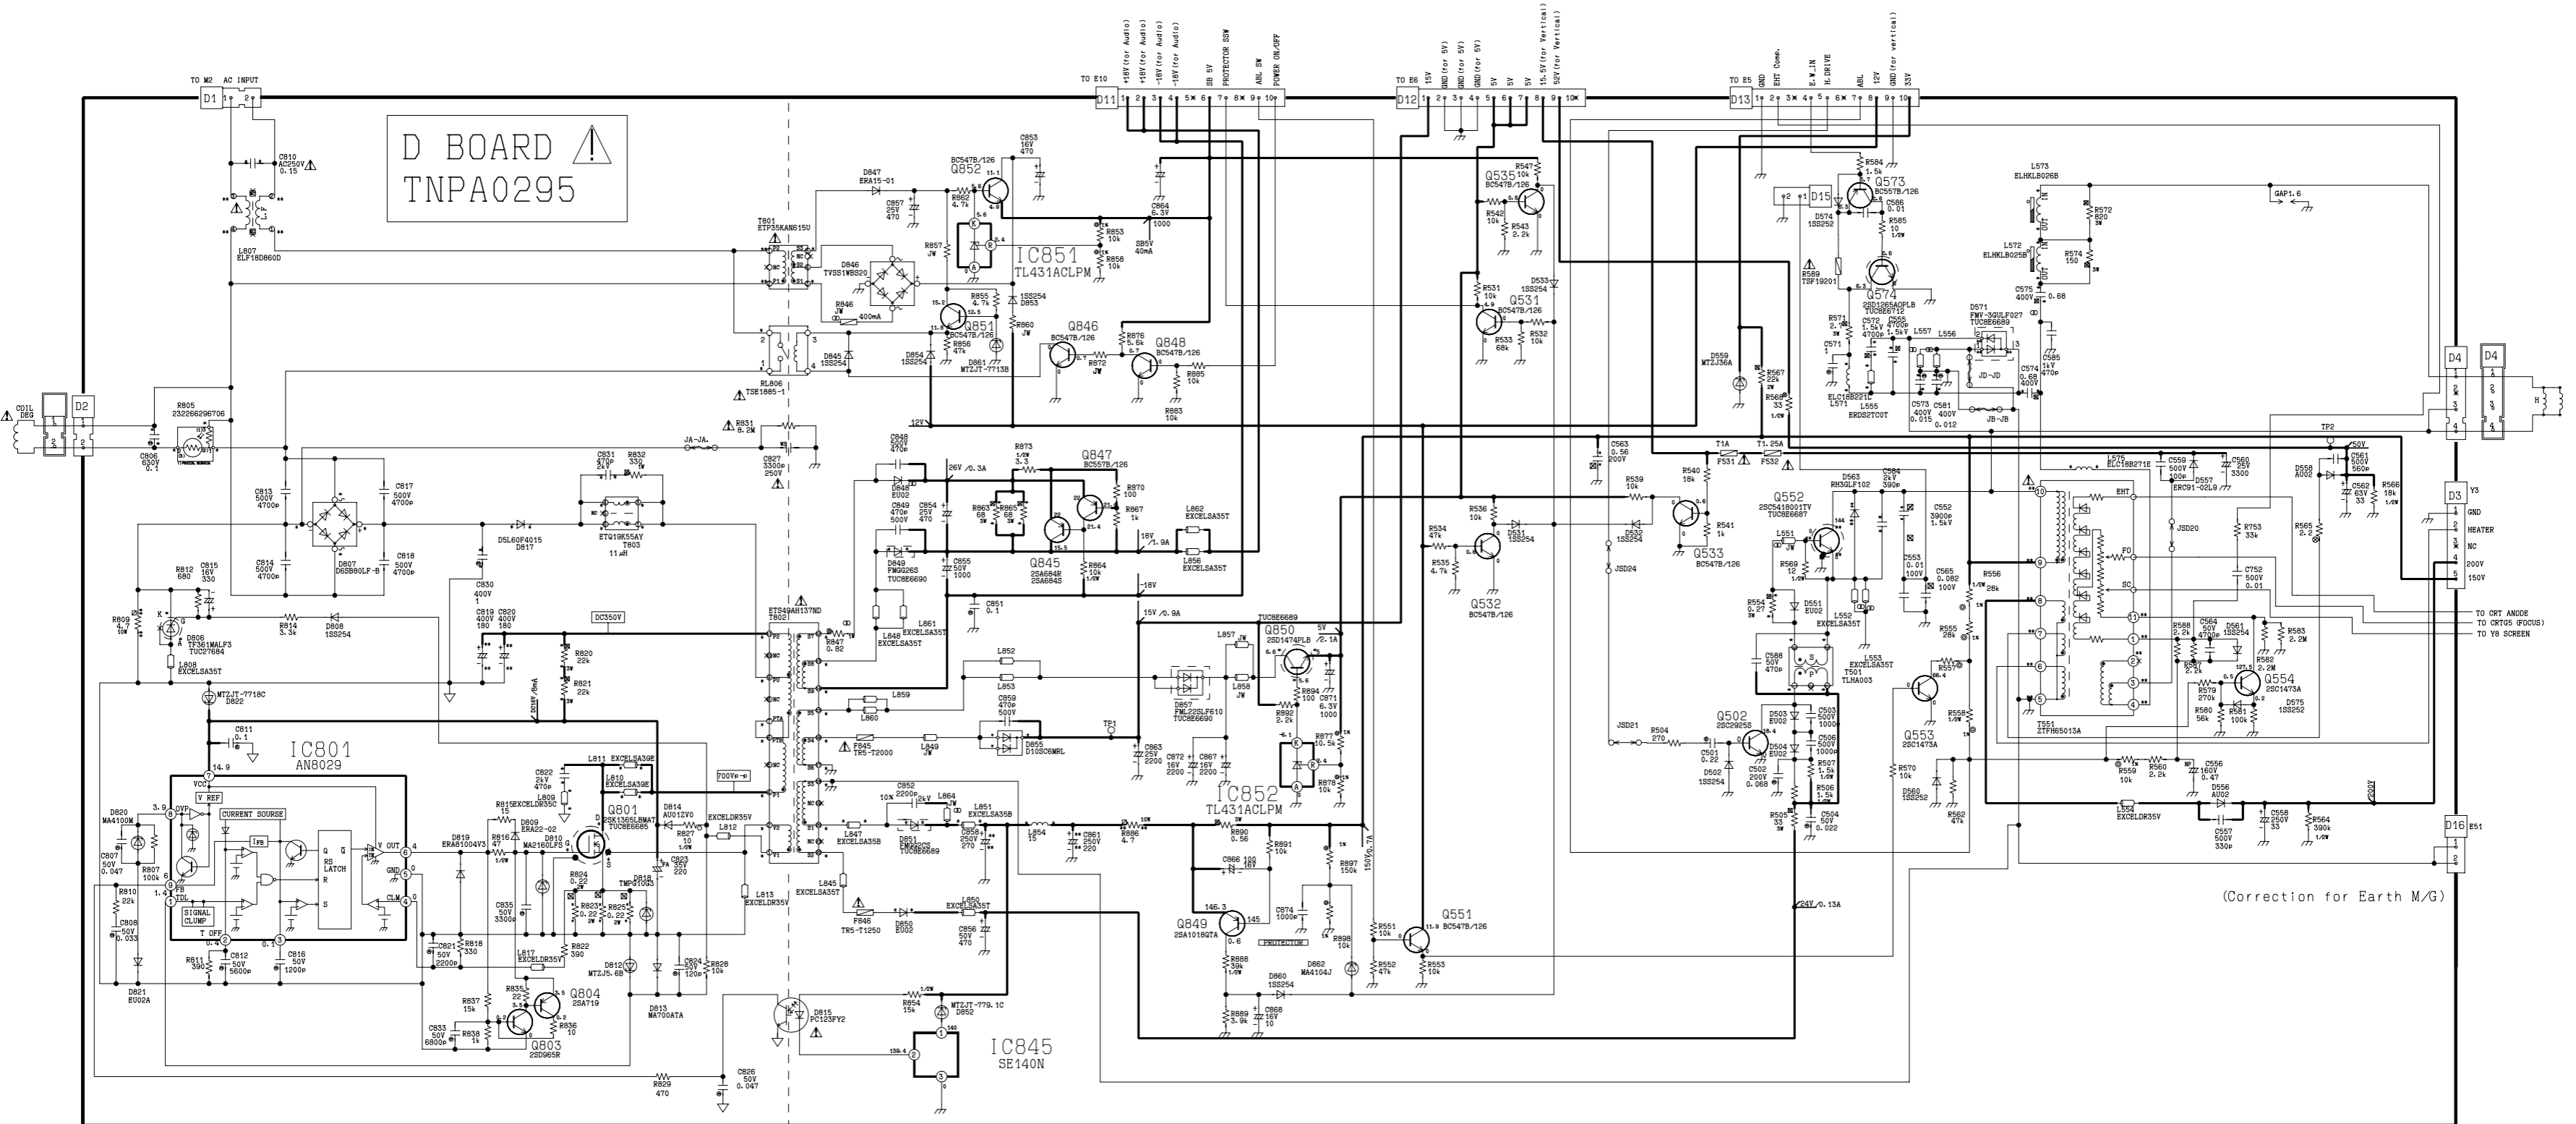

(Correction for Earth M/G)




# E BOARD TNP0063

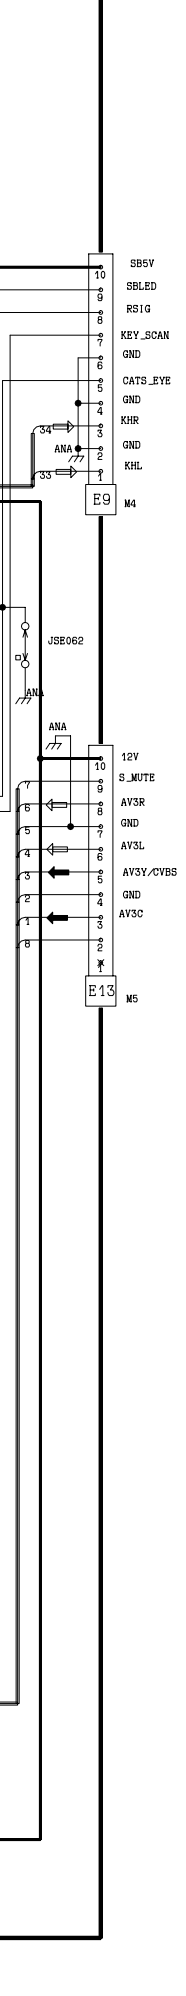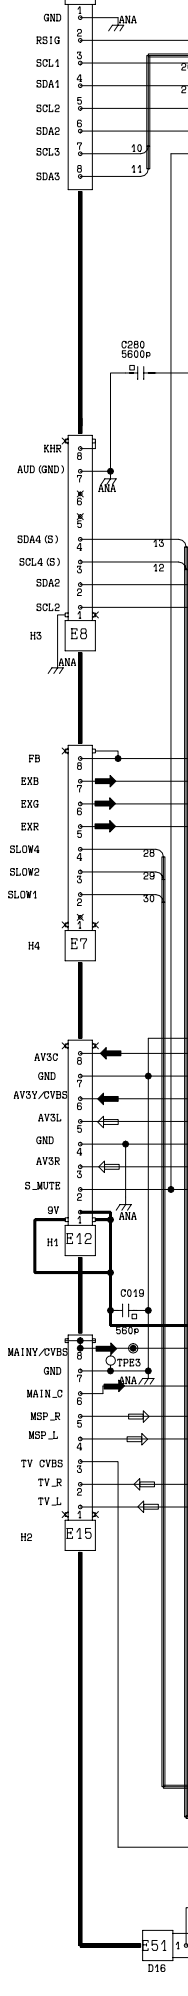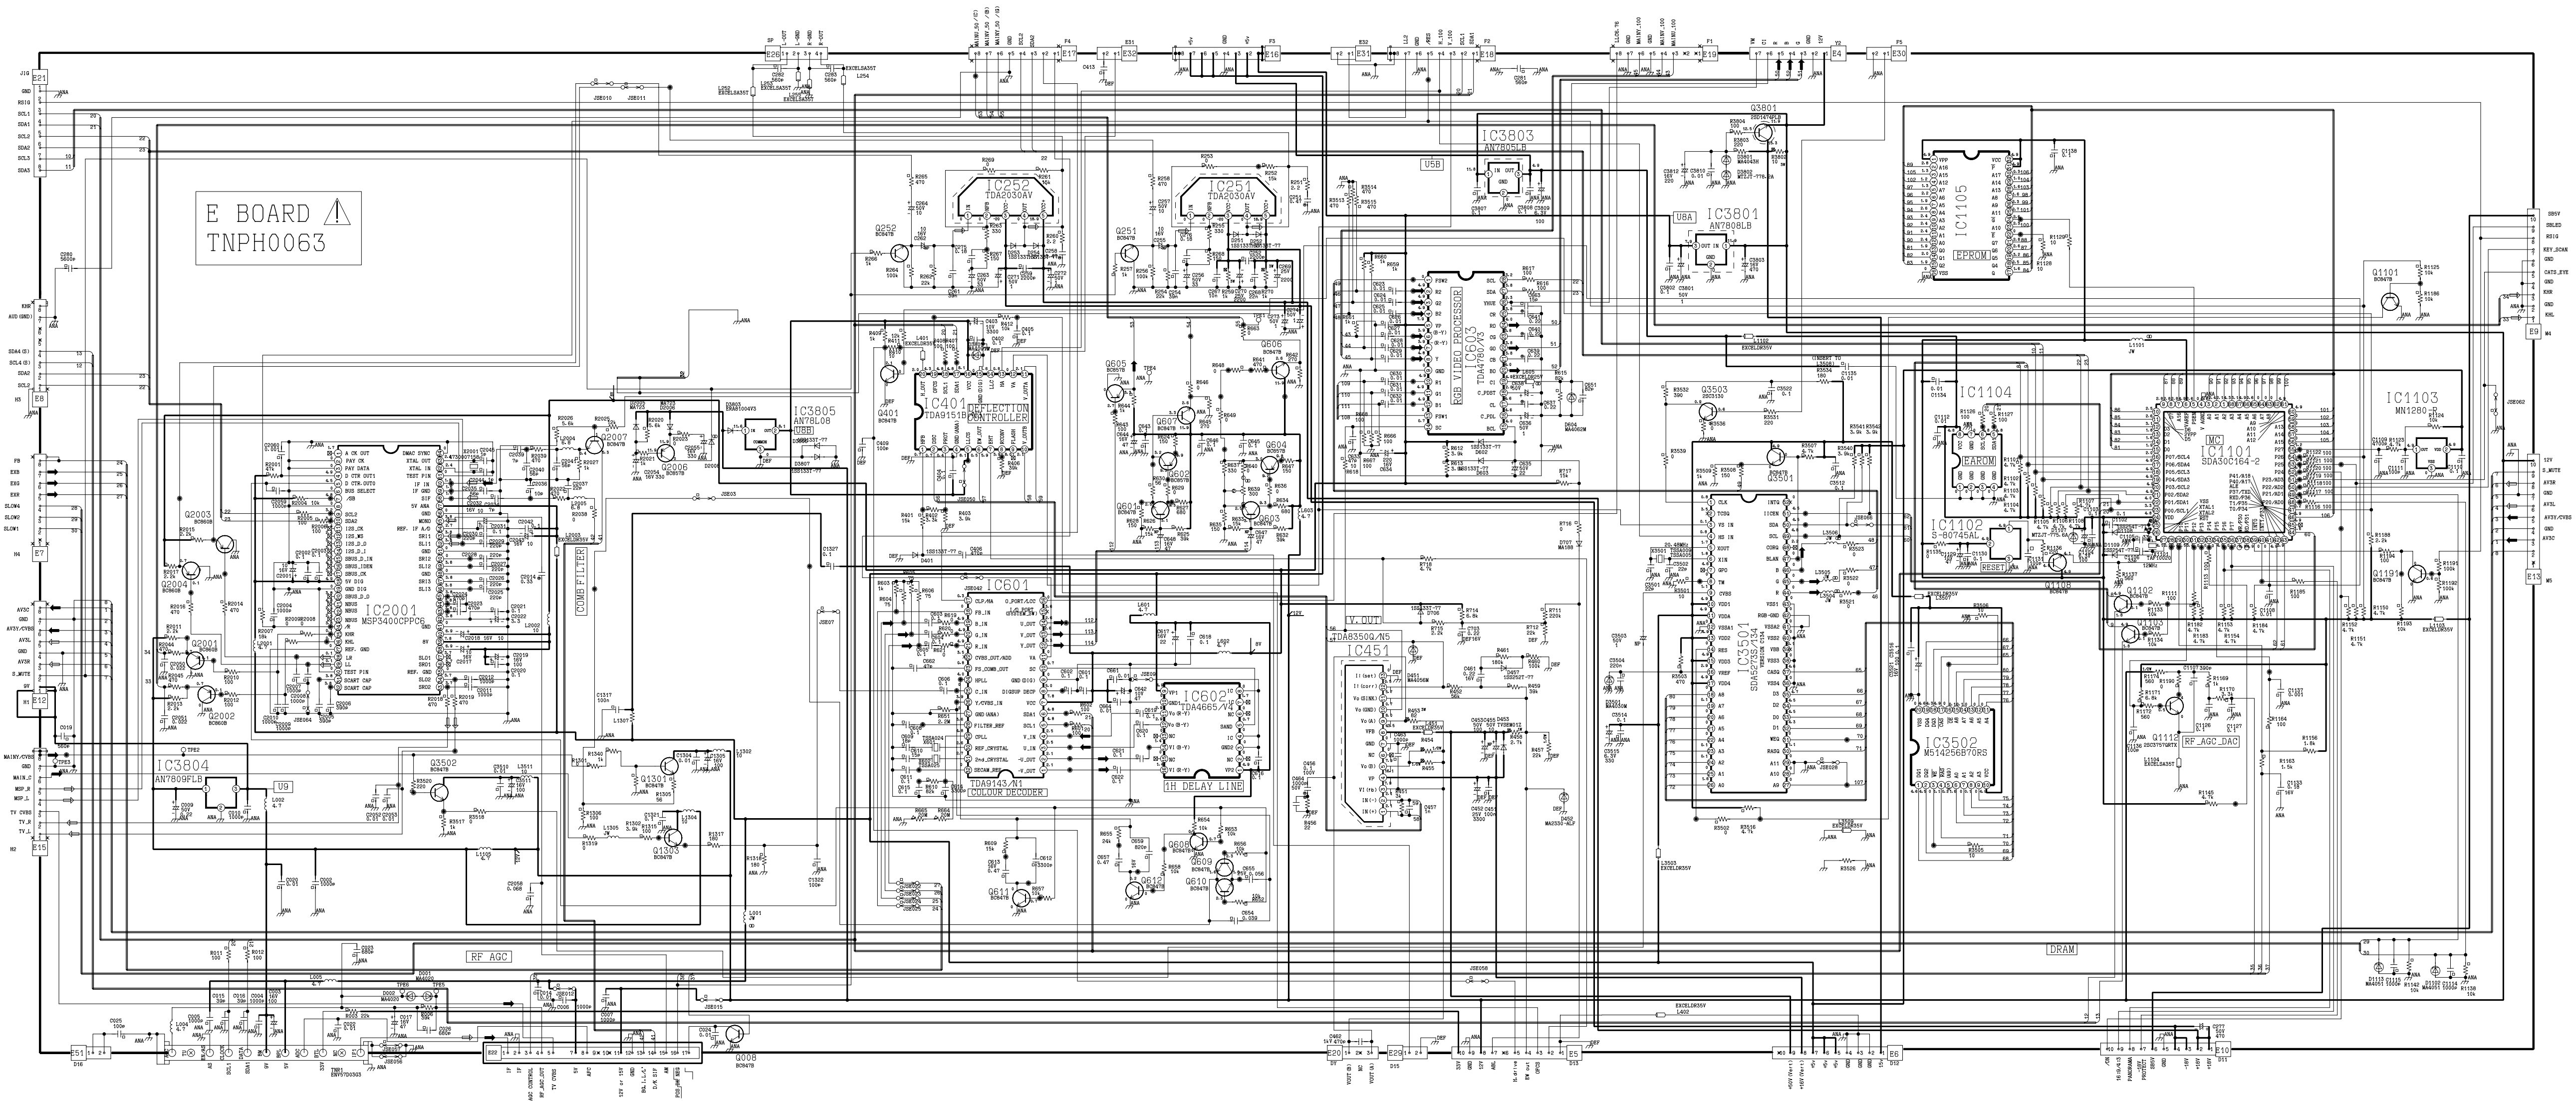


Back Cover

F BOARD  
TNPA0756

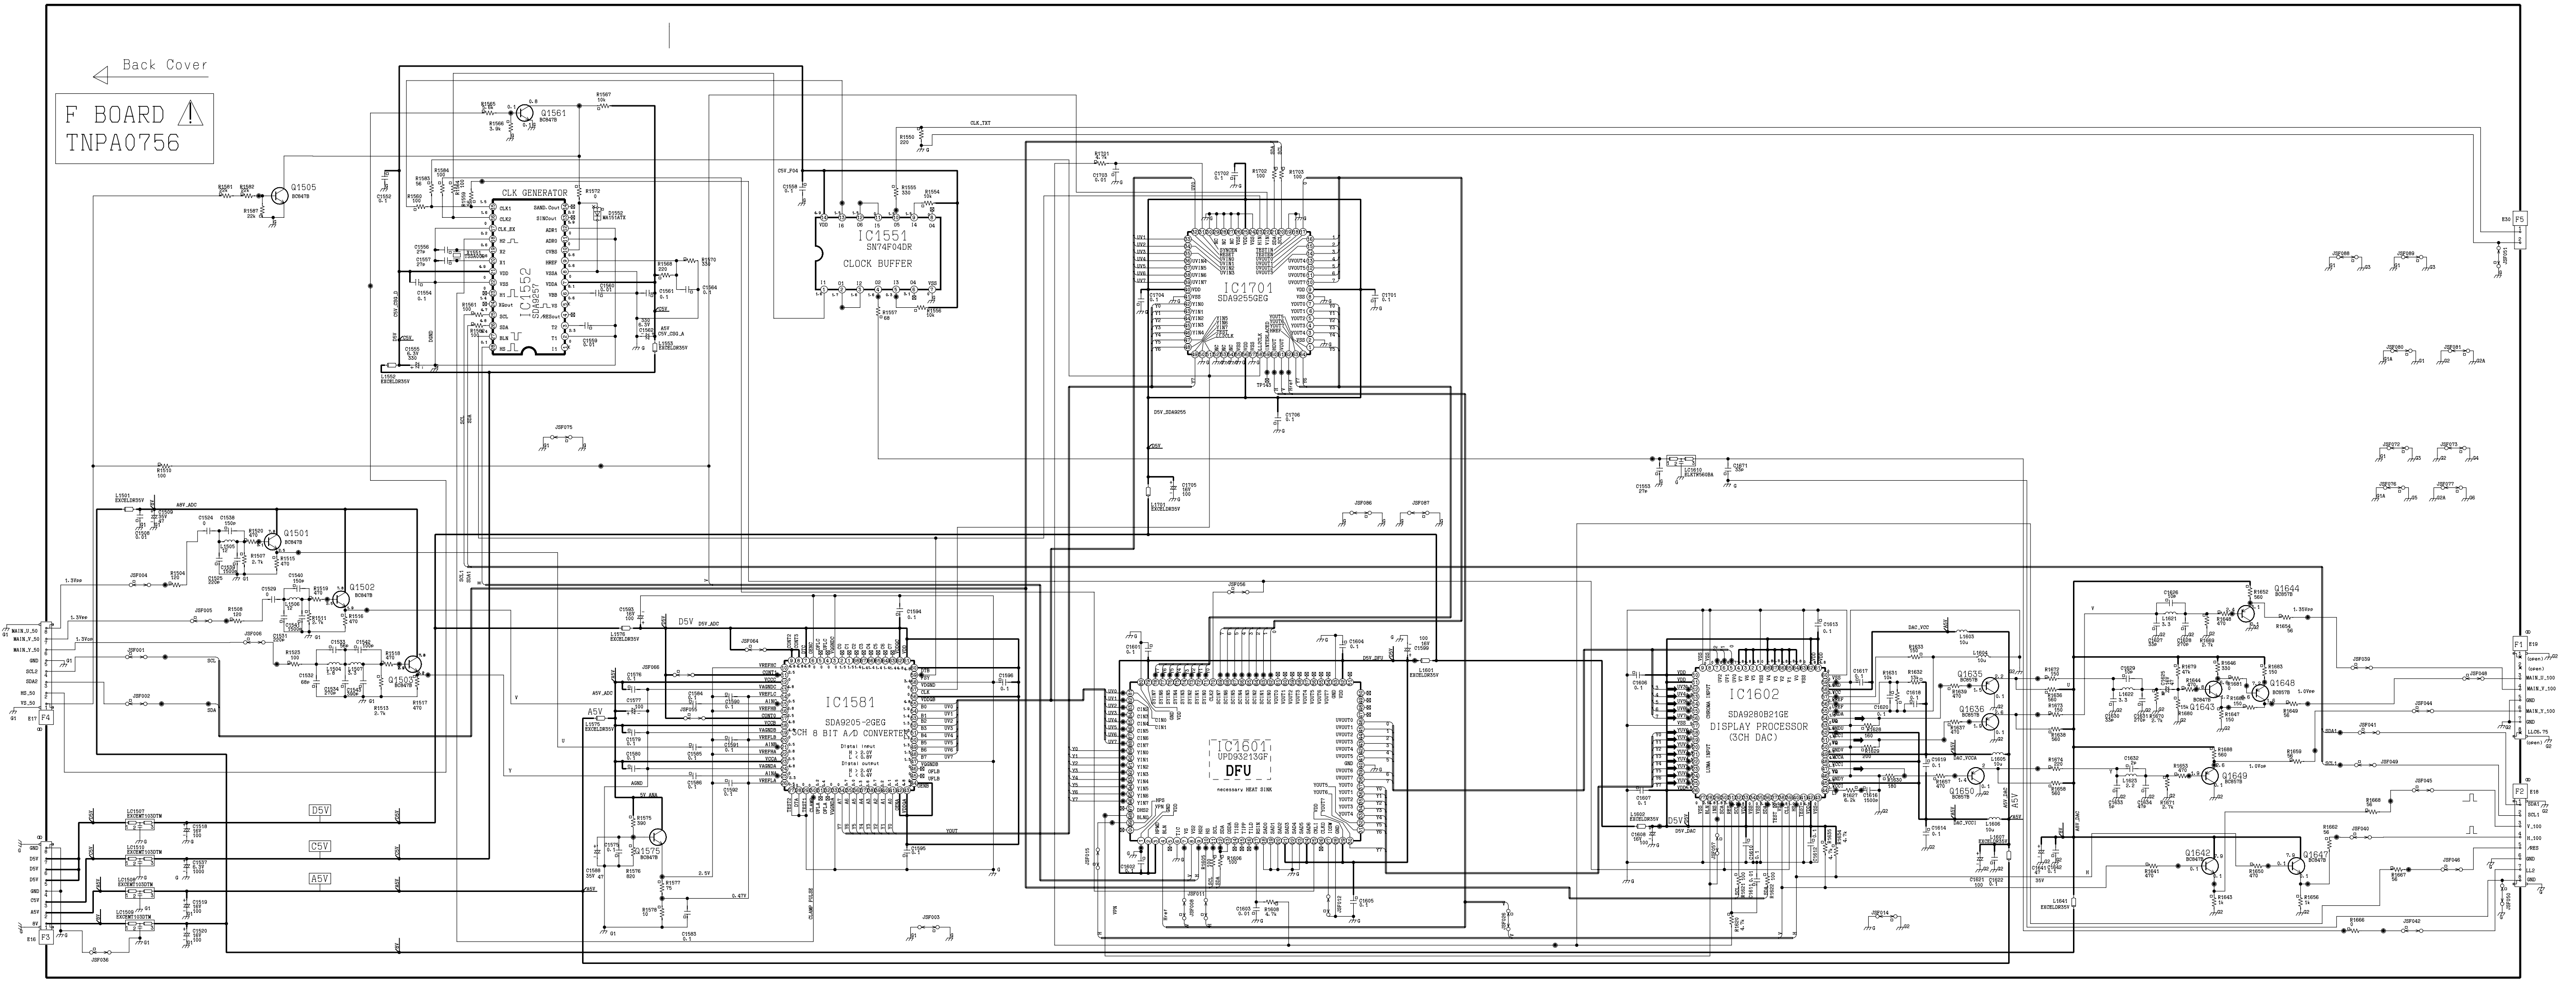

H BOARD  
TNPA0293

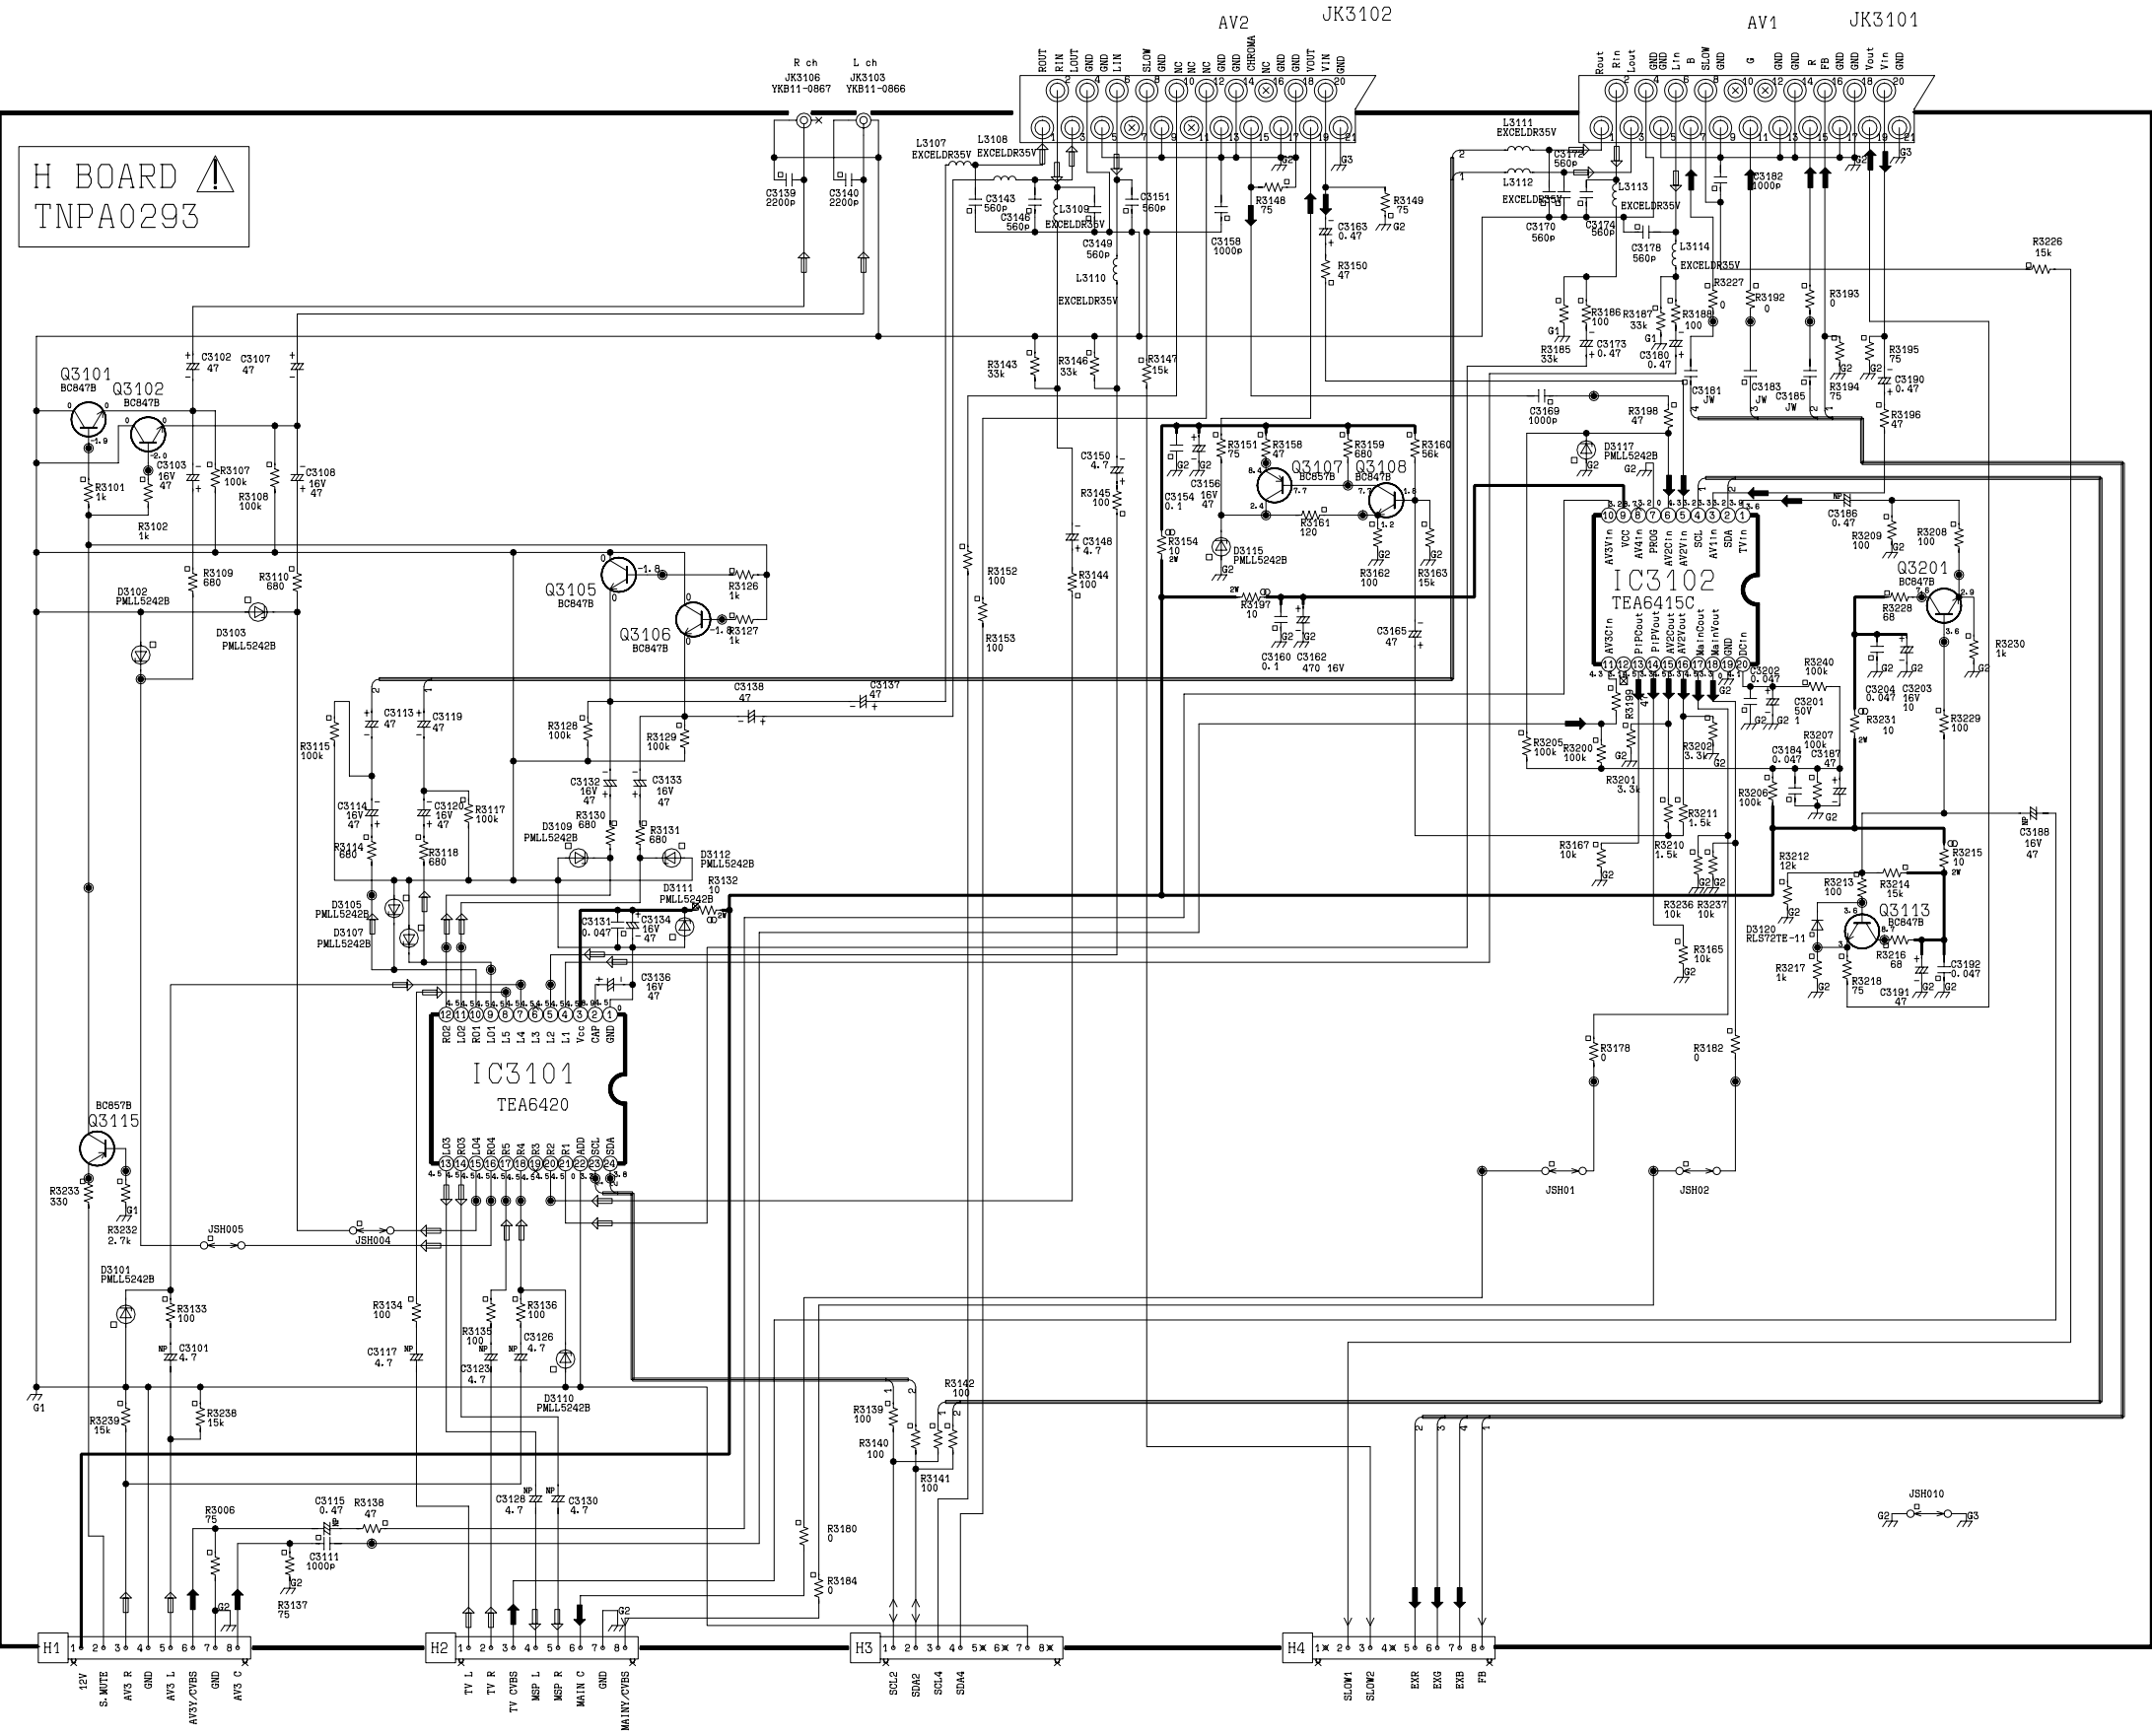

R ch L ch  
JK3106 JK3103  
YKB11-0867 YKB11-0866



AV2 JK3102 AV1 JK3101

H1 12V S.WITE AV3 R GND AV3 L AV3/CVBS GND AV3 C  
H2 TV L TV R TV CVBS MSP L MSP R MAIN C GND MAIN/CVBS  
H3 SCL2 SDA2 SCL4 SDA4  
H4 SLOW1 SLOW2 EXR EXG EXB FB

M BOARD  
TNPA0766

COLD

HOT

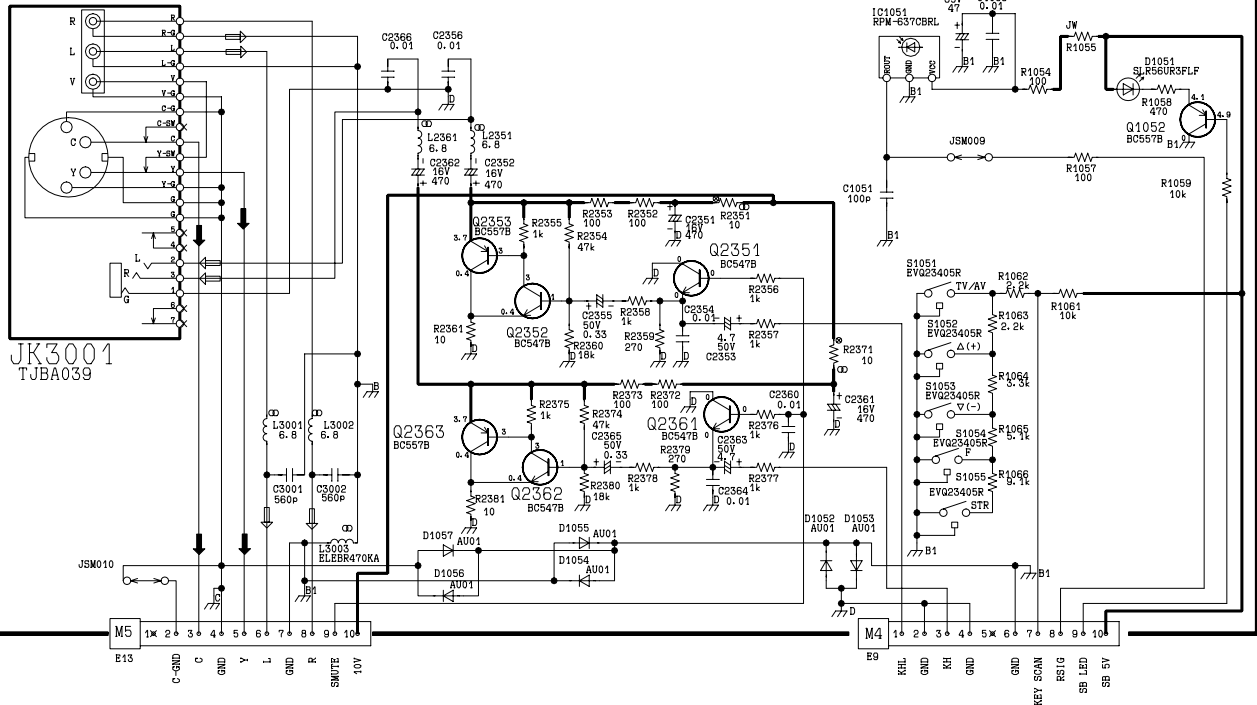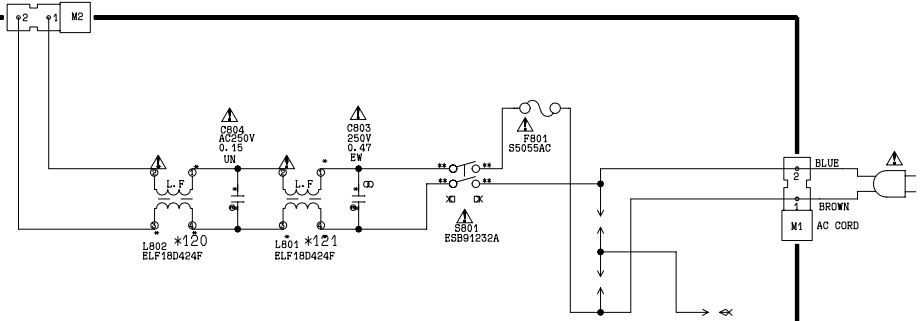


JK3001  
TJA039

M5 1K 2 3 4 5 6 7 8 9 10  
E13  
C-GND C GND Y L GND R SWITE 10V

M4 1 2 3 4 5 6 7 8 9 10  
E9  
KH GND KH GND GND KEY SCAN RSIG RSIG SB LED SS 5V


Y BOARD  
TNPA0292






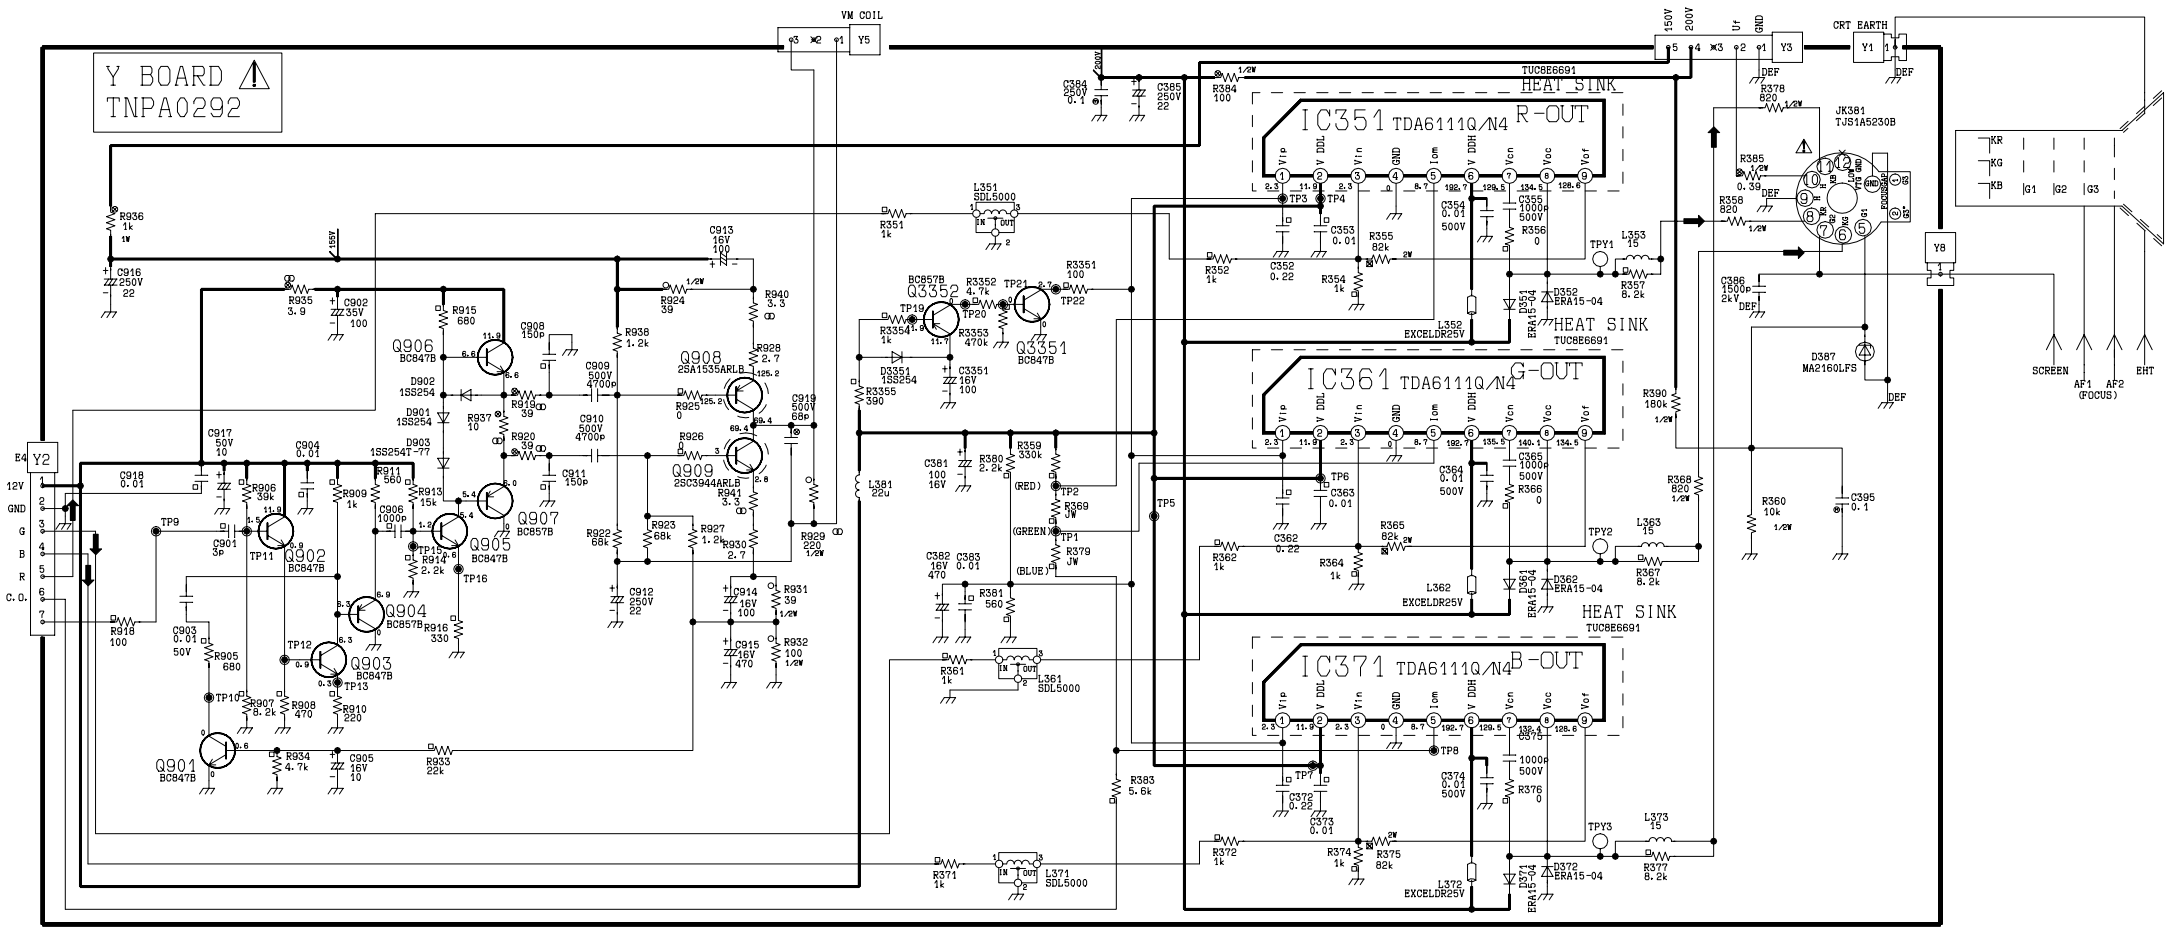


TNP A0317

(B2)







SEE REVERSE FOR ORDER NO.

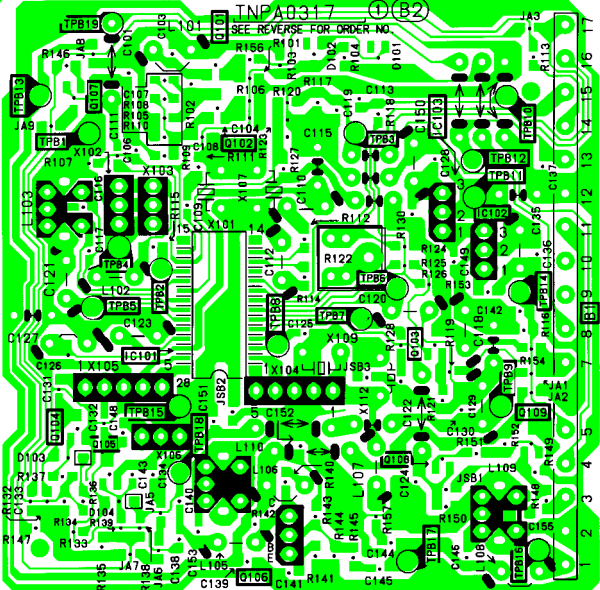

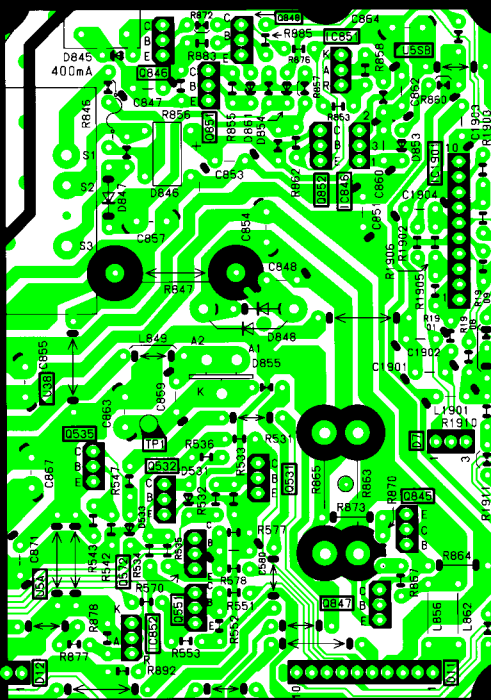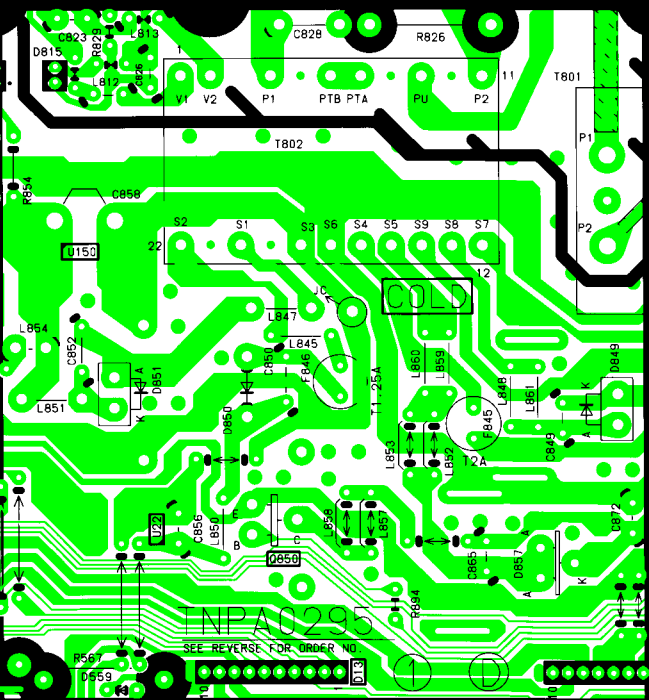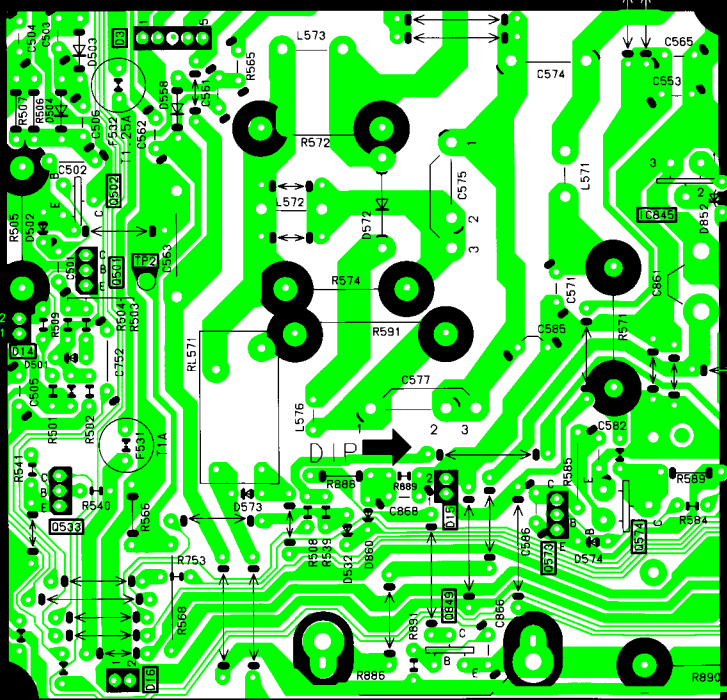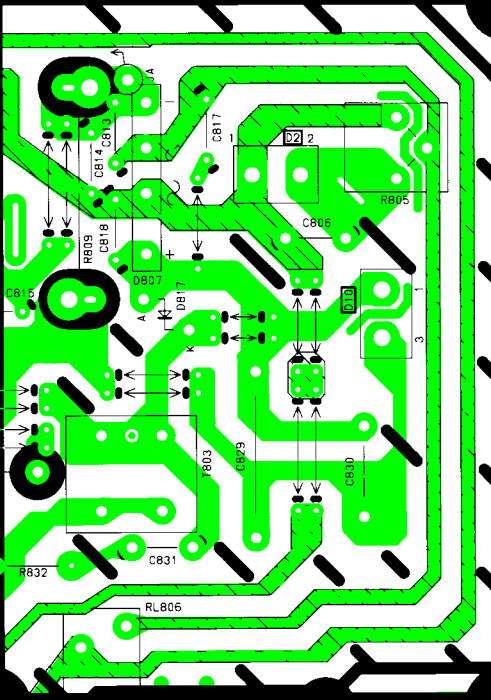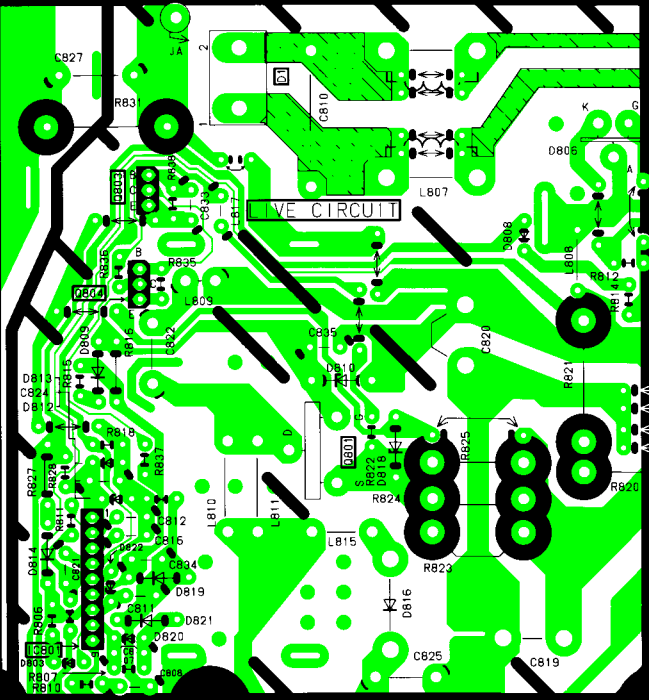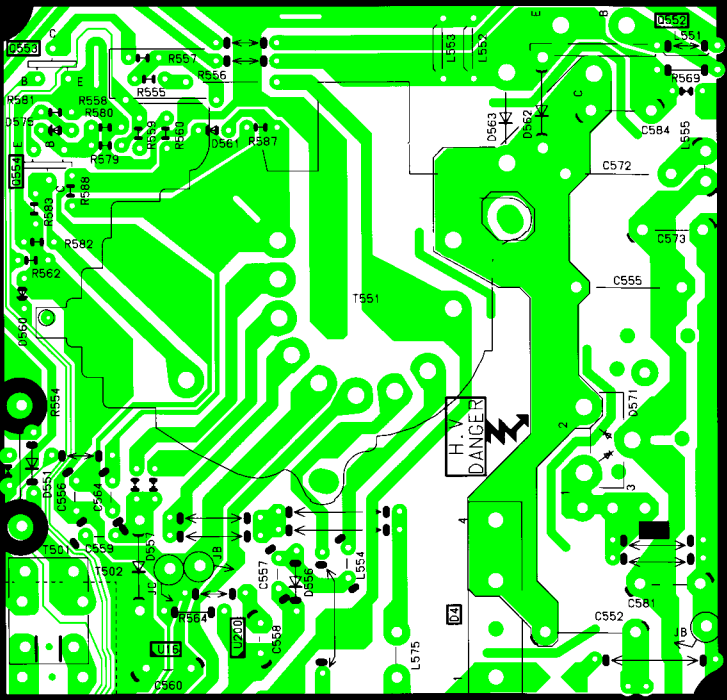

SEE REVERSE FOR ORDER NO.




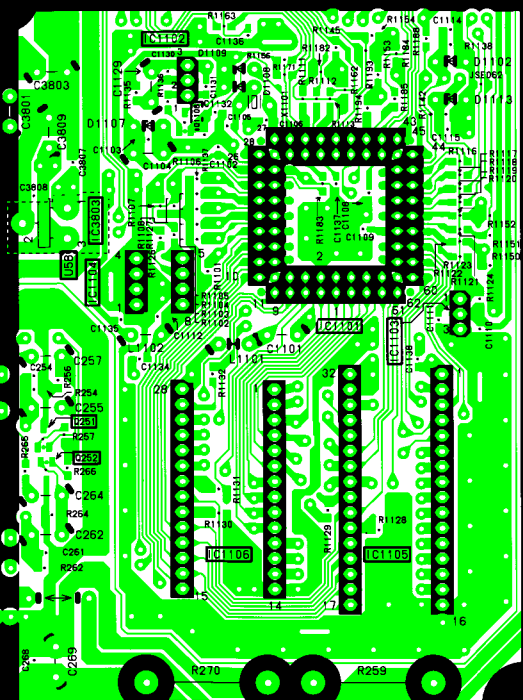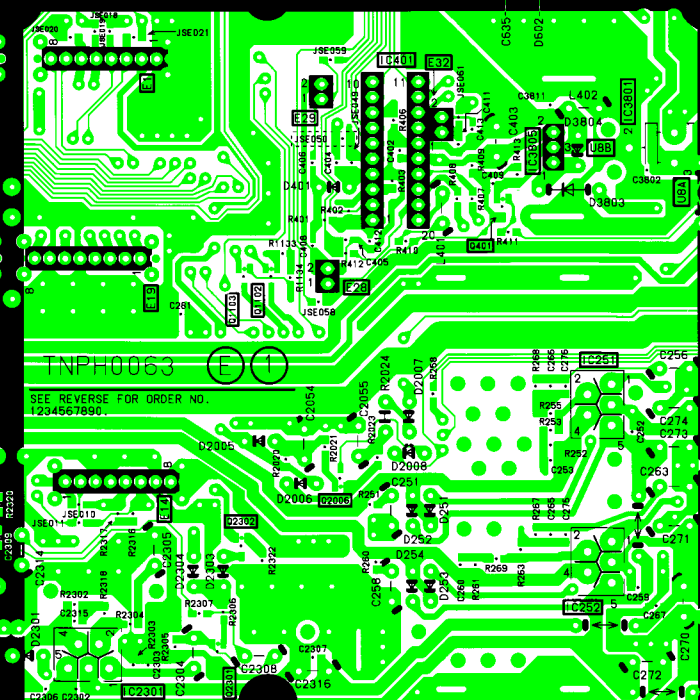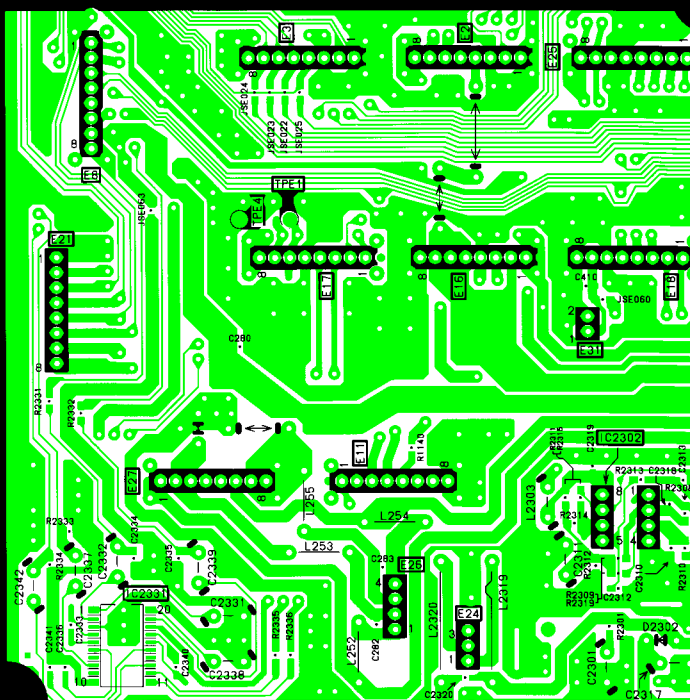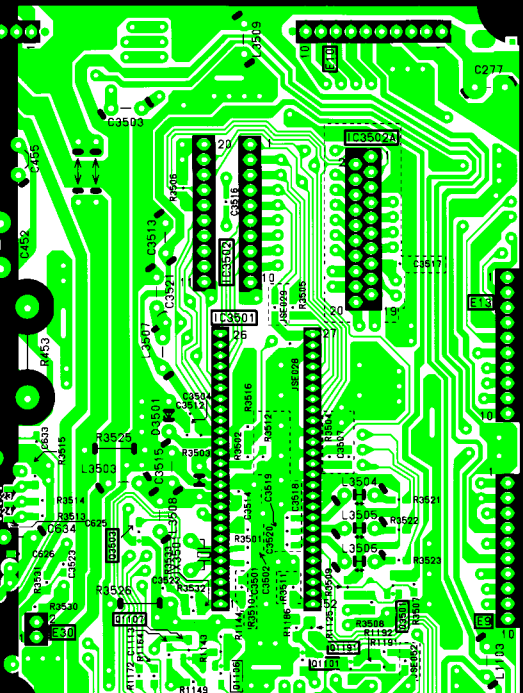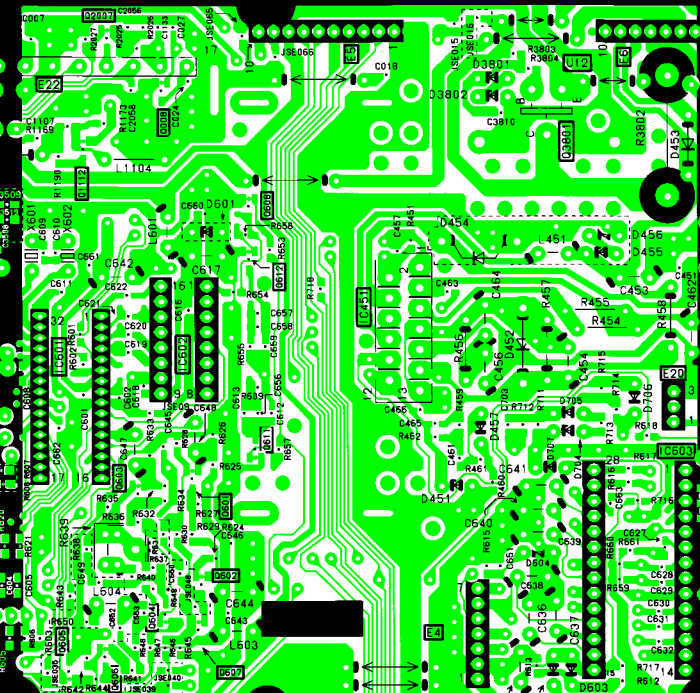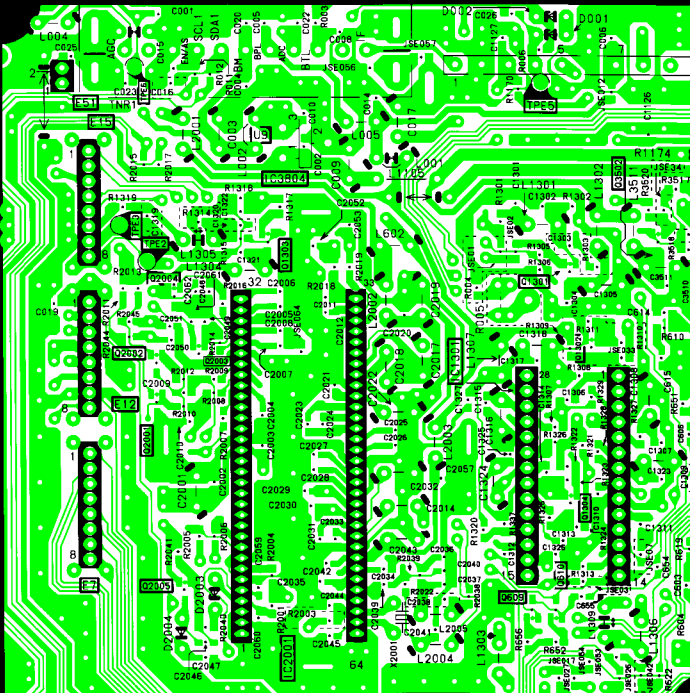






TNPA0756 (F2) ②

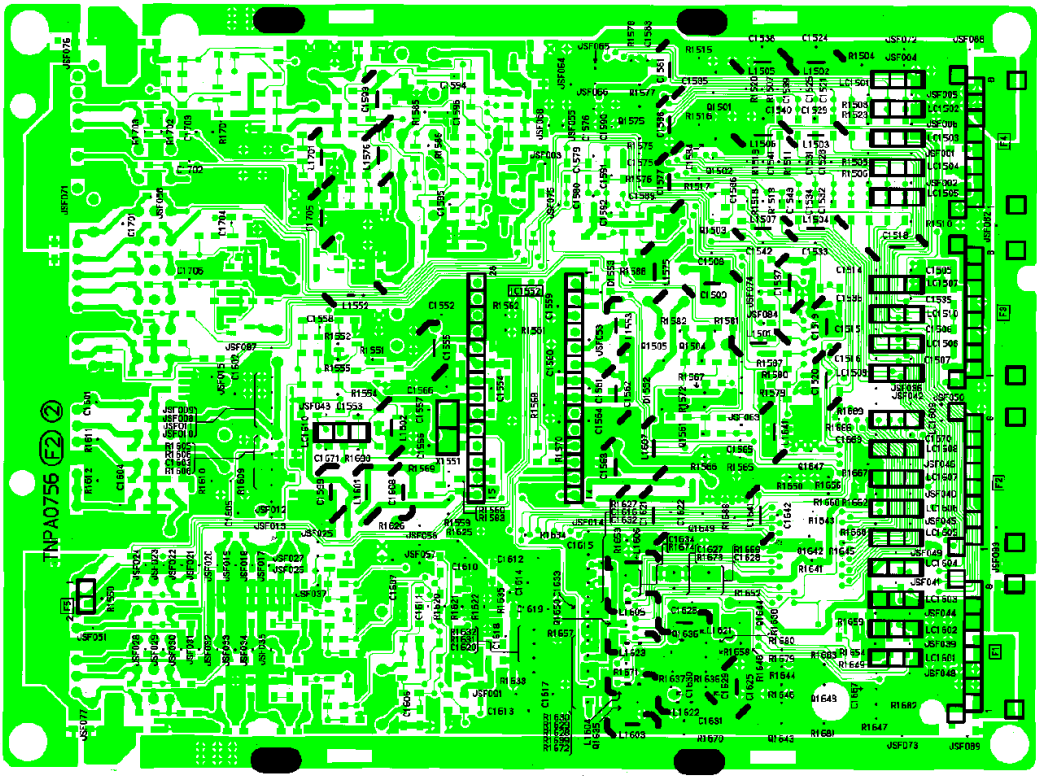

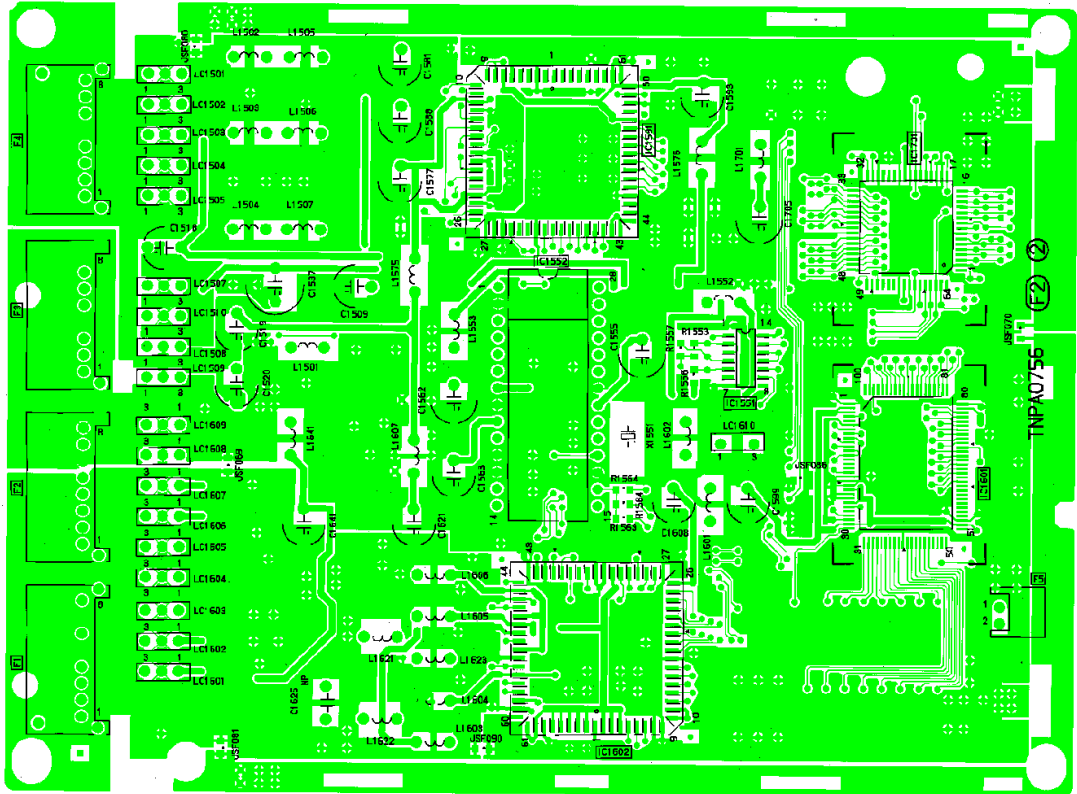

TNPA0756

F2

F1



JP70

IC70

IC71

IC72

IC73

IC74

IC75

IC76

IC77

IC78

IC79

IC80

IC81

IC82

IC83

IC84

IC85

IC86

IC87

IC88

IC89

IC90

IC91

IC92

IC93

IC94

IC95

IC96

IC97

IC98

IC99

IC100

IC101

IC102

IC103

IC104

IC105

IC106

IC107

IC108

IC109

IC110

IC111

IC112

IC113

IC114

IC115

IC116

IC117

IC118

IC119

IC120

IC121

IC122

IC123

IC124

IC125

IC126

IC127

IC128

IC129

IC130

IC131

IC132

IC133

IC134

IC135

IC136

IC137

IC138

IC139

IC140

IC141

IC142

IC143

IC144

IC145

IC146

IC147

IC148

IC149

IC150

IC151

IC152

IC153

IC154

IC155

IC156

IC157

IC158

IC159

IC160

IC161

IC162

IC163

IC164

IC165

IC166

IC167

IC168

IC169

IC170

IC171

IC172

IC173

IC174

IC175

IC176

IC177

IC178

IC179

IC180

IC181

IC182

IC183

IC184

IC185

IC186

IC187

IC188

IC189

IC190

IC191

IC192

IC193

IC194

IC195

IC196

IC197

IC198

IC199

IC200



