

TX-28/25/21MD4 Service Manual

Safety

Specifications

Parts List

Service
Information

Adjustments

Self Check

Service Hints

Mechanical
View

Disassembly

Location of
Controls

Waveforms

Block Diagrams

Schematic Diagrams

PCB Views

Service Support

Service and repair of this product is supported by Panasonic's LUCI interface.

This interface provides a link between the TV and a standard PC to allow a number of diagnostic and control functions to be performed.

For more details contact your local Panasonic company.


BACK

EXIT

Supplementary Information

Audio

Control

Power supply

Video



BACK

E - PCB

Y - PCBs



BACK

E - Schematics

H - Schematic

Y - Schematics



BACK

Service Manual



Colour Television

TX-28MD4

TX-25MD4

TX-21MD4

EURO4 Chassis

SPECIFICATIONS

(Information in brackets { } refers to model TX-25MD4)

(Information in brackets [] refers to model TX-21MD4)

| | |
|------------------------------------|----------------------------------------------------------------------------|
| Power Source: | 220-240V AC, 50Hz |
| Power Consumption: | 85W [71W] |
| Aerial Impedance: | 75Ω unbalanced, Coaxial Type |
| Stand-by Power Consumption: | 1,8W |
| Receiving System: | PAL I, PAL 525/60 M.NTSC NTSC (AV only) |
| Receiving Channels: | UHF E21 - E69 |
| Intermediate Frequency: | Video 39,5MHz Audio 33,5MHz, 32,95MHz Colour 35,07MHz (PAL) |
| Video/Audio Terminals: | |
| AUDIO MONITOR OUT | Audio (RCAx2) 500mV rms 1kΩ |
| AV1 IN | Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin) |
| AV1 OUT | Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ |

| | | |
|-------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------|
| AV2 IN | Video (21 pin) Audio (21 pin) S-Video IN (21-pin) | 1V p-p 75Ω 500mV rms 10kΩ Y: 1V p-p 75Ω C:0.3V p-p 75Ω |
| AV2 OUT | Video (21 pin) Audio (21 pin) Selectable output (21 pin) | 1Vp-p 75Ω 500mV rms 1kΩ |
| AV3 IN | Audio (RCAx2) Video (RCAx1) | 500mV rms 10kΩ 1V p-p 75Ω |
| High Voltage: | 28,5kV ±1kV [28kV ±1kV] | {28,2kV ±1kV} |
| Picture Tube: | A66ECF50X41 {A59ECF50X41 [A51ECQ51X01 | 66cm 59cm 51cm] |
| Audio Output: | 2 x 15W (Music Power) 8Ω Impedance | |
| Headphones: | 8Ω Impedance 3,5 mm | |
| Accessories supplied : | Remote Control 2 x R6 (UM3) Batteries TV Stand | |
| Dimensions: | | |
| Height: | 580 mm | {531 mm} [478 mm] |
| Width: | 666 mm | {601 mm} [525 mm] |
| Depth: | 472 mm | {439 mm} [480 mm] |
| Net weight: | 31kg | {25kg} [22kg] |

Specifications are subject to change without notice.
Weights and dimensions shown are approximate.

NOTE: This Service Manual should be used in conjunction with the EURO4 Technical guide.

Panasonic CS (U.K.) Ltd.
WILLOUGHBY ROAD,
BRACKNELL,
BERKS.,
RG12 8FT.

Panasonic

CONTENTS

| | |
|------------------------------------------|----|
| SAFETY PRECAUTIONS..... | 2 |
| SERVICE HINTS..... | 3 |
| SERVICE POSITION..... | 4 |
| ADJUSTMENT PROCEDURE..... | 5 |
| ADJUSTMENT PROCEDURE AND SELF-CHECK..... | 6 |
| WAVEFORM PATTERN TABLE..... | 7 |
| ALIGNMENT SETTINGS..... | 8 |
| BLOCK DIAGRAMS..... | 9 |
| PARTS LOCATION..... | 13 |
| REPLACEMENT PARTS LIST..... | 14 |
| SCHEMATIC DIAGRAMS..... | 23 |
| CONDUCTOR VIEWS..... | 28 |

SAFETY PRECAUTIONS

GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the AC supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts that have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the AC outlet.
5. Potentials as high as 29,5kV {29,2kV} [29kV] are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazard.


LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis, the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis, the reading must be infinite.

LEAKAGE CURRENT HOT CHECK

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 2k Ω 10W resistor in series with an exposed metallic part on the receiver and an earth, such as a water pipe.
3. Use an AC voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed metallic part and check the voltage at each point.
5. Reverse the AC plug at the outlet and repeat each of the above measurements.

6. The potential at any point should not exceed 1.4 Vrms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

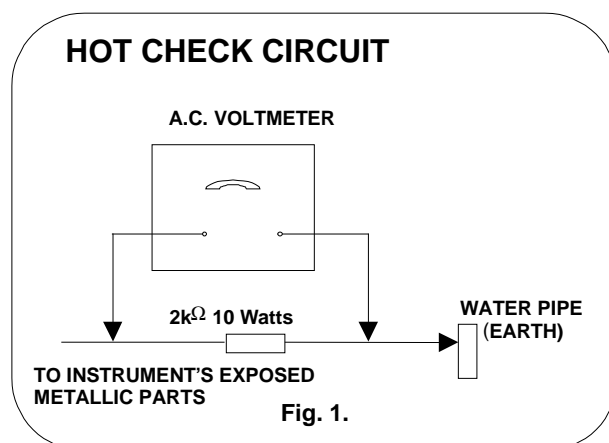

X-RADIATION WARNING

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service, ensure that the jig is capable of handling 29,5kV without causing X-Radiation.

NOTE: It is important to use an accurate periodically calibrated high voltage meter.

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate.
 TX-28MD4 28,5kV \pm 1kV.
 TX-25MD4 28,2kV \pm 1kV.
 TX-21MD4 28kV \pm 1kV.
 If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X-Radiation possibility, it is essential to use the specified tube.

SERVICE HINTS

How to remove the rear cover

1. Remove the 9 screws as shown in Fig.2.



SCREWS
Fig.2.

LOCATION OF CONTROLS

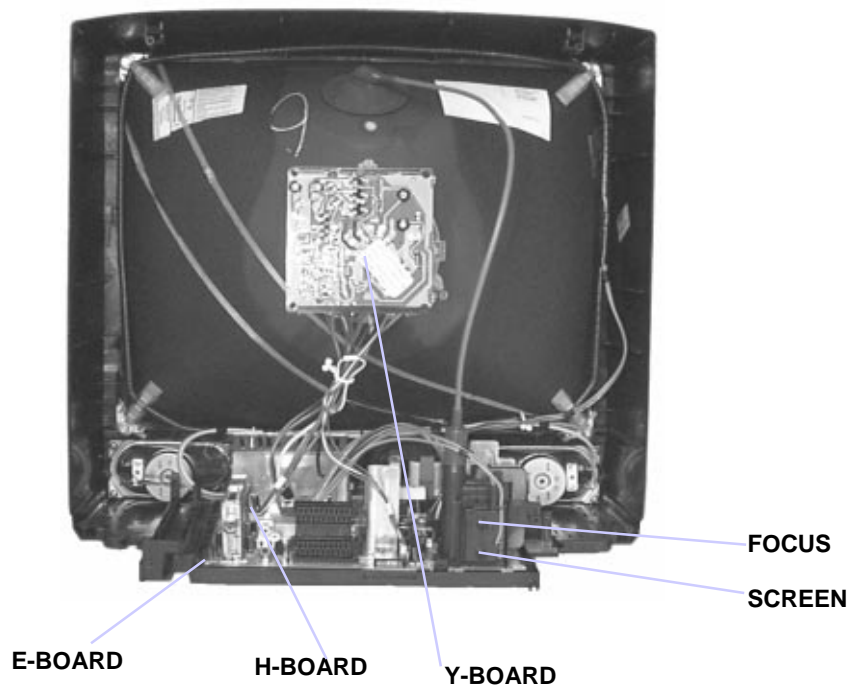


Fig.3.

HOW TO MOVE THE CHASSIS INTO SERVICE POSITION

1. Remove the bead clumper from the mains lead and attach to the degauss coil, shown in **Fig.5**.
2. Hold and lift the rear of the E-PCB chassis and gently pull the chassis toward you, as shown in **Fig.4**.
3. Release the respective wiring clips and rotate the chassis horizontally through 90°, anti-clockwise.
4. Move the EHT lead around to the left side of the CRT neck.
5. Elevate the front of the chassis.
6. Clip the chassis frame onto the bead clumper, on the degauss coil, as shown in **Fig.5**.
7. Locate the base of the chassis frame into the hole (marked A), shown in **Fig.6**.
8. After servicing replace the bead clumper and ensure all wiring is returned to its original position before returning the receiver to the customer.

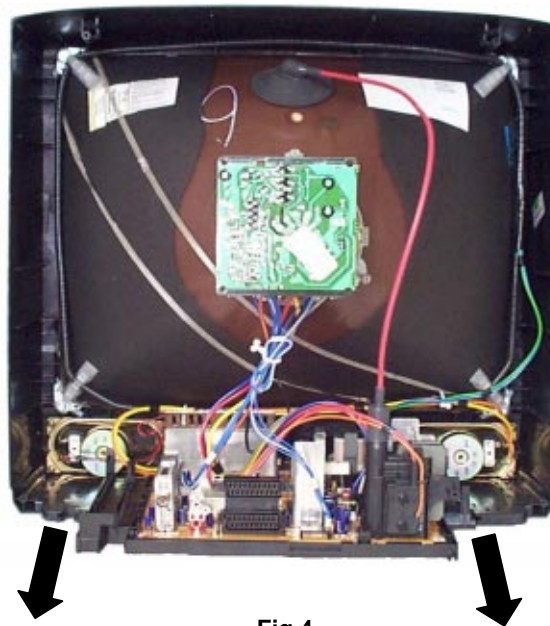


Fig.4.



Fig.5.

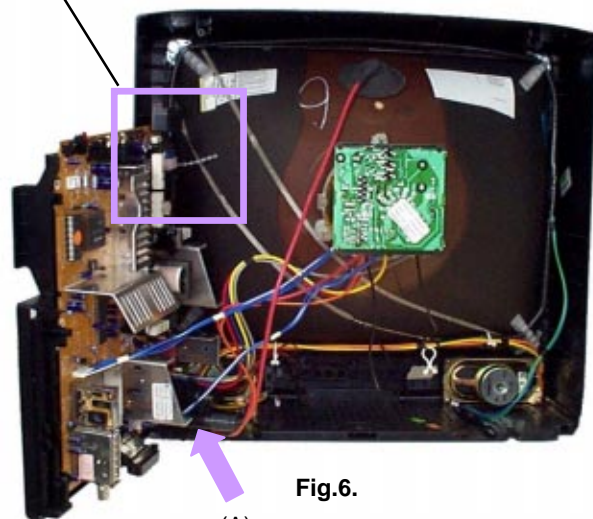


Fig.6.

(A)

ADJUSTMENT PROCEDURE

The remote control is used for entering and storing adjustments, with the exception of Cut-off adjustments, which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the software version as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the F button followed by the volume down button on the customer controls at the front of the TV and at the same time press the "INDEX" button on the remote control, this will place the TV into the Service Mode.
2. Press the **RED / GREEN** buttons to step up / down through the functions.
3. Press the **YELLOW / BLUE** buttons to alter the function values.
4. Press the **STR** button after each adjustment has been made to store the required values.
5. To exit the Service Mode, press the "N" button.

NOTE: This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels into the Memory Pack and then download them onto this or any other EURO-4 TV set.

TV to Memory Pack process

1. Plug the memory pack into the AV1 21 pin terminal at the back of the TV and switch the TV on.
2. Go into Service Mode as explained above. The screen will show :-

Program
External>>TV

3. Press the **BLUE** button on the remote control. The screen will show :-

Program
TV>>External

4. Press the **STR** button on the TV. The screen will show :-

Please Wait

5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2-3 minutes to complete and when finished the screen will show :-

Complete

Memory Pack to TV process

1. Plug the memory pack into the AV1 21 pin terminal at the back of the TV and switch the TV on.
2. Go into Service Mode as explained above. The screen will show :-

Program
External>>TV

3. Press the **STR** button on the TV. The screen will show :-

Please Wait

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2-3 minutes to complete and when finished the screen will show :-

Complete

5. The tuning information from the Memory Pack has now been copied into the TV.
6. To exit from the Service Mode press the "N" button.
7. The process has now been completed and the Memory Pack can now be removed.

ERRORS

If an error occurs while using the Memory Pack the TV will detect this and the screen will show :-

Error !!

If this happens then press the "N" button and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

ADJUSTMENT PROCEDURE

| Item / Preparation | Adjustments |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| +B SET-UP 1. Receive a Greyscale signal. 2. Set the controls :- Brightness Minimum Contrast Minimum Volume Minimum | 1. Set the +B voltage up as follows:- Adjust R811 so that B2 shows 148V±1V [130V±1V TX-21MD4] 2. Confirm the following voltages. B9 5 ± 0,25V B10 5 ± 0,25V B5 12 ± 0,5V B11 33 ± 1,5V B4 16 ± 1V B7 8 ± 0,5V B12 26 ± 1V B8 5,5 ± 0,5V B3 35 ± 1V B13 15 ± 1V B1 200 ± 10V B14 -15 ± 1V |
| CUT OFF / Ug2 Test 1. Receive a Greyscale signal. 2. Degauss the tube externally. 3. Set the TV into Service Mode 1. 4. Select Cut off mode. | To adjust Cutoff connect an oscilloscope to the Blue cathode, adjust "cutoff" value using the "Yellow" and "Blue" buttons until the black level is 160V±5V press " STR " to store the value. Remove the oscilloscope. Select Ug2 adjustment and adjust the screen VR until the display shows "O.K." |

SELF CHECK

Self-check is used to automatically check the bus lines and hexadecimal code of the TV set. To get into the Self-Check mode press the down (-/v) button on the customer controls at the front of the set, at the same time pressing the **STATUS** button on the remote control, and the screen will show :-

| | | | |
|----------|---------|-----|------------------|
| VDP | O.K. | PCB | O.K. |
| TUN | O.K. | Cab | O.K. |
| E2 | O.K. | Sum | Factory use only |
| MSP | O.K. | | |
| DPL | -- | | |
| OPTION 1 | 3D [3C] | | |
| OPTION 2 | 0C [0E] | | |
| OPTION 3 | 1D [1D] | | |
| OPTION 4 | 00 [00] | | |
| OPTION 5 | EF [EF] | | |
| OPTION 6 | 23 [23] | | |


















If the CCU ports have been checked and found to be incorrect or not located then " - - " will appear in place of "O.K.".

Service Aids

To aid in the service of our current chassis there are a number of Service Aids which have been made available.

- LUCI** interface kit (Linked Utility Computer Interface)
 Part number: TZS6EZ002
 This contains interface and cables for connecting TV service connector and a PC as well as diagnostic software. As new models are introduced upgrade software will become available.
- VICI** (Visual Interactive Computer Information)
 These C.D.'s contain multimedia documentation providing quick access to service information.
 Part No. TZS7EZ006 & TZS7EZ005
 - Service Manuals
 - Instruction Books
 - Technical Information
- TASMIN** (Technically Advanced System for Multimedia Interactive Notes)
 As well as providing a first step towards more interactive training this product also achieves quick access to Technical Information.


WAVEFORM PATTERN TABLE

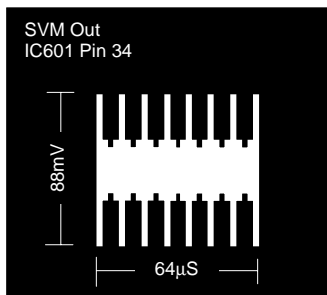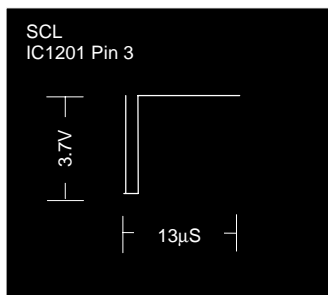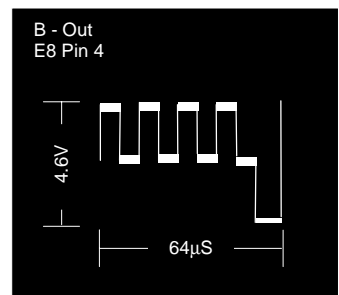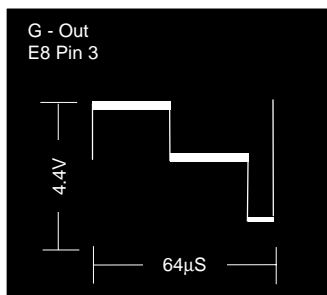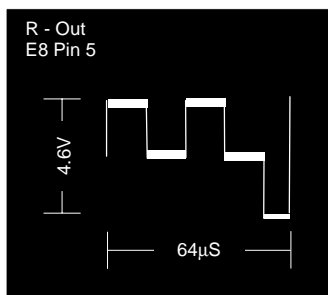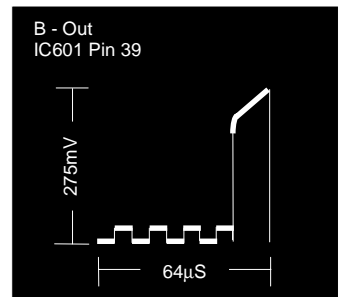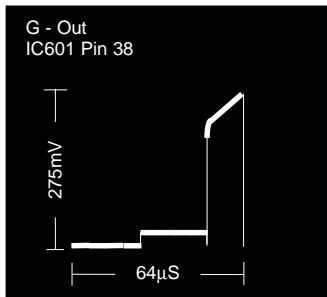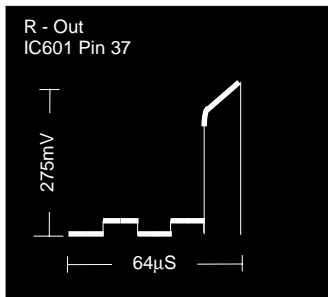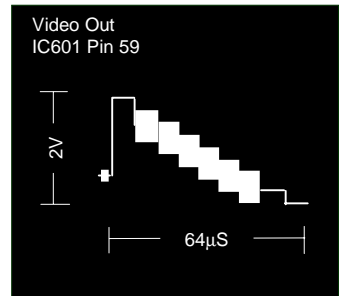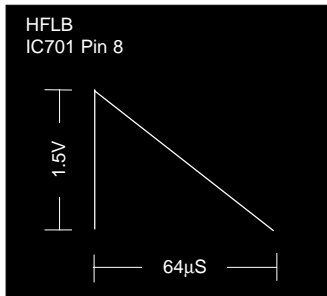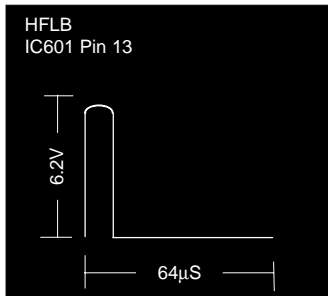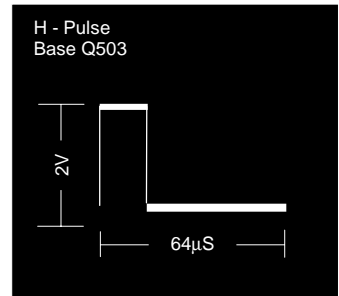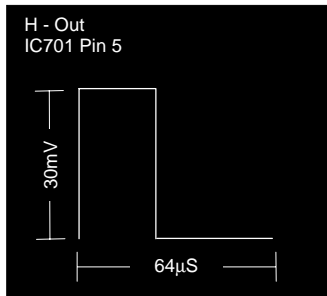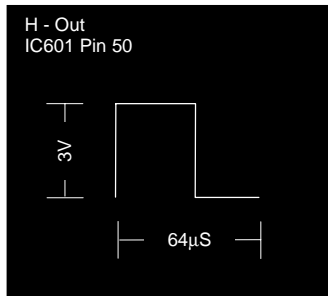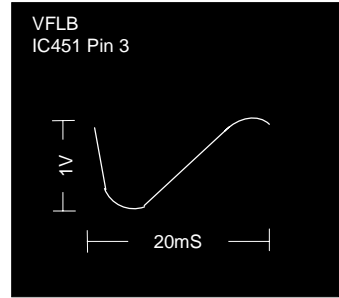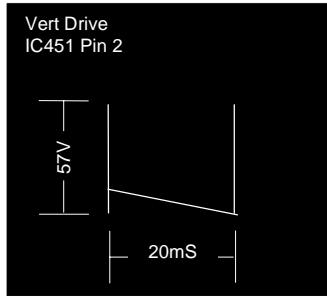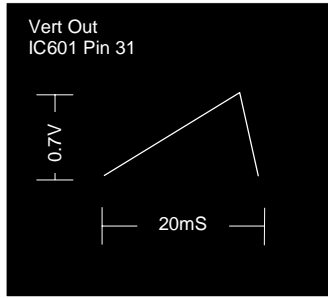

ALIGNMENT SETTINGS


(The figures below are nominal and used for representative purposes only.)

| Alignment Function | | Settings / Special features |
|-----------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Horizontal Position | H-Pos 061 | Optimum setting. |
| Vertical Position | V-Pos 005 | Optimum setting. |
| Horizontal Amplitude | H-Amp 055 | Optimum setting. |
| Vert. Amplitude | V-Amp 054 | Optimum setting. |
| EW-amplitude | EW-Amp1 -128 | Optimum setting. |
| EW-amplitude | EW-Amp2 006 | Optimum setting. |
| Trapezium-comp | Trapez-1 047 | Optimum setting. |
| Trapezium-comp | Trapez-2 -128 | Optimum setting. |
| Vertical Linearity | V-Lin 006 | Optimum setting. |
| Vertical Symmetry | V-Sym 002 | Optimum setting. |
| DVCO | DVCO -005 | Receive a PAL Colour Bar Pattern. For DVCO alignment press " Blue " button, wait until the colours are changing slowly and press " STR ". |
| Cut-off DC | Cut-off 0171 | To adjust Cutoff connect an oscilloscope to the blue cathode, adjust "cutoff" value using the " Yellow " and " Blue " buttons until the black level is $160V \pm 5V$ press " STR " to store the value. Remove the oscilloscope. Select Ug2 adjustment and adjust the screen VR until the display shows "O.K." |
| Ug2 Test | Ug2 055 O.K. | |
| Highlight Lowlight | High 0902 0777 0864 Low 0117 0132 0112 | Optimum setting. |
| Sub-Brightness | Sub-Brightness 255 | Optimum setting. |

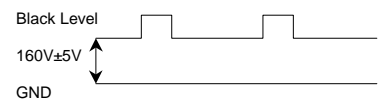


VIDEO BLOCK DIAGRAM

6

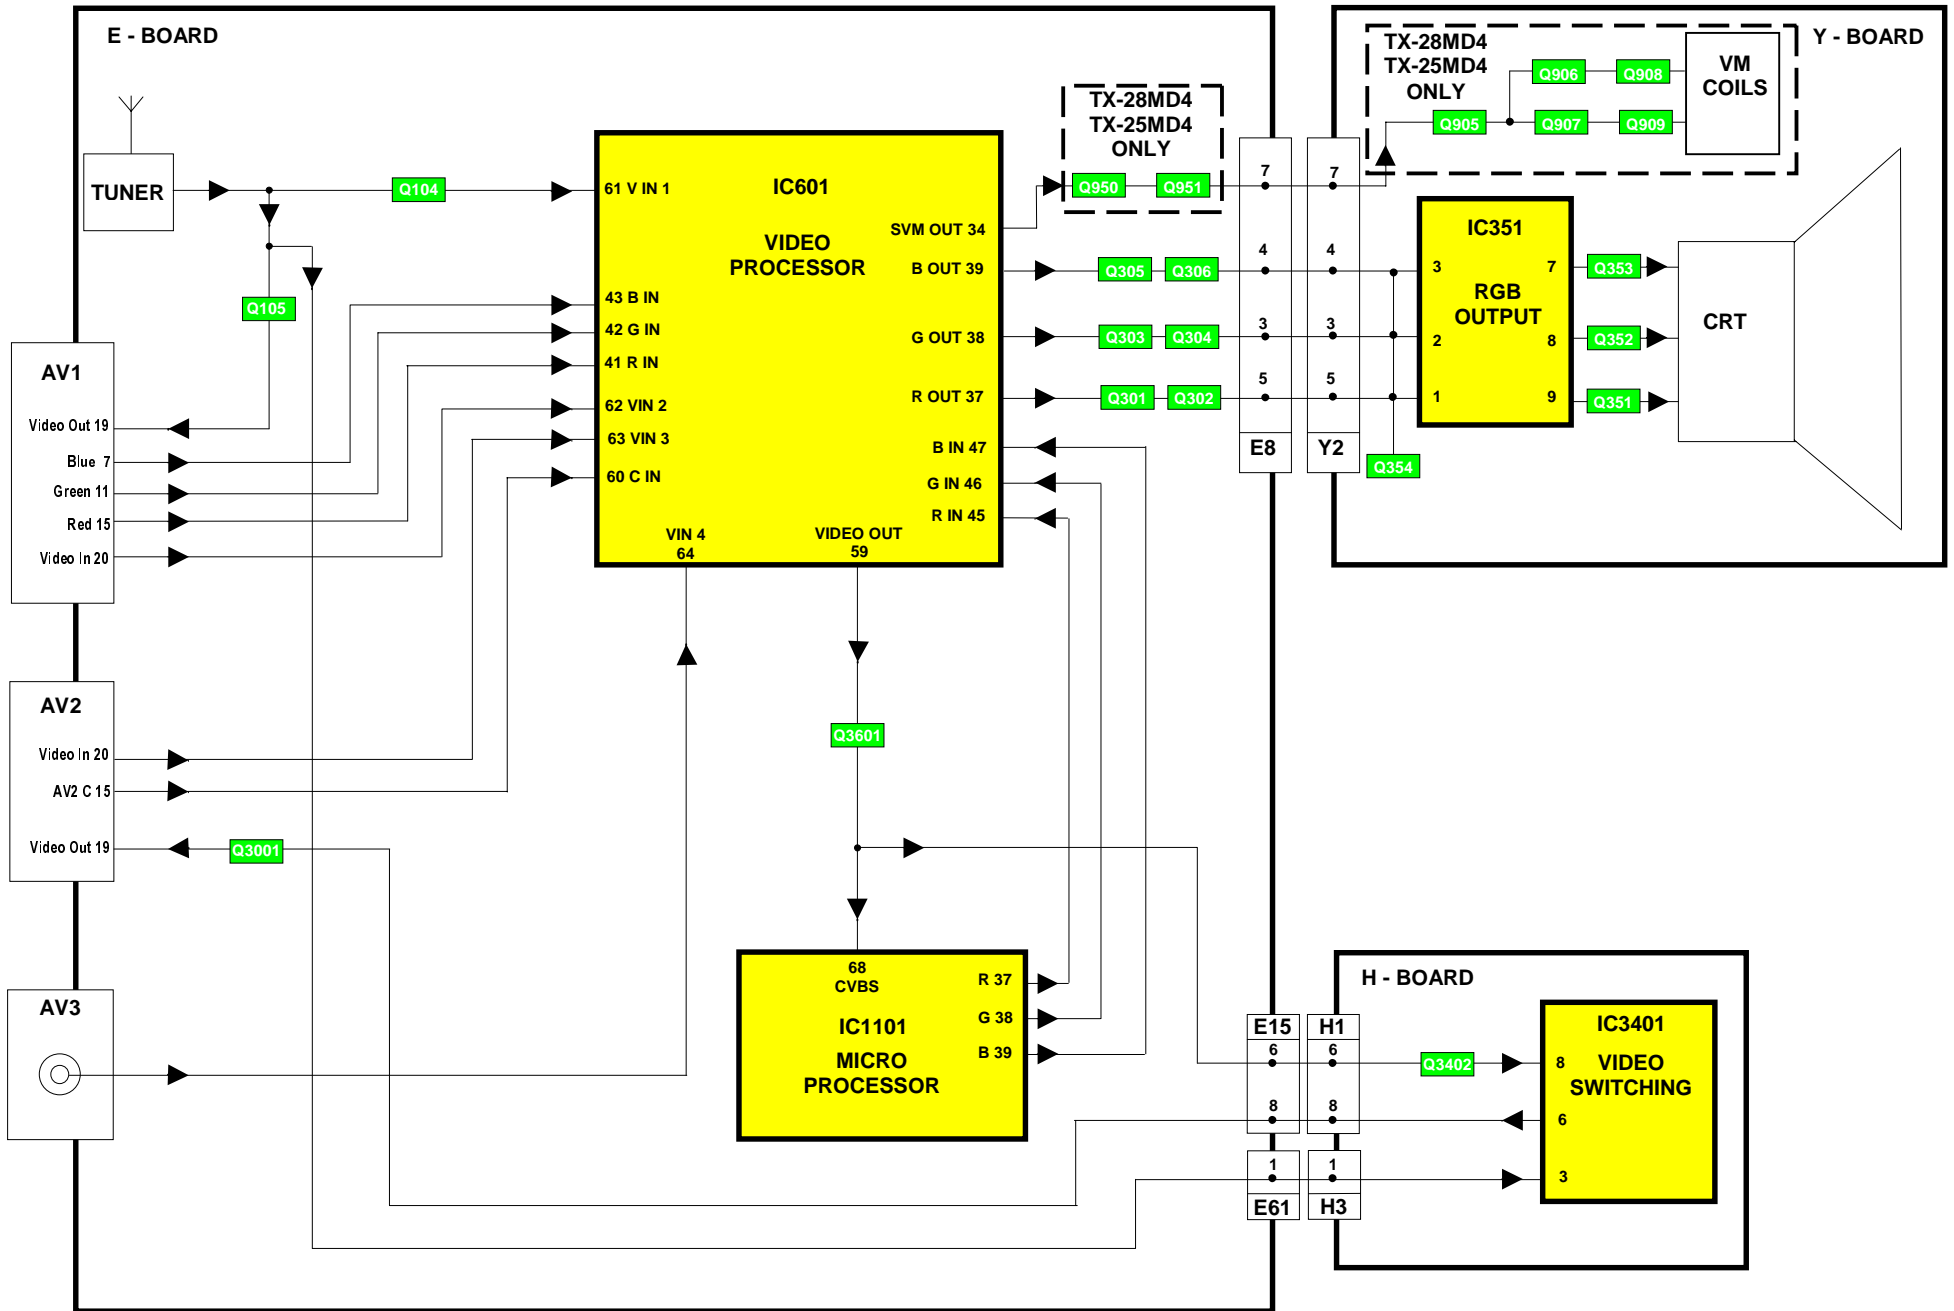


AUDIO BLOCK DIAGRAM

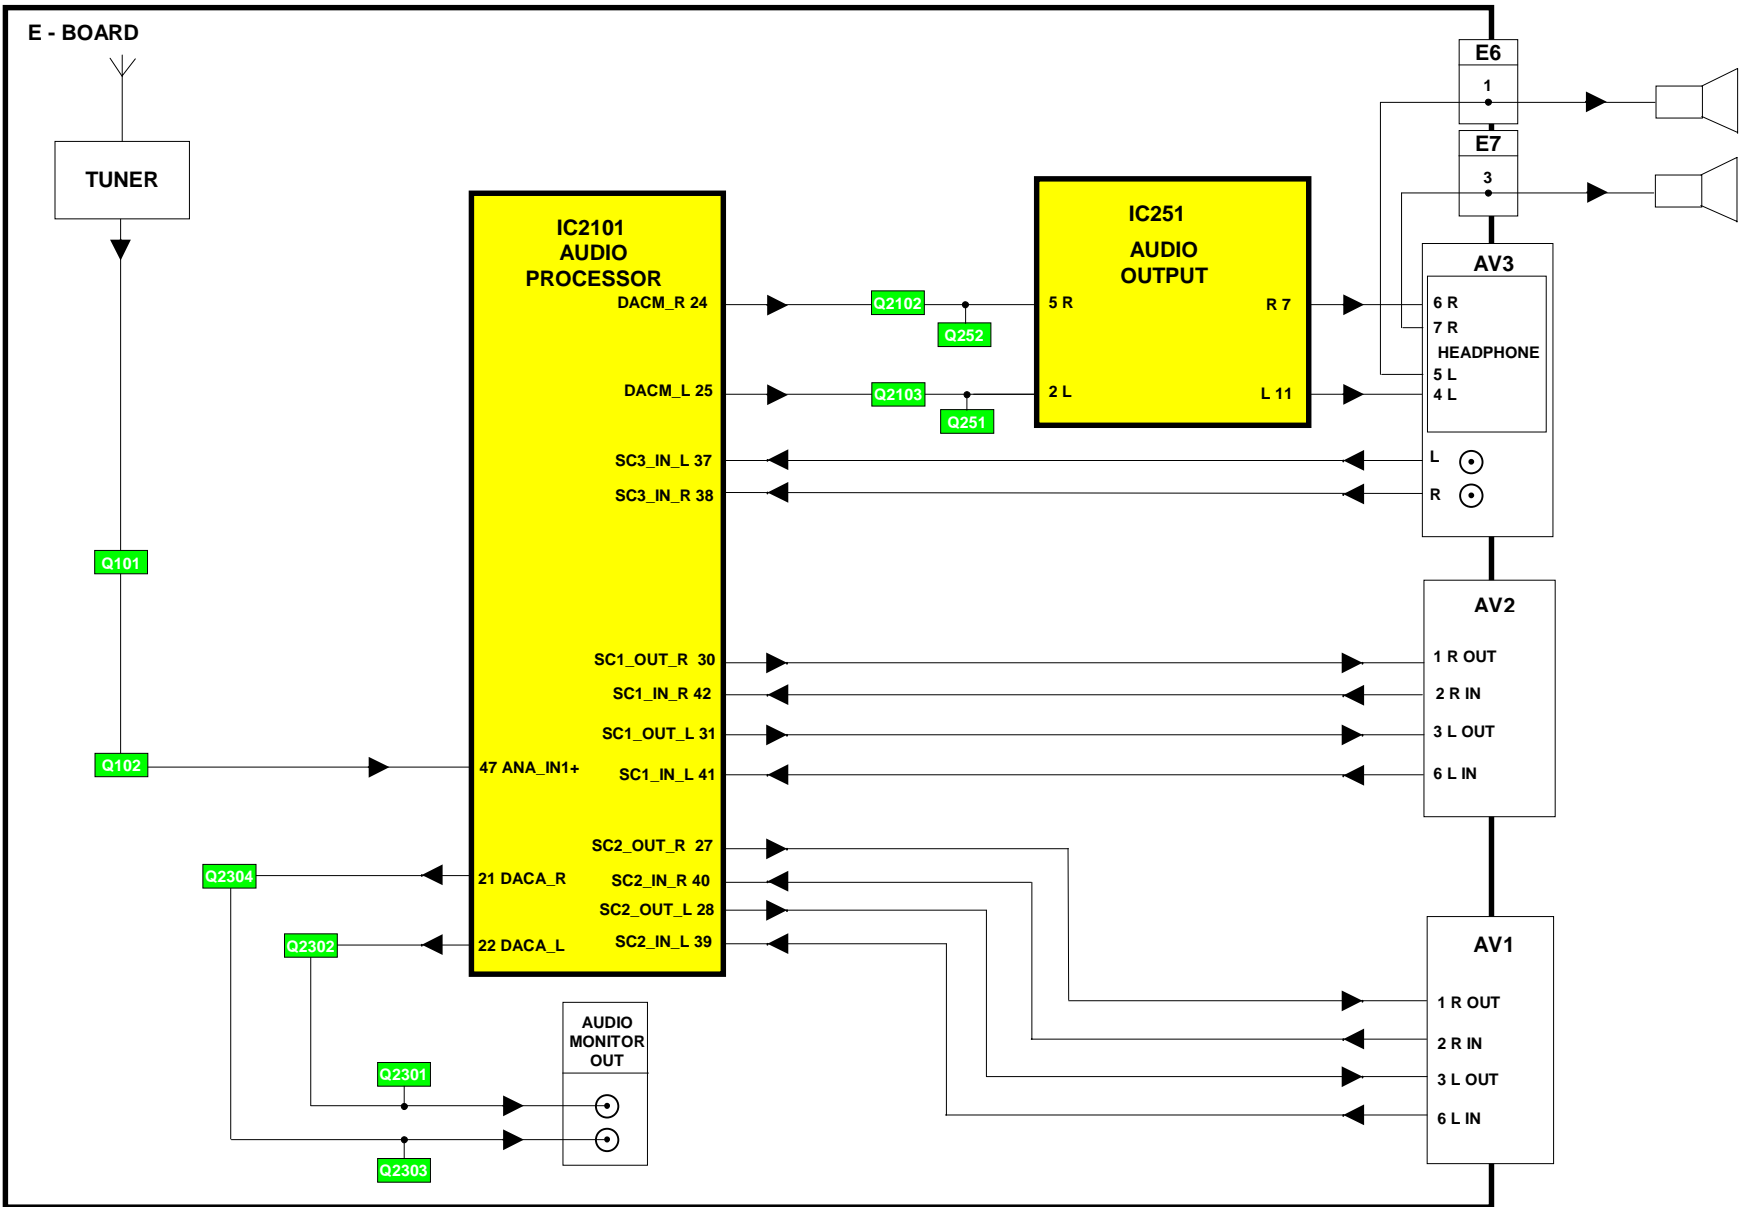


CONTROL BLOCK DIAGRAM

11

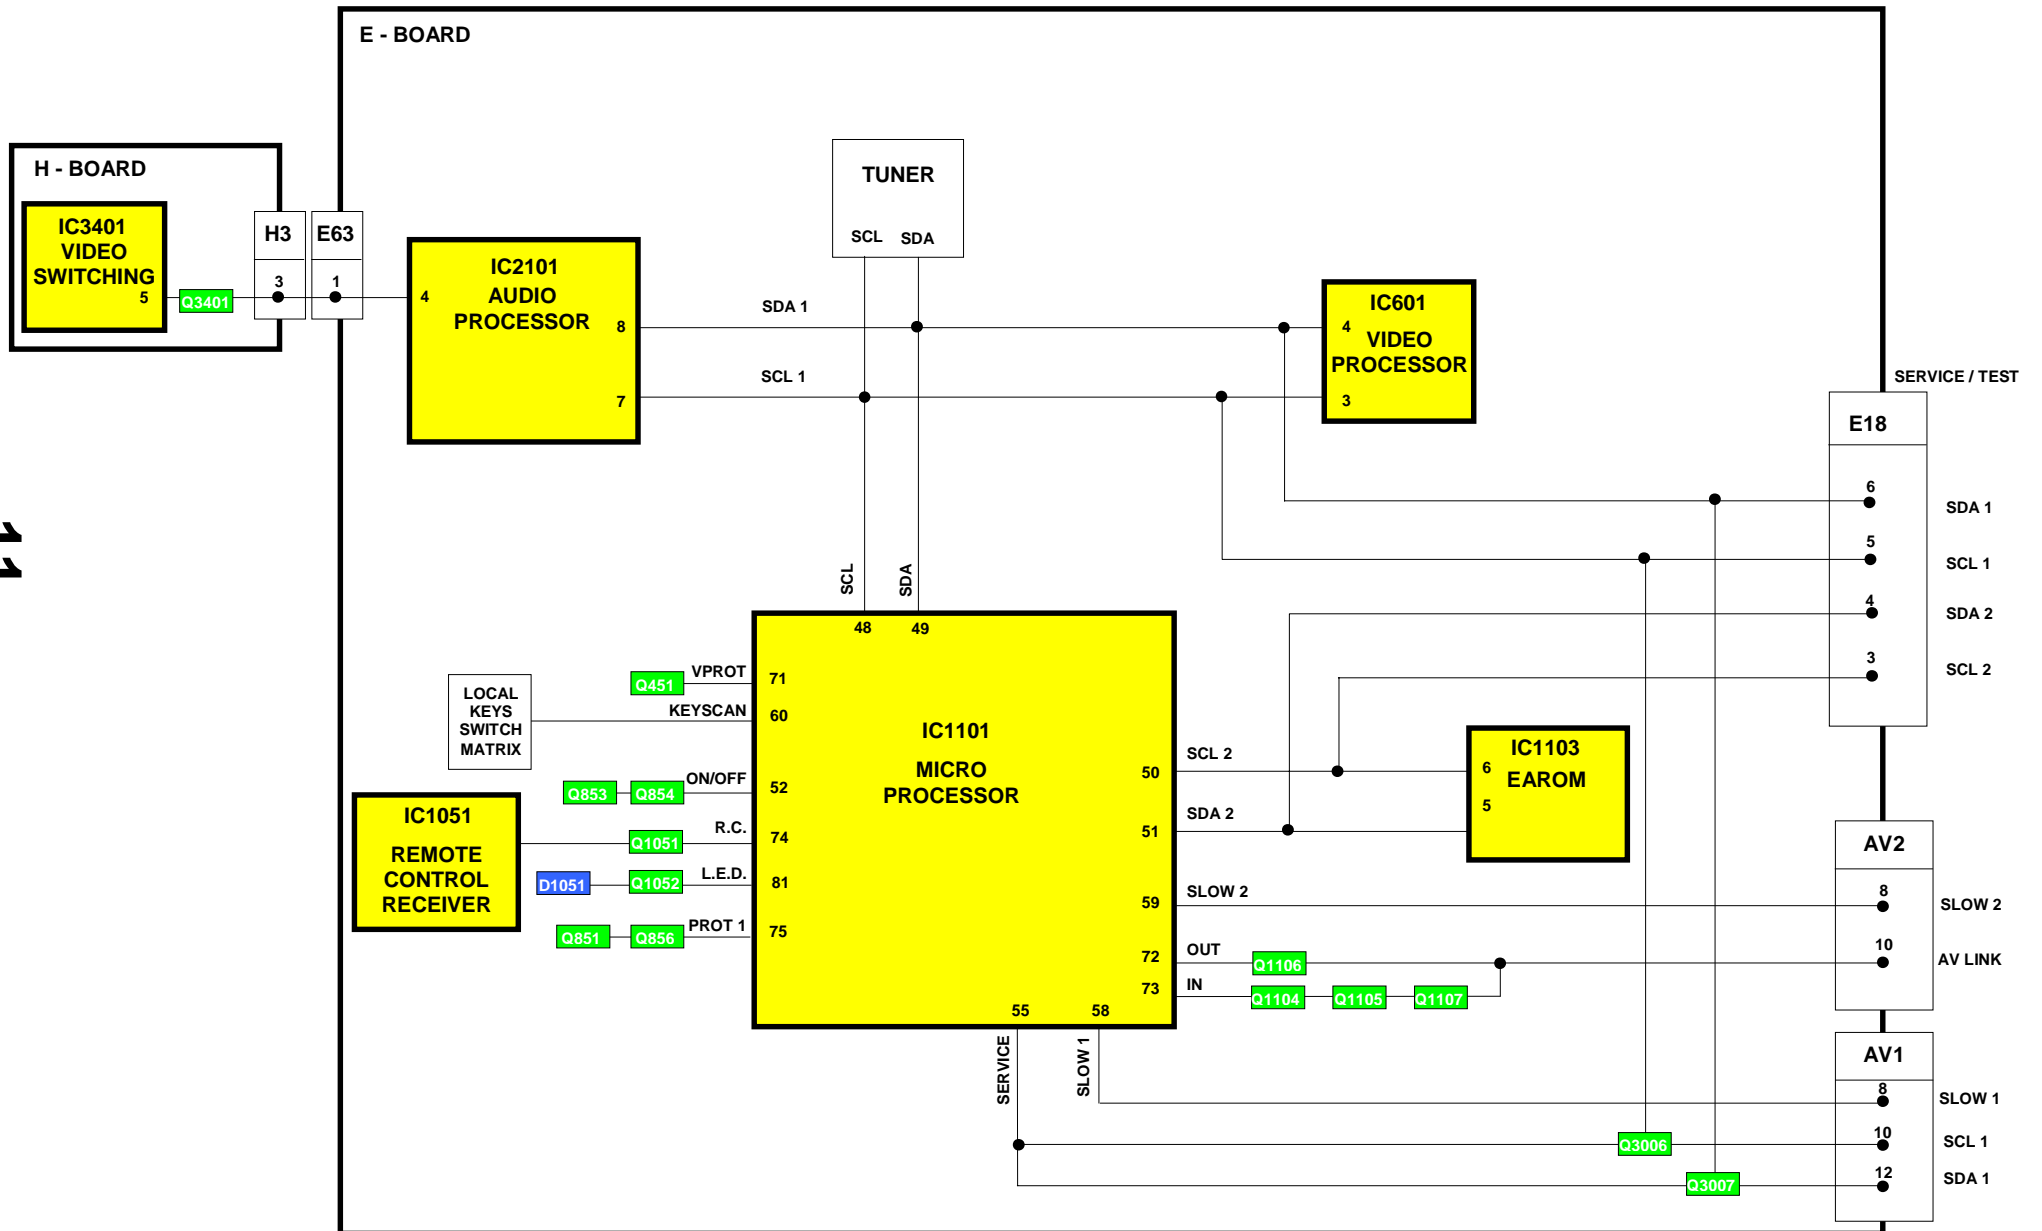


POWER SUPPLY BLOCK DIAGRAM

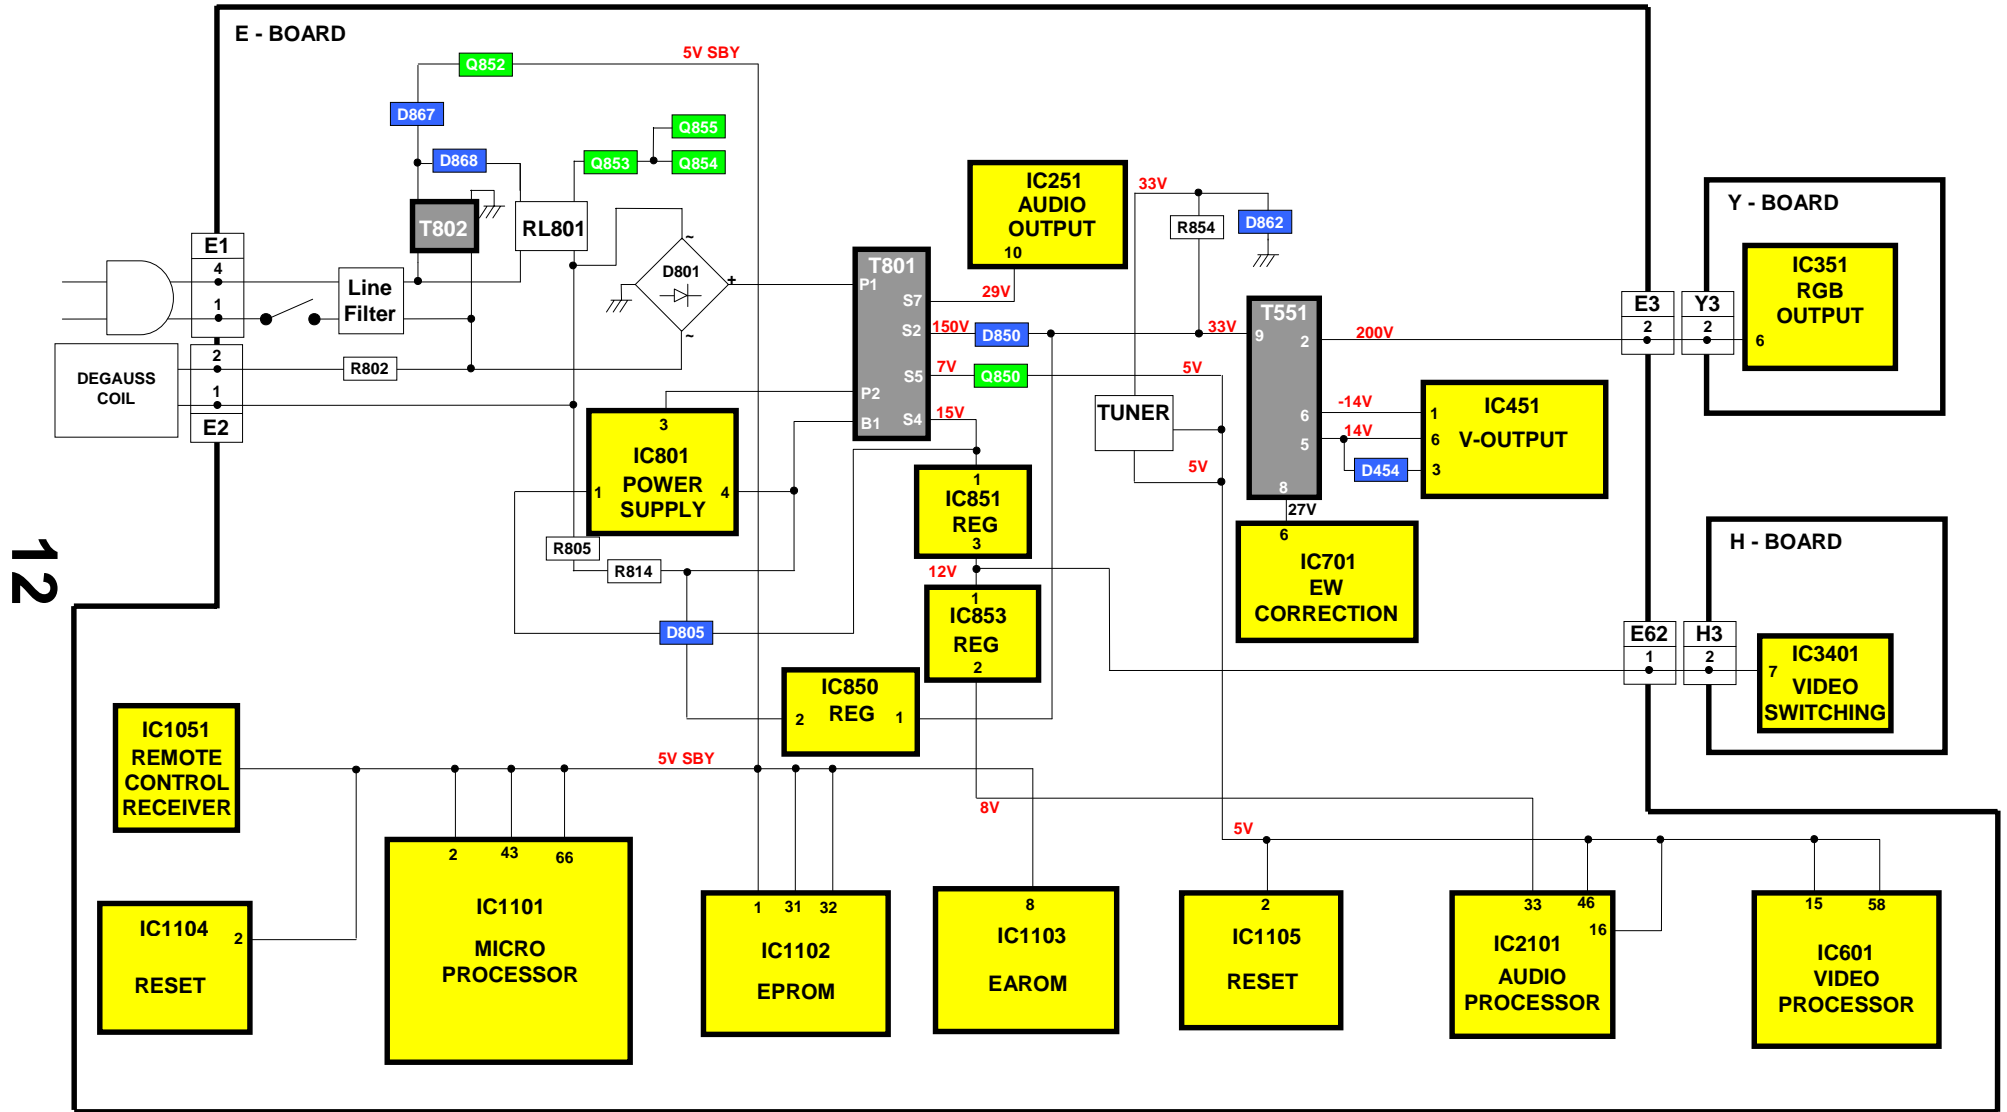


PARTS LOCATION

NOTE:
The numbers on the exploded view below refer to the mechanical section of the Replacement Parts List.

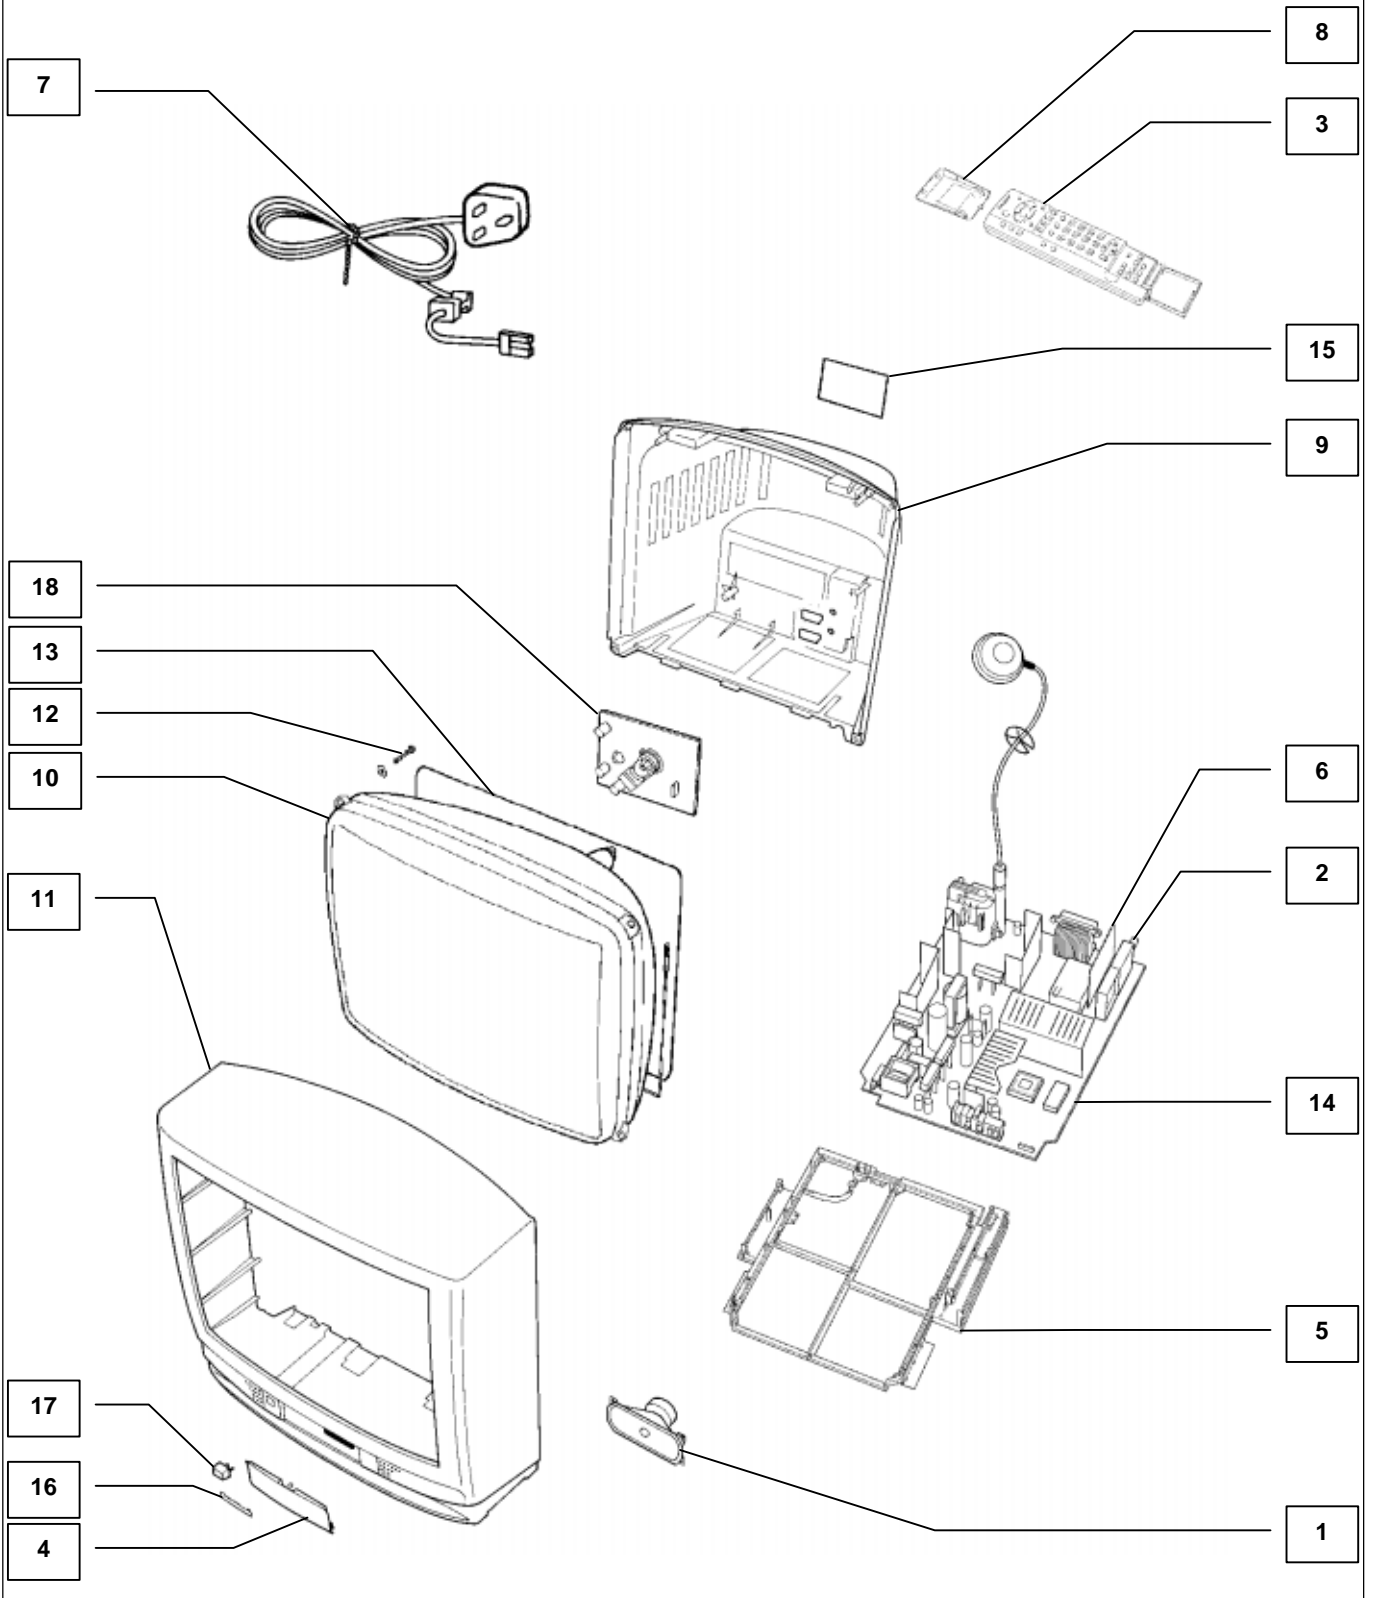









REPLACEMENT PARTS LIST

Important Safety Notice

Components Identified by  mark have special characteristics important for safety.

* When replacing any of these components, use only manufacturers specified parts.

In case of ordering these spare parts, please always add the complete Model-Type number to your order.

| Cct Ref | Parts Number | Description |
|---------------------------------|--------------|------------------------------------------------------------------------------------------------|
| COMMON PARTS | | |
| MECHANICAL PARTS | | |
| 1 | EASG12D531P2 | SPEAKER |
| 2 | ENG27506G | TUNER  |
| 3 | EUR511200 | REMOTE CONTROL |
| 4 | TKP8E1177 | DOOR LID |
| 5 | TMX8E023 | CHASSIS FRAME |
| 6 | TNP8EH002AA | H P.C.B.  |
| 7 | TSX8E0025 | POWER CORD  |
| 8 | UR51EC904A | BATTERY COVER (REMOTE) |
| MISCELLANEOUS COMPONENTS | | |
| | 31221212478 | FIX CLIP |
| | 832AG11D-ESL | I.C. SOCKET |
| | F9-4-220 | RELAY |
| | PCS-084A-1 | 84 PIN SOCKET |
| | TBM8E1879 | PRESET LABEL |
| | TEK6935 | LID SWITCH |
| | TKP8E1178 | LED PANEL |
| | TKP8E1179 | LED TUBE |
| | TMW8E020-1 | LED HOLDER |
| | TS2800 | TV STAND |
| | UM-3DJ-2P | BATTERY PACK |
| RL801 | TSE1885-1 | RELAY  |
| R802 | 232266296706 | THERMISTOR  |
| S351 | 0330550049 | CRT SOCKET  |
| INSTRUCTION BOOKS | | |
| | TQB8E2488-1 | ENGLISH  |
| I.C.s | | |
| IC251 | LA4282 | AUDIO OUTPUT |
| IC351 | TDA6103Q-N3 | R.G.B. AMPLIFIER |
| IC451 | LA7845N | VERTICAL OUTPUT |
| IC601 | VDP3108BPPB1 | VIDEO PROCESSOR |
| IC701 | TEA2031A | HORIZONTAL OUTPUT |
| IC801 | STRF6654LF51 | POWER SUPPLY |
| IC851 | L78M12MRB | 12V REGULATOR |
| IC853 | AN78L08TA | 8V REGULATOR |
| IC1051 | RPM-637CBRL | LED RECEIVER |
| IC1101 | SDA5450C48 | MICRO PROCESSOR |
| IC1102 | 27C2001-F09 | EPROM * |
| IC1104 | MN1381-R(TA) | DIODE |
| IC1105 | MN1381-T(TA) | DIODE |
| IC2101 | MSP3410DPOB4 | AUDIO PROCESSOR |
| IC3401 | TEA2114 | AV SWITCHING |
| FUSES | | |
| F802 | 19181-3.15 | FUSE  |

| Cct Ref | Parts Number | Description |
|---------------|--------------|---------------|
| F8021 | EYF52BC | FUSE HOLDER |
| F8022 | EYF52BC | FUSE HOLDER |
| DIODES | | |
| D251 | MA2180TP | DIODE |
| D253 | MA700TA5 | DIODE |
| D254 | MA700TA5 | DIODE |
| D354 | 1SR124-4AT82 | DIODE |
| D355 | 1SR124-4AT82 | DIODE |
| D356 | 1SR124-4AT82 | DIODE |
| D357 | MA165TA5 | DIODE |
| D358 | MA165TA5 | DIODE |
| D359 | MA165TA5 | DIODE |
| D360 | MTZJT-7715A | DIODE |
| D361 | MA165TA5 | DIODE |
| D362 | MA165TA5 | DIODE |
| D363 | MA165TA5 | DIODE |
| D364 | MA165TA5 | DIODE |
| D453 | MA165TA5 | DIODE |
| D454 | ERA15-02V3 | DIODE |
| D456 | MTZJT-775.6C | DIODE |
| D457 | MA165TA5 | DIODE |
| D501 | MA165TA5 | DIODE |
| D502 | 1SR124-4AT82 | DIODE |
| D511 | MA4047 | DIODE |
| D551 | ERD07-15L7 | DIODE |
| D552 | RU3LFA1 | DIODE |
| D553 | 1SR124-4AT82 | DIODE |
| D554 | 1SR124-4AT82 | DIODE |
| D556 | MA165TA5 | DIODE |
| D557 | 1SR124-4AT82 | DIODE |
| D558 | 1SR124-4AT82 | DIODE |
| D601 | DAN217T146 | DIODE |
| D603 | DAN217T146 | DIODE |
| D605 | DAN212KT146 | DIODE |
| D606 | MA165TA5 | DIODE |
| D607 | MA4051 | DIODE |
| D609 | 1SR124-4AT82 | DIODE |
| D615 | STZ6.2NT146 | DIODE |
| D616 | STZ6.2NT146 | DIODE |
| D701 | MA165TA5 | DIODE |
| D702 | MTZJT-775.1C | DIODE |
| D704 | MA29TA5 | DIODE |
| D705 | MTZJT-775.6C | DIODE |
| D801 | RBV4-08 | DIODE |
| D803 | 1SR124-4AT82 | DIODE |
| D804 | 1SR124-4AT82 | DIODE |
| D805 | TLP621GR-LF2 | PHOTO COUPLER |
| D806 | 1SR124-4AT82 | DIODE |
| D850 | RU4BLF-L1 | DIODE |
| D851 | MTZJT776.2B | DIODE |
| D852 | MA165TA5 | DIODE |
| D853 | MA2180BLFS | DIODE |

| Cct Ref | Parts Number | Description |
|--------------------|--------------|-------------|
| D854 | TVSRU2AMLFA5 | DIODE |
| D855 | FML22SLF610 | DIODE |
| D856 | RU4AMLF-M1 | DIODE |
| D857 | MTZJT-775.1C | DIODE |
| D858 | MA165TA5 | DIODE |
| D859 | MA165TA5 | DIODE |
| D861 | MA165TA5 | DIODE |
| D862 | MTZJT-7736A | DIODE |
| D863 | MA165TA5 | DIODE |
| D865 | MA165TA5 | DIODE |
| D866 | MA165TA5 | DIODE |
| D867 | EK06-V0 | DIODE |
| D868 | 1N4150T-77 | DIODE |
| D869 | 1N4150T-77 | DIODE |
| D870 | MA165TA5 | DIODE |
| D871 | 1N4150T-77 | DIODE |
| D873 | MTZJT-775.6C | DIODE |
| D874 | 1SR124-4AT82 | DIODE |
| D875 | BZX79A75A26A | DIODE |
| D1051 | SLR56UR3FLF | LED |
| D1101 | MA165TA5 | DIODE |
| D1102 | MA165TA5 | DIODE |
| D2101 | MA723TA5 | DIODE |
| D2102 | MA723TA5 | DIODE |
| D2103 | MA723TA5 | DIODE |
| D2104 | MA723TA5 | DIODE |
| D2105 | MTZJT-778.2C | DIODE |
| D2303 | MA723TA5 | DIODE |
| D2304 | MA723TA5 | DIODE |
| D3101 | MTZJT-778.2C | DIODE |
| D3102 | MTZJT-778.2C | DIODE |
| TRANSISTORS | | |
| Q101 | BC847B | TRANSISTOR |
| Q102 | BC847B | TRANSISTOR |
| Q104 | BC847B | TRANSISTOR |
| Q105 | BC847B | TRANSISTOR |
| Q251 | 2SD1328STX | TRANSISTOR |
| Q252 | 2SD1328STX | TRANSISTOR |
| Q301 | BC847B | TRANSISTOR |
| Q302 | FMY4T148 | TRANSISTOR |
| Q303 | BC847B | TRANSISTOR |
| Q304 | FMY4T148 | TRANSISTOR |
| Q305 | BC847B | TRANSISTOR |
| Q306 | FMY4T148 | TRANSISTOR |
| Q351 | 2SA1767 | TRANSISTOR |
| Q352 | 2SA1767 | TRANSISTOR |
| Q353 | 2SA1767 | TRANSISTOR |
| Q354 | BC857B | TRANSISTOR |
| Q451 | BC857B | TRANSISTOR |
| Q503 | 2SD2398-M2 | TRANSISTOR |
| Q551 | BU2508AXLB | TRANSISTOR |
| Q552 | 2SC1473-RN | TRANSISTOR |
| Q701 | BC857B | TRANSISTOR |
| Q850 | 2SD1273PLB | TRANSISTOR |
| Q851 | BC857B | TRANSISTOR |
| Q852 | 2SC1383-S | TRANSISTOR |
| Q853 | BC847B | TRANSISTOR |
| Q854 | BC847B | TRANSISTOR |
| Q855 | BC847B | TRANSISTOR |
| Q856 | BC847B | TRANSISTOR |
| Q857 | 2SA1018QTA | TRANSISTOR |
| Q950 | BC847B | TRANSISTOR |
| Q951 | FMY4T148 | TRANSISTOR |
| Q1051 | BC847B | TRANSISTOR |
| Q1052 | BC847B | TRANSISTOR |
| Q1101 | BC847B | TRANSISTOR |

| Cct Ref | Parts Number | Description |
|---------------------|--------------|-------------|
| Q1104 | BC847B | TRANSISTOR |
| Q1105 | BC847B | TRANSISTOR |
| Q1106 | BC847B | TRANSISTOR |
| Q1107 | BC847B | TRANSISTOR |
| Q1108 | BC847B | TRANSISTOR |
| Q2101 | BC857B | TRANSISTOR |
| Q2102 | BC857B | TRANSISTOR |
| Q2103 | BC857B | TRANSISTOR |
| Q2301 | BC847B | TRANSISTOR |
| Q2302 | BC857B | TRANSISTOR |
| Q2303 | BC847B | TRANSISTOR |
| Q2304 | BC857B | TRANSISTOR |
| Q3001 | BC847B | TRANSISTOR |
| Q3006 | BC847B | TRANSISTOR |
| Q3007 | BC847B | TRANSISTOR |
| Q3401 | BC847B | TRANSISTOR |
| Q3402 | BC847B | TRANSISTOR |
| Q3601 | BC847B | TRANSISTOR |
| TRANSFORMERS | | |
| T501 | ETH19Y173AY | TRANSFORMER |
| T551 | ZTFL94002A | F.B.T. |
| T802 | ETP35KAN619U | TRANSFORMER |
| COILS | | |
| L104 | EXCELSA35T | COIL |
| L106 | TLTACT100K | COIL |
| L107 | TLTACT6R8K | COIL |
| L301 | TLTACT4R7K | COIL |
| L302 | TLTACT4R7K | COIL |
| L451 | EXCELSA35T | COIL |
| L501 | EXCELSA35V | COIL |
| L553 | ELC08D682E | COIL |
| L601 | TLTACT4R7K | COIL |
| L602 | TLTACT4R7K | COIL |
| L603 | TLTACT4R7K | COIL |
| L604 | TLTACT4R7K | COIL |
| L606 | TLTACT4R7K | COIL |
| L607 | ELJFC2R2KF | COIL |
| L701 | ELC10D822E | COIL |
| L850 | EXCELSA35T | COIL |
| L851 | EXCELSA35T | COIL |
| L852 | ELEIN470KA | COIL |
| L853 | EXCELSA35T | COIL |
| L854 | EXCELSA35T | COIL |
| L855 | EXCELSA35T | COIL |
| L856 | EXCELSA39V | COIL |
| L1103 | TLTACT100K | COIL |
| L1104 | EXCELSA35T | COIL |
| L1105 | ELJFC2R2KF | COIL |
| L2101 | TLTACT100K | COIL |
| L2103 | EXCELSA35T | COIL |
| L2104 | TLTACT4R7K | COIL |
| L3001 | ELEMV1R5MA | COIL |
| L3002 | ELEMV1R5MA | COIL |
| L3003 | ELEMV1R5MA | COIL |
| L3004 | ELEMV1R5MA | COIL |
| L3005 | ELEBR2R2KA | COIL |
| L3006 | ELEBR2R2KA | COIL |
| L3007 | TLTACT2R2K | COIL |
| L3101 | ELEBT6R8KA | COIL |
| L3102 | ELEBT6R8KA | COIL |
| L3401 | ELESN2R2KA | COIL |
| L3402 | ELESN2R2KA | COIL |
| FILTERS | | |
| L804 | ELF18N010A | LINE FILTER |

| Cct Ref | Parts Number | Description | | | | |
|------------------|--------------|-------------|-------|----|-------|--|
| CRYSTALS | | | | | | |
| X601 | 4730007267 | CRYSTAL | | | | |
| X1101 | TSSA121 | CRYSTAL | | | | |
| X2101 | 4730007158 | CRYSTAL | | | | |
| RESISTORS | | | | | | |
| C101 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA39 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA27 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA54 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA52 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA48 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA47 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA45 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA44 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA40 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA38 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA37 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA55 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA28 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA49 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA26 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA25 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA22 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA16 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA15 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA14 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA13 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA12 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA11 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA10 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA36 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA9 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA57 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE3 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE26 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE22 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE18 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE12 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE10 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE33 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE35 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE4 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE5 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA60 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSH001 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA58 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JA35 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA32 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA23 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA30 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA21 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA31 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA29 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA51 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA33 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA59 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA5 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA50 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA8 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA43 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA46 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA34 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JA56 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| R101 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R102 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R103 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|-----|--------|---|
| R104 | ERJ6GEYJ332 | S.M.CARB | 0.1W | 5% | 3K3 Ω | |
| R105 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R106 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 Ω | |
| R107 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R111 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R112 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R113 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R114 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R115 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R116 | ERJ6GEYJ562 | S.M.CARB | 0.1W | 5% | 5K6 Ω | |
| R117 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R118 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R121 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R251 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R252 | ERJ6GEYJ242 | S.M.CARB | 0.1W | 5% | 2K4 Ω | |
| R253 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R254 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R255 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R256 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R257 | ERJ6GEYJ270 | S.M.CARB | 0.1W | 5% | 27 Ω | |
| R258 | ERJ6GEYJ242 | S.M.CARB | 0.1W | 5% | 2K4 Ω | |
| R259 | ERJ6GEYJ270 | S.M.CARB | 0.1W | 5% | 27 Ω | |
| R260 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R261 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R262 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R265 | ERD25TJ2R2 | CARBON | 0.25W | 5% | 2R2 Ω | |
| R266 | ERD25TJ2R2 | CARBON | 0.25W | 5% | 2R2 Ω | |
| R267 | ERF7ZK4R7 | WOUND | 7W | 10% | 4R7 Ω | ⚠ |
| R271 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R272 | ERF7ZK4R7 | WOUND | 7W | 10% | 4R7 Ω | ⚠ |
| R301 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R302 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R303 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R304 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R305 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R306 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R307 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R308 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R309 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R310 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R311 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R312 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R351 | ERJ6GEYJ302 | S.M.CARB | 0.1W | 5% | 3K Ω | |
| R352 | ERJ6GEYJ302 | S.M.CARB | 0.1W | 5% | 3K Ω | |
| R353 | ERJ6GEYJ302 | S.M.CARB | 0.1W | 5% | 3K Ω | |
| R354 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R355 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R356 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R357 | ERDS1TJ104 | CARBON | 0.5W | 5% | 100K Ω | |
| R358 | ERDS1TJ104 | CARBON | 0.5W | 5% | 100K Ω | |
| R359 | ERDS1TJ104 | CARBON | 0.5W | 5% | 100K Ω | |
| R366 | ERDS1TJ152 | CARBON | 0.5W | 5% | 1K5 Ω | |
| R367 | ERDS1TJ152 | CARBON | 0.5W | 5% | 1K5 Ω | |
| R368 | ERDS1TJ152 | CARBON | 0.5W | 5% | 1K5 Ω | |
| R369 | ERD25TJ472 | CARBON | 0.25W | 5% | 4K7 Ω | |
| R372 | ERQ12AJ121 | FUSIBLE | 0.5W | 5% | 120 Ω | ⚠ |
| R373 | ERJ6GEYJ220 | S.M.CARB | 0.1W | 5% | 22 Ω | |
| R374 | ERD25TJ274 | CARBON | 0.25W | 5% | 270K Ω | |
| R375 | ERJ6GEYJ684 | S.M.CARB | 0.1W | 5% | 680K Ω | |
| R376 | ERJ6GEYJ183 | S.M.CARB | 0.1W | 5% | 18K Ω | |
| R378 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R379 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R380 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R381 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K Ω | |
| R451 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R452 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|-----|------|------|
| R453 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R454 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 | 🔌 |
| R455 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 | 🔌 |
| R456 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | 🔌 |
| R457 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K | 🔌 |
| R458 | ERD25TJ1R5 | CARBON | 0.25W | 5% | 1R5 | 🔌 |
| R459 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R460 | ERDS1TJ331 | CARBON | 0.5W | 5% | 330 | 🔌 |
| R463 | ERD25TJ222 | CARBON | 0.25W | 5% | 2K2 | 🔌 |
| R464 | ERJ6GEYJ182 | S.M.CARB | 0.1W | 5% | 1K8 | 🔌 |
| R465 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 | 🔌 |
| R502 | ERJ6GEYJ511 | S.M.CARB | 0.1W | 5% | 510 | 🔌 |
| R506 | ERD25TJ560 | CARBON | 0.25W | 5% | 56 | 🔌 |
| R507 | ERG1FJ271P | METAL | 1W | 5% | 270 | 🔌 ⚠️ |
| R509 | ERDS1TJ152 | CARBON | 0.5W | 5% | 1K5 | 🔌 |
| R510 | ERDS1FJ152 | CARBON | 0.5W | 5% | 1K5 | 🔌 ⚠️ |
| R553 | ERG1SJ152 | METAL | 1W | 5% | 1K5 | 🔌 |
| R554 | ERG1SJ101 | METAL | 1W | 5% | 100 | 🔌 |
| R555 | ERQ12HKR33 | METAL | 0.5W | 5% | R33 | 🔌 ⚠️ |
| R558 | ERDS1TJ124 | CARBON | 0.5W | 5% | 120K | 🔌 |
| R559 | ERQ12HKR33 | METAL | 0.5W | 5% | R33 | 🔌 ⚠️ |
| R560 | ERJ6GEYJ274 | S.M.CARB | 0.1W | 5% | 270K | 🔌 |
| R561 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K | 🔌 |
| R563 | ERJ6GEYJ474 | S.M.CARB | 0.1W | 5% | 470K | 🔌 |
| R564 | ERJ6GEYJ623 | S.M.CARB | 0.1W | 5% | 62K | 🔌 |
| R566 | ERJ6GEYJ563 | S.M.CARB | 0.1W | 5% | 56K | 🔌 |
| R567 | ERF7ZK1R0 | WOUND | 7W | 10% | 1 | 🔌 ⚠️ |
| R601 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R602 | ERJ6GEYJ821 | S.M.CARB | 0.1W | 5% | 820 | 🔌 |
| R603 | ERJ8GEYJ103 | S.M.CARB | .125W | 5% | 10K | 🔌 |
| R604 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R605 | ERD25TJ331 | CARBON | 0.25W | 5% | 330 | 🔌 |
| R606 | ERD25TJ331 | CARBON | 0.25W | 5% | 330 | 🔌 |
| R607 | ERJ6GEYJ821 | S.M.CARB | 0.1W | 5% | 820 | 🔌 |
| R608 | ERJ6GEYJ271 | S.M.CARB | 0.1W | 5% | 270 | 🔌 |
| R609 | ERJ6GEYJ122 | S.M.CARB | 0.1W | 5% | 1K2 | 🔌 |
| R610 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R611 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R612 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R613 | ERJ6GEYJ152 | S.M.CARB | 0.1W | 5% | 1K5 | 🔌 |
| R622 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R636 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | 🔌 |
| R645 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R647 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | 🔌 |
| R648 | ERJ6GEYJ152 | S.M.CARB | 0.1W | 5% | 1K5 | 🔌 |
| R650 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | 🔌 |
| R651 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | 🔌 |
| R652 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R654 | ERJ6GEYJ622 | S.M.CARB | 0.1W | 5% | 6K2 | 🔌 |
| R655 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R658 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | 🔌 |
| R659 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R660 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R701 | ERQ12AJ101 | FUSIBLE | 0.5W | 5% | 100 | 🔌 ⚠️ |
| R703 | ERG2FJ821 | METAL | 2W | 5% | 820 | 🔌 ⚠️ |
| R704 | ERJ6GEYJ563 | S.M.CARB | 0.1W | 5% | 56K | 🔌 |
| R705 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | 🔌 |
| R706 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R707 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 | 🔌 |
| R708 | ERJ6GEYJ393 | S.M.CARB | 0.1W | 5% | 39K | 🔌 |
| R709 | ERJ6GEYJ393 | S.M.CARB | 0.1W | 5% | 39K | 🔌 |
| R710 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K | 🔌 |
| R711 | ERG1SJ101 | METAL | 1W | 5% | 100 | 🔌 |
| R712 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R803 | ERC12ZGK335D | SOLID | 0.5W | 10% | 3M3 | 🔌 |
| R805 | ERD25TJ473 | CARBON | 0.25W | 5% | 47K | 🔌 |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|-----|------|------|
| R806 | ERD25TJ100 | CARBON | 0.25W | 5% | 10 | 🔌 |
| R807 | ERD25TJ332 | CARBON | 0.25W | 5% | 3K3 | 🔌 |
| R809 | ERD25TJ681 | CARBON | 0.25W | 5% | 680 | 🔌 |
| R810 | ERW2PKR33 | WOUND | 2W | 20% | R33 | 🔌 ⚠️ |
| R811 | ERW2PKR33 | WOUND | 2W | 20% | R33 | 🔌 ⚠️ |
| R812 | ERD75TAJ825 | CARBON | 0.75W | 5% | 8M2 | 🔌 ⚠️ |
| R813 | ERF7ZK2R7 | WOUND | 7W | 20% | 2R7 | 🔌 ⚠️ |
| R814 | ERD25TJ473 | CARBON | 0.25W | 5% | 47K | 🔌 |
| R815 | ERD25TJ222 | CARBON | 0.25W | 5% | 2K2 | 🔌 |
| R850 | ERD25TJ122 | CARBON | 0.25W | 5% | 1K2 | 🔌 |
| R852 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R853 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R854 | ERG2FJ223 | METAL | 2W | 5% | 22K | 🔌 ⚠️ |
| R855 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 | 🔌 |
| R857 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 | 🔌 |
| R858 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 | 🔌 |
| R859 | ERJ6GEYJ753 | S.M.CARB | 0.1W | 5% | 75K | 🔌 |
| R860 | ERQ1CJP2R2 | FUSIBLE | 1W | 10% | 2R2 | 🔌 ⚠️ |
| R861 | ERD25TJ221 | CARBON | 0.25W | 5% | 220 | 🔌 |
| R862 | ERD25TJ272 | CARBON | 0.25W | 5% | 2K7 | 🔌 |
| R863 | ERDS1TJ560 | CARBON | 0.5W | 5% | 56 | 🔌 |
| R864 | ERDS1TJ680 | CARBON | 0.5W | 5% | 68 | 🔌 |
| R865 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R867 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R868 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K | 🔌 |
| R869 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | 🔌 |
| R870 | ERJ6GEYJ272 | S.M.CARB | 0.1W | 5% | 2K7 | 🔌 |
| R871 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | 🔌 |
| R872 | ERG1SJ183 | METAL | 1W | 5% | 18K | 🔌 |
| R873 | ERG1SJ223 | METAL | 1W | 5% | 22K | 🔌 |
| R874 | ERD25TJ104 | CARBON | 0.25W | 5% | 100K | 🔌 |
| R876 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R877 | ERW2PKR56 | WOUND | 2W | 10% | R56 | 🔌 ⚠️ |
| R878 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K | 🔌 |
| R951 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 | 🔌 |
| R952 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R953 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | 🔌 |
| R954 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 | 🔌 |
| R1051 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R1052 | ERJ6GEYJ271 | S.M.CARB | 0.1W | 5% | 270 | 🔌 |
| R1053 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | 🔌 |
| R1054 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | 🔌 |
| R1101 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1102 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R1103 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 | 🔌 |
| R1104 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 | 🔌 |
| R1105 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1106 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | 🔌 |
| R1107 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | 🔌 |
| R1108 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | 🔌 |
| R1109 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | 🔌 |
| R1110 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | 🔌 |
| R1111 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K | 🔌 |
| R1112 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K | 🔌 |
| R1113 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1115 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | 🔌 |
| R1116 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1117 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1118 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | 🔌 |
| R1119 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | 🔌 |
| R1120 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1121 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1122 | ERD25TJ471 | CARBON | 0.25W | 5% | 470 | 🔌 |
| R1123 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |
| R1125 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | 🔌 |
| R1126 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | 🔌 |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|------|----|------|---|
| R1127 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1128 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 | Ω |
| R1129 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 | Ω |
| R1130 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R1131 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R1132 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1133 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K | Ω |
| R1136 | ERJ6GEYJ823 | S.M.CARB | 0.1W | 5% | 82K | Ω |
| R1137 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | Ω |
| R1138 | ERJ6GEYJ474 | S.M.CARB | 0.1W | 5% | 470K | Ω |
| R1139 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | Ω |
| R1140 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R1141 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R1145 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1146 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1147 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1148 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1149 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K | Ω |
| R1151 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1152 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1154 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1155 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1156 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R1157 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R1158 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | Ω |
| R1159 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | Ω |
| R1160 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K | Ω |
| R1161 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R1162 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 | Ω |
| R1163 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 | Ω |
| R1164 | ERJ6GEYJ332 | S.M.CARB | 0.1W | 5% | 3K3 | Ω |
| R1165 | ERJ6GEYJ512 | S.M.CARB | 0.1W | 5% | 5K1 | Ω |
| R1166 | ERJ6GEYJ912 | S.M.CARB | 0.1W | 5% | 9K1 | Ω |
| R1167 | ERJ6GEYJ100 | S.M.CARB | 0.1W | 5% | 10 | Ω |
| R1168 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K | Ω |
| R1169 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | Ω |
| R1170 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K | Ω |
| R1171 | ERJ6GEYJ224 | S.M.CARB | 0.1W | 5% | 220K | Ω |
| R1172 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K | Ω |
| R1173 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | Ω |
| R1174 | ERJ6GEYJ221 | S.M.CARB | 0.1W | 5% | 220 | Ω |
| R1175 | ERJ6GEYJ225 | S.M.CARB | 0.1W | 5% | 2M2 | Ω |
| R1176 | ERJ6GEYJ100 | S.M.CARB | 0.1W | 5% | 10 | Ω |
| R2101 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R2102 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2103 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2104 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2105 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2106 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2107 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2108 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2109 | ERJ6GEYJ183 | S.M.CARB | 0.1W | 5% | 18K | Ω |
| R2110 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | Ω |
| R2111 | ERJ6GEYJ221 | S.M.CARB | 0.1W | 5% | 220 | Ω |
| R2112 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | Ω |
| R2113 | ERJ6GEYJ562 | S.M.CARB | 0.1W | 5% | 5K6 | Ω |
| R2114 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2115 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 | Ω |
| R2116 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2117 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2118 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 | Ω |
| R2119 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2120 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 | Ω |
| R2302 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | Ω |
| R2303 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2304 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|------|----|------|---|
| R2305 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | Ω |
| R2306 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R2308 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | Ω |
| R2309 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R2310 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R2311 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | Ω |
| R2312 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R3001 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3002 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R3003 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3004 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | Ω |
| R3005 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3006 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R3007 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3008 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | Ω |
| R3009 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3010 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3011 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3012 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3013 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3014 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R3015 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3016 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | Ω |
| R3017 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3018 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 | Ω |
| R3019 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3020 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | Ω |
| R3021 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3022 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | Ω |
| R3023 | ERJ6GEYJ123 | S.M.CARB | 0.1W | 5% | 12K | Ω |
| R3024 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | Ω |
| R3025 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3026 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3044 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3046 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3047 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3048 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R3049 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3050 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K | Ω |
| R3057 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3101 | ERDS1TJ151 | CARBON | 0.5W | 5% | 150 | Ω |
| R3102 | ERDS1TJ151 | CARBON | 0.5W | 5% | 150 | Ω |
| R3103 | ERG2FJ221 | METAL | 2W | 5% | 220 | Ω |
| R3104 | ERG2FJ221 | METAL | 2W | 5% | 220 | Ω |
| R3105 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3106 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3107 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | Ω |
| R3108 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K | Ω |
| R3402 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3403 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3404 | ERJ6GEYJ242 | S.M.CARB | 0.1W | 5% | 2K4 | Ω |
| R3405 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K | Ω |
| R3406 | ERJ6GEYJ301 | S.M.CARB | 0.1W | 5% | 300 | Ω |
| R3407 | ERJ6GEYJ123 | S.M.CARB | 0.1W | 5% | 12K | Ω |
| R3408 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | Ω |
| R3409 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 | Ω |
| R3601 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3602 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3603 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3604 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3605 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3606 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 | Ω |
| R3607 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 | Ω |
| R3608 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 | Ω |
| R3609 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | Ω |
| R3610 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | Ω |

| Cct Ref | Parts Number | Description | | | |
|-------------------|--------------|-------------|-------|-------|---|
| CAPACITORS | | | | | |
| C102 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C103 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C106 | ECUV1H560JCX | S.M. CAP | 50V | 56pF | |
| C107 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C108 | ECA1CM470GB | ELECT | 16V | 47µF | |
| C109 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C110 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C111 | ECA1HMR33GB | ELECT | 50V | 10nF | |
| C117 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C118 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C119 | ECA1CM221GB | ELECT | 16V | 220µF | |
| C120 | ECA1CM221GB | ELECT | 16V | 220µF | |
| C121 | ECUV1H561KBX | S.M. CAP | 50V | 560pF | |
| C124 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | |
| C125 | ECUV1H100DCX | S.M. CAP | 50V | 10pF | |
| C251 | ECA1EM100GB | ELECT | 25V | 10pF | |
| C252 | ECUV1H223KBX | S.M. CAP | 50V | 22nF | |
| C253 | ECA1HM4R7GB | ELECT | 50V | 4.7µF | |
| C254 | ECQM1H274J | FILM | 50V | 270nF | |
| C255 | ECA1EM101GB | ELECT | 25V | 100µF | |
| C256 | ECUV1H223KBX | S.M. CAP | 50V | 22nF | |
| C257 | ECA1HM4R7GB | ELECT | 50V | 4.7µF | |
| C258 | ECA1EM100GB | ELECT | 25V | 4.7µF | |
| C259 | ECQM1H274J | FILM | 50V | 270nF | |
| C260 | ECA1VM102GB | ELECT | 35V | 1nF | |
| C261 | ECA1VM102GB | ELECT | 35V | 1nF | |
| C262 | ECQM1H474J | FILM | 50V | 470nF | |
| C263 | ECA1HM010GB | ELECT | 50V | 1µF | |
| C264 | ECA1HHG222E | ELECT | 50V | 1µF | |
| C265 | ECQM1H474J | FILM | 50V | 470nF | |
| C266 | ECA1HM010GB | ELECT | 50V | 1µF | |
| C267 | ECJ2VB1H104K | ELECT | 350V | 100nF | |
| C268 | ECJ2VB1H104K | ELECT | 350V | 100nF | |
| C270 | ECJ2VB1H104K | ELECT | 350V | 100nF | |
| C301 | ECJ2VB1C104K | ELECT | 350V | 100nF | |
| C302 | ECJ2VB1C104K | ELECT | 350V | 100nF | |
| C303 | ECJ2VB1C104K | ELECT | 350V | 100nF | |
| C304 | ECA1CM100GB | ELECT | 16V | 10µF | |
| C351 | ECUV1H090DCN | S.M. CAP | 50V | 10µF | |
| C352 | ECUV1H090DCN | S.M. CAP | 50V | 10µF | |
| C353 | ECUV1H090DCN | S.M. CAP | 50V | 10µF | |
| C354 | ECQM2104KZ | FILM | 250V | 100nF | |
| C355 | ECUV1H471JCX | S.M. CAP | 50V | 470pF | |
| C356 | ECUV1H471JCX | S.M. CAP | 50V | 470pF | |
| C357 | ECUV1H471JCX | S.M. CAP | 50V | 470pF | |
| C358 | ECQM1H224J | FILM | 50V | 220nF | |
| C360 | ECKC3D152J | CERAMIC | 2KV | 1.5nF | ⚠ |
| C361 | ECA1HMR47GB | ELECT | 50V | 1.5nF | |
| C363 | ECA1VM471GB | ELECT | 35V | 470µF | |
| C364 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C451 | ECUV1H102JX | S.M. CAP | 50V | 10nF | |
| C453 | ECUV1H152KBX | S.M. CAP | 50V | 10nF | |
| C454 | ECUV1H223KBM | S.M. CAP | 50V | 10nF | |
| C455 | ECEA1HKA010 | ELECT | 50V | 1µF | |
| C456 | ECA1HHG221B | ELECT | 50V | 220µF | |
| C458 | ECQB1222JF3 | FILM | 100V | 2.2nF | |
| C459 | 222236516154 | FILM | 160V | 2.2nF | |
| C461 | ECCR2H270J | CERAMIC | 500V | 27pF | |
| C508 | ECQV1H105JZ | FILM | 50V | 1µF | |
| C509 | ECEA1HU101 | ELECT | 50V | 100µF | |
| C510 | ECUV1H104KBX | S.M. CAP | 50V | 100µF | |
| C511 | ECQM2683JZ | FILM | 250V | 68nF | |
| C552 | ECWH15H102J | FILM | 1500V | 1nF | |
| C557 | ECKC2H471J | CERAMIC | 500V | 470pF | ⚠ |
| C558 | ECA1HHG471E | ELECT | 50V | 470µF | |

| Cct Ref | Parts Number | Description | | | |
|---------|--------------|-------------|-------|-------|---|
| C560 | ECA2GHG2R2B | ELECT | 400V | 470µF | |
| C561 | ECA1EHG102B | ELECT | 25V | 470µF | |
| C562 | ECKC2H101J | CERAMIC | 500V | 100pF | ⚠ |
| C563 | ECA2EHG220B | ELECT | 250V | 20µF | |
| C564 | ECEA2AU2R2 | ELECT | 100V | 20µF | |
| C565 | ECQP1H273J | FILM | 100V | 20µF | |
| C566 | ECKC2H471J | CERAMIC | 500V | 470pF | ⚠ |
| C567 | ECA1EHG102B | ELECT | 25V | 470pF | |
| C568 | ECKC2H471J | CERAMIC | 500V | 470pF | ⚠ |
| C569 | ECKC2H102J | CERAMIC | 500V | 1nF | ⚠ |
| C601 | ECUV1H104KBX | S.M. CAP | 50V | 1nF | |
| C602 | ECA1HM101GB | ELECT | 50V | 100µF | |
| C603 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C604 | ECUV1H223ZFX | S.M. CAP | 50V | 22nF | |
| C605 | ECA1HM101GB | ELECT | 50V | 100µF | |
| C606 | ECA1HM3R3GB | ELECT | 50V | 3.3µF | |
| C607 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C608 | ECUV1H153KBX | S.M. CAP | 50V | 15nF | |
| C609 | ECUV1H153KBX | S.M. CAP | 50V | 15nF | |
| C610 | ECUV1H153KBX | S.M. CAP | 50V | 15nF | |
| C611 | ECUV1H153KBX | S.M. CAP | 50V | 15nF | |
| C612 | ECUV1H153KBX | S.M. CAP | 50V | 15nF | |
| C613 | ECUV1H153KBX | S.M. CAP | 50V | 15nF | |
| C614 | ECUV1H050CCX | S.M. CAP | 50V | 50pF | |
| C615 | ECUV1H050CCX | S.M. CAP | 50V | 50pF | |
| C616 | ECA1CM100GB | ELECT | 16V | 10µF | |
| C617 | ECUV1H223KBX | S.M. CAP | 50V | 22nF | |
| C618 | ECA1CM221GB | ELECT | 16V | 220µF | |
| C619 | ECJ2VB1H473K | ELECT | 350V | 47nF | |
| C620 | ECA1HM101GB | ELECT | 50V | 100µF | |
| C621 | ECJ2VB1C104K | ELECT | 350V | 100nF | |
| C622 | ECUV1H683KBX | S.M. CAP | 50V | 68nF | |
| C623 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C624 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C625 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C626 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C627 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C628 | ECA1CM100GB | ELECT | 16V | 10µF | |
| C629 | ECUV1H104KBX | S.M. CAP | 50V | 10µF | |
| C630 | ECCR1H100J | CERAMIC | 50V | 10µF | |
| C631 | ECUV1H683ZFX | S.M. CAP | 50V | 68nF | |
| C632 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | |
| C633 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C634 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C635 | ECUV1H180JCX | S.M. CAP | 50V | 18pF | |
| C636 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C637 | ECUV1H101JCX | S.M. CAP | 50V | 100pF | |
| C638 | ECUV1H471JCX | S.M. CAP | 50V | 470pF | |
| C639 | ECUV1H332KBM | S.M. CAP | 50V | 470pF | |
| C701 | ECA1HHG101B | ELECT | 50V | 100µF | |
| C702 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C703 | ECEA1HGE100 | ELECT | 50V | 10µF | |
| C704 | ECQB1H223K | FILM | 50V | 22nF | |
| C705 | ECQB1H222J | FILM | 50V | 2.2nF | |
| C804 | ECQE2A474MWB | FILM | 100V | 470nF | |
| C806 | ECKWNA101MBC | CERAMIC | 400V | 100µF | |
| C807 | ECKC2H472J | CERAMIC | 500V | 4.7nF | ⚠ |
| C808 | ECKC2H472J | CERAMIC | 500V | 4.7nF | ⚠ |
| C809 | ECKC2H472J | CERAMIC | 500V | 4.7nF | ⚠ |
| C810 | ECKC2H472J | CERAMIC | 500V | 4.7nF | ⚠ |
| C814 | ECKC3D102J | CERAMIC | 2KV | 1nF | ⚠ |
| C815 | ECKC1H471J | CERAMIC | 50V | 470pF | |
| C816 | ECA1EM101GB | ELECT | 25V | 100µF | |
| C817 | ECQE6104K | FILM | 600V | 100nF | ⚠ |
| C818 | ECKWNA332MEC | CERAMIC | 250V | 3.3nF | |
| C819 | ECQB1H152K | FILM | 50V | 1.5nF | |

| Cct Ref | Parts Number | Description | | | |
|---------|--------------|-------------|-------|-------|---|
| C850 | ECKC3D471JB | CERAMIC | 2KV | 470pF | ⚠ |
| C851 | ECA2CM221E | ELECT | 160V | 220μF | |
| C852 | ECA2CHG101E | ELECT | 160V | 100μF | |
| C853 | ECKC2H471J | CERAMIC | 500V | 470pF | ⚠ |
| C854 | ECA1EM102GB | ELECT | 25V | 100μF | |
| C855 | ECKC2H471J | CERAMIC | 500V | 470pF | ⚠ |
| C856 | ECA1AHG222B | ELECT | 10V | 470pF | |
| C857 | ECKC2H471J | CERAMIC | 500V | 470pF | ⚠ |
| C858 | ECEA1HGE102 | ELECT | 50V | 470pF | |
| C859 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C860 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C862 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C863 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C866 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C867 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C868 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C869 | ECA1EM101GB | ELECT | 25V | 100μF | |
| C870 | ECA1EM471GB | ELECT | 25V | 470μF | |
| C871 | ECA1CM102B | ELECT | 16V | 470μF | |
| C872 | ECA1CM471GB | ELECT | 16V | 470μF | |
| C873 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C875 | ECA2CM4R7B | ELECT | 160V | 10μF | |
| C876 | ECA1AHG471E | ELECT | 10V | 470pF | |
| C950 | ECJ2VB1C104K | ELECT | 350V | 100nF | |
| C1051 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C1052 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C1053 | ECUV1H331JCX | S.M. CAP | 50V | 330pF | |
| C1101 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C1102 | ECA0JM101G | ELECT | 6.3V | 100μF | |
| C1103 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | |
| C1104 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | |
| C1105 | ECUV1H101JCX | S.M. CAP | 50V | 100pF | |
| C1108 | ECUV1H333KBX | S.M. CAP | 50V | 33nF | |
| C1111 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C1112 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C1115 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C1116 | ECUV1H472KBX | S.M. CAP | 50V | 4.7nF | |
| C1117 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C1118 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C1119 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C1120 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C1121 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C1123 | ECUV1H101JCX | S.M. CAP | 50V | 100pF | |
| C1124 | ECUV1H391JCX | S.M. CAP | 50V | 390pF | |
| C1125 | ECUV1H391JCX | S.M. CAP | 50V | 390pF | |
| C1126 | ECUV1H391JCX | S.M. CAP | 50V | 390pF | |
| C1127 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C1128 | ECUV1H223KBX | S.M. CAP | 50V | 22nF | |
| C1129 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | |
| C2101 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2102 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2103 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2104 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2105 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2106 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2107 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2108 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2109 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2110 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C2111 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C2112 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C2113 | ECA1HM3R3GB | ELECT | 50V | 3.3μF | |
| C2114 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C2115 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2116 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2117 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |

| Cct Ref | Parts Number | Description | | | |
|---------|--------------|-------------|-------|-------|--|
| C2118 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2119 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2120 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2121 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C2122 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C2123 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2124 | ECUV1H070DTX | S.M. CAP | 50V | 70pF | |
| C2125 | ECUV1H470JCX | S.M. CAP | 50V | 47pF | |
| C2126 | ECUV1H070DTX | S.M. CAP | 50V | 70pF | |
| C2127 | ECUV1H010CCX | S.M. CAP | 50V | 1pF | |
| C2128 | ECUV1H010CCX | S.M. CAP | 50V | 1pF | |
| C2129 | ECA1CM102B | ELECT | 16V | 1pF | |
| C2130 | ECA1CM331B | ELECT | 16V | 330μF | |
| C2131 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C2132 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C2134 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C2135 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C2136 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C2137 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C2138 | ECUV1H471KBX | S.M. CAP | 50V | 470pF | |
| C2139 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | |
| C2140 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C2141 | ECUV1H152JCX | S.M. CAP | 50V | 1.5pF | |
| C2301 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C2302 | ECA1CM470GB | ELECT | 16V | 47μF | |
| C2303 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C2304 | ECA1CM470GB | ELECT | 16V | 47μF | |
| C3001 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3002 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3003 | ECA1CM470GB | ELECT | 16V | 47μF | |
| C3005 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3006 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C3007 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3008 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3009 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3010 | ECA1CM470GB | ELECT | 16V | 47μF | |
| C3012 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3013 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C3014 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3015 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3016 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3017 | ECA1CM470GB | ELECT | 16V | 47μF | |
| C3019 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3020 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C3021 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3022 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3023 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3024 | ECA1CM470GB | ELECT | 16V | 47μF | |
| C3026 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3027 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | |
| C3028 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C3029 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C3032 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C3033 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C3034 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C3035 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C3101 | ECUV1H104KBX | S.M. CAP | 50V | 270pF | |
| C3102 | ECUV1H104KBX | S.M. CAP | 50V | 270pF | |
| C3103 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3104 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3105 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3106 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | |
| C3107 | ECA1HM470GB | ELECT | 50V | 47μF | |
| C3108 | ECA1HM470GB | ELECT | 50V | 47μF | |
| C3111 | ECUV1H391JCX | S.M. CAP | 50V | 390pF | |
| C3112 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |

| Cct Ref | Parts Number | Description | | | |
|---------------------------------------|--------------|----------------------|-------|-------|---------|
| C3401 | ECQM1H224J | FILM | 50V | 220nF | |
| C3402 | ECUV1H101JCX | S.M. CAP | 50V | 100pF | |
| C3403 | ECA1HM101GB | ELECT | 50V | 100µF | |
| C3404 | ECQM1H224J | FILM | 50V | 220nF | |
| C3405 | ECUV1H180JCX | S.M. CAP | 50V | 18pF | |
| C3406 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C3407 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | |
| C3408 | ECA1HM101GB | ELECT | 50V | 100µF | |
| C3601 | ECA1HM101GB | ELECT | 50V | 100µF | |
| JSE28 | ECUV1H104KBX | S.M. CAP | 50V | 100µF | |
| TERMINALS AND LINKS | | | | | |
| JK2301 | JPJ841101320 | RCA / HEADPHONE JACK | | | |
| JK3101 | TJB16673 | A.V. TERMINAL | | | |
| SWITCHES | | | | | |
| S801 | ESB92S11B | SWITCH | | | ▲ |
| S1201 | EVQ23405R | SWITCH | | | |
| S1202 | EVQ23405R | SWITCH | | | |
| S1203 | EVQ23405R | SWITCH | | | |
| S1204 | EVQ23405R | SWITCH | | | |
| S1205 | EVQ23405R | SWITCH | | | |
| DIFFERENCES FOR MODEL TX-21MD4 | | | | | |
| MECHANICAL PARTS | | | | | |
| 9 | TKU8E00370 | BACK COVER | | | ▲ |
| 10 | A51ECQ51X01 | C.R.T. | | | ▲ |
| 11 | TKY8E170 | CABINET | | | ▲ |
| 12 | VP15005-35 | CRT FIXING SCREW | | | |
| 13 | TLK8E05143 | DEGAUSS COIL | | | |
| 14 | TNP8EE009AD | E P.C.B. | | | ▲ |
| 15 | TQF8E2594 | MODEL LABEL | | | ▲ |
| 16 | TBM153022 | PANASONIC BADGE | | | |
| 17 | TBX8E041-1 | POWER BUTTON | | | |
| 18 | TNP8EY013AB | Y P.C.B. | | | ▲ |
| MISCELLANEOUS COMPONENTS | | | | | |
| | TPC8E4669 | OUTER CARTON | | | |
| | TPD8E606-1 | TOP CUSHION | | | |
| | TPD8E607-1 | BOTTOM CUSHION | | | |
| | ZTUZAE450A | ANODE LEAD | | | ▲ |
| I.C.s | | | | | |
| IC850 | SE130N | ERROR AMPLIFIER | | | |
| IC1103 | XGL2-01DA | EAROM * | | | |
| TRANSFORMERS | | | | | |
| T801 | ETS39AG1K7AD | TRANSFORMER | | | ▲ |
| COILS | | | | | |
| L552 | ELH5L4104 | COIL | | | |
| RESISTORS | | | | | |
| JA2 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 □ |
| JA1 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 □ |
| R363 | ERDS1TJ103 | CARBON | 0.5W | 5% | 10K □ |
| R364 | ERDS1TJ103 | CARBON | 0.5W | 5% | 10K □ |
| R365 | ERDS1TJ103 | CARBON | 0.5W | 5% | 10K □ |
| R370 | ERD25TJ102 | CARBON | 0.25W | 5% | 1K □ |
| R377 | ERQ1ABJP5R6S | METAL | 0.5W | 5% | 5R6 □ ▲ |
| R461 | ERW2PK2R2 | WOUND | 2W | 10% | 2R2 □ ▲ |
| R702 | ERQ12HJ220 | METAL | 0.5W | 5% | 22 □ ▲ |
| CAPACITORS | | | | | |
| C365 | ECA1CM100GB | ELECT | 16V | 10µF | |
| C551 | ECKC3D561J | CERAMIC | | 10µF | ▲ |
| C555 | ECWH15H822J | FILM | 1500V | 8.2nF | |
| C556 | ECQF4123JZH | FILM | 400V | 12nF | ▲ |
| C559 | ECWF2474JBB | FILM | 500V | 470nF | ▲ |
| C811 | ECOS2GA151CB | ELECT | 400V | 150pF | |

| Cct Ref | Parts Number | Description | | | | | | |
|---------------------------------------|--------------|------------------|-------|-----|-------|--|--|---|
| DIFFERENCES FOR MODEL TX-25MD4 | | | | | | | | |
| MECHANICAL PARTS | | | | | | | | |
| 9 | TKU8E00360 | BACK COVER | | | | | | ▲ |
| 10 | A59ECF50X41 | C.R.T. | | | | | | ▲ |
| 11 | TKY8E180 | CABINET | | | | | | ▲ |
| 12 | VP17005-32 | CRT FIXING SCREW | | | | | | |
| 13 | TLK8E05138 | DEGAUSS COIL | | | | | | ▲ |
| 14 | TNP8EE009AL | E P.C.B. | | | | | | ▲ |
| 15 | TQF8E2595 | MODEL LABEL | | | | | | ▲ |
| 16 | TBM8E1728 | PANASONIC BADGE | | | | | | |
| 17 | TBX8E042-1 | POWER BUTTON | | | | | | |
| 18 | TNP8EY012AD | Y P.C.B. | | | | | | ▲ |
| MISCELLANEOUS COMPONENTS | | | | | | | | |
| | TPC8E4670 | OUTER CARTON | | | | | | |
| | TPD8E608-1 | TOP CUSHION | | | | | | |
| | TPD8E609 | BOTTOM CUSHION | | | | | | |
| | ZTUZAE550A | ANODE LEAD | | | | | | ▲ |
| I.C.s | | | | | | | | |
| IC850 | SE140N | ERROR AMPLIFIER | | | | | | |
| IC1103 | XGL2-02EA | EAROM * | | | | | | |
| DIODES | | | | | | | | |
| D901 | MA165TA5 | DIODE | | | | | | |
| D902 | MA165TA5 | DIODE | | | | | | |
| D904 | MA165TA5 | DIODE | | | | | | |
| D905 | MA165TA5 | DIODE | | | | | | |
| D906 | RLS72TE-11 | DIODE | | | | | | |
| TRANSISTORS | | | | | | | | |
| Q905 | BC847B | TRANSISTOR | | | | | | |
| Q906 | BC847B | TRANSISTOR | | | | | | |
| Q907 | BC857B | TRANSISTOR | | | | | | |
| Q908 | 2SA1535ARLB | TRANSISTOR | | | | | | |
| Q909 | 2SC3944ARLB | TRANSISTOR | | | | | | |
| TRANSFORMERS | | | | | | | | |
| T801 | ETS39AG1J7AD | TRANSFORMER | | | | | | |
| COILS | | | | | | | | |
| L552 | ELH5L4105 | COIL | | | | | | |
| L554 | ELC18B102L | COIL | | | | | | |
| L901 | EXCELSA24T | COIL | | | | | | |
| L902 | EXCELSA24T | COIL | | | | | | |
| RESISTORS | | | | | | | | |
| JA3 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 □ | | | |
| JA2 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 □ | | | |
| JA1 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 □ | | | |
| R363 | ERD25TJ103 | CARBON | 0.25W | 5% | 10K □ | | | |
| R364 | ERD25TJ103 | CARBON | 0.25W | 5% | 10K □ | | | |
| R365 | ERD25TJ103 | CARBON | 0.25W | 5% | 10K □ | | | |
| R370 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K □ | | | |
| R377 | ERQ1ABJP5R1 | METAL | 0.5W | 5% | 5R1 □ | | | ▲ |
| R461 | ERW2PK1R2 | WOUND | 2W | 10% | 1R2 □ | | | ▲ |
| R702 | ERQ12HJ8R2 | FUSIBLE | 0.5W | 5% | 8R2 □ | | | ▲ |
| R913 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K □ | | | |
| R914 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 □ | | | |
| R915 | ERJ6GEYJ152 | S.M.CARB | 0.1W | 5% | 1K5 □ | | | |
| R916 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 □ | | | |
| R919 | ERQ14AJW390 | FUSIBLE | 0.25W | 5% | 39 □ | | | ▲ |
| R920 | ERQ14AJW390 | FUSIBLE | 0.25W | 5% | 39 □ | | | ▲ |
| R921 | ERD25TJ471 | CARBON | 0.25W | 5% | 470 □ | | | |
| R922 | ERD25TJ393 | CARBON | 0.25W | 5% | 39K □ | | | |
| R923 | ERD25TJ393 | CARBON | 0.25W | 5% | 39K □ | | | |
| R924 | ERDS1FJ390 | CARBON | 0.5W | 5% | 39 □ | | | ▲ |
| R925 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 □ | | | |

| Cct Ref | Parts Number | Description | | | | |
|---------------------------------------|--------------|------------------|-------|----|-------|-----|
| R926 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | ☐ |
| R927 | ERD25TJ471 | CARBON | 0.25W | 5% | 470 | ☐ |
| R928 | ERD25TJ5R6 | CARBON | 0.25W | 5% | 5R6 | ☐ |
| R929 | ERDS1FJ471 | CARBON | 0.5W | 5% | 470 | ☐ ▲ |
| R930 | ERD25TJ5R6 | CARBON | 0.25W | 5% | 5R6 | ☐ |
| R931 | ERDS1FJ390 | CARBON | 0.5W | 5% | 39 | ☐ ▲ |
| R935 | ERQ14AJW3R9 | FUSIBLE | 0.25W | 5% | 3R9 | ☐ ▲ |
| R936 | ERQ1CJP331 | FUSIBLE | 1W | 5% | 330 | ☐ ▲ |
| CAPACITORS | | | | | | |
| C366 | ECA1CM100GB | ELECT | 16V | | 10μF | |
| C551 | ECKC3D152J | CERAMIC | 2KV | | 1.5nF | ▲ |
| C554 | ECWF2H514J | FILM | 500V | | 1.5nF | ▲ |
| C555 | ECWH15H103J | FILM | 1500V | | 10nF | |
| C556 | ECQM4333JC | FILM | 400V | | 33nF | |
| C559 | ECWF2H684J | FILM | 500V | | 33nF | ▲ |
| C811 | ECOS2GG181NG | ELECT | 400V | | 180μF | ▲ |
| C902 | ECA1VM101GB | ELECT | 35V | | 100μF | |
| C903 | ECUV1H472KBX | S.M. CAP | 50V | | 4.7nF | |
| C904 | ECUV1H472KBX | S.M. CAP | 50V | | 4.7nF | |
| C906 | ECUV1H471KBX | S.M. CAP | 50V | | 470pF | |
| C908 | ECUV1H151JCX | S.M. CAP | 50V | | 150pF | |
| C909 | ECKC2H472J | CERAMIC | 500V | | 4.7nF | ▲ |
| C910 | ECKC2H472J | CERAMIC | 500V | | 4.7nF | ▲ |
| C911 | ECUV1H151JCX | S.M. CAP | 50V | | 150pF | |
| C912 | ECEA2CU100 | ELECT | 160V | | 10μF | |
| C913 | ECA1HM101GB | ELECT | 50V | | 100μF | |
| C914 | ECA1HM101GB | ELECT | 50V | | 100μF | |
| C916 | ECEA2CGE100 | ELECT | 160V | | 10μF | |
| DIFFERENCES FOR MODEL TX-28MD4 | | | | | | |
| MECHANICAL PARTS | | | | | | |
| 9 | TKU8E00350 | BACK COVER | | | | ▲ |
| 10 | A66ECF50X41 | C.R.T. | | | | ▲ |
| 11 | TKY8E190 | CABINET | | | | ▲ |
| 12 | VP17005-32 | CRT FIXING SCREW | | | | ▲ |
| 13 | TLK8E05140 | DEGAUSS COIL | | | | ▲ |
| 14 | TNP8EE009AC | E P.C.B. | | | | ▲ |
| 15 | TQF8E2596 | MODEL LABEL | | | | ▲ |
| 16 | TBM173052 | PANASONIC BADGE | | | | ▲ |
| 17 | TBX8E041-1 | POWER BUTTON | | | | ▲ |
| 18 | TNP8EY012AC | Y P.C.B. | | | | ▲ |
| MISCELLANEOUS COMPONENTS | | | | | | |
| | TPC8E4671 | OUTER CARTON | | | | |
| | TPD8E639 | TOP CUSHION | | | | |
| | TPD8E640 | BOTTOM CUSHION | | | | |
| | ZTUZAE550A | ANODE LEAD | | | | ▲ |
| I.C.s | | | | | | |
| IC850 | SE140N | ERROR AMPLIFER | | | | |
| IC1103 | XGL2-02FA | EAROM * | | | | |
| DIODES | | | | | | |
| D901 | MA165TA5 | DIODE | | | | |
| D902 | MA165TA5 | DIODE | | | | |
| D904 | MA165TA5 | DIODE | | | | |
| D905 | MA165TA5 | DIODE | | | | |
| D906 | RLS72TE-11 | DIODE | | | | |
| TRANSISTORS | | | | | | |
| Q905 | BC847B | TRANSISTOR | | | | |
| Q906 | BC847B | TRANSISTOR | | | | |
| Q907 | BC857B | TRANSISTOR | | | | |
| Q908 | 2SA1535ARLB | TRANSISTOR | | | | |
| Q909 | 2SC3944ARLB | TRANSISTOR | | | | |


| Cct Ref | Parts Number | Description | | | | |
|---------------------|--------------|-------------|-------|-----|-------|-----|
| TRANSFORMERS | | | | | | |
| T801 | ETS39AG1J7AD | TRANSFORMER | | | | |
| COILS | | | | | | |
| L552 | ELH5L4105 | COIL | | | | |
| L554 | ELC18B102L | COIL | | | | |
| L901 | EXCELSA24T | COIL | | | | |
| L902 | EXCELSA24T | COIL | | | | |
| RESISTORS | | | | | | |
| JA3 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | ☐ |
| JA2 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | ☐ |
| JA1 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | ☐ |
| R363 | ERD25TJ103 | CARBON | 0.25W | 5% | 10K | ☐ |
| R364 | ERD25TJ103 | CARBON | 0.25W | 5% | 10K | ☐ |
| R365 | ERD25TJ103 | CARBON | 0.25W | 5% | 10K | ☐ |
| R370 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K | ☐ |
| R377 | ERQ1ABJP5R1 | METAL | 0.5W | 5% | 5R1 | ☐ ▲ |
| R461 | ERW2PK1R2 | WOUND | 2W | 10% | 1R2 | ☐ ▲ |
| R702 | ERQ12HJ8R2 | FUSIBLE | 0.5W | 5% | 8R2 | ☐ ▲ |
| R913 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K | ☐ |
| R914 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 | ☐ |
| R915 | ERJ6GEYJ152 | S.M.CARB | 0.1W | 5% | 1K5 | ☐ |
| R916 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 | ☐ |
| R919 | ERQ14AJW390 | FUSIBLE | 0.25W | 5% | 39 | ☐ ▲ |
| R920 | ERQ14AJW390 | FUSIBLE | 0.25W | 5% | 39 | ☐ ▲ |
| R921 | ERD25TJ471 | CARBON | 0.25W | 5% | 470 | ☐ |
| R922 | ERD25TJ393 | CARBON | 0.25W | 5% | 39K | ☐ |
| R923 | ERD25TJ393 | CARBON | 0.25W | 5% | 39K | ☐ |
| R924 | ERDS1FJ390 | CARBON | 0.5W | 5% | 39 | ☐ ▲ |
| R925 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | ☐ |
| R926 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 | ☐ |
| R927 | ERD25TJ471 | CARBON | 0.25W | 5% | 470 | ☐ |
| R928 | ERD25TJ5R6 | CARBON | 0.25W | 5% | 5R6 | ☐ |
| R929 | ERDS1FJ471 | CARBON | 0.5W | 5% | 470 | ☐ ▲ |
| R930 | ERD25TJ5R6 | CARBON | 0.25W | 5% | 5R6 | ☐ |
| R931 | ERDS1FJ390 | CARBON | 0.5W | 5% | 39 | ☐ ▲ |
| R935 | ERQ14AJW3R9 | FUSIBLE | 0.25W | 5% | 3R9 | ☐ ▲ |
| R936 | ERQ1CJP331 | FUSIBLE | 1W | 5% | 330 | ☐ ▲ |
| CAPACITORS | | | | | | |
| C366 | ECA1CM100GB | ELECT | 16V | | 10μF | |
| C551 | ECKC3D122J | CERAMIC | 2KV | | 1.2nF | ▲ |
| C554 | ECWF2H514J | FILM | 500V | | 1.2nF | ▲ |
| C555 | ECWH15H103J | FILM | 1500V | | 10nF | |
| C556 | ECQM4333JC | FILM | 400V | | 33nF | |
| C559 | ECWF2H684J | FILM | 500V | | 33nF | ▲ |
| C811 | ECOS2GG181NG | ELECT | 400V | | 180μF | ▲ |
| C902 | ECA1VM101GB | ELECT | 35V | | 100μF | |
| C903 | ECUV1H472KBX | S.M. CAP | 50V | | 4.7nF | |
| C904 | ECUV1H472KBX | S.M. CAP | 50V | | 4.7nF | |
| C906 | ECUV1H471KBX | S.M. CAP | 50V | | 470pF | |
| C908 | ECUV1H151JCX | S.M. CAP | 50V | | 150pF | |
| C909 | ECKC2H472J | CERAMIC | 500V | | 4.7nF | ▲ |
| C910 | ECKC2H472J | CERAMIC | 500V | | 4.7nF | ▲ |
| C911 | ECUV1H151JCX | S.M. CAP | 50V | | 150pF | |
| C912 | ECEA2CU100 | ELECT | 160V | | 10μF | |
| C913 | ECA1HM101GB | ELECT | 50V | | 100μF | |
| C914 | ECA1HM101GB | ELECT | 50V | | 100μF | |
| C916 | ECEA2CGE100 | ELECT | 160V | | 10μF | |

SCHEMATIC DIAGRAMS FOR MODELS

TX-28MD4 / TX-25MD4 / TX-21MD4

(EURO-4 CHASSIS)

IMPORTANT SAFETY NOTICE


Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturers' specified parts.



NOTE

1. RESISTOR
All resistors are carbon ¼W resistor, unless marked otherwise.
Unit of resistance is OHM (Ω) (k=1,000, M=1,000,000)



2. CAPACITORS
All capacitors are ceramic 50V unless marked otherwise.
Unit of capacitance is μ F unless otherwise stated.

3. COIL
Unit of inductance is μ H, unless otherwise stated.

4. TEST POINT
 Test Point Position

5. EARTH SYMBOL
 Chassis Earth (Cold)
 Line Earth (Hot)

6. VOLTAGE MEASUREMENT
Voltage is measured by a DC voltmeter.
Measurement conditions are as follows:
Power source AC 220V-240V, 50Hz
Receiving Signal Colour Bar signal (RF)
All customer controls Maximum position

7.
 Indicates the Video signal path
 Indicates the Audio signal path


These schematic diagrams are the latest at time of printing and are subject to change without notice.

REMARKS

- a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- b. Do not short circuit the hot and cold circuits as electrical components may be damaged.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.


NOTE

1. The Power Supply Circuit contains a circuit area, which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD.

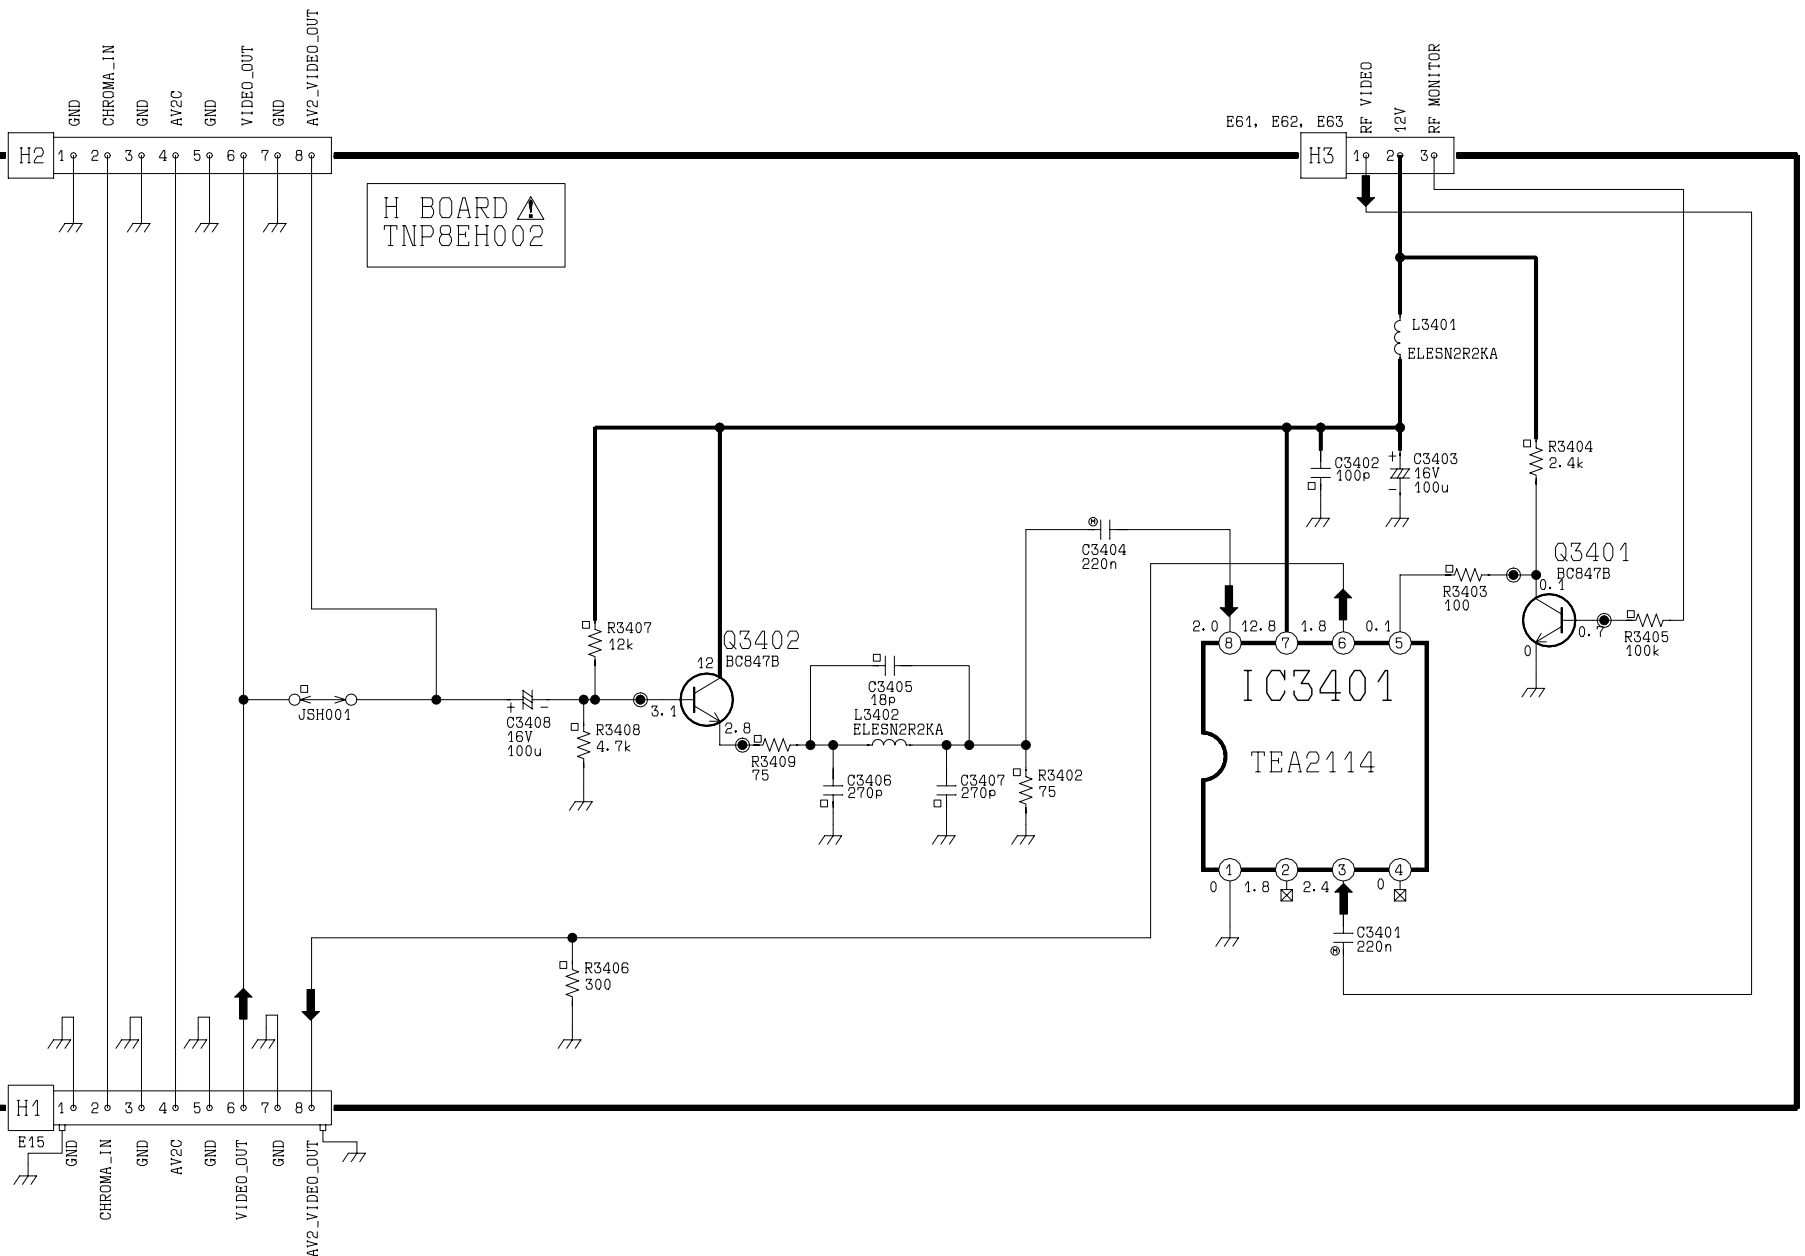

E-BOARD TX-28MD4 / TX-25MD4

E BOARD
TNP8EE009

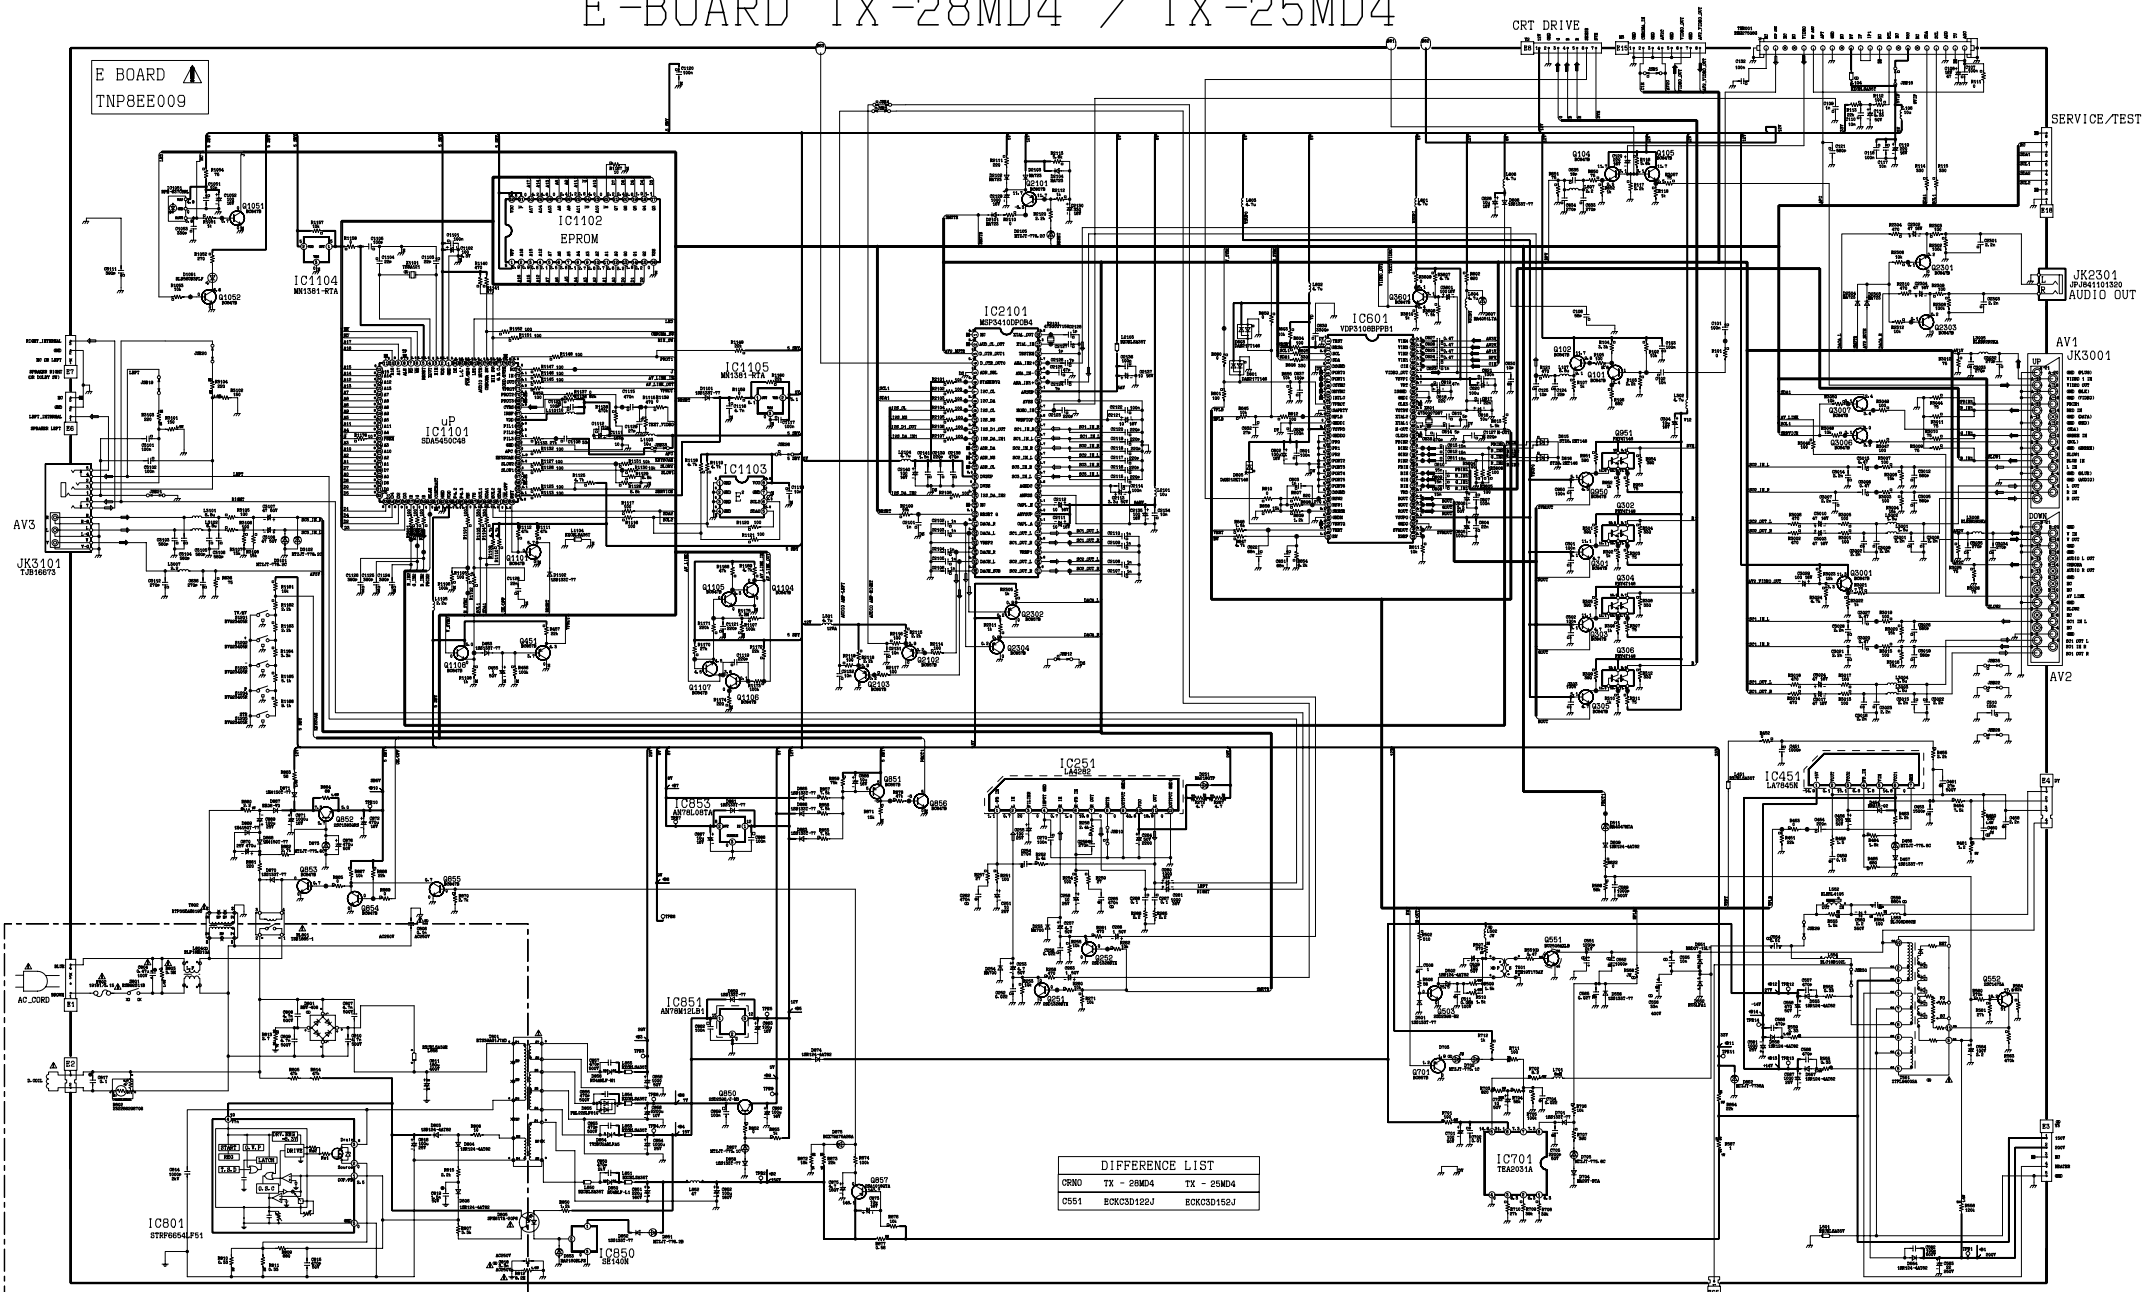


DIFFERENCE LIST


| | | |
|------|------------|------------|
| 0580 | TX - 28MD4 | TX - 25MD4 |
| 0551 | E0KCS0122J | E0KCS0152J |

E-BOARD TX-21MD4

E BOARD
TNP8EE009

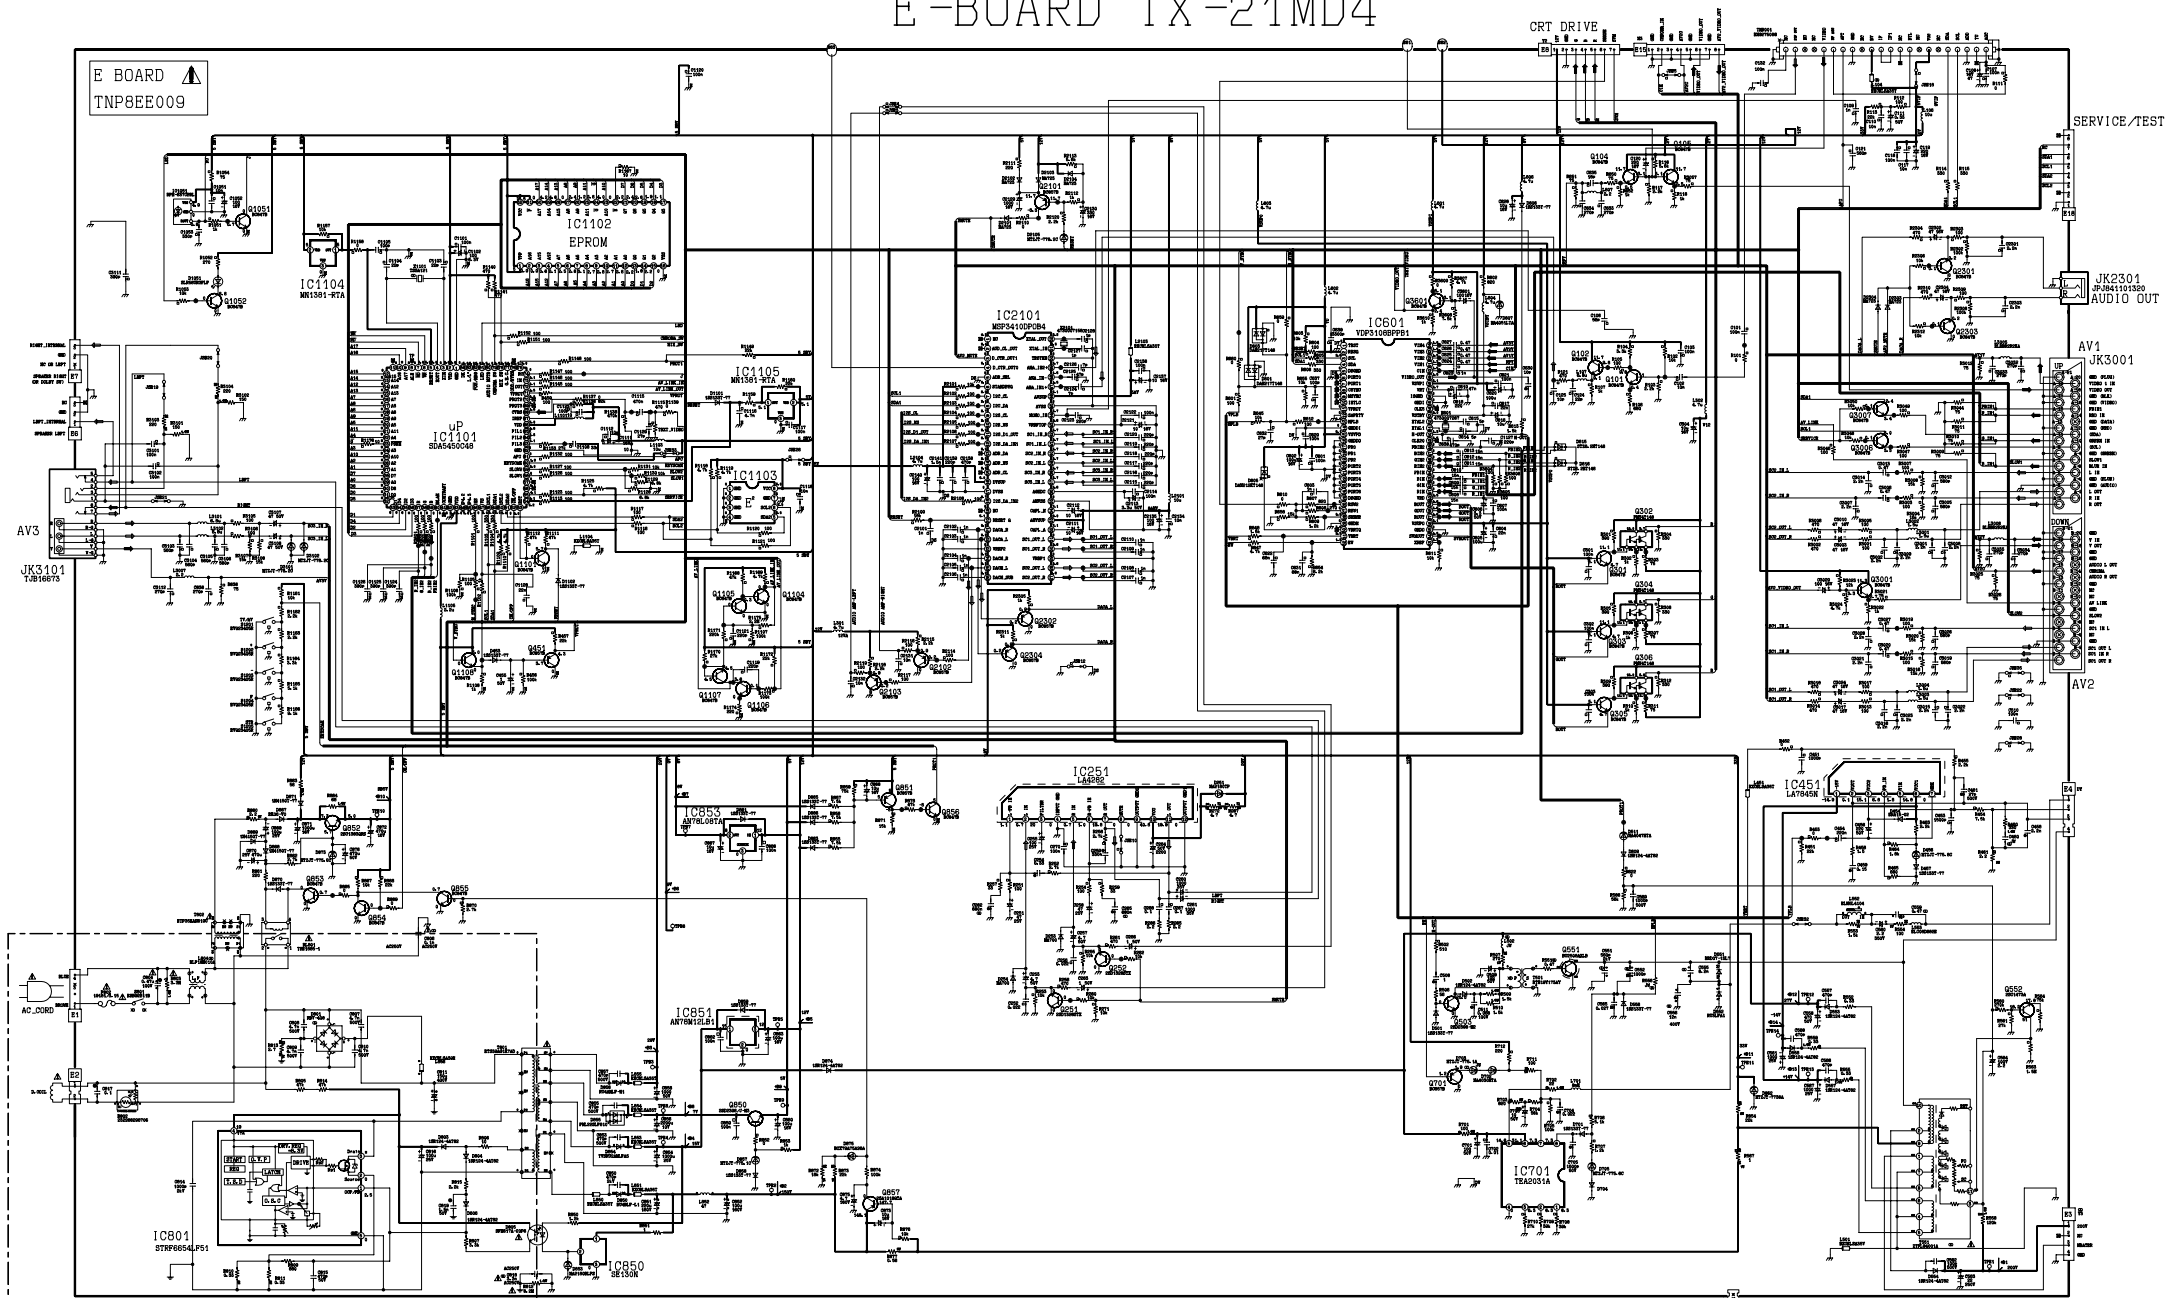


Y-BOARD TX-28MD4 / TX-25MD4

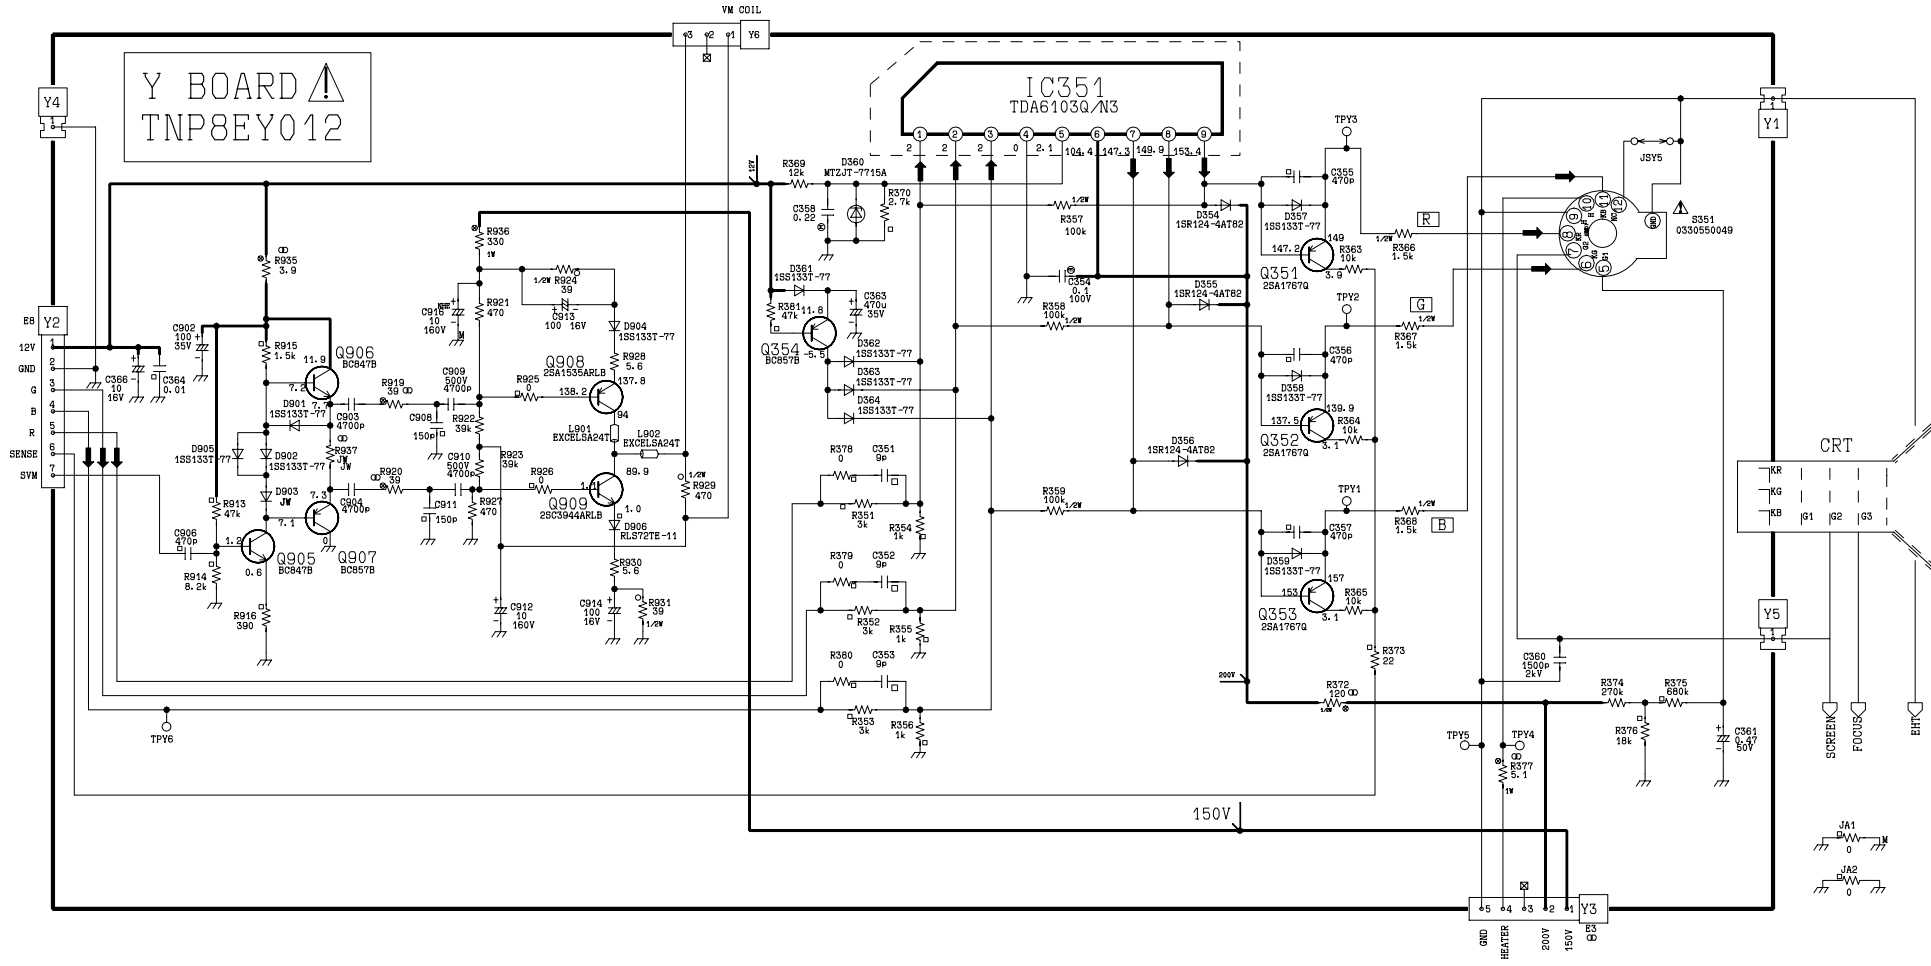

E - BOARD TNP8EE009

| TRAN'S | DIODES | D558 | L4 | | |
|--------|--------|-------|-----|-------------|-----|
| Q3601 | L8 | D3103 | B7 | D557 | M4 |
| Q3007 | M9 | D3101 | B7 | D556 | K1 |
| Q3001 | N8 | D3102 | B7 | D555 | N3 |
| Q3006 | N10 | D2161 | G9 | D554 | M4 |
| Q2304 | I7 | D2105 | G10 | D553 | K4 |
| Q2303 | M6 | D2104 | F9 | D552 | J2 |
| Q2301 | I7 | D2103 | G10 | D551 | K3 |
| Q2103 | I8 | D2102 | G9 | D511 | M5 |
| Q2102 | H8 | D1103 | F8 | D502 | I2 |
| Q2101 | G10 | D1102 | F7 | D501 | I2 |
| Q1108 | F9 | D1101 | G7 | D457 | L5 |
| Q1107 | C7 | D1051 | A9 | D456 | L5 |
| Q1106 | C7 | D875 | J5 | D454 | L5 |
| Q1105 | C7 | D874 | J4 | D453 | F9 |
| Q1104 | C7 | D873 | B5 | D254 | C5 |
| Q1101 | F7 | D871 | A5 | D253 | C5 |
| Q1052 | A9 | D870 | 871 | D252 | B5 |
| Q1051 | C8 | D869 | B4 | D251 | B4 |
| Q951 | J9 | D868 | B4 | IC'S | |
| Q950 | J9 | D867 | A3 | IC2101 | H8 |
| Q857 | J4 | D866 | I9 | IC1105 | F7 |
| Q856 | F9 | D865 | I9 | IC1104 | C9 |
| Q855 | J5 | D864 | I10 | IC1103 | F8 |
| Q854 | B4 | D863 | G9 | IC1102 | D10 |
| Q853 | B4 | D862 | N10 | IC1101 | D8 |
| Q852 | B5 | D861 | J9 | IC1051 | A10 |
| Q850 | F5 | D860 | I10 | IC852 | I10 |
| Q701 | J5 | D859 | H5 | IC851 | G5 |
| Q552 | N3 | D858 | E5 | IC850 | H4 |
| Q551 | K1 | D857 | E5 | IC801 | G2 |
| Q503 | I2 | D855 | F4 | IC701 | K5 |
| Q451 | F8 | D854 | G4 | IC601 | L7 |
| Q394 | K9 | D853 | H3 | IC451 | L5 |
| Q305 | K9 | D852 | I4 | IC251 | D6 |
| Q303 | K9 | D851 | I4 | TP'S | |
| Q302 | J9 | D850 | H4 | TPE14 | M5 |
| Q301 | K9 | D806 | G2 | TPE13 | M4 |
| Q253 | C4 | D805 | H2 | TPE12 | K4 |
| Q252 | C4 | D804 | H1 | TPE11 | N5 |
| Q252 | C4 | D803 | H1 | TPE10 | B5 |
| Q251 | D4 | D802 | G2 | TPE9 | E5 |
| Q105 | M8 | D801 | E1 | TPE8 | F5 |
| Q104 | M9 | D705 | J5 | TPE7 | I9 |
| Q103 | F10 | D704 | K5 | TPE6 | J10 |
| Q102 | G10 | D703 | K5 | TPE5 | G5 |
| Q101 | H10 | D702 | K5 | TPE4 | G5 |
| | | D701 | K5 | TPE3 | E5 |
| | | D609 | M5 | TPE2 | I5 |
| | | D607 | L9 | TPE1 | M4 |

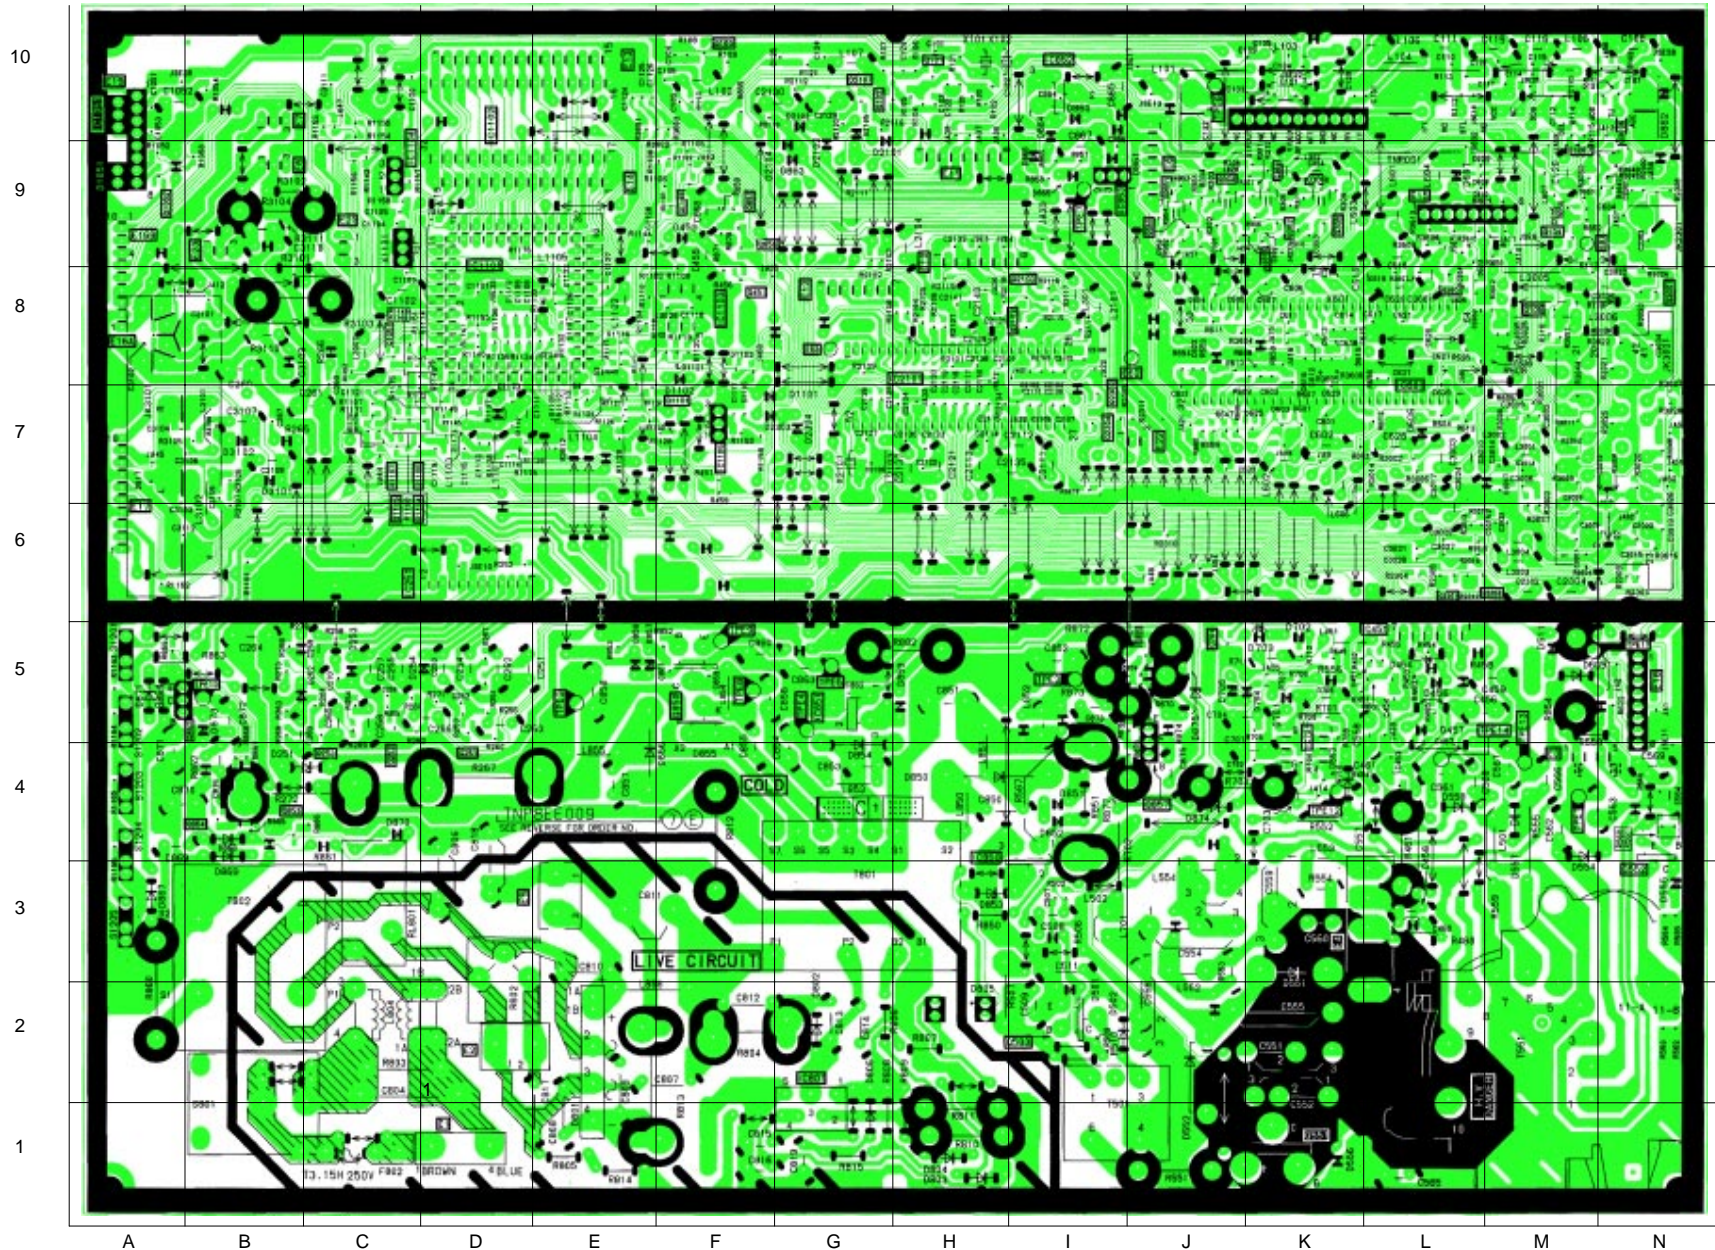

Y - BOARD TNP8EY013

DIODES

| | |
|------|----|
| D354 | G5 |
| D355 | F6 |
| D356 | G5 |
| D357 | G5 |
| D358 | F5 |
| D359 | G5 |
| D360 | C6 |
| D361 | B6 |
| D362 | D7 |
| D363 | D7 |
| D364 | D7 |

TEST POINTS


| | |
|------|----|
| TPY1 | E4 |
| TPY2 | F5 |
| TPY3 | F4 |
| TPY4 | E3 |
| TPY5 | D3 |
| TPY6 | B6 |

TRANSISTORS

| | |
|------|----|
| Q351 | G4 |
| Q352 | F4 |
| Q353 | G4 |
| Q354 | C7 |

I.C.'S

| | |
|-------|----|
| IC351 | E6 |
|-------|----|

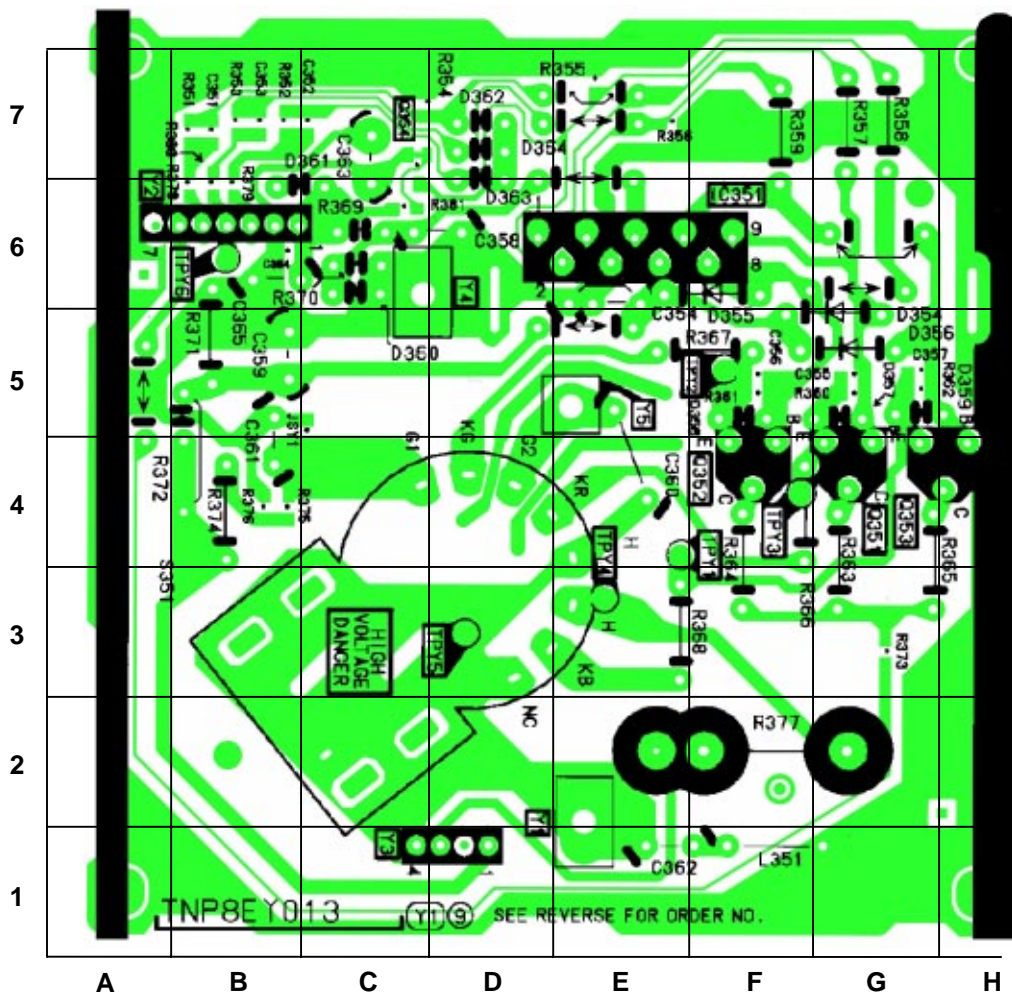

Service Manual



SUPPLEMENT 1

Colour Television

TX-28MD4


TX-25MD4

TX-21MD4

Additional information for Self-Check feature

(Information in brackets {} refers to the TX-21MD4)

FACTORY SETTINGS

To return customer settings to factory settings and clear owner ID of all information input by the customer, enter Self-Check mode. Press the down (-/v) button on the customer controls at the front of the TV set, at the same time pressing the **STATUS**  button on the remote control. To exit Self Check, switch off the TV set at the power button.

NOTE: Self Check should only be used when refurbishing the TV set and not during normal repair work.

| | | | |
|----------|------|------|------------------|
| VDP | O.K. | PCB | O.K. |
| TUN | O.K. | Cab | O.K. |
| E2 | O.K. | Sum | Factory use only |
| MSP | O.K. | | |
| DPL | -- | | |
| OPTION 1 | 3D | {3C} | |
| OPTION 2 | 0C | {0E} | |
| OPTION 3 | 1D | {1D} | |
| OPTION 4 | 00 | {00} | |
| OPTION 5 | EF | {EF} | |
| OPTION 6 | 23 | {23} | |

Self Check is also used to automatically check the bus lines and hexadecimal code of the TV set. If the CCU ports have been checked and found to be incorrect or not located then "--" will appear in place of "O.K.". For more in-depth TV diagnostics use the **LUCI** interface as listed below.

Service Aids

To aid in the service of our current chassis there are a number of Service Aids which have been made available.

- **LUCI** interface kit (**L**inked **U**tility **C**omputer **I**nterface)
Part number: TZS6EZ002
This contains interface and cables for connecting TV service connector and a PC as well as diagnostic software. As new models are introduced upgrade software will become available.
- **VICI** (**V**isual **I**nteractive **C**omputer **I**nformation)
These C.D.'s contain multimedia documentation providing quick access to service information.
Part No. TZS7EZ006 & TZS7EZ005
 1. Service Manuals
 2. Instruction Books
 3. Technical Information
- **TASMIN** (**T**echnically **A**dvanced **S**ystem for **M**ultimedia **I**nteractive **N**otes)
As well as providing a first step towards more interactive training this product also achieves quick access to Technical Information.