

# TX-28/25/21MD4P Service Manual

Safety

Specifications

Parts List

Service Information

Adjustments

Self Check

Service Hints

Mechanical View

Disassembly

Location of Controls

Waveforms

Block Diagrams

Schematic Diagrams

PCB Views

## Service Support

Service and repair of this product is supported by Panasonic's LUCI interface.

This interface provides a link between the TV and a standard PC to allow a number of diagnostic and control functions to be performed.

For more details contact your local Panasonic company.



BACK

EXIT

Audio

Control

Power supply

Video

BACK

E - PCB

Y - PCBs

BACK

E - Schematics

H - Schematic

Y - Schematics

BACK

# Service Manual



**Colour Television**

**TX-28MD4P**

**TX-25MD4P**

**TX-21MD4P**

**EURO4 Chassis**

## SPECIFICATIONS

(Information in brackets { } refers to model TX-25MD4P)  
(Information in brackets [ ] refers to model TX-21MD4P)

**Power Source:** 220-240V AC, 50Hz

**Power Consumption:** 130W [115W]

**Aerial Impedance:** 75Ω unbalanced, Coaxial Type

**Stand-by Power Consumption:** 1,8W

**Receiving System:** PAL B/G, H, D/K, PAL-525/60  
SECAM B/G, D/K  
M.NTSC  
NTSC (AV only)

**Receiving Channels:**  
VHF E2-E12 VHF H1-H2 (ITALY)  
VHF A-H (ITALY) VHF R1-R2  
VHF R3-R5 VHF R6-R12  
UHF E21-E69 CATV (S01-S05)  
CATV S1-S10 (M1-M10) CATV S11-S20 (U1-U10)  
CATV S21-S41 (HYPERBAND)

### Intermediate Frequency:

|                    |  |
|--------------------|--|
| <b>Video/Audio</b> |  |
| Video              | 38,9MHz  |
| Audio              | 33,4MHz, 33,16MHz  |
| Colour             | 32,4MHz, 33,05MHz, 32,66MHz<br>34,47MHz (PAL)<br>34,5MHz, 34,65MHz (SECAM) |

### Terminals:

|                   |                |                |
|-------------------|----------------|----------------|
| AUDIO MONITOR OUT | Audio (RCAx2)  | 500mV rms 1kΩ  |
| AV1 IN            | Video (21 pin) | 1V p-p 75Ω     |
|                   | Audio (21 pin) | 500mV rms 10kΩ |
|                   | RGB (21 pin)   |                |
| AV1 OUT           | Video (21 pin) | 1V p-p 75Ω     |
|                   | Audio (21 pin) | 500mV rms 1kΩ  |

|        |                     |                                 |
|--------|---------------------|---------------------------------|
| AV2 IN | Video (21 pin)      | 1V p-p 75Ω                      |
|        | Audio (21 pin)      | 500mV rms 10kΩ                  |
|        | S-Video IN (21-pin) | Y: 1V p-p 75Ω<br>C:0.3V p-p 75Ω |

|         |                            |                |
|---------|----------------------------|----------------|
| AV2 OUT | Video (21 pin)             | 1Vp-p 75Ω      |
|         | Audio (21 pin)             | 500mV rms 1kΩ  |
|         | Selectable output (21 pin) |                |
| AV3 IN  | Audio (RCAx2)              | 500mV rms 10kΩ |
|         | Video (RCAx1)              | 1V p-p 75Ω     |

**High Voltage:** 28,5kV ±1kV  
[28kV ±1kV]

**Picture Tube:** A66ECF50X41 66cm  
{A59ECF50X41 59cm}  
[A51ECQ51X01 51cm]

**Audio Output:** 2 x 15W (Music Power)

8Ω Impedance

Headphones: 8Ω Impedance

3,5 mm

**Accessories supplied :** Remote Control  
2 x R6 (UM3) Batteries

### Dimensions:

|         |        |          |          |
|---------|--------|----------|----------|
| Height: | 580 mm | {531 mm} | [478 mm] |
| Width:  | 666 mm | {601 mm} | [525 mm] |
| Depth:  | 472 mm | {439 mm} | [480 mm] |

**Net weight:** 31kg {25kg} [22kg]

Specifications are subject to change without notice.  
Weights and dimensions shown are approximate.

**NOTE:** This Service Manual should be used in conjunction with the EURO4 Technical guide.

**Panasonic**

# CONTENTS

|   |    |
|---|----|
| SAFETY PRECAUTIONS.....                   | 2  |
| SERVICE HINTS.....                        | 3  |
| ADJUSTMENT PROCEDURE.....                 | 4  |
| ADJUSTMENT PROCEDURE AND SELF-CHECK ..... | 5  |
| WAVEFORM PATTERN TABLE .....              | 6  |
| ALIGNMENT SETTINGS.....                   | 7  |
| BLOCK DIAGRAMS .....                      | 8  |
| PARTS LOCATION .....                      | 12 |
| REPLACEMENT PARTS LIST .....              | 13 |
| SCHEMATIC DIAGRAMS .....                  | 23 |
| CONDUCTOR VIEWS.....                      | 28 |

## SAFETY PRECAUTIONS

### GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the AC supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts that have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the AC outlet.
5. Potentials as high as 29,5kV {29,2kV} [29kV] are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazard.

### LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis, the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis, the reading must be infinite.

### LEAKAGE CURRENT HOT CHECK

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a  $2k\Omega$  10W resistor in series with an exposed metallic part on the receiver and an earth, such as a water pipe.
3. Use an AC voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed metallic part and check the voltage at each point.
5. Reverse the AC plug at the outlet and repeat each of the above measurements.

6. The potential at any point should not exceed 1,4 Vrms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

### HOT CHECK CIRCUIT

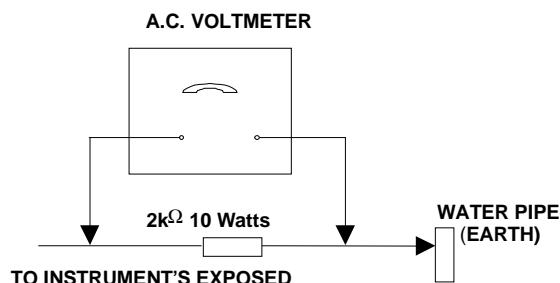


Fig. 1.

### X-RADIATION WARNING

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service, ensure that the jig is capable of handling 29,5kV without causing X-Radiation.

**NOTE:** It is important to use an accurate periodically calibrated high voltage meter.

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate.  
TX-28MD4P    28,5kV  $\pm$  1kV.  
TX-25MD4P    28,2kV  $\pm$  1kV.  
TX-21MD4P    28kV  $\pm$  1kV.  
If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X-Radiation possibility, it is essential to use the specified tube.

## SERVICE HINTS

### How to remove the rear cover

1. Remove the 9 screws as shown in Fig.2.



## LOCATION OF CONTROLS

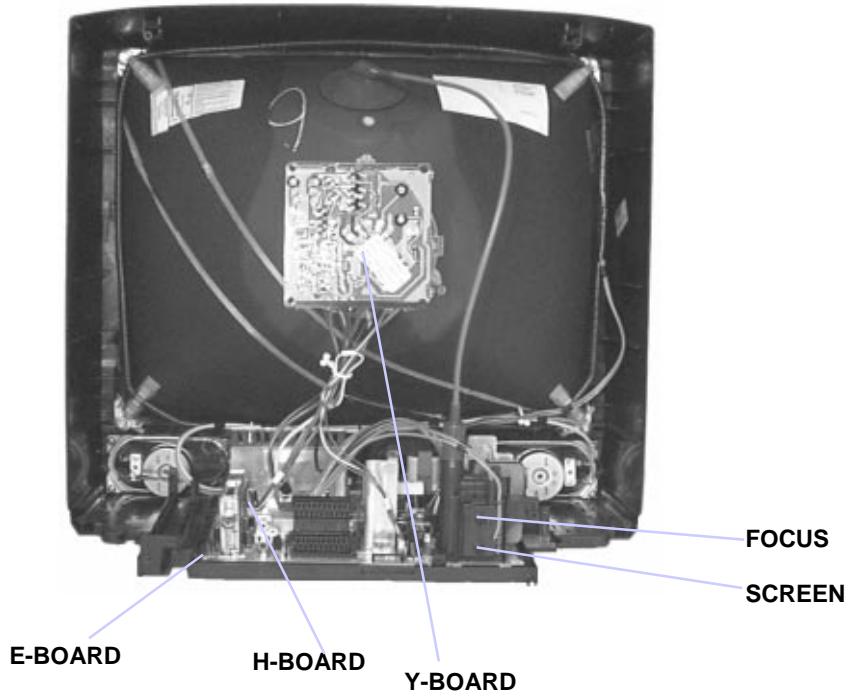


Fig.3.

## ADJUSTMENT PROCEDURE

The remote control is used for entering and storing adjustments, with the exception of Cut-off adjustments, which must always be done prior to service adjustment. Perform adjustments in accordance with screen display. The display on the screen also specifies the software version as well as the approx. setting values. The adjustment sequence for the service mode is indicated below.

1. Set the Bass to maximum position, set the Treble to minimum position, press the F button followed by the volume down button on the customer controls at the front of the TV and at the same time press the "INDEX" button on the remote control, this will place the TV into the Service Mode.
2. Press the **RED / GREEN** buttons to step up / down through the functions.
3. Press the **YELLOW / BLUE** buttons to alter the function values.
4. Press the **STR** button after each adjustment has been made to store the required values.
5. To exit the Service Mode, press the "**N**" button.

**NOTE:** This TV also has the option of using a Memory Pack which enables you to copy the preset TV channels into the Memory Pack and then download them onto this or any other EURO-4 TV set.

### TV to Memory Pack process

1. Plug the memory pack into the AV1 21 pin terminal at the back of the TV and switch the TV on.
2. Go into Service Mode as explained above.  
The screen will show :-

Program  
External>>TV

3. Press the **BLUE** button on the remote control.  
The screen will show :-

Program  
TV>>External

4. Press the **STR** button on the TV.  
The screen will show :-

Please Wait

5. All the tuning information stored inside the TV will now be transferred to the Memory Pack. This process will take 2-3 minutes to complete and when finished the screen will show :-

Complete

### Memory Pack to TV process

1. Plug the memory pack into the AV1 21 pin terminal at the back of the TV and switch the TV on.
2. Go into Service Mode as explained above.  
The screen will show :-

Program  
External>>TV

3. Press the **STR** button on the TV.  
The screen will show :-

Please Wait

4. All the tuning information stored inside the Memory Pack will now be transferred to the TV. This process will take 2-3 minutes to complete and when finished the screen will show :-

Complete

5. The tuning information from the Memory Pack has now been copied into the TV.
6. To exit from the Service Mode press the "**N**" button.
7. The process has now been completed and the Memory Pack can now be removed.

## ERRORS

If an error occurs while using the Memory Pack the TV will detect this and the screen will show :-

Error !!

If this happens then press the "**N**" button and repeat the process that was being used. If the errors continue to occur then check the connectors between the TV and the memory pack and check the 9V battery inside the memory pack.

# ADJUSTMENT PROCEDURE

| Item / Preparation        | Adjustments  |            |           |            |            |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
|---------------------------|--|------------|-----------|------------|------------|------------|-----------|----------|---------|-----------|-----------|------------|-----------|--------|---------|-----------|---------|-----------|----------|--|--|------------|---------|-----------|------------|--|--|-----------|---------|------------|---------|--|--|-----------|-----------|------------|----------|
| <b>+B SET-UP</b>          | <p>1. Receive a Greyscale signal.<br/>2. Set the controls :-</p> <table> <tr> <td>Brightness</td> <td>Minimum</td> <td><b>B9</b></td> <td>5 ± 0,25V</td> <td><b>B10</b></td> <td>5 ± 0,25V</td> </tr> <tr> <td>Contrast</td> <td>Minimum</td> <td><b>B5</b></td> <td>12 ± 0,5V</td> <td><b>B11</b></td> <td>33 ± 1,5V</td> </tr> <tr> <td>Volume</td> <td>Minimum</td> <td><b>B4</b></td> <td>16 ± 1V</td> <td><b>B7</b></td> <td>8 ± 0,5V</td> </tr> <tr> <td></td> <td></td> <td><b>B12</b></td> <td>26 ± 1V</td> <td><b>B8</b></td> <td>5,5 ± 0,5V</td> </tr> <tr> <td></td> <td></td> <td><b>B3</b></td> <td>35 ± 1V</td> <td><b>B13</b></td> <td>15 ± 1V</td> </tr> <tr> <td></td> <td></td> <td><b>B1</b></td> <td>200 ± 10V</td> <td><b>B14</b></td> <td>-15 ± 1V</td> </tr> </table> | Brightness | Minimum   | <b>B9</b>  | 5 ± 0,25V  | <b>B10</b> | 5 ± 0,25V | Contrast | Minimum | <b>B5</b> | 12 ± 0,5V | <b>B11</b> | 33 ± 1,5V | Volume | Minimum | <b>B4</b> | 16 ± 1V | <b>B7</b> | 8 ± 0,5V |  |  | <b>B12</b> | 26 ± 1V | <b>B8</b> | 5,5 ± 0,5V |  |  | <b>B3</b> | 35 ± 1V | <b>B13</b> | 15 ± 1V |  |  | <b>B1</b> | 200 ± 10V | <b>B14</b> | -15 ± 1V |
| Brightness                | Minimum  | <b>B9</b>  | 5 ± 0,25V | <b>B10</b> | 5 ± 0,25V  |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
| Contrast                  | Minimum  | <b>B5</b>  | 12 ± 0,5V | <b>B11</b> | 33 ± 1,5V  |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
| Volume                    | Minimum  | <b>B4</b>  | 16 ± 1V   | <b>B7</b>  | 8 ± 0,5V   |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
|                           |  | <b>B12</b> | 26 ± 1V   | <b>B8</b>  | 5,5 ± 0,5V |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
|                           |  | <b>B3</b>  | 35 ± 1V   | <b>B13</b> | 15 ± 1V    |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
|                           |  | <b>B1</b>  | 200 ± 10V | <b>B14</b> | -15 ± 1V   |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |
| <b>CUT OFF / Ug2 Test</b> | <p>1. Receive a Greyscale signal.<br/>2. Degauss the tube externally.<br/>3. Set the TV into Service Mode 1.<br/>4. Select Cut off mode.</p> <p>To adjust Cutoff connect an oscilloscope to the Blue cathode, adjust "cutoff" value using the "Yellow" and "Blue" buttons until the black level is <math>160V \pm 5V</math> press "STR" to store the value. Remove the oscilloscope.<br/>Select Ug2 adjustment and adjust the screen VR until the display shows "O.K."</p>   |            |           |            |            |            |           |          |         |           |           |            |           |        |         |           |         |           |          |  |  |            |         |           |            |  |  |           |         |            |         |  |  |           |           |            |          |

## SELF CHECK

Self-check is used to automatically check the bus lines and hexadecimal code of the TV set. To get into the Self-Check mode press the down (**-v**) button on the customer controls at the front of the set, at the same time pressing the **STATUS** button on the remote control, and the screen will show :-

|          |         |     |                  |
|----------|---------|-----|------------------|
| VDP      | O.K.    | PCB | O.K.             |
| TUN      | O.K.    | Cab | O.K.             |
| E2       | O.K.    | Sum | Factory use only |
| MSP      | O.K.    |     |                  |
| DPL      | --      |     |                  |
| OPTION 1 | 3D [3D] |     |                  |
| OPTION 2 | 0C [0E] |     |                  |
| OPTION 3 | 1F [1F] |     |                  |
| OPTION 4 | 00 [00] |     |                  |
| OPTION 5 | EF [EF] |     |                  |
| OPTION 6 | 21 [21] |     |                  |

If the CCU ports have been checked and found to be incorrect or not located then " -- " will appear in place of "O.K.".

## Service Aids

To aid in the service of our current chassis there are a number of Service Aids which have been made available.

- **LUCI** interface kit (**Linked Utility Computer Interface**)

Part number: TZS6EZ002

This contains interface and cables for connecting TV service connector and a PC as well as diagnostic software. As new models are introduced upgrade software will become available.

- **VICI** (**Visual Interactive Computer Information**)

These C.D.'s contain multimedia documentation providing quick access to service information.


















Part No. TZS7EZ006 & TZS7EZ005

1. Service Manuals
2. Instruction Books
3. Technical Information

- **TASMIN** (**Technically Advanced System for Multimedia Interactive Notes**)


As well as providing a first step towards more interactive training this product also achieves quick access to Technical Information.

## WAVEFORM PATTERN TABLE

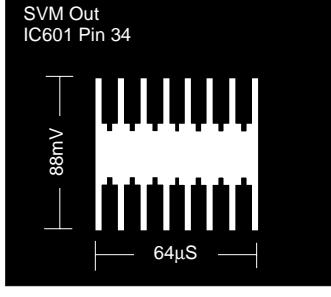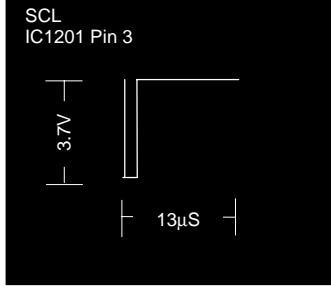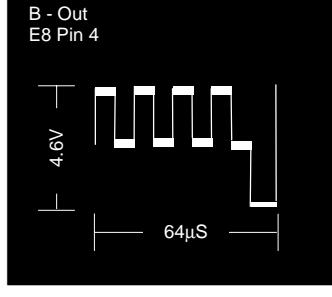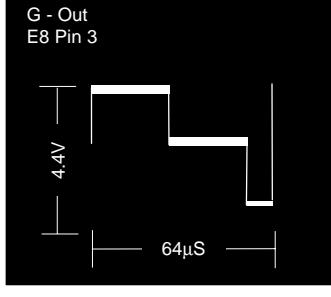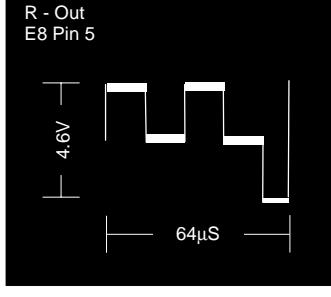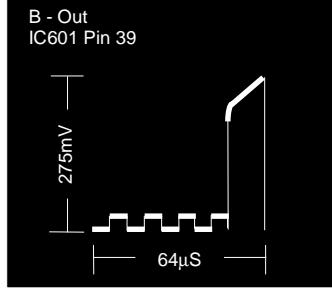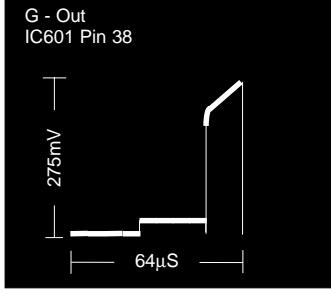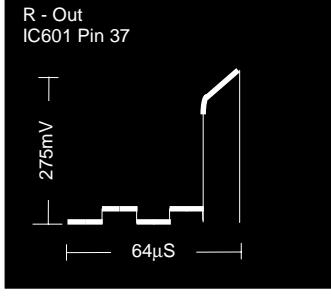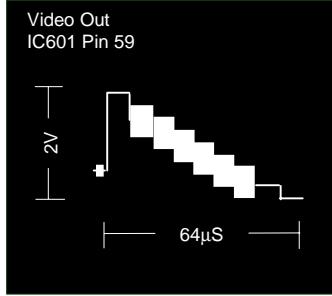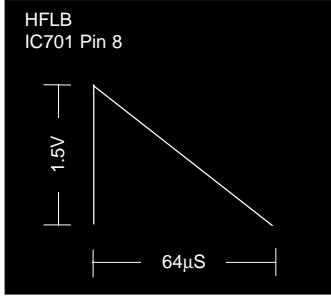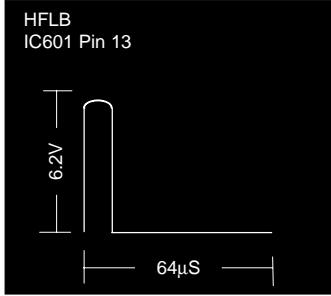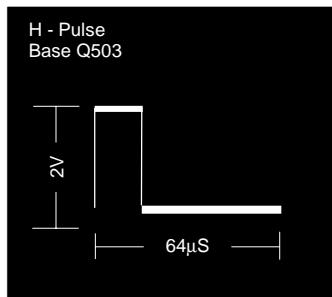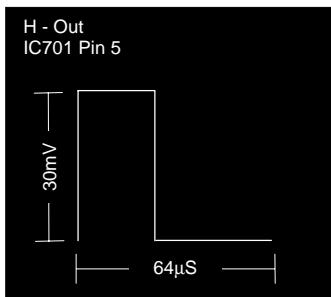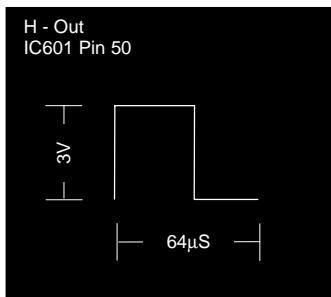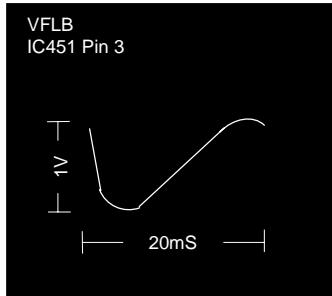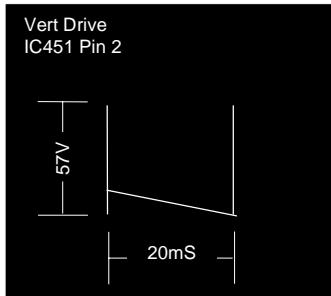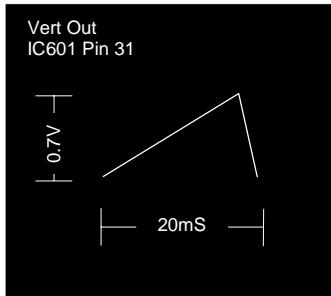


# ALIGNMENT SETTINGS


(The figures below are nominal and used for representative purposes only.)

| Alignment Function    |   | Settings / Special features   |
|-----------------------|---|---|
| Horizontal Position   | H-Pos<br>061                              | Optimum setting.  |
| Vertical Position     | V-Pos<br>005                              | Optimum setting.  |
| Horizontal Amplitude  | H-Amp<br>055                              | Optimum setting.  |
| Vert. Amplitude       | V-Amp<br>054                              | Optimum setting.  |
| EW-amplitude          | E/W-Amp1<br>-128                          | Optimum setting.  |
| EW-amplitude          | E/W-Amp2<br>006                           | Optimum setting.  |
| Trapezium-comp        | Trapez-1<br>047                           | Optimum setting.  |
| Trapezium-comp        | Trapez-2<br>-128                          | Optimum setting.  |
| Vertical Linearity    | V-Lin<br>006                              | Optimum setting.  |
| Vertical Symmetry     | V-Sym<br>002                              | Optimum setting.  |
| DVCO                  | DVCO<br>-005                              | Receive a PAL Colour Bar Pattern. For DVCO alignment press "Blue" button, wait until the colours are changing slowly and press "STR".   |
| Cut-off DC            | Cut-off<br>0171                           | To adjust Cutoff connect an oscilloscope to the blue cathode, adjust "cutoff" value using the "Yellow" and "Blue" buttons until the black level is $160V \pm 5V$ press "STR" to store the value. Remove the oscilloscope. Select Ug2 adjustment and adjust the screen VR until the display shows "O.K." |
| Ug2 Test              | Ug2<br>055<br>O.K.                        |    |
| Highlight<br>Lowlight | High 0902 0777 0864<br>Low 0117 0132 0112 | Optimum setting.  |
| Sub-Brightness        | Sub-Brightness<br>255                     | Optimum setting.  |


## VIDEO BLOCK DIAGRAM

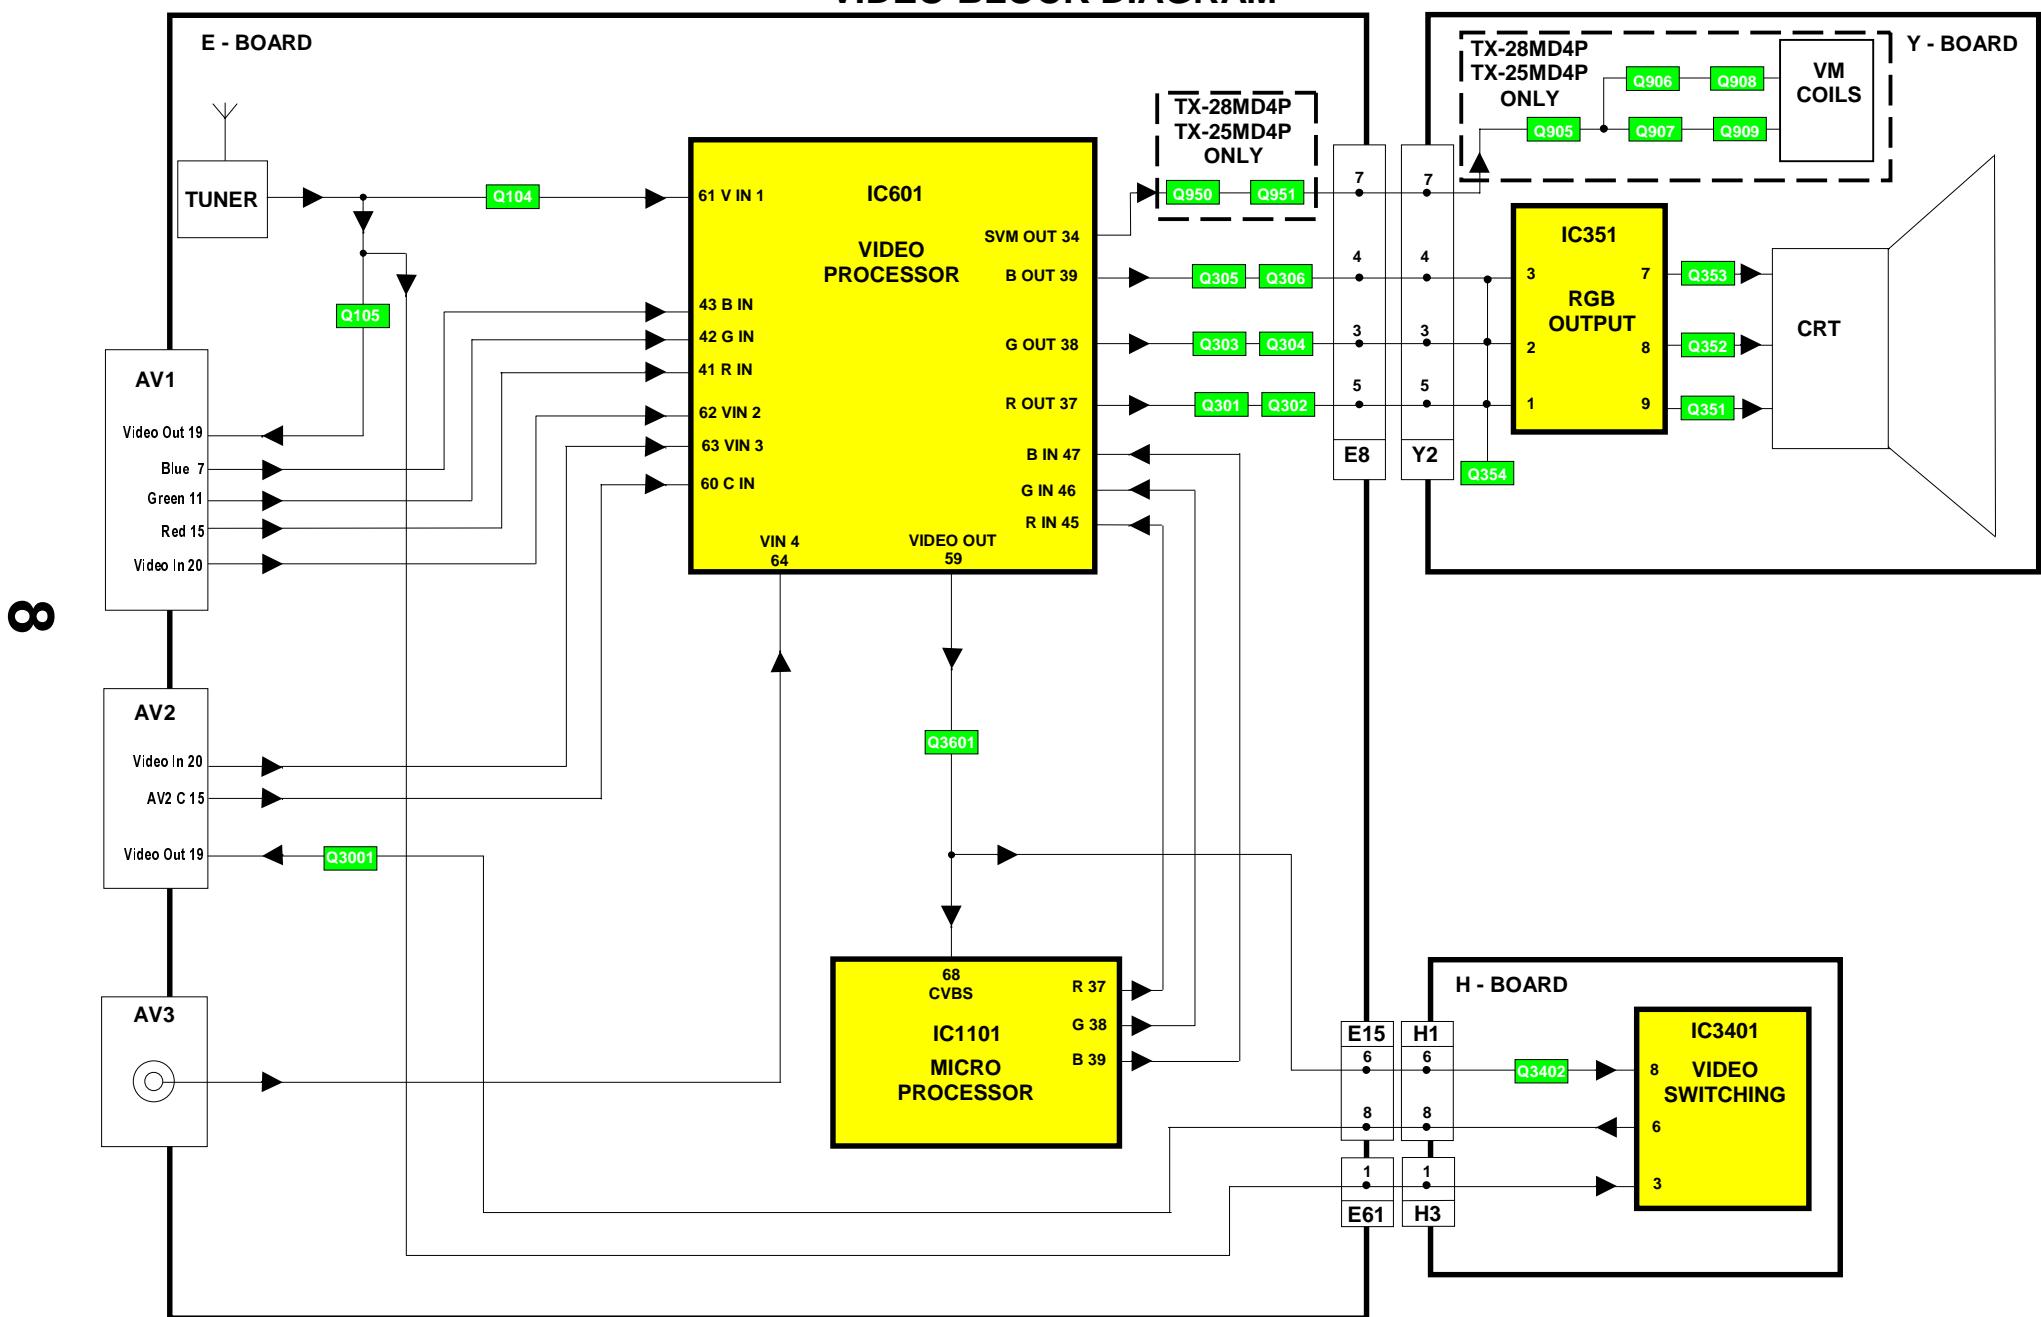


## AUDIO BLOCK DIAGRAM

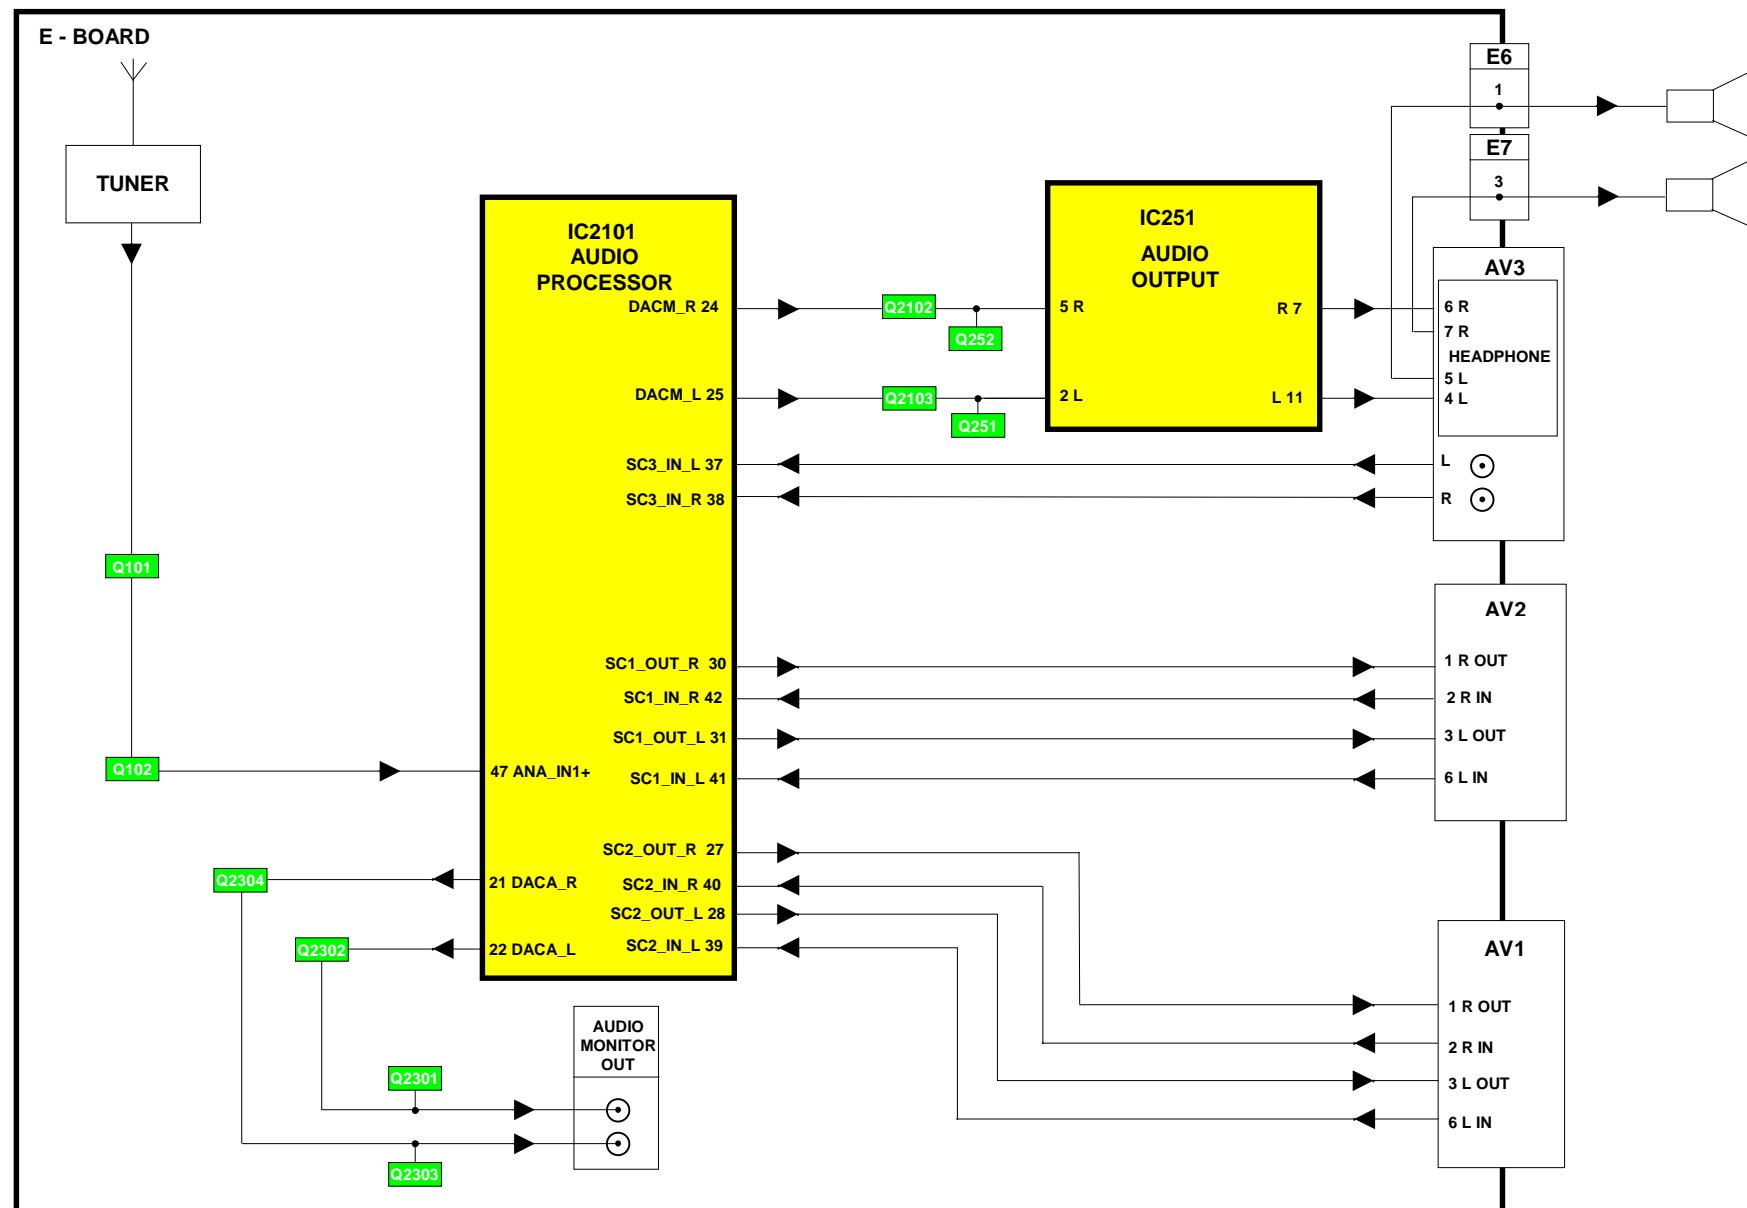

## CONTROL BLOCK DIAGRAM

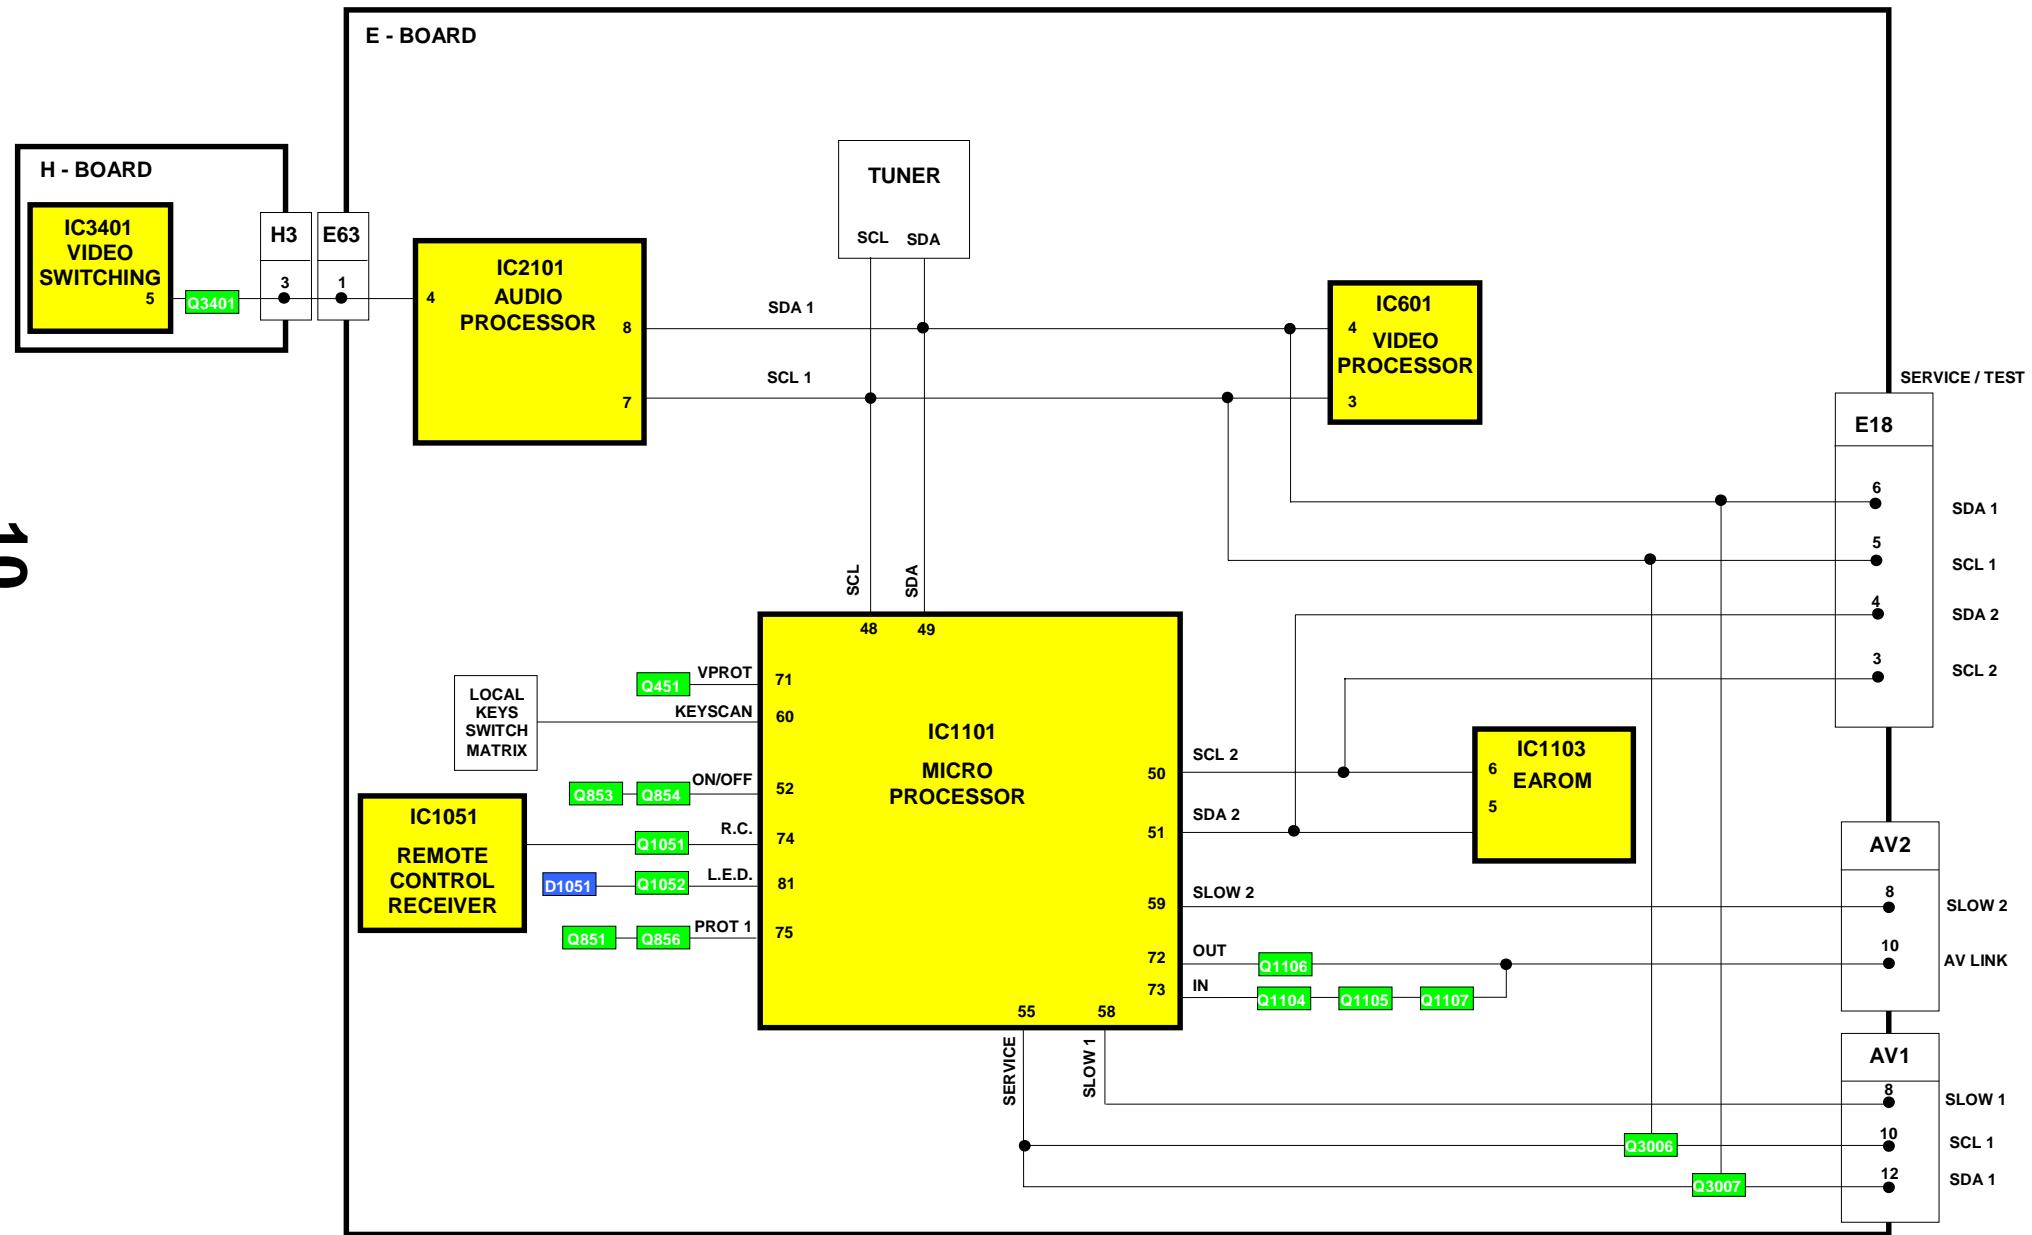


# POWER SUPPLY BLOCK DIAGRAM

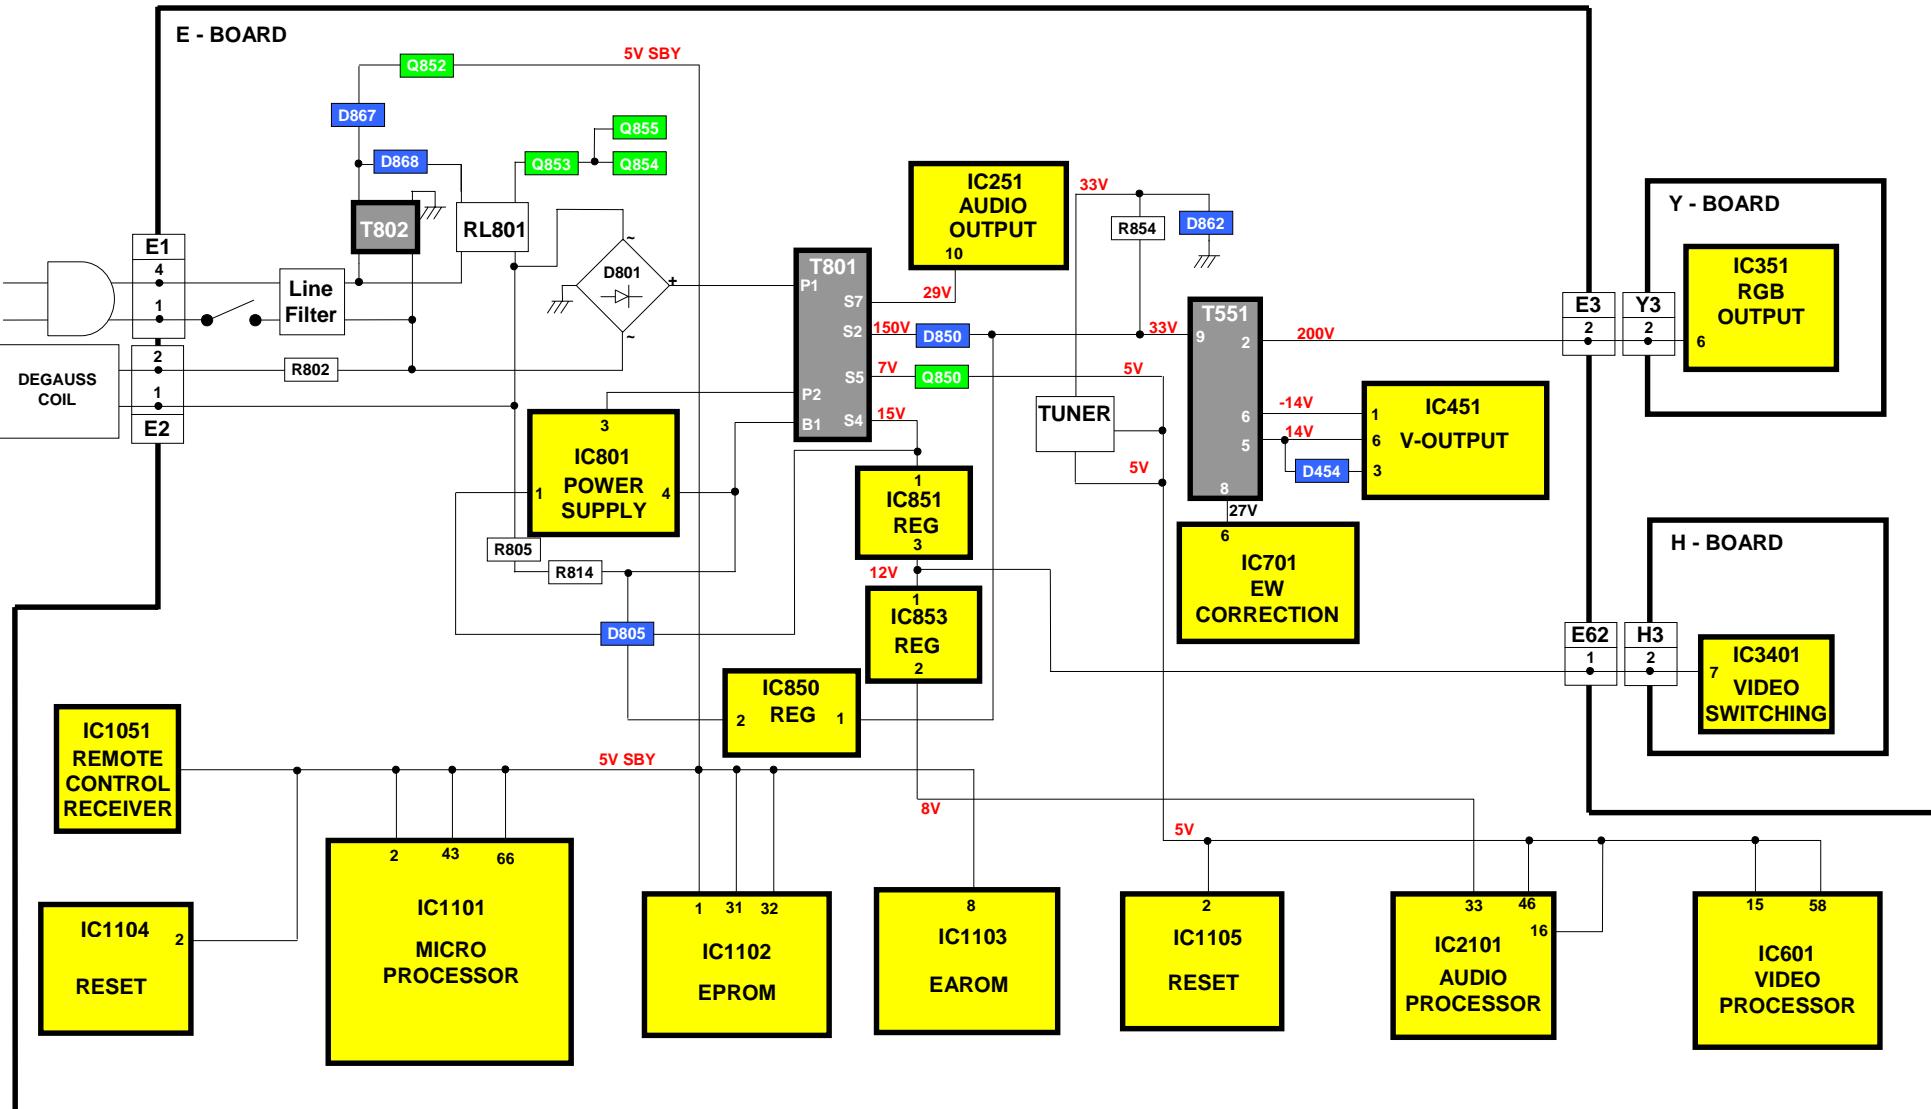

## PARTS LOCATION

**NOTE:**  
The numbers on the exploded view below  
refer to the mechanical section of the  
Replacement Parts List.

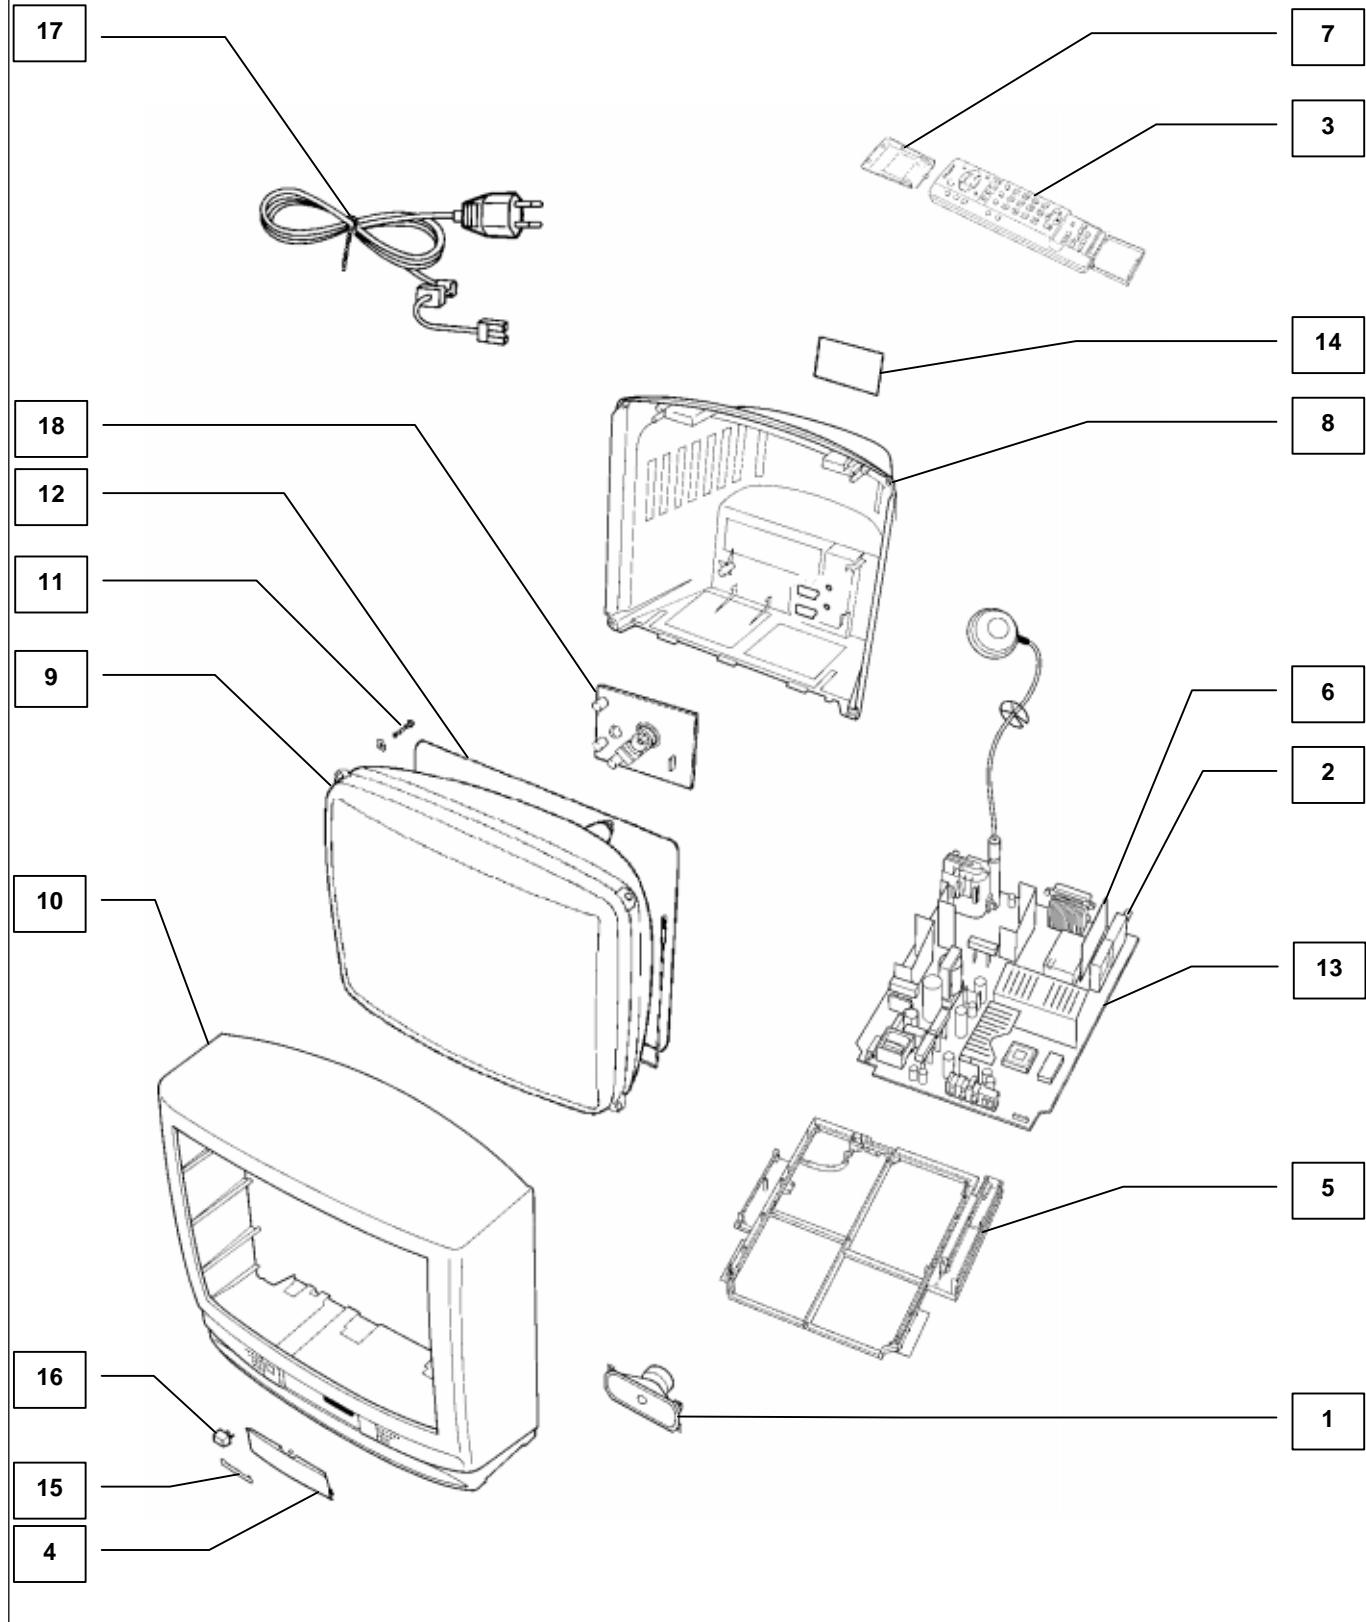

# REPLACEMENT PARTS LIST

## Important Safety Notice

Components Identified by  mark have special characteristics important for safety.  
 \* When replacing any of these components, use only manufacturers specified parts.  
 In case of ordering these spare parts, please always add the complete Model-Type number to your order.

| Cct Ref                         | Parts Number           | Description   |
|---------------------------------|------------------------|---|
| <b>COMMON PARTS</b>             |                        |   |
| <b>MECHANICAL PARTS</b>         |                        |   |
| 1 EASG12D531P2 SPEAKER          |                        |   |
| 2 ENG27507G                     | TUNER                  |    |
| 3 EUR511200                     | REMOTE CONTROL         |   |
| 4 TKP8E1177                     | DOOR LID               |   |
| 5 TMX8E023                      | CHASSIS FRAME          |   |
| 6 TNP8EH002AA                   | H P.C.B.               |    |
| 7 UR51EC904A                    | BATTERY COVER (REMOTE) |   |
| <b>MISCELLANEOUS COMPONENTS</b> |                        |   |
| 31221212478                     | FIX CLIP               |   |
| 832AG11D-ESL                    | I.C. SOCKET            |   |
| F9-4-220                        | RELAY                  |   |
| PCS-084A-1                      | 84 PIN SOCKET          |   |
| TBM8E1879                       | RESET LABEL            |   |
| TEK6935                         | LID SWITCH             |   |
| TKP8E1178                       | LED PANEL              |   |
| TKP8E1179                       | LED TUBE               |   |
| TMW8E020-1                      | LED HOLDER             |   |
| UM-3DJ-2P                       | BATTERY PACK           |   |
| RL801 TSE1885-1                 | RELAY                  |   |
| R802 232266296706               | THERMISTOR             |  |
| S351 0330550049                 | CRT SOCKET             |   |
| <b>INSTRUCTION BOOKS</b>        |                        |   |
| TQB8E2585MN                     | BULG./ROMAN.           |  |
| TQB8E2585PQ                     | POLISH/HUNG.           |  |
| TQB8E2585RU                     | CZECH/ENGLISH          |  |
| <b>I.C.s</b>                    |                        |   |
| IC251 LA4282                    | AUDIO OUTPUT           |   |
| IC351 TDA6103Q-N3               | R.G.B. AMPLIFIER       |   |
| IC451 LA7845N                   | VERTICAL OUTPUT        |   |
| IC601 VDP3108BPPB1              | VIDEO PROCESSOR        |   |
| IC701 TEA2031A                  | HORIZONTAL OUTPUT      |   |
| IC801 STRF6654LF51              | POWER SUPPLY           |   |
| IC851 L78M12MRB                 | 12V REGULATOR          |   |
| IC853 AN78L08TA                 | 8V REGULATOR           |   |
| IC1051 RPM-637CBRL              | LED RECEIVER           |   |
| IC1101 SDA5450C47               | MICRO PROCESSOR        |   |
| IC1102 27C2001-G01              | EPROM *                |   |
| IC1104 MN1381-R(TA)             | DIODE                  |   |
| IC1105 MN1381-T(TA)             | DIODE                  |   |
| IC2101 MSP3410DPOB4             | AUDIO PROCESSOR        |   |
| IC3401 TEA2114                  | AV SWITCHING           |   |
| <b>FUSES</b>                    |                        |   |
| F802 19181-3.15                 | FUSE                   |  |

| Cct Ref       | Parts Number | Description   |
|---------------|--------------|---------------|
| F8021         | EYF52BC      | FUSE HOLDER   |
| F8022         | EYF52BC      | FUSE HOLDER   |
| <b>DIODES</b> |              |               |
| D251          | MA2180TP     | DIODE         |
| D253          | MA700TA5     | DIODE         |
| D254          | MA700TA5     | DIODE         |
| D354          | 1SR124-4AT82 | DIODE         |
| D355          | 1SR124-4AT82 | DIODE         |
| D356          | 1SR124-4AT82 | DIODE         |
| D357          | MA165TA5     | DIODE         |
| D358          | MA165TA5     | DIODE         |
| D359          | MA165TA5     | DIODE         |
| D360          | MTZJT-7715A  | DIODE         |
| D361          | MA165TA5     | DIODE         |
| D362          | MA165TA5     | DIODE         |
| D363          | MA165TA5     | DIODE         |
| D364          | MA165TA5     | DIODE         |
| D453          | MA165TA5     | DIODE         |
| D454          | ERA15-02V3   | DIODE         |
| D456          | MTZJT-775.6C | DIODE         |
| D457          | MA165TA5     | DIODE         |
| D501          | MA165TA5     | DIODE         |
| D502          | 1SR124-4AT82 | DIODE         |
| D511          | MA4047       | DIODE         |
| D551          | ERD07-15L7   | DIODE         |
| D552          | RU3LFA1      | DIODE         |
| D553          | 1SR124-4AT82 | DIODE         |
| D554          | 1SR124-4AT82 | DIODE         |
| D556          | MA165TA5     | DIODE         |
| D557          | 1SR124-4AT82 | DIODE         |
| D558          | 1SR124-4AT82 | DIODE         |
| D601          | DAN217T146   | DIODE         |
| D603          | DAN217T146   | DIODE         |
| D605          | DAN212KT146  | DIODE         |
| D606          | MA165TA5     | DIODE         |
| D607          | MA4051       | DIODE         |
| D609          | 1SR124-4AT82 | DIODE         |
| D615          | STZ6.2NT146  | DIODE         |
| D616          | STZ6.2NT146  | DIODE         |
| D701          | MA165TA5     | DIODE         |
| D702          | MTZJT-775.1C | DIODE         |
| D704          | MA29TA5      | DIODE         |
| D705          | MTZJT-775.6C | DIODE         |
| D801          | RBV4-08      | DIODE         |
| D803          | 1SR124-4AT82 | DIODE         |
| D804          | 1SR124-4AT82 | DIODE         |
| D805          | TLP621GR-LF2 | PHOTO COUPLER |
| D806          | 1SR124-4AT82 | DIODE         |
| D850          | RU4BLF-L1    | DIODE         |
| D851          | MTZJT776.2B  | DIODE         |
| D852          | MA165TA5     | DIODE         |
| D853          | MA2180BLFS   | DIODE         |

| Cct Ref            | Parts Number  | Description |
|--------------------|---------------|-------------|
| D854               | TVSRU2AMLF A5 | DIODE       |
| D855               | FML22SLF610   | DIODE       |
| D856               | RU4AMLF-M1    | DIODE       |
| D857               | MTZJT-775.1C  | DIODE       |
| D858               | MA165TA5      | DIODE       |
| D859               | MA165TA5      | DIODE       |
| D861               | MA165TA5      | DIODE       |
| D862               | MTZJT-7736A   | DIODE       |
| D863               | MA165TA5      | DIODE       |
| D865               | MA165TA5      | DIODE       |
| D866               | MA165TA5      | DIODE       |
| D867               | EK06-V0       | DIODE       |
| D868               | 1N4150T-77    | DIODE       |
| D869               | 1N4150T-77    | DIODE       |
| D870               | MA165TA5      | DIODE       |
| D871               | 1N4150T-77    | DIODE       |
| D873               | MTZJT-775.6C  | DIODE       |
| D874               | 1SR124-4AT82  | DIODE       |
| D875               | BZX79A75A26A  | DIODE       |
| D1051              | SLR56UR3FLF   | LED         |
| D1101              | MA165TA5      | DIODE       |
| D1102              | MA165TA5      | DIODE       |
| D2101              | MA723TA5      | DIODE       |
| D2102              | MA723TA5      | DIODE       |
| D2103              | MA723TA5      | DIODE       |
| D2104              | MA723TA5      | DIODE       |
| D2105              | MTZJT-778.2C  | DIODE       |
| D2303              | MA723TA5      | DIODE       |
| D2304              | MA723TA5      | DIODE       |
| D3101              | MTZJT-778.2C  | DIODE       |
| D3102              | MTZJT-778.2C  | DIODE       |
| <b>TRANSISTORS</b> |               |             |
| Q101               | BC847B        | TRANSISTOR  |
| Q102               | BC847B        | TRANSISTOR  |
| Q104               | BC847B        | TRANSISTOR  |
| Q105               | BC847B        | TRANSISTOR  |
| Q251               | 2SD1328STX    | TRANSISTOR  |
| Q252               | 2SD1328STX    | TRANSISTOR  |
| Q253               | BC847B        | TRANSISTOR  |
| Q254               | BC847B        | TRANSISTOR  |
| Q301               | BC847B        | TRANSISTOR  |
| Q302               | FMY4T148      | TRANSISTOR  |
| Q303               | BC847B        | TRANSISTOR  |
| Q304               | FMY4T148      | TRANSISTOR  |
| Q305               | BC847B        | TRANSISTOR  |
| Q306               | FMY4T148      | TRANSISTOR  |
| Q351               | 2SA1767       | TRANSISTOR  |
| Q352               | 2SA1767       | TRANSISTOR  |
| Q353               | 2SA1767       | TRANSISTOR  |
| Q354               | BC857B        | TRANSISTOR  |
| Q451               | BC857B        | TRANSISTOR  |
| Q503               | 2SD2398-M2    | TRANSISTOR  |
| Q551               | BU2508AXLB    | TRANSISTOR  |
| Q552               | 2SC1473-RN    | TRANSISTOR  |
| Q701               | BC857B        | TRANSISTOR  |
| Q850               | 2SD1273PLB    | TRANSISTOR  |
| Q851               | BC857B        | TRANSISTOR  |
| Q852               | 2SC1383-S     | TRANSISTOR  |
| Q853               | BC847B        | TRANSISTOR  |
| Q854               | BC847B        | TRANSISTOR  |
| Q855               | BC847B        | TRANSISTOR  |
| Q856               | BC847B        | TRANSISTOR  |
| Q857               | 2SA1018QTA    | TRANSISTOR  |
| Q950               | BC847B        | TRANSISTOR  |
| Q951               | FMY4T148      | TRANSISTOR  |
| Q1051              | BC847B        | TRANSISTOR  |

| Cct Ref             | Parts Number | Description |
|---------------------|--------------|-------------|
| Q1052               | BC847B       | TRANSISTOR  |
| Q1101               | BC847B       | TRANSISTOR  |
| Q1104               | BC847B       | TRANSISTOR  |
| Q1105               | BC847B       | TRANSISTOR  |
| Q1106               | BC847B       | TRANSISTOR  |
| Q1107               | BC847B       | TRANSISTOR  |
| Q1108               | BC847B       | TRANSISTOR  |
| Q2101               | BC857B       | TRANSISTOR  |
| Q2102               | BC857B       | TRANSISTOR  |
| Q2103               | BC857B       | TRANSISTOR  |
| Q2301               | BC847B       | TRANSISTOR  |
| Q2302               | BC857B       | TRANSISTOR  |
| Q2303               | BC847B       | TRANSISTOR  |
| Q2304               | BC857B       | TRANSISTOR  |
| Q3001               | BC847B       | TRANSISTOR  |
| Q3006               | BC847B       | TRANSISTOR  |
| Q3007               | BC847B       | TRANSISTOR  |
| Q3401               | BC847B       | TRANSISTOR  |
| Q3402               | BC847B       | TRANSISTOR  |
| Q3601               | BC847B       | TRANSISTOR  |
| <b>TRANSFORMERS</b> |              |             |
| T501                | ETH19Y173AY  | TRANSFORMER |
| T551                | ZTFL94002A   | F.B.T.      |
| T802                | ETP35KAN619U | TRANSFORMER |
| <b>COILS</b>        |              |             |
| L104                | EXCELSA35T   | COIL        |
| L106                | TLTACT100K   | COIL        |
| L107                | TLTACT6R8K   | COIL        |
| L301                | TLTACT4R7K   | COIL        |
| L302                | TLTACT4R7K   | COIL        |
| L451                | EXCELSA35T   | COIL        |
| L501                | EXCELSA35T   | COIL        |
| L553                | ELC08D682E   | COIL        |
| L601                | TLTACT4R7K   | COIL        |
| L602                | TLTACT4R7K   | COIL        |
| L603                | TLTACT4R7K   | COIL        |
| L604                | TLTACT4R7K   | COIL        |
| L606                | TLTACT4R7K   | COIL        |
| L607                | ELJFC2R2KF   | COIL        |
| L701                | ELC10D822E   | COIL        |
| L850                | EXCELSA35T   | COIL        |
| L851                | EXCELSA35T   | COIL        |
| L852                | ELEIN470KA   | COIL        |
| L853                | EXCELSA35T   | COIL        |
| L854                | EXCELSA35T   | COIL        |
| L855                | EXCELSA35T   | COIL        |
| L856                | EXCELSA39V   | COIL        |
| L1103               | TLTACT100K   | COIL        |
| L1104               | EXCELSA35T   | COIL        |
| L1105               | ELJFC2R2KF   | COIL        |
| L2101               | TLTACT100K   | COIL        |
| L2103               | EXCELSA35T   | COIL        |
| L2104               | TLTACT4R7K   | COIL        |
| L3001               | ELEMV1R5MA   | COIL        |
| L3002               | ELEMV1R5MA   | COIL        |
| L3003               | ELEMV1R5MA   | COIL        |
| L3004               | ELEMV1R5MA   | COIL        |
| L3005               | ELEBR2R2KA   | COIL        |
| L3006               | ELEBR2R2KA   | COIL        |
| L3007               | TLTACT2R2K   | COIL        |
| L3101               | ELEBT6R8KA   | COIL        |
| L3102               | ELEBT6R8KA   | COIL        |
| L3401               | ELESN2R2KA   | COIL        |
| L3402               | ELESN2R2KA   | COIL        |

| Cct Ref          | Parts Number | Description          |
|------------------|--------------|----------------------|
| <b>FILTERS</b>   |              |                      |
| L804             | ELF18N010A   | LINE FILTER          |
| <b>CRYSTALS</b>  |              |                      |
| X601             | 4730007267   | CRYSTAL              |
| X1101            | TSSA121      | CRYSTAL              |
| <b>RESISTORS</b> |              |                      |
| C101             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA37             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA26             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA48             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA47             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA45             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA44             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSH001           | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA38             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA39             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA36             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA49             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA27             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA40             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA25             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA22             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA16             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA15             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA14             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA13             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA12             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA11             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA10             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA28             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA9              | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE5             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE4             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE35            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE33            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE3             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE26            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE22            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE18            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE12            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JSE10            | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA60             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA52             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA54             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA55             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA58             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA57             | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω  |
| JA21             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA1              | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA5              | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA51             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA46             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA8              | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA2              | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA59             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA33             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA35             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA56             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA34             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA43             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA32             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA31             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA30             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA29             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |
| JA50             | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω |

| Cct Ref | Parts Number | Description            |
|---------|--------------|------------------------|
| JA23    | ERJ8GEY0R00  | S.M.CARB .125W 5% 0Ω   |
| R101    | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω    |
| R102    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R103    | ERJ6GEYJ222  | S.M.CARB 0.1W 5% 2K2Ω  |
| R104    | ERJ6GEYJ332  | S.M.CARB 0.1W 5% 3K3Ω  |
| R105    | ERJ6GEYJ101  | S.M.CARB 0.1W 5% 100Ω  |
| R106    | ERJ6GEYJ681  | S.M.CARB 0.1W 5% 680Ω  |
| R107    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R111    | ERJ6GEY0R00  | S.M.CARB 0.1W 5% 0Ω    |
| R112    | ERJ6GEYJ101  | S.M.CARB 0.1W 5% 100Ω  |
| R113    | ERJ6GEYJ223  | S.M.CARB 0.1W 5% 22KΩ  |
| R114    | ERJ6GEYJ331  | S.M.CARB 0.1W 5% 330Ω  |
| R115    | ERJ6GEYJ331  | S.M.CARB 0.1W 5% 330Ω  |
| R116    | ERJ6GEYJ562  | S.M.CARB 0.1W 5% 5K6Ω  |
| R117    | ERJ6GEYJ222  | S.M.CARB 0.1W 5% 2K2Ω  |
| R118    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R120    | ERJ6GEYJ332  | S.M.CARB 0.1W 5% 3K3Ω  |
| R121    | ERJ6GEYJ471  | S.M.CARB 0.1W 5% 470Ω  |
| R251    | ERJ6GEYJ101  | S.M.CARB 0.1W 5% 100Ω  |
| R252    | ERJ6GEYJ242  | S.M.CARB 0.1W 5% 2K4Ω  |
| R253    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R254    | ERJ6GEYJ101  | S.M.CARB 0.1W 5% 100Ω  |
| R255    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R256    | ERJ6GEYJ471  | S.M.CARB 0.1W 5% 470Ω  |
| R257    | ERJ6GEYJ270  | S.M.CARB 0.1W 5% 27Ω   |
| R258    | ERJ6GEYJ242  | S.M.CARB 0.1W 5% 2K4Ω  |
| R259    | ERJ6GEYJ270  | S.M.CARB 0.1W 5% 27Ω   |
| R260    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R261    | ERJ6GEYJ471  | S.M.CARB 0.1W 5% 470Ω  |
| R262    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R263    | ERJ6GEYJ473  | S.M.CARB 0.1W 5% 47KΩ  |
| R264    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R265    | ERD25TJ2R2   | CARBON 0.25W 5% 2R2Ω   |
| R266    | ERD25TJ2R2   | CARBON 0.25W 5% 2R2Ω   |
| R267    | ERF7ZK4R7    | WOUND 7W 10% 4R7Ω      |
| R268    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R269    | ERQ14AJ101   | METAL 0.25W 5% 100Ω    |
| R271    | ERJ6GEYJ103  | S.M.CARB 0.1W 5% 10KΩ  |
| R272    | ERF7ZK4R7    | WOUND 7W 10% 4R7Ω      |
| R301    | ERJ6GEYJ391  | S.M.CARB 0.1W 5% 390Ω  |
| R302    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R303    | ERJ6GEYJ750  | S.M.CARB 0.1W 5% 75Ω   |
| R304    | ERJ6GEYJ331  | S.M.CARB 0.1W 5% 330Ω  |
| R305    | ERJ6GEYJ391  | S.M.CARB 0.1W 5% 390Ω  |
| R306    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R307    | ERJ6GEYJ750  | S.M.CARB 0.1W 5% 75Ω   |
| R308    | ERJ6GEYJ331  | S.M.CARB 0.1W 5% 330Ω  |
| R309    | ERJ6GEYJ391  | S.M.CARB 0.1W 5% 390Ω  |
| R310    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R311    | ERJ6GEYJ750  | S.M.CARB 0.1W 5% 75Ω   |
| R312    | ERJ6GEYJ331  | S.M.CARB 0.1W 5% 330Ω  |
| R351    | ERJ6GEYJ302  | S.M.CARB 0.1W 5% 3KΩ   |
| R352    | ERJ6GEYJ302  | S.M.CARB 0.1W 5% 3KΩ   |
| R353    | ERJ6GEYJ302  | S.M.CARB 0.1W 5% 3KΩ   |
| R354    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R355    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R356    | ERJ6GEYJ102  | S.M.CARB 0.1W 5% 1KΩ   |
| R366    | ERDS1TJ152   | CARBON 0.5W 5% 1K5Ω    |
| R367    | ERDS1TJ152   | CARBON 0.5W 5% 1K5Ω    |
| R368    | ERDS1TJ152   | CARBON 0.5W 5% 1K5Ω    |
| R372    | ERQ12AJ121   | FUSIBLE 0.5W 5% 120Ω   |
| R373    | ERJ6GEYJ220  | S.M.CARB 0.1W 5% 22Ω   |
| R374    | ERD25TJ274   | CARBON 0.25W 5% 270KΩ  |
| R375    | ERJ6GEYJ684  | S.M.CARB 0.1W 5% 680KΩ |
| R376    | ERJ6GEYJ183  | S.M.CARB 0.1W 5% 18KΩ  |
| R381    | ERJ6GEYJ473  | S.M.CARB 0.1W 5% 47KΩ  |

| Cct Ref | Parts Number | Description |       |     |      |
|---------|--------------|-------------|-------|-----|------|
| R451    | ERJ6GEYJ223  | S.M.CARB    | 0.1W  | 5%  | 22K  |
| R452    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R453    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R454    | ERJ6GEYJ752  | S.M.CARB    | 0.1W  | 5%  | 7K5  |
| R455    | ERJ6GEYJ222  | S.M.CARB    | 0.1W  | 5%  | 2K2  |
| R456    | ERJ6GEYJ104  | S.M.CARB    | 0.1W  | 5%  | 100K |
| R457    | ERJ6GEYJ223  | S.M.CARB    | 0.1W  | 5%  | 22K  |
| R458    | ERD25TJ1R5   | CARBON      | 0.25W | 5%  | 1R5  |
| R459    | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R460    | ERDS1TJ331   | CARBON      | 0.5W  | 5%  | 330  |
| R463    | ERD25TJ222   | CARBON      | 0.25W | 5%  | 2K2  |
| R464    | ERJ6GEYJ182  | S.M.CARB    | 0.1W  | 5%  | 1K8  |
| R465    | ERJ6GEYJ681  | S.M.CARB    | 0.1W  | 5%  | 680  |
| R502    | ERJ6GEYJ511  | S.M.CARB    | 0.1W  | 5%  | 510  |
| R506    | ERD25TJ560   | CARBON      | 0.25W | 5%  | 56   |
| R507    | ERG1FJ271P   | METAL       | 1W    | 5%  | 270  |
| R509    | ERDS1TJ152   | CARBON      | 0.5W  | 5%  | 1K5  |
| R510    | ERDS1FJ152   | CARBON      | 0.5W  | 5%  | 1K5  |
| R553    | ERG1SJ152    | METAL       | 1W    | 5%  | 1K5  |
| R554    | ERG1SJ101    | METAL       | 1W    | 5%  | 100  |
| R555    | ERQ12HKR33   | METAL       | 0.5W  | 5%  | R33  |
| R558    | ERDS1TJ124   | CARBON      | 0.5W  | 5%  | 120K |
| R559    | ERQ12HKR33   | METAL       | 0.5W  | 5%  | R33  |
| R560    | ERJ6GEYJ274  | S.M.CARB    | 0.1W  | 5%  | 270K |
| R561    | ERJ6GEYJ273  | S.M.CARB    | 0.1W  | 5%  | 27K  |
| R563    | ERJ6GEYJ474  | S.M.CARB    | 0.1W  | 5%  | 470K |
| R564    | ERJ6GEYJ623  | S.M.CARB    | 0.1W  | 5%  | 62K  |
| R566    | ERJ6GEYJ563  | S.M.CARB    | 0.1W  | 5%  | 56K  |
| R567    | ERF7ZK1R0    | WOUND       | 7W    | 10% | 1    |
| R601    | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R602    | ERJ6GEYJ821  | S.M.CARB    | 0.1W  | 5%  | 820  |
| R603    | ERJ8GEYJ103  | S.M.CARB    | .125W | 5%  | 10K  |
| R604    | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R605    | ERD25TJ331   | CARBON      | 0.25W | 5%  | 330  |
| R606    | ERD25TJ331   | CARBON      | 0.25W | 5%  | 330  |
| R607    | ERJ6GEYJ821  | S.M.CARB    | 0.1W  | 5%  | 820  |
| R608    | ERJ6GEYJ271  | S.M.CARB    | 0.1W  | 5%  | 270  |
| R609    | ERJ6GEYJ122  | S.M.CARB    | 0.1W  | 5%  | 1K2  |
| R610    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R611    | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R612    | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R613    | ERJ6GEYJ152  | S.M.CARB    | 0.1W  | 5%  | 1K5  |
| R622    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R636    | ERJ6GEYJ750  | S.M.CARB    | 0.1W  | 5%  | 75   |
| R645    | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R647    | ERJ6GEYJ472  | S.M.CARB    | 0.1W  | 5%  | 4K7  |
| R648    | ERJ6GEYJ152  | S.M.CARB    | 0.1W  | 5%  | 1K5  |
| R650    | ERJ6GEYJ750  | S.M.CARB    | 0.1W  | 5%  | 75   |
| R651    | ERJ6GEYJ750  | S.M.CARB    | 0.1W  | 5%  | 75   |
| R652    | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |
| R654    | ERJ6GEYJ622  | S.M.CARB    | 0.1W  | 5%  | 6K2  |
| R655    | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R658    | ERJ6GEYJ153  | S.M.CARB    | 0.1W  | 5%  | 15K  |
| R659    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R660    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R701    | ERQ12AJ101   | FUSIBLE     | 0.5W  | 5%  | 100  |
| R703    | ERG2FJ821    | METAL       | 2W    | 5%  | 820  |
| R704    | ERJ6GEYJ563  | S.M.CARB    | 0.1W  | 5%  | 56K  |
| R705    | ERJ6GEYJ104  | S.M.CARB    | 0.1W  | 5%  | 100K |
| R706    | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R707    | ERJ6GEYJ391  | S.M.CARB    | 0.1W  | 5%  | 390  |
| R708    | ERJ6GEYJ393  | S.M.CARB    | 0.1W  | 5%  | 39K  |
| R709    | ERJ6GEYJ393  | S.M.CARB    | 0.1W  | 5%  | 39K  |
| R710    | ERJ6GEYJ273  | S.M.CARB    | 0.1W  | 5%  | 27K  |
| R711    | ERG1SJ101    | METAL       | 1W    | 5%  | 100  |
| R712    | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |

| Cct Ref | Parts Number | Description |       |     |      |
|---------|--------------|-------------|-------|-----|------|
| R803    | ERC12ZGK335D | SOLID       | 0.5W  | 10% | 3M3  |
| R805    | ERD25TJ473   | CARBON      | 0.25W | 5%  | 47K  |
| R806    | ERD25TJ100   | CARBON      | 0.25W | 5%  | 10   |
| R807    | ERD25TJ332   | CARBON      | 0.25W | 5%  | 3K3  |
| R809    | ERD25TJ681   | CARBON      | 0.25W | 5%  | 680  |
| R810    | ERW2PKR33    | WOUND       | 2W    | 20% | R33  |
| R811    | ERW2PKR33    | WOUND       | 2W    | 20% | R33  |
| R812    | ERD75TAJ825  | CARBON      | 0.75W | 5%  | 8M2  |
| R813    | ERF7ZK2R7    | WOUND       | 7W    | 20% | 2R7  |
| R814    | ERD25TJ473   | CARBON      | 0.25W | 5%  | 47K  |
| R815    | ERD25TJ222   | CARBON      | 0.25W | 5%  | 2K2  |
| R850    | ERD25TJ122   | CARBON      | 0.25W | 5%  | 1K2  |
| R852    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R853    | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |
| R854    | ERG2FJ223    | METAL       | 2W    | 5%  | 22K  |
| R855    | ERJ6GEYJ752  | S.M.CARB    | 0.1W  | 5%  | 7K5  |
| R857    | ERJ6GEYJ752  | S.M.CARB    | 0.1W  | 5%  | 7K5  |
| R858    | ERJ6GEYJ752  | S.M.CARB    | 0.1W  | 5%  | 7K5  |
| R859    | ERJ6GEYJ753  | S.M.CARB    | 0.1W  | 5%  | 7K5  |
| R860    | ERQ1CJP2R2   | FUSIBLE     | 1W    | 10% | 2R2  |
| R861    | ERD25TJ221   | CARBON      | 0.25W | 5%  | 220  |
| R862    | ERD25TJ272   | CARBON      | 0.25W | 5%  | 2K7  |
| R863    | ERDS1TJ560   | CARBON      | 0.5W  | 5%  | 56   |
| R864    | ERDS1TJ680   | CARBON      | 0.5W  | 5%  | 68   |
| R865    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R867    | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R868    | ERJ6GEYJ223  | S.M.CARB    | 0.1W  | 5%  | 22K  |
| R869    | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%  | 0    |
| R870    | ERJ6GEYJ272  | S.M.CARB    | 0.1W  | 5%  | 2K7  |
| R871    | ERJ6GEYJ153  | S.M.CARB    | 0.1W  | 5%  | 15K  |
| R872    | ERG1SJ183    | METAL       | 1W    | 5%  | 18K  |
| R873    | ERG1SJ223    | METAL       | 1W    | 5%  | 22K  |
| R874    | ERD25TJ104   | CARBON      | 0.25W | 5%  | 100K |
| R876    | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R877    | ERW2PKR56    | WOUND       | 2W    | 10% | R56  |
| R878    | ERJ6GEYJ473  | S.M.CARB    | 0.1W  | 5%  | 47K  |
| R951    | ERJ6GEYJ391  | S.M.CARB    | 0.1W  | 5%  | 390  |
| R952    | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |
| R953    | ERJ6GEYJ750  | S.M.CARB    | 0.1W  | 5%  | 75   |
| R954    | ERJ6GEYJ391  | S.M.CARB    | 0.1W  | 5%  | 390  |
| R1051   | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |
| R1052   | ERJ6GEYJ271  | S.M.CARB    | 0.1W  | 5%  | 270  |
| R1053   | ERJ6GEYJ103  | S.M.CARB    | 0.1W  | 5%  | 10K  |
| R1054   | ERJ6GEYJ750  | S.M.CARB    | 0.1W  | 5%  | 75   |
| R1101   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1102   | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |
| R1103   | ERJ6GEYJ331  | S.M.CARB    | 0.1W  | 5%  | 330  |
| R1104   | ERJ6GEYJ331  | S.M.CARB    | 0.1W  | 5%  | 330  |
| R1105   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1106   | ERJ6GEYJ104  | S.M.CARB    | 0.1W  | 5%  | 100K |
| R1107   | ERJ6GEYJ104  | S.M.CARB    | 0.1W  | 5%  | 100K |
| R1108   | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%  | 1K   |
| R1109   | ERJ6GEYJ472  | S.M.CARB    | 0.1W  | 5%  | 4K7  |
| R1110   | ERJ6GEYJ472  | S.M.CARB    | 0.1W  | 5%  | 4K7  |
| R1111   | ERJ6GEYJ473  | S.M.CARB    | 0.1W  | 5%  | 47K  |
| R1112   | ERJ6GEYJ473  | S.M.CARB    | 0.1W  | 5%  | 47K  |
| R1113   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1115   | ERJ6GEYJ471  | S.M.CARB    | 0.1W  | 5%  | 470  |
| R1116   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1117   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1118   | ERJ6GEYJ472  | S.M.CARB    | 0.1W  | 5%  | 4K7  |
| R1119   | ERJ6GEYJ472  | S.M.CARB    | 0.1W  | 5%  | 4K7  |
| R1120   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1121   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |
| R1122   | ERD25TJ103   | CARBON      | 0.25W | 5%  | 10K  |
| R1123   | ERJ6GEYJ101  | S.M.CARB    | 0.1W  | 5%  | 100  |

| Cct Ref | Parts Number | Description |      |    |      |   |
|---------|--------------|-------------|------|----|------|---|
| R1125   | ERJ6GEYJ472  | S.M.CARB    | 0.1W | 5% | 4K7  | Q |
| R1126   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1127   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1128   | ERJ6GEYJ682  | S.M.CARB    | 0.1W | 5% | 6K8  | Q |
| R1129   | ERJ6GEYJ682  | S.M.CARB    | 0.1W | 5% | 6K8  | Q |
| R1130   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R1131   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R1132   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1133   | ERJ6GEYJ273  | S.M.CARB    | 0.1W | 5% | 27K  | Q |
| R1136   | ERJ6GEYJ823  | S.M.CARB    | 0.1W | 5% | 82K  | Q |
| R1137   | ERJ6GEYJ0R00 | S.M.CARB    | 0.1W | 5% | 0    | Q |
| R1138   | ERJ6GEYJ474  | S.M.CARB    | 0.1W | 5% | 470K | Q |
| R1139   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R1140   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R1141   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R1145   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1146   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1147   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1148   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1149   | ERJ6GEYJ223  | S.M.CARB    | 0.1W | 5% | 22K  | Q |
| R1151   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1152   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1156   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R1157   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R1158   | ERJ6GEYJ0R00 | S.M.CARB    | 0.1W | 5% | 0    | Q |
| R1159   | ERJ6GEYJ0R00 | S.M.CARB    | 0.1W | 5% | 0    | Q |
| R1160   | ERJ6GEYJ223  | S.M.CARB    | 0.1W | 5% | 22K  | Q |
| R1161   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R1162   | ERJ6GEYJ222  | S.M.CARB    | 0.1W | 5% | 2K2  | Q |
| R1163   | ERJ6GEYJ222  | S.M.CARB    | 0.1W | 5% | 2K2  | Q |
| R1164   | ERJ6GEYJ332  | S.M.CARB    | 0.1W | 5% | 3K3  | Q |
| R1165   | ERJ6GEYJ512  | S.M.CARB    | 0.1W | 5% | 5K1  | Q |
| R1166   | ERJ6GEYJ912  | S.M.CARB    | 0.1W | 5% | 9K1  | Q |
| R1167   | ERJ6GEYJ100  | S.M.CARB    | 0.1W | 5% | 10   | Q |
| R1168   | ERJ6GEYJ473  | S.M.CARB    | 0.1W | 5% | 47K  | Q |
| R1169   | ERJ6GEYJ472  | S.M.CARB    | 0.1W | 5% | 4K7  | Q |
| R1170   | ERJ6GEYJ273  | S.M.CARB    | 0.1W | 5% | 27K  | Q |
| R1171   | ERJ6GEYJ224  | S.M.CARB    | 0.1W | 5% | 220K | Q |
| R1172   | ERJ6GEYJ223  | S.M.CARB    | 0.1W | 5% | 22K  | Q |
| R1173   | ERJ6GEYJ104  | S.M.CARB    | 0.1W | 5% | 100K | Q |
| R1174   | ERJ6GEYJ221  | S.M.CARB    | 0.1W | 5% | 220  | Q |
| R1175   | ERJ6GEYJ225  | S.M.CARB    | 0.1W | 5% | 2M2  | Q |
| R1176   | ERJ6GEYJ100  | S.M.CARB    | 0.1W | 5% | 10   | Q |
| R2101   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R2102   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2103   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2104   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2105   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2106   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2107   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2108   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2109   | ERJ6GEYJ183  | S.M.CARB    | 0.1W | 5% | 18K  | Q |
| R2110   | ERJ6GEYJ0R00 | S.M.CARB    | 0.1W | 5% | 0    | Q |
| R2111   | ERJ6GEYJ221  | S.M.CARB    | 0.1W | 5% | 220  | Q |
| R2112   | ERJ6GEYJ102  | S.M.CARB    | 0.1W | 5% | 1K   | Q |
| R2113   | ERJ6GEYJ562  | S.M.CARB    | 0.1W | 5% | 5K6  | Q |
| R2114   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2115   | ERJ6GEYJ222  | S.M.CARB    | 0.1W | 5% | 2K2  | Q |
| R2116   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2117   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2118   | ERJ6GEYJ222  | S.M.CARB    | 0.1W | 5% | 2K2  | Q |
| R2119   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2120   | ERJ6GEYJ222  | S.M.CARB    | 0.1W | 5% | 2K2  | Q |
| R2302   | ERJ6GEYJ104  | S.M.CARB    | 0.1W | 5% | 100K | Q |
| R2303   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2304   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |

| Cct Ref | Parts Number | Description |      |    |      |   |
|---------|--------------|-------------|------|----|------|---|
| R2305   | ERJ6GEYJ102  | S.M.CARB    | 0.1W | 5% | 1K   | Q |
| R2306   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R2308   | ERJ6GEYJ104  | S.M.CARB    | 0.1W | 5% | 100K | Q |
| R2309   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R2310   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R2311   | ERJ6GEYJ102  | S.M.CARB    | 0.1W | 5% | 1K   | Q |
| R2312   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R3001   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3002   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R3003   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3004   | ERJ6GEYJ153  | S.M.CARB    | 0.1W | 5% | 15K  | Q |
| R3005   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3006   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R3007   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3008   | ERJ6GEYJ153  | S.M.CARB    | 0.1W | 5% | 15K  | Q |
| R3009   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3010   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3011   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3012   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3013   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3014   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R3015   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3016   | ERJ6GEYJ153  | S.M.CARB    | 0.1W | 5% | 15K  | Q |
| R3017   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3018   | ERJ6GEYJ471  | S.M.CARB    | 0.1W | 5% | 470  | Q |
| R3019   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3020   | ERJ6GEYJ153  | S.M.CARB    | 0.1W | 5% | 15K  | Q |
| R3021   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3022   | ERJ6GEYJ102  | S.M.CARB    | 0.1W | 5% | 1K   | Q |
| R3023   | ERJ6GEYJ123  | S.M.CARB    | 0.1W | 5% | 12K  | Q |
| R3024   | ERJ6GEYJ472  | S.M.CARB    | 0.1W | 5% | 4K7  | Q |
| R3025   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3026   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3044   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3046   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3047   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3048   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R3049   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3050   | ERJ6GEYJ103  | S.M.CARB    | 0.1W | 5% | 10K  | Q |
| R3057   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3101   | ERDS1TJ151   | CARBON      | 0.5W | 5% | 150  | Q |
| R3102   | ERDS1TJ151   | CARBON      | 0.5W | 5% | 150  | Q |
| R3103   | ERG2FJ221    | METAL       | 2W   | 5% | 220  | Q |
| R3104   | ERG2FJ221    | METAL       | 2W   | 5% | 220  | Q |
| R3105   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3106   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3107   | ERJ6GEYJ153  | S.M.CARB    | 0.1W | 5% | 15K  | Q |
| R3108   | ERJ6GEYJ153  | S.M.CARB    | 0.1W | 5% | 15K  | Q |
| R3402   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3403   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3404   | ERJ6GEYJ242  | S.M.CARB    | 0.1W | 5% | 2K4  | Q |
| R3405   | ERJ6GEYJ104  | S.M.CARB    | 0.1W | 5% | 100K | Q |
| R3406   | ERJ6GEYJ301  | S.M.CARB    | 0.1W | 5% | 300  | Q |
| R3407   | ERJ6GEYJ123  | S.M.CARB    | 0.1W | 5% | 12K  | Q |
| R3408   | ERJ6GEYJ472  | S.M.CARB    | 0.1W | 5% | 4K7  | Q |
| R3409   | ERJ6GEYJ750  | S.M.CARB    | 0.1W | 5% | 75   | Q |
| R3601   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3602   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3603   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3604   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3605   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3606   | ERJ6GEYJ101  | S.M.CARB    | 0.1W | 5% | 100  | Q |
| R3607   | ERJ6GEYJ472  | S.M.CARB    | 0.1W | 5% | 4K7  | Q |
| R3608   | ERJ6GEYJ752  | S.M.CARB    | 0.1W | 5% | 7K5  | Q |
| R3609   | ERJ6GEYJ0R00 | S.M.CARB    | 0.1W | 5% | 0    | Q |
| R3610   | ERJ6GEYJ102  | S.M.CARB    | 0.1W | 5% | 1K   | Q |

| Cct Ref           | Parts Number | Description |       |       |  |
|-------------------|--------------|-------------|-------|-------|--|
| <b>CAPACITORS</b> |              |             |       |       |  |
| C102              | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C103              | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |  |
| C106              | ECUV1H560JCX | S.M. CAP    | 50V   | 56pF  |  |
| C107              | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |  |
| C108              | ECA1CM100GB  | ELECT       | 16V   | 10µF  |  |
| C109              | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |  |
| C110              | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C111              | ECA1HMR33GB  | ELECT       | 50V   | 10nF  |  |
| C117              | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C118              | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |  |
| C119              | ECA1CM221GB  | ELECT       | 16V   | 220µF |  |
| C120              | ECA1CM221GB  | ELECT       | 16V   | 220µF |  |
| C121              | ECUV1H561KBX | S.M. CAP    | 50V   | 560pF |  |
| C122              | ECUV1H102KBX | S.M. CAP    | 50V   | 1nF   |  |
| C123              | ECUV1H102KBX | S.M. CAP    | 50V   | 1nF   |  |
| C124              | ECUV1H220JCX | S.M. CAP    | 50V   | 22pF  |  |
| C125              | ECUV1H100DCX | S.M. CAP    | 50V   | 10pF  |  |
| C251              | ECA1EM100GB  | ELECT       | 25V   | 10pF  |  |
| C252              | ECUV1H223KBX | S.M. CAP    | 50V   | 22nF  |  |
| C253              | ECA1HM4R7GB  | ELECT       | 50V   | 4.7µF |  |
| C254              | ECQM1H184J   | FILM        | 50V   | 4.7µF |  |
| C255              | ECA1EM101GB  | ELECT       | 25V   | 100pF |  |
| C256              | ECUV1H223KBX | S.M. CAP    | 50V   | 22nF  |  |
| C257              | ECA1HM4R7GB  | ELECT       | 50V   | 4.7µF |  |
| C258              | ECA1EM100GB  | ELECT       | 25V   | 4.7µF |  |
| C259              | ECQM1H184J   | FILM        | 50V   | 4.7µF |  |
| C260              | ECA1VM102GB  | ELECT       | 35V   | 1nF   |  |
| C261              | ECA1VM102GB  | ELECT       | 35V   | 1nF   |  |
| C262              | ECQM1H474J   | FILM        | 50V   | 470nF |  |
| C263              | ECA1HM010GB  | ELECT       | 50V   | 1µF   |  |
| C264              | ECA1HHG222E  | ELECT       | 50V   | 1µF   |  |
| C265              | ECQM1H474J   | FILM        | 50V   | 470nF |  |
| C266              | ECA1HM010GB  | ELECT       | 50V   | 1µF   |  |
| C267              | ECJ2VB1H104K | ELECT       | 350V  | 100nF |  |
| C268              | ECJ2VB1H104K | ELECT       | 350V  | 100nF |  |
| C270              | ECJ2VB1H104K | ELECT       | 350V  | 100nF |  |
| C301              | ECJ2VB1C104K | ELECT       | 350V  | 100nF |  |
| C302              | ECJ2VB1C104K | ELECT       | 350V  | 100nF |  |
| C303              | ECJ2VB1C104K | ELECT       | 350V  | 100nF |  |
| C304              | ECA1CM100GB  | ELECT       | 16V   | 10µF  |  |
| C354              | ECQM2104KZ   | FILM        | 250V  | 100nF |  |
| C355              | ECUV1H471JCX | S.M. CAP    | 50V   | 470pF |  |
| C356              | ECUV1H471JCX | S.M. CAP    | 50V   | 470pF |  |
| C357              | ECUV1H471JCX | S.M. CAP    | 50V   | 470pF |  |
| C358              | ECQM1H224J   | FILM        | 50V   | 220nF |  |
| C360              | ECKC3D152J   | CERAMIC     | 2KV   | 1.5nF |  |
| C361              | ECA1HMR47GB  | ELECT       | 50V   | 1.5nF |  |
| C363              | ECA1VM471GB  | ELECT       | 35V   | 470µF |  |
| C364              | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C451              | ECUV1H102JX  | S.M. CAP    | 50V   | 10nF  |  |
| C453              | ECUV1H152KBX | S.M. CAP    | 50V   | 10nF  |  |
| C454              | ECUV1H223KBM | S.M. CAP    | 50V   | 10nF  |  |
| C455              | ECA1HM100GB  | ELECT       | 50V   | 10µF  |  |
| C456              | ECA1HHG221B  | ELECT       | 50V   | 220pF |  |
| C458              | ECQB1222JF3  | FILM        | 100V  | 2.2nF |  |
| C459              | 222236516154 | FILM        | 160V  | 2.2nF |  |
| C461              | ECCR2H270J   | CERAMIC     | 500V  | 27pF  |  |
| C508              | ECQV1H105JZ  | FILM        | 50V   | 1µF   |  |
| C509              | ECEA1HU101   | ELECT       | 50V   | 100µF |  |
| C510              | ECUV1H104KBX | S.M. CAP    | 50V   | 100µF |  |
| C511              | ECQM2683JZ   | FILM        | 250V  | 68nF  |  |
| C552              | ECWH15H102J  | FILM        | 1500V | 1nF   |  |
| C557              | ECKC2H471J   | CERAMIC     | 500V  | 470pF |  |
| C558              | ECA1HHG471E  | ELECT       | 50V   | 470µF |  |
| C560              | ECA2GHG2R2B  | ELECT       | 400V  | 470µF |  |

| Cct Ref | Parts Number | Description |       |       |  |
|---------|--------------|-------------|-------|-------|--|
| C561    | ECA1EHG102B  | ELECT       | 25V   | 470µF |  |
| C562    | ECKC2H101J   | CERAMIC     | 500V  | 100pF |  |
| C563    | ECA2EHG220B  | ELECT       | 250V  | 20µF  |  |
| C564    | ECEA2AU2R2   | ELECT       | 100V  | 20µF  |  |
| C565    | ECQP1H273J   | FILM        | 100V  | 20µF  |  |
| C566    | ECKC2H471J   | CERAMIC     | 500V  | 470pF |  |
| C567    | ECA1EHG102B  | ELECT       | 25V   | 470pF |  |
| C568    | ECKC2H471J   | CERAMIC     | 500V  | 1nF   |  |
| C569    | ECKC2H102J   | CERAMIC     | 500V  | 1nF   |  |
| C601    | ECUV1H104KBX | S.M. CAP    | 50V   | 1nF   |  |
| C602    | ECA1HM101GB  | ELECT       | 50V   | 100µF |  |
| C603    | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |  |
| C604    | ECJ2VF1H223Z | ELECT       | 350V  | 22nF  |  |
| C605    | ECA1HM101GB  | ELECT       | 50V   | 100µF |  |
| C606    | ECA1HM3R3GB  | ELECT       | 50V   | 3.3µF |  |
| C607    | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |  |
| C608    | ECUV1H153KBX | S.M. CAP    | 50V   | 15nF  |  |
| C609    | ECUV1H153KBX | S.M. CAP    | 50V   | 15nF  |  |
| C610    | ECUV1H153KBX | S.M. CAP    | 50V   | 15nF  |  |
| C611    | ECUV1H153KBX | S.M. CAP    | 50V   | 15nF  |  |
| C612    | ECUV1H153KBX | S.M. CAP    | 50V   | 15nF  |  |
| C613    | ECUV1H153KBX | S.M. CAP    | 50V   | 15nF  |  |
| C614    | ECUV1H050CCX | S.M. CAP    | 50V   | 50pF  |  |
| C615    | ECUV1H050CCX | S.M. CAP    | 50V   | 50pF  |  |
| C616    | ECA1CM100GB  | ELECT       | 16V   | 10µF  |  |
| C617    | ECUV1H223KBX | S.M. CAP    | 50V   | 22nF  |  |
| C618    | ECA1CM221GB  | ELECT       | 16V   | 220µF |  |
| C619    | ECJ2VB1H473K | ELECT       | 350V  | 47nF  |  |
| C620    | ECA1HM101GB  | ELECT       | 50V   | 100µF |  |
| C621    | ECJ2VB1C104K | ELECT       | 350V  | 100nF |  |
| C622    | ECUV1H683KBX | S.M. CAP    | 50V   | 68nF  |  |
| C623    | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |  |
| C624    | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C625    | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C626    | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C627    | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C628    | ECA1CM100GB  | ELECT       | 16V   | 10µF  |  |
| C629    | ECUV1H104KBX | S.M. CAP    | 50V   | 10µF  |  |
| C630    | ECUV1H100DCX | S.M. CAP    | 50V   | 10pF  |  |
| C631    | ECUV1H683ZFX | S.M. CAP    | 50V   | 68nF  |  |
| C632    | ECUV1H270JCX | S.M. CAP    | 50V   | 27pF  |  |
| C633    | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C634    | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C635    | ECUV1H180JCX | S.M. CAP    | 50V   | 18pF  |  |
| C636    | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C637    | ECUV1H101JCX | S.M. CAP    | 50V   | 100pF |  |
| C638    | ECUV1H471JCX | S.M. CAP    | 50V   | 470pF |  |
| C639    | ECUV1H332KBM | S.M. CAP    | 50V   | 470pF |  |
| C701    | ECA1HHG101B  | ELECT       | 50V   | 100µF |  |
| C702    | ECUV1H103KBX | S.M. CAP    | 50V   | 10nF  |  |
| C703    | ECEA1HGE100  | ELECT       | 50V   | 10µF  |  |
| C704    | ECQB1H223K   | FILM        | 50V   | 22nF  |  |
| C705    | ECQB1H222J   | FILM        | 50V   | 2.2nF |  |
| C804    | ECQE2A474MWB | FILM        | 100V  | 470nF |  |
| C806    | ECKWNA101MBC | CERAMIC     | 400V  | 100µF |  |
| C807    | ECKC2H472J   | CERAMIC     | 500V  | 4.7nF |  |
| C808    | ECKC2H472J   | CERAMIC     | 500V  | 4.7nF |  |
| C809    | ECKC2H472J   | CERAMIC     | 500V  | 4.7nF |  |
| C810    | ECKC2H472J   | CERAMIC     | 500V  | 4.7nF |  |
| C814    | ECKC3D102J   | CERAMIC     | 2KV   | 1nF   |  |
| C815    | ECKC1H471J   | CERAMIC     | 50V   | 470pF |  |
| C816    | ECA1EM101GB  | ELECT       | 25V   | 100µF |  |
| C817    | ECQE6104K    | FILM        | 600V  | 100nF |  |
| C818    | ECKWNA332MEC | CERAMIC     | 250V  | 3.3nF |  |
| C819    | ECQB1H152K   | FILM        | 50V   | 1.5nF |  |
| C850    | ECKC3D471JB  | CERAMIC     | 2KV   | 470pF |  |

| Cct Ref | Parts Number | Description |       |       |   |
|---------|--------------|-------------|-------|-------|---|
| C851    | ECA2CM221E   | ELECT       | 160V  | 220μF |   |
| C852    | ECA2CHG101E  | ELECT       | 160V  | 100μF |   |
| C853    | ECKC2H471J   | CERAMIC     | 500V  | 470pF | ▲ |
| C854    | ECA1EM102GB  | ELECT       | 25V   | 100μF |   |
| C855    | ECKC2H471J   | CERAMIC     | 500V  | 470pF | ▲ |
| C856    | ECA1AHG222B  | ELECT       | 10V   | 470pF |   |
| C857    | ECKC2H471J   | CERAMIC     | 500V  | 470pF | ▲ |
| C858    | ECEA1HGE102  | ELECT       | 50V   | 470pF |   |
| C859    | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C860    | ECA1HM101GB  | ELECT       | 50V   | 100μF |   |
| C862    | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C863    | ECA1HM101GB  | ELECT       | 50V   | 100μF |   |
| C866    | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C867    | ECA1CM100GB  | ELECT       | 16V   | 10μF  |   |
| C868    | ECA1CM100GB  | ELECT       | 16V   | 10μF  |   |
| C869    | ECA1EM101GB  | ELECT       | 25V   | 100μF |   |
| C870    | ECA1EM471GB  | ELECT       | 25V   | 470μF |   |
| C871    | ECA1CM102B   | ELECT       | 16V   | 470μF |   |
| C872    | ECA1CM471GB  | ELECT       | 16V   | 470μF |   |
| C873    | ECA1CM100GB  | ELECT       | 16V   | 10μF  |   |
| C875    | ECA2CM4R7B   | ELECT       | 160V  | 10μF  |   |
| C876    | ECA1AHG471E  | ELECT       | 10V   | 470pF |   |
| C950    | ECJ2VB1C104K | ELECT       | 350V  | 100nF |   |
| C1051   | ECUV1H103KBX | S.M. CAP    | 50V   | 10nF  |   |
| C1052   | ECA1HM101GB  | ELECT       | 50V   | 100μF |   |
| C1053   | ECUV1H331JCX | S.M. CAP    | 50V   | 330pF |   |
| C1101   | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C1102   | ECA0JM101G   | ELECT       | 6.3V  | 100μF |   |
| C1103   | ECUV1H220JCX | S.M. CAP    | 50V   | 22pF  |   |
| C1104   | ECUV1H220JCX | S.M. CAP    | 50V   | 22pF  |   |
| C1105   | ECUV1H101JCX | S.M. CAP    | 50V   | 100pF |   |
| C1108   | ECJ2VB1H333K | ELECT       | 350V  | 33nF  |   |
| C1111   | ECA1CM100GB  | ELECT       | 16V   | 10μF  |   |
| C1112   | ECUV1H103KBX | S.M. CAP    | 50V   | 10nF  |   |
| C1115   | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |   |
| C1116   | ECUV1H472KBX | S.M. CAP    | 50V   | 4.7nF |   |
| C1117   | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C1118   | ECUV1H103KBX | S.M. CAP    | 50V   | 10nF  |   |
| C1119   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |
| C1120   | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C1121   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |
| C1123   | ECUV1H101JCX | S.M. CAP    | 50V   | 100pF |   |
| C1124   | ECUV1H101JCX | S.M. CAP    | 50V   | 100pF |   |
| C1125   | ECUV1H101JCX | S.M. CAP    | 50V   | 100pF |   |
| C1126   | ECUV1H101JCX | S.M. CAP    | 50V   | 100pF |   |
| C1127   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |
| C1128   | ECUV1H223KBX | S.M. CAP    | 50V   | 22nF  |   |
| C1129   | ECUV1H270JCX | S.M. CAP    | 50V   | 27pF  |   |
| C2101   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2102   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2103   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2104   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2105   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2106   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2107   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2108   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2109   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2110   | ECUV1H102JCX | S.M. CAP    | 50V   | 1nF   |   |
| C2111   | ECA1CM100GB  | ELECT       | 16V   | 10μF  |   |
| C2112   | ECA1CM100GB  | ELECT       | 16V   | 10μF  |   |
| C2113   | ECA1HM3R3GB  | ELECT       | 50V   | 3.3μF |   |
| C2114   | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |   |
| C2115   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |
| C2116   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |
| C2117   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |
| C2118   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |   |

| Cct Ref | Parts Number | Description |       |       |  |
|---------|--------------|-------------|-------|-------|--|
| C2119   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |  |
| C2120   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |  |
| C2121   | ECA1CM100GB  | ELECT       | 16V   | 10μF  |  |
| C2122   | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |  |
| C2123   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |  |
| C2124   | ECUV1H070DTX | S.M. CAP    | 50V   | 70pF  |  |
| C2125   | ECUV1H470JCX | S.M. CAP    | 50V   | 47pF  |  |
| C2126   | ECUV1H070DTX | S.M. CAP    | 50V   | 70pF  |  |
| C2127   | ECUV1H010CCX | S.M. CAP    | 50V   | 1pF   |  |
| C2128   | ECUV1H010CCX | S.M. CAP    | 50V   | 1pF   |  |
| C2129   | ECA1CM102B   | ELECT       | 16V   | 1pF   |  |
| C2130   | ECA1CM331B   | ELECT       | 16V   | 330μF |  |
| C2131   | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C2132   | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C2134   | ECUV1H103ZFX | S.M. CAP    | 50V   | 10nF  |  |
| C2135   | ECA1HM101GB  | ELECT       | 50V   | 100μF |  |
| C2136   | ECJ2VF1H104Z | ELECT       | 350V  | 100nF |  |
| C2137   | ECA1CM100GB  | ELECT       | 16V   | 10μF  |  |
| C2138   | ECUV1H471KBX | S.M. CAP    | 50V   | 470pF |  |
| C2139   | ECUV1H221JCX | S.M. CAP    | 50V   | 220pF |  |
| C2140   | ECA1HM101GB  | ELECT       | 50V   | 100μF |  |
| C2141   | ECUV1H152JCX | S.M. CAP    | 50V   | 1.5pF |  |
| C2301   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C2302   | ECA1CM470GB  | ELECT       | 16V   | 47μF  |  |
| C2303   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C2304   | ECA1CM470GB  | ELECT       | 16V   | 47μF  |  |
| C3001   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3002   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3003   | ECA1CM470GB  | ELECT       | 16V   | 47μF  |  |
| C3005   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3006   | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C3007   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3008   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3009   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3010   | ECA1CM470GB  | ELECT       | 16V   | 47μF  |  |
| C3012   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3013   | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C3014   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3015   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3016   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3017   | ECA1CM470GB  | ELECT       | 16V   | 47μF  |  |
| C3019   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3020   | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C3021   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3022   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3023   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3024   | ECA1CM470GB  | ELECT       | 16V   | 47μF  |  |
| C3026   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3027   | ECJ3VB1C474K | ELECT       | 3.5KV | 470nF |  |
| C3028   | ECUV1H222JCX | S.M. CAP    | 50V   | 2.2nF |  |
| C3029   | ECA1HM101GB  | ELECT       | 50V   | 100μF |  |
| C3032   | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C3033   | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C3034   | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C3035   | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C3101   | ECUV1H104KBX | S.M. CAP    | 50V   | 270pF |  |
| C3102   | ECUV1H104KBX | S.M. CAP    | 50V   | 270pF |  |
| C3103   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3104   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3105   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3106   | ECUV1H561JCX | S.M. CAP    | 50V   | 560pF |  |
| C3107   | ECA1HM470GB  | ELECT       | 50V   | 47μF  |  |
| C3108   | ECA1HM470GB  | ELECT       | 50V   | 47μF  |  |
| C3111   | ECUV1H391JCX | S.M. CAP    | 50V   | 390pF |  |
| C3112   | ECUV1H271JCX | S.M. CAP    | 50V   | 270pF |  |
| C3401   | ECQM1H224J   | FILM        | 50V   | 220nF |  |

| Cct Ref                                | Parts Number  | Description          |       |       |      |  |
|--|---------------|----------------------|-------|-------|------|--|
| C3402                                  | ECUV1H101JCX  | S.M. CAP             | 50V   | 100pF |      |  |
| C3403                                  | ECA1HM101GB   | ELECT                | 50V   | 100μF |      |  |
| C3404                                  | ECQM1H224J    | FILM                 | 50V   | 220nF |      |  |
| C3405                                  | ECUV1H180JCX  | S.M. CAP             | 50V   | 18pF  |      |  |
| C3406                                  | ECUV1H271JCX  | S.M. CAP             | 50V   | 270pF |      |  |
| C3407                                  | ECUV1H271JCX  | S.M. CAP             | 50V   | 270pF |      |  |
| C3408                                  | ECA1HM101GB   | ELECT                | 50V   | 100μF |      |  |
| C3601                                  | ECA1HM101GB   | ELECT                | 50V   | 100μF |      |  |
| JSE28                                  | ECUV1H104K BX | S.M. CAP             | 50V   | 100μF |      |  |
| <b>TERMINALS AND LINKS</b>             |               |                      |       |       |      |  |
| JK2301                                 | JPJ841101320  | RCA / HEADPHONE JACK |       |       |      |  |
| JK3101                                 | TJB16673      | A.V. TERMINAL        |       |       |      |  |
| <b>SWITCHES</b>                        |               |                      |       |       |      |  |
| S801                                   | ESB92S11B     | SWITCH               |       |       |      |  |
| S1201                                  | EVQ23405R     | SWITCH               |       |       |      |  |
| S1202                                  | EVQ23405R     | SWITCH               |       |       |      |  |
| S1203                                  | EVQ23405R     | SWITCH               |       |       |      |  |
| S1204                                  | EVQ23405R     | SWITCH               |       |       |      |  |
| S1205                                  | EVQ23405R     | SWITCH               |       |       |      |  |
| <b>DIFFERENCES FOR MODEL TX-21MD4P</b> |               |                      |       |       |      |  |
| <b>MECHANICAL PARTS</b>                |               |                      |       |       |      |  |
| 8                                      | TKU8E00370    | BACK COVER           |       |       |      |  |
| 9                                      | A51ECQ51X01   | C.R.T.               |       |       |      |  |
| 10                                     | TKY8E170      | CABINET              |       |       |      |  |
| 11                                     | VP15005-35    | CRT FIXING SCREW     |       |       |      |  |
| 12                                     | TLK8E05143    | DEGAUSS COIL         |       |       |      |  |
| 13                                     | TNP8EE009BR   | E P.C.B.             |       |       |      |  |
| 14                                     | TQF8E2693     | MODEL LABEL          |       |       |      |  |
| 15                                     | TBM153022     | PANASONIC BADGE      |       |       |      |  |
| 16                                     | TBX8E041-1    | POWER BUTTON         |       |       |      |  |
| 18                                     | TNP8EY013AA   | Y P.C.B.             |       |       |      |  |
| <b>MISCELLANEOUS COMPONENTS</b>        |               |                      |       |       |      |  |
|  | TPC8E4674     | OUTER CARTON         |       |       |      |  |
|  | TPD8E606-1    | TOP CUSHION          |       |       |      |  |
|  | TPD8E607-1    | BOTTOM CUSHION       |       |       |      |  |
|  | ZTUZAE450A    | ANODE LEAD           |       |       |      |  |
| <b>I.C.s</b>                           |               |                      |       |       |      |  |
| IC850                                  | SE130N        | ERROR AMPLIFIER      |       |       |      |  |
| IC1103                                 | XGL2-01DP     | EAROM *              |       |       |      |  |
| <b>TRANSFORMERS</b>                    |               |                      |       |       |      |  |
| T801                                   | ETS39AG1K7AD  | TRANSFORMER          |       |       |      |  |
| <b>COILS</b>                           |               |                      |       |       |      |  |
| L552                                   | ELH5L4104     | COIL                 |       |       |      |  |
| <b>CRYSTALS</b>                        |               |                      |       |       |      |  |
| X2101                                  | 4730007158    | CRYSTAL              |       |       |      |  |
| <b>RESISTORS</b>                       |               |                      |       |       |      |  |
| R357                                   | ERDS1TJ104    | CARBON               | 0.5W  | 5%    | 100K |  |
| R358                                   | ERDS1TJ104    | CARBON               | 0.5W  | 5%    | 100K |  |
| R359                                   | ERDS1TJ104    | CARBON               | 0.5W  | 5%    | 100K |  |
| R363                                   | ERDS1TJ103    | CARBON               | 0.5W  | 5%    | 10K  |  |
| R364                                   | ERDS1TJ103    | CARBON               | 0.5W  | 5%    | 10K  |  |
| R365                                   | ERDS1TJ103    | CARBON               | 0.5W  | 5%    | 10K  |  |
| R369                                   | ERD25TJ123    | CARBON               | 0.25W | 5%    | 12K  |  |
| R370                                   | ERD25TJ272    | CARBON               | 0.25W | 5%    | 2K7  |  |
| R377                                   | ERQ1ABJP5R6S  | METAL                | 0.5W  | 5%    | 5R6  |  |
| R378                                   | ERJ6GEY0R00   | S.M.CARB             | 0.1W  | 5%    | 0    |  |
| R379                                   | ERJ6GEY0R00   | S.M.CARB             | 0.1W  | 5%    | 0    |  |
| R380                                   | ERJ6GEY0R00   | S.M.CARB             | 0.1W  | 5%    | 0    |  |
| R461                                   | ERW2PK2R2     | WOUND                | 2W    | 10%   | 2R2  |  |
| R702                                   | ERQ12HJ220    | METAL                | 0.5W  | 5%    | 22   |  |

| Cct Ref                                | Parts Number | Description      |       |       |      |  |
|--|--------------|------------------|-------|-------|------|--|
| <b>CAPACITORS</b>                      |              |                  |       |       |      |  |
| C365                                   | ECA1CM100GB  | ELECT            | 16V   | 10μF  |      |  |
| C551                                   | ECKC3D561J   | CERAMIC          | 2KV   | 10μF  |      |  |
| C555                                   | ECWH15H822J  | FILM             | 1500V | 8.2nF |      |  |
| C556                                   | ECQF4123JZH  | FILM             | 400V  | 12nF  |      |  |
| C559                                   | ECWF2474JBB  | FILM             | 500V  | 470nF |      |  |
| C811                                   | ECOS2GA151CB | ELECT            | 400V  | 150pF |      |  |
| <b>DIFFERENCES FOR MODEL TX-25MD4P</b> |              |                  |       |       |      |  |
| <b>MECHANICAL PARTS</b>                |              |                  |       |       |      |  |
| 8                                      | TKU8E00360   | BACK COVER       |       |       |      |  |
| 9                                      | A59ECF50X41  | C.R.T.           |       |       |      |  |
| 10                                     | TKY8E180     | CABINET          |       |       |      |  |
| 11                                     | VP17005-32   | CRT FIXING SCREW |       |       |      |  |
| 12                                     | TLK8E05138   | DEGAUSS COIL     |       |       |      |  |
| 13                                     | TNP8EE009BL  | E P.C.B.         |       |       |      |  |
| 14                                     | TQF8E2694    | MODEL LABEL      |       |       |      |  |
| 15                                     | TBM8E1728    | PANASONIC BADGE  |       |       |      |  |
| 16                                     | TBX8E042-1   | POWER BUTTON     |       |       |      |  |
| 17                                     | TSX8E0028    | POWER CORD       |       |       |      |  |
| 18                                     | TNP8EY012AA  | Y P.C.B.         |       |       |      |  |
| <b>MISCELLANEOUS COMPONENTS</b>        |              |                  |       |       |      |  |
|  | TPC8E4675    | OUTER CARTON     |       |       |      |  |
|  | TPD8E608-1   | TOP CUSHION      |       |       |      |  |
|  | TPD8E609     | BOTTOM CUSHION   |       |       |      |  |
|  | ZTUZAE550A   | ANODE LEAD       |       |       |      |  |
| <b>I.C.s</b>                           |              |                  |       |       |      |  |
| IC850                                  | SE140N       | ERROR AMPLIFER   |       |       |      |  |
| IC1103                                 | XGL2-01EP    | EAROM *          |       |       |      |  |
| <b>DIODES</b>                          |              |                  |       |       |      |  |
| D901                                   | MA165TA5     | DIODE            |       |       |      |  |
| D902                                   | MA165TA5     | DIODE            |       |       |      |  |
| D904                                   | MA165TA5     | DIODE            |       |       |      |  |
| D905                                   | MA165TA5     | DIODE            |       |       |      |  |
| D906                                   | RLS72TE-11   | DIODE            |       |       |      |  |
| <b>TRANSISTORS</b>                     |              |                  |       |       |      |  |
| Q905                                   | BC847B       | TRANSISTOR       |       |       |      |  |
| Q906                                   | BC847B       | TRANSISTOR       |       |       |      |  |
| Q907                                   | BC857B       | TRANSISTOR       |       |       |      |  |
| Q908                                   | 2SA1535ARLB  | TRANSISTOR       |       |       |      |  |
| Q909                                   | 2SC3944ARLB  | TRANSISTOR       |       |       |      |  |
| <b>TRANSFORMERS</b>                    |              |                  |       |       |      |  |
| T801                                   | ETS39AG1J7AD | TRANSFORMER      |       |       |      |  |
| <b>COILS</b>                           |              |                  |       |       |      |  |
| L552                                   | ELH5L4105    | COIL             |       |       |      |  |
| L554                                   | ELC18B102L   | COIL             |       |       |      |  |
| L901                                   | EXCELSA24T   | COIL             |       |       |      |  |
| L902                                   | EXCELSA24T   | COIL             |       |       |      |  |
| <b>CRYSTALS</b>                        |              |                  |       |       |      |  |
| X2101                                  | 4730007158   | CRYSTAL          |       |       |      |  |
| <b>RESISTORS</b>                       |              |                  |       |       |      |  |
| JA1                                    | ERJ6GEY0R00  | S.M.CARB         | 0.1W  | 5%    | 0    |  |
| JA2                                    | ERJ6GEY0R00  | S.M.CARB         | 0.1W  | 5%    | 0    |  |
| JA3                                    | ERJ6GEY0R00  | S.M.CARB         | 0.1W  | 5%    | 0    |  |
| R357                                   | ERDS1TJ114   | CARBON           | 0.5W  | 5%    | 110K |  |
| R358                                   | ERDS1TJ114   | CARBON           | 0.5W  | 5%    | 110K |  |
| R359                                   | ERDS1TJ114   | CARBON           | 0.5W  | 5%    | 110K |  |
| R363                                   | ERD25TJ103   | CARBON           | 0.25W | 5%    | 10K  |  |
| R364                                   | ERD25TJ103   | CARBON           | 0.25W | 5%    | 10K  |  |
| R365                                   | ERD25TJ103   | CARBON           | 0.25W | 5%    | 10K  |  |
| R369                                   | ERD25TJ472   | CARBON           | 0.25W | 5%    | 4K7  |  |

| Cct Ref                                | Parts Number | Description      |       |       |     |
|--|--------------|------------------|-------|-------|-----|
| R370                                   | ERJ6GEYJ102  | S.M.CARB         | 0.1W  | 5%    | 1K  |
| R377                                   | ERQ1ABJP5R1  | METAL            | 0.5W  | 5%    | 5R1 |
| R461                                   | ERW2PK1R2    | WOUND            | 2W    | 10%   | 1R2 |
| R702                                   | ERQ12HJ8R2   | FUSIBLE          | 0.5W  | 5%    | 8R2 |
| R913                                   | ERJ6GEYJ473  | S.M.CARB         | 0.1W  | 5%    | 47K |
| R914                                   | ERJ6GEYJ822  | S.M.CARB         | 0.1W  | 5%    | 8K2 |
| R915                                   | ERJ6GEYJ152  | S.M.CARB         | 0.1W  | 5%    | 1K5 |
| R916                                   | ERJ6GEYJ391  | S.M.CARB         | 0.1W  | 5%    | 390 |
| R919                                   | ERQ14AJW390  | FUSIBLE          | 0.25W | 5%    | 39  |
| R920                                   | ERQ14AJW390  | FUSIBLE          | 0.25W | 5%    | 39  |
| R921                                   | ERD25TJ471   | CARBON           | 0.25W | 5%    | 470 |
| R922                                   | ERD25TJ393   | CARBON           | 0.25W | 5%    | 39K |
| R923                                   | ERD25TJ393   | CARBON           | 0.25W | 5%    | 39K |
| R924                                   | ERDS1FJ390   | CARBON           | 0.5W  | 5%    | 39  |
| R925                                   | ERJ6GEY0R00  | S.M.CARB         | 0.1W  | 5%    | 0   |
| R926                                   | ERJ6GEY0R00  | S.M.CARB         | 0.1W  | 5%    | 0   |
| R927                                   | ERD25TJ471   | CARBON           | 0.25W | 5%    | 470 |
| R928                                   | ERD25TJ5R6   | CARBON           | 0.25W | 5%    | 5R6 |
| R929                                   | ERDS1FJ471   | CARBON           | 0.5W  | 5%    | 470 |
| R930                                   | ERD25TJ5R6   | CARBON           | 0.25W | 5%    | 5R6 |
| R931                                   | ERDS1FJ390   | CARBON           | 0.5W  | 5%    | 39  |
| R935                                   | ERQ14AJW3R9  | FUSIBLE          | 0.25W | 5%    | 3R9 |
| R936                                   | ERQ1CJP331   | FUSIBLE          | 1W    | 5%    | 330 |
| <b>CAPACITORS</b>                      |              |                  |       |       |     |
| C366                                   | ECA1CM100GB  | ELECT            | 16V   | 10µF  |     |
| C551                                   | ECKC3D152J   | CERAMIC          | 2KV   | 1.5nF |     |
| C554                                   | ECWF2H514J   | FILM             | 500V  | 1.5nF |     |
| C555                                   | ECWH15H103J  | FILM             | 1500V | 10nF  |     |
| C556                                   | ECQM4333JC   | FILM             | 400V  | 33nF  |     |
| C559                                   | ECWF2H684J   | FILM             | 500V  | 33nF  |     |
| C811                                   | ECOS2GG181NG | ELECT            | 400V  | 180µF |     |
| C902                                   | ECA1VM101GB  | ELECT            | 35V   | 100µF |     |
| C903                                   | ECUV1H472KBX | S.M. CAP         | 50V   | 4.7nF |     |
| C904                                   | ECUV1H472KBX | S.M. CAP         | 50V   | 4.7nF |     |
| C906                                   | ECUV1H471KBX | S.M. CAP         | 50V   | 470pF |     |
| C908                                   | ECUV1H151JCX | S.M. CAP         | 50V   | 150pF |     |
| C909                                   | ECKC2H472J   | CERAMIC          | 500V  | 4.7nF |     |
| C910                                   | ECKC2H472J   | CERAMIC          | 500V  | 4.7nF |     |
| C911                                   | ECUV1H151JCX | S.M. CAP         | 50V   | 150pF |     |
| C912                                   | ECEA2CU100   | ELECT            | 160V  | 10µF  |     |
| C913                                   | ECA1HM101GB  | ELECT            | 50V   | 100µF |     |
| C914                                   | ECA1HM101GB  | ELECT            | 50V   | 100µF |     |
| C916                                   | ECEA2CGE100  | ELECT            | 160V  | 10µF  |     |
| <b>DIFFERENCES FOR MODEL TX-28MD4P</b> |              |                  |       |       |     |
| <b>MECHANICAL PARTS</b>                |              |                  |       |       |     |
| 8                                      | TKU8E00350   | BACK COVER       |       |       |     |
| 9                                      | A66ECF50X41  | C.R.T.           |       |       |     |
| 10                                     | TKY8E190     | CABINET          |       |       |     |
| 11                                     | VP17005-32   | CRT FIXING SCREW |       |       |     |
| 12                                     | TLK8E05140   | DEGAUSS COIL     |       |       |     |
| 13                                     | TNP8EE009BM  | E P.C.B.         |       |       |     |
| 14                                     | TQF8E2695    | MODEL LABEL      |       |       |     |
| 15                                     | TBM173052    | PANASONIC BADGE  |       |       |     |
| 16                                     | TBX8E041-1   | POWER BUTTON     |       |       |     |
| 17                                     | TSX8E0027    | POWER CORD       |       |       |     |
| 18                                     | TNP8EY012AF  | Y P.C.B.         |       |       |     |
| <b>MISCELLANEOUS COMPONENTS</b>        |              |                  |       |       |     |
|  | TPC8E4685    | OUTER CARTON     |       |       |     |
|  | TPD8E639     | TOP CUSHION      |       |       |     |
|  | TPD8E640     | BOTTOM CUSHION   |       |       |     |
| I.C.s                                  | ZTUZAE550A   | ANODE LEAD       |       |       |     |
| IC850                                  | SE140N       | ERROR AMPLIFIER  |       |       |     |

| Cct Ref             | Parts Number | Description |       |       |      |
|---------------------|--------------|-------------|-------|-------|------|
| IC1103              | XGL2-01FP    | EAROM *     |       |       |      |
| <b>DIODES</b>       |              |             |       |       |      |
| D901                | MA165TA5     | DIODE       |       |       |      |
| D902                | MA165TA5     | DIODE       |       |       |      |
| D904                | MA165TA5     | DIODE       |       |       |      |
| D905                | MA165TA5     | DIODE       |       |       |      |
| D906                | RLS72TE-11   | DIODE       |       |       |      |
| <b>TRANSISTORS</b>  |              |             |       |       |      |
| Q905                | BC847B       | TRANSISTOR  |       |       |      |
| Q906                | BC847B       | TRANSISTOR  |       |       |      |
| Q907                | BC857B       | TRANSISTOR  |       |       |      |
| Q908                | 2SA1535ARLB  | TRANSISTOR  |       |       |      |
| Q909                | 2SC3944ARLB  | TRANSISTOR  |       |       |      |
| <b>TRANSFORMERS</b> |              |             |       |       |      |
| T801                | ETS39AG1J7AD | TRANSFORMER |       |       |      |
| <b>COILS</b>        |              |             |       |       |      |
| L552                | ELH5L4105    | COIL        |       |       |      |
| L554                | ELC18B102L   | COIL        |       |       |      |
| L901                | EXCELSA24T   | COIL        |       |       |      |
| L902                | EXCELSA24T   | COIL        |       |       |      |
| <b>RESISTORS</b>    |              |             |       |       |      |
| JA1                 | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%    | 0    |
| JA2                 | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%    | 0    |
| JA3                 | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%    | 0    |
| R357                | ERDS1TJ114   | CARBON      | 0.5W  | 5%    | 110K |
| R358                | ERDS1TJ114   | CARBON      | 0.5W  | 5%    | 110K |
| R359                | ERDS1TJ114   | CARBON      | 0.5W  | 5%    | 110K |
| R363                | ERD25TJ103   | CARBON      | 0.25W | 5%    | 10K  |
| R364                | ERD25TJ103   | CARBON      | 0.25W | 5%    | 10K  |
| R365                | ERD25TJ103   | CARBON      | 0.25W | 5%    | 10K  |
| R369                | ERD25TJ472   | CARBON      | 0.25W | 5%    | 4K7  |
| R370                | ERJ6GEYJ102  | S.M.CARB    | 0.1W  | 5%    | 1K   |
| R377                | ERQ1ABJP5R1  | METAL       | 0.5W  | 5%    | 5R1  |
| R461                | ERW2PK1R2    | WOUND       | 2W    | 10%   | 1R2  |
| R702                | ERQ12HJ8R2   | FUSIBLE     | 0.5W  | 5%    | 8R2  |
| R913                | ERJ6GEYJ473  | S.M.CARB    | 0.1W  | 5%    | 47K  |
| R914                | ERJ6GEYJ822  | S.M.CARB    | 0.1W  | 5%    | 8K2  |
| R915                | ERJ6GEYJ152  | S.M.CARB    | 0.1W  | 5%    | 1K5  |
| R916                | ERJ6GEYJ391  | S.M.CARB    | 0.1W  | 5%    | 390  |
| R919                | ERQ14AJW390  | FUSIBLE     | 0.25W | 5%    | 39   |
| R920                | ERQ14AJW390  | FUSIBLE     | 0.25W | 5%    | 39   |
| R921                | ERD25TJ471   | CARBON      | 0.25W | 5%    | 470  |
| R922                | ERD25TJ393   | CARBON      | 0.25W | 5%    | 39K  |
| R923                | ERD25TJ393   | CARBON      | 0.25W | 5%    | 39K  |
| R924                | ERDS1FJ390   | CARBON      | 0.5W  | 5%    | 39   |
| R925                | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%    | 0    |
| R926                | ERJ6GEY0R00  | S.M.CARB    | 0.1W  | 5%    | 0    |
| R927                | ERD25TJ471   | CARBON      | 0.25W | 5%    | 470  |
| R928                | ERD25TJ5R6   | CARBON      | 0.25W | 5%    | 5R6  |
| R929                | ERDS1FJ471   | CARBON      | 0.5W  | 5%    | 470  |
| R930                | ERD25TJ5R6   | CARBON      | 0.25W | 5%    | 5R6  |
| R931                | ERDS1FJ390   | CARBON      | 0.5W  | 5%    | 39   |
| R935                | ERQ14AJW3R9  | FUSIBLE     | 0.25W | 5%    | 3R9  |
| R936                | ERQ1CJP331   | FUSIBLE     | 1W    | 5%    | 330  |
| <b>CAPACITORS</b>   |              |             |       |       |      |
| C366                | ECA1CM100GB  | ELECT       | 16V   | 10µF  |      |
| C551                | ECKC3D122J   | CERAMIC     | 2KV   | 1.2nF |      |
| C554                | ECWF2H514J   | FILM        | 500V  |       |      |
| C555                | ECWH15H103J  | FILM        | 1500V | 10nF  |      |
| C556                | ECQM4333JC   | FILM        | 400V  | 33nF  |      |
| C559                | ECWF2H684J   | FILM        | 500V  | 33nF  |      |
| C811                | ECOS2GG181NG | ELECT       | 400V  | 180µF |      |
| C902                | ECA1VM101GB  | ELECT       | 35V   | 100µF |      |
| C903                | ECUV1H472KBX | S.M. CAP    | 50V   | 4.7nF |      |

| Cct Ref | Parts Number | Description |      |       |
|---------|--------------|-------------|------|-------|
| C904    | ECUV1H472KBX | S.M. CAP    | 50V  | 4.7nF |
| C906    | ECUV1H471KBX | S.M. CAP    | 50V  | 470pF |
| C908    | ECUV1H151JCX | S.M. CAP    | 50V  | 150pF |
| C909    | ECKC2H472J   | CERAMIC     | 500V | 4.7nF |
| C910    | ECKC2H472J   | CERAMIC     | 500V | 4.7nF |
| C911    | ECUV1H151JCX | S.M. CAP    | 50V  | 150pF |
| C912    | ECEA2CU100   | ELECT       | 160V | 10µF  |
| C913    | ECA1HM101GB  | ELECT       | 50V  | 100µF |
| C914    | ECA1HM101GB  | ELECT       | 50V  | 100µF |
| C916    | ECEA2CGE100  | ELECT       | 160V | 10µF  |

| Cct Ref | Parts Number | Description |  |  |
|---------|--------------|-------------|--|--|
|         |              |             |  |  |

# SCHEMATIC DIAGRAMS FOR MODELS

**TX-28MD4P / TX-25MD4P / TX-21MD4P**

**(EURO-4 CHASSIS)**

## IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturers' specified parts.

## NOTE

### 1. RESISTOR

All resistors are carbon  $\frac{1}{4}W$  resistor, unless marked otherwise.  
Unit of resistance is OHM ( $\Omega$ ) ( $k=1,000$ ,  $M=1,000,000$ )


### 2. CAPACITORS

All capacitors are ceramic 50V unless marked otherwise.  
Unit of capacitance is  $\mu F$  unless otherwise stated.


### 3. COIL

Unit of inductance is  $\mu H$ , unless otherwise stated.

### 4. TEST POINT




### 5. EARTH SYMBOL



### 6. VOLTAGE MEASUREMENT

Voltage is measured by a DC voltmeter.  
Measurement conditions are as follows:  
Power source AC 220V-240V, 50Hz  
Receiving Signal Colour Bar signal (RF)  
All customer controls Maximum position

### 7.




These schematic diagrams are the latest at time of printing and are subject to change without notice.

## REMARKS


- a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
- b. Do not short circuit the hot and cold circuits as electrical components may be damaged.
- c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
- d. Make sure to disconnect the power plug before removing the chassis.

## NOTE


1. The Power Supply Circuit contains a circuit area, which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits, except the Power Circuit, are COLD.

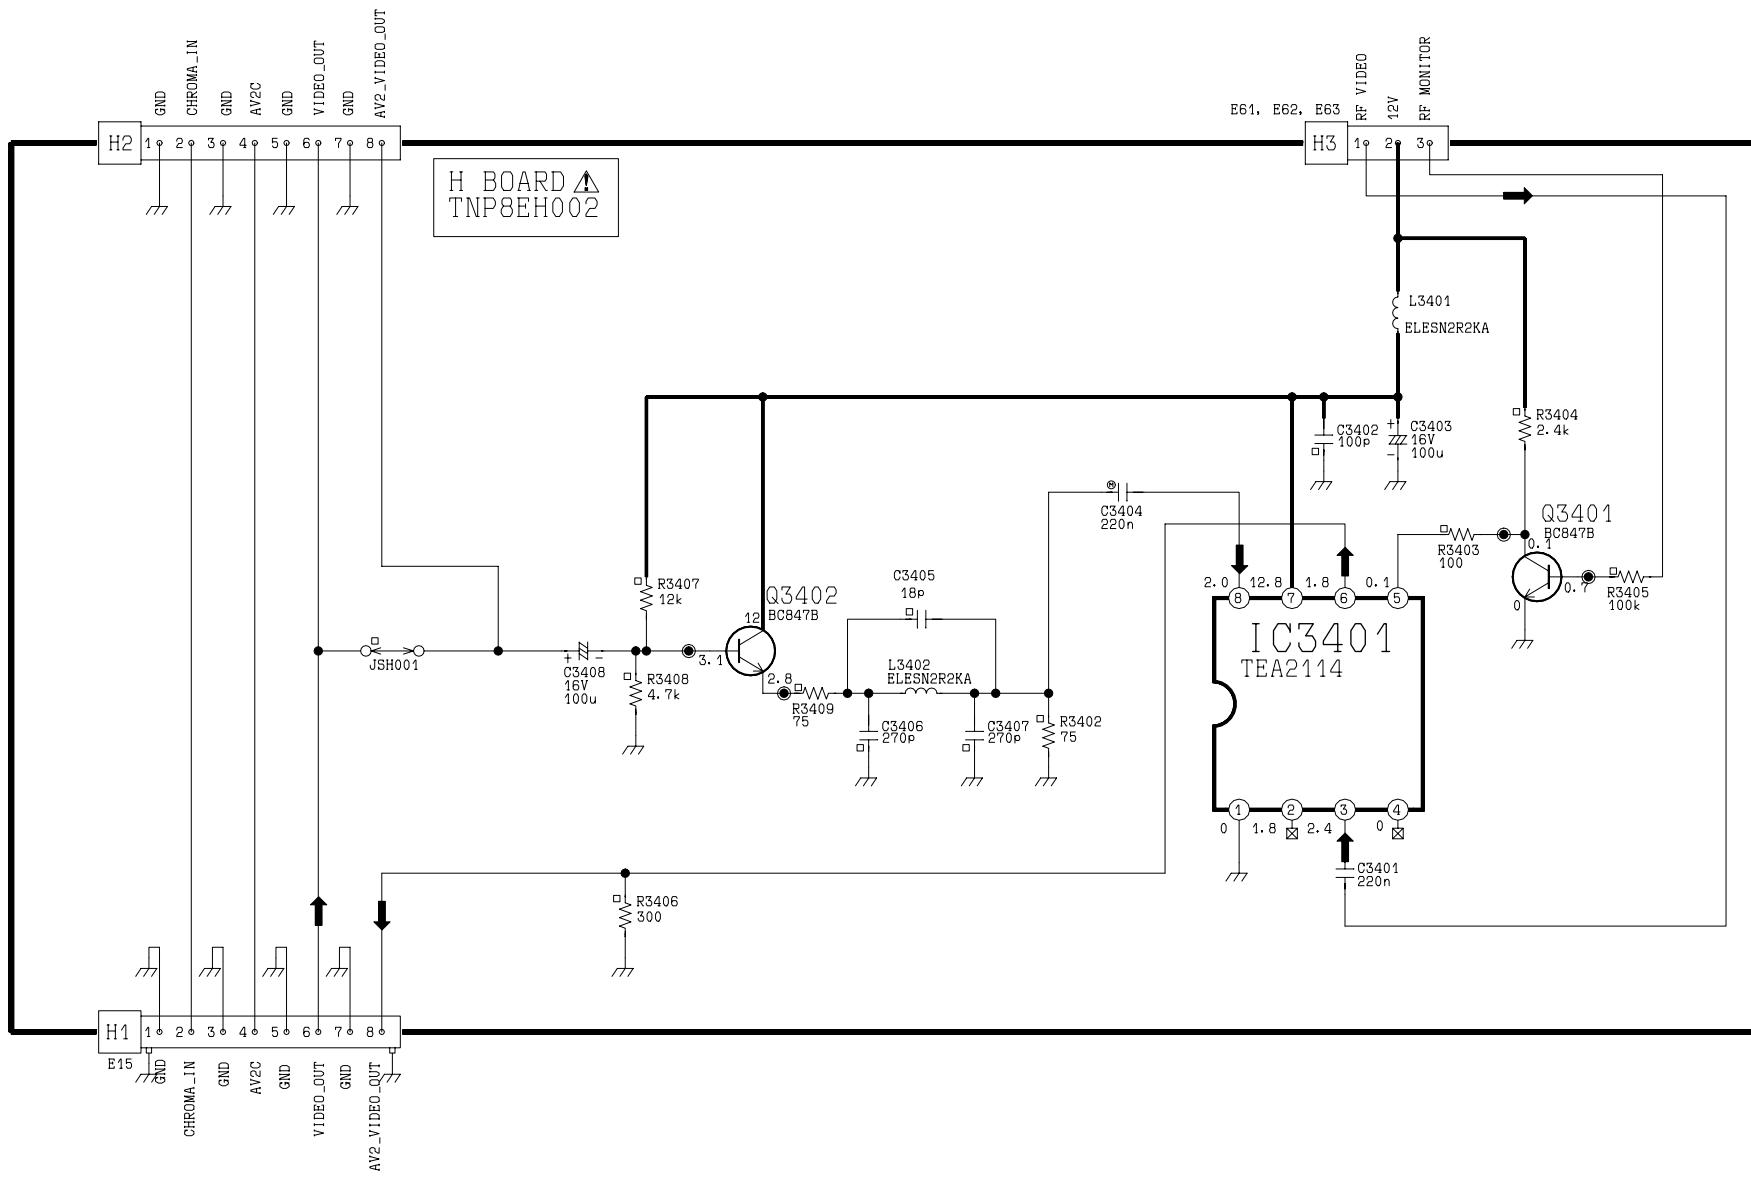


# E-BOARD TX-21MD4P

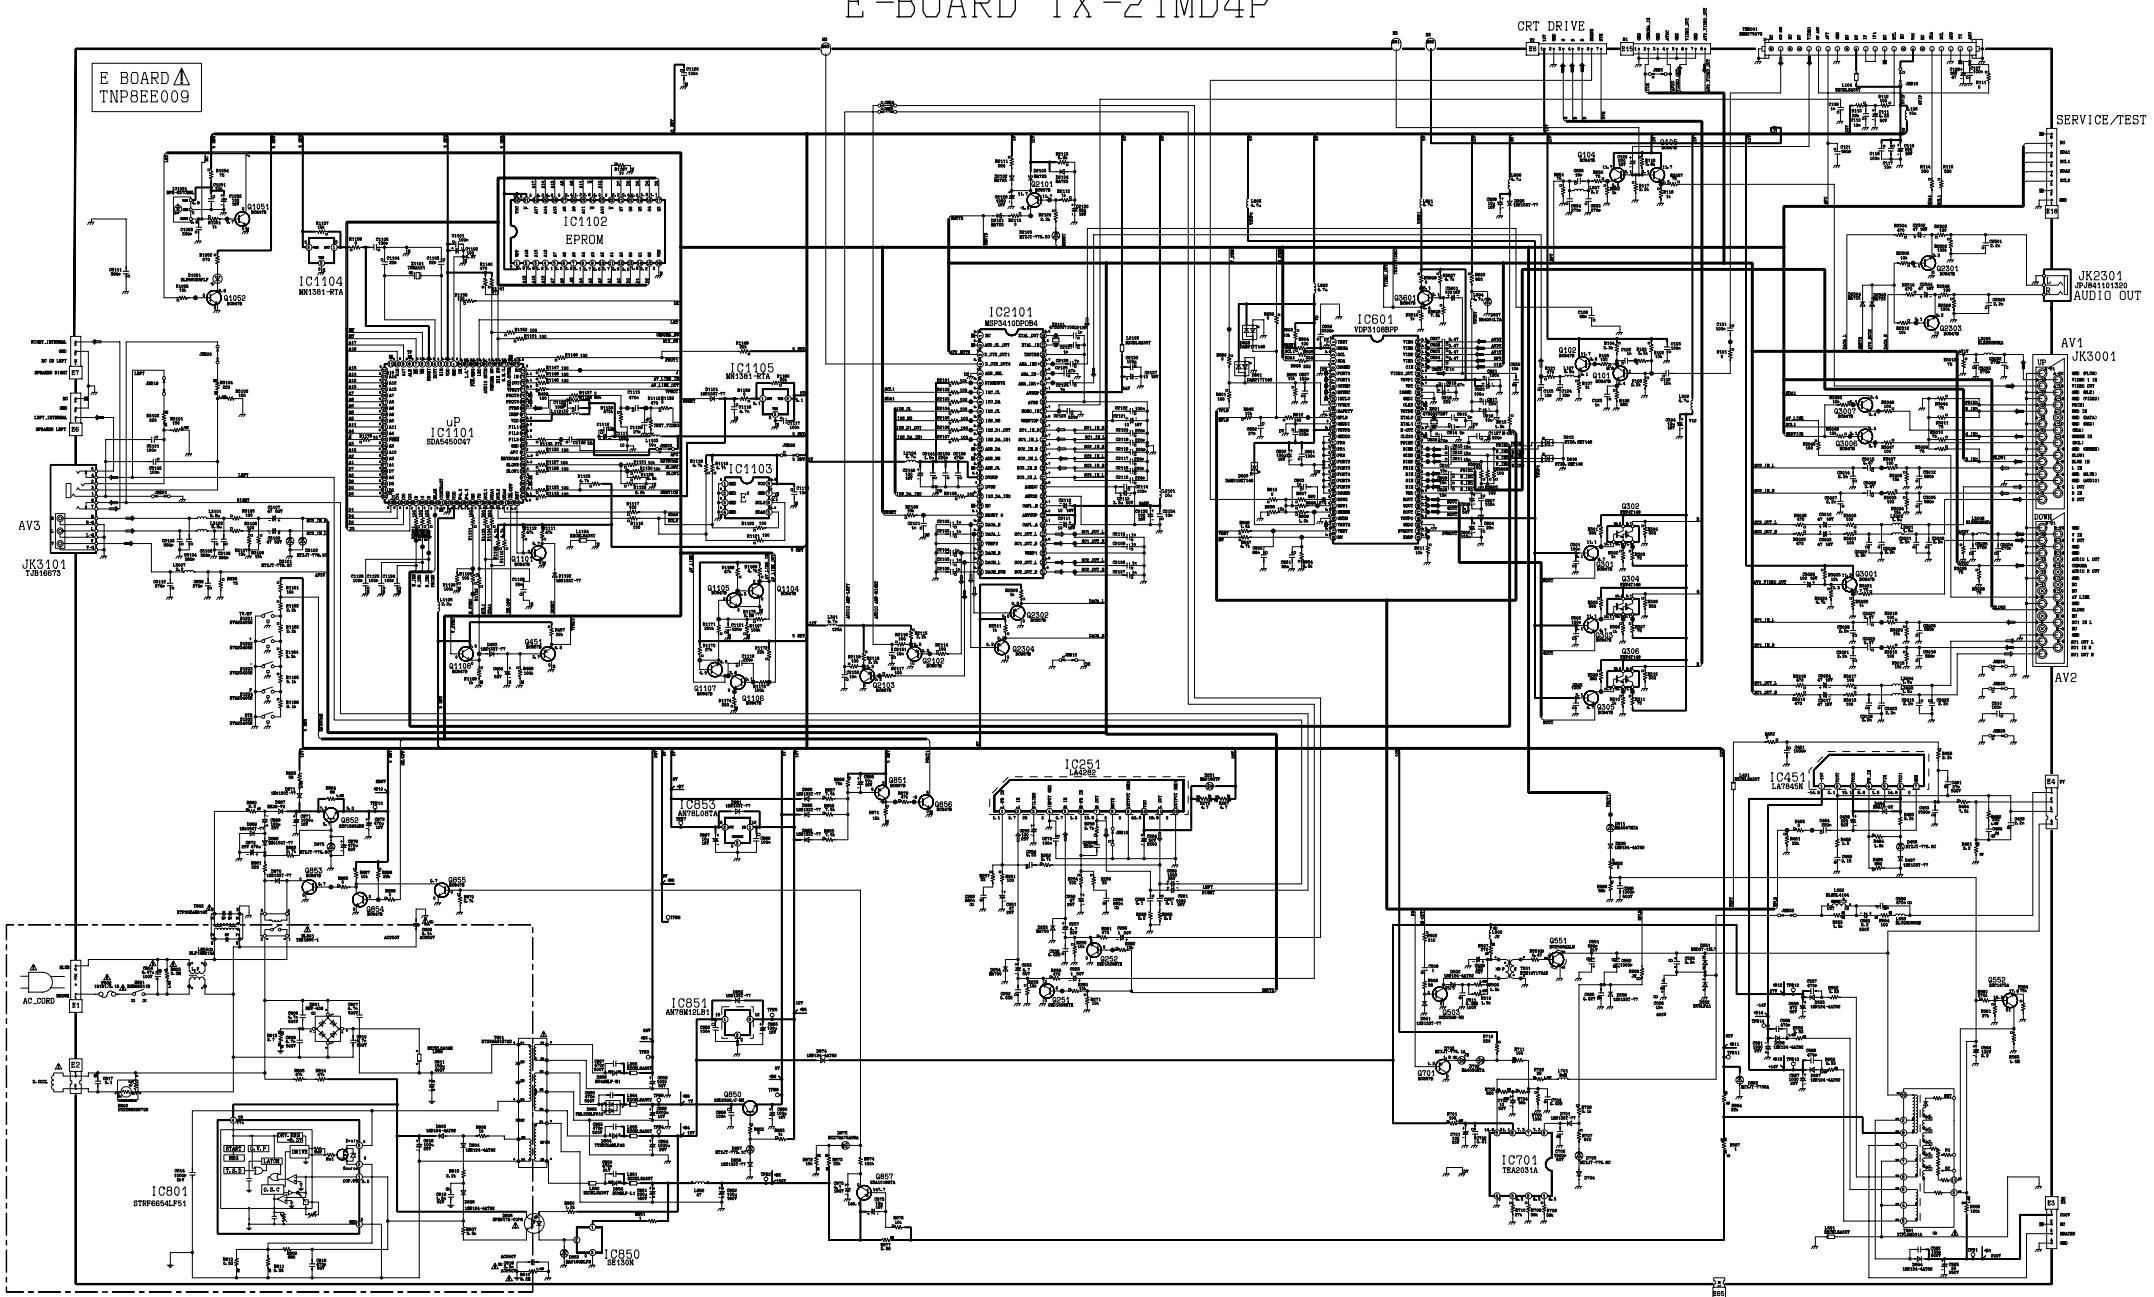

# E-BOARD TX-28MD4P / TX-25MD4P

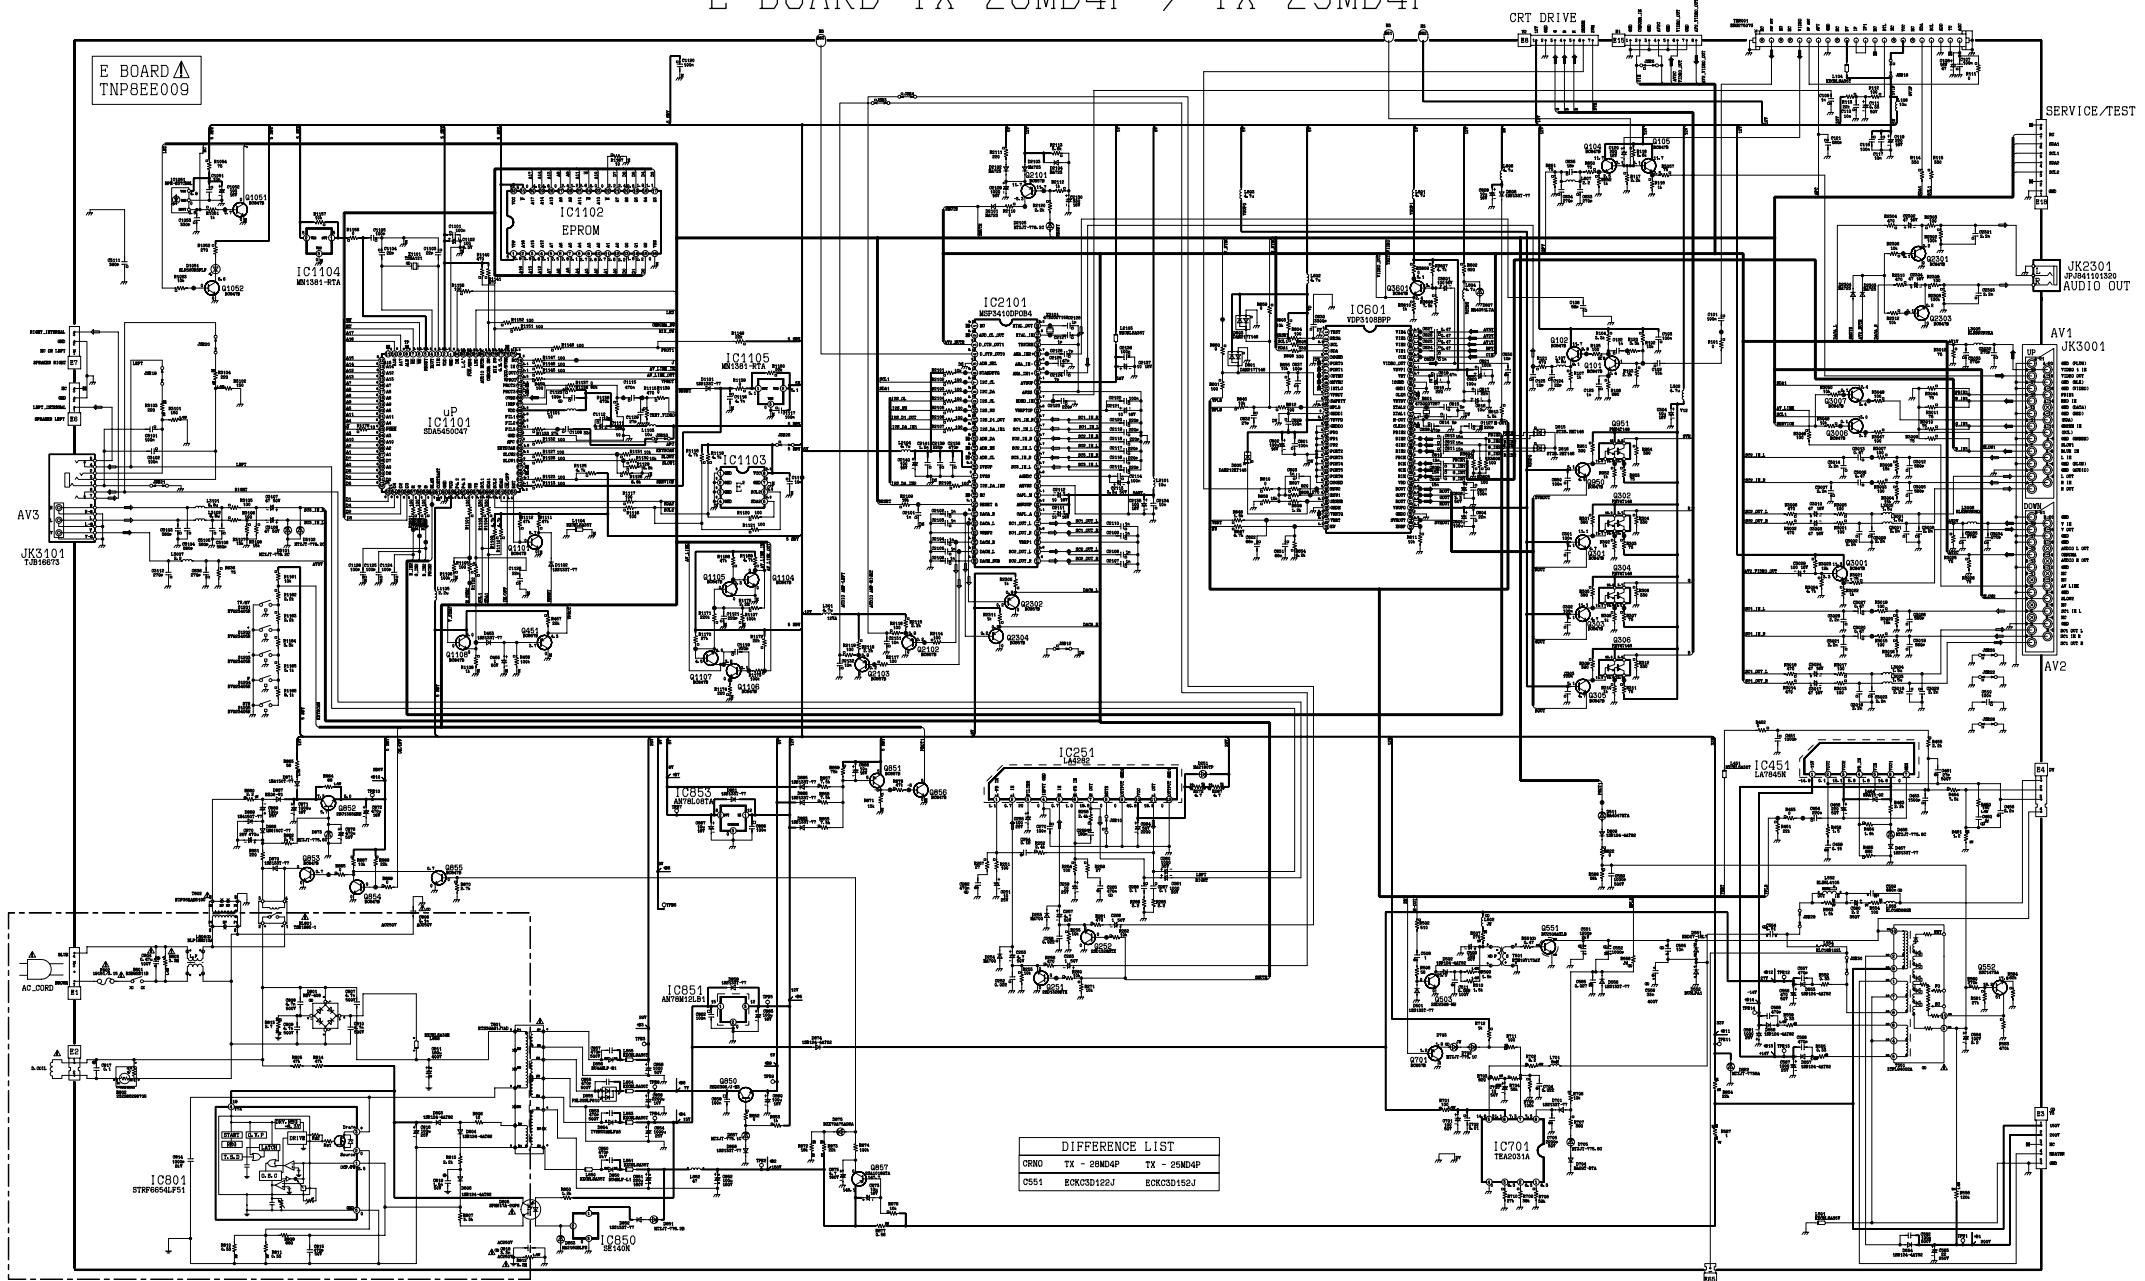


# Y-BOARD TX-28MD4P / TX-25MD4P

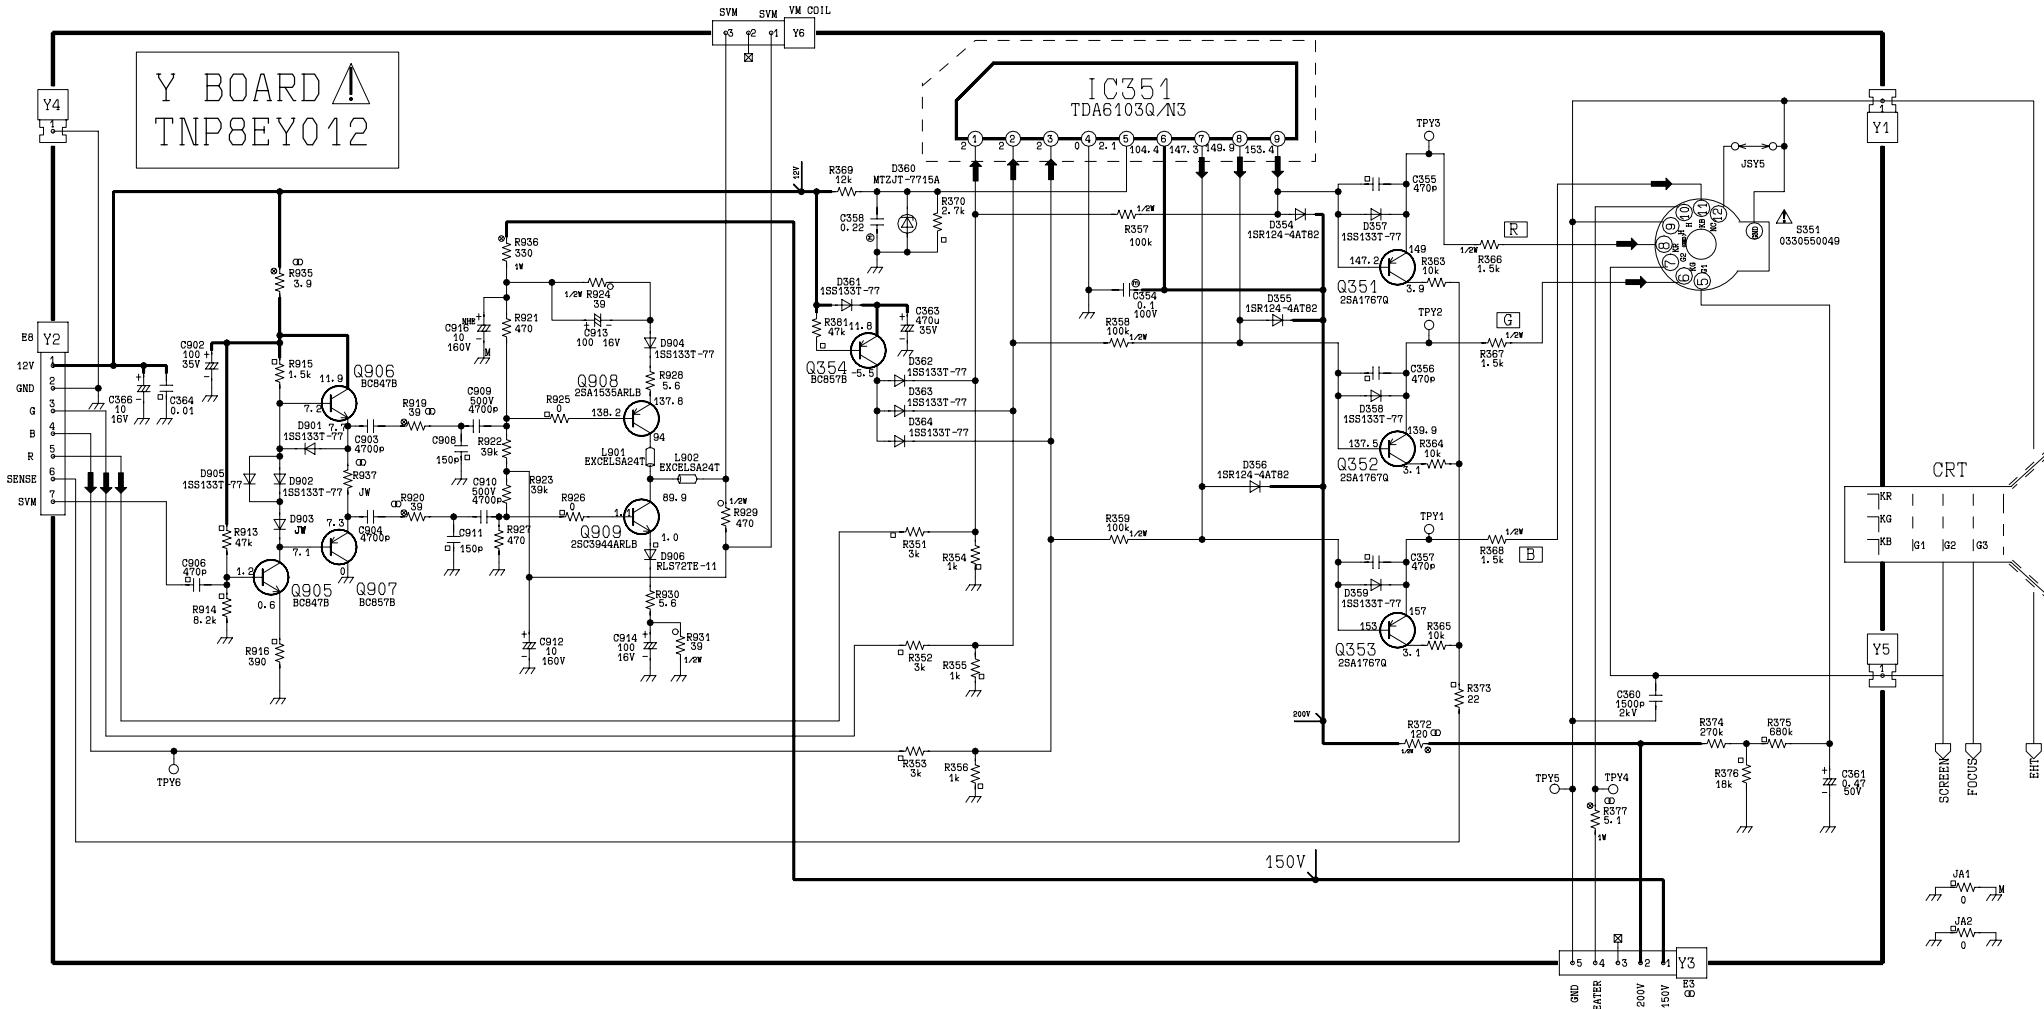

# Y-BOARD TX-21MD4P


Y BOARD   
TNP8EY013

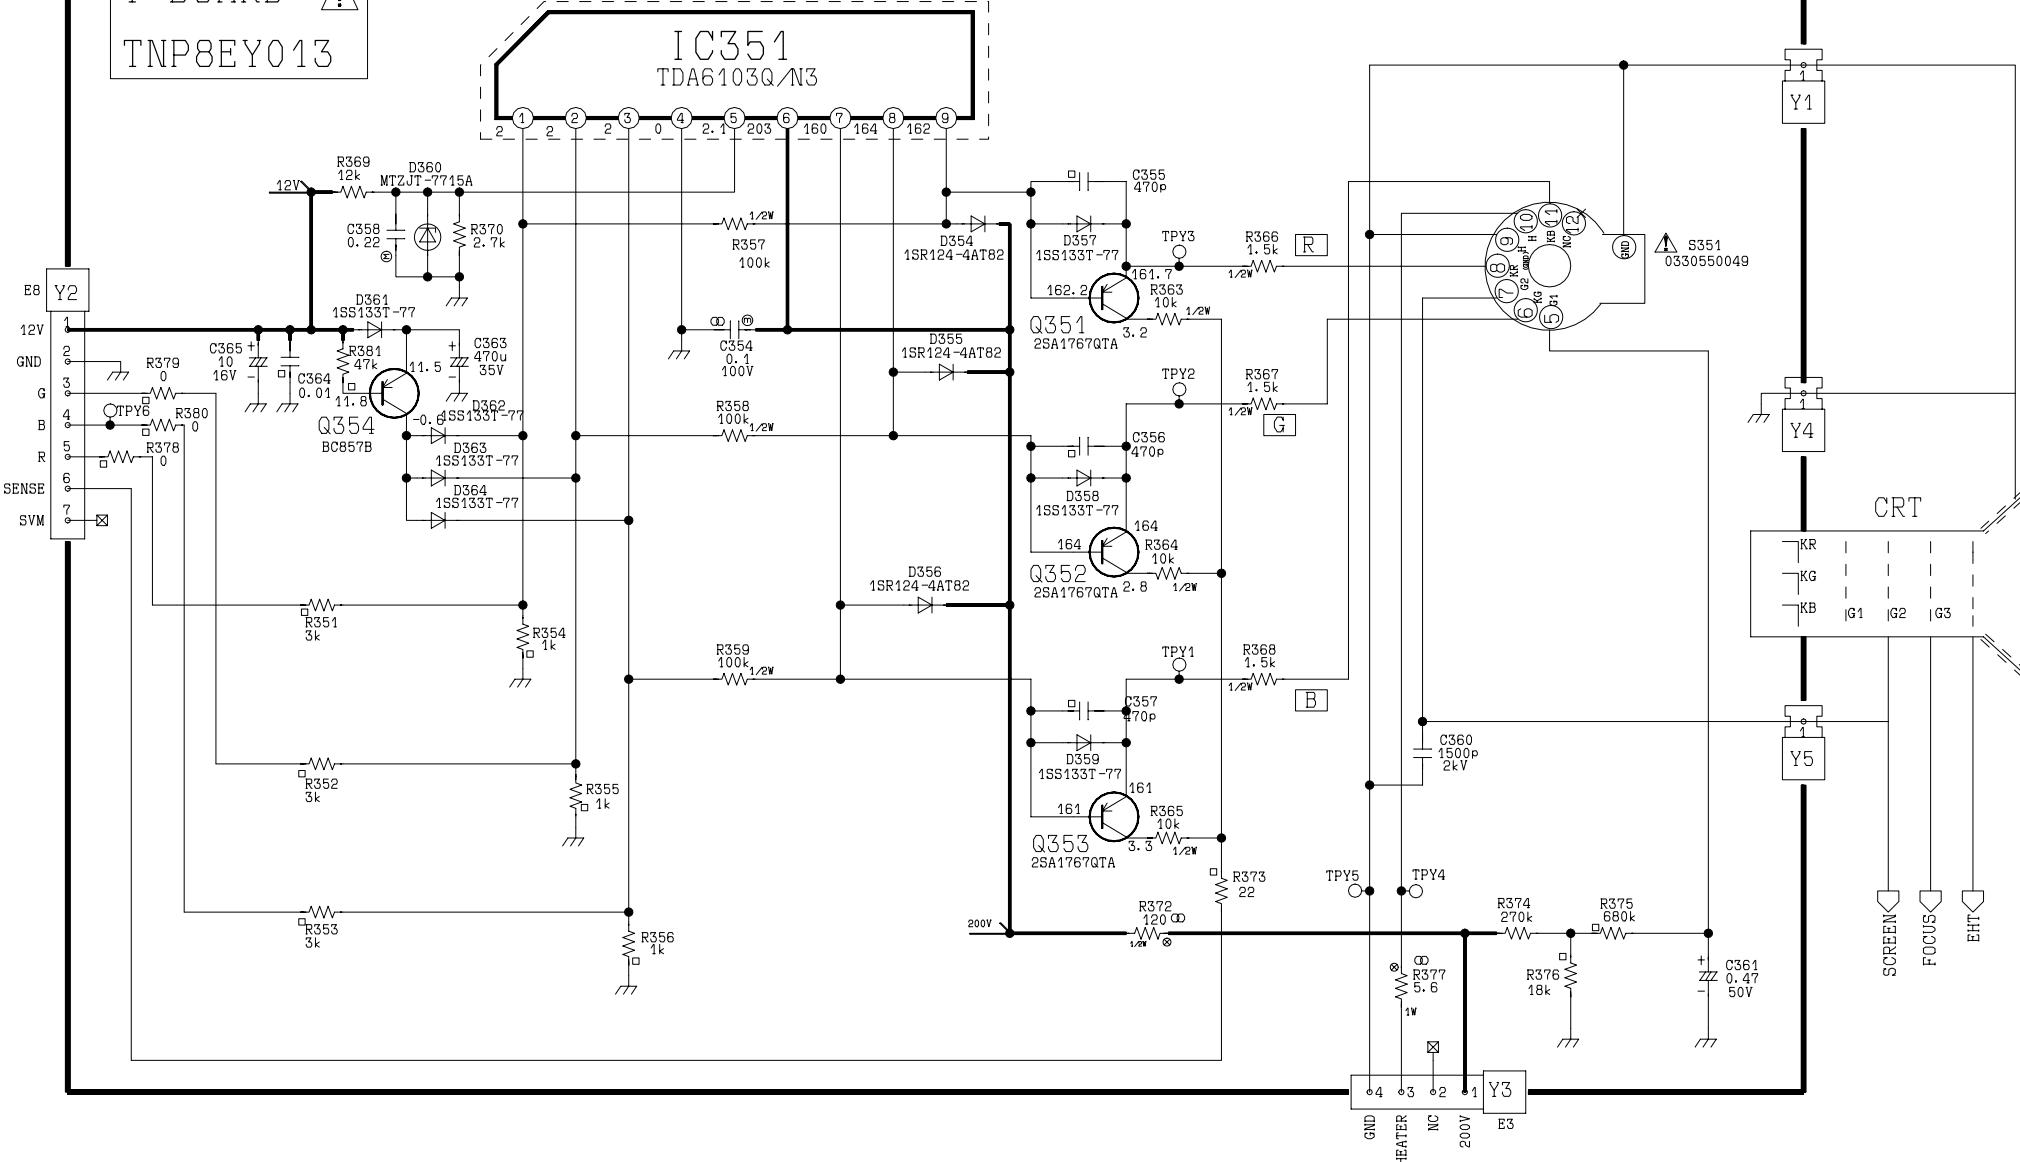



# Y - BOARD TNP8EY012

| TRANSISTORS |    |
|-------------|----|
| Q909        | E1 |
| Q908        | C2 |
| Q907        | F4 |
| Q906        | G3 |
| Q905        | F5 |
| Q354        | A7 |
| Q353        | G6 |
| Q352        | F6 |
| Q351        | F6 |
| DIODES      |    |
| D906        | F1 |
| D905        | G4 |
| D904        | D3 |
| D902        | G4 |
| D901        | G3 |
| D364        | C9 |
| D363        | C8 |
| D362        | B9 |
| D361        | B7 |
| D360        | D8 |
| D359        | G6 |
| D358        | E7 |
| D357        | F7 |
| D356        | G7 |
| D355        | F7 |
| D354        | G7 |
| TEST POINTS |    |
| TPY6        | B8 |
| TPY5        | D5 |
| TPY4        | E5 |
| TPY3        | F6 |
| TPY2        | E7 |
| TPY1        | G6 |
| IC'S        |    |
| IC351       | E8 |

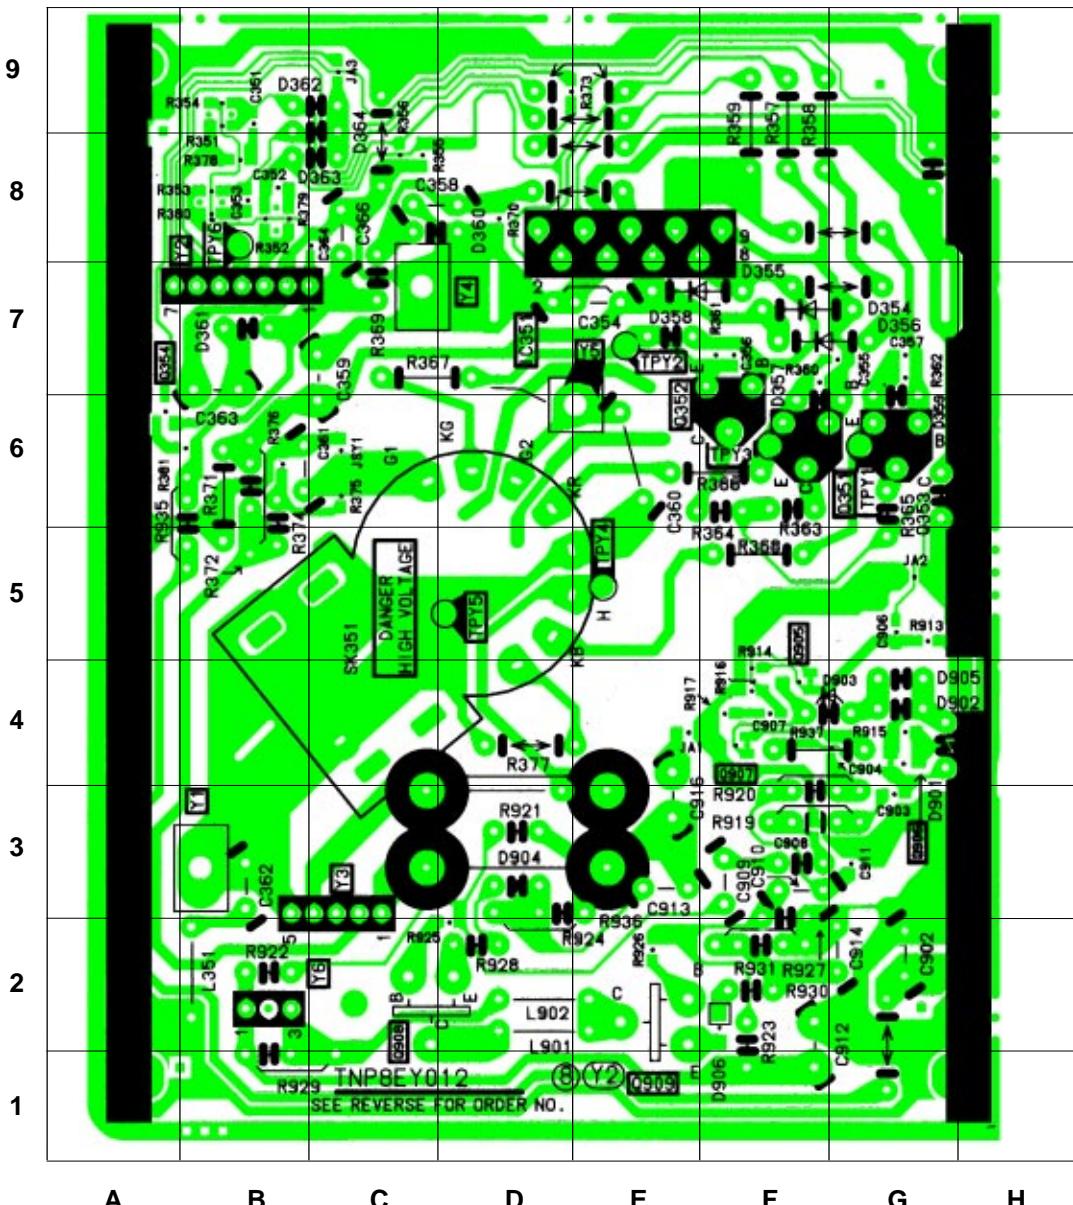

# Y - BOARD TNP8EY013

## DIODES

|      |    |
|------|----|
| D354 | G5 |
| D355 | F6 |
| D356 | G5 |
| D357 | G5 |
| D358 | F5 |
| D359 | G5 |
| D360 | C6 |
| D361 | B6 |
| D362 | D7 |
| D363 | D7 |
| D364 | D7 |

## TEST POINTS

|      |    |
|------|----|
| TPY1 | E4 |
| TPY2 | F5 |
| TPY3 | F4 |
| TPY4 | E3 |
| TPY5 | D3 |
| TPY6 | B6 |

## TRANSISTORS

|      |    |
|------|----|
| Q351 | G4 |
| Q352 | F4 |
| Q353 | G4 |
| Q354 | C7 |

## I.C'S

|       |    |
|-------|----|
| IC351 | E6 |
|-------|----|

