

TX-28SL20C Service Manual

Specifications

Parts List

Service Support

Service and repair of this product is supported by Panasonic's LUCI interface.

Safety

Block Diagrams

Service Information

Schematic Diagrams

This interface provides a link between the TV and a standard PC to allow a number of diagnostic and control functions to be performed.

For more details contact your local Panasonic company.

Exploded View

PCB Views

 BACK

EXIT

Service Manual



Colour Television

TX-28SL20C

EURO-4H Chassis

SPECIFICATIONS

| | |
|-----------------------------------|--|
| Power Source: | 220-240V a.c., 50Hz |
| Power Consumption: | 121W |
| Standby Power Consumption: | 1,4W |
| Aerial Impedance: | 75Ω unbalanced, Coaxial Type |
| Receiving System: | PAL-B/G, H, D/K, PAL-525/60 SECAM B/G, D/K M.NTSC NTSC (AV only) |
| Receiving Channels: | VHF E2-E12 VHF A-H (ITALY) VHF R3-R5 UHF E21-E69 CATV S1-S10 (M1-M10) CATV S21-S41 (HYPERBAND) |
| Intermediate Frequency: | 38,9MHz 33,16MHz, 33,4MHz 32,4MHz (A2 STEREO) 33,05MHz, 34,05MHz (NICAM) 34,47MHz (PAL) 34,5MHz, 34,65MHz (SECAM) |
| Video/Audio Terminals: | AUDIO MONITOR OUT AV1 IN AV1 OUT AV2 IN AV2 OUT High Voltage: 28kV ± 1kV Picture Tube: A66ECF50X82 66cm Audio Output: 2 x 15W (Music Power) 8Ω Impedance Remote Control 2 x R6 (UM3) Batteries |
| Accessories supplied: | Dimensions: Height: 596,5mm Width: 778mm Depth: 481mm Net Weight: 32kg |

Specifications are subject to change without notice.
Weights and dimensions shown are approximate.
NOTE: This Service Manual should be used in conjunction with the EURO-4H technical guide.

TECHNISCHE DATEN

| | |
|--------------------------------|--|
| Netzspannung: | 220-240V a.c., 50Hz |
| Leistungsaufnahme: | 121W |
| Standby | 1,4W |
| Leistungsaufnahme: | 75Ω asymmetrisch, Koaxial-Typ |
| Antennenimpedanz: | PAL-B/G, H, D/K, PAL-525/60 |
| Empfangssystem: | SECAM B/G, D/K M.NTSC NTSC (nur AV Eingang) |
| Empfangsbereiche: | VHF E2-E12 VHF A-H (ITALY) VHF R3-R5 UHF E21-E69 CATV S1-S10 (M1-M10) CATV S21-S41 (HYPERBAND) |
| Zwischenfrequenz: | 38,9MHz 33,16MHz, 33,4MHz 32,4MHz (A2 STEREO) 33,05MHz, 34,05MHz (NICAM) 34,47MHz (PAL) 34,5MHz, 34,65MHz (SECAM) |
| Video/Audio Anschlüsse: | AUDIO MONITOR OUT AV1 EINGANG AV1 AUSGANG AV2 EINGANG AV2 AUSGANG |
| | Audio (RCAx2) 500mV rms 1kΩ Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin) Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y: 1V p-p 75Ω (21 pin) C: 0,3V p-p 75Ω Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ Selectable Output (21 pin) |
| | Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ RGB (21 pin) Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y: 1V p-p 75Ω (21 pin) C: 0,3V p-p 75Ω Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ Wählbarer Ausgang 28kV ± 1kV A66ECF50X82 66cm 2 x 15W (Musikleistung) |
| Hochspannung: | 28kV ± 1kV |
| Bildrohre: | A66ECF50X82 66cm |
| Ton Ausgangsleistung: | 2 x 15W (Musikleistung) |
| Lautsprecher | 8Ω Impedanz |
| Mitgel. Zubehör: | Fernbedienung 2 x R6 (UM3) Batterien |
| Abmessungen: | Höhe: 596,5mm Breite: 778mm Tiefe: 481mm Gewicht: 32kg |

Änderungen der Technischen Daten vorbehalten.
Gewichte und Abmessungen sind Näherungsangaben.
Hinweis: Bitte verwenden Sie das Service Manual zusammen mit dem Technical Guide.

CONTENTS

| | |
|------------------------------|----|
| SAFETY PRECAUTIONS | 2 |
| SERVICE HINTS | 4 |
| SELF CHECK | 5 |
| ADJUSTMENT PROCEDURE | 6 |
| WAVEFORM PATTERN TABLE | 7 |
| ALIGNMENT SETTINGS | 8 |
| BLOCK DIAGRAMS | 10 |
| PARTS LOCATION | 14 |
| REPLACEMENT PARTS LIST | 15 |
| SCHEMATIC DIAGRAMS | 26 |
| CONDUCTOR VIEWS | 29 |

SAFETY PRECAUTIONS

GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the a.c. supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the a.c. outlet.
5. Potentials as high as 29kV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazard.

LEAKAGE CURRENT COLD CHECK

1. Unplug the a.c. cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered a.c. plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis the reading must be infinite.

INHALT

| | |
|--------------------------------|----|
| SICHERHEITSVORKEHRUNGEN | 2 |
| SERVICE HINWEISE | 4 |
| SELBSTDIAGNOSE | 5 |
| ABGLEICH | 6 |
| SIGNAL TABELLE | 7 |
| ABGLEICHTABELLE | 9 |
| SCHALTBILD BLOCK | 10 |
| EXPLOSIONSZEICHNUNG | 14 |
| ERSATZTEILLISTE | 15 |
| SCHALTBILD SCHEMA | 26 |
| ANSICHT DER LEITERBAHNEN | 29 |

SICHERHEITSVORKEHRUNGEN

ALLGEMEINE RICHTLINIEN

1. Es ist empfehlenswert einen Trenntransformator in die Stromversorgung zu schalten, bevor Reparaturen an einem Gerät vorgenommen werden, dessen Chassis unter Spannung steht.
2. Bei der Durchführung von Servicearbeiten dürfen die ursprünglichen Kabelanschlüsse nicht vertauscht werden. Dies gilt insbesondere für die Anschlüsse im Hochspannungsteil. Hat sich ein Kurzschluß ereignet, dann sind alle Teile, an denen Spuren von Überhitzung sichtbar sind, auszuwechseln.
3. Nach Beenden der Servicearbeiten ist sicherzustellen, daß alle Sicherheitsvorrichtungen, wie Isolationsstege, Isolationspapiere, Abschirmungen und Isolations -R-C- Glieder wieder richtig eingesetzt sind.
4. Wenn der Fernseher während längerer Zeit nicht in Betrieb gesetzt wird, sollte der Netzstecker aus der Netzsteckdose gezogen werden.
5. Im Betrieb sind Spannungen bis zu 29kV in diesem Gerät vorhanden. Die Inbetriebnahme des Fernsehers ohne aufgesetzte Rückwand bringt die Gefahr eines elektrischen Schläges von der Fernseher - Stromversorgung mit sich. Servicearbeiten solten daher auch nie durch Personen versucht werden, die nicht in vollem Umfang mit den Sicherheitsvorkehrungen beim Umgang mit Hochspannungsgeräten vertraut sind. Vor der Handhabung mit der Bildröhre ist die Anode der Bildrohre immer an dem Empfängerchassis zu entladen.
6. Nach Beenden der Servicearbeiten sind die folgenden Kriechstrom-Prüfungen durchzuführen, um den Kunden vor der Gefahr eines elektrischen Schläges zu schützen.

MESSUNG DES ISOLATIONSWIDERSTANDES IM ABGESCHALTETEN ZUSTAND

1. Den Netzstecker aus der Netzsteckdose ziehen und die beiden Steckerstifte kurzschließen.
2. Den Geräteschalter des Fernsehgerätes einschalten.
3. Mit einem Ohmmeter den Widerstandswert zwischen dem überbrückten Netzkabelstecker und jendem zugänglichen Metallteil am Gehäuse des Fernsehgerätes, wie Schraubenköpfen, Antennen, Achsen der Regler, Griffassungen usw. messen. Wenn ein zugängliches Metallteil keine Rückleitung zum Chassis hat, Muß die Anzeige unendlich betragen.

LEAKAGE CURRENT HOT CHECK

1. Plug the a.c. cord directly into the a.c. outlet. Do not use an isolation transformer for this check.
2. Connect a $2k\Omega$ 10W resistor in series with an exposed metallic part on the receiver and an earth, such as a water pipe.
3. Use an a.c. voltmeter with high impedance to measure the potential across the resistor.
4. Check each exposed metallic part and check the voltage at each point.
5. Reverse the a.c. plug at the outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 1,4 V rms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

X-RADIATION WARNING

HOT CHECK CIRCUIT

SCHALTUNGS AUFBAU FÜR PRUFUNG IM EINGESCHALTETEN ZUSTAND

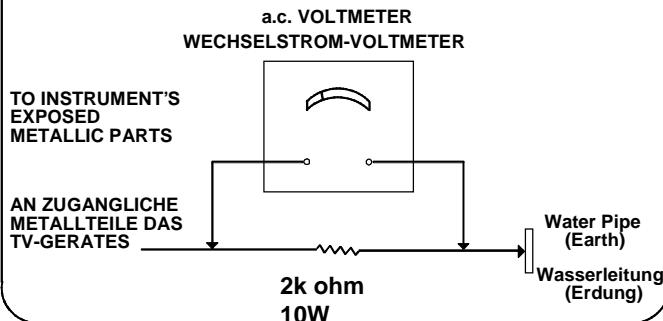


Fig. 1
Abb. 1

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service, ensure that the jig is capable of handling 29kV without causing X-Radiation.

NOTE : It is important to use an accurate periodically calibrated high voltage meter.

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate: $28kV \pm 1kV$. If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X-Radiation possibility, it is essential to use the specified tube.

MESSUNG DES KRIECHSTROMS IM EINGESCHALTETEN ZUSTAND

1. Den Netzstecker direkt in eine Netzteckdose stecken. Für diese Messung keinen Trenntransformator verwenden.
2. Einen $2k\Omega / 10W$ -Widerstand in Serie mit einem von außen zugänglichen Metallteil am Fernsehgerät und einer guten, Erdung z.B Wasserleitung, anschließen.
3. Ein Wechselstrom-Voltmeter mit einem Meßbereich von 1000 Ohm.Volt oder größer verwenden, um die Spannung über den Widerstand zu messen.
4. Jedes zugängliche Metallteil prüfen, und an jedem Punkt dies Spannung messen.
5. Den Netzstecker umgekehrt in die Steckdose stecken und jede der obigen Messungen wiederholen.
6. Die Spannung darf an keinem der Punkte 1,4V eff. überschreiten. Wird dieser Wert nicht eingehalten, besteht die Gefahr eines elektrischen Schläges, und das Fernsehgerät sollte daher repariert und nachgeprüft werden, bevor es an den Kunden zurückgegeben wird.

RÖNTGENSTRÄHLUNG ACHTUNG :

1. Potentielle Quellen von Röntgenstrahlung in Fernsehgeräten sind das Hochspannungsteil und die Bildröhre.
2. Bei Verwendung eines Bildröhren-Prüfgerätes für den Service ist sicherzustellen, daß es für die Belastung von 29kV geeignet ist, ohne daß eine Röntgenstrahlung verursacht wird.

ANMERKUNG : Es ist wichtig, daß ein präzises, regelmäßig geprüftes Voltmeter verwendet wird.

1. Helligkeit auf Minimum stellen.
2. Die Hochspannung messen. Die Anzeige des Instrumentes sollte: $28kV \pm 1kV$. Falls die Anzeige diese Toleranzgrenzen überschreitet, ist die sofortige Behebung nötig, um die Möglichkeit vorzeitigen Komponentenausfalls zu verhindern.
3. Um die Möglichkeit von Röntgenstrahlung zu begrenzen, ist es wichtig, daß nur die vorgeschriebene Bildröhre verwendet wird.

SERVICE HINTS

HOW TO REMOVE THE REAR COVER

1. Remove the 11 screws as shown in Fig. 2.



SERVICE HINWEISE

ENTFERNEN DER GERÄTERÜCKWAND

1. Die 11 Schrauben entfernen, siehe Abb. 2.

LOCATION OF CONTROLS

LAGE DER EINSTELLREGLER

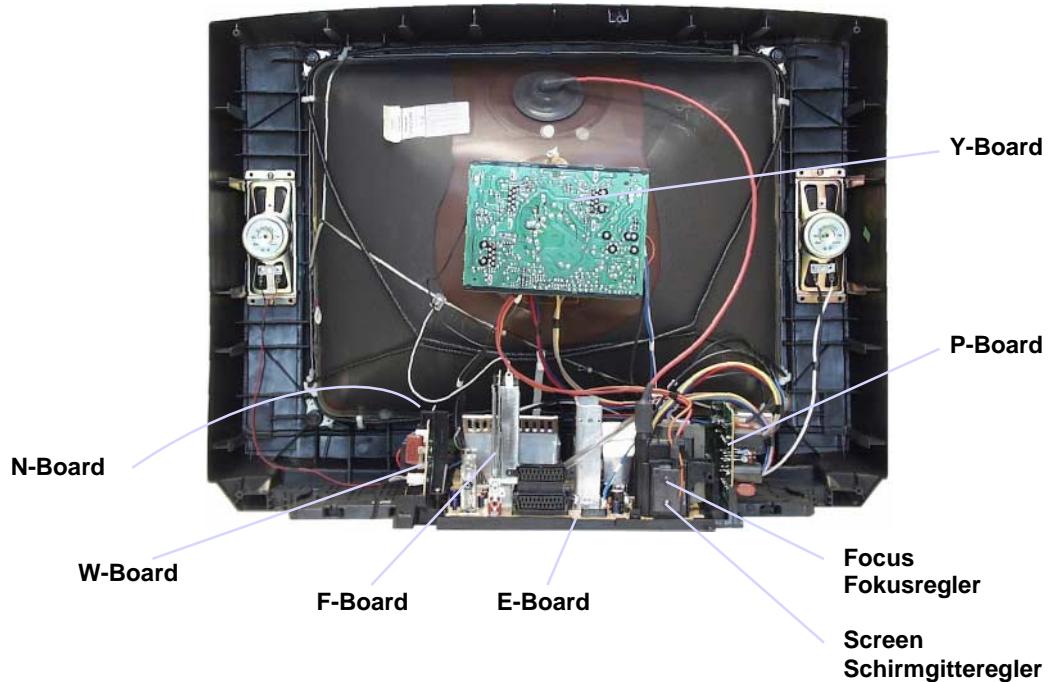


Fig. 3

Abb. 3

SELF CHECK

1. Self-check is used to automatically check the bus lines and hexadecimal code of the TV set.
2. To get into the Self-Check mode press the down (-/v) button on the customer controls at the front of the set, at the same time pressing the **STATUS** button on the remote control, and the screen will show :-

SELBSTDIAGNOSE

1. Die Selbstdiagnose dient zum automatischen Prüfen der Bus-Leitungen sowie des Hexadezimalcodes des FS-Geräts. Zum Umschalten auf Selbstdiagnose zunächst die Taste "**STATUS**" auf der Fernbedienung und gleichzeitig die-Taste am Bedienteil des FS-Gerätes drücken (-/v), auf dem Bildschirm erscheint hierauf :-
2. Nach der Selbstdiagnose wird das Gerät automatisch auf sämtliche werksseitigen Standardeinstellungen zurückgesetzt :-

| | | | |
|---------|------|-----|------|
| VPC | O.K. | PCB | O.K. |
| CIP | O.K. | Cab | O.K. |
| SRC | O.K. | | |
| DDP | O.K. | | |
| TUN | O.K. | | |
| E2 | O.K. | | |
| MSP | O.K. | | |
| DPL | -- | | |
| OPTION1 | 3D | | |
| OPTION2 | 1C | | |
| OPTION3 | 1D | | |
| OPTION4 | 40 | | |
| OPTION5 | CF | | |
| OPTION6 | A1 | | |

If the CCU ports have been checked and found to be incorrect or not located then " -- " will appear in place of "O.K.". Wenn der Hauptprozessor (CCU) an den Anschlüssen einen Fehler erkennt, oder der entsprechende Anschluss nicht belegt ist, zeigt die entsprechende Position " -- " anstelle von OK an.

Service Aids

To aid in the service of our current chassis there are a number of Service Aids which have been made available.

- **LUCI** interface kit (Linked Utility Computer Interface)
Part number: TZS6EZ002

This contains interface and cables for connecting TV service connector and a PC as well as diagnostic software. As new models are introduced upgrade software will become available.

- **VICI** (Visual Interactive Computer Information)
These C.D.'s contain multimedia documentation providing quick access to service information.
Part No. TZS7EZ006, TZS7EZ005 & TZS8EZ001
1. Service Manuals
2. Instruction Books
3. Technical Information

- **TASMIN** (Technically Advanced System for Multimedia Interactive Notes)
As well as providing a first step towards more interactive training this product also achieves quick access to Technical Information.

- To assist in servicing of the F-board, an extension lead kit is available, part no. TZS9EK008.

Service-Hilfen

Zur Unterstützung der Servicearbeiten stehen weitere Hilfsmittel zur Verfügung.

- **LUCI** interface kit (PC-unterstütztes Diagnosesystem)
Bestell-Nr.: TZS6EZ002
Es beinhaltet ein Interface, die Anschlusskabel zum FS-Gerät und die Diagnose-Software. Bei Einführung von neuen Modellen ist ein Update der Software jederzeit möglich.
- **VICI** (Interaktive CD-ROM) mit schnellem Zugriff auf Serviceinformationen.
Bestell-Nr.: TZS7EZ006, TZS7EZ005 & TZS8EZ001
1. Service Manuals
2. Bedienungsanleitungen
3. Technical Information
- **TASMIN** (Technisch erweitertes System für interaktive Multimedia-Hinweise und Notizen)
Genauso wie dieses Produkt einen ersten Schritt in Richtung erweitertes interaktives Training bereitstellt, ermöglicht es einen noch schnelleren Zugang zu technischen Informationen.
- Um Servicearbeiten auf dem F-Bord durchzuführen, steht ein Satz Verlängerungskabel unter der Bestellnummer TZS9EK008 zur Verfügung.



ADJUSTMENT PROCEDURE

| Item/Preparation | Adjustments | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|-----------|-------|------------|-------|------------|-------|-------|-------|-----------|----|-------|------|------------|----|-------|------|-----------|----|-------|----|-----------|---|-------|------|------------|----|-------|----|-----------|---|-------|------|-----------|----|-------|------|------------|----|-------|----|-----------|-----|-------|-----|------------|----|-------|----|
| +B SET-UP <ol style="list-style-type: none"> Receive a Greyscale signal. Set the controls:- Brightness: Minimum Contrast: Minimum Volume: Minimum | <ol style="list-style-type: none"> Set the +B voltage up as follows:- Adjust R811 so that B2 shows $148V \pm 1V$ Confirm the following voltages. <table> <tr><td>B9</td><td>5</td><td>\pm</td><td>0,25V</td><td>B10</td><td>5</td><td>\pm</td><td>0,25V</td></tr> <tr><td>B5</td><td>12</td><td>\pm</td><td>0,5V</td><td>B11</td><td>33</td><td>\pm</td><td>1,5V</td></tr> <tr><td>B4</td><td>16</td><td>\pm</td><td>1V</td><td>B7</td><td>8</td><td>\pm</td><td>0,5V</td></tr> <tr><td>B12</td><td>26</td><td>\pm</td><td>2V</td><td>B8</td><td>6</td><td>\pm</td><td>0,5V</td></tr> <tr><td>B3</td><td>36</td><td>\pm</td><td>1,5V</td><td>B13</td><td>13</td><td>\pm</td><td>1V</td></tr> <tr><td>B1</td><td>205</td><td>\pm</td><td>10V</td><td>B14</td><td>14</td><td>\pm</td><td>1V</td></tr> </table> | B9 | 5 | \pm | 0,25V | B10 | 5 | \pm | 0,25V | B5 | 12 | \pm | 0,5V | B11 | 33 | \pm | 1,5V | B4 | 16 | \pm | 1V | B7 | 8 | \pm | 0,5V | B12 | 26 | \pm | 2V | B8 | 6 | \pm | 0,5V | B3 | 36 | \pm | 1,5V | B13 | 13 | \pm | 1V | B1 | 205 | \pm | 10V | B14 | 14 | \pm | 1V |
| B9 | 5 | \pm | 0,25V | B10 | 5 | \pm | 0,25V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B5 | 12 | \pm | 0,5V | B11 | 33 | \pm | 1,5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B4 | 16 | \pm | 1V | B7 | 8 | \pm | 0,5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B12 | 26 | \pm | 2V | B8 | 6 | \pm | 0,5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B3 | 36 | \pm | 1,5V | B13 | 13 | \pm | 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B1 | 205 | \pm | 10V | B14 | 14 | \pm | 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cut-Off / Ug2 Test <ol style="list-style-type: none"> Receive a Greyscale signal. Degauss the tube externally. Set the TV into Service Mode 1. Select Cutoff mode. | <p>To adjust Cutoff connect an oscilloscope to the Blue cathode. Press "STR" and adjust "cutoff" value using the "Yellow" and "Blue" buttons until the black level is $160V \pm 5V$, press "STR" to store the value. Remove the oscilloscope.</p> <p>Select Ug2 adjustment and adjust the screen VR until the display shows "O.K."</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
















ABGLEICH

| Vorbereitungen | Abgleich | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|-----------|-------|------------|-------|------------|-------|-------|-------|-----------|----|-------|------|------------|----|-------|------|-----------|----|-------|----|-----------|---|-------|------|------------|----|-------|----|-----------|---|-------|------|-----------|----|-------|------|------------|----|-------|----|-----------|-----|-------|-----|------------|----|-------|----|
| +B - Abgleich <ol style="list-style-type: none"> Testbild empfangen. Helligkeit auf: Minimum Kontrast auf: Minimum Lautstärke: Minimum | <ol style="list-style-type: none"> Mit R811 muß die B2 auf $148V \pm 1V$ eingestellt werden. Folgende Spannungen sind zu überprüfen. <table> <tr><td>B9</td><td>5</td><td>\pm</td><td>0,25V</td><td>B10</td><td>5</td><td>\pm</td><td>0,25V</td></tr> <tr><td>B5</td><td>12</td><td>\pm</td><td>0,5V</td><td>B11</td><td>33</td><td>\pm</td><td>1,5V</td></tr> <tr><td>B4</td><td>16</td><td>\pm</td><td>1V</td><td>B7</td><td>8</td><td>\pm</td><td>0,5V</td></tr> <tr><td>B12</td><td>26</td><td>\pm</td><td>2V</td><td>B8</td><td>6</td><td>\pm</td><td>0,5V</td></tr> <tr><td>B3</td><td>36</td><td>\pm</td><td>1,5V</td><td>B13</td><td>13</td><td>\pm</td><td>1V</td></tr> <tr><td>B1</td><td>205</td><td>\pm</td><td>10V</td><td>B14</td><td>14</td><td>\pm</td><td>1V</td></tr> </table> | B9 | 5 | \pm | 0,25V | B10 | 5 | \pm | 0,25V | B5 | 12 | \pm | 0,5V | B11 | 33 | \pm | 1,5V | B4 | 16 | \pm | 1V | B7 | 8 | \pm | 0,5V | B12 | 26 | \pm | 2V | B8 | 6 | \pm | 0,5V | B3 | 36 | \pm | 1,5V | B13 | 13 | \pm | 1V | B1 | 205 | \pm | 10V | B14 | 14 | \pm | 1V |
| B9 | 5 | \pm | 0,25V | B10 | 5 | \pm | 0,25V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B5 | 12 | \pm | 0,5V | B11 | 33 | \pm | 1,5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B4 | 16 | \pm | 1V | B7 | 8 | \pm | 0,5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B12 | 26 | \pm | 2V | B8 | 6 | \pm | 0,5V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B3 | 36 | \pm | 1,5V | B13 | 13 | \pm | 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B1 | 205 | \pm | 10V | B14 | 14 | \pm | 1V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Cut-Off / Ug2 Test <ol style="list-style-type: none"> Testbild empfangen. Bildröhre entmagnetisieren. Service-Mode 1 anwählen. Im Service-Mode den Abgleichpunkt Cutoff DC-Mode wählen. | <p>Einen Oszilloskop an die blaue Katode der Bildröhre anschliessen. STR-Taste drücken und Mit der gelben und blauen Taste den CUT-OFF Wert auf $160V \pm 5V$ abgleichen und mit der STR-Taste abspeichern. Den Oszilloskop entfernen und den Ug2 Test aufrufen. Den Abgleichwert solange ändern, bis OK auf dem Bildschirm erscheint. Den Wert abspeichern.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

WAVEFORM PATTERN TABLE

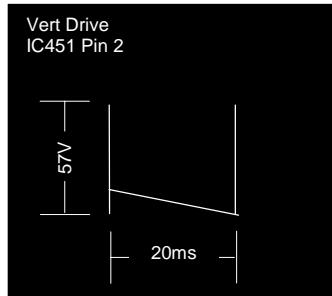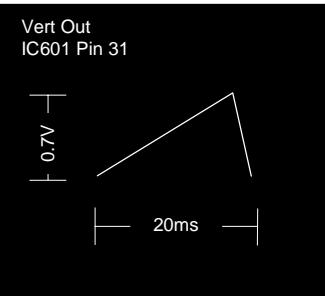


SIGNAL TABELLE

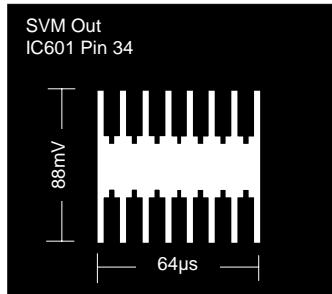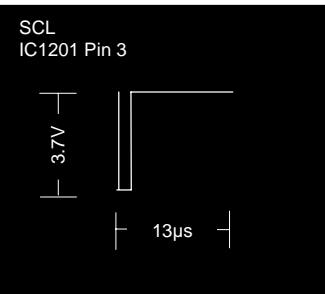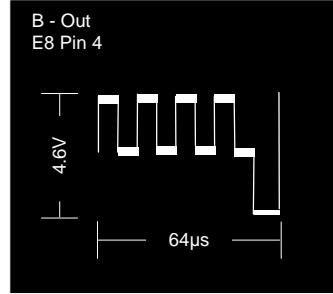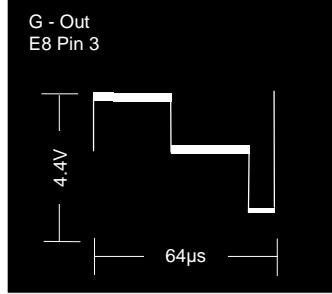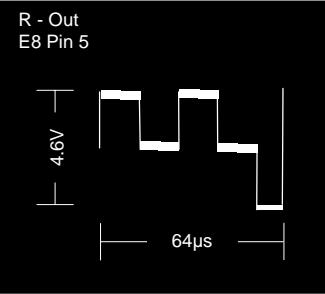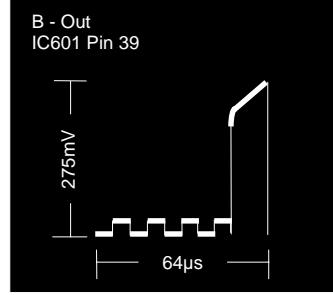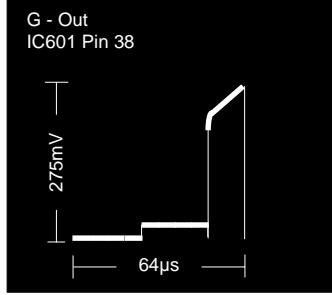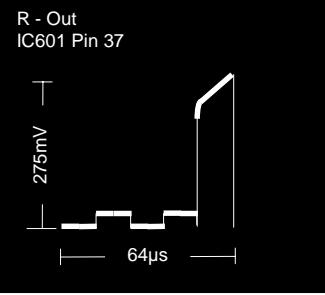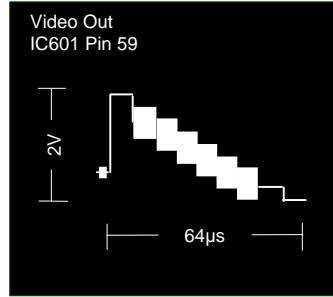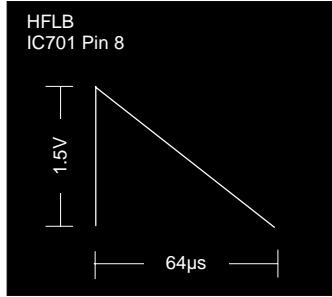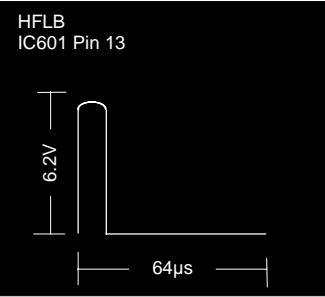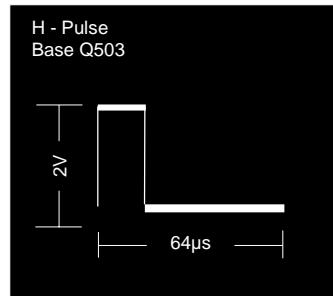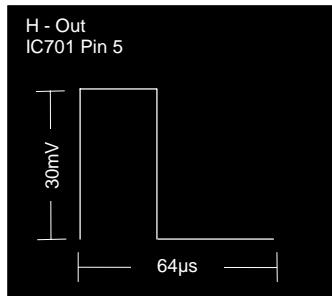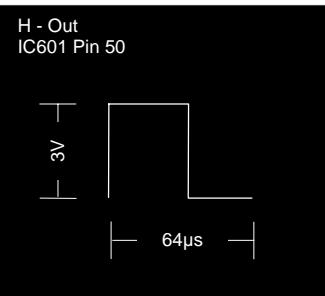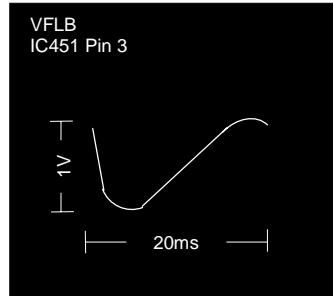

ALIGNMENT SETTINGS:

(The figures below are nominal and used for representative purposes only.)


1. Set the Bass to maximum position, set the Treble to minimum position, press the volume down button (-V) on the customer controls at the front of the TV and at the same time press the **INDEX** button on the remote control, this will place the TV into the Service Mode.
2. Press the **RED / GREEN** buttons to step up / down through the functions.
3. Press the **YELLOW / BLUE** buttons to alter the function values.
4. Press the **STR** button after each adjustment has been made to store the required values.
5. To exit the Service Mode, press the "N" button.

| Alignment Function | | Settings / Special features |
|-----------------------|---|---|
| Horizontal Position | H-Pos 061 | Optimum setting. |
| Vertical Position | V-Pos 005 | Optimum setting. |
| Horizontal Amplitude | H-Amp 055 | Optimum setting. |
| Vert. Amplitude | V. Amp 054 | Optimum setting. |
| EW-amplitude | E/W-Amp1 -128 | Optimum setting. |
| EW-amplitude | E/W-Amp2 006 | Optimum setting. |
| Trapezium-comp | Trapez-1 047 | Optimum setting. |
| Trapezium-comp | Trapez-2 -128 | Optimum setting. |
| Vertical Linearity | V-Lin 006 | Optimum setting. |
| Vertical Symmetry | V-Sym 002 | Optimum setting. |
| DVCO | DVCO -005 | Receive a PAL Colour Bar Pattern. For DVCO alignment press "Blue" button, wait until the colours are changing slowly and press STR . |
| Cut-off DC | Cut-off 0171 | To adjust Cutoff connect an oscilloscope to the Blue cathode. Press STR and adjust "cutoff" value using the Yellow and Blue buttons until the black level is $160V \pm 5V$ press STR to store the value. Remove the oscilloscope. |
| Ug2 Test | Ug2 055 O.K. | Select Ug2 adjustment and adjust the screen VR until the display shows "O.K."  |
| Highlight Lowlight | High 0902 0777 0864 Low 0117 0132 0112 | Optimum setting. |
| Sub-Brightness | Sub-Brightness 255 | Optimum setting. |

ABGLEICHTABELLE

(Die angegebenen Werte sind Mittelwerte und können individuell nach oben oder unten nach dem korrekten Abgleich abweichen.)


1. Um in den Service-Mode zu gelangen, gehen sie bitte wie folgt vor.
2. Stellen sie im Toneinstellungs-Menü die Bässe auf Maximum und die Höhen auf Minimum.
3. Halten sie die **INDEX**-Taste auf der Fernbedienung gedrückt und drücken zusätzlich die Taste **-/v** im Bedienteil des TV-Gerätes. Auf dem Bildschirm erscheint die entsprechende Anzeige für den Service-Mode.
4. Die einzelnen Funktionen mit Hilfe der **RO滕** und **GRÜNEN** Taste anwählen.
5. Mit der **GELBEN** und **BLAUEN** Taste die Werte der einzelnen Funktionen ändern.
6. Nach jeder Einstellung die Taste **STR** auf der Fernbedienung drücken, um die geänderten Werte abzuspeichern.
7. Zum Verlassen des Service-Modus die "N" - Taste auf der Fernbedienung drücken.

| Abgleichfunktion | | Einstellung / Besondere Merkmale |
|-----------------------|---|---|
| Horizontale position | H-Pos 061 | Optimale Einstellung. |
| Vertikale Position | V-Pos 005 | Optimale Einstellung. |
| Horizontale Amplitude | H-Amp 055 | Optimale Einstellung. |
| Vertikale Amplitude | V-Amp 054 | Optimale Einstellung. |
| OW-amplitude | E/W-Amp1 -128 | Optimale Einstellung. |
| OW-amplitude | E/W-Amp2 006 | Optimale Einstellung. |
| Trapez-Kompensation | Trapez-1 047 | Optimale Einstellung. |
| Trapez-Kompensation | Trapez-2 -128 | Optimale Einstellung. |
| Vertikale linearität | V-Lin 006 | Optimale Einstellung. |
| Vertikale Symmetrie | V-Sym 002 | Optimale Einstellung. |
| DVCO | DVCO -005 | Ein Farbbalken-Testbild empfangen. Zum Abgleich des Farboszillators (DVCO) die blau Taste drücken. Nachdem ein leichtes Flackern in den Farbbalken zum Stillstand gekommen ist, die STR -Taste drücken. |
| Cut-off | Cut-off 0171 | Einen Oszilloskop an die blaue Katode der Bildröhre anschliessen. STR -Taste drücken und Mit der gelben und blauen Taste den CUT-OFF Wert auf $160V \pm 5V$ abgleichen und mit der STR-Taste abspeichern. Den Oszilloskop entfernen und den Ug2 Test aufrufen. Den Abgleichwert solange ändern, bis OK auf dem Bildschirm erscheint. Den Wert abspeichern. |
| Ug2 Test | Ug2 055 O.K. |  |
| Highlight Lowlight | High 0902 0777 0864 Low 0117 0132 0112 | Optimale Einstellung. |
| Sub-Brightness | Sub-Brightness 255 | Optimale Einstellung. |

VIDEO BLOCK DIAGRAM


BILDSIGNAL BLOCKSCHEMA

10

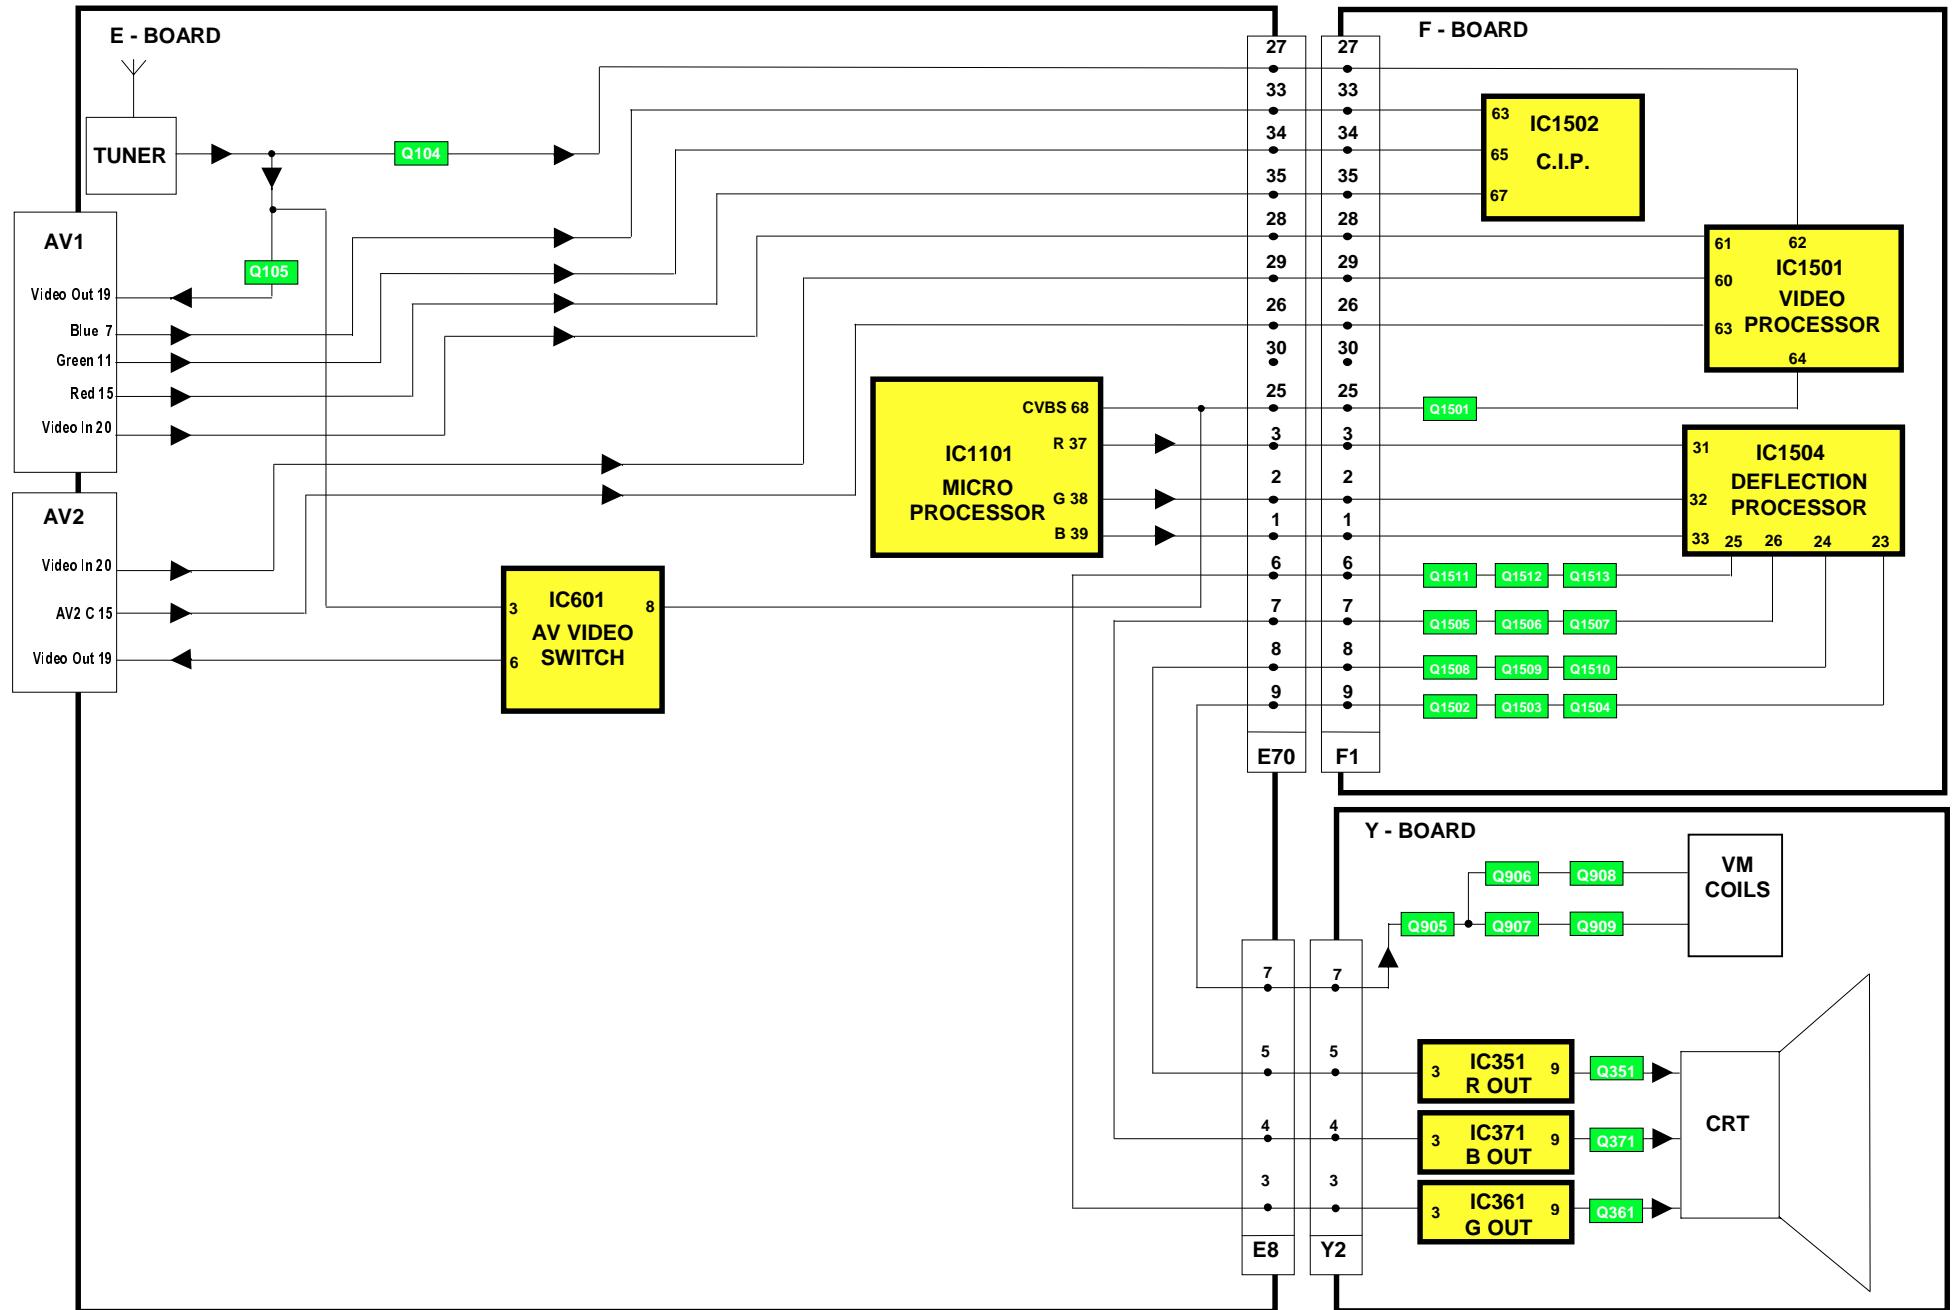


AUDIO BLOCK DIAGRAM

TONSIGNAL BLOCKSCHEMA

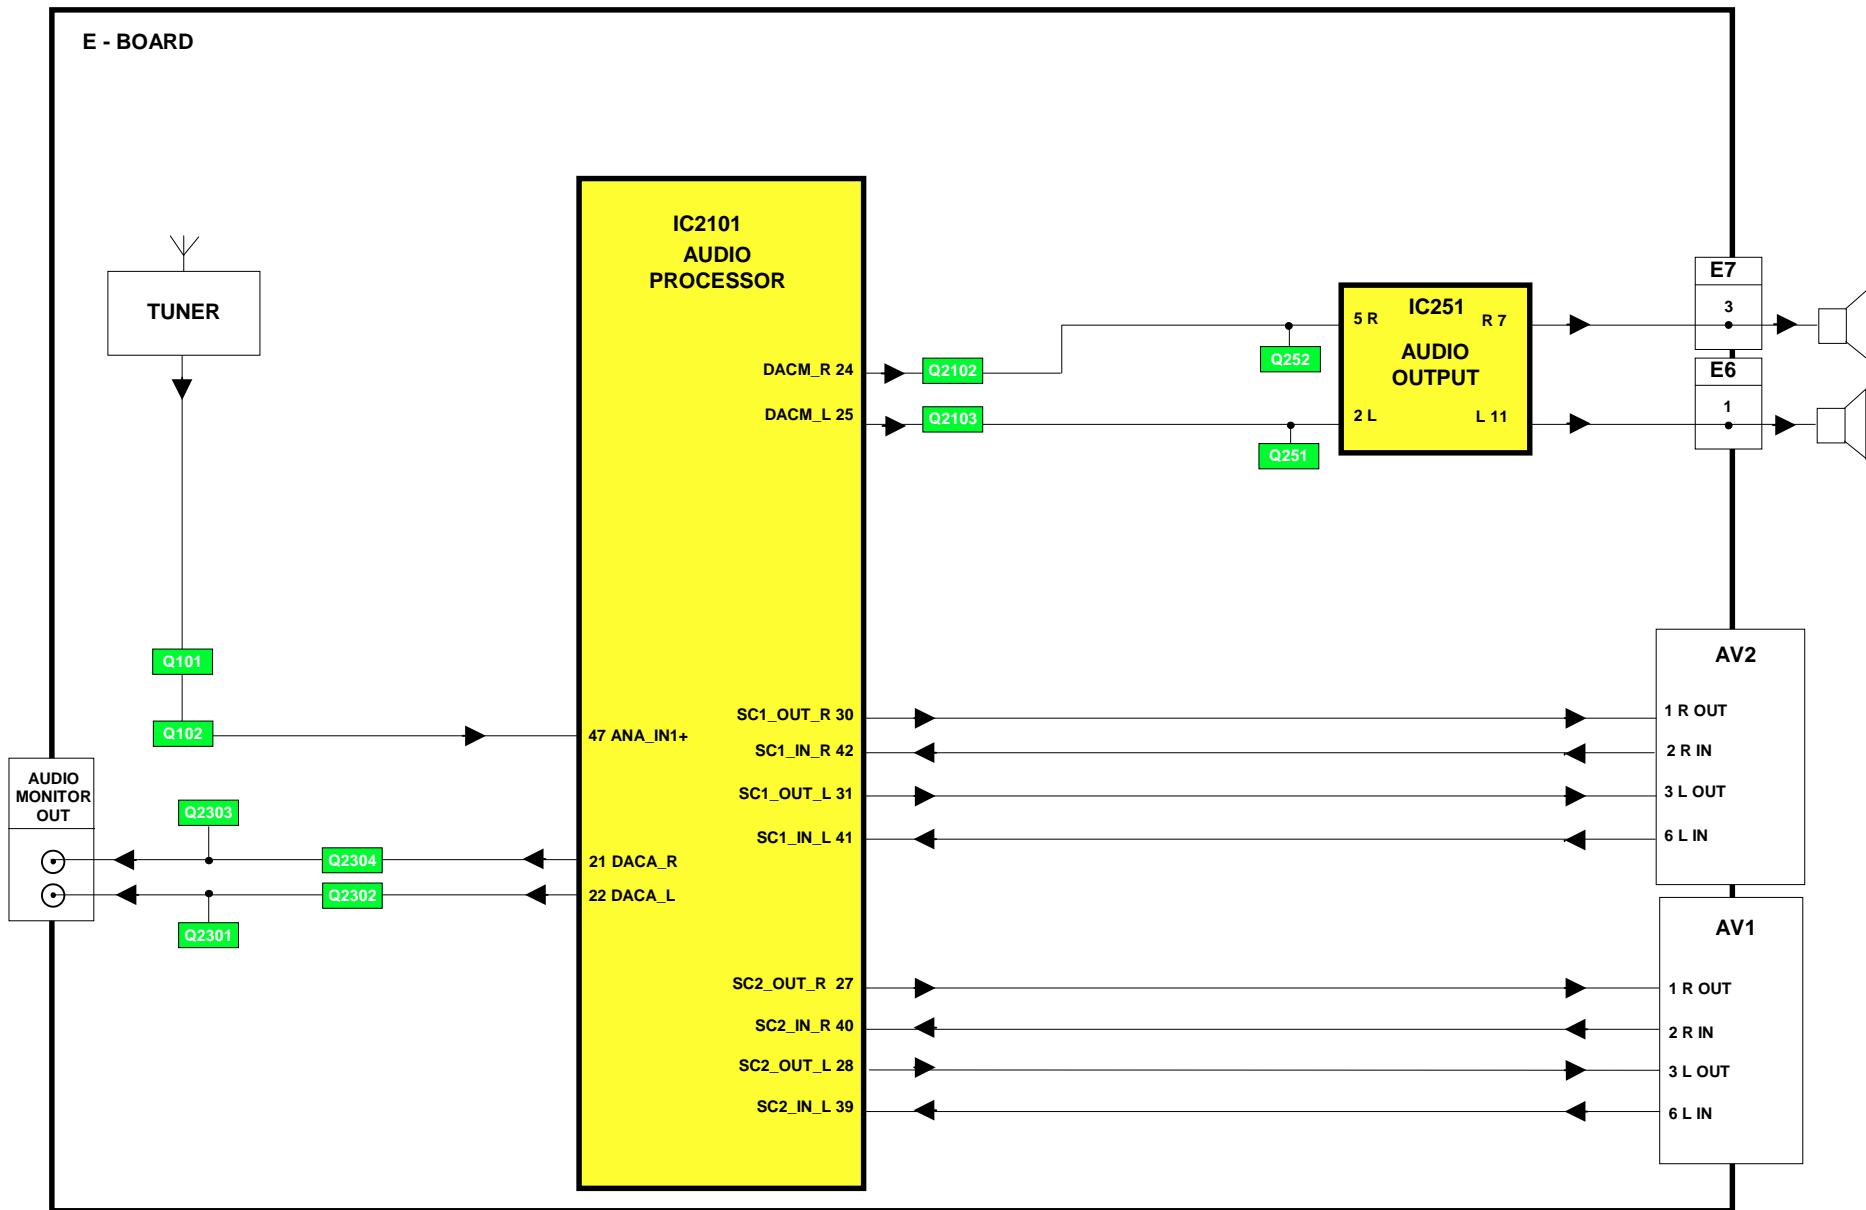


CONTROL BLOCK DIAGRAM

STROMVERSORGUNGS BLOCKSCHEMA

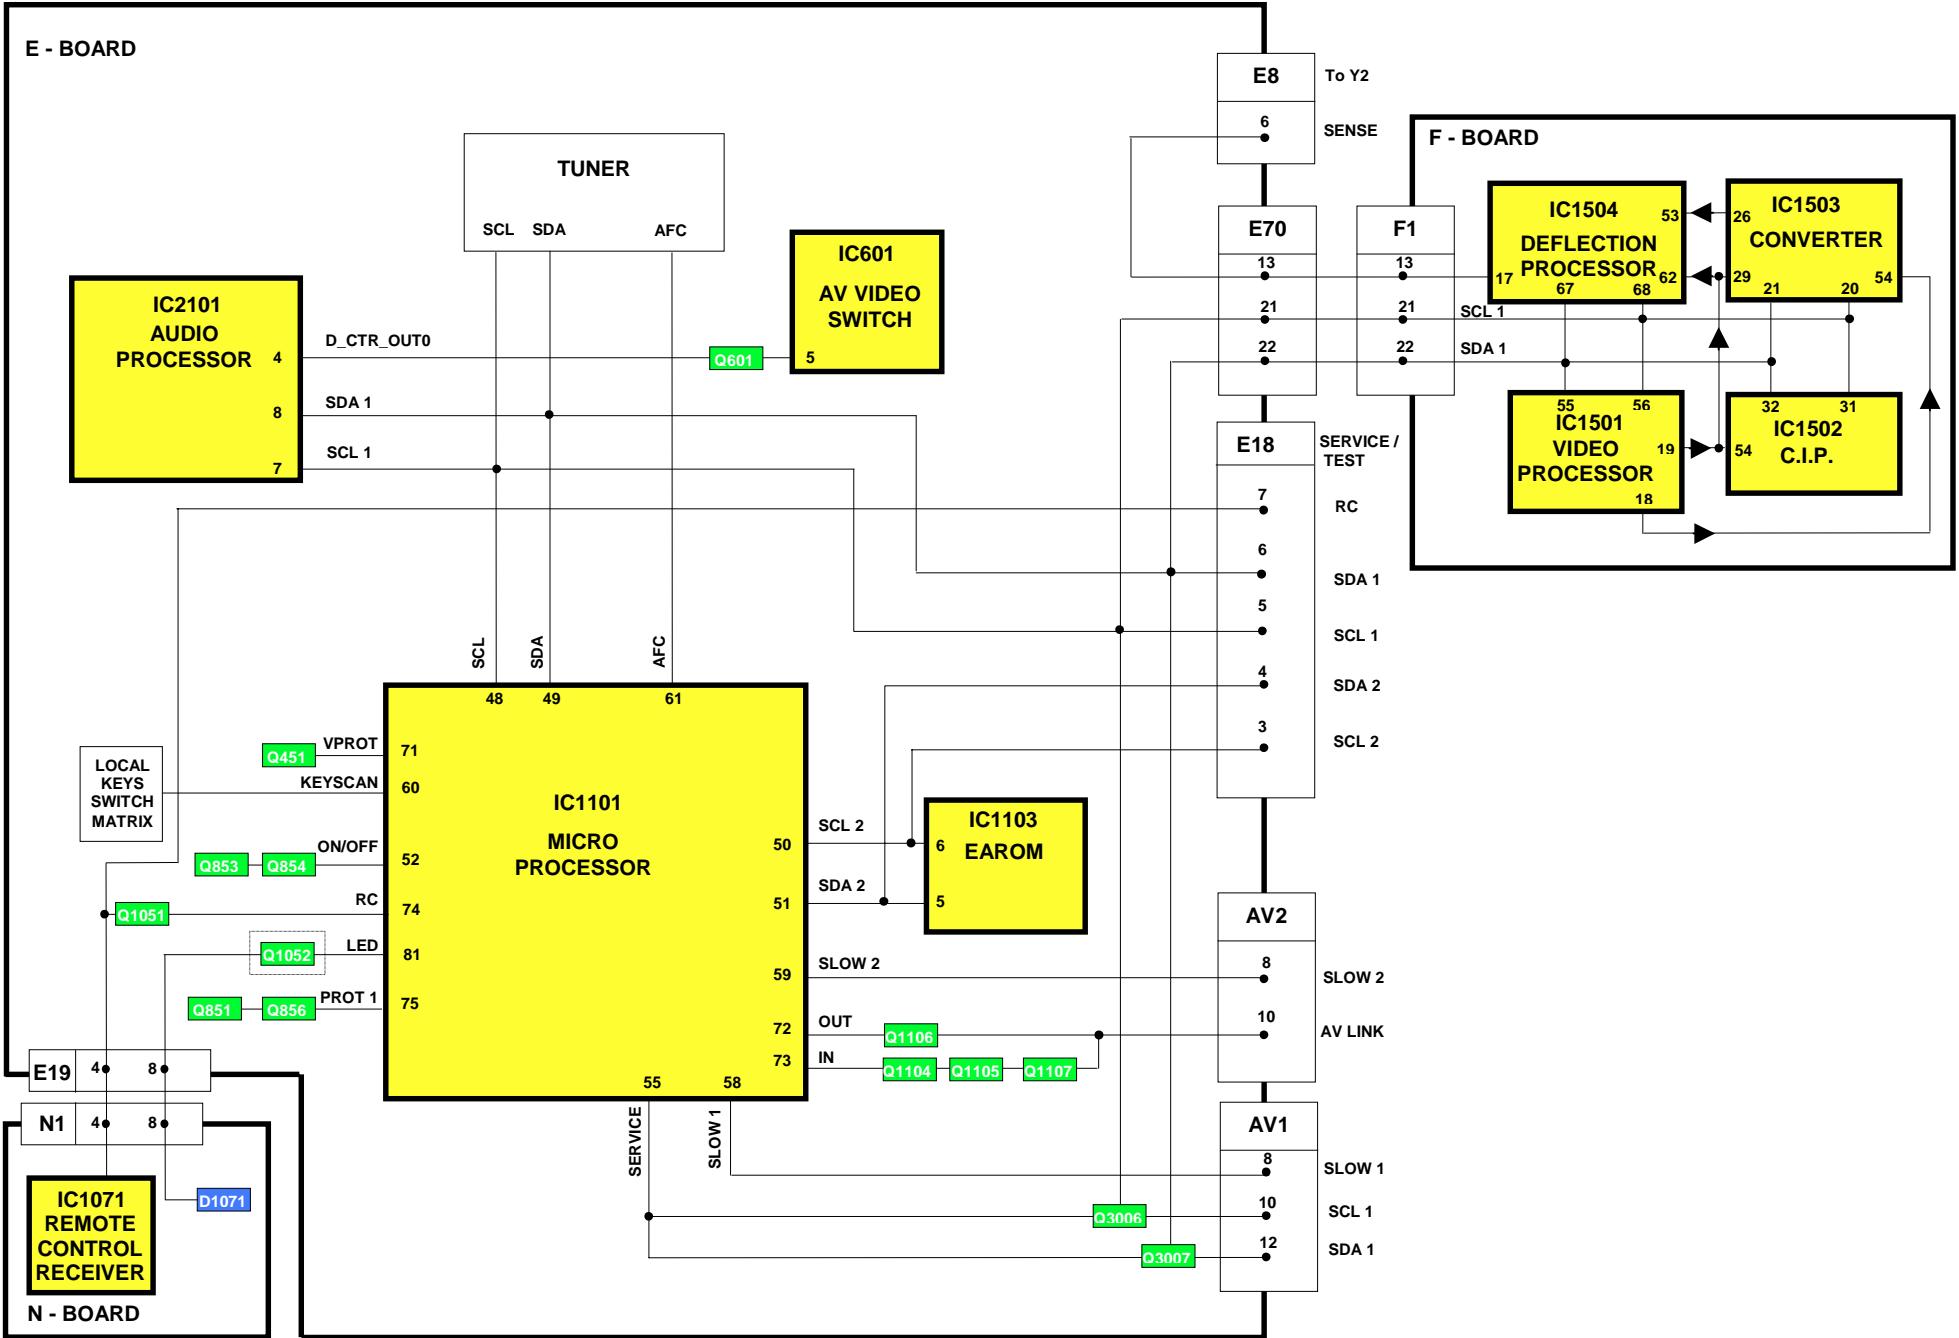

POWER SUPPLY BLOCK DIAGRAM

STROMVERSORGUNGS BLOCKSCHEMA

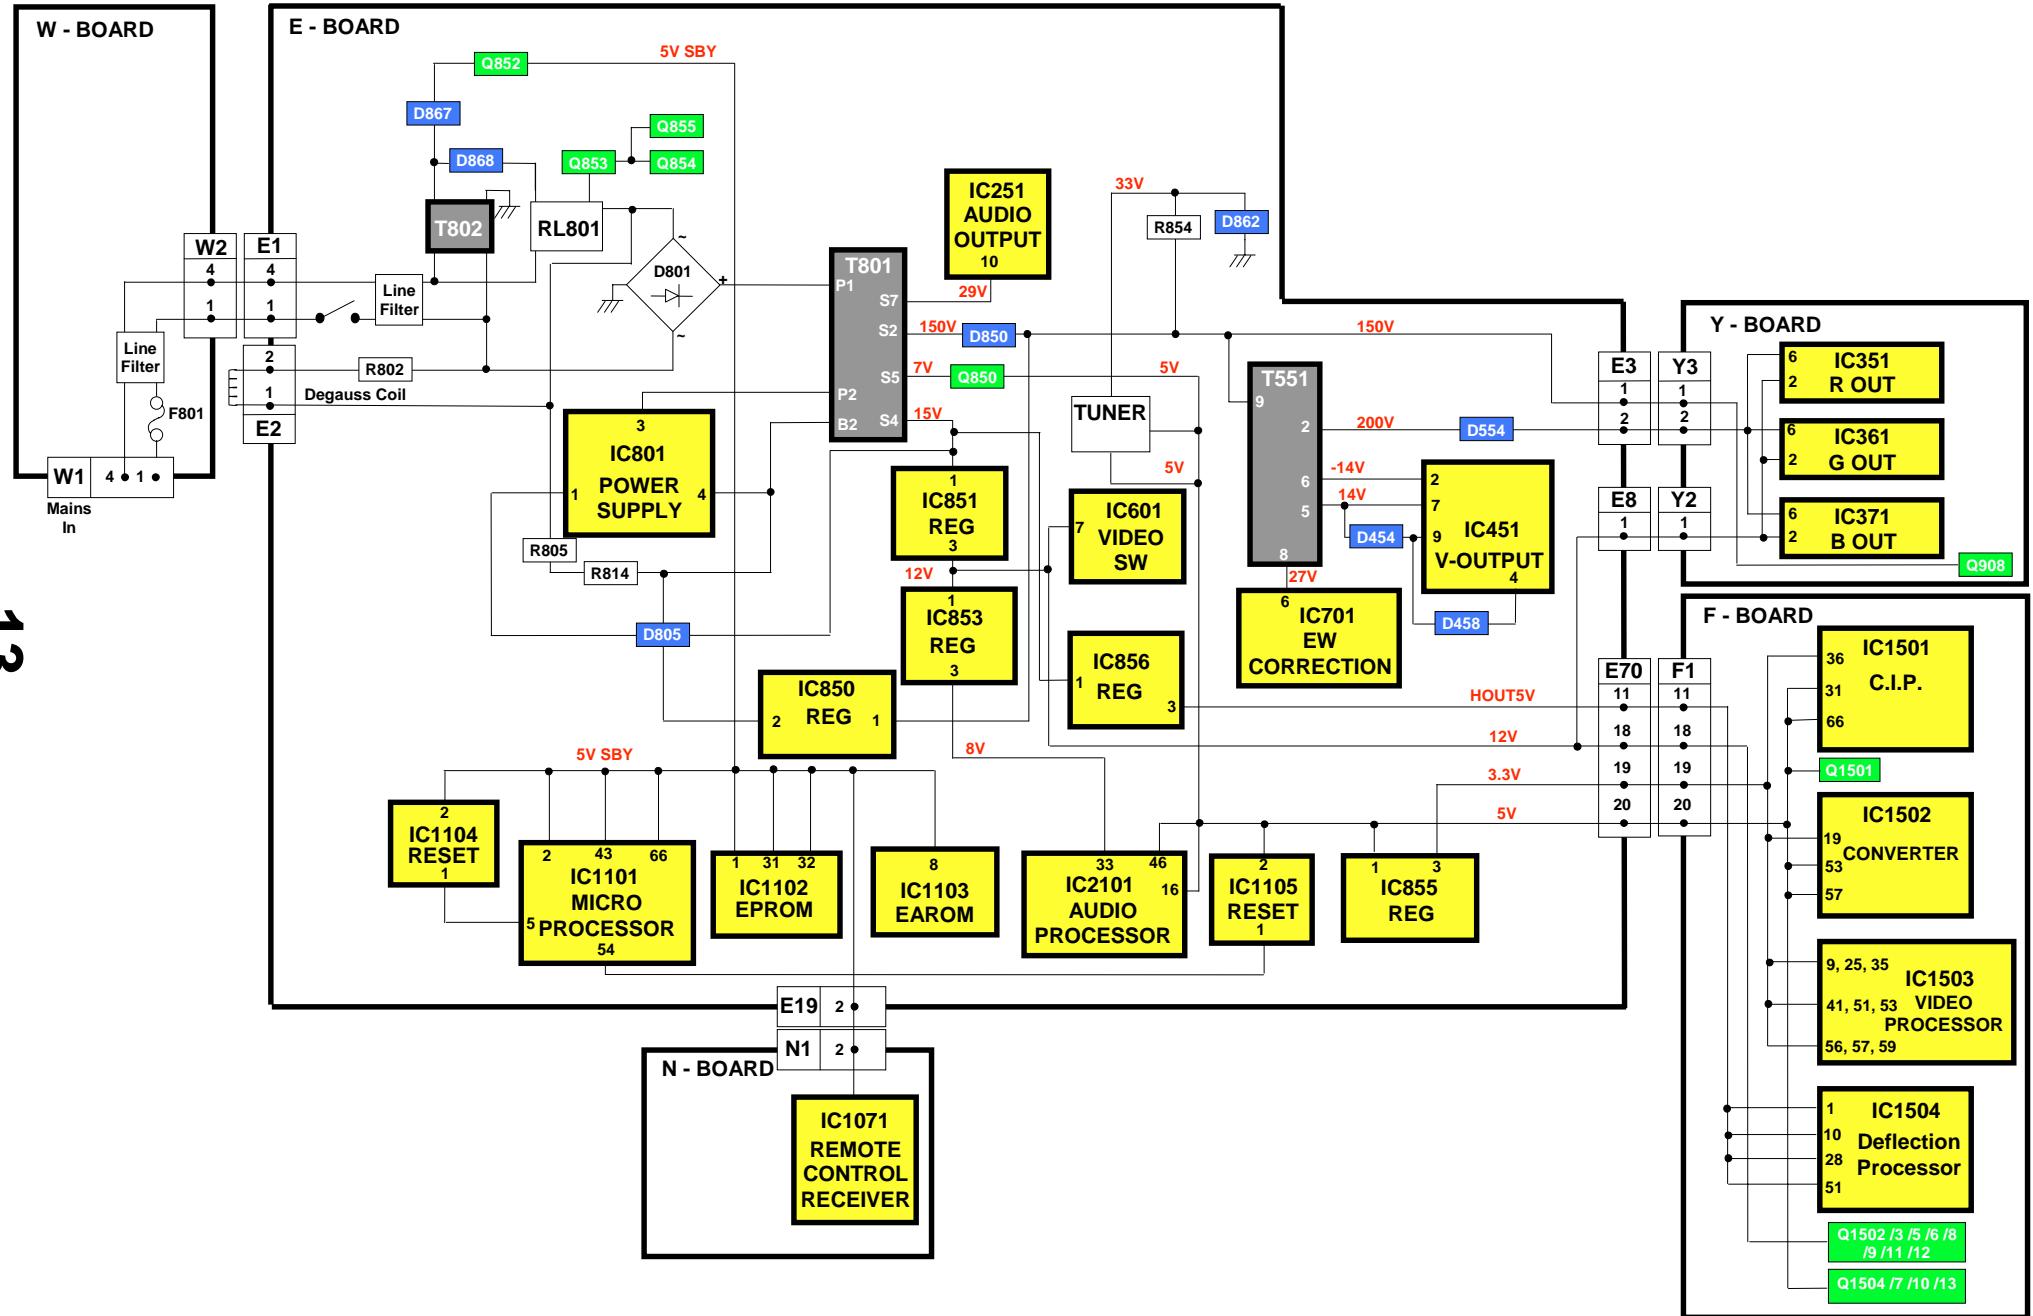

13

PARTS LOCATION


EXPLOSIONSZEICHNUNG

NOTE:

The numbers on the exploded view below refer to the mechanical section of the Replacement Parts List.

Anmerkung:

Die Nummer auf den mechanischen Teilen
Zeigt die Bezugsnr der Ersatzteilliste
an.

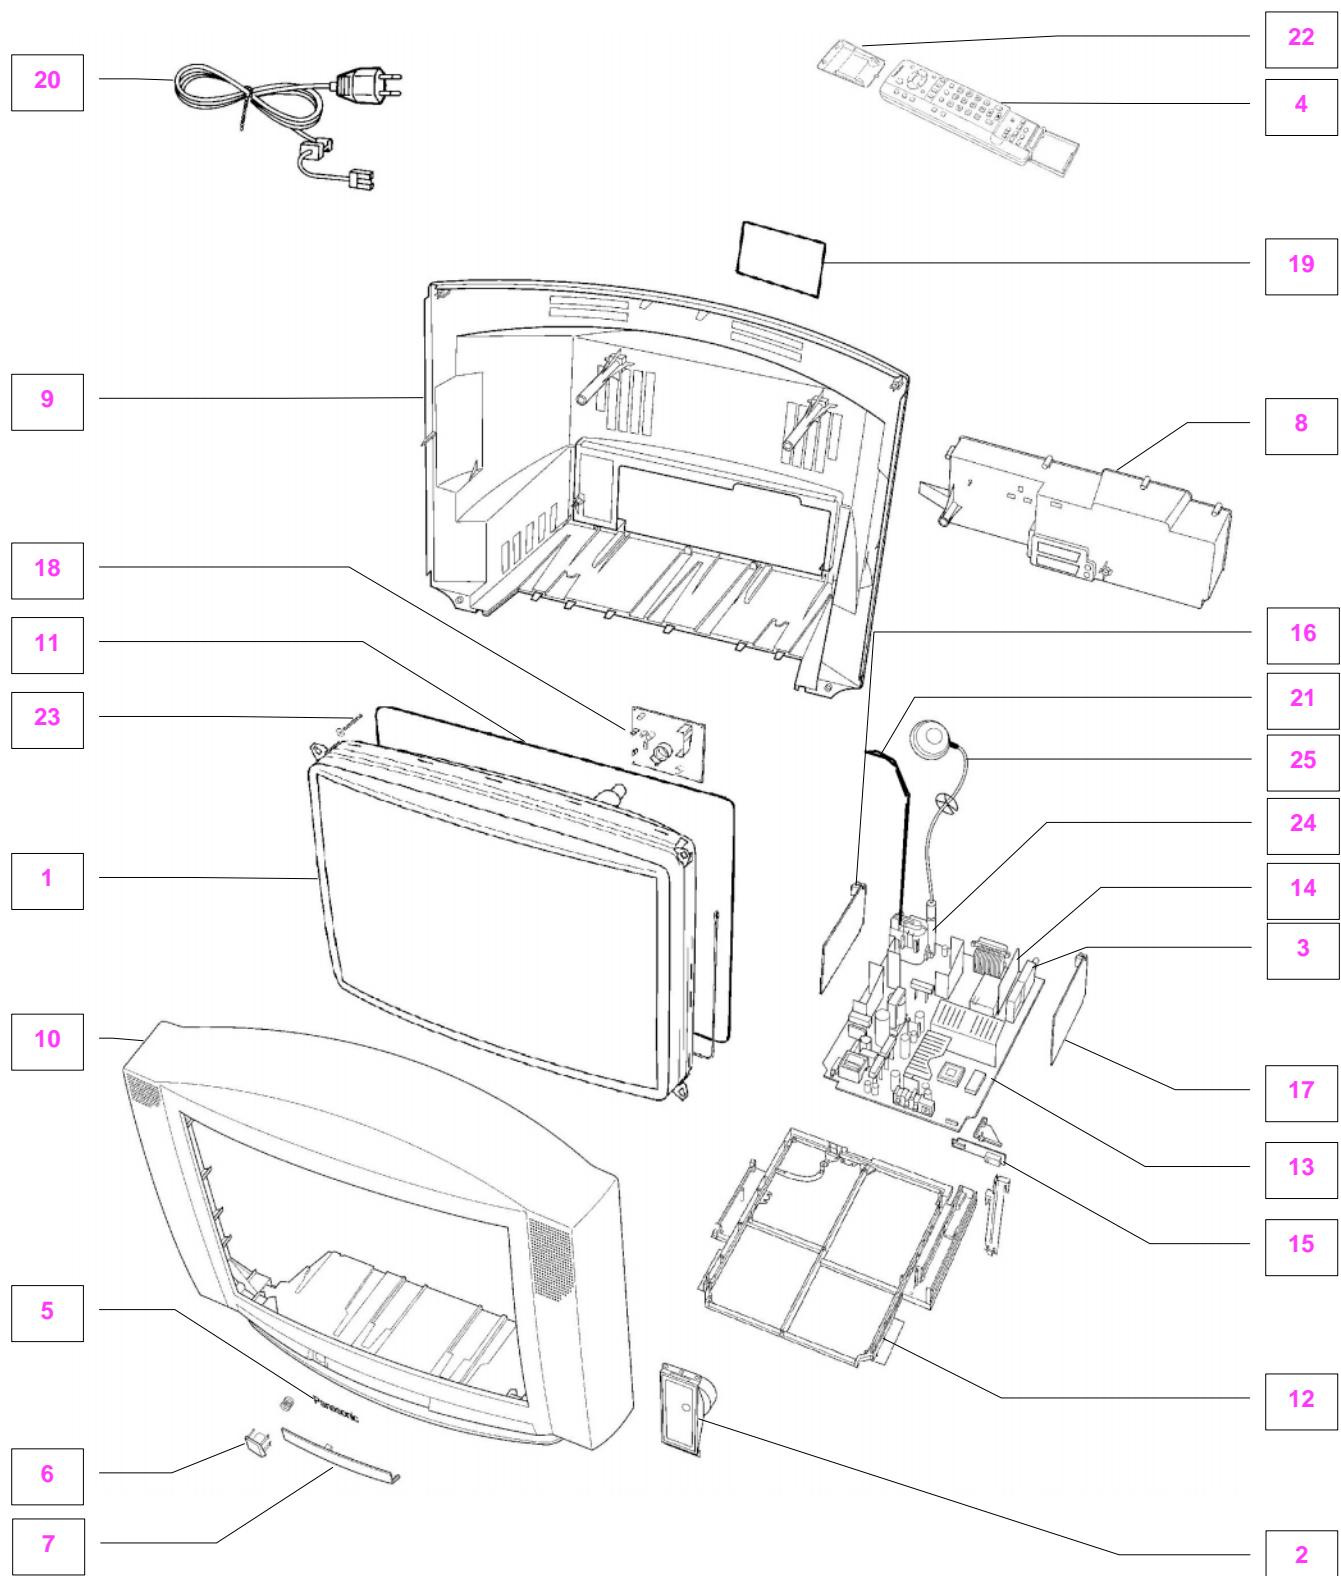

REPLACEMENT PARTS LIST

Important Safety Notice

Components Identified by  mark have special characteristics important for safety.
When replacing any of these components, use only manufacturers specified parts.

* In case of ordering these spare parts, please always add the complete Model-Type number to your order.

ERSATZTEILLISTE

Wichtiger Sicherheitshinweis

Teile, die mit einem Hinweis  gekennzeichnet sind wichtig für die Sicherheit. Solite ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.
Bei der Bestellung von Ersatzteilen, die mit * gekennzeichnet sind, geben Sie bitte unbedingt die vollständige Typenbezeichnung mit an.

| Cct Ref | Parts Number | Description | |
|---------------------------------|--------------|------------------------|---|
| MECHANICAL PARTS | | | |
| 1 | A66ECF50X82 | C.R.T. |  |
| 2 | EASG15S505A2 | SPEAKER | |
| 3 | ENG27507GR | TUNER |  |
| 4 | EUR511211 | REMOTE CONTROL | |
| 5 | TBM8E1728 | PANASONIC BADGE | |
| 6 | TBX8E056 | POWER BUTTON | |
| 7 | TKP8E1235-2 | DOOR LID | |
| 8 | TKP8E1296-1 | REAR AV PANEL | |
| 9 | TKU8E00320 | BACK COVER |  |
| 10 | TKY8E307 | CABINET |  |
| 11 | TLK8E05140 | DEGAUSS COIL |  |
| 12 | TMX8E042 | CHASSIS FRAME | |
| 13 | TNP8EE013AG | E P.C.B. |  |
| 14 | TNP8EF007AA | F P.C.B. |  |
| 15 | TNP8EN016AA | N P.C.B. |  |
| 16 | TNP8EP017AA | P P.C.B. |  |
| 17 | TNP8EW002AA | W P.C.B. |  |
| 18 | TNP8EY018AA | Y P.C.B. |  |
| 19 | TQF8E2928 | MODEL LABEL |  |
| 20 | TSX8E0027 | POWER CORD |  |
| 21 | TXJ/FCODEG | FOCUS LEAD ASSY |  |
| 22 | UR51EC904A | BATTERY COVER (REMOTE) | |
| 23 | VP17005-32 | CRT FIXING SCREW | |
| 24 | ZTFM05008A | F.B.T. |  |
| 25 | ZTUZAE550A | ANODE LEAD |  |
| MISCELLANEOUS COMPONENTS | | | |
| | 31221212478 | FIX CLIP | |
| | 832AG11D-ESL | IC SOCKET | |
| | F9-4-220 | RELAY | |
| | PLCC-84-T | 84 PIN IC SOCKET | |
| | TBM8E1840 | RESET LABEL | |
| | TEK6940 | LID CATCH | |
| | TES8E015 | POWER BUTTON SPRING | |
| | TMW8E027 | LED HOLDER | |
| | TPC8E4813 | OUTER CARTON | |
| | TPD8E655 | TOP CUSHION | |
| | TPD8E656 | BOTTOM CUSHION | |
| | UM-3DJ-2P | BATTERY PACK | |
| PCH2 | TMX8E041 | PCB BRACKET | |
| PCH3 | TMX8E041 | PCB BRACKET | |
| R802 | 232266296706 | THERMISTOR |  |
| INSTRUCTION BOOKS | | | |
| | TQB8E2890A | GERMAN |  |
| I.C.s | | | |
| IC251 | LA4282 | AUDIO OUTPUT | |
| IC351 | TDA6111Q-N4 | RGB OUTPUT | |
| IC361 | TDA6111Q-N4 | RGB OUTPUT | |
| IC371 | TDA6111Q-N4 | RGB OUTPUT | |
| IC381 | TL431CLPM | REGULATOR | |
| IC451 | LA7876N | VERTICAL OUTPUT | |

| Cct Ref | Parts Number | Description | |
|---------------|--------------|-----------------|---|
| IC601 | TEA2114 | VIDEO SWITCHING | |
| IC701 | TEA2031A | E/W CORRECTION | |
| IC801 | STRF6654LF57 | POWER SUPPLY | |
| IC850 | SE140N | ERROR AMPLIFIER | |
| IC851 | L78M12MRB | 12V REGULATOR | |
| IC853 | AN78L08TA | 8V REGULATOR | |
| IC855 | BA033T-M3 | REGULATOR | |
| IC856 | AN7805LB | 5V REGULATOR | |
| IC1071 | RPM6937-V4 | LED RECEIVER | |
| IC1101 | SDA5450C59 | MICRO PROCESSOR | |
| IC1102 | 27C2001-M0M | EPROM * | |
| IC1103 | XDG2-01MF | EAROM * | |
| IC1104 | MN1381-R(TA) | RESET | |
| IC1105 | MN1381-T(TA) | RESET | |
| IC1501 | VPC3215CB8TP | VIDEO PROCESSOR | |
| IC1502 | CIP3250APSB1 | C.I.P. | |
| IC1503 | SDA9401 | MICRO PROCESSOR | |
| IC1504 | DDP3310BPSD3 | VIDEO PROCESSOR | |
| IC2101 | MSP3400CPOC8 | AUDIO PROCESSOR | |
| FUSES | | | |
| F801 | 19181-3.15 | FUSE |  |
| F8011 | EYF52BC | FUSE HOLDER | |
| F8012 | EYF52BC | FUSE HOLDER | |
| DIODES | | | |
| C1130 | MTZJT-775.6C | DIODE | |
| D251 | MA2180BLFS | DIODE | |
| D253 | MA700TA5 | DIODE | |
| D254 | MA700TA5 | DIODE | |
| D351 | ERA15-04V3 | DIODE | |
| D352 | ERA15-04V3 | DIODE | |
| D361 | ERA15-04V3 | DIODE | |
| D362 | ERA15-04V3 | DIODE | |
| D371 | ERA15-04V3 | DIODE | |
| D372 | ERA15-04V3 | DIODE | |
| D376 | MA165TA5 | DIODE | |
| D377 | MA165TA5 | DIODE | |
| D378 | MA165TA5 | DIODE | |
| D387 | MA2160LFS | DIODE | |
| D453 | MA165TA5 | DIODE | |
| D454 | EU02 | DIODE | |
| D456 | MTZJT-775.6C | DIODE | |
| D457 | MA165TA5 | DIODE | |
| D458 | EU02 | DIODE | |
| D502 | 1SR124-4AT82 | DIODE | |
| D511 | MA4047 | DIODE | |
| D553 | 1SR124-4AT82 | DIODE | |
| D554 | 1SR124-4AT82 | DIODE | |
| D556 | MA165TA5 | DIODE | |
| D557 | TVSRU2AMLFA5 | DIODE | |
| D558 | EU02 | DIODE | |
| D560 | RH3GLF102 | DIODE | |
| D580 | FMV-3GULF730 | DIODE | |

| Cct Ref | Parts Number | Description |
|--------------------|---------------|---------------|
| D601 | MA165TA5 | DIODE |
| D602 | MA165TA5 | DIODE |
| D603 | MA165TA5 | DIODE |
| D604 | MA165TA5 | DIODE |
| D609 | 1SR124-4AT82 | DIODE |
| D617 | MA3068MTX | DIODE |
| D620 | MA165TA5 | DIODE |
| D701 | MA165TA5 | DIODE |
| D702 | MTZJT-775.1C | DIODE |
| D704 | MA29TA5 | DIODE |
| D705 | MTZJT776.2B | DIODE |
| D706 | MA165TA5 | DIODE |
| D707 | AU02V0 | DIODE |
| D708 | MA165TA5 | DIODE |
| D709 | MTZJT-778.2C | DIODE |
| D710 | MTZJT-7716C | DIODE |
| D801 | RBV-608LF-B | DIODE |
| D803 | 1SR124-4AT82 | DIODE |
| D804 | 1SR124-4AT82 | DIODE |
| D805 | TLP621GR-LF2 | PHOTO COUPLER |
| D806 | 1SR124-4AT82 | DIODE |
| D850 | RU4BLF-L1 | DIODE |
| D851 | MTZJT776.2B | DIODE |
| D852 | MA165TA5 | DIODE |
| D853 | MA2180BLFS | DIODE |
| D854 | TVSRU3AMLF A5 | DIODE |
| D855 | D10SC6MRL | DIODE |
| D856 | RU4AMLF-M1 | DIODE |
| D857 | MTZJT-775.1A | DIODE |
| D858 | MA165TA5 | DIODE |
| D859 | MA165TA5 | DIODE |
| D861 | MA165TA5 | DIODE |
| D862 | MTZJT-7736A | DIODE |
| D863 | MA165TA5 | DIODE |
| D865 | MA165TA5 | DIODE |
| D866 | MA165TA5 | DIODE |
| D867 | EK06-V0 | DIODE |
| D868 | 1N4150T-77 | DIODE |
| D869 | 1N4150T-77 | DIODE |
| D870 | MA165TA5 | DIODE |
| D871 | 1N4150T-77 | DIODE |
| D873 | MTZJT-775.6C | DIODE |
| D874 | 1SR124-4AT82 | DIODE |
| D875 | BZX79A75A26A | DIODE |
| D890 | MA165TA5 | DIODE |
| D891 | MA165TA5 | DIODE |
| D901 | 1SS254T-77 | DIODE |
| D902 | 1SS254T-77 | DIODE |
| D903 | 1SS254T-77 | DIODE |
| D910 | R2KNLFA1 | DIODE |
| D1071 | SLR56UR3FS | LED |
| D1072 | MTZJT-778.2C | DIODE |
| D1101 | MA165TA5 | DIODE |
| D2101 | MA723TA5 | DIODE |
| D2102 | MA723TA5 | DIODE |
| D2103 | MA723TA5 | DIODE |
| D2104 | MA723TA5 | DIODE |
| D2105 | MTZJT-778.2C | DIODE |
| D2303 | MA723TA5 | DIODE |
| D2304 | MA723TA5 | DIODE |
| D3351 | 1SS254T-77 | DIODE |
| D3352 | MA165TA5 | DIODE |
| D3353 | MA165TA5 | DIODE |
| D3354 | MA165TA5 | DIODE |
| TRANSISTORS | | |
| Q101 | BC847B | TRANSISTOR |

| Cct Ref | Parts Number | Description |
|---------------------|--------------|-------------|
| Q102 | BC847B | TRANSISTOR |
| Q104 | BC847B | TRANSISTOR |
| Q105 | BC847B | TRANSISTOR |
| Q251 | 2SD1328STX | TRANSISTOR |
| Q252 | 2SD1328STX | TRANSISTOR |
| Q253 | BC847B | TRANSISTOR |
| Q254 | BC847B | TRANSISTOR |
| Q351 | 2SA1767 | TRANSISTOR |
| Q361 | 2SA1767 | TRANSISTOR |
| Q371 | 2SA1767 | TRANSISTOR |
| Q451 | BC857B | TRANSISTOR |
| Q503 | 2SK2926TPE6 | TRANSISTOR |
| Q551 | 2SC5144LB228 | TRANSISTOR |
| Q552 | 2SC1473-RN | TRANSISTOR |
| Q601 | BC847B | TRANSISTOR |
| Q701 | BC857B | TRANSISTOR |
| Q702 | BC847B | TRANSISTOR |
| Q850 | 2SD2396K-M3 | TRANSISTOR |
| Q851 | BC857B | TRANSISTOR |
| Q852 | 2SC1383-S | TRANSISTOR |
| Q853 | BC847B | TRANSISTOR |
| Q854 | BC847B | TRANSISTOR |
| Q855 | BC847B | TRANSISTOR |
| Q856 | BC847B | TRANSISTOR |
| Q857 | 2SA1018QTA | TRANSISTOR |
| Q905 | BC847B | TRANSISTOR |
| Q906 | BC847B | TRANSISTOR |
| Q907 | BC857B | TRANSISTOR |
| Q908 | 2SA1535ARLB | TRANSISTOR |
| Q909 | 2SC3944ARLB | TRANSISTOR |
| Q1051 | BC847B | TRANSISTOR |
| Q1052 | BC847B | TRANSISTOR |
| Q1104 | BC847B | TRANSISTOR |
| Q1105 | BC847B | TRANSISTOR |
| Q1106 | BC847B | TRANSISTOR |
| Q1107 | BC847B | TRANSISTOR |
| Q1108 | BC847B | TRANSISTOR |
| Q1501 | BC847B | TRANSISTOR |
| Q1502 | BC857B | TRANSISTOR |
| Q1503 | BC847B | TRANSISTOR |
| Q1504 | BC847B | TRANSISTOR |
| Q1505 | BC857B | TRANSISTOR |
| Q1506 | BC847B | TRANSISTOR |
| Q1507 | BC847B | TRANSISTOR |
| Q1508 | BC857B | TRANSISTOR |
| Q1509 | BC847B | TRANSISTOR |
| Q1510 | BC847B | TRANSISTOR |
| Q1511 | BC857B | TRANSISTOR |
| Q1512 | BC847B | TRANSISTOR |
| Q1513 | BC847B | TRANSISTOR |
| Q2101 | BC857B | TRANSISTOR |
| Q2102 | BC857B | TRANSISTOR |
| Q2103 | BC857B | TRANSISTOR |
| Q2301 | BC847B | TRANSISTOR |
| Q2302 | BC857B | TRANSISTOR |
| Q2303 | BC847B | TRANSISTOR |
| Q2304 | BC857B | TRANSISTOR |
| Q3006 | BC847B | TRANSISTOR |
| Q3007 | BC847B | TRANSISTOR |
| Q3352 | BC857B | TRANSISTOR |
| TRANSFORMERS | | |
| T501 | ETH19Y193AY | TRANSFORMER |
| T801 | ETS42AE296AD | TRANSFORMER |
| T802 | ETP35KAN619U | TRANSFORMER |
| COILS | | |
| L104 | EXCELSA35T | COIL |

| Cct Ref | Parts Number | Description |
|---------|--------------|-------------|
| L106 | TLTACT100K | COIL |
| L107 | TLTACT6R8K | COIL |
| L114 | ELJFC2R2KF | COIL |
| L115 | ELJFC2R2KF | COIL |
| L301 | TLTACT4R7K | COIL |
| L353 | TLT150K991R | COIL |
| L363 | TLT100K991R | COIL |
| L373 | TLT150K991R | COIL |
| L381 | TLT220K991R | COIL |
| L451 | EXCELSA35T | COIL |
| L501 | EXCELSA35T | COIL |
| L581 | ELHKL026B | COIL |
| L582 | ELC18B271E | COIL |
| L583 | ELC18B150L | COIL |
| L584 | ELHKL025B | COIL |
| L586 | EXCELDLR35C | COIL |
| L606 | ELESN100KA | COIL |
| L701 | ELC18B271E | COIL |
| L704 | ELC10D332E | COIL |
| L705 | EXCELDLR35V | COIL |
| L850 | EXCELSA35T | COIL |
| L851 | EXCELSA35T | COIL |
| L852 | ELEIE470KA | COIL |
| L855 | EXCELSA35T | COIL |
| L856 | EXCELSA39V | COIL |
| L910 | EXCELSA35T | COIL |
| L911 | EXCELSA35T | COIL |
| L912 | EXCELSA35T | COIL |
| L1103 | TLTACT100K | COIL |
| L1104 | EXCELSA35T | COIL |
| L1105 | ELJFC2R2KF | COIL |
| L1501 | ELESN2R2KA | COIL |
| L1502 | ELESN2R2KA | COIL |
| L1503 | ELESN2R2KA | COIL |
| L1504 | ELESN2R2KA | COIL |
| L1505 | ELESN100KA | COIL |
| L1506 | ELESN100KA | COIL |
| L1507 | ELESNR22KA | COIL |
| L1508 | ELESNR22KA | COIL |
| L1509 | ELESN100KA | COIL |
| L1510 | ELESN100KA | COIL |
| L1514 | ELESN100KA | COIL |
| L1515 | ELESNR39KA | COIL |
| L1516 | ELESN4R7KA | COIL |
| L1517 | ELESN4R7KA | COIL |
| L1518 | ELESN4R7KA | COIL |
| L1519 | ELESNR39KA | COIL |
| L1520 | ELESN2R2KA | COIL |
| L1521 | ELESN1R0KA | COIL |
| L1522 | ELESN2R2KA | COIL |
| L1523 | ELESN2R2KA | COIL |
| L1524 | ELESN2R2KA | COIL |
| L1525 | ELESN100KA | COIL |
| L1526 | ELESN100KA | COIL |
| L1527 | ELESN100KA | COIL |
| L1528 | ELESN100KA | COIL |
| L1529 | ELESN100KA | COIL |
| L1530 | EXCELDLR35V | COIL |
| L2101 | TLTACT100K | COIL |
| L2103 | EXCELSA35T | COIL |
| L2104 | TLTACT4R7K | COIL |
| L3001 | ELEMV1R5MA | COIL |
| L3002 | ELEMV1R5MA | COIL |
| L3003 | ELEMV1R5MA | COIL |
| L3004 | ELEMV1R5MA | COIL |

| Cct Ref | Parts Number | Description |
|------------------|--------------|-----------------------|
| FILTERS | | |
| L802 | ELF18N012A | LINE FILTER |
| L804 | ELF18N012A | LINE FILTER |
| CRYSTALS | | |
| Q703 | IRF644R | CRYSTAL |
| X1101 | TSSA121 | CRYSTAL |
| X1501 | 4730007267 | CRYSTAL |
| X1502 | 4730007341 | CRYSTAL |
| X2101 | 4730007158 | CRYSTAL |
| RESISTORS | | |
| C101 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| C510 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA1 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA2 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA3 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA4 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA5 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA6 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA7 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA8 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA9 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA10 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA12 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA13 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA14 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA15 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA16 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA17 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA18 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA19 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA20 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA101 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA102 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA103 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA104 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA105 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA106 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA107 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA108 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA109 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA110 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA111 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA112 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA113 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA114 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA115 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA116 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA117 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA118 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA119 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA200 | ERJ8GEY0R00 | S.M.CARB .125W 5% 0 Ω |
| JA201 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JA202 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE3 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE4 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE5 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE6 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE10 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE12 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE18 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE22 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE26 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE33 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE35 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |
| JSE42 | ERJ6GEY0R00 | S.M.CARB 0.1W 5% 0 Ω |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|-----|---------|--|
| JSE43 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| JSE45 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JSE46 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JSE47 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JSF1 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JSF2 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JSF3 | ERJ8GEY0R00 | S.M.CARB | .125W | 5% | 0 Ω | |
| JSY04 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| Q1101 | ERD25TC0T | CARBON | 0.25W | 5% | 0 Ω | |
| R101 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R102 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R103 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R104 | ERJ6GEYJ332 | S.M.CARB | 0.1W | 5% | 3K3 Ω | |
| R105 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R106 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 Ω | |
| R107 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R111 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R112 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R113 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R116 | ERJ6GEYJ562 | S.M.CARB | 0.1W | 5% | 5K6 Ω | |
| R117 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R118 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R120 | ERJ6GEYJ332 | S.M.CARB | 0.1W | 5% | 3K3 Ω | |
| R121 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R251 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R252 | ERJ6GEYJ272 | S.M.CARB | 0.1W | 5% | 2K7 Ω | |
| R253 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R254 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R255 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R256 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R257 | ERJ6GEYJ470 | S.M.CARB | 0.1W | 5% | 47 Ω | |
| R258 | ERJ6GEYJ272 | S.M.CARB | 0.1W | 5% | 2K7 Ω | |
| R259 | ERJ6GEYJ470 | S.M.CARB | 0.1W | 5% | 47 Ω | |
| R260 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R261 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R262 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R263 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K Ω | |
| R264 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R265 | ERD25TJ2R2 | CARBON | 0.25W | 5% | 2R2 Ω | |
| R266 | ERD25TJ2R2 | CARBON | 0.25W | 5% | 2R2 Ω | |
| R267 | ERF7ZK4R7 | WOUND | 7W | 10% | 4R7 Ω ▲ | |
| R268 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R269 | ERQ14AJ101 | METAL | 0.25W | 5% | 100 Ω ▲ | |
| R271 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R272 | ERF7ZK4R7 | WOUND | 7W | 10% | 4R7 Ω ▲ | |
| R350 | ERQ12AJ151P | FUSIBLE | 0.5W | 5% | 150 Ω ▲ | |
| R352 | ERJ6GEYJ202 | S.M.CARB | 0.1W | 5% | 2K Ω | |
| R355 | ERG1ANJ683 | METAL | 1W | 5% | 68K Ω | |
| R356 | ERJ6GEYJ181 | S.M.CARB | 0.1W | 5% | 180 Ω | |
| R357 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 Ω | |
| R358 | ERDS1TJ821 | CARBON | 0.5W | 5% | 820 Ω | |
| R359 | ERD25TC0T | CARBON | 0.25W | 5% | 0 Ω | |
| R360 | ERO50PKF8251 | METAL | 0.5W | 5% | 8M2 Ω ▲ | |
| R362 | ERJ6GEYJ202 | S.M.CARB | 0.1W | 5% | 2K Ω | |
| R365 | ERG1ANJ683 | METAL | 1W | 5% | 68K Ω | |
| R366 | ERJ6GEYJ181 | S.M.CARB | 0.1W | 5% | 180 Ω | |
| R367 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 Ω | |
| R368 | ERDS1TJ821 | CARBON | 0.5W | 5% | 820 Ω | |
| R369 | ERD25TC0T | CARBON | 0.25W | 5% | 0 Ω | |
| R372 | ERJ6GEYJ202 | S.M.CARB | 0.1W | 5% | 2K Ω | |
| R375 | ERG1ANJ683 | METAL | 1W | 5% | 68K Ω | |
| R376 | ERJ6GEYJ181 | S.M.CARB | 0.1W | 5% | 180 Ω | |
| R377 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 Ω | |
| R378 | ERDS1TJ821 | CARBON | 0.5W | 5% | 820 Ω | |
| R379 | ERD25TC0T | CARBON | 0.25W | 5% | 0 Ω | |
| R385 | ERQ12HJ1R2 | METAL | 0.5W | 5% | 1R2 Ω ▲ | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|-----|---------|--|
| R394 | ERJ6GEYJ821 | S.M.CARB | 0.1W | 5% | 820 Ω | |
| R396 | ERJ6GEYJ821 | S.M.CARB | 0.1W | 5% | 820 Ω | |
| R398 | ERJ6GEYJ821 | S.M.CARB | 0.1W | 5% | 820 Ω | |
| R451 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R452 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R453 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R454 | ERJ6GEYJ393 | S.M.CARB | 0.1W | 5% | 39K Ω | |
| R455 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R456 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |
| R457 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R458 | ERDS1TJ1R0 | CARBON | 0.5W | 5% | 1 Ω | |
| R459 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R460 | ERG3SJS151 | METAL | 3W | 5% | 150 Ω | |
| R461 | ERX2SJS1R2H | FUSIBLE | 2W | 5% | 1R2 Ω | |
| R463 | ERD25TJ222 | CARBON | 0.25W | 5% | 2K2 Ω | |
| R464 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 Ω | |
| R465 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R467 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R502 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R503 | ERJ6GEYJ332 | S.M.CARB | 0.1W | 5% | 3K3 Ω | |
| R507 | ERG2ANJ330 | METAL | 2W | 5% | 33 Ω | |
| R509 | ERG1SJ22E | METAL | 0.5W | 5% | 2K2 Ω | |
| R510 | ERG1SJ22E | METAL | 0.5W | 5% | 2K2 Ω | |
| R551 | ERX3SJSR33 | METAL | 3W | 5% | R33 Ω | |
| R555 | ERQ12HKR82 | FUSIBLE | 0.5W | 10% | R82 Ω ▲ | |
| R558 | ERDS1TJ124 | CARBON | 0.5W | 5% | 120K Ω | |
| R559 | ERQ12HKR82 | FUSIBLE | 0.5W | 10% | R82 Ω ▲ | |
| R560 | ERJ6GEYJ274 | S.M.CARB | 0.1W | 5% | 270K Ω | |
| R561 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R563 | ERJ6GEYJ824 | S.M.CARB | 0.1W | 5% | 820K Ω | |
| R564 | ERJ6GEYJ563 | S.M.CARB | 0.1W | 5% | 56K Ω | |
| R566 | ERJ6GEYJ563 | S.M.CARB | 0.1W | 5% | 56K Ω | |
| R567 | ERF7ZK1R0 | WOUND | 7W | 10% | 1 Ω ▲ | |
| R568 | ERDS1TJ120 | CARBON | 0.5W | 5% | 12 Ω | |
| R581 | ERQ2CJP821 | METAL | 2W | 5% | 820 Ω ▲ | |
| R582 | ERG3FJ471 | METAL | 3W | 5% | 470 Ω ▲ | |
| R583 | ERG3FJ331 | METAL | 3W | 5% | 330 Ω ▲ | |
| R603 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R604 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R605 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R606 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R607 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R608 | ERJ6GEYJ201 | S.M.CARB | 0.1W | 5% | 200 Ω | |
| R609 | ERJ6GEYJ201 | S.M.CARB | 0.1W | 5% | 200 Ω | |
| R610 | ERJ6GEYJ242 | S.M.CARB | 0.1W | 5% | 2K4 Ω | |
| R611 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |
| R612 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R620 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R622 | ERJ6GEY0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R647 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R648 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R650 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R701 | ERQ12AJ330P | METAL | 0.5W | 5% | 330 Ω ▲ | |
| R702 | ERX2SJR7 | FUSIBLE | 2W | 5% | 2R7 Ω | |
| R703 | ERG2FJ821 | METAL | 2W | 5% | 820 Ω ▲ | |
| R704 | ERJ6GEYJ563 | S.M.CARB | 0.1W | 5% | 56K Ω | |
| R705 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K Ω | |
| R706 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R707 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R708 | ERJ6GEYJ393 | S.M.CARB | 0.1W | 5% | 39K Ω | |
| R709 | ERJ6GEYJ393 | S.M.CARB | 0.1W | 5% | 39K Ω | |
| R710 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K Ω | |
| R711 | ERG1SJ101 | METAL | 1W | 5% | 100 Ω | |
| R712 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R714 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R715 | ERD25TJ272 | CARBON | 0.25W | 5% | 2K7 Ω | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|-----|--------|---|
| R716 | ERQ12AJ680P | METAL | 0.5W | 5% | 68 Ω | ▲ |
| R718 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R719 | ERJ6GEYJ224 | S.M.CARB | 0.1W | 5% | 220K Ω | |
| R720 | ERJ6GEYJ105 | S.M.CARB | 0.1W | 5% | 1M Ω | |
| R721 | ERJ6GEYJ563 | S.M.CARB | 0.1W | 5% | 56K Ω | |
| R801 | ERC12ZGK335D | SOLID | 0.5W | 10% | 3M3 Ω | |
| R805 | ERD25TJ473 | CARBON | 0.25W | 5% | 47K Ω | |
| R806 | ERD25TJ100 | CARBON | 0.25W | 5% | 10 Ω | |
| R807 | ERD25TJ332 | CARBON | 0.25W | 5% | 3K3 Ω | |
| R809 | ERD25TJ681 | CARBON | 0.25W | 5% | 680 Ω | |
| R810 | ERW2PKR27 | WOUND | 2W | 10% | R27 Ω | ▲ |
| R811 | ERW2PKR27 | WOUND | 2W | 10% | R27 Ω | ▲ |
| R812 | ERD75TAJ825 | CARBON | 0.75W | 5% | 8M2 Ω | ▲ |
| R813 | ERF7ZK2R7 | WOUND | 7W | 20% | 2R7 Ω | ▲ |
| R814 | ERD25TJ473 | CARBON | 0.25W | 5% | 47K Ω | |
| R815 | ERD25TJ222 | CARBON | 0.25W | 5% | 2K2 Ω | |
| R850 | ERD25TJ122 | CARBON | 0.25W | 5% | 1K2 Ω | |
| R852 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R853 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 Ω | |
| R854 | ERG2FJ223 | METAL | 2W | 5% | 22K Ω | ▲ |
| R855 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 Ω | |
| R857 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 Ω | |
| R858 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 Ω | |
| R859 | ERJ6GEYJ753 | S.M.CARB | 0.1W | 5% | 75K Ω | |
| R860 | ERQ1CJP2R2 | FUSIBLE | 1W | 10% | 2R2 Ω | ▲ |
| R861 | ERD25TJ221 | CARBON | 0.25W | 5% | 220 Ω | |
| R862 | ERD25TJ272 | CARBON | 0.25W | 5% | 2K7 Ω | |
| R863 | ERDS1TJ560 | CARBON | 0.5W | 5% | 56 Ω | |
| R864 | ERDS1TJ151 | CARBON | 0.5W | 5% | 150 Ω | |
| R865 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R867 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R868 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R869 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R870 | ERJ6GEYJ272 | S.M.CARB | 0.1W | 5% | 2K7 Ω | |
| R871 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K Ω | |
| R872 | ERG1SJ183 | METAL | 1W | 5% | 18K Ω | |
| R873 | ERG1SJ223 | METAL | 1W | 5% | 22K Ω | |
| R874 | ERD25TJ104 | CARBON | 0.25W | 5% | 100K Ω | |
| R876 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R877 | ERW2PKR47 | WOUND | 2W | 10% | R47 Ω | ▲ |
| R878 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K Ω | |
| R879 | ERG3FJ680H | METAL | 3W | 5% | 68 Ω | ▲ |
| R880 | ERG5FJ120H | METAL | 5W | 5% | 12 Ω | ▲ |
| R890 | ERX1FJ3R9P | FUSIBLE | 1W | 5% | 3R9 Ω | ▲ |
| R913 | ERJ6GEYJ183 | S.M.CARB | 0.1W | 5% | 18K Ω | |
| R914 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R915 | ERJ6GEYJ182 | S.M.CARB | 0.1W | 5% | 1K8 Ω | |
| R916 | ERJ6GEYJ221 | S.M.CARB | 0.1W | 5% | 220 Ω | |
| R917 | ERJ6GEYJ121 | S.M.CARB | 0.1W | 5% | 120 Ω | |
| R918 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R919 | ERQ14AJW390 | FUSIBLE | 0.25W | 5% | 39 Ω | ▲ |
| R920 | ERQ14AJW390 | FUSIBLE | 0.25W | 5% | 39 Ω | ▲ |
| R922 | ERD25TJ683 | CARBON | 0.25W | 5% | 68K Ω | |
| R923 | ERD25TJ683 | CARBON | 0.25W | 5% | 68K Ω | |
| R924 | ERDS1FYJ390 | CARBON | 0.5W | 5% | 39 Ω | ▲ |
| R925 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R926 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R927 | ERD25TJ122 | CARBON | 0.25W | 5% | 1K2 Ω | |
| R928 | ERD25TJ5R6 | CARBON | 0.25W | 5% | 5R6 Ω | |
| R929 | ERDS1FVJ471 | RESISTOR | 0.5W | 5% | 470 Ω | ▲ |
| R931 | ERDS1FYJ390 | CARBON | 0.5W | 5% | 39 Ω | ▲ |
| R935 | ERQ14AJW3R9 | FUSIBLE | 0.25W | 5% | 3R9 Ω | ▲ |
| R936 | ERQ1CJP102 | FUSIBLE | 1W | 5% | 1K Ω | ▲ |
| R937 | ERQ14AJW100 | FUSIBLE | 0.25W | 5% | 10 Ω | ▲ |
| R938 | ERD25TJ122 | CARBON | 0.25W | 5% | 1K2 Ω | |
| R941 | ERD25TJ5R6 | CARBON | 0.25W | 5% | 5R6 Ω | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|------|----|--------|--|
| R1051 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1052 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1053 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1054 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1071 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1101 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1102 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1103 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R1104 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R1105 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1106 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |
| R1107 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |
| R1108 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1109 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1110 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1111 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1112 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K Ω | |
| R1113 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1115 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1116 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1117 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1118 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1119 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1120 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1121 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1123 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1125 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1126 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1127 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1128 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 Ω | |
| R1129 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 Ω | |
| R1130 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1131 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1132 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1133 | ERJ6GEYJ272 | S.M.CARB | 0.1W | 5% | 2K7 Ω | |
| R1136 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K Ω | |
| R1137 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1138 | ERJ6GEYJ105 | S.M.CARB | 0.1W | 5% | 1M Ω | |
| R1139 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1140 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1141 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1145 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1146 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1147 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1148 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1149 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R1151 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1152 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1156 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1157 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1158 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1159 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1160 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R1161 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1162 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R1163 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R1164 | ERJ6GEYJ332 | S.M.CARB | 0.1W | 5% | 3K3 Ω | |
| R1165 | ERJ6GEYJ512 | S.M.CARB | 0.1W | 5% | 5K1 Ω | |
| R1166 | ERJ6GEYJ912 | S.M.CARB | 0.1W | 5% | 9K1 Ω | |
| R1167 | ERJ6GEYJ100 | S.M.CARB | 0.1W | 5% | 10 Ω | |
| R1168 | ERJ6GEYJ473 | S.M.CARB | 0.1W | 5% | 47K Ω | |
| R1169 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1170 | ERJ6GEYJ273 | S.M.CARB | 0.1W | 5% | 27K Ω | |
| R1171 | ERJ6GEYJ224 | S.M.CARB | 0.1W | 5% | 220K Ω | |
| R1172 | ERJ6GEYJ223 | S.M.CARB | 0.1W | 5% | 22K Ω | |
| R1173 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|------|----|-------|--|
| R1174 | ERJ6GEYJ221 | S.M.CARB | 0.1W | 5% | 220 Ω | |
| R1175 | ERJ6GEYJ225 | S.M.CARB | 0.1W | 5% | 2M2 Ω | |
| R1178 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1501 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1502 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1504 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1505 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1506 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1507 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1508 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1509 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1510 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1511 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1512 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1513 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1514 | ERJ6GEYJ472 | S.M.CARB | 0.1W | 5% | 4K7 Ω | |
| R1515 | ERJ6GEYJ752 | S.M.CARB | 0.1W | 5% | 7K5 Ω | |
| R1517 | ERJ6GEYJ0R00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1521 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1522 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R1523 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R1524 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1525 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1526 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R1527 | ERJ6GEYJ122 | S.M.CARB | 0.1W | 5% | 1K2 Ω | |
| R1528 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1529 | ERJ6GEYJ122 | S.M.CARB | 0.1W | 5% | 1K2 Ω | |
| R1530 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1531 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1532 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R1533 | ERJ6GEYJ122 | S.M.CARB | 0.1W | 5% | 1K2 Ω | |
| R1534 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R1535 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R1536 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R1537 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 Ω | |
| R1538 | ERJ6GEYJ331 | S.M.CARB | 0.1W | 5% | 330 Ω | |
| R1539 | ERJ6GEYJ271 | S.M.CARB | 0.1W | 5% | 270 Ω | |
| R1540 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 Ω | |
| R1541 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1542 | ERJ6GEYJ152 | S.M.CARB | 0.1W | 5% | 1K5 Ω | |
| R1543 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1544 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1545 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1546 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1547 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1548 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1549 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1550 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1551 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1552 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1553 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1554 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1555 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1556 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1557 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1558 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1559 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1560 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1561 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1562 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1563 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1564 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1565 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1566 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1567 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1568 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|----|--------|--|
| R1569 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1570 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1571 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1572 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1573 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1574 | ERJ6GEYJ682 | S.M.CARB | 0.1W | 5% | 6K8 Ω | |
| R1575 | ERJ6GEYR00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R1577 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1578 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R1579 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1580 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R1584 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1585 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R1586 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R2101 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R2102 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2103 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2109 | ERJ6GEYJ183 | S.M.CARB | 0.1W | 5% | 18K Ω | |
| R2110 | ERJ6GEYR00 | S.M.CARB | 0.1W | 5% | 0 Ω | |
| R2111 | ERJ6GEYJ221 | S.M.CARB | 0.1W | 5% | 220 Ω | |
| R2112 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R2113 | ERJ6GEYJ562 | S.M.CARB | 0.1W | 5% | 5K6 Ω | |
| R2114 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2115 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 Ω | |
| R2116 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2117 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2118 | ERJ6GEYJ822 | S.M.CARB | 0.1W | 5% | 8K2 Ω | |
| R2119 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2120 | ERJ6GEYJ222 | S.M.CARB | 0.1W | 5% | 2K2 Ω | |
| R2302 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |
| R2303 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2304 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R2305 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R2306 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R2308 | ERJ6GEYJ104 | S.M.CARB | 0.1W | 5% | 100K Ω | |
| R2309 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R2310 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R2311 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R2312 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R3001 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3002 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R3003 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3004 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K Ω | |
| R3005 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3006 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R3007 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3008 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K Ω | |
| R3010 | ERD25TJ750 | CARBON | 0.25W | 5% | 75 Ω | |
| R3013 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3014 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R3015 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3016 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K Ω | |
| R3017 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3018 | ERJ6GEYJ471 | S.M.CARB | 0.1W | 5% | 470 Ω | |
| R3019 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3020 | ERJ6GEYJ153 | S.M.CARB | 0.1W | 5% | 15K Ω | |
| R3021 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R3046 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3047 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3048 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R3049 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω | |
| R3050 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω | |
| R3057 | ERJ6GEYJ750 | S.M.CARB | 0.1W | 5% | 75 Ω | |
| R3354 | ERJ6GEYJ102 | S.M.CARB | 0.1W | 5% | 1K Ω | |
| R3355 | ERJ6GEYJ391 | S.M.CARB | 0.1W | 5% | 390 Ω | |
| R3356 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 Ω | |

| Cct Ref | Parts Number | Description | | | |
|-------------------|--------------|-------------|------|--|---|
| R3357 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 Ω |
| R3358 | ERJ6GEYJ681 | S.M.CARB | 0.1W | 5% | 680 Ω |
| R3360 | ERDS1TJ471 | CARBON | 0.5W | 5% | 470 Ω |
| R3361 | ERO50PKF1133 | METAL | 0.5W | 5% | 110K Ω ⚠ |
| R3362 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω |
| R3363 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω |
| R3364 | ERJ6GEYJ103 | S.M.CARB | 0.1W | 5% | 10K Ω |
| R3601 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω |
| R3602 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω |
| R3603 | ERJ6GEYJ101 | S.M.CARB | 0.1W | 5% | 100 Ω |
| RL801 | TSE1885-1 | RELAY | | | Ω |
| CAPACITORS | | | | | |
| C102 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C103 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C106 | ECUV1H560JCX | S.M. CAP | 50V | 56pF | |
| C107 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C108 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C109 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | |
| C110 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C111 | ECA1HMR33GB | ELECT | 50V | 0.33μF | |
| C117 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF | |
| C118 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C119 | ECA1CM102B | ELECT | 16V | 1000μF | |
| C120 | ECA1CM221GB | ELECT | 16V | 220μF | |
| C121 | ECUV1H561KBX | S.M. CAP | 50V | 560pF | |
| C122 | ECUV1H102KBX | S.M. CAP | 50V | 1nF | |
| C123 | ECUV1H102KBX | S.M. CAP | 50V | 1nF | |
| C124 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | |
| C125 | ECUV1H100DCX | S.M. CAP | 50V | 10pF | |
| C251 | ECA1EM330B | ELECT | 25V | 33μF | |
| C252 | ECUV1H472KBX | S.M. CAP | 50V | 4.7nF | |
| C253 | ECA1HM4R7GB | ELECT | 50V | 4.7μF | |
| C254 | ECQM1H684J | FILM | 50V | 680nF | |
| C255 | ECA1EM101GB | ELECT | 25V | 100μF | |
| C256 | ECUV1H472KBX | S.M. CAP | 50V | 4.7nF | |
| C257 | ECA1HM4R7GB | ELECT | 50V | 4.7μF | |
| C258 | ECA1EM330B | ELECT | 25V | 33μF | |
| C259 | ECQM1H684J | FILM | 50V | 680nF | |
| C260 | ECA1VM102GB | ELECT | 35V | 1nF | |
| C261 | ECA1VM102GB | ELECT | 35V | 1nF | |
| C262 | ECQM1H334J | FILM | 50V | 330nF | |
| C263 | ECA1HM010GB | ELECT | 50V | 1μF | |
| C264 | ECA1HHG222E | ELECT | 50V | 2200μF | |
| C265 | ECQM1H334J | FILM | 50V | 330nF | |
| C266 | ECA1HM010GB | ELECT | 50V | 1μF | |
| C267 | ECJ2VB1H104K | ELECT | 350V | 100nF | |
| C268 | ECJ2VB1H104K | ELECT | 350V | 100nF | |
| C270 | ECJ2VB1H104K | ELECT | 350V | 100nF | |
| C352 | ECUV1H224ZFX | S.M. CAP | 50V | 220nF | |
| C353 | ECUV1H104KBX | S.M. CAP | 50V | 100nF | |
| C354 | ECQM2104KZ | FILM | 250V | 100nF | |
| C355 | ECKC2H102J | CERAMIC | 500V | 1nF ⚠ | |
| C358 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C362 | ECUV1H224ZFX | S.M. CAP | 50V | 220nF | |
| C363 | ECUV1H104KBX | S.M. CAP | 50V | 100nF | |
| C364 | ECQM2104KZ | FILM | 250V | 100nF | |
| C365 | ECKC2H102J | CERAMIC | 500V | 1nF ⚠ | |
| C368 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C369 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | |
| C372 | ECUV1H224ZFX | S.M. CAP | 50V | 220nF | |
| C373 | ECUV1H104KBX | S.M. CAP | 50V | 100nF | |
| C374 | ECQM2104KZ | FILM | 250V | 100nF | |
| C375 | ECKC2H102J | CERAMIC | 500V | 1nF ⚠ | |
| C378 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | |
| C381 | ECA1HM101GB | ELECT | 50V | 100μF | |
| C382 | ECA1CM471GB | ELECT | 16V | 470μF | |

| Cct Ref | Parts Number | Description | | | |
|---------|--------------|-------------|-------|--|--|
| C383 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C384 | ECQM2104KZ | FILM | 250V | 100nF | |
| C385 | ECA2EM220B | ELECT | 250V | 22μF | |
| C386 | ECKC3D152J | CERAMIC | 2KV | 1.5nF ⚠ | |
| C395 | ECQM1H104J | FILM | 50V | 100nF | |
| C396 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C451 | ECUV1H102JX | S.M. CAP | 50V | 1nF | |
| C453 | ECUV1H152KBX | S.M. CAP | 50V | 1.5pF | |
| C454 | ECQV1H105JZ | FILM | 50V | 1μF | |
| C455 | ECA1HM100GB | ELECT | 50V | 10μF | |
| C456 | ECA1HHG221B | ELECT | 50V | 220μF | |
| C459 | ECQB1224KFW | FILM | 100V | 220nF | |
| C463 | ECEA1HU221 | ELECT | 50V | 220μF | |
| C509 | ECA1VM470B | ELECT | 35V | 47μF | |
| C511 | ECQM2683JZ | FILM | 250V | 68nF | |
| C551 | ECKC3D681J | CERAMIC | 2KV | 680pF ⚠ | |
| C552 | ECWH15H102JN | FILM | 1500V | 1nF | |
| C557 | ECKC2H471J | CERAMIC | 500V | 470pF ⚠ | |
| C558 | ECA1HHG471E | ELECT | 50V | 470μF | |
| C561 | ECA1EHG102B | ELECT | 25V | 1000μF | |
| C562 | ECKC2H101J | CERAMIC | 500V | 100pF ⚠ | |
| C563 | ECA2EHG220B | ELECT | 250V | 20μF | |
| C564 | ECEA2AU2R2 | ELECT | 100V | 2.2μF | |
| C565 | ECQP1H273J | FILM | 100V | 2700μF | |
| C566 | ECKC2H471J | CERAMIC | 500V | 470pF ⚠ | |
| C567 | ECA1EHG102B | ELECT | 25V | 1000μF | |
| C568 | ECKC2H471J | CERAMIC | 500V | 470pF ⚠ | |
| C569 | ECKC2H102J | CERAMIC | 500V | 1nF ⚠ | |
| C581 | ECWF4684JBB | FILM | 400V | 680nF | |
| C582 | ECWF4684JBB | FILM | 400V | 680nF | |
| C583 | ECWH20562JVB | FILM | 200V | 5.6nF | |
| C584 | ECWH20562JVB | FILM | 200V | 5.6nF | |
| C586 | ECQF4123JZH | FILM | 400V | 12nF ⚠ | |
| C587 | ECQM4223KC | FILM | 400V | 220nF | |
| C608 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C609 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | |
| C623 | ECUV1H121JCX | S.M. CAP | 50V | 120pF | |
| C624 | ECUV1H121JCX | S.M. CAP | 50V | 120pF | |
| C625 | ECQM1H224J | FILM | 50V | 220nF | |
| C626 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C627 | ECUV1C104KBX | S.M. CAP | 16V | 100nF | |
| C628 | ECQM1H224J | FILM | 50V | 220nF | |
| C701 | ECA1HHG101B | ELECT | 50V | 100μF | |
| C702 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | |
| C703 | ECEA1HGE100 | ELECT | 50V | 10μF | |
| C704 | ECUV1H223KBX | S.M. CAP | 50V | 22nF | |
| C705 | ECQB1H102J | FILM | 50V | 1nF | |
| C709 | ECQV1H105JZ | FILM | 50V | 1μF | |
| C801 | ECQE2A474MWB | FILM | 250V | 470nF | |
| C804 | 222233510224 | FILM | 250V | 220nF | |
| C806 | ECKWNA101MBC | CERAMIC | 400V | 100μF | |
| C807 | ECKC2H472J | CERAMIC | 500V | 4.7nF ⚠ | |
| C808 | ECKC2H472J | CERAMIC | 500V | 4.7nF ⚠ | |
| C809 | ECKC2H472J | CERAMIC | 500V | 4.7nF ⚠ | |
| C810 | ECKC2H472J | CERAMIC | 500V | 4.7nF ⚠ | |
| C811 | ECOS2GA221CA | ELECT | 400V | 220μF | |
| C814 | ECKC3D102J | CERAMIC | 2KV | 1nF ⚠ | |
| C815 | ECKC1H471J | CERAMIC | 50V | 470pF | |
| C816 | ECA1EM101GB | ELECT | 25V | 100μF | |
| C817 | ECQE6104K | FILM | 600V | 100nF ⚠ | |
| C818 | ECKCNS332J | CERAMIC | 1.2KV | 3.3nF ⚠ | |
| C819 | ECQB1H152K | FILM | 50V | 1.5nF | |
| C820 | ECJ2VF1H104Z | ELECT | 350V | 100nF | |
| C839 | ECA1CM100GB | ELECT | 16V | 10μF | |
| C840 | ECUV1H104KBX | S.M. CAP | 50V | 100nF | |
| C841 | ECA1AM222B | ELECT | 10V | 2200μF | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|-------|--------|---|--|
| C850 | ECKC3D471JB | CERAMIC | 2KV | 470pF | ▲ | |
| C851 | ECA2CHG221E | ELECT | 160V | 220µF | | |
| C852 | ECA2CHG101E | ELECT | 160V | 100µF | | |
| C853 | ECKC2H471J | CERAMIC | 500V | 470pF | ▲ | |
| C854 | ECA1EM102GB | ELECT | 25V | 100µF | | |
| C855 | ECKC2H471J | CERAMIC | 500V | 470pF | ▲ | |
| C856 | ECA1AHG332B | ELECT | 10V | 3.3nF | | |
| C857 | ECKC2H471J | CERAMIC | 500V | 470pF | ▲ | |
| C858 | ECEA1HGE102 | ELECT | 50V | 1000µF | | |
| C859 | ECJ2VF1H104Z | ELECT | 350V | 100nF | | |
| C860 | ECA1HM101GB | ELECT | 50V | 100µF | | |
| C862 | ECJ2VF1H104Z | ELECT | 350V | 100nF | | |
| C863 | ECA1HM101GB | ELECT | 50V | 100µF | | |
| C866 | ECJ2VF1H104Z | ELECT | 350V | 100nF | | |
| C867 | ECA1CM100GB | ELECT | 16V | 10µF | | |
| C868 | ECA1CM100GB | ELECT | 16V | 10µF | | |
| C869 | ECA1EM101GB | ELECT | 25V | 100µF | | |
| C870 | ECA1EM471GB | ELECT | 25V | 470µF | | |
| C871 | ECA1CM102B | ELECT | 16V | 1000µF | | |
| C872 | ECA1CM471GB | ELECT | 16V | 470µF | | |
| C873 | ECA1CM100GB | ELECT | 16V | 10µF | | |
| C875 | ECA2CM4R7B | ELECT | 160V | 10µF | | |
| C876 | ECA1AHG331E | ELECT | 10V | 330µF | | |
| C902 | ECA1VM101GB | ELECT | 35V | 100µF | | |
| C904 | ECJ2VF1H103Z | ELECT | 350V | 10nF | | |
| C906 | ECUV1H680JCX | S.M. CAP | 50V | 68pF | | |
| C907 | ECUV1H121JCX | S.M. CAP | 50V | 120pF | | |
| C908 | ECUV1H151JCX | S.M. CAP | 50V | 150pF | | |
| C909 | ECKC2H472J | CERAMIC | 500V | 4.7nF | ▲ | |
| C910 | ECKC2H472J | CERAMIC | 500V | 4.7nF | ▲ | |
| C911 | ECUV1H151JCX | S.M. CAP | 50V | 150pF | | |
| C912 | ECA2EM220B | ELECT | 250V | 22µF | | |
| C913 | ECA1HM101GB | ELECT | 50V | 100µF | | |
| C914 | ECA1HM101GB | ELECT | 50V | 100µF | | |
| C916 | ECA2EM220B | ELECT | 250V | 22µF | | |
| C917 | ECA1HM100GB | ELECT | 50V | 10µF | | |
| C918 | ECJ2VF1H103Z | ELECT | 350V | 10nF | | |
| C919 | ECCR2H270J | CERAMIC | 500V | 27pF | | |
| C1071 | ECUV1H331JCX | S.M. CAP | 50V | 330pF | | |
| C1072 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | | |
| C1073 | ECA1HM101GB | ELECT | 50V | 100µF | | |
| C1101 | ECJ2VF1H104Z | ELECT | 350V | 100nF | | |
| C1102 | ECA0JM101G | ELECT | 6.3V | 100µF | | |
| C1103 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | | |
| C1104 | ECUV1H220JCX | S.M. CAP | 50V | 22pF | | |
| C1105 | ECUV1H101JCX | S.M. CAP | 50V | 100pF | | |
| C1108 | ECJ2VB1H333K | ELECT | 350V | 33nF | | |
| C1111 | ECA1CM100GB | ELECT | 16V | 10µF | | |
| C1112 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | | |
| C1115 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF | | |
| C1116 | ECUV1H472KBX | S.M. CAP | 50V | 4.7nF | | |
| C1117 | ECJ2VF1H104Z | ELECT | 350V | 100nF | | |
| C1118 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | | |
| C1119 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | | |
| C1120 | ECJ2VF1H104Z | ELECT | 350V | 100nF | | |
| C1121 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | | |
| C1123 | ECUV1H471JCX | S.M. CAP | 50V | 470pF | | |
| C1124 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | | |
| C1125 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | | |
| C1126 | ECUV1H221JCX | S.M. CAP | 50V | 220pF | | |
| C1127 | ECUV1H561JCX | S.M. CAP | 50V | 560pF | | |
| C1129 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | | |
| C1501 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1502 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1503 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1504 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |

| Cct Ref | Parts Number | Description | | | | |
|---------|--------------|-------------|------|-------|--|--|
| C1505 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1506 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1507 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1508 | ECUV1H271JCX | S.M. CAP | 50V | 270pF | | |
| C1509 | ECQM1H684J | FILM | 50V | 680nF | | |
| C1510 | ECQM1H684J | FILM | 50V | 680nF | | |
| C1511 | ECQM1H684J | FILM | 50V | 680nF | | |
| C1512 | ECQM1H684J | FILM | 50V | 680nF | | |
| C1513 | ECUV1H102JCX | S.M. CAP | 50V | 1nF | | |
| C1514 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1515 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1516 | ECEA1CKA101 | ELECT | 16V | 100µF | | |
| C1517 | ECJ2VB1H473K | ELECT | 350V | 47nF | | |
| C1518 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1519 | ECUV1H050CCX | S.M. CAP | 50V | 50pF | | |
| C1520 | ECUV1H050CCX | S.M. CAP | 50V | 50pF | | |
| C1521 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1522 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1523 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1524 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1525 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1526 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1527 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1528 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1529 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1530 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1531 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1532 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1540 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF | | |
| C1541 | ECJ2VB1H333K | ELECT | 350V | 33nF | | |
| C1542 | ECJ2VB1H333K | ELECT | 350V | 33nF | | |
| C1543 | ECJ2VB1C224K | ELECT | 350V | 220nF | | |
| C1544 | ECJ2VB1H333K | ELECT | 350V | 33nF | | |
| C1545 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1546 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1547 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1548 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1549 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1550 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1551 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | | |
| C1552 | ECUV1H103KBX | S.M. CAP | 50V | 10nF | | |
| C1553 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1554 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1555 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1556 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | | |
| C1557 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | | |
| C1558 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1559 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1560 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1561 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1562 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1563 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1564 | ECJ2VB1C104K | ELECT | 350V | 100nF | | |
| C1566 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | | |
| C1567 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1568 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1569 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1570 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1571 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1572 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1573 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1574 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1575 | ECEA1CKA100 | ELECT | 16V | 10µF | | |
| C1576 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |
| C1577 | ECUV1H270JCX | S.M. CAP | 50V | 27pF | | |
| C1578 | ECJ2VB1H103K | ELECT | 350V | 10nF | | |

| Cct Ref | Parts Number | Description | | |
|---------|--------------|-------------|-------|--------|
| C1579 | ECJ2VB1H103K | ELECT | 350V | 10nF |
| C1580 | ECJ2VB1H103K | ELECT | 350V | 10nF |
| C1581 | ECJ2VB1C224K | ELECT | 350V | 220nF |
| C1582 | ECJ2VB1C224K | ELECT | 350V | 220nF |
| C1583 | ECJ2VB1C224K | ELECT | 350V | 220nF |
| C1584 | ECJ2VB1C104K | ELECT | 350V | 100nF |
| C1585 | ECEA1CKA100 | ELECT | 16V | 10µF |
| C1586 | ECJ2VB1H103K | ELECT | 350V | 10nF |
| C1587 | ECEA1CKA100 | ELECT | 16V | 10µF |
| C1588 | ECEA1CKA100 | ELECT | 16V | 10µF |
| C1589 | ECJ2VB1H103K | ELECT | 350V | 10nF |
| C1590 | ECJ2VB1H103K | ELECT | 350V | 10nF |
| C1591 | ECEA1CKA100 | ELECT | 16V | 10µF |
| C1592 | ECUV1H271JCX | S.M. CAP | 50V | 270pF |
| C1594 | ECUV1H271JCX | S.M. CAP | 50V | 270pF |
| C1596 | ECUV1H271JCX | S.M. CAP | 50V | 270pF |
| C1598 | ECUV1H330JCX | S.M. CAP | 50V | 33pF |
| C1603 | ECKC1H271J | CERAMIC | 50V | 270pF |
| C2101 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2102 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2103 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2104 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2105 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2106 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2107 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2108 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2109 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2110 | ECUV1H102JCX | S.M. CAP | 50V | 1nF |
| C2111 | ECA1CM100GB | ELECT | 16V | 10µF |
| C2112 | ECA1CM100GB | ELECT | 16V | 10µF |
| C2113 | ECA1HM3R3GB | ELECT | 50V | 3.3µF |
| C2114 | ECJ2VF1H104Z | ELECT | 350V | 100nF |
| C2117 | ECUV1H221JCX | S.M. CAP | 50V | 220pF |
| C2118 | ECUV1H221JCX | S.M. CAP | 50V | 220pF |
| C2119 | ECUV1H221JCX | S.M. CAP | 50V | 220pF |
| C2120 | ECUV1H221JCX | S.M. CAP | 50V | 220pF |
| C2121 | ECA1CM100GB | ELECT | 16V | 10µF |
| C2122 | ECJ2VF1H104Z | ELECT | 350V | 100nF |
| C2123 | ECUV1H221JCX | S.M. CAP | 50V | 220pF |
| C2124 | ECUV1H070DTX | S.M. CAP | 50V | 70pF |
| C2125 | ECUV1H470JCX | S.M. CAP | 50V | 47pF |
| C2126 | ECUV1H070DTX | S.M. CAP | 50V | 70pF |
| C2127 | ECUV1H010CCX | S.M. CAP | 50V | 1pF |
| C2128 | ECUV1H010CCX | S.M. CAP | 50V | 1pF |
| C2129 | ECA1CM102B | ELECT | 16V | 1000µF |
| C2130 | ECA1CM331B | ELECT | 16V | 330µF |
| C2134 | ECUV1H103ZFX | S.M. CAP | 50V | 10nF |
| C2135 | ECA1HM101GB | ELECT | 50V | 100µF |
| C2136 | ECJ2VF1H104Z | ELECT | 350V | 100nF |
| C2137 | ECA1CM100GB | ELECT | 16V | 10µF |
| C2138 | ECUV1H471KBX | S.M. CAP | 50V | 470pF |
| C2139 | ECUV1H221JCX | S.M. CAP | 50V | 220pF |
| C2140 | ECA1HM101GB | ELECT | 50V | 100µF |
| C2141 | ECUV1H152JCX | S.M. CAP | 50V | 1.5pF |
| C2301 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C2302 | ECA1CM470GB | ELECT | 16V | 47µF |
| C2303 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C2304 | ECA1CM470GB | ELECT | 16V | 47µF |
| C3001 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3002 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3003 | ECA1CM470GB | ELECT | 16V | 47µF |
| C3005 | ECUV1H561JCX | S.M. CAP | 50V | 560pF |
| C3006 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF |
| C3007 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3008 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3009 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |

| Cct Ref | Parts Number | Description | | |
|----------------------------|--------------|--------------|-------|-------|
| C3010 | ECA1CM470GB | ELECT | 16V | 47µF |
| C3012 | ECUV1H561JCX | S.M. CAP | 50V | 560pF |
| C3013 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF |
| C3014 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3015 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3016 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3017 | ECA1CM470GB | ELECT | 16V | 47µF |
| C3019 | ECUV1H561JCX | S.M. CAP | 50V | 560pF |
| C3020 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF |
| C3021 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3022 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3023 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3024 | ECA1CM470GB | ELECT | 16V | 47µF |
| C3026 | ECUV1H561JCX | S.M. CAP | 50V | 560pF |
| C3027 | ECJ3VB1C474K | ELECT | 3.5KV | 470nF |
| C3028 | ECUV1H222JCX | S.M. CAP | 50V | 2.2nF |
| C3030 | ECUV1H271JCX | S.M. CAP | 50V | 270pF |
| C3031 | ECUV1H271JCX | S.M. CAP | 50V | 270pF |
| C3032 | ECUV1H271JCX | S.M. CAP | 50V | 270pF |
| C3101 | ECUV1H104KBX | S.M. CAP | 50V | 100nF |
| C3102 | ECUV1E104KBX | S.M. CAP | 25V | 100nF |
| C3111 | ECUV1H391JCX | S.M. CAP | 50V | 390pF |
| C3351 | ECA1CM221GB | ELECT | 16V | 220µF |
| TERMINALS AND LINKS | | | | |
| JK2301 | JPJ841101320 | RCA SOCKET | | |
| JK3001 | 0350808500 | SCART SOCKET | | |
| SWITCHES | | | | |
| S801 | ESB92S11B | SWITCH | | |
| S1201 | EVQ21405R | SWITCH | | |
| S1202 | EVQ21405R | SWITCH | | |
| S1203 | EVQ21405R | SWITCH | | |
| S1204 | EVQ21405R | SWITCH | | |
| S1205 | EVQ21405R | SWITCH | | |

**SCHEMATIC DIAGRAMS FOR MODEL
TX-28SL20C
(EURO-4H CHASSIS)**

IMPORTANT SAFETY NOTICE

Components identified by  mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

NOTES

1. RESISTOR

All resistors are carbon $\frac{1}{4}W$ resistor, unless marked otherwise.

Unit of resistance is OHM (Ω) ($k=1,000$, $M=1,000,000$)

2. CAPACITORS

All capacitors are ceramic 50V unless marked otherwise.

Unit of capacitance is μF unless otherwise stated.

3. COIL

Unit of inductance is μH , unless otherwise stated.

4. Components marked "L" on the schematic diagram shows leadless parts.

5. TEST POINT



Test Point Position

6. EARTH SYMBOL

 Chassis Earth (Cold)



Line Earth (Hot)

7. VOLTAGE MEASUREMENT

Voltage is measured by a d.c. voltmeter.

Measurement conditions are as follows:

Power source a.c. 220V-240V, 50Hz

Receiving Signal Colour Bar signal (RF)

All customer controls Maximum position

8.  Indicates the Video signal path

 Indicates the Audio signal path

These schematic diagrams are the latest at time of printing and are subject to change without notice.

REMARKS

1. The Power Supply Circuit contains a circuit area which uses a separate power supply to isolate the earth connection. The circuit is defined by HOT and COLD indications in the schematic diagram. All circuits except the Power Circuit, are COLD. Take the following precautions :-
 - a. Do not touch the hot part, or the hot and cold parts at the same time, as you are liable to a shock hazard.
 - b. Do not short circuit the hot and cold circuits as electrical components may be damaged.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously as this may cause fuse failure. Connect the earth of the instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.

**ZEICHENERKLÄRUNG FÜR MODELL
TX-28SL20C
(EURO-4H CHASSIS)**

WICHTIGER SICHERHEITSHINWEIS

Teile, die mit einen Hinweis  gekennzeichnet sind, sind wichtig für die Sicherheit. Sollte ein Auswechseln erforderlich sein, sind unbedingt Originalteile einzusetzen.

ANMERKUNG

1. WIDERSTÄNDE

Alle $\frac{1}{4}W$ Widerstände sind Kohlewiderstände, Abweichungen sind folgt gekennzeichnet.

Die Maßeinheit ist OHM (Ω) ($k=1,000$, $M=1,000,000$)

2. KONDENSATOREN

Alle Kondensatoren sind Keramikausführungen.


Spannungsfestigkeit 50V. Abweichungen sind wie folgt gekennzeichnet. Die Maßeinheit ist μF , wenn keine anderen Bezeichnungen genannt sind.

3. SPULEN

Die Maßeinheit ist μH , Abweichungen sind gekennzeichnet.

4. Mit "L" gekennzeichnete Teile sind ohne Anschlußdrähte.

5. TESTPUNKTE



Kennzeichnung der Testpunktposition

6. MASSE SYMBOL

 Erdung am Chassis



Erdung an Masse-Leitung

7. SPANNUNGSMESSUNG

Spannungsmessungen sind mit einem d.c.-Voltmeter durchzuführen. Die Meßbedingungen sind folgende:

Netzspannung a.c. 220V-240V, 50Hz

Wiedergabe Signal Farbbalken-Testbild

Wiedergabesignal Farbbalken-Testbild (HF)


8.  Videosignalweg

 Audiosignalweg


Änderungen im Laufe der Fertigung sind möglich.


BEMERKUNGEN

1. Das Schaltnetzteil enthält Bereiche, die direkt mit dem Netz verbunden sind. Diese Bereiche sind im Schaltplan mit HOT gekennzeichnet. Alle anderen Schaltungen sind mit COLD gekennzeichnet und haben keine direkte Verbindung mit dem Netz :-
 - a. Weder die Leitungen im heißen noch Leitungen im heißen und im kalten Bereich gleichzeitig berühren. Es besteht die Gefahr eines elektrischen Schläges.
 - b. Keinesfalls die Leitungen im heißen Bereich mit denen im kalten Bereich verbinden oder kurzschließen. Dies kann zur Zerstörung von Bauteilen oder Sicherungen führen. Außerdem ist die elektrische Betriebssicherheit des Gerätes nicht mehr gegeben.
 - c. Keine Messinstrumente gleichzeitig an Leitungen im heißen und kalten Bereich anschließen. Sicherungen könnten zerstört werden. Die Erde des Messinstrumentes immer mit der des zu prüfenden Schaltkreises verbinden.
 - d. Vor Ausbau des Chassis, Stecker aus der Netzsteckdose ziehen.

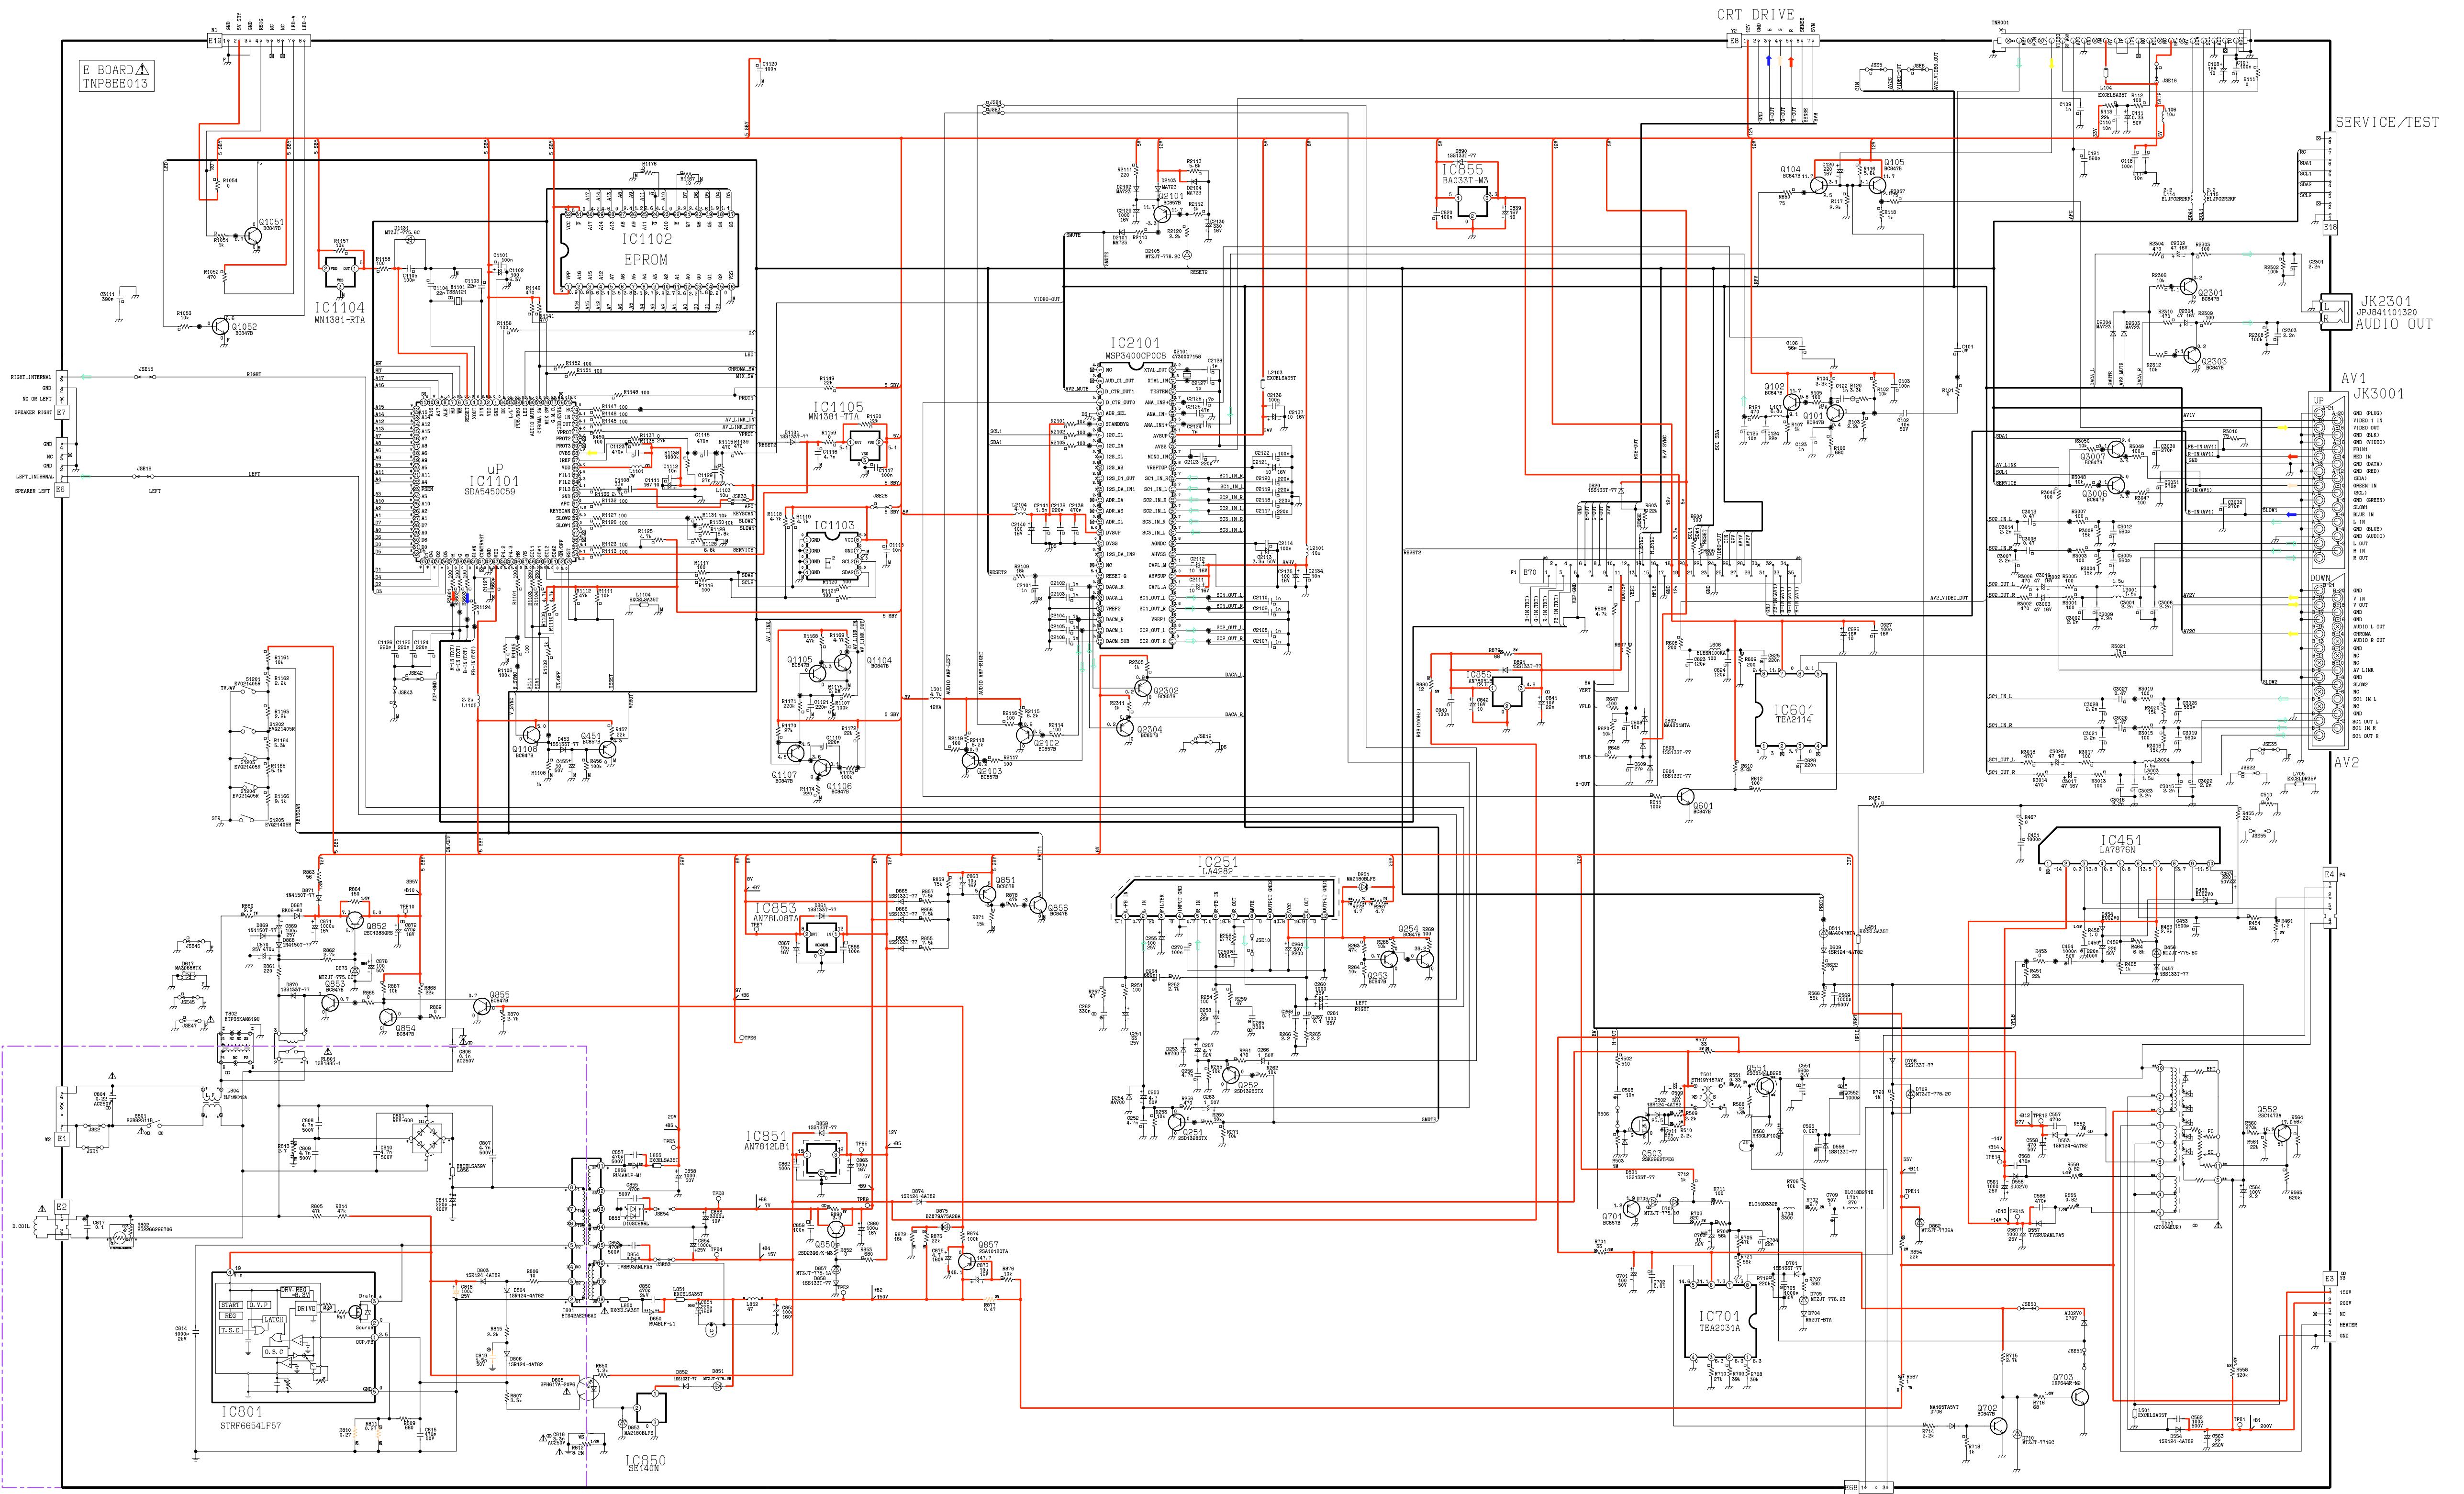



F BOARD 
TNP8EF007

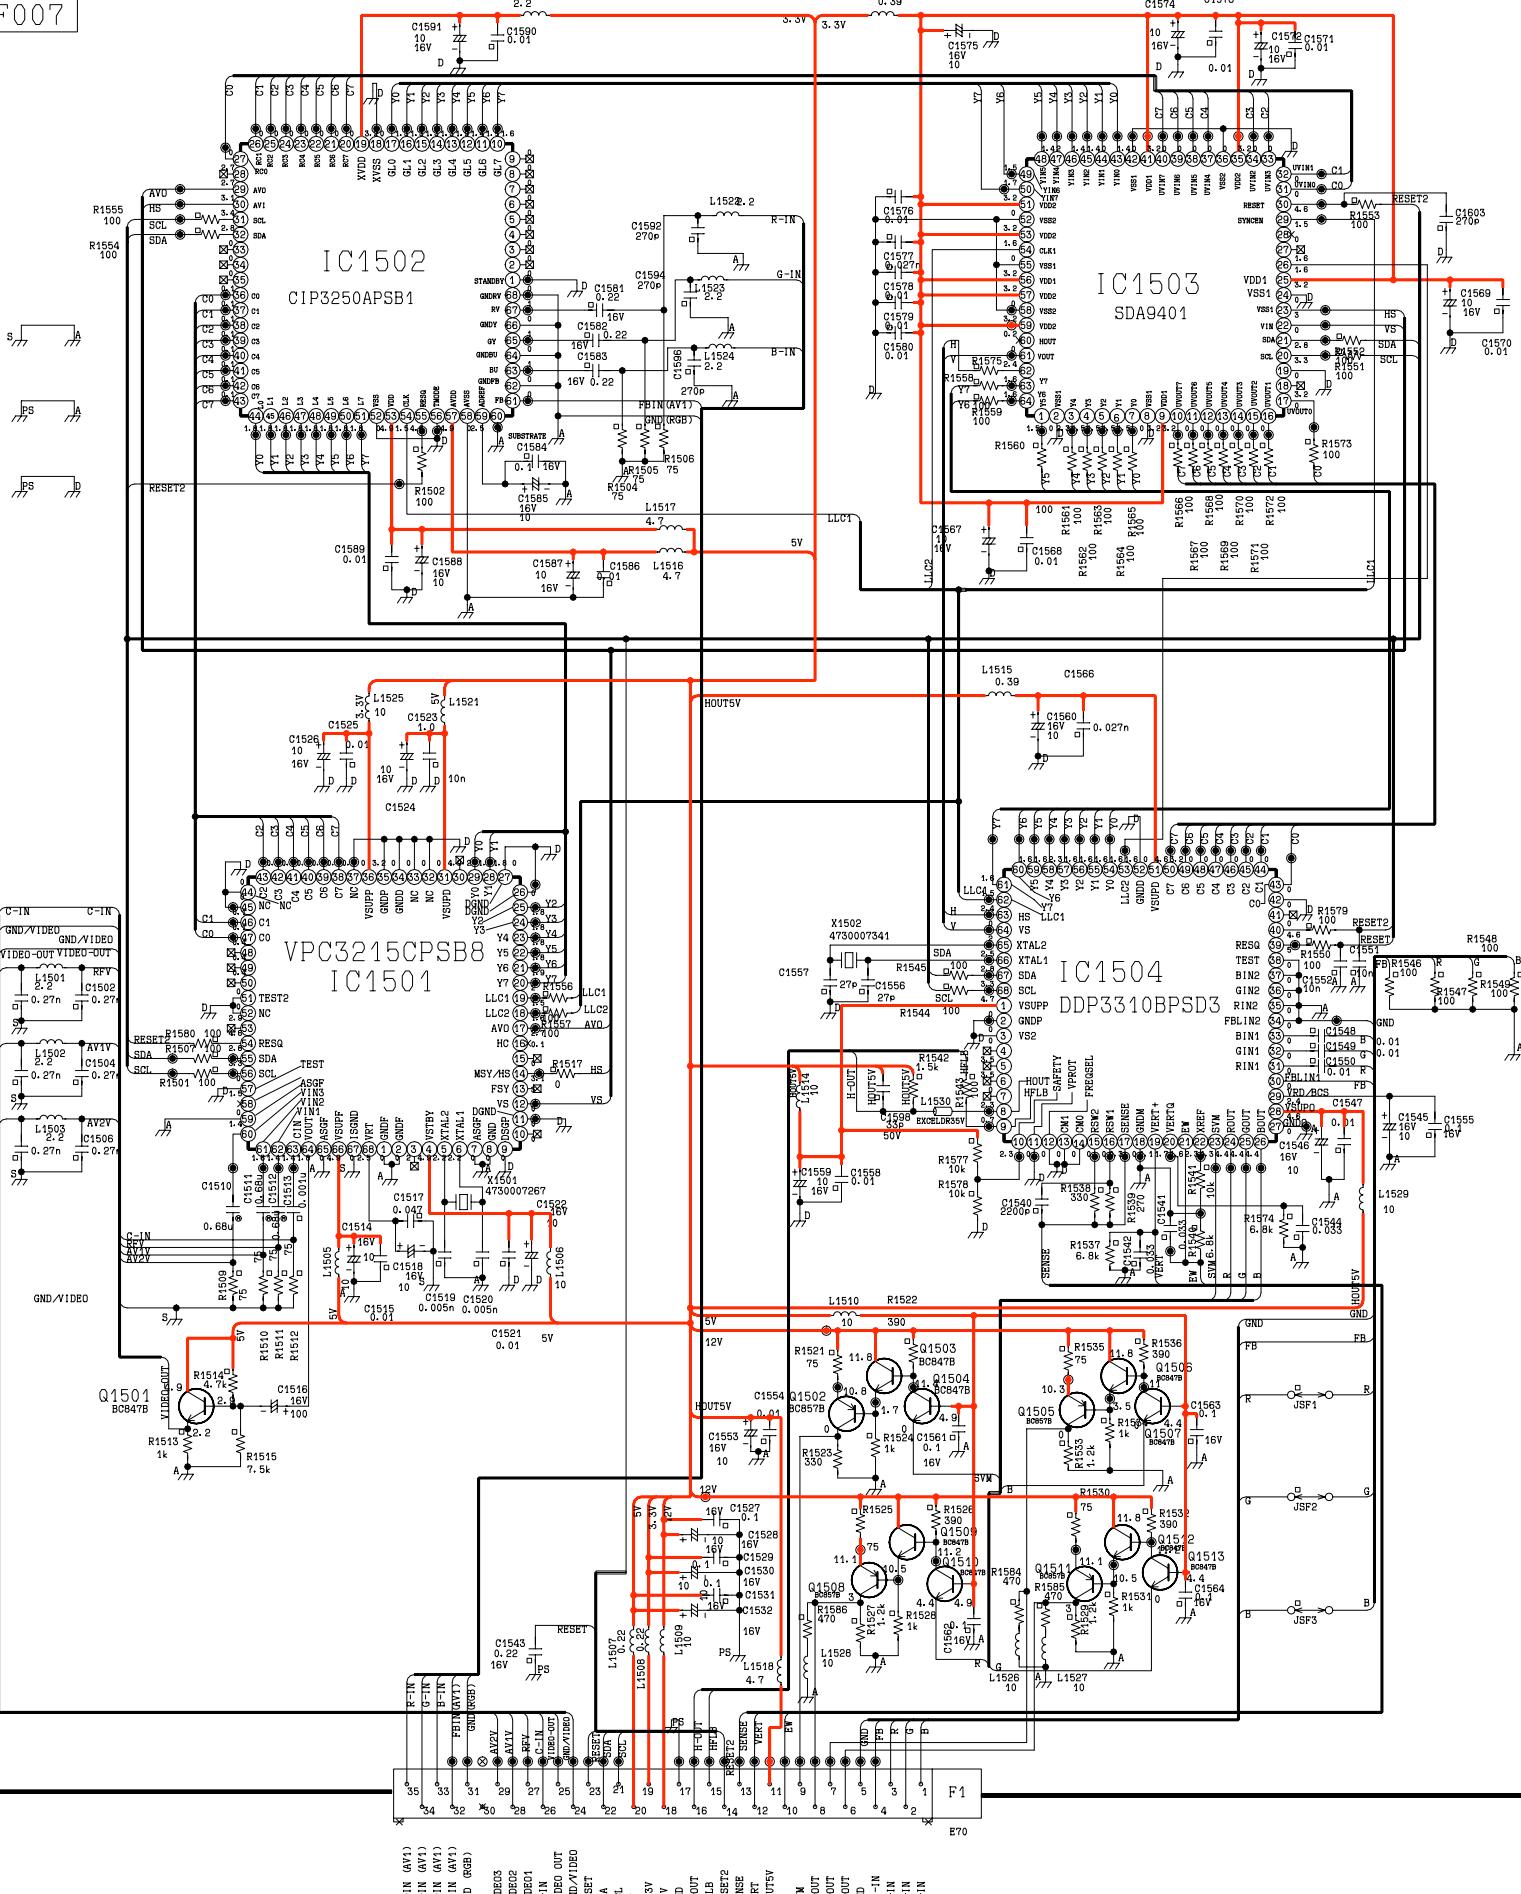


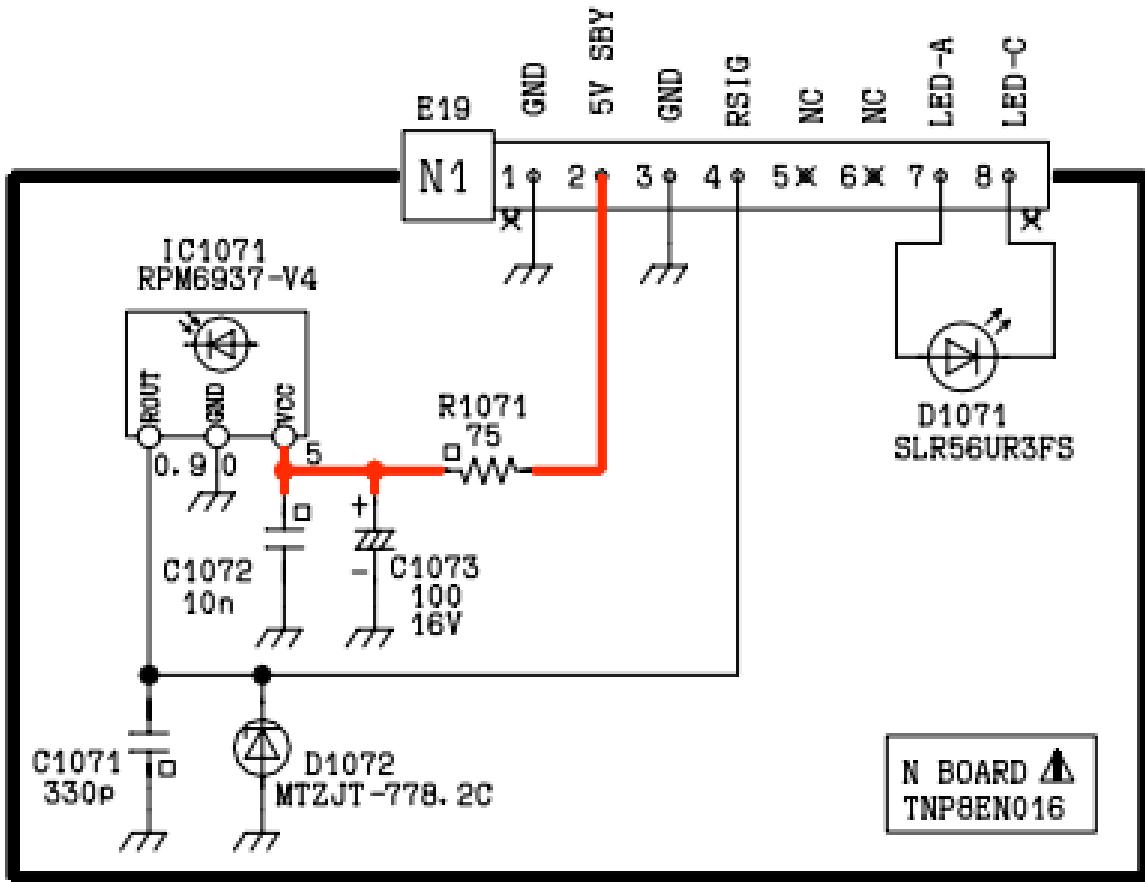

P BOARD 
TNP8EP017

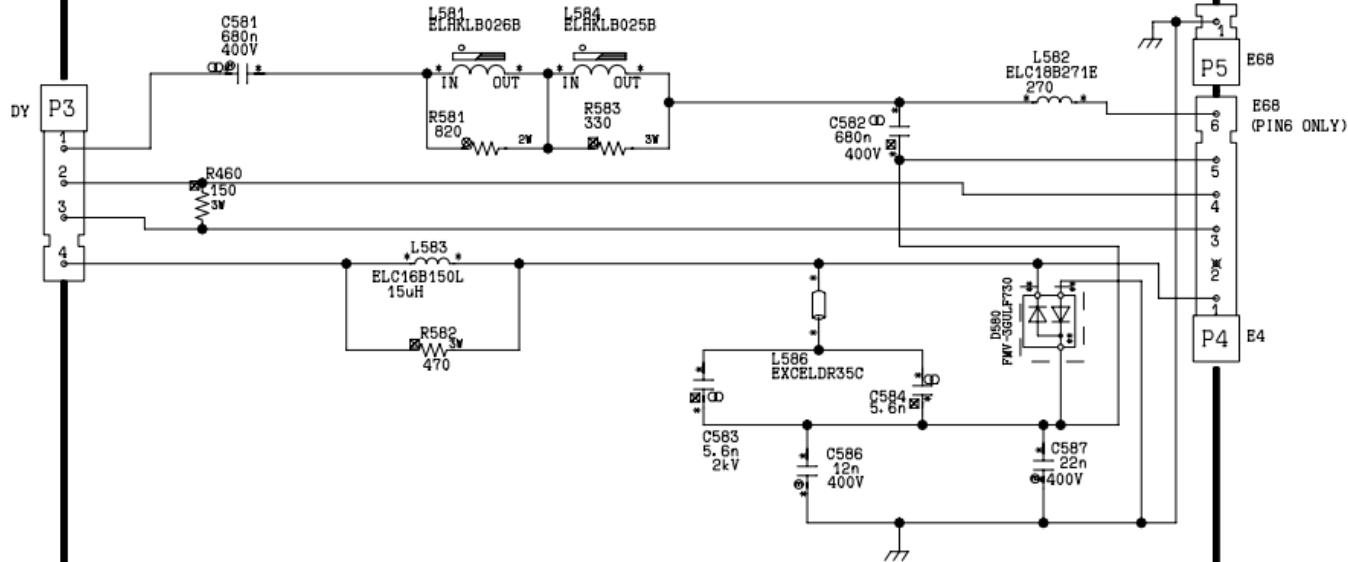

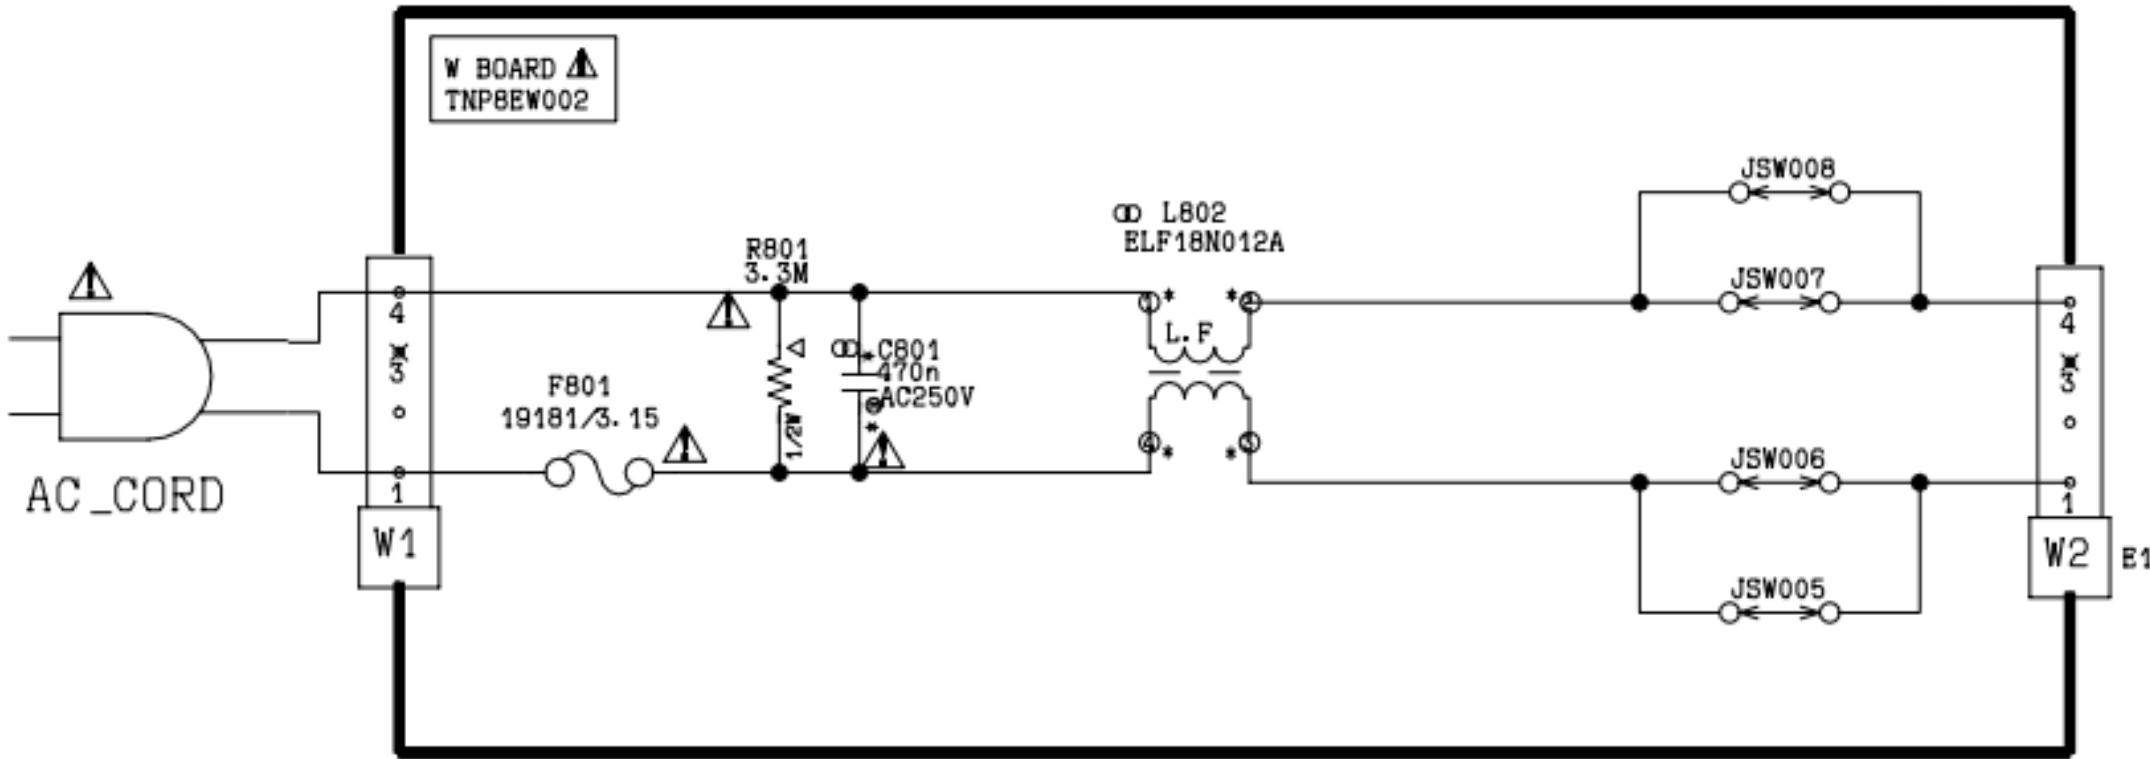

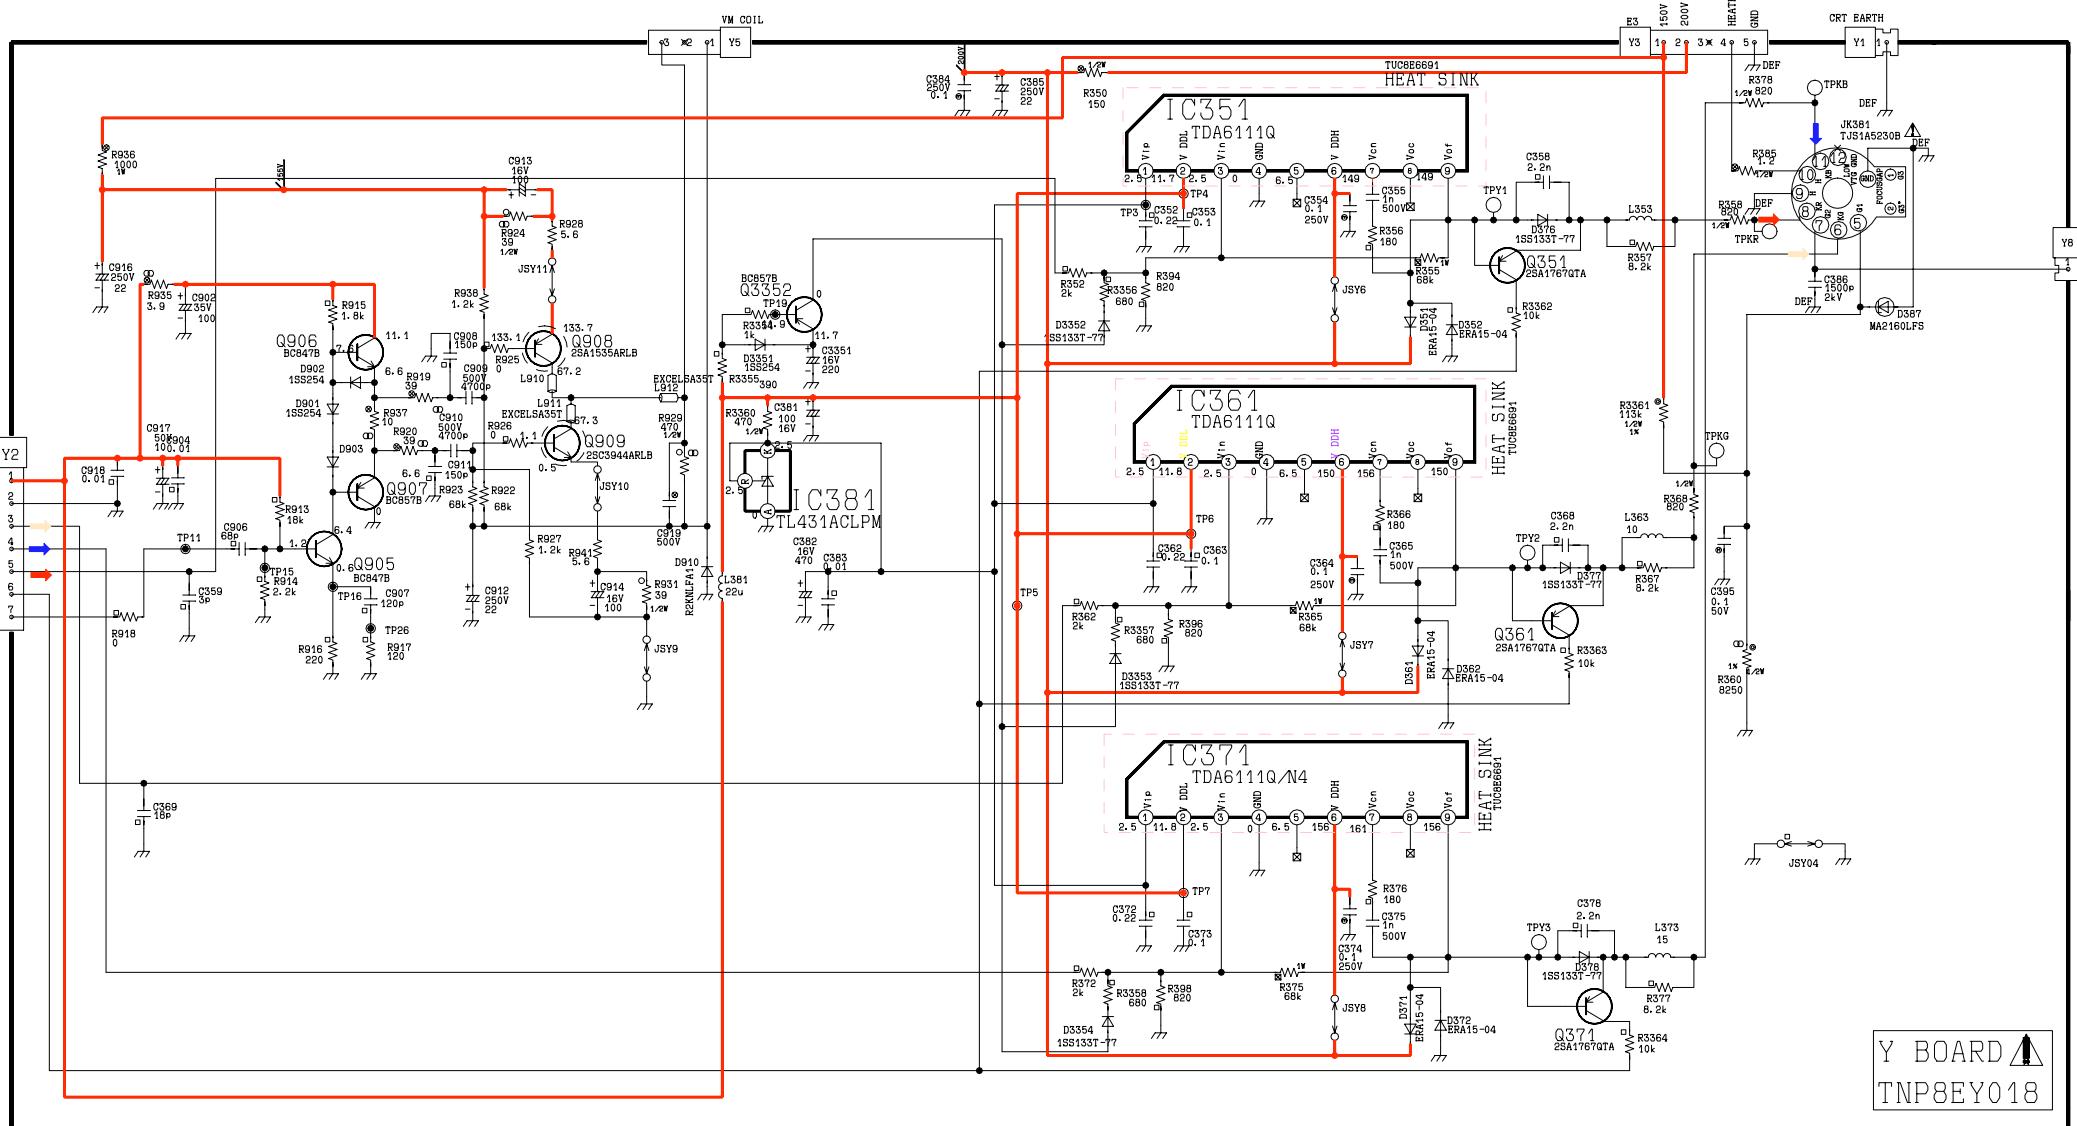


Y BOARD 
TNP8EY018

CONDUCTOR VIEWS ANSICHT DER LEITERBAHNEN


N - BOARD TNP8EN016

| DIODES |
|-----------|
| D1072 A6 |
| D1071 B3 |
| IC'S |
| IC1071 B2 |

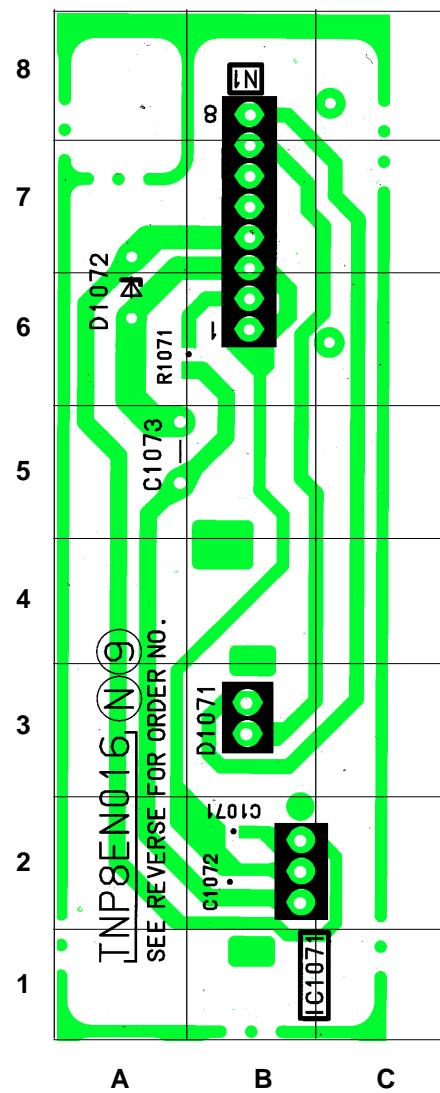


E-BOARD TNP8EE013

| TRAN'S | | DIODES | | | |
|--------|-----|--------|-----|--------|-----|
| Q101 | H10 | D251 | D4 | D869 | B4 |
| Q103 | F10 | D253 | C4 | D870 | C4 |
| Q104 | N9 | D254 | B5 | D871 | A5 |
| Q105 | M8 | D453 | F9 | D873 | B5 |
| Q182 | G10 | D454 | L5 | D875 | J5 |
| Q251 | D4 | D456 | L5 | D890 | L7 |
| Q252 | C4 | D457 | L5 | D891 | K7 |
| Q253 | C4 | D458 | L5 | D1051 | A9 |
| Q254 | C5 | D501 | I3 | D1101 | G7 |
| Q451 | F8 | D502 | J2 | D1103 | F8 |
| Q503 | I2 | D511 | M5 | D1104 | A4 |
| Q551 | K1 | D553 | K4 | D1105 | A3 |
| Q552 | N3 | D554 | M3 | D1116 | G7 |
| Q601 | K9 | D555 | N3 | D2101 | G9 |
| Q701 | K8 | D556 | K1 | D2102 | G9 |
| Q702 | J5 | D557 | M4 | D2103 | G10 |
| Q703 | K4 | D558 | L4 | D2104 | G9 |
| Q850 | F5 | D559 | J1 | D2105 | G9 |
| Q851 | F9 | D560 | K2 | D2303 | G7 |
| Q852 | B5 | D601 | K8 | D2304 | G7 |
| Q853 | B4 | D602 | K8 | D3101 | B7 |
| Q854 | B4 | D603 | K8 | D3102 | B7 |
| Q855 | J5 | D604 | K8 | | |
| Q856 | F9 | D609 | M5 | | TPs |
| Q857 | J4 | D620 | J9 | TPE1 | M4 |
| Q1051 | C8 | D701 | K5 | TPE10 | B5 |
| Q1052 | A9 | D702 | K8 | TPE11 | N5 |
| Q1101 | F7 | D703 | K8 | TPE12 | K4 |
| Q1104 | D6 | D704 | K5 | TPE13 | M4 |
| Q1105 | C6 | D705 | K5 | TPE14 | L4 |
| Q1106 | D7 | D706 | K5 | TPE2 | I5 |
| Q1107 | C7 | D707 | J4 | TPE3 | E5 |
| Q1108 | F9 | D708 | M5 | TPE4 | G5 |
| Q2101 | G10 | D709 | M5 | TPE5 | G5 |
| Q2102 | I8 | D710 | J5 | TPE6 | J10 |
| Q2103 | I8 | D801 | E1 | TPE7 | I9 |
| Q2301 | M6 | D802 | G2 | TPE8 | F5 |
| Q2302 | I7 | D803 | H1 | TPE9 | F5 |
| Q2303 | M6 | D804 | H1 | | |
| Q2304 | I7 | D805 | H2 | | ICs |
| Q3006 | N10 | D806 | G2 | IC251 | D6 |
| Q3007 | M9 | D850 | H4 | IC451 | L5 |
| | | D851 | I4 | IC601 | K9 |
| | | D852 | I4 | IC701 | K5 |
| | | D853 | H3 | IC801 | G2 |
| | | D854 | G4 | IC850 | H4 |
| | | D856 | F4 | IC851 | G5 |
| | | D857 | E5 | IC852 | I10 |
| | | D858 | E5 | IC853 | I9 |
| | | D859 | H5 | IC855 | L7 |
| | | D860 | I10 | IC856 | J7 |
| | | D861 | J9 | IC1051 | A10 |
| | | D862 | N10 | IC1101 | D8 |
| | | D863 | G9 | IC1102 | D10 |
| | | D864 | I9 | IC1103 | F8 |
| | | D865 | I9 | IC1104 | C9 |
| | | D866 | I9 | IC1105 | F7 |
| | | D867 | A3 | IC2101 | H8 |
| | | D868 | B4 | | |

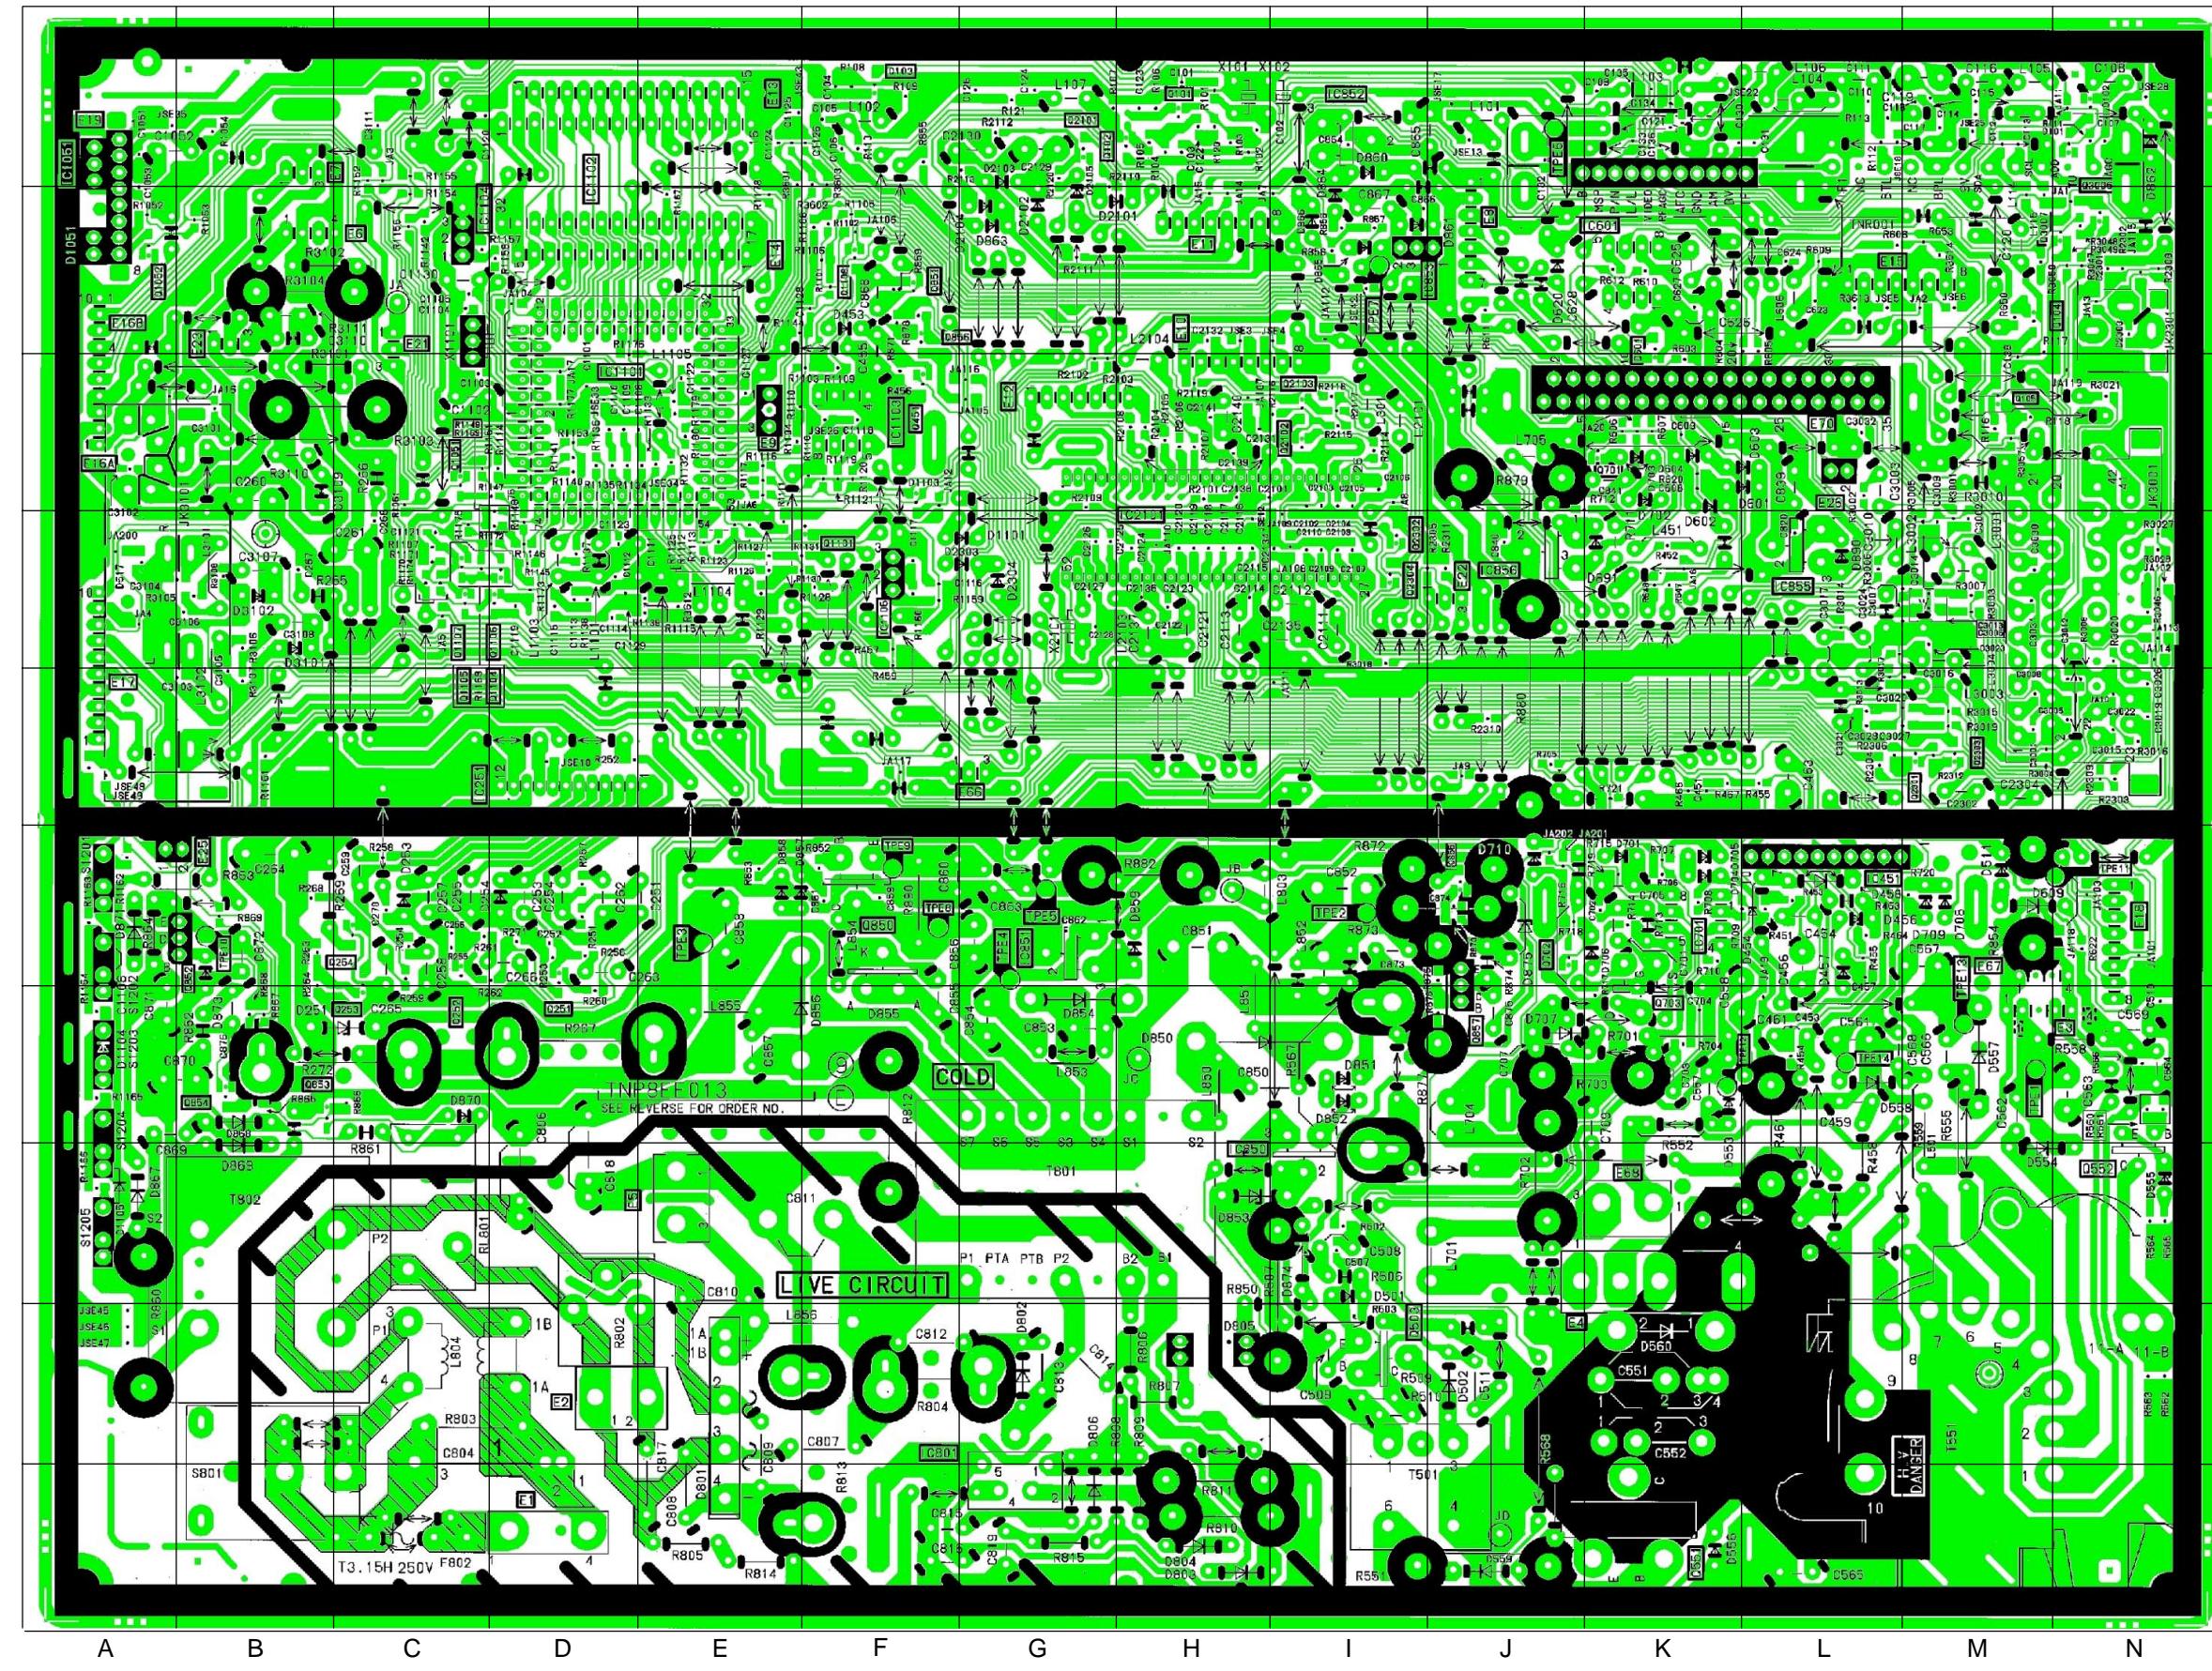

P - BOARD TNP8EP017

| |
|---------------|
| DIODES |
| D580 C1 |
| D581 C1 |

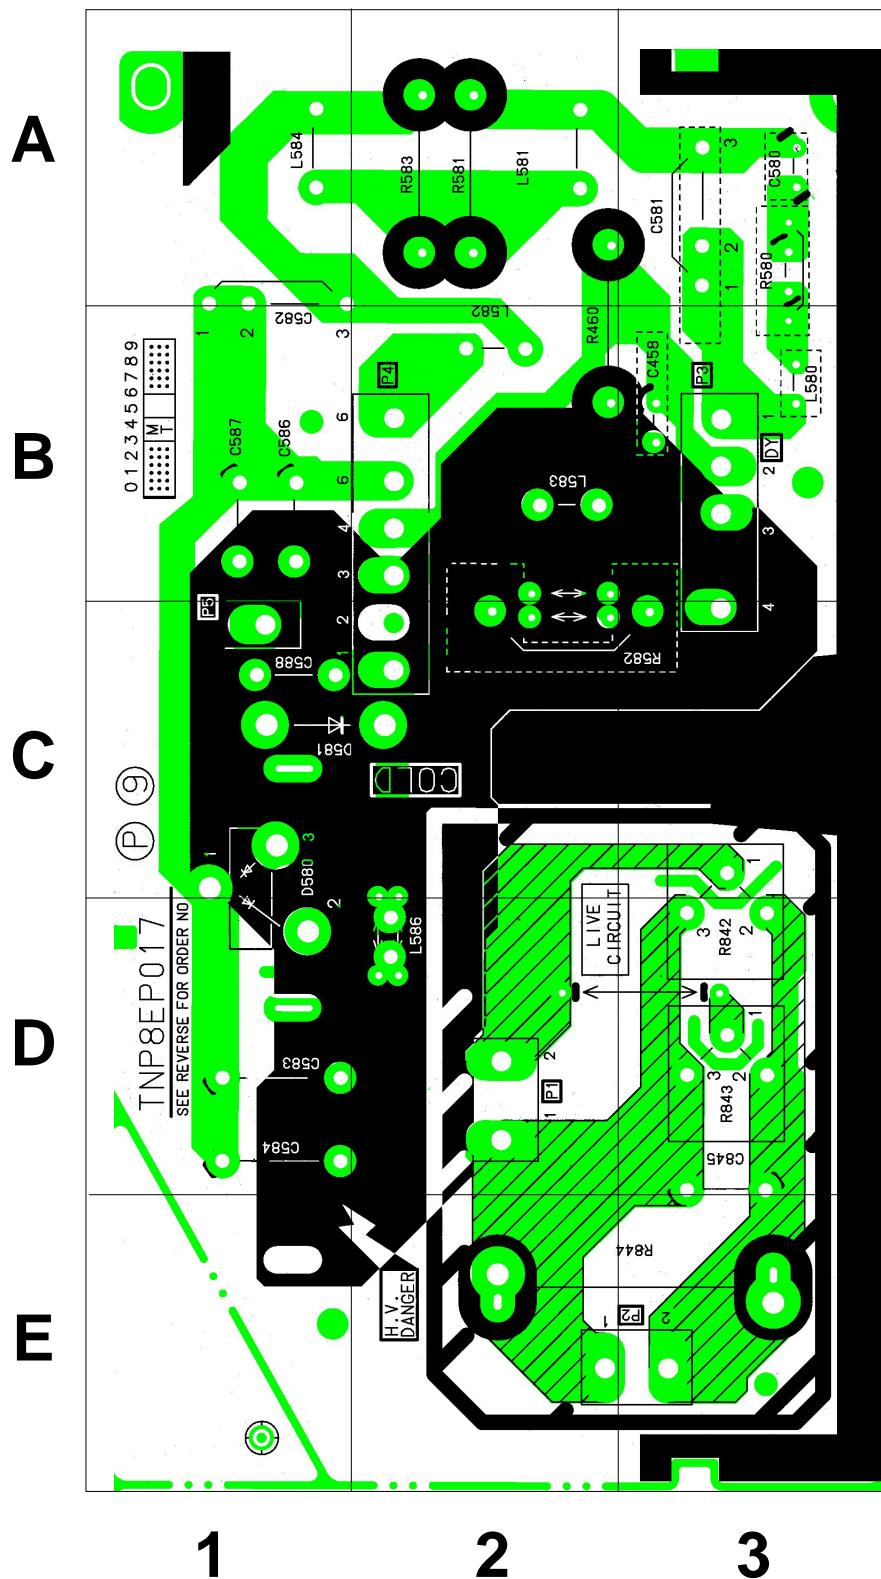

Y - BOARD TNP8EY018


| TRAN'S | |
|--------|----|
| Q351 | B3 |
| Q361 | B2 |
| Q371 | C2 |
| Q905 | B1 |
| Q906 | C1 |
| Q907 | B1 |
| Q908 | D1 |
| Q909 | D1 |
| Q3351 | A2 |
| Q3352 | A2 |
| DIODES | |
| D351 | B3 |
| D352 | B3 |
| D361 | B2 |
| D362 | A1 |
| D371 | D2 |
| D372 | C2 |
| D373 | C3 |
| D374 | A1 |
| D375 | B2 |
| D376 | B3 |
| D377 | A2 |
| D378 | C2 |
| D387 | B1 |
| D901 | C1 |
| D902 | C1 |
| D903 | C1 |
| D910 | C1 |
| D911 | D2 |
| D912 | D1 |
| D3351 | A2 |
| D3352 | A3 |
| D3353 | A1 |
| D3354 | C3 |
| T.P.'S | |
| TPY1 | B3 |
| TPY2 | A2 |
| TPY3 | C2 |
| TPKR | B3 |
| TPKG | B2 |
| TPKB | C2 |
| I.C.'S | |
| IC351 | B2 |
| IC361 | A1 |
| IC371 | C3 |
| IC381 | C3 |

A

B

C

D

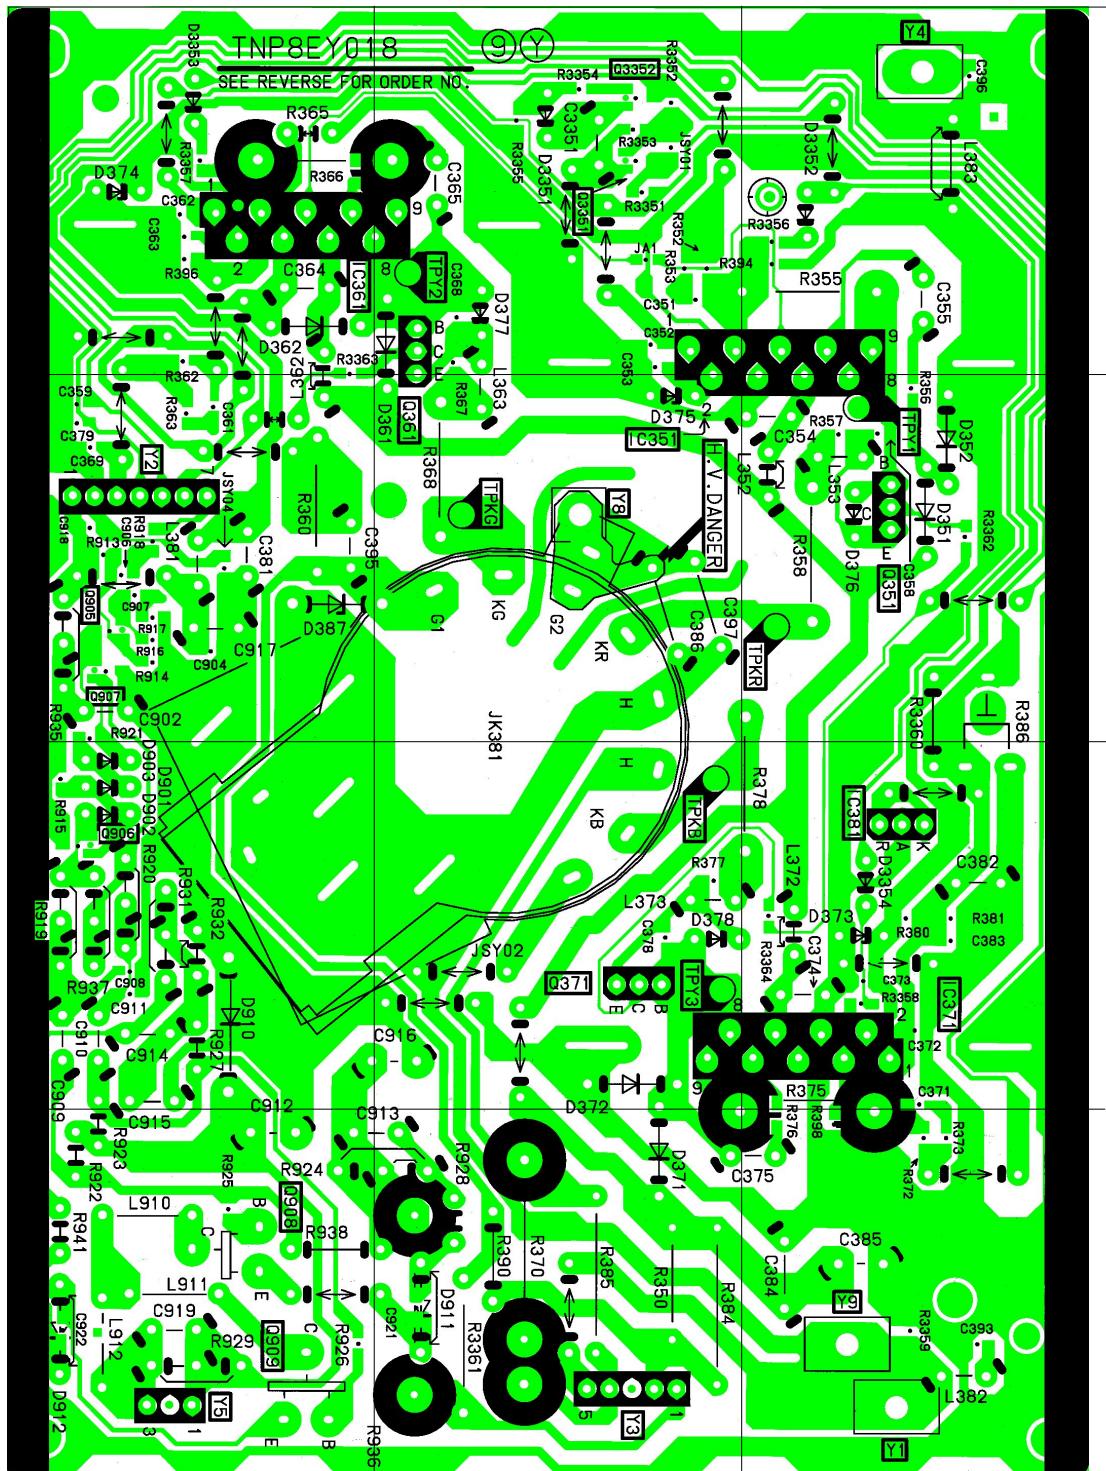

1

2

3

W - BOARD TNP8EW002

| I.C.'S |
|-----------|
| IC1901 A2 |

