

CIC-32PL-32D-A6-YAM

32-Lead PLCC to a 32-Pin DIP


3/98

PLCC DEVICES:		(EXAMPLES)
N28F001BX	N28F512	
N28F010		
N28F020		
N28F256A		

SOCKET:	Yamaichi IC51-0324-4531
----------------	-------------------------

PRICING:	<u>QTY</u>	<u>PRICE EACH</u>
	1-4	\$100.00
	5-9	\$90.00
	10-24	\$85.00
	25-49	\$75.00

TYPICAL DIMENSIONS: (Drawings not to scale)

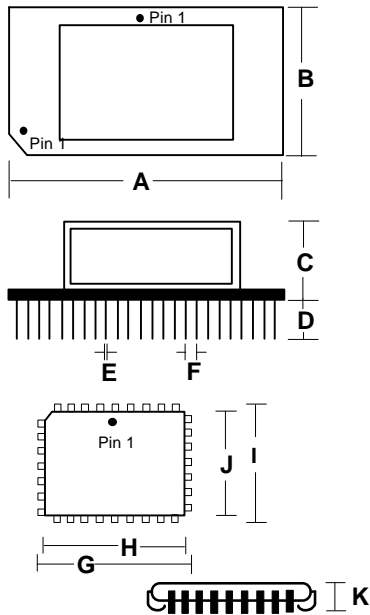

DIMENSION	MM	INCH
A	44.58	1.755
B	33.73	1.328
C	24.13	0.950
D Pin Length	10.16	0.400
E Pin Diameter	0.64	0.025
F Pin Spacing	2.54	0.100
ROW SPACING	15.24	0.600
G	12.45	0.490
H	11.43	0.450
I	14.99	0.590
J	13.97	0.550
K	03.35	0.132
PITCH	1.27	0.050

PIN CONFIGURATION:

BASE 32-Pin DIP	PIN NAMES	SOCKET 32-Lead PLCC
1	V _{PP}	1
2	A ₁₆	2
3	A ₁₅	3
4	A ₁₂	4
5	A ₇	5
6	A ₆	6
7	A ₅	7
8	A ₄	8
9	A ₃	9
10	A ₂	10
11	A ₁	11
12	A ₀	12
13	DQ ₀	13
14	DQ ₁	14
15	DQ ₂	15
16	GND (Planes 2 & 5)	16
17	DQ ₃	17
18	DQ ₄	18
19	DQ ₅	19
20	DQ ₆	20
21	DQ ₇	21
22	CE#	22
23	A ₁₀	23
24	OE#	24
25	A ₁₁	25
26	A ₉	26
27	A ₈	27
28	A ₁₃	28
29	A ₁₄	29
30	A ₁₇ /RP#/NC ¹	30
31	WE#	31
32	V _{CC} (Planes 3 & 4)	32

NOTES:

- NC on all except, A₁₇ (pin 30) on N28F020 and RP# on N28F001BX.
- Bypass capacitors (Type 1206) may be added between V_{cc} planes & GND planes; as required by Programmer Vendor.

CALIFORNIA INTEGRATION COORDINATORS, INC.

(530) 626-6168
FAX: 626-7740

656 MAIN STREET
PLACERVILLE, CA 95667

E-mail: cic@cic-inc.com
<http://www.cic-inc.com>