

**Dual Channel Central Office ADSL2+ Line Driver**

The EL1537A is a very low power dual channel differentiated amplifier designed for central office line driving for DMT ADSL solutions. The EL1537A has a higher output swing specification for driving 30Ω loads as compared to the EL1537. This device features a high drive capability of 400mA while consuming only 7.5mA of supply current per amplifier from ±12V supplies. This driver achieves a typical distortion of less than -75dBc, at 1MHz into a 50Ω load. The EL1537A is available in the thermally-enhanced 28 Ld HTSSOP package. This device is specified for operation over the full -40°C to +85°C temperature range.

The EL1537A has two control pins, C<sub>0</sub> and C<sub>1</sub>, per channel. With the selection of C<sub>0</sub> and C<sub>1</sub>, the device can be set into full-I<sub>S</sub> power, 3/4-I<sub>S</sub> power, 1/2-I<sub>S</sub> power, and power-down disable modes. The EL1537A maintains excellent distortion and load driving capabilities even in the lowest power settings. The EL1537A has extended bandwidth and improved THD and slew rate for ADSL2+ and VDSL applications.

**Ordering Information**

PART NUMBER (Note)	PART MARKING	PACKAGE (Pb-free)	TAPE & REEL	PKG. DWG. #
EL1537AIREZ	1537AIREZ	28 Ld HTSSOP	-	MDP0048
EL1537AIREZ-T7	1537AIREZ	28 Ld HTSSOP	7"	MDP0048
EL1537AIREZ-T13	1537AIREZ	28 Ld HTSSOP	13"	MDP0048

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

**Features**


- Drives 400mA at 16V<sub>P-P</sub> on ±12V supplies
- 44.4V<sub>P-P</sub> differential output drive into 100Ω
- 40V<sub>P-P</sub> minimum differential output drive into 60Ω
- -75dBc typical driver output distortion driving 50Ω at 1MHz and 1/2-I<sub>S</sub> bias current
- Low quiescent current of 3.9mA per amplifier in 1/2-I<sub>S</sub> mode
- 50MHz BW at A<sub>V</sub> = 10
- Power-down disable mode
- Pin-to-pin replacement for EL1527
- Pb-free plus anneal available (RoHS compliant)

**Applications**

- ADSL, ADSL2, ADSL2+ line drivers
- G.SHDSL, HDSL2 line drivers
- VDSL line drivers
- Video distribution amplifiers
- Video twisted-pair line drivers

**Pinout**

**EL1537A  
(28 LD HTSSOP)  
TOP VIEW**

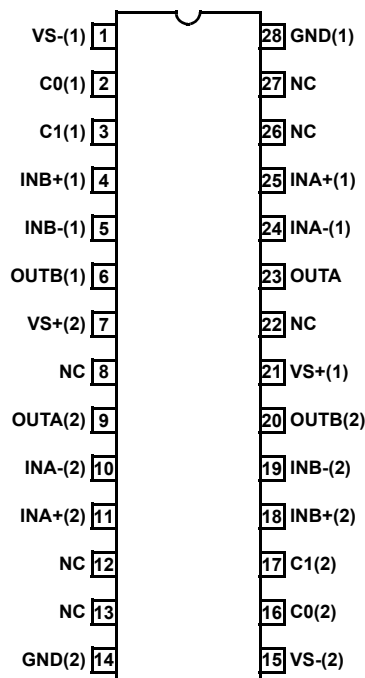

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9001 quality systems.  
Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

---

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

---

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)