

## Dual 4-Channel Driver with Oscillator



The EL6836 is a high performance, dual output, laser driver for writeable DVD drives. The ENA pin enables the

chip, while the SEL1 pin selects the I<sub>OUT</sub> pin. Various waveforms can be generated where the amplitude is determined by the currents flowing into I<sub>INR</sub>, I<sub>IN2</sub>, I<sub>IN3</sub>, and I<sub>IN4</sub>. The timing is determined by the signals at WEN2B, WEN3B, and WEN4B. The oscillator is enabled when OSEN is high. The amplified I<sub>INR</sub> current of the selected channel is enabled when the ENA pin is high. The total output current is the sum of the read current, the enabled write currents, and the oscillator current when enabled.

Usually a voltage DAC will drive a resistor that is in series with the I<sub>INR</sub>, I<sub>IN2</sub>, I<sub>IN3</sub>, and I<sub>IN4</sub> input. The resistor allows the user to optimize the current gain for each channel.

WEN2B, WEN3B, and WEN4B are CMOS input pins with a 1.68V threshold. Output write current pulses are enabled when a low is applied to the WEN2B, WEN3B, or WEN4B pin. The write current will flow to the selected output. When SEL1 is high I<sub>OUT1</sub> is selected. WENRB enables read and oscillator current when low.

The R<sub>F</sub> oscillators frequency is determined by R<sub>FREQ1</sub> or R<sub>FREQ2</sub>, and its amplitude by R<sub>RAMP1</sub> or R<sub>RAMP2</sub>.

### Ordering Information

PART NUMBER	TEMP. RANGE	PACKAGE	PKG. DWG. #
EL6836CL	0°C to +70°C	32-Pin LPP	MDP0046

**Get FULL DATASHEET**

### Features


- Two channels for CD or DVD
- Voltage-controlled output current source requiring one external set resistor per channel
- Rise time = 0.8ns
- Fall time = 0.8ns
- Channel 2 to 250mA max
- Channel 3 to 150mA max
- Channel 4 to 100mA max
- On chip oscillator with frequency and amplitude control by use of external resistors to ground
- Oscillator frequency to 600MHz
- Oscillator amplitude to 100mAp-p
- Single +5V supply (±10%)
- Chip ENAs for power savings

### Applications

- Super combo drives
- DVD drives

### Pinout

EL6836  
(32-PIN LPP)  
TOP VIEW

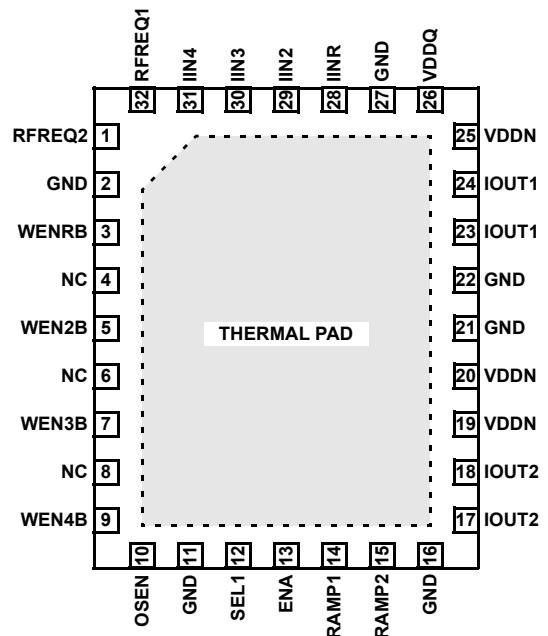

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.  
Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

---

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

---

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)

---