


# Service Manual

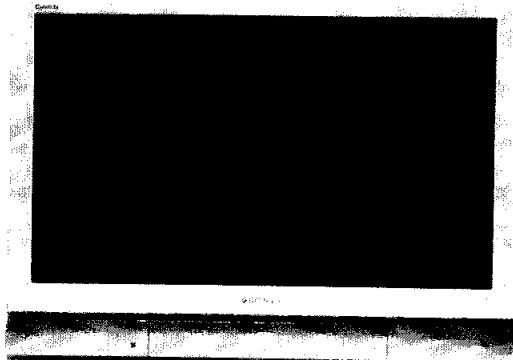

## Colour Television TX-32PG50

### EURO-7 Chassis

#### SPECIFICATIONS

<b>Power Source:</b>	220-240V a.c., 50Hz	<b>AV4 IN</b>	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ
<b>Power Consumption:</b>	149W	<b>AV4 OUT</b>	S-Video IN Y: 1V p-p 75Ω (21-pin) C: 0.3V p-p 75Ω
<b>Stand-by Power Consumption:</b>	2.8W	<b>High Voltage:</b>	RGB (21 pin)
<b>Aerial Impedance:</b>	75Ω unbalanced, Coaxial Type	<b>Picture Tube:</b>	32kV ± 1kV
<b>Receiving System:</b>	PAL I, PAL-525/60 M.NTSC NTSC (AV only)	<b>Audio Output:</b> (Music Power)	W76EKW10X72 76cm
<b>Receiving Channels:</b>	UHF E21-E69	<b>Digital Audio Input</b>	Front Left/Right 2 x 20W Subwoofer 23W External Centre 19W External Surround 2 x 19W 8Ω Impedance
<b>Intermediate Frequency: Video/Audio</b>		<b>Dolby Surround Out (Rear)</b>	Coaxial / Optical
Video	39.5MHz	<b>Headphones:</b>	8Ω Impedance 3.5mm
Audio	33.5MHz	<b>Accessories supplied :</b>	Remote Control 2 x R6 (UM3) Batteries TS-32PG50 Cabinet / Speaker pack
Colour	32.95MHz (NICAM) 35.07MHz	<b>Dimensions:</b>	Height: 576mm Width: 777mm Depth: 532mm
<b>Terminals:</b>		<b>Net weight:</b>	58kg
AV1 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ RGB (21 pin)	Specifications are subject to change without notice. Weights and dimensions shown are approximate.	
AV1 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ	<b>NOTE:</b> This Service Manual should be used in conjunction with the EURO-7 Technical guide.	
AV2 IN	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 10kΩ S-Video IN Y: 1V p-p 75Ω (21-pin) C: 0.3V p-p 75Ω		
AV2 OUT	Video (21 pin) 1V p-p 75Ω Audio (21 pin) 500mV rms 1kΩ <sup>Selectable output (21 pin)</sup>		
AV3 IN	S-Video IN Y: 1V p-p 75Ω (4-pin) C: 0.3V p-p 75Ω Audio (RCAx2) 500mV rms 10kΩ Video (RCAx1) 1V p-p 75Ω		

# CONTENTS

SAFETY PRECAUTIONS.....	2
SERVICE HINTS.....	3
SERVICE POSITION.....	4
ADJUSTMENT PROCEDURE AND FACTORY SETTINGS .....	5
WAVEFORM PATTERN TABLE .....	6
ALIGNMENT SETTINGS.....	7
BLOCK DIAGRAMS .....	8
PARTS LOCATION .....	13
REPLACEMENT PARTS LIST .....	14
SCHEMATIC DIAGRAMS .....	30
CONDUCTOR VIEWS.....	40

## SAFETY PRECAUTIONS

### GENERAL GUIDE LINES

1. It is advisable to insert an isolation transformer in the a.c. supply before servicing a hot chassis.
2. When servicing, observe the original lead dress in the high voltage circuits. If a short circuit is found, replace all parts that have been overheated or damaged by the short circuit.
3. After servicing, see that all the protective devices such as insulation barriers, insulation papers, shields and isolation R-C combinations are correctly installed.
4. When the receiver is not being used for a long period of time, unplug the power cord from the a.c. outlet.
5. Potentials as high as 33kV are present when this receiver is in operation. Operation of the receiver without the rear cover involves the danger of a shock hazard from the receiver power supply. Servicing should not be attempted by anyone who is not familiar with the precautions necessary when working on high voltage equipment. Always discharge the anode of the tube.
6. After servicing make the following leakage current checks to prevent the customer from being exposed to shock hazard.

### LEAKAGE CURRENT COLD CHECK

1. Unplug the a.c. cord and connect a jumper between the two prongs of the plug.
2. Turn on the receiver's power switch.
3. Measure the resistance value with an ohmmeter, between the jumpered a.c. plug and each exposed metallic cabinet part on the receiver, such as screw heads, aerials, connectors, control shafts etc. When the exposed metallic part has a return path to the chassis, the reading should be between 4M ohm and 20M ohm. When the exposed metal does not have a return path to the chassis, the reading must be infinite.

### LEAKAGE CURRENT HOT CHECK

1. Plug the a.c. cord directly into the a.c. outlet. Do not use an isolation transformer for this check.
2. Connect a  $2k\Omega$  10W resistor in series with an exposed metallic part on the receiver and an earth, such as a water pipe.
3. Use an a.c. voltmeter with high impedance to measure the potential across the resistor.

4. Check each exposed metallic part and check the voltage at each point.
5. Reverse the a.c. plug at the outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 1.4V rms. In case a measurement is outside the limits specified, there is a possibility of a shock hazard, and the receiver should be repaired and rechecked before it is returned to the customer.

### HOT CHECK CIRCUIT

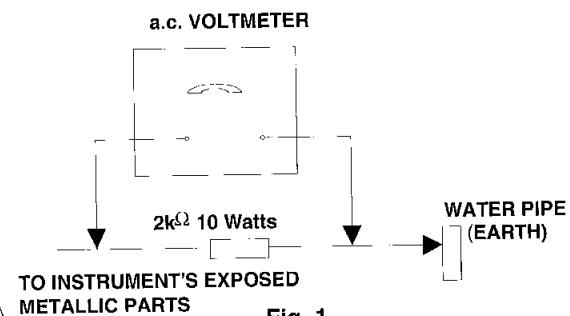


Fig. 1.

### X-RADIATION WARNING

1. The potential sources of X-Radiation in TV sets are the high voltage section and the picture tube.
2. When using a picture tube test jig for service, ensure that the jig is capable of handling 33kV without causing X-Radiation.

**NOTE:** It is important to use an accurate periodically calibrated high voltage meter.

1. Set the brightness to minimum.
2. Measure the high voltage. The meter should indicate  $32kV \pm 1kV$ . If the meter indication is out of tolerance, immediate service and correction is required to prevent the possibility of premature component failure.
3. To prevent any X-Radiation possibility, it is essential to use the specified tube.

## SERVICE HINTS

### How to remove the rear cover

1. Remove the 10 screws as shown in Fig.2.

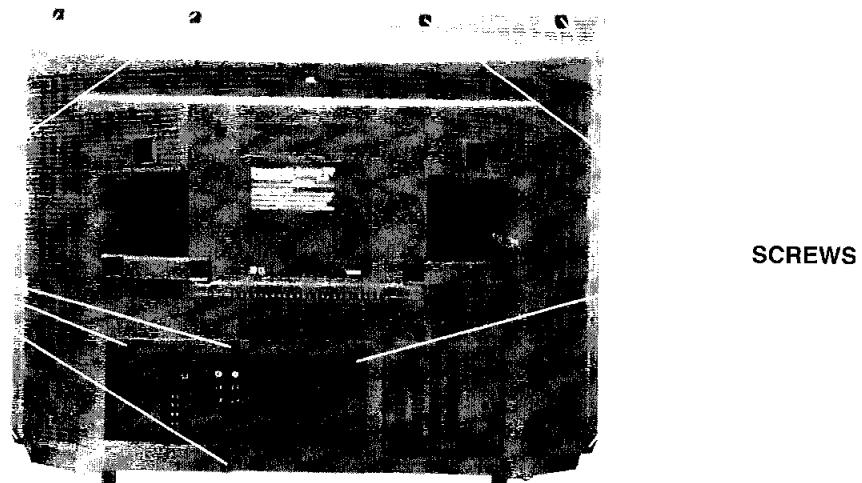


Fig.2.

## LOCATION OF CONTROLS

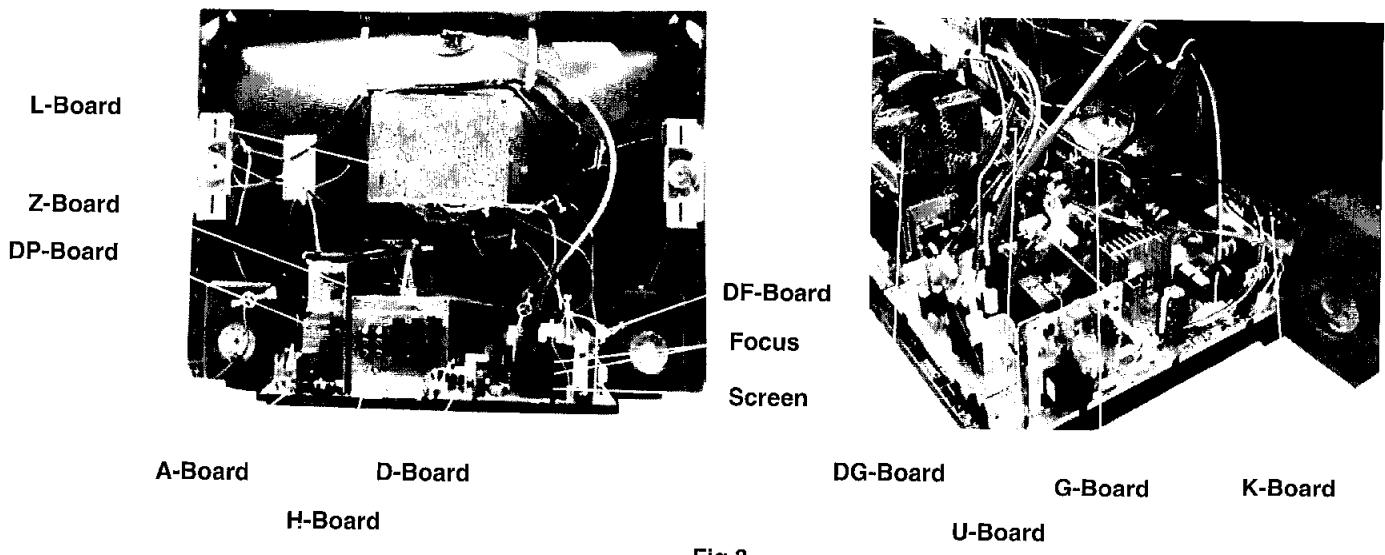


Fig.3.

## HOW TO MOVE THE CHASSIS INTO SERVICE POSITION

1. Remove the 3 screws (B) and (C) shown in **Fig.5.** / **Fig.6.**, and remove the 2 speakers from the cabinet.
2. Affix the support strap supplied in the service pack (TZA1EK002) using a back cover screw, into the top right-hand cabinet rib (A) shown in **Fig.4.**
3. Hold and lift the rear of the chassis and gently pull toward you, as shown in **Fig.4.**
4. Release the respective wiring clips and rotate the chassis vertically through 90°, anti-clockwise.
5. Locate the base of the chassis frame into location (D), shown in **Fig.7.** / **Fig.9.**
6. Clip the chassis frame onto the support strap, shown in **Fig.7.** / **Fig.8.**
7. After servicing replace the speakers, and ensure all wiring is returned to it's original position before returning the receiver to the customer.

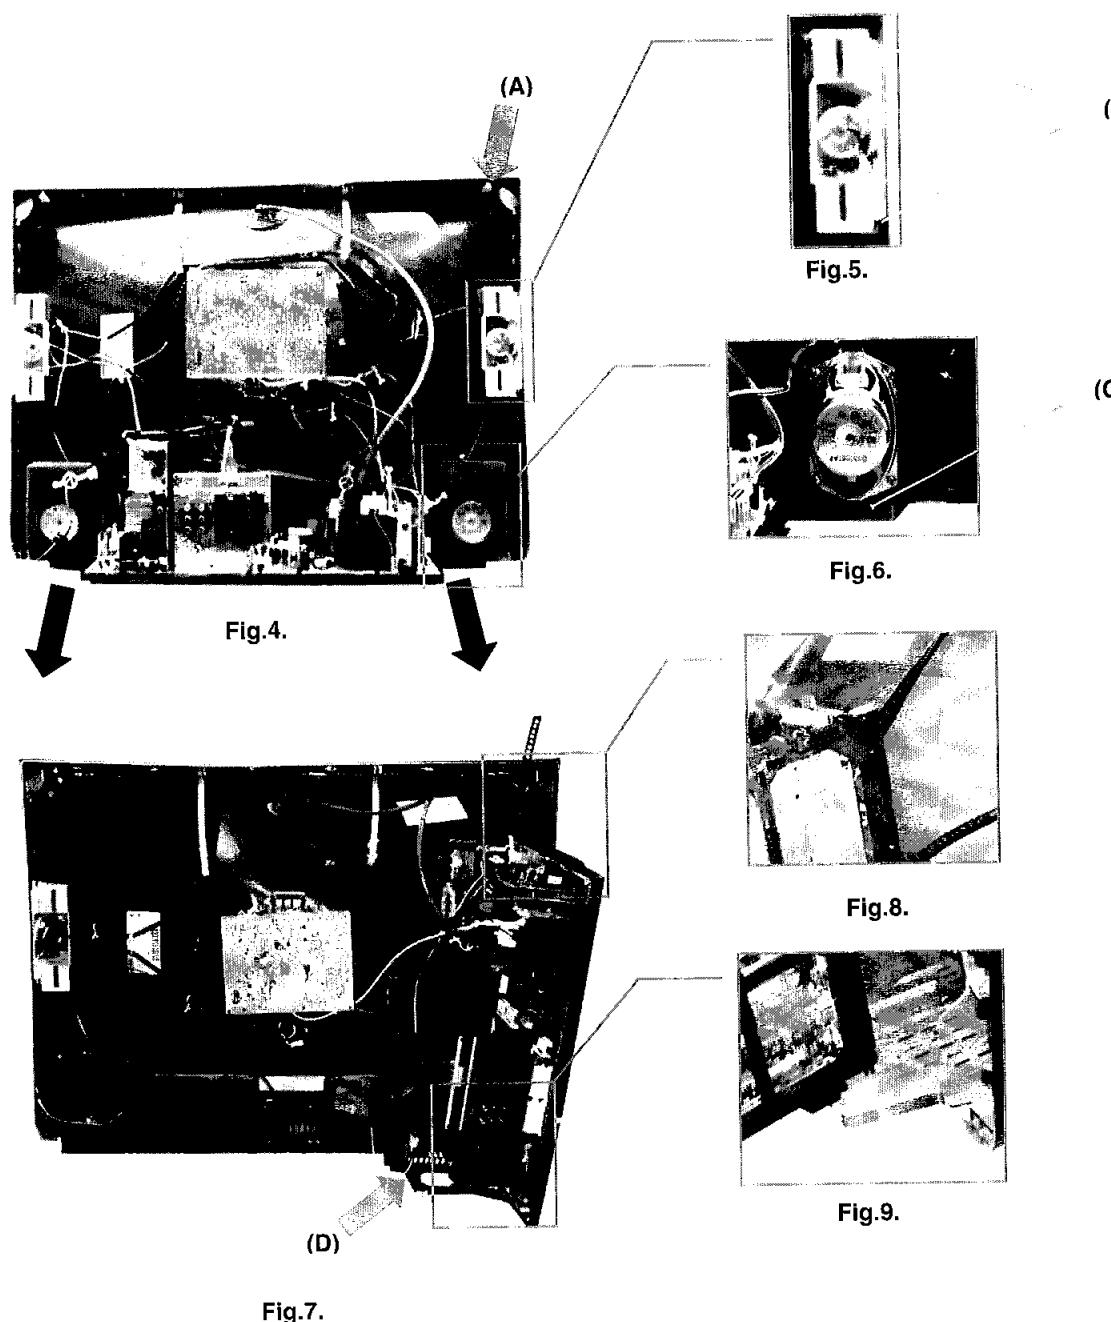


Fig.7.

## ADJUSTMENT PROCEDURE

Item / Preparation		Adjustment/Confirmation								
<b>+B SET-UP</b>		Confirm the following voltages.								
4. Receive a Window pattern.										
5. Set the controls :-										
Brightness      Minimum		<b>A - Board</b>								
Contrast      Minimum		A1 Pin2	7.5	±	0.5V	IC1252	Pin2	2.5	±	0.25V
Volume      Minimum		A1 Pin12	-20	±	0.5V	IC1251	Pin3	3.3		+0.3 / -0.2V
		A1 Pin16	20	±	0.5V	IC3302	Pin3	12	±	0.6V
		A2 Pin15	30	±	0.5V	IC2707	Pin3	8	±	0.4V
		A2 Pin6	15	±	0.5V	L2707	(IC2708)	9	±	0.4V
		A3 Pin4	15	±	0.5V	L2704	(IC2706)	5	±	0.2V
		A3 Pin2	-15	±	0.5V	L2716	(IC2705)	3.3	±	0.2V
						L2717	(IC2709)	3.3	±	0.2V
		<b>D – Board</b>								
		TPD8-GND	7.5	±	0.5V					
		TPD9-TPD11	38.5	±	2V					
		TPD10-GND	15.5	±	1V					
		TPD13-GND	14.5	±	1V					
		TPD15-GND	144.8	±	1V					
		TPD32-GND	209	±	10V					
		C864-GND	-15.5	±	1V					
		D2 Pin15-GND	31	±	1V					
<b>CUT OFF</b>										
1. Receive a Window pattern.		To adjust <b>Cutoff</b> connect an oscilloscope to the Blue cathode. Adjust " <b>Cutoff</b> " value using the " <b>Yellow</b> " and " <b>Blue</b> " buttons until the black level is $170V \pm 5V$ , press " <b>STR</b> " to store the value. Remove the oscilloscope.								
2. Degauss the tube externally.		Select <b>Highlight/Lowlight</b> mode press " <b>5</b> " to collapse the screen and adjust the screen " <b>VR</b> " until the display is just visible, press " <b>5</b> " to return to service mode.								
3. Set the TV into Service Mode 1.		Using the " <b>Yellow</b> " and " <b>Blue</b> " buttons adjust until optimum picture white balance is achieved, press " <b>STR</b> " to store the value. Select <b>Sub Brightness</b> mode and adjust until optimum picture brightness is achieved.								
4. Select Sub brightness mode.										

## FACTORY SETTINGS

To return customer settings to factory settings and clear owner ID of all information input by the customer, enter Self-Check mode. Press the down (-/v) button on the customer controls at the front of the TV set, at the same time pressing the **STATUS** button  on the remote control. To exit Self Check, switch off the TV set at the power button.















**NOTE:** Self Check should only be used when refurbishing the TV set and not during normal repair work.

MEM	:	O.K.	Sum :	****	◀	Factory use only
GC1	:	O.K.				
GC2	:	O.K.	OPTION 1 :	01		
VDU	:	O.K.	OPTION 2 :	00		
CIP	:	O.K.	OPTION 3 :	13		
RGB	:	O.K.	OPTION 4 :	10		
AVSW	:	O.K.	OPTION 5 :	00		
Tun1	:	O.K.	OPTION 6 :	50		
Tun2	:	O.K.	OPTION 7 :	80		
DAC1	:	O.K.	OPTION 8 :	41		
MSP	:	O.K.	OPTION 9 :	83		
DOLBY	:	O.K.	OPTION 10 :	80		
CODEC	:	O.K.	OPTION 11 :	19		
DAC2	:	O.K.	OPTION 12 :	08		
DAC3	:	O.K.	OPTION 13 :	FA		
			Check :	BA		

If the CCU ports have been checked and found to be incorrect or not located then " - " will appear in place of "O.K.".

## WAVEFORM PATTERN TABLE

**Note:** All waveforms have been taken using a standard colour bar pattern.

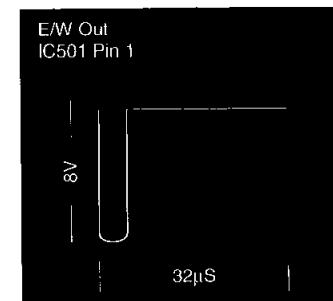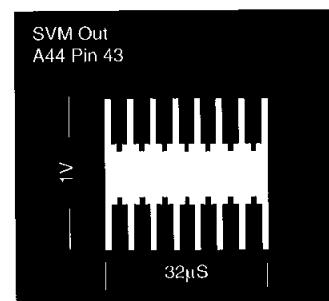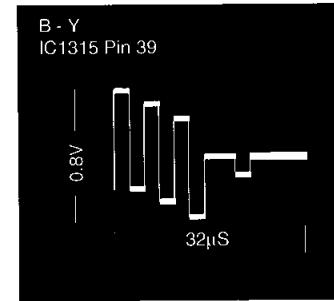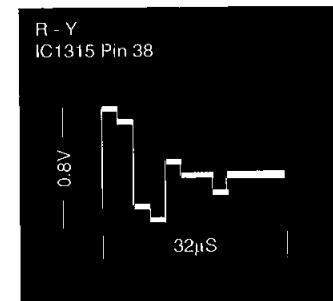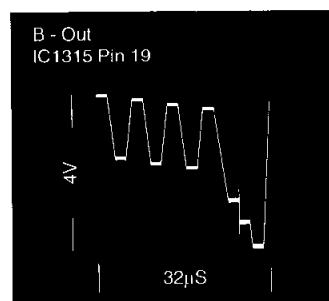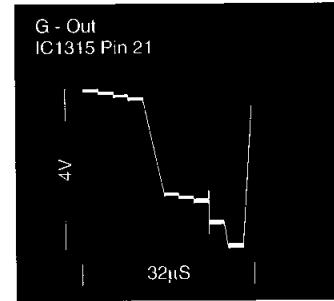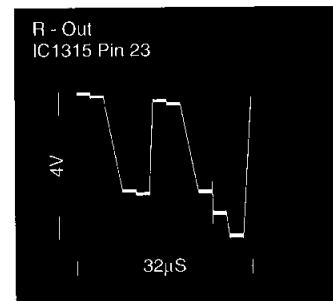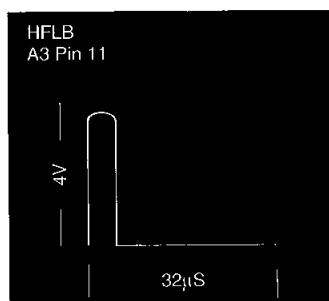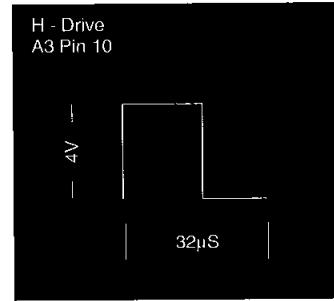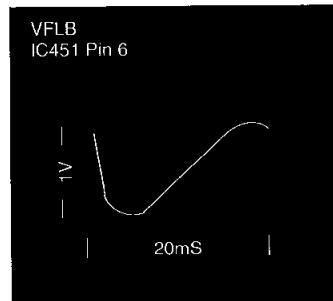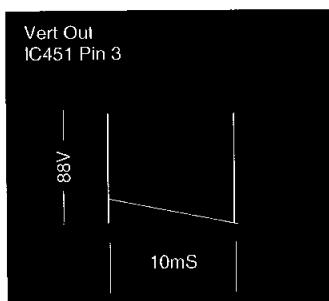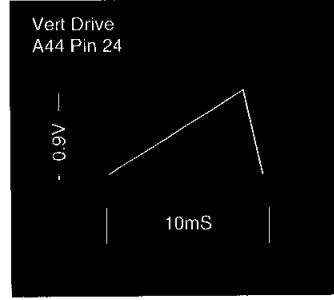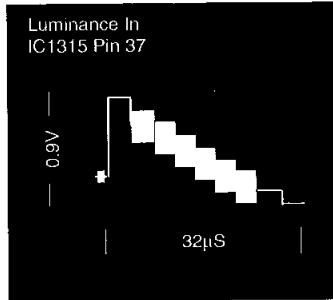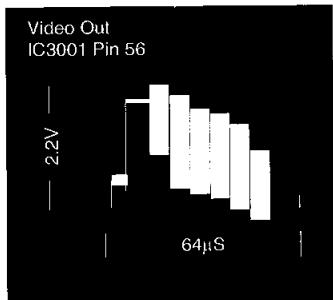


## ALIGNMENT SETTINGS

(The figures below are nominal and used for representative purposes only.)


1. Set the Bass to maximum position, set the Treble to minimum position, press the down button (- / v) on the customer controls at the front of the TV and at the same time press the **INDEX** button on the remote control, this will place the TV into the Service Mode.
2. Press the **RED / GREEN** buttons to step up / down through the functions.
3. Press the **YELLOW / BLUE** buttons to alter the function values.
4. Press the **STR** button after each adjustment has been made to store the required values.
5. To exit the Service Mode, press the "N" button.

Alignment Function		Settings / Special features
Horizontal Position	H – Pos 97	Optimum setting.
Vertical Position	V – Pos 111	Optimum setting.
Horizontal Amplitude	H – Amp 86	Optimum setting.
Vertical Amplitude	V – Amp 134	Optimum setting.
Parabola	Parabola 26	Optimum setting.
Trapezoid	Trapezoid 124	Optimum setting.
Horizontal Parallel	H – Parallel 13	Optimum setting.
Vertical Linearity	V – Linear 34	Optimum setting.
Top Corner	Top – Corner 20	Optimum setting.
Bottom Corner	Bottom – Corner 20	Optimum setting.
Vertical Symmetry Correction	V – S – Correct 9	Optimum setting.
Center Correction	C – Correct 10	Optimum setting.
DAF - Phase	DAF – Phase 205	Optimum setting.
Highlight Lowlight	High 0144 0126 0128 Low 0331 0340 0384	Optimum setting.
Sub-Brightness	Sub-Brightness 144	Optimum setting.
Video Gain 2	Video Gain 2 157	Optimum setting.
Splitter Gain (Tuner)	SPL. Gain 0	Optimum setting.


## VIDEO BLOCK DIAGRAM

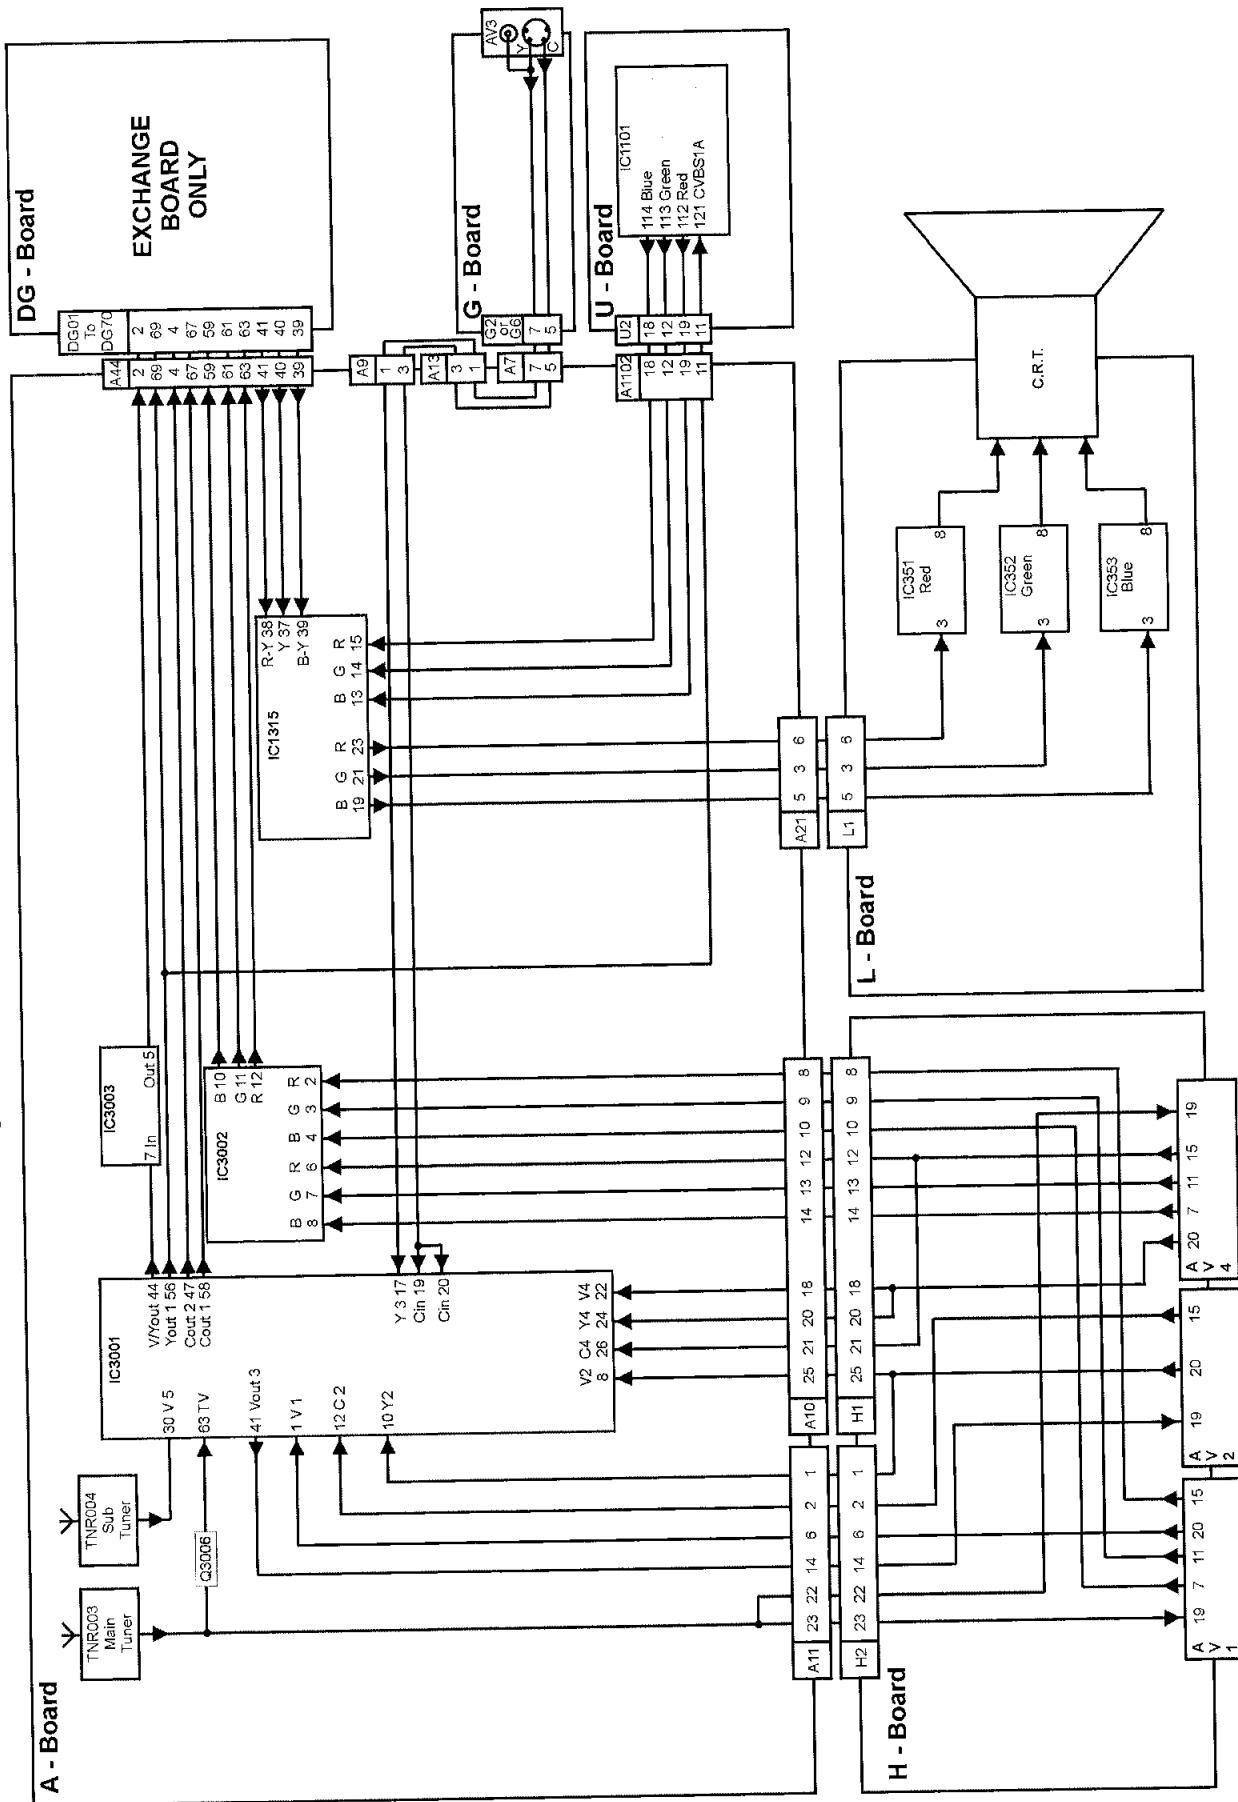


AUDIO BLOCK DIAGRAM

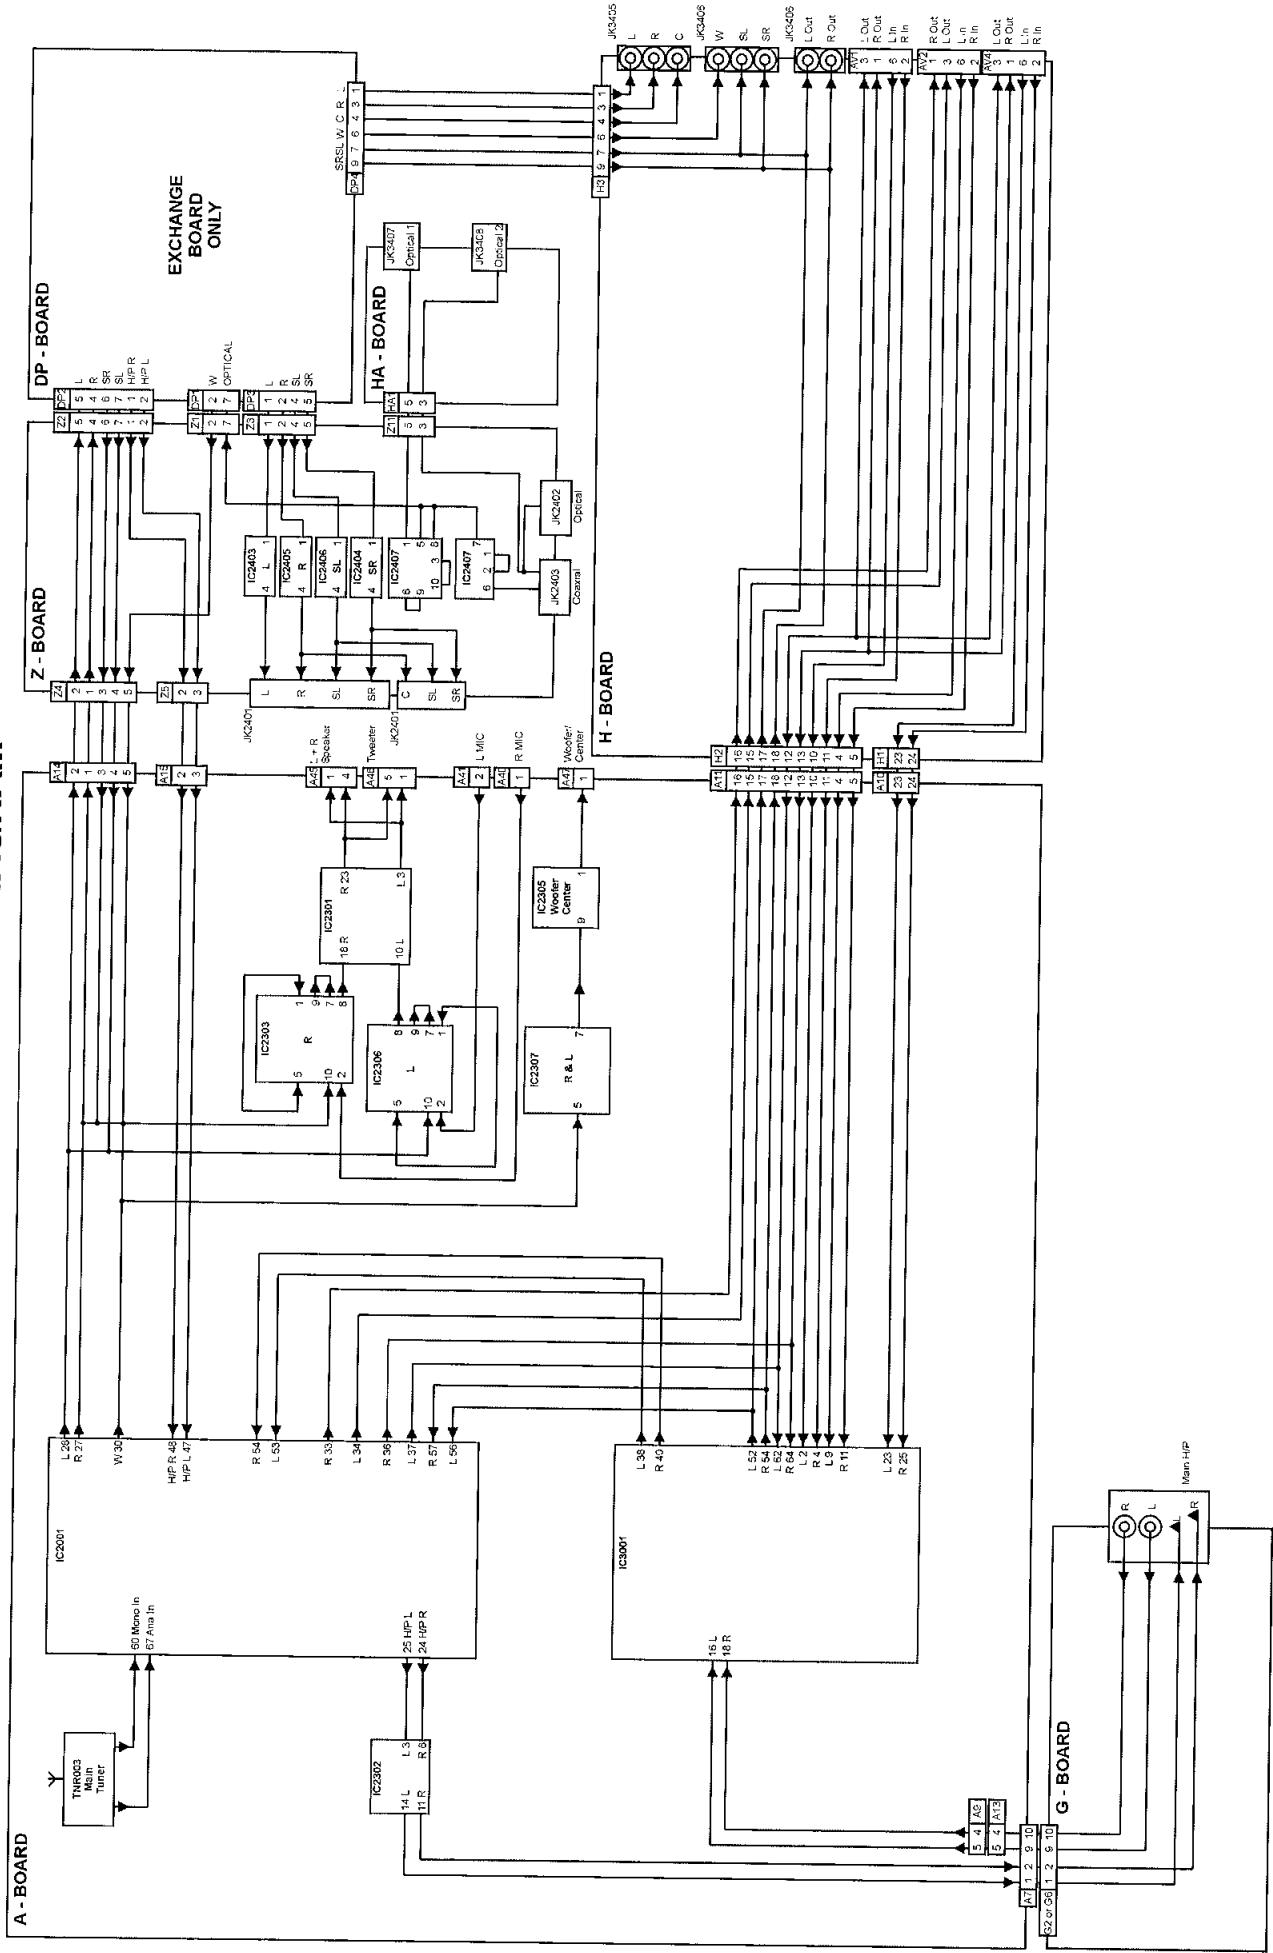


## CONTROL BLOCK DIAGRAM

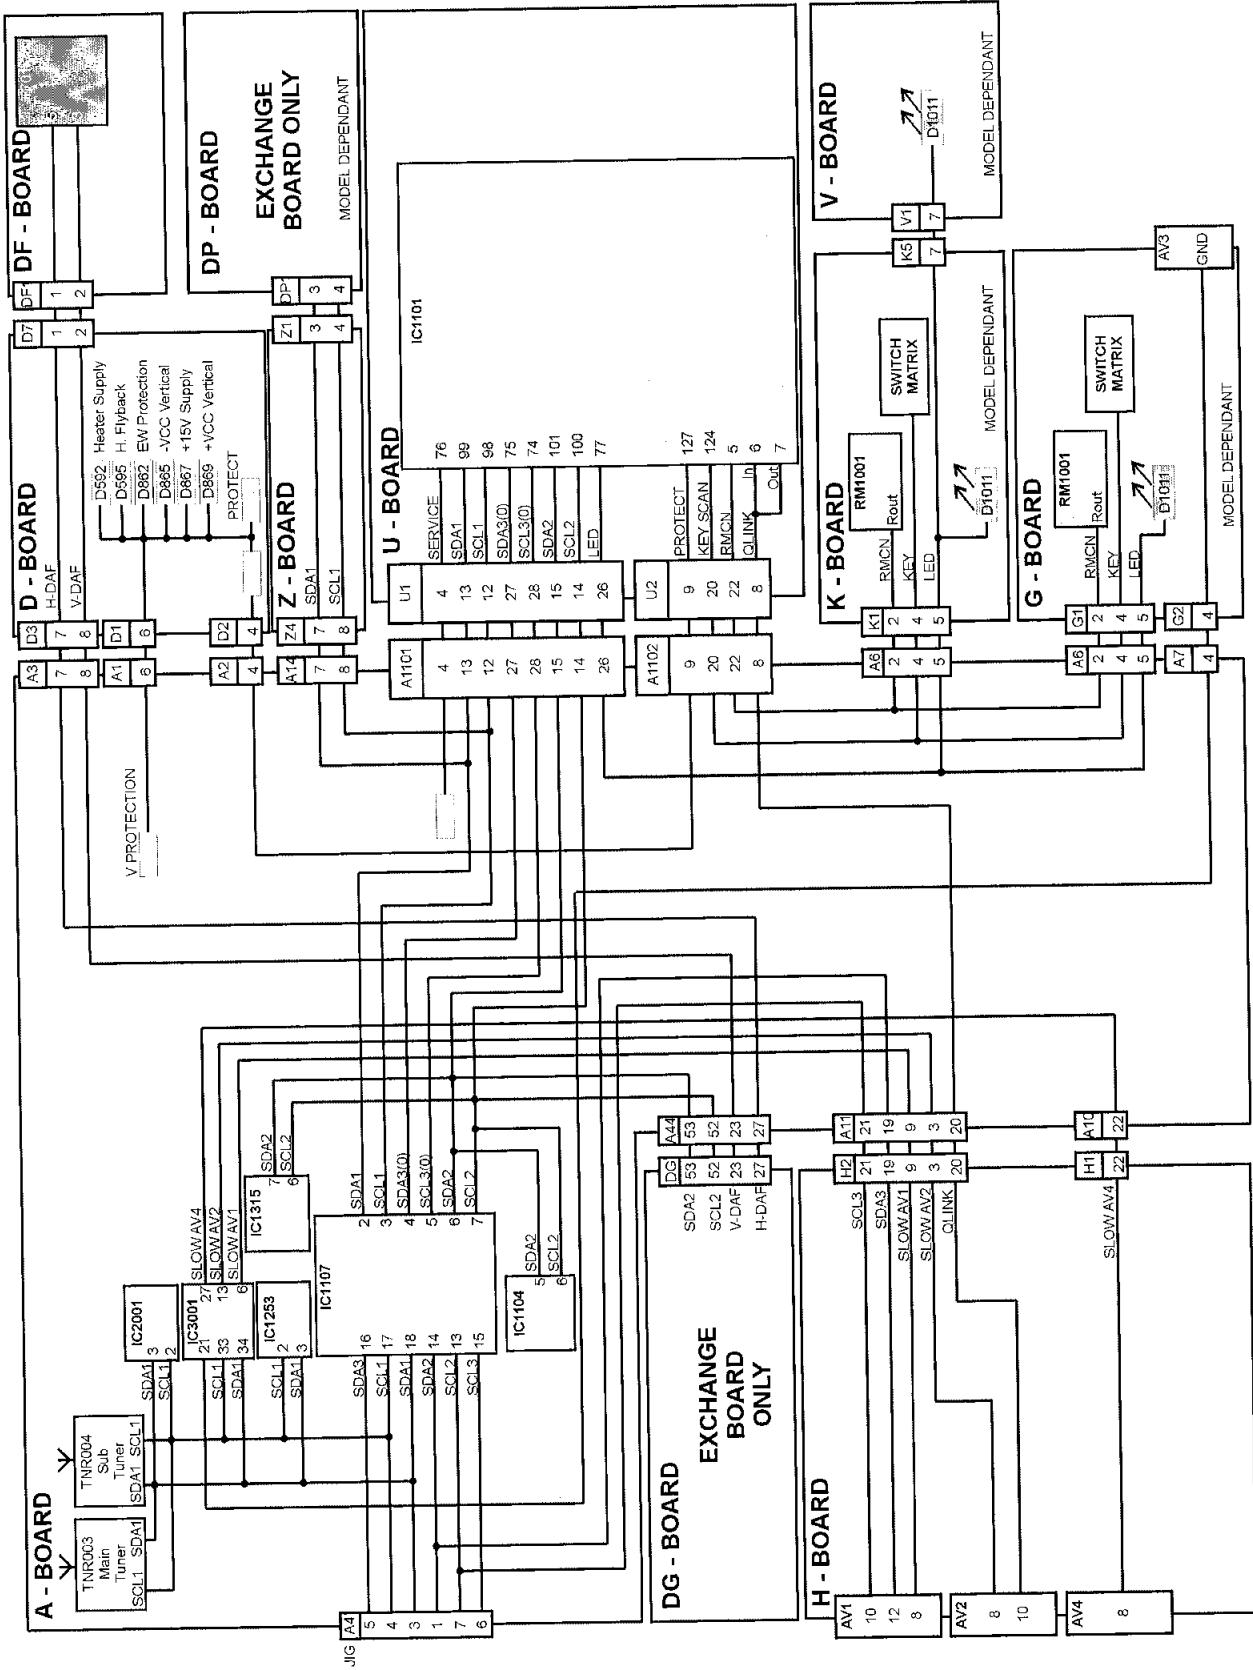

## POWER SUPPLY BLOCK DIAGRAM

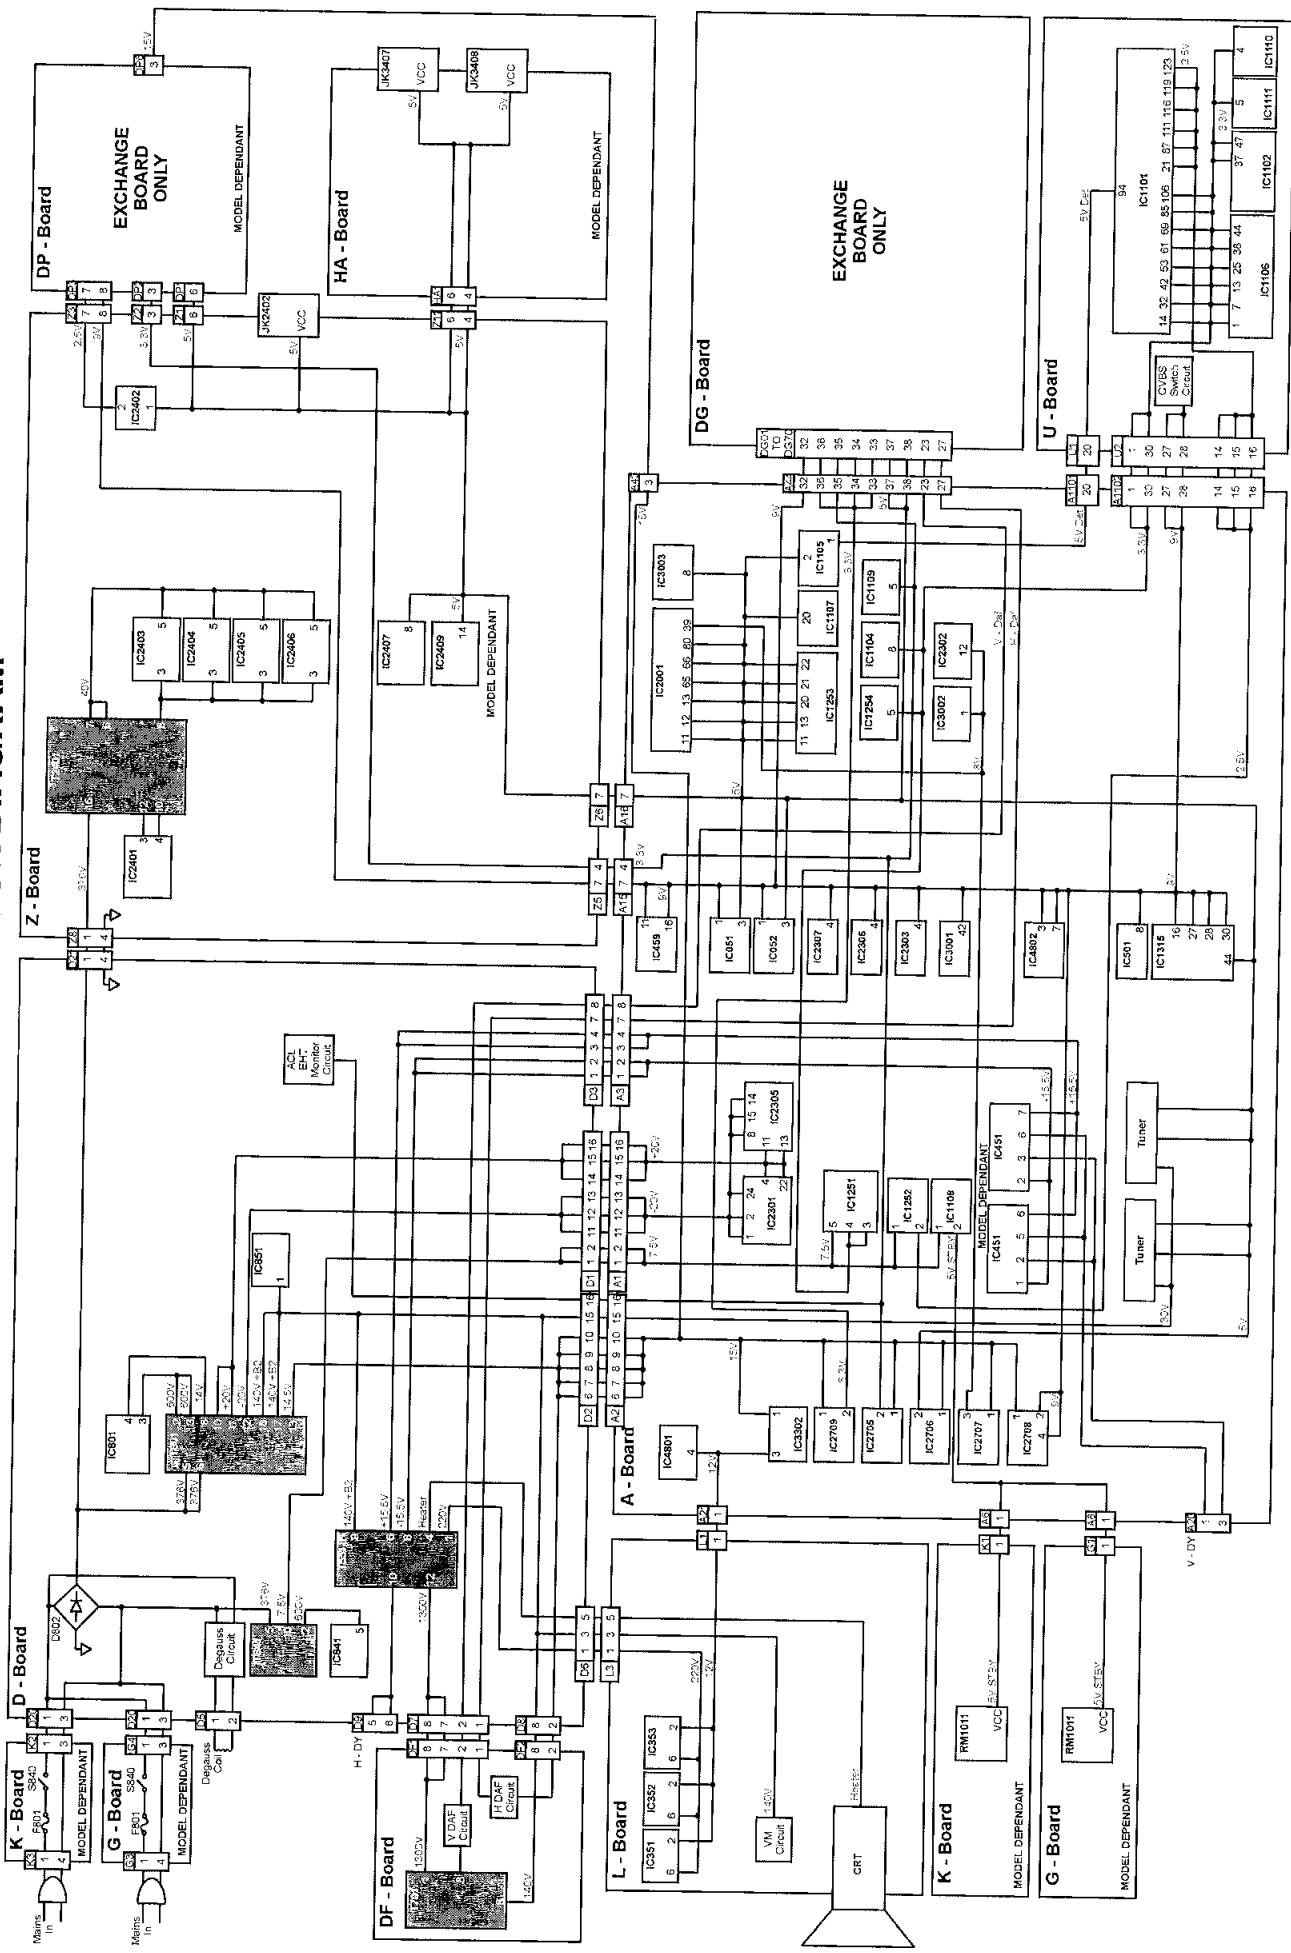


## WIRING BLOCK DIAGRAM

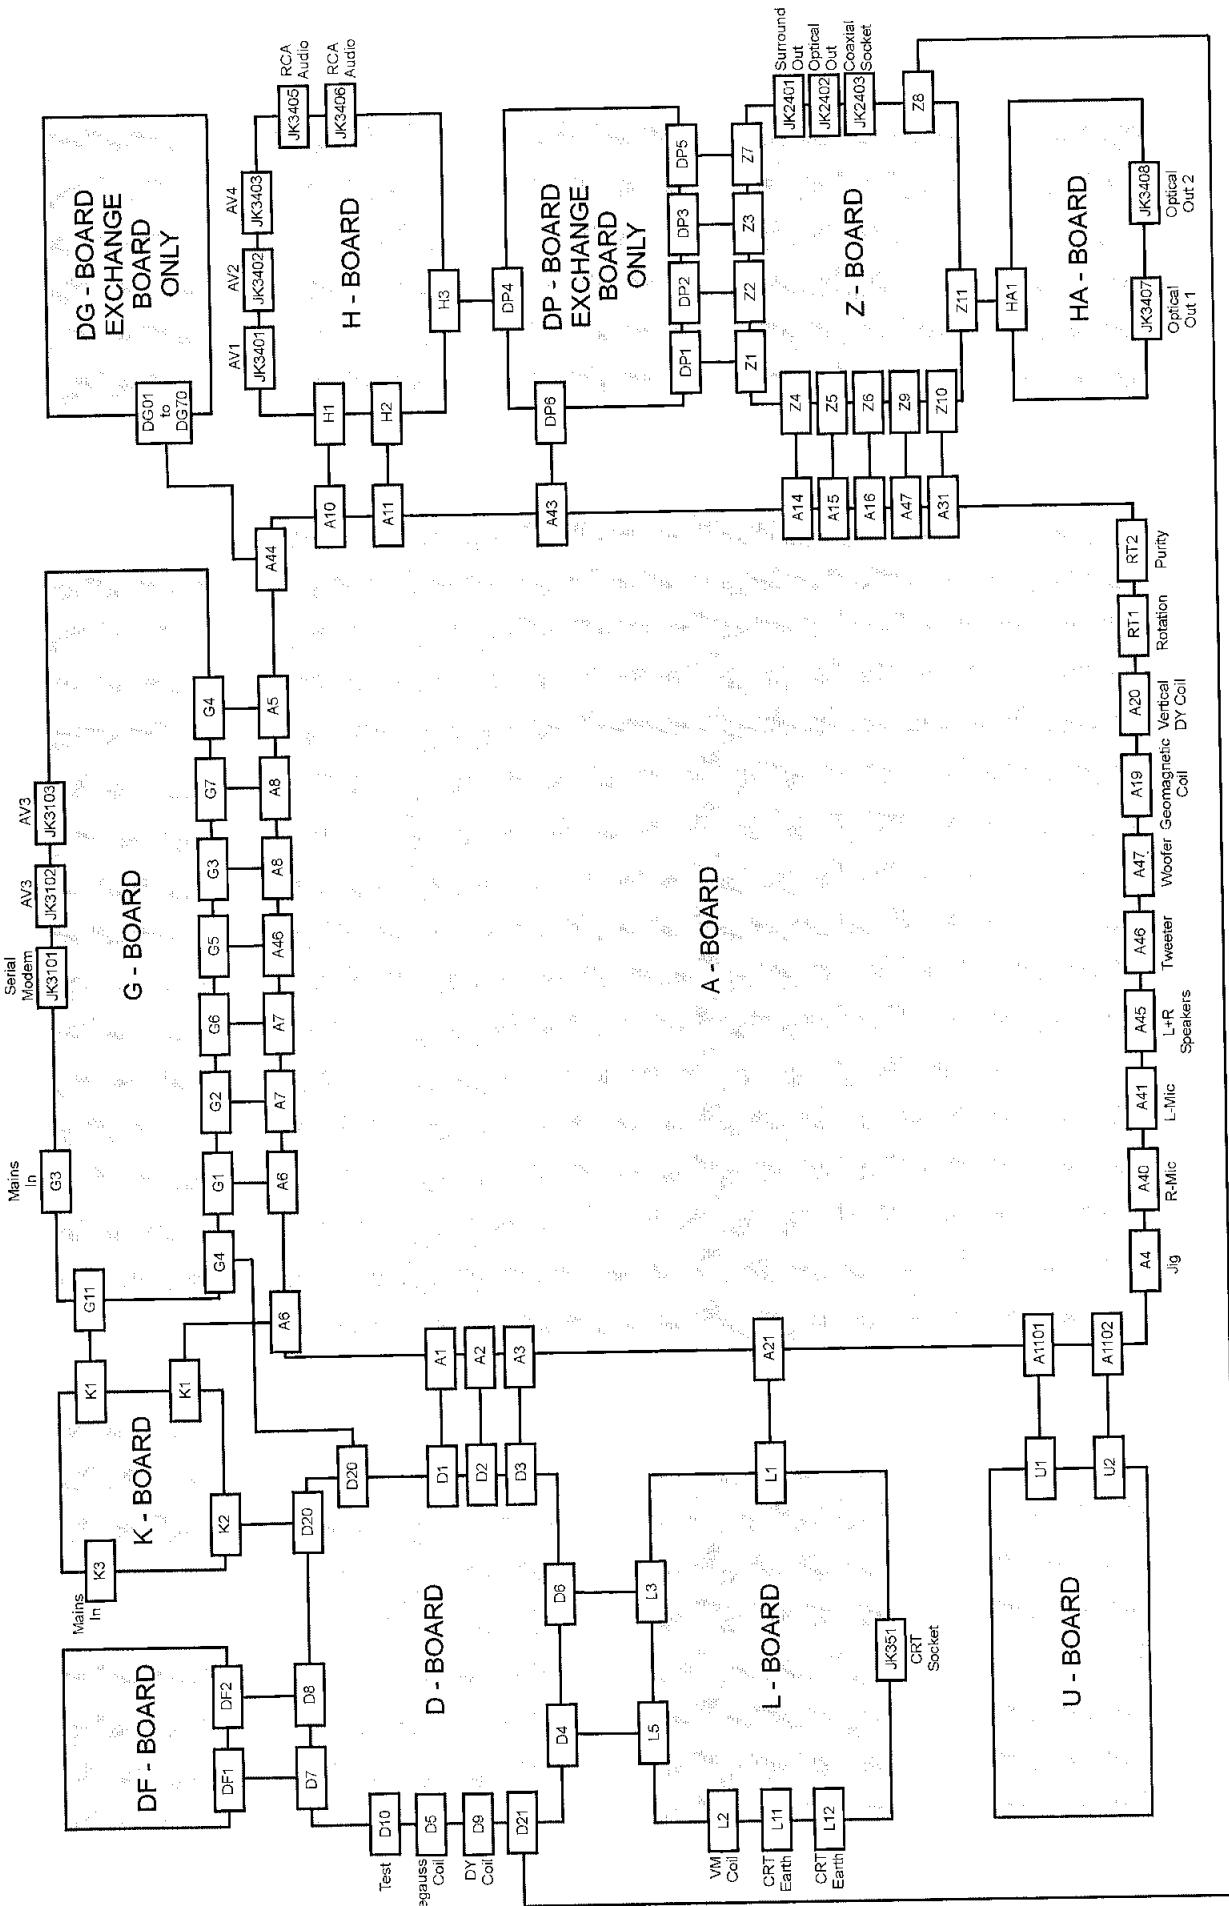

## PARTS LOCATION

### NOTE:

The numbers on the exploded view below refer to the mechanical section of the Replacement Parts List.

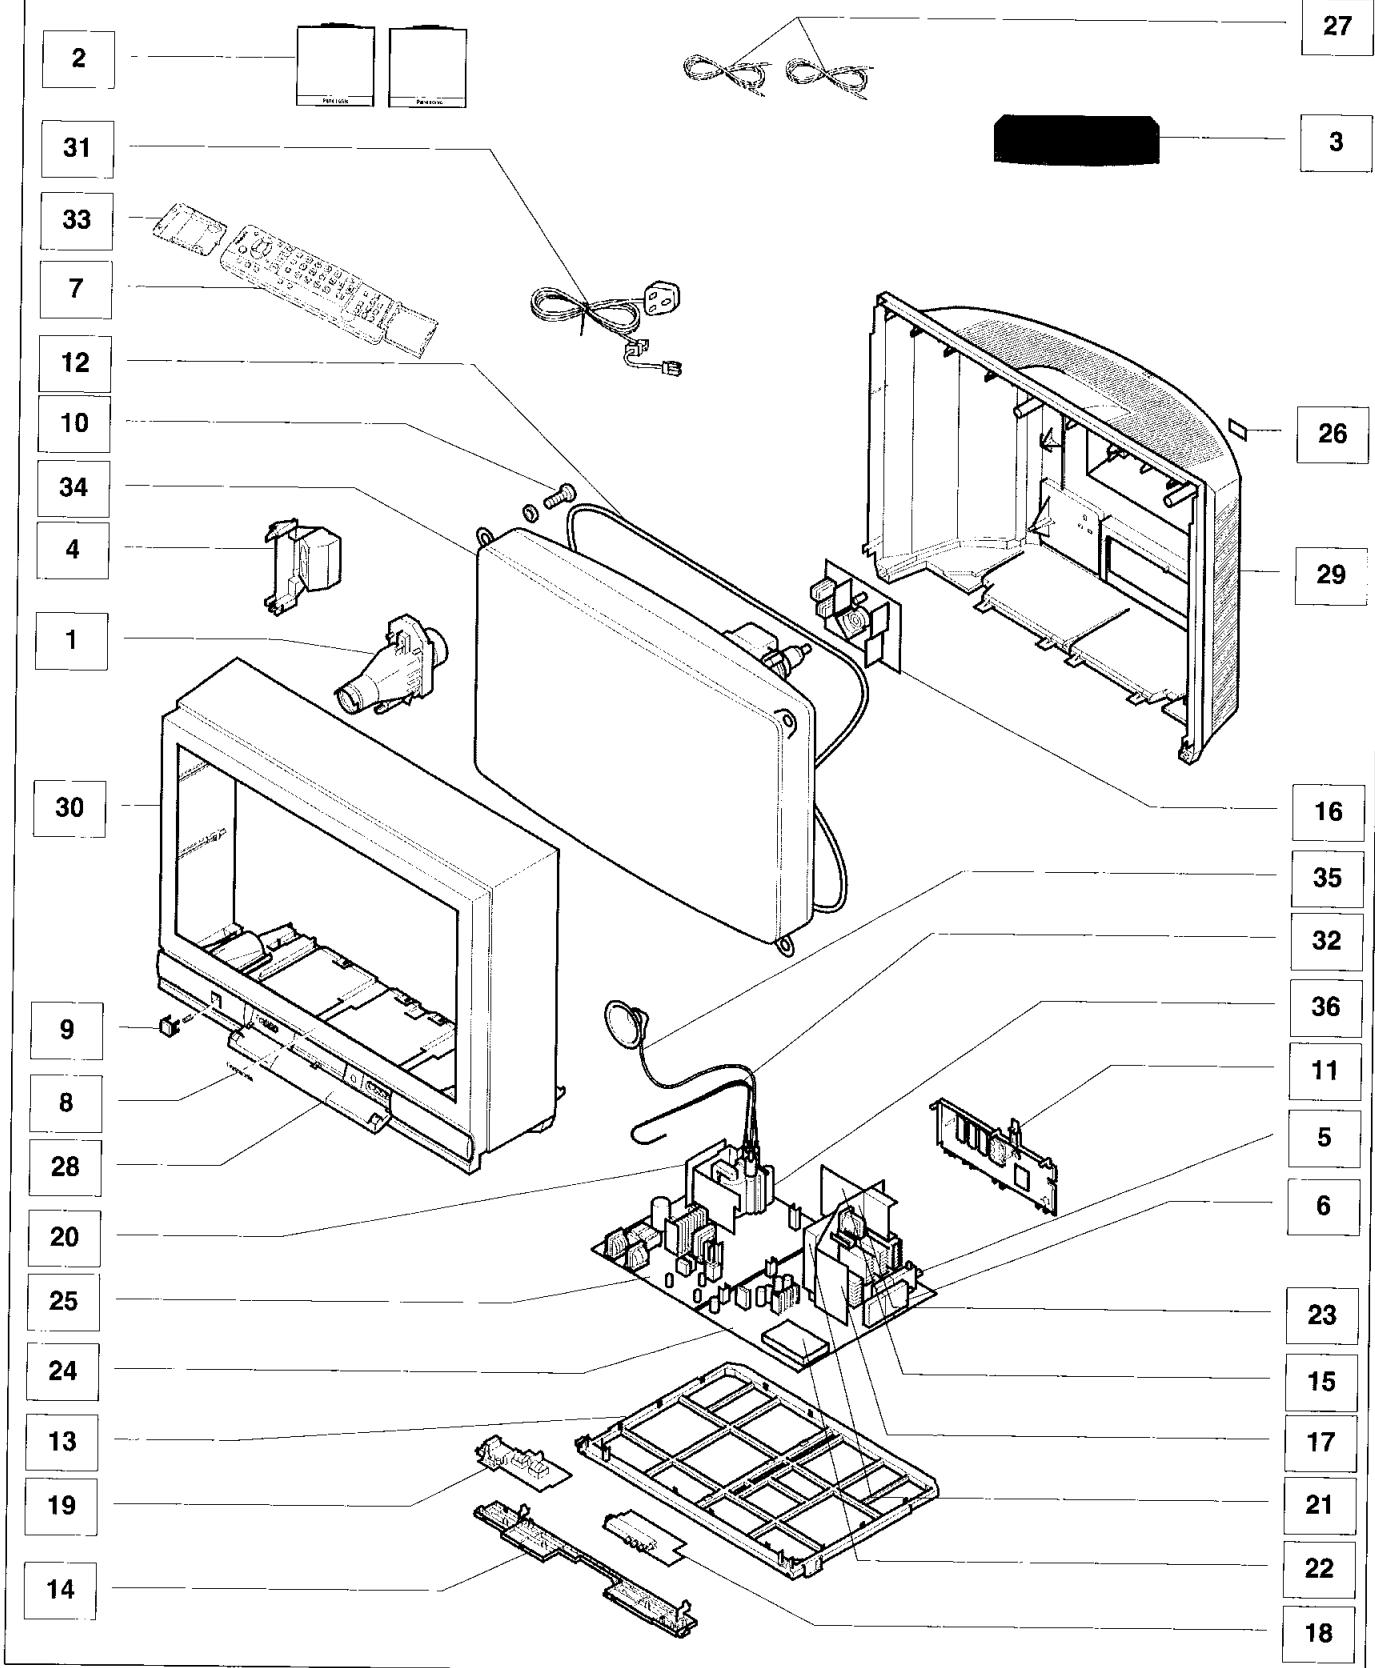

# REPLACEMENT PARTS LIST

## Important Safety Notice

Components Identified by  mark have special characteristics important for safety.

\* When replacing any of these components, use only manufacturers specified parts.  
In case of ordering these spare parts, please always add the complete Model-Type number to your order.

Cct Ref	Parts Number	Description
<b>EXPLODED VIEW</b>		
1	EAB12149C2	SPEAKER (WOOFER)
2	EAS8E430-A	EXT SPEAKER
3	EAS8E450-A	CENTRE SPEAKER
4	EASG7DH08B2	SPEAKER (TWEETER)
5	ENG27510G	TUNER
6	ENG27C01G	TUNER
7	EUR511224	REMOTE CONTROL
8	TBMA060	PANASONIC BADGE
9	TBXA24302	POWER BUTTON
10	THT1062	CRT FIXING SCREW
11	TKP8E1324	AV PANEL
12	TLK8E05123	DEGAUSS COIL
13	TMW8E047	CHASSIS FRAME
14	TMWA003-2	CONTROL BRACKET
15	TNPA1724	H P.C.B.
16	TNPA1726AF	L P.C.B.
17	TNPA1727AB	DP P.C.B EXCHANGE UNIT
18	TNPA1728AB	G P.C.B.
19	TNPA1729	K P.C.B.
20	TNPA1806	DF P.C.B.
21	TNPA1965AB	DG P.C.B EXCHANGE UNIT
22	TNPA2042AM	U P.C.B.
23	TNPA2270	Z P.C.B.
24	TNPH0348AD	A P.C.B.
25	TNPH0349AB	D P.C.B.
26	TQF8E3103	MODEL LABEL
27	TSX8E0015S	DOLBY SPEAKER WIRE 12M
28	TTPA0128	DOOR LID
29	TTUA0370	BACK COVER
30	TTYA0416-2	CABINET
31	TXASX01CJUG	POWER CORD
32	TXJF0C0EFG	FOCUS LEAD ASSEMBLY
33	UR51EC904A	BATTERY COVER (REMOTE)
34	W76EKW10X72	C.R.T.
35	ZTBZAD550A	ANODE CABLE
36	ZTFM77009A	F.B.T.
<b>MISCELLANEOUS COMPONENTS</b>		
	EAS9999	SPEAKER DRIVE UNIT
	T2S9EV618	SPAEAKER BAFFLE
	TBL63413	RUBBER FOOT
	TBLG3020	SET FOOT (REAR)
	TBM8E2039	AV LABEL
	TBM8E2106	LABLE
	TBMU101	LEFT PRESET LABEL
	TBMU102	RIGHT PRESET LABEL
	TEKX008	DOOR CATCHER
	TES2298	CRT EARTH SPRING
	TKPA36805	LEFT PANEL
	TKPA36904	RIGHT PANEL
	TKRA13110	HANDLE
	TKRA19801	BACK COVER HANDLE

Cct Ref	Parts Number	Description
	TLK8E05124	GEOMAGNETIC COIL
	TMWJ019-1	LED HOLDER
	TMX8E051	POWER BUTTON JOINT
	TPC8E4855	CARTON
	TPD8E743	CUSHION TOP
	TPD8E744	CUSHION BOTTOM
	TPD8E745	CUSHION SUB
	TS-32PG50	CABINET SPEAKER PACK
	TZS1EK002	SERVICE PACK
	UM-3DJ-2P	BATTERY PACK
<b>INSTRUCTION BOOKS</b>		
	TQB8E3045	ENGLISH
<b>I.C.s</b>		
	D354	TL431CLPM
	IC051	AN7805FLB
	IC351	TDA6111Q-N4
	IC352	TDA6111Q-N4
	IC353	TDA6111Q-N4
	IC451	LA7845N
	IC459	TC74HC221AF
	IC501	NJM2903MTE1
	IC801	STRF6656LF53
	IC841	MIP0254SPSCF
	IC851	SE140N
	IC1101	SDA6000-A23
	IC1102	E2F0/010/05
	IC1104	X24BR200-3BA
	IC1105	S-80843ALY-Z
	IC1106	TVSA0395
	IC1107	TC7MBD3245FK
	IC1108	AN78L05TA
	IC1109	PST9119NR
	IC1110	PST9128NR
	IC1251	SI-3033C
	IC1252	PQ30RV21B
	IC1253	M62392FP70BC
	IC1254	PST9128NR
	IC1315	AN5394FB
	IC2001	MSP3410DQAC5
	IC2301	TDA7490
	IC2302	AN7108
	IC2303	NJM2059MTE1
	IC2305	TDA7481
	IC2306	NJM2059MTE1
	IC2307	NJM2059MTE1
	IC2401	STR10006-N
	IC2402	PQ30RV21B
	IC2404	TDA2030AV
	IC2405	TDA2030AV
	IC2406	TDA2030AV
	IC2407	TC7WU04FEL
	IC2705	PQ1CG21H2RZ

Cct Ref	Parts Number	Description
IC2706	PQ1CG21H2RZ	REGULATOR
IC2707	AN7808LB	8V REGULATOR
IC2708	SI-8090K	POWER SUPPLY
IC2709	PQ1CG21H2RZ	REGULATOR
IC3001	CXA2069Q-TL	SWITCHING
IC3002	TDA8601T/C1	12V REGULATOR
IC3003	CXA1211M-T4	VIDEO AMPLIFIER
IC3302	L78M12MRB	12V REGULATOR
IC4801	AN6564NS-E1	OPERATIONAL AMPLIFIER
IC4802	PUB4301	GEOMAGNETIC CORRECTION
RM1001	RPM6937-S	LED RECEIVER
<b>FUSES</b>		
F801-2	EYF52BC	FUSE HOLDER
F801-1	EYF52BC	FUSE HOLDER
F801	XBA2C50TH15	FUSE
<b>DIODES</b>		
D003	MA3150HTX	DIODE
D004	MA3150HTX	DIODE
D010	MA152KTX	DIODE
D053	MA152KTX	DIODE
D351	ERA15-04V3	DIODE
D352	ERA15-04V3	DIODE
D353	MA3110LTX	DIODE
D355	ERA15-04V3	DIODE
D356	ERA15-04V3	DIODE
D358	MA151ATX	DIODE
D360	ERA15-02V3	DIODE
D361	MA151ATX	DIODE
D362	MA151ATX	DIODE
D363	MA151ATX	DIODE
D364	MA3130MTX	DIODE
D365	MA3130MTX	DIODE
D366	MA3130MTX	DIODE
D367	MA3051HTX	DIODE
D368	MA3051HTX	DIODE
D369	MA3051HTX	DIODE
D383	ERA15-04V3	DIODE
D385	ERA22-04V3	DIODE
D386	ERA15-04V3	DIODE
D389	ERA15-04V3	DIODE
D452	MA152KTX	DIODE
D453	EU02AV1	DIODE
D454	MA152KTX	DIODE
D455	MA152KTX	DIODE
D456	ERA22-02V3	DIODE
D465	MA3039HTX	DIODE
D502	MA4150TA	DIODE
D503	ERA81004V3	DIODE
D504	D1NL40V70	DIODE
D521	AU02AV0	DIODE
D522	AU02AV0	DIODE
D523	MA165TA5	DIODE
D524	MA165TA5	DIODE
D525	RP1HLFA5	DIODE
D526	RP1HLFA5	DIODE
D553	MA167TA5	DIODE
D554	EU02	DIODE
D555	RH3GLF102	DIODE
D557	MA1033MTA	DIODE
D558	AU02V0	DIODE
D559	FMV-3GULF730	DIODE
D560	MA165TA5	DIODE
D562	MA182TA	DIODE
D570	RU3ANV1	DIODE
D580	MA4360	DIODE
D591	MA165TA5	DIODE

Cct Ref	Parts Number	Description
D592	MA4104	DIODE
D593	ERA15-02V3	DIODE
D594	MA165TA5	DIODE
D595	MA4360MTA	DIODE
D701	D1NL40V70	DIODE
D802	D6SB80LF-B	DIODE
D805	MA2240-BLFS	DIODE
D809	MA2082-ALFS	DIODE
D811	MA2082-ALFS	DIODE
D819	ERA22-04V3	DIODE
D820	ERA22-04V3	DIODE
D821	ERA22-04V3	DIODE
D823	PC123FY2	DIODE
D825	232266296706	THERMISTOR
D826	232266296706	THERMISTOR
D843	ERC0510V1	DIODE
D844	TVSSR2KL	DIODE
D845	RY24V1	DIODE
D847	ERA22-10	DIODE
D848	PC123FY2	DIODE
D851	FMGG26S	DIODE
D852	MA4030LTA	DIODE
D853	RU2AMLFA1	DIODE
D854	RU2AMLFA1	DIODE
D855	FMGG2CS	DIODE
D856	EU02	DIODE
D857	FMGG26S	DIODE
D858	MA165TA5	DIODE
D859	MA165TA5	DIODE
D861	MA165TA5	DIODE
D862	MA4360MTA	DIODE
D865	MA165TA5	DIODE
D867	MA165TA5	DIODE
D869	MA165TA5	DIODE
D881	MA165TA5	DIODE
D885	MA4056HTA	DIODE
D886	MA165TA5	DIODE
D887	MA165TA5	DIODE
D888	EU02	DIODE
D953	R2KNLFA1	DIODE
D961	MA152KTX	DIODE
D1011	LNH201RFCC4	L.E.D.
D1152	MA152KTX	DIODE
D1153	MA152KTX	DIODE
D1302	MA152KTX	DIODE
D1306	MA3062MTX	DIODE
D1307	MA3091MTX	DIODE
D1308	MA152KTX	DIODE
D1309	MA152KTX	DIODE
D1310	MA3062MTX	DIODE
D1311	MA3062MTX	DIODE
D1312	MA3062MTX	DIODE
D1313	MA3043MTX	DIODE
D1315	MA3043MTX	DIODE
D2040	MA152KTX	DIODE
D2041	MA152KTX	DIODE
D2048	MA152KTX	DIODE
D2301	TVSRM26V1	DIODE
D2302	MTZJT-775.6B	DIODE
D2305	MA3047MTX	DIODE
D2306	MA29TA5	DIODE
D2311	MA1180HTA	DIODE
D2312	MA3130MTX	DIODE
D2313	MA152KTX	DIODE
D2314	MA152KTX	DIODE
D2316	MA152KTX	DIODE

Cct Ref	Parts Number	Description
D2401	MA4200MTA	DIODE
D2402	D5L60F4015	DIODE
D2403	TVSEH1LF-F7	DIODE
D2404	MTZJT-778.2A	DIODE
D2405	EU02	DIODE
D2406	EU02	DIODE
D2407	EG01CV0	DIODE
D2410	EU02	DIODE
D2411	FMGG26S	DIODE
D2432	MA167TA5	DIODE
D2433	MA167TA5	DIODE
D2434	MA167TA5	DIODE
D2436	MA167TA5	DIODE
D2437	MA167TA5	DIODE
D2438	MA167TA5	DIODE
D2711	RK34LFC4	DIODE
D2712	AK04V0	DIODE
D2713	RK34LFC4	DIODE
D2714	RK34LFC4	DIODE
D2715	MA29TA5	DIODE
D3003	MA3091LTX	DIODE
D3004	MA3091LTX	DIODE
D3103	MA165TA5	DIODE
D3104	MA165TA5	DIODE
D3401	MA165TA5	DIODE
D3402	MA165TA5	DIODE
<b>TRANSISTORS</b>		
Q002	BC857B	TRANSISTOR
Q052	BC857B	TRANSISTOR
Q369	BC857B	TRANSISTOR
Q451	BC847B	TRANSISTOR
Q460	BC847B	TRANSISTOR
Q461	BC847B	TRANSISTOR
Q462	BC847B	TRANSISTOR
Q463	BC847B	TRANSISTOR
Q501	2SK2962TPE6	TRANSISTOR
Q521	2SK1006RF122	TRANSISTOR
Q522	2SC3311ATA	TRANSISTOR
Q523	2SC3311ATA	TRANSISTOR
Q524	2SC5460LB	TRANSISTOR
Q525	2SC3311ATA	TRANSISTOR
Q551	2SC5591000RK	TRANSISTOR
Q552	2SC1473ATA	TRANSISTOR
Q703	2SK2538000LB	TRANSISTOR
Q805	2SK2123000LB	TRANSISTOR
Q851	2SA1018QTA	TRANSISTOR
Q854	2SC3311ATA	TRANSISTOR
Q874	2SA684R	TRANSISTOR
Q875	2SA720-RS	TRANSISTOR
Q881	2SC3311ATA	TRANSISTOR
Q882	2SC3311ATA	TRANSISTOR
Q883	2SC1317-TA	TRANSISTOR
Q902	BC847B	TRANSISTOR
Q903	BC847B	TRANSISTOR
Q908	BC847B	TRANSISTOR
Q951	BC857B	TRANSISTOR
Q952	BC847B	TRANSISTOR
Q953	BC847B	TRANSISTOR
Q954	BC857B	TRANSISTOR
Q955	2SA1535ARLB	TRANSISTOR
Q956	2SC3944ARLB	TRANSISTOR
Q1003	2SC3311ATA	TRANSISTOR
Q1107	BC847B	TRANSISTOR
Q1108	BC847B	TRANSISTOR
Q1109	BC847B	TRANSISTOR
Q1110	BC847B	TRANSISTOR

Cct Ref	Parts Number	Description
Q1111	BC847B	TRANSISTOR
Q1112	BC847B	TRANSISTOR
Q1113	BC847B	TRANSISTOR
Q1114	BC847B	TRANSISTOR
Q1115	BC847B	TRANSISTOR
Q1121	BC847B	TRANSISTOR
Q1122	BC847B	TRANSISTOR
Q1123	BC847B	TRANSISTOR
Q1125	BC847B	TRANSISTOR
Q1301	BC847B	TRANSISTOR
Q1302	BC847B	TRANSISTOR
Q1336	BC857B	TRANSISTOR
Q1340	BC847B	TRANSISTOR
Q2002	BC857B	TRANSISTOR
Q2003	BC857B	TRANSISTOR
Q2004	BC857B	TRANSISTOR
Q2005	BC857B	TRANSISTOR
Q2040	BC847B	TRANSISTOR
Q2041	BC847B	TRANSISTOR
Q2042	BC847B	TRANSISTOR
Q2043	BC847B	TRANSISTOR
Q2213	BC847B	TRANSISTOR
Q2214	BC847B	TRANSISTOR
Q2215	BC847B	TRANSISTOR
Q2216	BC847B	TRANSISTOR
Q2301	BC847B	TRANSISTOR
Q2302	BC847B	TRANSISTOR
Q2303	BC847B	TRANSISTOR
Q2307	BC847B	TRANSISTOR
Q2308	BC857B	TRANSISTOR
Q2309	BC847B	TRANSISTOR
Q2310	BC847B	TRANSISTOR
Q2311	BC847B	TRANSISTOR
Q2402	2SA684R	TRANSISTOR
Q2403	2SA720-RS	TRANSISTOR
Q2432	BC847B	TRANSISTOR
Q2433	BC847B	TRANSISTOR
Q2434	BC847B	TRANSISTOR
Q2435	BC847B	TRANSISTOR
Q2438	2SK198RTX	TRANSISTOR
Q2439	2SK198RTX	TRANSISTOR
Q2440	2SK198RTX	TRANSISTOR
Q2441	BC857B	TRANSISTOR
Q2506	BC847B	TRANSISTOR
Q2507	BC847B	TRANSISTOR
Q2508	BC847B	TRANSISTOR
Q2509	BC847B	TRANSISTOR
Q2512	BC847B	TRANSISTOR
Q2513	BC847B	TRANSISTOR
Q3001	BC847B	TRANSISTOR
Q3002	BC847B	TRANSISTOR
Q3006	BC857B	TRANSISTOR
Q3007	BC847B	TRANSISTOR
Q3011	BC847B	TRANSISTOR
Q3071	BC847B	TRANSISTOR
Q3072	BC847B	TRANSISTOR
Q3130	BC847B	TRANSISTOR
Q3131	BC857B	TRANSISTOR
Q3132	BC847B	TRANSISTOR
Q3401	BC857B	TRANSISTOR
Q3807	BC847B	TRANSISTOR
Q3808	BC847B	TRANSISTOR
<b>TRANSFORMERS</b>		
L810	ETQR45T001A	TRANSFORMER
T501	ETH19Y187AY	TRANSFORMER
T701	ETF18L101A	TRANSFORMER

Cct Ref	Parts Number	Description		Cct Ref	Parts Number	Description	
T801	ETS39AG296AC	TRANSFORMER	A	L2010	TALC325T4R7M	COIL	
T841	ETS19AB1G6AG	TRANSFORMER	A	L2278	EXCELSA35T	COIL	
T2401	ETS35AA457AD	TRANSFORMER	A	L2301	TALL08T100KA	COIL	
<b>COILS</b>				L2302	TALL08T100KA	COIL	
L002	ELESN2R2KA	COIL		L2303	TAL10RP390LB	COIL	A
L003	ELESN2R2KA	COIL		L2305	TAL10RP390LB	COIL	A
L004	EXCELDR35V	COIL		L2308	TALL08T270KA	COIL	A
L008	EXCELDR35V	COIL		L2309	TAL10RP390LB	COIL	A
L009	EXCELDR35V	COIL		L2311	ELESN101KA	COIL	
L053	EXCELDR35V	COIL		L2312	TALL08T100KA	COIL	
L055	ELESN2R2KA	COIL		L2313	TALL08T100KA	COIL	
L056	ELESN2R2KA	COIL		L2314	EXCELDR35V	COIL	
L351	EXCELSA24T	COIL		L2316	EXCELDR35V	COIL	
L381	ELESN6R8JA	COIL		L2319	EXCELDR35V	COIL	
L382	ELESN4R7KA	COIL		L2320	EXCELDR35V	COIL	
L383	ELESN4R7KA	COIL		L2321	EXCELDR35V	COIL	
L387	EXCELDR35V	COIL		L2322	EXCELDR35V	COIL	
L521	TALL13T182JB	COIL		L2323	EXCELDR35V	COIL	
L559	EXCELDR35C	COIL		L2324	EXCELDR35V	COIL	
L560	EXCELDR35V	COIL		L2325	EXCELDR35V	COIL	
L561	EXCELDR35C	COIL		L2407	EXCELSA35T	COIL	
L563	EXCELSA39V	COIL		L2409	EXCELSA35T	COIL	
L568	EXCELDR35C	COIL		L2410	EXCELSA35T	COIL	
L571	EXCELDR35C	COIL		L2412	EXCELSA35T	COIL	
L574	ELHKL040B	COIL		L2414	EXCELDR35C	COIL	
L576	ELC18B801L	COIL		L2415	EXCELDR25V	COIL	
L579	ELHKL061B	COIL		L2431	TALL08T270KA	COIL	
L701	TALFP15B152K	COIL		L2433	TALL08T270KA	COIL	
L702	ELC18B121E	COIL		L2435	TALL08T270KA	COIL	
L703	EXCELSA35T	COIL		L2436	TALL08T270KA	COIL	
L704	EXCELDR35V	COIL		L2437	TALL08T270KA	COIL	
L812	EXCELSA39V	COIL		L2438	TALL08T270KA	COIL	
L815	EXCELSA39V	COIL		L2439	TLTACT100K	COIL	
L818	EXCELSA39V	COIL		L2440	EXCEMT271BT	COIL	
L860	TALL08T100KA	COIL		L2523	ELESN6R8KA	COIL	
L862	TALL08T680KA	COIL		L2524	ELESN6R8KA	COIL	
L874	EXCELSA35T	COIL		L2527	EXCELSA35T	COIL	
L877	EXCELSA35T	COIL		L2703	EXCELDR35V	COIL	
L883	TALL08T181KA	COIL		L2704	TALL08T330KA	COIL	
L890	ELF18D486D	COIL		L2705	EXCELDR35V	COIL	
L891	ELF18D486D	COIL		L2706	TAL10RP151LB	COIL	
L895	EXCELSA35T	COIL		L2707	EXCELDR35V	COIL	
L904	TLT560K991R	COIL		L2708	EXCELDR35V	COIL	
L953	EXCELSA35T	COIL		L2709	TLPF095	COIL	
L954	EXCELSA35T	COIL		L2710	EXCELDR35V	COIL	
L956	EXCELSA35T	COIL		L2712	TAL10RP151LB	COIL	
L1103	TALC325T4R7M	COIL		L2713	EXCELDR35V	COIL	
L1104	TALC325T4R7M	COIL		L2714	EXCELDR35V	COIL	
L1106	ELESN4R7KA	COIL		L2715	EXCELDR35V	COIL	
L1107	TALC325T4R7M	COIL		L2716	TALL08T330KA	COIL	
L1108	TALC325T4R7M	COIL		L2717	TALL08T330KA	COIL	
L1109	TALC325T4R7M	COIL		L2718	TLPF095	COIL	
L1110	TALC325T4R7M	COIL		L2719	TLPF095	COIL	
L1111	ELESN4R7KA	COIL		L2722	EXCELDR35V	COIL	
L1112	EXCELDR35V	COIL		L2724	EXCELDR35V	COIL	
L1115	TALC325T3R3M	COIL		L2725	EXCELDR35V	COIL	
L1116	TALC325T4R7M	COIL		L2727	EXCELDR35V	COIL	
L1312	EXCELDR35V	COIL		L2729	EXCELDR35V	COIL	
L1322	EXCELDR35V	COIL		L2730	EXCELDR35V	COIL	
L2001	EXCELDR35V	COIL		L2732	EXCELDR35V	COIL	
L2002	EXCELDR35V	COIL		L2734	EXCELDR35V	COIL	
L2004	TLT068K991R	COIL		L2735	EXCELDR35V	COIL	
L2005	EXCELDR35V	COIL		L3004	ELESN4R7KA	COIL	
L2007	EXCELDR35V	COIL		L3050	ELESN221KA	COIL	
L2008	EXCELDR35V	COIL		L3401	EXCELSA35T	COIL	
L2009	TALC325T4R7M	COIL		L3402	EXCELSA35T	COIL	

Cct Ref	Parts Number	Description
L3403	EXCELDR35V	COIL
L3404	EXCELDR35V	COIL
L3405	EXCELDR35V	COIL
L3406	EXCELDR35V	COIL
L3407	EXCELDR35V	COIL
L3408	EXCELDR35V	COIL
L3409	EXCELDR35V	COIL
L3410	EXCELDR35V	COIL
L3411	EXCELDR35V	COIL
L3412	EXCELDR35V	COIL
L3413	EXCELDR35V	COIL
L3414	EXCELDR35V	COIL
L3415	EXCELDR35V	COIL
L3416	EXCELSA35T	COIL
L3417	EXCELSA35T	COIL
L3418	EXCELSA35T	COIL
L3419	EXCELSA35T	COIL
L3420	ELESN4R7KA	COIL
L3424	EXCELDR25V	COIL
L4801	EXCELDR35V	COIL
L4802	EXCELDR35V	COIL
L4803	EXCELDR35V	COIL
L4804	EXCELDR35V	COIL
LC1101	TLK212T256AL	COIL
LC1102	TLK212T256AL	COIL
LC1104	TLK212T256AL	COIL
LC1105	TLK212T256AL	COIL
LC1106	TLK212T256AL	COIL
LC1110	TLK212T256AL	COIL
LC1111	TLK212T256AL	COIL
LC1112	TLK212T256AL	COIL
LC1113	TLK212T256AL	COIL
LC1114	TLK20LFA224M	COIL
LC1115	TLK20LFA103M	COIL
LC1116	TLK20LFA103M	COIL
LC1117	TLK20LFA103M	COIL
LC1118	TLK20LFA103M	COIL
LC1119	TLK20LFA103M	COIL
LC1120	TLK20LFA103M	COIL
LC1121	TLK20LFA224M	COIL
LC1122	TLK20LFA224M	COIL
LC1123	TLK20LFA224M	COIL
LC1124	TLK20LFA224M	COIL
LC1125	TLK20LFA103M	COIL
LC1126	TLK20LFA103M	COIL
LC1127	TLK20LFA103M	COIL
LC1128	TLK20LFA103M	COIL
LC1130	TLK20LFA103M	COIL
LC1131	TLK20LFA103M	COIL
LC1132	TLK20LFA103M	COIL
LC1133	TLK20LFA103M	COIL
LC1134	TLK20LFA103M	COIL
LC1135	TLK212T256AL	COIL
LC1136	TLK20LFA103M	COIL
LC1137	TLK20LFA103M	COIL
LC1138	TLK20LFA103M	COIL
LC1139	TLK20LFA103M	COIL
LC1140	TLK212T256AL	COIL
LC1141	TLK20LFA103M	COIL
LC1142	TLK20LFA103M	COIL
LC1143	TLK20LFA103M	COIL
LC1144	TLK212T256AL	COIL
LC1145	TLK212T256AL	COIL
LC1146	TLK212T256AL	COIL
<b>FILTERS</b>		
L893	ELF24V032B	FILTER

Cct Ref	Parts Number	Description
L894	ELF24V034A	FILTER
LC1107	ELKE103FA	FILTER
LC1108	ELKE103FA	FILTER
LC1109	ELKE103FA	FILTER
LC1147	ELKE103FA	FILTER
<b>CRYSTALS</b>		
X2101	TSSA128	CRYSTAL
X2501	TSSA172	CRYSTAL
X3501	H0J600400006	CRYSTAL
<b>RESISTORS</b>		
C025	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
D842	ERZV10D621CS	VARISTOR 10W 20% 620 Ω
JA1	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA2	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA4	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA5	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA6	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA8	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA9	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA10	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA11	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA12	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA13	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA14	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA15	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA16	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA17	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA23	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA24	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA25	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA26	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA29	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA30	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA32	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA34	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA35	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA36	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA37	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA38	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA39	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA40	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA41	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA42	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JA43	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA3	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA7	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA18	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA19	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA20	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA21	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA22	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA27	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA28	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA31	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω
JSA33	ERJ6GEY0R00	S.M.CARB 0.1W 5% 0 Ω

Cct Ref	Parts Number	Description				Cct Ref	Parts Number	Description			
JSA34	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R355	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
JSA35	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R356	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
JSA36	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R357	ERC12GK471C	SOLID	0.5W	5%	470 Ω
JSA42	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R360	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
JSA45	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R361	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω
JSA46	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R362	ERG3FJS823	METAL	3W	5%	82K Ω
JSA47	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R363	ERJ6ENF1501	S.M.CARB	0.1W	1%	1R5K Ω
JSA48	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R364	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
JSA52	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R365	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
JSA53	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R366	ERC12GK561	SOLID	0.5W	10%	560 Ω
JSA55	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R370	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
JSA57	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R371	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω
JSA59	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R372	ERJ6ENF1501	S.M.CARB	0.1W	1%	1R5K Ω
JSA62	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R373	ERG3FJ823	METAL	3W	5%	82K Ω
JSA64	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R374	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
JSA65	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R375	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
JSA66	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R376	ERC12GK561	SOLID	0.5W	10%	560 Ω
JSA67	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R382	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
JSA69	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R385	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
JSA71	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R387	ERDS1TJ471	CARBON	0.5W	5%	470 Ω
JSA74	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R451	ERDS1TJ2R7	CARBON	0.5W	5%	2R7 Ω
JSA75	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R452	ERDS1TJ2R7	CARBON	0.5W	5%	2R7 Ω
JSA81	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R453	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
JSA84	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R454	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
JSA89	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R455	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
JSA90	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R456	ERG3FJ221	METAL	3W	5%	220 Ω
JSA101	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R457	ERJ6ENF7151	S.M.CARB	0.1W	1%	7K15 Ω
JSH1	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R458	ERJ6ENF3481	S.M.CARB	0.1W	1%	3K48 Ω
JSH2	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R459	ERJ6ENF9531	S.M.CARB	0.1W	1%	9K53 Ω
JSH3	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R460	ERJ6ENF3011	S.M.CARB	0.1W	1%	300 Ω
JSH7	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R461	ERDS1FJ1R0	CARBON	0.5W	5%	1 Ω ▲
JSH8	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R462	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
JSH9	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R463	ERJ6GEYJ563	S.M.CARB	0.1W	5%	56K Ω
JSL10	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R464	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
JSL14	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R465	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
JSU1	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R467	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω
JSU3	ERJ3GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R468	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
JSZ7	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R469	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
JSZ18	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R470	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
L1101	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R471	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
L1307	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R472	ERJ6GEYJ272	S.M.CARB	0.1W	5%	2K7 Ω
L2307	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R473	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
L2315	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R474	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
L2317	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R475	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
L2318	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R507	ERDS2TJ104T	CARBON	2W	5%	100K Ω
L3002	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R508	ERD25TJ271	CARBON	0.25W	5%	270 Ω
L3003	ERD25TC0T	CARBON	0.25W	5%	0 Ω	R509	ERX3FJ1R0	METAL	3W	5%	1 Ω
LC1343	QJT1090	JUMPER	0.1W	5%	0 Ω	R510	ERG1FJS561	METAL	1W	5%	560 Ω
LC1344	QJT1090	JUMPER	0.1W	5%	0 Ω	R511	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R001	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R512	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R002	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	R513	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R003	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	R514	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R005	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R520	ERD25TJ153	CARBON	0.25W	5%	15K Ω
R008	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	R521	ERG2FJS123	METAL	2W	5%	12K Ω
R052	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	R522	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R053	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	R523	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R055	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R524	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R056	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R525	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R057	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	R526	ERC14GK184	SOLID	0.25W	5%	180K Ω
R059	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω	R527	ERC14GK224	SOLID	1/4W	5%	220K Ω ▲
R060	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω	R530	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R064	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω	R531	ERC14GK334	SOLID	0.25W	10%	330K Ω
R351	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω	R532	ERD25TJ473	CARBON	0.25W	5%	47K Ω
R352	ERJ6ENF1801	S.M.CARB	0.1W	1%	1.8K Ω	R533	ERG3FJS821	METAL	3W	5%	820 Ω
R353	ERJ6ENF1501	S.M.CARB	0.1W	1%	1R5K Ω	R534	ERDS2TJ333T	CARBON	2W	5%	33K Ω
R354	ERG3FJS823	METAL	3W	5%	82K Ω	R535	ERG1FJS332	METAL	1W	5%	3R3K Ω

Cct Ref	Parts Number	Description				Cct Ref	Parts Number	Description			
R536	ERG3FJS821	METAL	3W	5%	820 Ω	R860	ERDS1TJ182	CARBON	0.5W	10%	1K8 Ω
R537	ERC12GK104V	SOLID	0.5W	10%	100K Ω	R861	ERDS1FJ1R0	CARBON	0.5W	5%	1 Ω ▲
R538	ERC14GK225	SOLID	1/4W	5%	2.2M Ω	R862	ERDS1FJ1R0	CARBON	0.5W	5%	1 Ω ▲
R540	ERD25TJ560	CARBON	0.25W	5%	56 Ω	R863	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R551	ERD25TJ103	CARBON	0.25W	5%	10K Ω	R867	ERG3FJS153	METAL	3W	5%	15K Ω
R552	ERDS2TJ223T	CARBON	2W	5%	22K Ω	R871	ERDS2TJ332T	CARBON	2W	5%	3K2 Ω
R555	ERD25TJ473	CARBON	0.25W	5%	47K Ω	R872	ERDS2TJ154	CARBON	2W	5%	150K Ω
R556	ERF2AKR22	WOUND	0.5W	5%	R22 Ω	R875	ERG3FJ220H	METAL	3W	5%	22 Ω ▲
R557	ERO50PKF2802	METAL	0.5W	1%	8K Ω ▲	R876	ERQ2CJP2R7	METAL	2W	2%	2R7 Ω
R558	ERDS1TJ333	CARBON	0.5W	5%	33K Ω	R877	ERDS1TJ103	CARBON	0.5W	5%	10K Ω
R559	ERD25TJ273	CARBON	0.25W	5%	27K Ω	R878	ERDS2TJ221T	CARBON	0.5W	5%	220 Ω
R560	ERD25TJ183	CARBON	0.25W	5%	18K Ω	R879	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R564	ERO25CKF1002	METAL	0.25W	1%	10K Ω ▲	R880	ERX5FJ1R0	METAL	5W	5%	1 Ω ▲
R566	ERDS2TJ222T	CARBON	0.5W	5%	2K2 Ω	R881	ERDS1TJ122	CARBON	0.5W	5%	1K2 Ω
R569	ERDS2TJ222T	CARBON	0.5W	5%	2K2 Ω	R883	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R570	ERDS2TJ222T	CARBON	0.5W	5%	2K2 Ω	R884	ERDS1TJ102	CARBON	0.5W	5%	1K Ω
R577	ERG3FJ331	METAL	3W	5%	330 Ω ▲	R885	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R578	ERG3FJ331	METAL	3W	5%	330 Ω ▲	R888	ERD25TJ102	CARBON	0.25W	5%	1K Ω
R580	ERDS2TJ223T	CARBON	2W	5%	22K Ω	R891	ERC12ZGK105D	SOLID	0.5W	10%	1M Ω
R581	ERDS2TJ104T	CARBON	2W	5%	100K Ω	R901	ERDS1FJ102	CARBON	0.5W	5%	1K Ω
R582	ERD25TJ124	CARBON	0.25W	5%	120K Ω	R902	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω
R583	ERD25TJ103	CARBON	0.25W	5%	10K Ω	R903	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R584	ERD25TJ272F	CARBON	0.25W	5%	2K7 Ω	R904	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω
R586	ERQ2CJP2R2	METAL	2W	5%	2R2 Ω ▲	R905	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R591	ERO25TKF9311	METAL	0.25W	1%	9K31 Ω	R906	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R592	ERO25TKF1132	METAL	0.25W	1%	1K13 Ω	R907	ERJ6GEYJ510	S.M.CARB	0.1W	5%	51 Ω
R593	ERQ14AJW 100	FUSIBLE	0.25W	5%	10 Ω ▲	R908	ERJ6GEYJ391	S.M.CARB	0.1W	5%	390 Ω
R594	ERD25TJ334	CARBON	0.25W	5%	330K Ω	R909	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R647	ERJ6GEYJ680	S.M.CARB	0.1W	5%	68 Ω	R950	ERQ1CJP331	FUSIBLE	1W	5%	330 Ω ▲
R652	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	R952	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R653	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	R953	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R654	ERJ3GEYJ101	S.M.CARB	0.1W	5%	100 Ω	R954	ERDS1FYJ561P	CARBON	0.5W	5%	560 Ω
R655	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	R955	ERJ6GEYJ271	S.M.CARB	0.1W	5%	270 Ω
R656	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	R956	ERDS1FYJ561P	CARBON	0.5W	5%	560 Ω
R657	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	R957	ERDS1TJ330	CARBON	0.5W	5%	33 Ω
R658	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	R958	ERDS1TJ330	CARBON	0.5W	5%	33 Ω
R705	ERF5ZJ471	WOUND	5W	5%	470 Ω	R960	ERQ14AJ100	FUSIBLE	0.25W	5%	10 Ω ▲
R714	ERDS1FJ680	CARBON	0.5W	5%	68 Ω	R962	ERQ14AJ120	METAL	0.25W	5%	12 Ω ▲
R719	ERF5AK4R7	WOUND	5W	1%	4R7 Ω	R963	ERQ14AJ120	METAL	0.25W	5%	12 Ω ▲
R779	ERJ6ENF1152	S.M.CARB	0.1W	1%	1K5 Ω	R964	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R780	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	R965	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R781	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	R966	ERG3FJS151	METAL	3W	5%	150 Ω
R782	ERDS2TJ391T	CARBON	2W	5%	390 Ω	R967	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R783	ERJ6GEYJ682	S.M.CARB	0.1W	5%	6K8 Ω	R968	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R801	ERF7ZK2R7	WOUND	7W	20%	2R7 Ω ▲	R969	ERDS1FJ390	CARBON	0.5W	5%	39 Ω ▲
R803	ERG3FJS183	METAL	3W	5%	18K Ω	R970	ERJ6GEYJ2R7	S.M.CARB	0.1W	5%	2R7 Ω
R804	ERG3FJS183	METAL	3W	5%	18K Ω	R971	ERJ6GEYJ2R7	S.M.CARB	0.1W	5%	2R7 Ω
R806	ERX12SZJR12	METAL	0.5W	5%	R12 Ω	R972	ERDS1FJ390	CARBON	0.5W	5%	39 Ω ▲
R807	ERC14GK824C	SOLID	0.25W	10%	820K Ω	R973	ERDS1FJ121	CARBON	0.5W	5%	120 Ω ▲
R810	ERX12SZJR12	METAL	0.5W	5%	R12 Ω	R1042	ERD25TC0T	CARBON	0.25W	5%	0 Ω
R815	ERDS1TJ151	CARBON	0.5W	5%	150 Ω	R1043	ERD25TJ682	CARBON	0.25W	5%	6K8 Ω
R819	ERD25TJ681	CARBON	0.25W	5%	680 Ω	R1044	ERD25TJ123	CARBON	0.25W	5%	12K Ω
R820	ERDS2TJ562	CARBON	2W	5%	5.6K Ω	R1045	ERDS2TJ223T	CARBON	2W	5%	22K Ω
R836	ERDS2TJ152T	CARBON	0.5W	5%	1K5 Ω	R1046	ERDS2TJ683T	CARBON	2W	5%	68K Ω
R837	ERDS2TJ152T	CARBON	0.5W	5%	1K5 Ω	R1050	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R839	ERD75TAJ825	CARBON	0.75W	5%	8M2 Ω ▲	R1051	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R841	ERF2AJ560	WOUND	2W	5%	56 Ω	R1052	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R842	ERG1FJS104	METAL	1W	5%	100K Ω	R1081	ERDS2TJ332T	CARBON	2W	5%	3K2 Ω
R843	ERD25TJ101	CARBON	0.25W	5%	100 Ω	R1082	ERD25TJ103	CARBON	0.25W	5%	10K Ω
R851	ERDS1TJ153	CARBON	0.5W	5%	15K Ω	R1083	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R853	ERD25TJ103	CARBON	0.25W	5%	10K Ω	R1084	ERD25TJ101	CARBON	0.25W	5%	100 Ω
R854	ERDS1TJ333	CARBON	0.5W	5%	33K Ω	R1101	ERJ3GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R855	ERDS2TJ821T	CARBON	2W	5%	820 Ω	R1102	ERJ3GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R856	ERDS2TJ562	CARBON	2W	5%	5.6K Ω	R1103	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R857	ERF7ZK2R2	WOUND	7W	10%	2R2 Ω	R1104	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R859	ERDS2TJ333T	CARBON	2W	5%	33K Ω	R1105	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω

Cct Ref	Parts Number	Description	Cct Ref	Parts Number	Description		
R1106	ERJ3GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω	R1191	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1107	ERJ6GEYJ272	S.M.CARB	0.1W 5% 2K7 Ω	R1192	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1108	ERJ6GEYJ272	S.M.CARB	0.1W 5% 2K7 Ω	R1193	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1109	ERJ6GEYJ272	S.M.CARB	0.1W 5% 2K7 Ω	R1194	ERJ3GEYJ220	S.M.CARB	0.1W 5% 22 Ω
R1110	ERJ6GEYJ272	S.M.CARB	0.1W 5% 2K7 Ω	R1195	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1111	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1196	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1112	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1202	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1113	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1205	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1114	ERJ6GEYJ102	S.M.CARB	0.1W 5% 1K Ω	R1209	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1115	ERJ6GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1214	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1116	ERJ3GEYJ153V	S.M.CARB	0.1W 5% 15K Ω	R1217	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1117	ERJ3GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω	R1221	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1118	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1225	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1119	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1232	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1120	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1233	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1121	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1236	EXB38V680JV	CHIP	0.063 5% 680 Ω ▲
R1122	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1239	ERJ6GEYJ223	S.M.CARB	0.1W 5% 22K Ω
R1123	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1240	ERJ6GEYJ223	S.M.CARB	0.1W 5% 22K Ω
R1124	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1241	ERJ6GEYJ473	S.M.CARB	0.1W 5% 47K Ω
R1125	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1242	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1126	ERJ3GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω	R1243	ERJ6GEYJ562	S.M.CARB	0.1W 5% 5K6 Ω
R1127	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω	R1249	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1128	ERJ3GEYJ273	S.M.CARB	0.1W 5% 27K Ω	R1250	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1129	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1251	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω
R1131	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω	R1253	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1132	ERJ6GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1255	ERJ3GEYJ392V	S.M.CARB	0.1W 5% 3K9 Ω
R1134	ERJ3GEYJ473V	S.M.CARB	0.1W 5% 47K Ω	R1256	ERJ3GEYJ473V	S.M.CARB	0.1W 5% 47K Ω
R1135	ERJ3GEYJ224V	S.M.CARB	0.1W 5% 220K Ω	R1257	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1136	ERJ3GEYJ473V	S.M.CARB	0.1W 5% 47K Ω	R1258	ERJ3GEYJ223V	S.M.CARB	0.1W 5% 22K Ω
R1137	ERJ3GEYJ104V	S.M.CARB	0.1W 5% 100K Ω	R1264	ERJ3GEYJ471	S.M.CARB	0.1W 5% 470 Ω
R1138	ERJ3GEYJ223V	S.M.CARB	0.1W 5% 22K Ω	R1293	ERJ6ENF3901	S.M.CARB	0.1W 1% 3K9 Ω
R1139	ERJ3GEYJ104V	S.M.CARB	0.1W 5% 100K Ω	R1294	ERJ6ENF3901	S.M.CARB	0.1W 1% 3K9 Ω
R1140	ERJ6GEYJ225	S.M.CARB	0.1W 5% 2M2 Ω	R1317	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1141	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1340	ERJ6GEYJ331	S.M.CARB	0.1W 5% 330 Ω
R1142	ERJ3GEYJ221	S.M.CARB	0.1W 5% 220 Ω	R1341	ERJ6GEYJ331	S.M.CARB	0.1W 5% 330 Ω
R1144	ERJ3GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω	R1411	ERJ6GEYJ471	S.M.CARB	0.1W 5% 470 Ω
R1145	ERJ3GEYJ331	S.M.CARB	0.1W 5% 330 Ω	R1413	ERJ6GEYJ104	S.M.CARB	0.1W 5% 100K Ω
R1146	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1423	ERJ6GEYJ471	S.M.CARB	0.1W 5% 470 Ω
R1147	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1434	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1148	ERJ3GEYJ273	S.M.CARB	0.1W 5% 27K Ω	R1435	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1149	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1438	ERJ6GEYJ471	S.M.CARB	0.1W 5% 470 Ω
R1150	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1439	ERJ6GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1153	ERJ3GEYJ563V	S.M.CARB	0.1W 5% 56K Ω	R1446	ERJ6GEYJ331	S.M.CARB	0.1W 5% 330 Ω
R1154	ERJ3GEYJ102	S.M.CARB	0.1W 5% 1K Ω	R1457	ERJ6GEYJ224	S.M.CARB	0.1W 5% 220K Ω
R1155	ERJ3GEYJ223V	S.M.CARB	0.1W 5% 22K Ω	R1458	ERJ6ENF6801	S.M.CARB	0.1W 1% 6K8 Ω
R1156	ERJ3GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω	R1459	ERJ6ENF5491V	S.M.CARB	0.5W 5% 490 Ω
R1157	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1460	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω
R1158	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R1473	ERJ6GEYJ683	S.M.CARB	0.1W 5% 68K Ω
R1160	ERJ3GEYJ182V	S.M.CARB	0.1W 5% 1K8 Ω	R1474	ERJ6GEYJ274	S.M.CARB	0.1W 5% 270K Ω
R1161	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R1482	ERJ6GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω
R1162	ERJ6GEYJ123	S.M.CARB	0.1W 5% 12K Ω	R1529	ERJ6GEYJ100	S.M.CARB	0.1W 5% 10 Ω
R1163	ERJ6GEYJ222	S.M.CARB	0.1W 5% 2K2 Ω	R1531	ERJ6GEYJ100	S.M.CARB	0.1W 5% 10 Ω
R1164	ERJ6GEYJ222	S.M.CARB	0.1W 5% 2K2 Ω	R1543	ERJ6GEYJ100	S.M.CARB	0.1W 5% 10 Ω
R1166	ERJ6GEYJ332	S.M.CARB	0.1W 5% 3K3 Ω	R2004	ERJ6GEYJ222	S.M.CARB	0.1W 5% 2K2 Ω
R1168	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R2006	ERJ6GEYJ222	S.M.CARB	0.1W 5% 2K2 Ω
R1169	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω	R2007	ERJ6GEYJ222	S.M.CARB	0.1W 5% 2K2 Ω
R1170	ERJ3GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R2008	ERJ6GEYJ222	S.M.CARB	0.1W 5% 2K2 Ω
R1172	ERJ3GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω	R2015	ERJ6GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1177	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R2019	ERJ6GEYJ471	S.M.CARB	0.1W 5% 470 Ω
R1178	ERJ3GEY0R00	S.M.CARB	0.1W 5% 0 Ω	R2025	ERJ6GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω
R1179	ERJ3GEYJ682	S.M.CARB	0.1W 5% 6K8 Ω	R2026	ERJ6GEYJ472	S.M.CARB	0.1W 5% 4K7 Ω
R1180	ERJ3GEYJ392V	S.M.CARB	0.1W 5% 3K9 Ω	R2030	ERJ6GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1181	ERJ6GEYJ103	S.M.CARB	0.1W 5% 10K Ω	R2031	ERJ6GEYJ101	S.M.CARB	0.1W 5% 100 Ω
R1188	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R2033	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1189	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R2034	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω
R1190	ERJ3GEYJ101	S.M.CARB	0.1W 5% 100 Ω	R2035	ERJ6GEY0R00	S.M.CARB	0.1W 5% 0 Ω

Cct Ref	Parts Number	Description				
R2036	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2039	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2040	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2041	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2042	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2043	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2044	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2050	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2051	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2052	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2251	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2252	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2253	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2254	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2255	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2256	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2257	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2258	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2301	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2303	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2304	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2305	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2306	ERJ6ENF5232	S.M.CARB	0.1W	1%	52K3 Ω	
R2307	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω	
R2308	ERJ6GEYJ153	S.M.CARB	0.1W	5%	15K Ω	
R2309	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R2310	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2311	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R2312	ERJ6GEYJ134	S.M.CARB	0.1W	5%	130K Ω	
R2315	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2316	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R2317	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2318	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2319	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	
R2321	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2322	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2323	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω	
R2324	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2325	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2326	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2327	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2328	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω	
R2329	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω	
R2330	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R2331	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2332	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	
R2334	ERJ6ENF5232	S.M.CARB	0.1W	1%	52K3 Ω	
R2335	ERJ6ENF6802V	S.M.CARB	0.1W	1%	68K Ω	
R2336	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2337	ERJ6ENF1202	S.M.CARB	0.1W	1%	1K2 Ω	
R2338	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R2339	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω	
R2340	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2341	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2342	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2345	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2346	ERJ6GEYJ303	S.M.CARB	0.1W	5%	30K Ω	
R2348	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2349	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2350	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2351	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2352	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	
R2354	ERX5FJ1R0	METAL	5W	5%	1 Ω △	
R2355	ERX3FJ2R2	METAL	3W	5%	2R2 Ω	
R2356	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2357	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	

Cct Ref	Parts Number	Description				
R2358	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2364	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω	
R2365	ERG1JS102	METAL	1W	5%	1K Ω	
R2366	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω	
R2368	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2369	ERX3FJS4R7	METAL	3W	5%	4R7 Ω	
R2371	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2374	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2375	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2376	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω	
R2377	ERG3FJ561H	METAL	2W	5%	560 Ω	
R2378	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω	
R2383	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2384	ERG3FJ471	METAL	3W	5%	470 Ω △	
R2385	ERJ6GEYJ752	S.M.CARB	0.1W	5%	7K5 Ω	
R2386	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	
R2387	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2388	ERD25TJ101	CARBON	0.25W	5%	100 Ω	
R2389	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2390	ERJ6GEYJ273	S.M.CARB	0.1W	5%	27K Ω	
R2391	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	
R2393	ERJ6GEYJ274	S.M.CARB	0.1W	5%	270K Ω	
R2395	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω	
R2396	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2398	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R2399	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω	
R2400	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2401	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2403	ERDS1TJ154	CARBON	0.5W	5%	150 Ω	
R2404	ERDS1TJ184	CARBON	0.5W	5%	180 Ω	
R2406	ERW12PKR33	WOUND	0.5W	10%	R33 Ω △	
R2407	ERD2FCVJ4R7P	CARBON	2W	5%	4R7 Ω △	
R2408	ERG2FJ101H	METAL	2W	5%	100 Ω △	
R2409	ERG2FJ101H	METAL	2W	5%	100 Ω △	
R2410	ERG5FJ473	METAL	5W	5%	47K Ω △	
R2410	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω	
R2411	ERD2FCVJ4R7P	CARBON	2W	5%	4R7 Ω △	
R2411	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2412	ERG5FJ390H	METAL	5W	5%	39 Ω △	
R2412	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2413	ERQ2CJP2R4	METAL	2W	5%	2R4 Ω △	
R2414	ERG3FJ471	METAL	3W	5%	470 Ω △	
R2415	ERDS1TJ103	CARBON	0.5W	5%	10K Ω	
R2416	ERDS2TJ820T	CARBON	2W	5%	82 Ω	
R2417	ERD25TJ102	CARBON	0.25W	5%	1K Ω	
R2418	ERG3FJ471	METAL	3W	5%	470 Ω △	
R2421	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω	
R2422	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω	
R2423	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R2428	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R2429	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω	
R2430	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω	
R2431	ERJ6ENF3901	S.M.CARB	0.1W	1%	3K9 Ω	
R2432	ERJ6ENF3901	S.M.CARB	0.1W	1%	3K9 Ω	
R2434	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2435	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2436	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω	
R2438	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R2440	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R2441	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2442	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2443	ERJ6GEYJ471	S.M.CARB	0.1W	5%	470 Ω	
R2444	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2447	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	
R2448	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω	
R2449	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	

Cct Ref	Parts Number	Description			
R2450	ERJ6GEYJ392	S.M.CARB	0.1W	5%	3K9 Ω
R2451	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2452	ERJ6GEYJ182	S.M.CARB	0.1W	5%	1K8 Ω
R2454	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2455	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2456	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2458	ERX12SJ1R0	METAL	0.5W	5%	1 Ω ▲
R2459	ERX12SJ1R0	METAL	0.5W	5%	1 Ω ▲
R2460	ERX12SJ1R0	METAL	0.5W	5%	1 Ω ▲
R2461	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R2463	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω
R2464	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2465	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R2466	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω
R2467	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω
R2468	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R2469	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2470	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R2471	ERJ6GEYJ393	S.M.CARB	0.1W	5%	39K Ω
R2472	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2473	ERJ6GEYJ222	S.M.CARB	0.1W	5%	2K2 Ω
R2474	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R2475	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R2476	ERJ6GEYJ152	S.M.CARB	0.1W	5%	1K5 Ω
R2477	ERJ6GEYJ151	S.M.CARB	0.1W	5%	150 Ω
R2478	ERJ6GEYJ154	S.M.CARB	0.1W	5%	150K Ω
R2479	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2480	ERJ6GEYJ822	S.M.CARB	0.1W	5%	8K2 Ω
R2481	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω
R2482	ERJ6GEYJ472	S.M.CARB	0.1W	5%	4K7 Ω
R2487	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R2488	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R2489	ERJ6GEYJ183	S.M.CARB	0.1W	5%	18K Ω
R2490	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2491	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω
R2492	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2495	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2496	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2497	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω
R2498	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2499	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2502	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R2550	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2551	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2552	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2553	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2554	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2555	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2556	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2557	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2558	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2559	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2560	ERJ6GEYJ821	S.M.CARB	0.1W	5%	820 Ω
R2561	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2568	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2569	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2570	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2571	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2572	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2573	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2623	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K Ω
R2624	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M Ω
R2625	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2626	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K Ω
R2627	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M Ω
R2628	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω

Cct Ref	Parts Number	Description			
R2629	ERJ6GEYJ334	S.M.CARB	0.1W	5%	330K Ω
R2630	ERJ6GEYJ105	S.M.CARB	0.1W	5%	1M Ω
R2631	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2632	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2633	ERJ6GEYJ224	S.M.CARB	0.1W	5%	220K Ω
R2717	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω
R2718	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2719	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R2720	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2723	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R2724	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R2725	ERJ6ENF1301	S.M.CARB	0.1W	1%	1K3 Ω
R2726	ERJ6ENF4121	S.M.CARB	0.1W	1%	4K12 Ω
R2727	ERJ6ENF2151	S.M.CARB	0.1W	1%	2K15 Ω
R2728	ERJ6ENF1201	S.M.CARB	0.1W	1%	1K2 Ω
R2731	ERJ6ENF2151	S.M.CARB	0.1W	1%	2K15 Ω
R2732	ERJ6ENF1201	S.M.CARB	0.1W	1%	1K2 Ω
R3001	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3002	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3003	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3004	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3005	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3006	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3007	ERJ8GEYJ680	S.M.CARB	.125W	5%	68 Ω
R3008	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3009	ERJ6GEYJ332	S.M.CARB	0.1W	5%	3K3 Ω
R3010	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3012	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3013	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3014	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3015	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
R3017	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3018	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3019	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3020	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3021	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω
R3022	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3023	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3025	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3026	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3027	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3028	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω
R3029	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3030	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3031	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω
R3034	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3035	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3036	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3037	ERJ3GEYJ103	S.M.CARB	0.1W	5%	10K Ω
R3044	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3049	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω
R3050	ERJ6ENF5600	S.M.CARB	0.1W	1%	560 Ω
R3051	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3053	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3054	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3059	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω
R3062	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3064	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3066	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3069	ERJ6GEY0R00	S.M.CARB	0.1W	5%	0 Ω
R3071	ERJ6GEYJ221	S.M.CARB	0.1W	5%	220 Ω
R3073	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω
R3074	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω
R3076	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω
R3077	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω
R3078	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω

Cct Ref	Parts Number	Description				Cct Ref	Parts Number	Description								
R3079	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3448	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω					
R3084	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3449	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω					
R3085	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3450	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω					
R3086	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3451	ERJ6GEYJ184	S.M.CARB	0.1W	5%	180K Ω					
R3087	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3455	ERJ6GEYJ104	S.M.CARB	0.1W	5%	100K Ω					
R3088	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3456	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω					
R3089	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3457	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω					
R3090	ERJ6GEYJ562	S.M.CARB	0.1W	5%	5K6 Ω	R3458	ERJ8GEYJ331	S.M.CARB	.125W	5%	330 Ω					
R3116	ERD25TJ103	CARBON	0.25W	5%	10K Ω	R3832	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω					
R3122	ERJ6GEYJ683	S.M.CARB	0.1W	5%	68K Ω	R3835	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω					
R3123	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	R3836	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω					
R3124	ERJ6GEYJ681	S.M.CARB	0.1W	5%	680 Ω	R3841	ERJ6GEYJ103	S.M.CARB	0.1W	5%	10K Ω					
R3125	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	R4801	ERJ6ENF2701	S.M.CARB	0.1W	1%	27 Ω					
R3126	ERJ6GEYJ121	S.M.CARB	0.1W	5%	120 Ω	R4802	ERJ6ENF1331	S.M.CARB	0.1W	1%	330 Ω					
R3127	ERJ6GEYJ390	S.M.CARB	0.1W	5%	39 Ω	R4803	ERJ6ENF3320	S.M.CARB	0.1W	1%	3K3 Ω					
R3128	ERJ6GEYJ331	S.M.CARB	0.1W	5%	330 Ω	R4804	ERJ6ENF1001	S.M.CARB	0.1W	1%	1K Ω					
R3129	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω	R4805	ERJ6ENF2213	S.M.CARB	0.1W	1%	221K Ω					
R3130	ERJ6GEYJ561	S.M.CARB	0.1W	5%	560 Ω	R4806	ERJ6ENF6651	S.M.CARB	0.1W	1%	6K65 Ω					
R3326	ERJ6ENF2202	S.M.CARB	0.1W	1%	22K Ω	R4807	ERJ6ENF9091	S.M.CARB	0.1W	1%	9K09 Ω					
R3401	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	R4808	ERJ6ENF3832	S.M.CARB	0.1W	1%	38K3 Ω					
R3402	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	R4809	ERJ6ENF5621	S.M.CARB	0.1W	1%	5K62 Ω					
R3403	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	R4810	ERJ6ENF4701	S.M.CARB	0.1W	1%	4K7 Ω					
R3404	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	<b>CAPACITORS</b>										
R3405	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	C001	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3406	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	C002	ECA1HM100GB	ELECT	50V		10μF					
R3407	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	C003	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3408	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	C008	ECJ2VB1H103K	CERAMIC	50V		10nF					
R3409	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C012	ECJ2VF1H104Z	CERAMIC	50V		100nF					
R3410	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C013	ECA0JM102GB	ELECT	6.3V		1000μF					
R3411	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C014	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3412	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	C017	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3413	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C018	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3414	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C020	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3415	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C026	ECJ2VF1H103Z	CERAMIC	50V		10nF					
R3416	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C051	ECEA1HN010UB	ELECT	50V		1μF					
R3417	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	C052	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3418	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C057	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3419	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	C062	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3420	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	C063	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3421	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	C064	ECA1HM100GB	ELECT	50V		10μF					
R3422	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	C068	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3423	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C069	ECA1HM101GB	ELECT	50V		100μF					
R3424	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C070	ECJ2VF1H104Z	CERAMIC	50V		100nF					
R3425	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C071	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3426	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	C352	ECJ2VB1H103K	CERAMIC	50V		10nF					
R3427	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C354	ECJ2VB1H223K	CERAMIC	50V		22nF					
R3428	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C355	ECQM2104KZ	FILM	250V		100nF					
R3429	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C356	ECJ2VC1H180J	CERAMIC	50V		18pF					
R3430	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	C357	ECKC2H122J	CERAMIC	500V		1.2μF					
R3431	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C359	ECJ2VF1C104Z	CERAMIC	16V		470nF					
R3432	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	C360	ECA1CM471GB	ELECT	16V		470μF					
R3433	ERJ6GEYJ102	S.M.CARB	0.1W	5%	1K Ω	C361	ECJ2VB1H103K	CERAMIC	50V		10nF					
R3434	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	C363	ECJ2VB1H223K	CERAMIC	50V		22nF					
R3435	ERJ6GEYJ333	S.M.CARB	0.1W	5%	33K Ω	C364	ECJ2VC1H270J	CERAMIC	50V		27pF					
R3436	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C365	ECQM2104KZ	FILM	250V		100nF					
R3437	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C366	ECKC2H122J	CERAMIC	500V		1.2μF					
R3438	ERJ6GEYJ223	S.M.CARB	0.1W	5%	22K Ω	C371	ECJ2VB1H103K	CERAMIC	50V		10nF					
R3439	ERJ6GEYJ750	S.M.CARB	0.1W	5%	75 Ω	C373	ECJ2VB1H103K	CERAMIC	50V		10nF					
R3440	ERJ8ENF75R0	S.M.CARB	0.1W	1%	75 Ω	C374	ECJ2VC1H070D	CERAMIC	50V		7pF					
R3441	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	C375	ECQM2104KZ	FILM	250V		100nF					
R3442	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	C376	ECKC2H122J	CERAMIC	500V		1.2μF					
R3443	ERJ6GEYJ123	S.M.CARB	0.1W	5%	12K Ω	C377	ECA2EM100B	ELECT	250V		10μF					
R3444	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C380	ECEA1HU101	ELECT	50V		100μF					
R3445	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	C382	ECA1CM221GB	ELECT	16V		220μF					
R3446	ERJ6GEYJ101	S.M.CARB	0.1W	5%	100 Ω	C383	ECA1CM222GB	ELECT	16V		2200μF					
R3447	ERJ6GEYJ473	S.M.CARB	0.1W	5%	47K Ω	C388	ECJ2VB1H183K	CERAMIC	50V		18nF					

Cct Ref	Parts Number	Description			Cct Ref	Parts Number	Description			
C390	ECA1HM100GB	ELECT	50V	10µF	C824	ECQE6823KFB	FILM	600V	82nF	
C391	ECKC3D332J	CERAMIC	2KV	3.3µF	C828	ECKC3D152J	CERAMIC	2KV	1.5nF	
C451	ECA1VM470B	ELECT	35V	47µF	C829	ECQB1H681JF3	FILM	50V	680pF	
C452	ECEA1HU471	ELECT	50V	470µF	C831	ECKCNA471MBB	CERAMIC	10V	4R7µF	
C455	ECEA1CN220	ELECT	16V	22µF	C841	ECKRAE472ZE	CERAMIC	10V	4.7µF	
C457	ECA1VHG102B	ELECT	35V	1pF	C843	ECQV1H104J	FILM	50V	100nF	
C459	ECA1HM100GB	ELECT	50V	10pF	C844	ECKC3D392J	CERAMIC	2KV	3900pF	
C460	ECQB1224KFW	FILM	100V	220nF	C845	ECKC1H101J	CERAMIC	50V	100pF	
C462	ECQV1H104J	FILM	50V	100nF	C847	ECA2WM100E	ELECT	450V	10µF	
C463	ECJ2VF1H103Z	CERAMIC	50V	10nF	C851	ECQB1104JF3	FILM	100V	100nF	
C473	ECQV1H104J	FILM	50V	100nF	C852	ECQB1104JF3	FILM	100V	100nF	
C474	ECJ2VF1H103Z	CERAMIC	50V	10nF	C853	ECEA1HU102	ELECT	50V	1000µF	
C475	ECJ2VC1H220J	CERAMIC	50V	22pF	C854	ECKC2H561J	CERAMIC	500V	560pF	
C476	ECHS1H102FZ3	FILM	100V	100nF	C855	ECQB1H103J	FILM	50V	10nF	
C482	ECA1CM102B	ELECT	16V	1000µF	C858	ECKC3D182JB	CERAMIC	2KV	1.8nF	
C490	ECJ2VF1H103Z	CERAMIC	50V	10nF	C861	ECA1EHG331B	ELECT	50V	330pF	
C504	ECA1VM101GB	ELECT	35V	100µF	C862	ECA1EHG222B	ELECT	50V	2.2pF	
C505	ECQV1H104J	FILM	50V	100nF	C864	ECA1EM222GB	ELECT	25V	2200µF	
C508	ECA1EM102GB	ELECT	25V	100µF	C865	ECA1EM222GB	ELECT	25V	2200µF	
C510	ECJ2VF1C104Z	CERAMIC	16V	470nF	C866	ECOS2CA561BB	ELECT	160V	560µF	
C521	ECKC3A152J	CERAMIC	1KV	1500pF	▲	C868	ECA160V33UB	ELECT	160V	33µF
C522	ECKC3A272J	CERAMIC	1KV	2.7µF	C869	ECA1EM472E	ELECT	50V	4.7pF	
C523	ECKC3A151J	CERAMIC	1KV	150pF	▲	C871	ECA1HHG100B	ELECT	50V	10µF
C524	ECQM6223JZW	FILM	600V	22nF	C883	ECA1HM100GB	ELECT	50V	10µF	
C525	ECQM4223JZW	FILM	400V	22nF	C885	ECA1VM470B	ELECT	35V	47µF	
C526	ECKC3D101J	CERAMIC	2KV	100pF	▲	C888	ECA1CM471GB	ELECT	16V	470µF
C527	ECA1HM010GB	ELECT	50V	1µF	C889	ECA1CM222GB	ELECT	16V	2200µF	
C528	ECKC3D471JB	CERAMIC	2KV	470pF	▲	C892	ECQU2A224MN	FILM	250V	220nF
C529	ECA1HM100GB	ELECT	50V	10µF	C893	ECQU2A224MN	FILM	250V	220nF	
C530	ECKC3A681J	CERAMIC	1KV	680pF	▲	C894	ECQU2A683MNB	FILM	100V	68nF
C531	ECKC3D102J	CERAMIC	2KV	1nF	▲	C895	ECKCNA152ME7	CERAMIC	10V	1.5µF
C554	ECKC3D681J	CERAMIC	2KV	680pF	▲	C897	ECKCNA152ME7	CERAMIC	10V	1.5µF
C555	ECQP1223JZW	FILM	100V	22nF	C898	ECQU2A224MN	FILM	250V	220nF	
C556	ECWH20102JVY	FILM	200V	1µF	C899	ECQU2A224MN	FILM	250V	220nF	
C558	ECWH20472JVB	FILM	200V	4.7nF	C901	EEANA1E100B	CERAMIC	25V	10µF	
C559	ECQF4123JZH	FILM	400V	12nF	▲	C902	ECA1HM101GB	ELECT	50V	100µF
C560	ECEA2CNR47SB	ELECT	160V	0.47µF	C905	ECA1VM101GB	ELECT	35V	100µF	
C561	ECWH20512JVB	FILM	200V	5.1nF	C907	ECJ2VC1H151J	CERAMIC	50V	150pF	
C562	ECQM4223KC	FILM	400V	220nF	C955	ECQB1103J	FILM	100V	10nF	
C565	ECQE2155JFB	FILM	250V	1.5µF	C958	ECA2CM100B	ELECT	160V	10µF	
C569	ECA2EM330B	ELECT	250V	33µF	C959	ECQB1103J	FILM	100V	10nF	
C571	ECKC1H472J	CERAMIC	50V	4.7nF	C960	ECJ2VC1H221J	CERAMIC	50V	220pF	
C576	ECKC3A182J	CERAMIC	1KV	1800pF	▲	C961	ECA2CM100B	ELECT	160V	10µF
C577	ECWF2274JBB	FILM	200V	270nF	C962	ECQM4472RJZ	FILM	400V	4.7µF	
C578	ECWF4304JBP	FILM	400V	300nF	C963	ECJ2VC1H221J	CERAMIC	50V	220pF	
C579	ECWF4334JBB	FILM	400V	330nF	C964	ECA1CHG101	ELECT	16V	100µF	
C580	ECWF4474JBB	FILM	400V	470nF	C966	ECA1HM101GB	ELECT	50V	100µF	
C583	ECQB1H223K	FILM	50V	22nF	C967	ECA1CHG471B	ELECT	16V	470µF	
C584	ECKC3D681J	CERAMIC	2KV	680pF	▲	C974	ECA1VM101GB	ELECT	35V	100µF
C585	ECKC3D681J	CERAMIC	2KV	680pF	▲	C1040	ECQB1H223K	FILM	50V	22nF
C591	ECA1HM100GB	ELECT	50V	10µF	C1041	ECA1HM470GB	ELECT	50V	47µF	
C705	ECQM2562JZB	FILM	200V	5.6µF	C1043	ECKC1H101J	CERAMIC	50V	100pF	
C708	ECQE2334KF3	FILM	200V	330nF	C1101	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C709	ECQE1335KFB	FILM	100V	3.3µF	C1102	EEVHB0J101P	CERAMIC	10V	100pF	
C710	ECQE1335KFB	FILM	100V	3.3µF	C1103	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C711	ECQE1335KFB	FILM	100V	3.3µF	C1104	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C715	ECKC3D271J	CERAMIC	2KV	270pF	C1105	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C801	ECKRAE472ZE	CERAMIC	10V	4.7µF	C1106	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C802	ECKRAE472ZE	CERAMIC	10V	4.7µF	C1107	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C803	ECKRAE472ZE	CERAMIC	10V	4.7µF	C1108	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C804	ECKRAE472ZE	CERAMIC	10V	4.7µF	C1109	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C808	ECA1VHG221B	ELECT	35V	220µF	C1112	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C817	ECKC3D681J	CERAMIC	2KV	680pF	▲	C1115	ECJ2VB1C104K	CERAMIC	16V	100nF
C819	ECKC2H471J	CERAMIC	500V	470pF	▲	C1116	ECJ2VF1C104Z	CERAMIC	16V	470nF
C820	ECOS2GP471DB	ELECT	200V	470µF	C1117	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C823	ECQF4123JZH	FILM	400V	12nF	▲	C1118	ECJ2VB1H472K	CERAMIC	50V	4.7nF

Cct Ref	Parts Number	Description			Cct Ref	Parts Number	Description		
C1119	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1510	ECJ2VB1C104K	CERAMIC	16V	100nF
C1120	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1511	ECJ2VB1C104K	CERAMIC	16V	100nF
C1121	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1513	ECJ2VB1C104K	CERAMIC	16V	100nF
C1122	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1514	ECJ2VB1C104K	CERAMIC	16V	100nF
C1123	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1515	ECJ2VB1C104K	CERAMIC	16V	100nF
C1124	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1516	ECJ2VB1C104K	CERAMIC	16V	100nF
C1125	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1544	ECA1HM101GB	ELECT	50V	100μF
C1126	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1550	ECA1HM101GB	ELECT	50V	100μF
C1127	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1551	ECA1HM101GB	ELECT	50V	100μF
C1128	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1563	ECA1CM470GB	ELECT	16V	47μF
C1129	ECJ2VF1C104Z	CERAMIC	16V	470nF	C1564	ECA1HM4R7GB	ELECT	50V	4.7μF
C1130	EEVHB0G221P	CERAMIC	16V	220pF	C1565	ECA1HM4R7GB	ELECT	50V	4.7μF
C1131	ECJ2VC1H220J	CERAMIC	50V	22pF	C1566	ECA1HM220GB	ELECT	50V	22μF
C1132	ECJ2VC1H220J	CERAMIC	50V	22pF	C2007	ECJ2VC1H560J	CERAMIC	50V	56pF
C1133	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2008	ECJ2VC1H470J	CERAMIC	50V	47pF
C1134	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2009	ECJ2VC1H470J	CERAMIC	50V	47pF
C1135	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2010	ECJ2VC1H560J	CERAMIC	50V	56pF
C1136	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2011	ECJ2VC1H070D	CERAMIC	50V	7pF
C1137	EEVHB0G221P	CERAMIC	16V	220pF	C2014	ECJ2VC1H010C	CERAMIC	50V	1pF
C1138	ECJ2VC1H221J	CERAMIC	50V	220pF	C2015	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1139	ECJ2VC1H221J	CERAMIC	50V	220pF	C2016	ECA1HM101GB	ELECT	50V	100μF
C1140	ECJ2VB1E104K	CERAMIC	25V	100nF	C2017	ECJ2VC1H010C	CERAMIC	50V	1pF
C1142	ECJ2VC1H151J	CERAMIC	50V	150pF	C2022	TACCN0J105KT	CERAMIC	6.3V	1μF
C1144	ECJ2VC1H101J	CERAMIC	50V	100pF	C2023	TACCN0J105KT	CERAMIC	6.3V	1μF
C1146	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2024	ECJ3VB1C474K	CERAMIC	16V	470nF
C1147	ECA1CM471GB	ELECT	16V	470μF	C2025	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1148	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2027	ECA1HM100GB	ELECT	50V	10μF
C1150	ECJ2VB1C104K	CERAMIC	16V	100nF	C2028	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1151	ECJ2VB1C104K	CERAMIC	16V	100nF	C2030	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1152	ECJ2VB1H103K	CERAMIC	50V	10nF	C2031	ECA1HM101GB	ELECT	50V	100μF
C1153	ECJ2VB1H103K	CERAMIC	50V	10nF	C2032	TACCN0J105KT	CERAMIC	6.3V	1μF
C1154	ECJ2VF1C105Z	CERAMIC	16V	1μF	C2033	ECA1HM100GB	ELECT	50V	10μF
C1156	ECA1HM100GB	ELECT	50V	10μF	C2034	ECJ2VF1H103Z	CERAMIC	50V	10nF
C1157	TACCM0J335KT	CERAMIC	6.3V	3.3μF	C2035	ECJ2VF1H103Z	CERAMIC	50V	10nF
C1158	TACCM0J335KT	CERAMIC	6.3V	3.3μF	C2036	ECJ2VF1H103Z	CERAMIC	50V	10nF
C1159	EEVHB1C100R	CERAMIC	16V	10pF	C2037	TACCN0J105KT	CERAMIC	6.3V	1μF
C1160	EEVHB1C100R	CERAMIC	16V	10pF	C2038	ECA1HM100GB	ELECT	50V	10μF
C1161	EEVHB0G221P	CERAMIC	16V	220pF	C2039	ECA1HM101GB	ELECT	50V	100μF
C1162	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2040	ECJ2VF1C104Z	CERAMIC	16V	470nF
C1163	EEVHB0J101P	CERAMIC	10V	100pF	C2041	ECA1HM3R3GB	ELECT	50V	3.3μF
C1164	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2042	ECJ2VB1H102K	CERAMIC	50V	1nF
C1165	ECJ2VF1C105Z	CERAMIC	16V	1μF	C2043	ECJ2VB1H102K	CERAMIC	50V	1nF
C1166	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2044	ECJ2VB1H102K	CERAMIC	50V	1nF
C1167	EEVHB1C101P	CERAMIC	16V	100pF	C2045	ECJ2VB1H102K	CERAMIC	50V	1nF
C1168	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2047	ECJ2VF1H103Z	CERAMIC	50V	10nF
C1170	ECEA1EKN100B	ELECT	50V	10μF	C2222	ECEA1HKA100	ELECT	50V	10pF
C1251	ECA1HM101GB	ELECT	50V	100μF	C2223	ECEA1HKA100	ELECT	50V	10pF
C1252	ECA1HM100GB	ELECT	50V	10μF	C2224	ECEA1HKA100	ELECT	50V	10pF
C1253	ECJ2VB1C104K	CERAMIC	16V	100nF	C2225	ECEA1HKA100	ELECT	50V	10pF
C1254	ECJ2VB1C104K	CERAMIC	16V	100nF	C2226	ECEA1HKA100	ELECT	50V	10pF
C1255	ECA1HM100GB	ELECT	50V	10μF	C2227	ECEA1HKA100	ELECT	50V	10pF
C1290	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2301	ECA1VHG222E	ELECT	35V	2.2pF
C1292	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2302	ECQV1H684J	FILM	50V	680nF
C1293	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2303	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C1294	ECA1HM101GB	ELECT	50V	100μF	C2304	ECA1VM222GE	ELECT	35V	2200μF
C1295	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2305	ECJ2VB1H333K	CERAMIC	50V	33nF
C1296	ECA0JM471GB	ELECT	6.3V	470μF	C2306	ECJ2VB1H561K	CERAMIC	50V	560pF
C1405	ECJ2VF1C104Z	CERAMIC	16V	470nF	C2307	ECJ2VB1H471K	CERAMIC	50V	470pF
C1455	ECJ2VB1C104K	CERAMIC	16V	100nF	C2308	ECJ2VC1H270J	CERAMIC	50V	27pF
C1456	ECJ2VB1C104K	CERAMIC	16V	100nF	C2309	ECJ2VB1H471K	CERAMIC	50V	470pF
C1457	ECJ2VB1C104K	CERAMIC	16V	100nF	C2310	ECJ2VB1H331K	CERAMIC	50V	330nF
C1459	ECJ3VB1C474K	CERAMIC	16V	470nF	C2311	ECEA1HN3R3UB	ELECT	50V	3R3μF
C1474	ECJ2VB1C104K	CERAMIC	16V	100nF	C2312	ECJ3VB1H104K	CERAMIC	3.5KV	100nF
C1475	ECJ2VB1C104K	CERAMIC	16V	100nF	C2313	ECJ2VB1H103K	CERAMIC	50V	10nF
C1477	ECJ2VB1C104K	CERAMIC	16V	100nF	C2314	ECJ2VB1H331K	CERAMIC	50V	330nF
C1509	ECA1HM100GB	ELECT	50V	10μF	C2315	ECJ3VB1H104K	CERAMIC	3.5KV	100nF

Cct Ref	Parts Number	Description			
C2316	ECJ2VB1H471K	CERAMIC	50V	470pF	
C2317	ECA1HM4R7GB	ELECT	50V	4.7μF	
C2318	ECEA1HN3R3UB	ELECT	50V	3R3μF	
C2319	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2320	ECJ2VB1H681K	CERAMIC	50V	680pF	
C2321	ECA1CM471GB	ELECT	16V	470μF	
C2322	ECJ2VB1H471K	CERAMIC	50V	470pF	
C2323	ECQV1H684J	FILM	50V	680nF	
C2324	ECJ2VB1H103K	CERAMIC	50V	10nF	
C2325	ECA1HM4R7GB	ELECT	50V	4.7μF	
C2326	ECA1HM101GB	ELECT	50V	100μF	
C2327	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2328	ECA1HM101GB	ELECT	50V	100μF	
C2329	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2330	ECJ2VB1H561K	CERAMIC	50V	560pF	
C2331	ECJ3VB1H104K	CERAMIC	3.5KV	100nF	
C2332	ECJ2YB1H104K	CERAMIC	50V	100nF	
C2333	ECJ2VB1H333K	CERAMIC	50V	33nF	
C2334	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2335	ECJ2VC1H101J	CERAMIC	50V	100pF	
C2336	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2337	ECA1CM470GB	ELECT	16V	47μF	
C2338	ECEA1HU221	ELECT	50V	220μF	
C2339	ECEA1HU221	ELECT	50V	220μF	
C2340	ECA1HM101GB	ELECT	50V	100μF	
C2341	ECA1HM330B	ELECT	50V	33μF	
C2342	ECA1HM101GB	ELECT	50V	100μF	
C2343	ECA1HM100GB	ELECT	50V	10μF	
C2344	ECJ2VB1H472K	CERAMIC	50V	4.7nF	
C2345	ECJ2VB1H472K	CERAMIC	50V	4.7nF	
C2346	ECJ2VC1H101J	CERAMIC	50V	100pF	
C2347	EEUFC1H102E	CERAMIC	50V	1μF	
C2348	ECJ2VB1H681K	CERAMIC	50V	680pF	
C2350	ECJ2VB1H471K	CERAMIC	50V	470pF	
C2352	ECEA1HN2R2UB	ELECT	50V	2.2μF	
C2353	ECJ2VB1E563K	CERAMIC	25V	56nF	
C2357	ECQV1H154J	FILM	50V	150nF	
C2359	ECJ2VB1E563K	CERAMIC	25V	56nF	
C2360	ECUV1H223KBX	S.M. CAP	50V	22nF	
C2361	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2362	ECJ2VB1H332K	CERAMIC	50V	3.3nF	
C2363	ECQV1H684J	FILM	50V	680nF	
C2365	ECA1HM330B	ELECT	50V	33μF	
C2366	EEANA1E1R0B	CERAMIC	35V	0R1μF	
C2367	ECJ2VC1H561J	CERAMIC	50V	560pF	
C2368	ECJ3VB1H104K	CERAMIC	3.5KV	100nF	
C2369	ECJ2VB1H103K	CERAMIC	50V	10nF	
C2372	ECEA1CN100	ELECT	16V	10μF	
C2373	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2374	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2375	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2376	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C2377	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2378	ECA0JM222GB	ELECT	6.3V	2.2nF	
C2380	ECJ2VB1H472K	CERAMIC	50V	4.7nF	
C2383	ECJ2VC1H101J	CERAMIC	50V	100pF	
C2386	ECJ2VB1H681K	CERAMIC	50V	680pF	
C2387	ECJ3VB1H104K	CERAMIC	3.5KV	100nF	
C2388	ECJ2VB1E563K	CERAMIC	25V	56nF	
C2390	ECQV1H334JL3	FILM	50V	330nF	
C2391	ECJ2VB1E563K	CERAMIC	25V	56nF	
C2392	ECUV1H223KBX	S.M. CAP	50V	22nF	
C2393	ECJ2VB1H562K	CERAMIC	50V	5.6nF	
C2394	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2395	ECJ2VB1H332K	CERAMIC	50V	3.3nF	
C2396	ECA1HM2R2GB	ELECT	50V	2.2μF	

Cct Ref	Parts Number	Description			
C2397	EEANA1E1R0B	CERAMIC	35V	0R1μF	
C2398	ECA1CM102B	ELECT	16V	1000μF	
C2399	ECJ2VB1H103K	CERAMIC	50V	10nF	
C2400	ECA1VHG221B	ELECT	35V	220μF	
C2401	ECOS2GA101BB	ELECT	400V	100μF	
C2402	ECA1CM221GB	ELECT	16V	220μF	
C2403	ECKC3D471JB	CERAMIC	2KV	470pF	▲
C2404	ECA1CM221GB	ELECT	16V	220μF	
C2405	ECQB1H333J	FILM	50V	33nF	
C2406	ECQB1H683K	FILM	50V	68nF	
C2407	ECKC2H103J	CERAMIC	50V	10nF	▲
C2416	ECQV1H104J	FILM	50V	100nF	
C2417	ECKC2H471J	CERAMIC	500V	470pF	▲
C2418	ECKC2H471J	CERAMIC	500V	470pF	▲
C2419	EEUFC1E331B	CERAMIC	25V	330pF	
C2420	ECA1HHG102E	ELECT	50V	1nF	
C2421	ECA1VM102GE	ELECT	35V	1nF	
C2422	ECA1VM102GE	ELECT	35V	1nF	
C2423	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2424	ECEA1CN100	ELECT	16V	10μF	
C2425	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2426	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2427	ECQV1H474JZ	FILM	50V	470nF	
C2428	ECQV1H474JZ	FILM	50V	470nF	
C2429	ECQV1H474JZ	FILM	50V	470nF	
C2432	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C2433	ECA1CM471GB	ELECT	16V	470μF	
C2434	ECJ2VF1C104Z	CERAMIC	16V	470nF	
C2436	ECJ2YB1H473K	CERAMIC	50V	47nF	
C2437	ECJ2YB1H473K	CERAMIC	50V	47nF	
C2438	ECJ2YB1H473K	CERAMIC	50V	47nF	
C2444	ECJ2VB1H562K	CERAMIC	50V	5.6nF	
C2446	ECJ2VC1H561J	CERAMIC	50V	560pF	
C2447	ECJ2VB1H223K	CERAMIC	50V	22nF	
C2448	ECJ2VB1H562K	CERAMIC	50V	5.6nF	
C2449	ECJ2VC1H561J	CERAMIC	50V	560pF	
C2450	ECJ2VC1H561J	CERAMIC	50V	560pF	
C2452	ECA1HM330B	ELECT	50V	33μF	
C2453	ECA1HM330B	ELECT	50V	33μF	
C2454	ECA1HM330B	ELECT	50V	33μF	
C2456	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C2457	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C2458	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C2460	ECEA1HU101	ELECT	50V	100μF	
C2461	ECEA1HU101	ELECT	50V	100μF	
C2462	ECEA1HU101	ELECT	50V	100μF	
C2464	ECJ2VB1H223K	CERAMIC	50V	22nF	
C2465	ECJ2VB1H223K	CERAMIC	50V	22nF	
C2466	ECJ2VB1H223K	CERAMIC	50V	22nF	
C2471	ECA1HHG101B	ELECT	50V	100μF	
C2472	ECEA1HU101	ELECT	50V	100μF	
C2473	ECEA1HU101	ELECT	50V	100μF	
C2474	ECEA1HU101	ELECT	50V	100μF	
C2476	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C2477	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C2478	ECJ2VF1H103Z	CERAMIC	50V	10nF	
C2480	ECQV1H474JZ	FILM	50V	470nF	
C2481	ECQV1H474JZ	FILM	50V	470nF	
C2482	ECQV1H474JZ	FILM	50V	470nF	
C2483	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2485	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2486	ECJ2VB1H102K	CERAMIC	50V	1nF	
C2487	ECJ2VF1H104Z	CERAMIC	50V	100nF	
C2488	ECA1VM471GB	ELECT	35V	470μF	
C2489	ECEA1HU221	ELECT	50V	220μF	
C2490	ECJ2VB1H823K	CERAMIC	50V	82nF	