



PHASEONE User Guide: Phase One 645DF+ Camera and IQ2 Series Digital Back

PHASE**ONE**



2

PHASE**ONE**

3

| | | | | | | | | | |
|------|--|-----|---|-----|---|-----|------|------------------------------|-----|
| 9.10 | Self-Timer Mode | 115 | Image Orientation | 143 | ISO Settings | 157 | 21.5 | Grid | 172 |
| 9.11 | Interval Photography | 116 | Mirror Up | 144 | Auto Exposure | 157 | 21.6 | Auto Stop and Start | 172 |
| 9.12 | Depth of Field | 117 | Viewfinder Masking | 144 | Viewfinder Information | 158 | 21.7 | Accessories | 173 |
| 9.13 | Infrared Photography | 118 | 15.0 IQ2 Back for Mamiya RZ67 | 145 | Double Exposure Protection | 158 | 21.8 | Live View Camera Support | 174 |
| 9.14 | Custom Function | 119 | 15.1 Mounting IQ2 Back on the Mamiya RZ67 | 145 | Image Orientation | 158 | | View Cameras | 174 |
| 9.15 | Types of Custom Functions | 120 | 15.2 Viewfinder Masking | 146 | Flash Lead Connection | 159 | | Phase One 645AF/645DF/645DF+ | 174 |
| 9.16 | Custom Dial Modes C1, C2 or C3 | 124 | 15.3 More Details: Mamiya RZ67 | 147 | 17.4 Cables Shipped with IQ back for Hasselblad H | 159 | | Hasselblad H1/ H2 | 174 |
| 9.17 | Lenses and Multi Mount | 125 | Mode Selector | 147 | | | | Hasselblad V | 175 |
| 9.18 | Functions of the Phase One Lens | 125 | Shutter Latency Setting Mamiya RZ PRO II | 147 | 18.0 IQ2 Back for Contax 645 | 160 | | Mamiya RZ67 Pro II/Pro IID | 175 |
| 9.19 | Function of the Phase One Lens Adaptor | 125 | Studio Flash Sync on the RZ lens | 147 | 18.1 Mounting the IQ Back on a Contax 645 | 160 | | Contax 645 | 175 |
| 9.20 | List of Alternative Lenses | 126 | Mirror Up | 147 | 18.2 Viewfinder Masking | 161 | | Notices | 176 |
| | | | Double Exposure | 147 | 18.3 More Details: Contax 645 | 162 | | FCC Regulations | 177 |
| 10.0 | Maintenance | 127 | | | Exposure Modes | 162 | | | |
| 10.1 | Changing the Focusing Screen | 127 | 16.0 IQ2 Back for Hasselblad V Series | 148 | ISO Settings | 162 | | | |
| 10.2 | Battery Socket | 128 | 16.1 Mounting the IQ2 Back on a Hasselblad V Series | 148 | Double Exposure Protection | 162 | | | |
| 10.3 | Tripod/Electronic Shutter Release Contact | 128 | 16.2 Mounting a Viewfinder Mask on a Hasselblad V Series Camera | 149 | TTL flash | 163 | | | |
| 10.4 | Camera Display Error-Notification | 129 | 16.3 More Details: Hasselblad V Series | 150 | Image Orientation | 163 | | | |
| 10.5 | Lens Maintenance | 130 | Sync Cable | 150 | 18.4 Flash Lead Connection | 163 | | | |
| 10.6 | Back Maintenance | 130 | Flash Lead Connection | 150 | 18.5 Cables Shipped with IQ back for the Contax 645 | 164 | | | |
| 10.7 | IR Filter on the CCD | 130 | Mirror Up and Shutter Latency Setting | 150 | | | | | |
| 10.8 | 645DF+ Camera Body Specifications | 131 | Tethered Capture | 150 | 19.0 IQ2 Back for View Cameras | 165 | | | |
| 10.9 | Phase One 645DF+ Housing Specification | 132 | 16.4 Hasselblad 555 ELD | 151 | Phase One Sleeping Architecture | 165 | | | |
| 11.0 | Software | 133 | Shutter Latency Setting | 151 | 19.1 Using the 2-shot Release | 166 | | | |
| 11.1 | To Import Images... | 133 | Motor Cable on Hasselblad 555 ELD | 151 | 19.2 Using the 1-shot Release | 166 | | | |
| 12.0 | Main Accessories | 134 | 16.5 Hasselblad 553 ELX | 152 | 19.3 Phase One FlexAdaptor | 167 | | | |
| 13.0 | End User Support Policy | 138 | Cable Connections | 152 | 19.4 Shutter Latency Settings for the FlexAdaptor and Other | | | | |
| 13.1 | Web Resources | 139 | Shutter Latency Setting | 152 | Technical Camera Adaptors | 167 | | | |
| 14.0 | Appendix: Open Platform | 141 | 16.6 Hasselblad 501 CM and 503 CW without Winder | 153 | 20.0 List of Focusing Screens and Viewfinder Masks | 168 | | | |
| | Double Exposure Protection | 141 | Shutter Latency Setting | 153 | 20.1 Full Frame Focusing Screens or with Engraved Masking | 168 | | | |
| 14.1 | IQ2 Back and Phase One 645AF/DF/DF+ and Mamiya 645 AFD | 142 | 16.7 Hasselblad 503 CW with Winder CW | 153 | 20.2 Viewfinder Masks | 168 | | | |
| 14.2 | Mounting IQ2 back on the Phase One 645 AF & | 142 | 16.8 Cables shipped with IQ2 back for Hasselblad V | 154 | | | | | |
| | Mamiya 645 AFD Series | 142 | 17.0 IQ2 Back for Hasselblad H Series | 155 | 21.0 Live View | 169 | | | |
| 14.3 | More Details: Phase One and Mamiya 645 Series Cameras | 143 | 17.1 Mounting the IQ Back on a Hasselblad H Series | 155 | 21.1 Starting Live View | 170 | | | |
| | Power Management and Shutter Latency | 143 | 17.2 Viewfinder Masking | 156 | 21.2 White Balance | 171 | | | |
| | Studio Flash Sync on the Camera Body | 143 | 17.3 More Details: Hasselblad H Series | 157 | 21.3 Quality and Brightness | 171 | | | |
| | | | Camera Display | 157 | 21.4 Zoom | 172 | | | |



1.0 Introduction

Thank you for choosing the Phase One 645DF+ camera and the IQ2 Series digital back solution.

The Phase One 645DF+ and IQ2 Series digital is the most powerful digital camera solution whether you are working on location or tethered in a studio.

The Phase One IQ280, IQ260, IQ260 Achromatic and IQ250 digital camera backs feature maximum resolutions of 80, 60 and 50 high-quality megapixels respectively. This series sets new standards for medium format camera system handling and performance.

The Phase One IQ2 Series system gives you the absolute best solution when it comes to image quality and workflow. Capture One has been optimized for shooting with Phase One IQ digital backs, and is available for both Mac OS X and Windows operating systems.

Together with the IQ series backs this professional RAW converter and image editing software will deliver the World's highest image quality with excellent color and detail. The software comprises all the tools required to capture, organize, edit, share and print images for an efficient workflow.

The Phase One 645DF+ camera delivers incredible versatility with support for what is arguably the widest array of focal plane and leaf shutter lenses on the market. Phase One is committed not only to provide the best digital solution for the professional photographer, but also to ensure the photographer's freedom of choice regarding lenses, bodies, back, software and accessories. The entire system comes ready to use in its own customized weatherproof camera case.

At Phase One we are always committed to providing you with the best solution for the professional photographer. This Users Guide covers the specific Phase One 645DF+ and IQ2 Series features and functionality.

We sincerely hope you will enjoy working with this innovative camera platform and IQ2 Series digital back.

1.1 Warranty

Please read the enclosed warranty certificate. Should any problem occur, please contact your local dealer (place of purchase) to facilitate a repair. DO NOT try to repair the camera yourself. An unauthorized attempt to repair the camera will terminate the warranty.

1.2 Installation and Activation of Software

An Internet connection is needed to install Capture One.

Install on Mac:

Capture One software includes an easy-to-use installer that will install all the software necessary to run the application on Mac OS X 10.5.8 or later.

To install the software follow the procedure below:

1. Either load the Capture One DVD, or download the application from the Phase One website: www.phaseone.com.
2. Open the Capture One disk image.
3. Read and accept the license agreement presented.
4. Drag the Capture One icon to the Applications folder.
5. Open Capture One from your Applications folder.




Install on Windows:

Capture One includes an easy-to-use installer that will install all the software you need to run the application on a Windows based computer.

To install the software follow the procedure below:

1. Either load the Capture One DVD, or download the application from the Phase One website: www.phaseone.com.
2. Run the executable software install file.
3. Read and accept the license agreement presented.
4. Follow the on-screen instructions to complete the installation.

N.B. Capture One will initiate installation of Microsoft® .NET Framework 3.0 if you don't already have it installed on your computer.

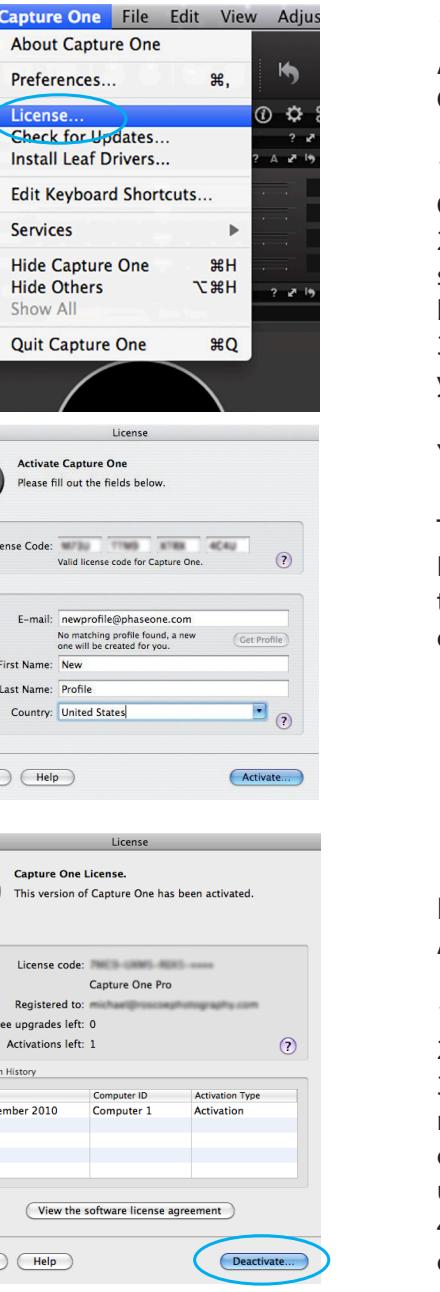

1.3 Activation

An Internet connection is needed to activate and update Capture One.

1. Open the license activation dialogue box via the menu Capture One>License.
2. Enter your License code and personal details in the required fields. (You should have received an email with your Capture One license code or it will be in the original software packaging that you purchased).
3. Once you have entered the information press the 'Activate' button and your software will be validated by Phase One's activation server.

Your software is now activated and ready for use.

Troubleshooting

If you are experiencing problems activating the software, follow the instructions provided in the application, read the software manual enclosed or visit our website for inspiration and troubleshooting:

<http://www.phaseone.com/support>

1.4 Screen Calibration

Having a properly calibrated monitor is a critical factor when viewing images. Ensure that digital viewing conditions are as accurate as possible. A quality monitor and calibration tool should help guarantee that displayed images on a screen are precisely rendered. Once a monitor has been calibrated, the color and brightness controls should be locked to prevent inadvertent changes.

Hardware-based monitor calibrators are now available at reasonable prices. The process is simple, quick and enables images to be viewed with confidence. Many higher level monitors have internal calibrating software that works with professional calibration devices for ultimate accuracy.



2.0 The 645DF+ Camera and IQ2 Digital Back System

The Phase One Camera system is created to provide as much flexibility and openness as possible. For years Phase One has offered two different digital back or camera kit options; the Classic and Value Added kit.

2.1 Unpacking the 645DF+ and IQ2 Digital Back System

The Classic kit is supplied in a protective foam-filled box, however the Value Added kit is delivered in a hard-case created for the travelling photographer. The dimensions of this waterproof and impact resistant roller case are compatible with most airlines carry-on luggage requirements.

Classic Kit:

- Phase One 645DF+ body
- IQ Digital Back
- Schneider Kreuznach 80mm LS f2.8 Lens
- Capture One software
- 1 Year warranty

Accessories

- Digital back battery
- Dual DB battery charger
- Phase One 645DF+ rechargeable Li-Ion battery
- Phase One 645DF+ rechargeable Li-Ion battery charger
- 4.5m FireWire 800 cable
- 3m USB3.0 cable
- Body and lens caps
- Camera neck strap
- Sensor cleaning kit
- Lens cloth



2.2 Value Added Kit:

The waterproof roller case will hold:

- Phase One 645DF+ body
- IQ2 Digital Back
- Schneider Kreuznach 80mm LS f2.8 Lens
- Capture One Pro software
- 5 year Value Added warranty on IQ digital backs

Accessories

- Waterproof roller hard case with room for 17" laptop
- Multimount adapter for HB V-lenses
- 2 lens wrappings
- 2 digital back batteries
- Dual DB battery charger
- 2 Phase One 645DF+ rechargeable Li-Ion batteries
- Phase One 645DF+ rechargeable Li-Ion battery charger
- DB Multi connector cable
- LCC calibration kit and 10x10cm plate
- CF card
- CF card reader
- 4.5m FireWire 800 cable
- 3m USB3.0 cable
- Grey card
- Sensor cleaning kit and lens cloth
- Body and lens caps
- Camera neck strap

The interior of the roller supplied with the Value Added kit can be customized and configured into a bespoke system case. An extra set of dividers are provided inside the lid of the case, which can be used to divide the compartments into smaller or different sections to make an ideal storage solution for a camera and lenses.


| Classic Kit | Value Added Kit |
|---|--|
| IQ2 Series digital back | IQ2 Series digital back |
| | Waterproof roller case (with room for laptop up to 17-inch) |
| | Two lens wraps |
| 1 year warranty on IQ digital back, body and lens | 5 year warranty on IQ digital backs |
| Dual Battery Charger | Dual Battery Charger |
| 1 Battery | 2 Batteries |
| Focusing screen or Viewfinder Masks depending on camera model | Focusing screen or Viewfinder Masks depending on camera model |
| 4.5m FireWire 800 cable | 4.5m FireWire 800 cable |
| 3m USB3.0 cable | 3m USB3.0 cable |
| | Multi-connector>minijack adapter cable |
| | Multi-connector sync cable |
| | CF card |
| | CF card reader |
| Capture One DB software | Capture One PRO software |
| Sensor cleaning kit | Sensor cleaning kit |
| Lens cloth | Lens cloth |
| | LCC Calibration kit |
| | Grey card |
| | Lens cast calibration plate |
| | Extra 645DF+ camera battery cassette for AA batteries |
| 645DF+ camera body | 645DF+ camera body |
| Schneider 80mm LS f2.8 lens | Schneider 80mm LS f2.8 lens |
| | Hasselblad V-mount lens adapter |
| | 1 year or 100,000 shutter releases on Schneider Kreuznach lenses |
| | 3 year warranty on Phase One AF/MF lenses |
| | Free digital back loan unit during repair |

2.3 Classic vs. Value Added Kit

All the elements of the Value Added kit are available to buy as separate spare parts. Please consult your local dealer about the different Phase One or third party solutions if extra equipment is needed.

Securing the operational time of a camera and digital back solution is a critical concern for professional photographers. To be as safe as possible, consult your dealer to get information on the best solution. Most uptime solutions provided by Phase One can be purchased after acquiring the back or camera.

The 645DF+ camera and SK LS lenses have a warranty of 1 year or 100,000 shutter actuations, whichever comes first. Phase One AF/MF lenses have a warranty of 1 year if purchased as part of the Classic kit or 3 years with the Value Added kit option. Please refer to the Warranty Brochure, which is shipped with the Camera System.

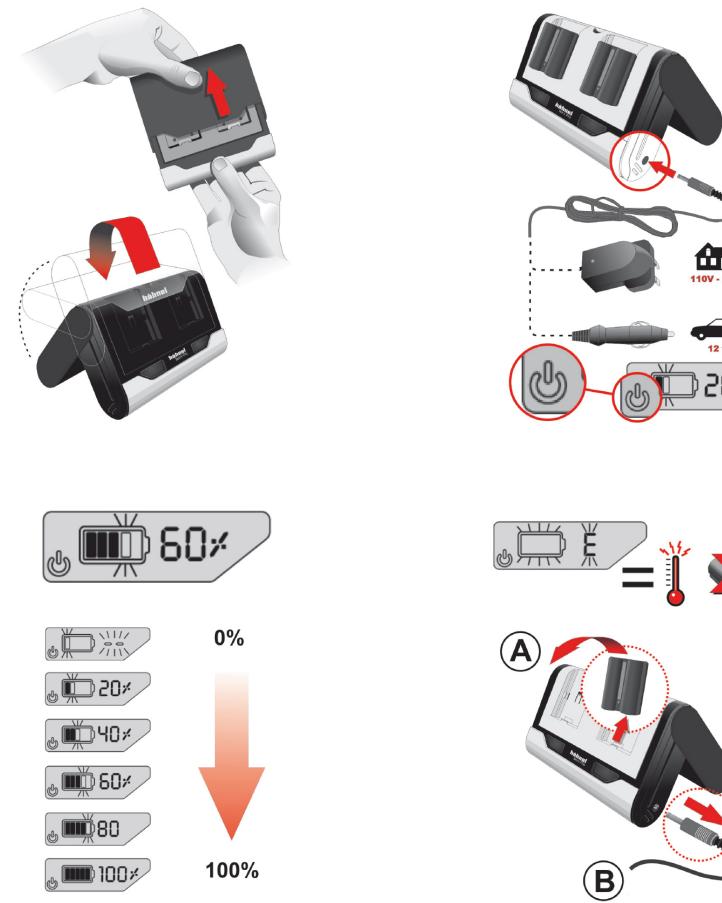

Warning!

- Only use the Charger to charge the specified batteries
- Do not allow charger to get wet or get exposed to moisture
- Keep the Charger out of reach of children
- Once charging is completed, unplug the charger from power source
- Only use the original mains adaptor 12V DC or car lead
- Never apply excessive force when connecting or disconnecting a battery or contact plate.
- Keep all contacts clean.
- Do not force down any of the contacts.
- Do not short-circuit the contacts.
- Never store the battery connected to the charger for an extensive period of time.
- Do not expose to excessive heat or naked flame.
- Do not dismantle or carry out any alteration to the product
- Do not attempt to eat or swallow the battery

2.4 Charging the Batteries for the IQ2 Digital Back

Charge the batteries as soon as the camera system has been unpacked.

The Value Added roller case is delivered with two 7.2 volt Lithium-Ion batteries and a duo-charger.

Although only one battery can be used in the IQ back at a time, it is recommended to charge both batteries fully before you start.

Always keep a battery in the IQ back even when shooting tethered to a computer via a FireWire or USB connection. (Go to page 84 for more details about charging the battery while tethered to a computer).

The battery charger can adapt to voltages within a range of 110 to 250 volts.

It comes with an international set of power adaptors (located in the suitcase utility compartment). Please select the appropriate one that fits your outlet and slide it in from the top to mount it in place securely.




Connect the unit to the outlet and charge the batteries (approximately 2.5 to 3 hours).

After the first initial charge, the batteries can be charged one at a time.

Purchasing Extra Batteries

The Phase One IQ back comes with two batteries. Phase One recommends the Canon BP 915 (with more than 2500 mAh) if you need to purchase extra batteries.

Some third party batteries may not fit into the digital back's battery compartment due to differences in the tolerances. Do not try to force a battery into the compartment. When pressing the battery release button it should slide in without being hindered.

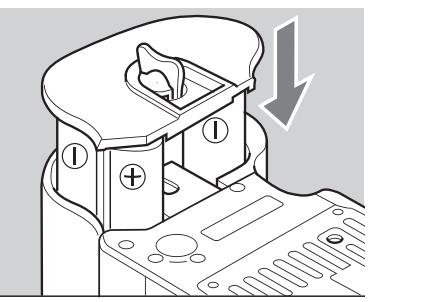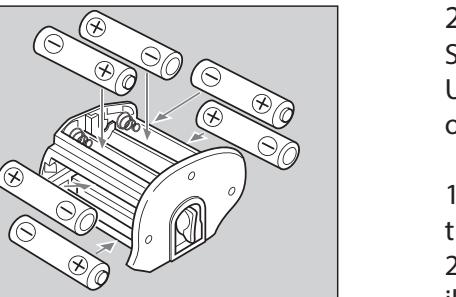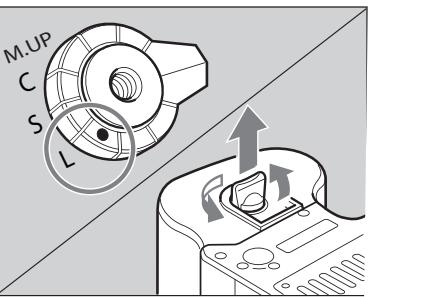

The batteries are sufficiently charged.



There is little power remaining. Have new batteries on hand. Camera will still operate.



There is very little power remaining. Camera will not operate. Set the shutter release mode selector lever to "L" (to turn the power off) and replace the batteries with new ones.



When the batteries are emptied for power, "batt" flashes on the main LCD and the viewfinder's LCD when the shutter release button is pressed.

2.5 Camera Batteries

Set the shutter release mode selector lever to L (to turn the power off). Use six AA alkaline or rechargeable batteries. NiCd or NiMH batteries should only be used in the camera body if CF04 is set on rechargeable.

1. Lift the battery case lock lever, turn it counter clockwise and pull out the battery holder.
2. Insert fresh AA batteries with the + and - ends as shown in the illustration.
3. Return the battery holder to its case and lock it by turning the lever clockwise. Make sure it is firmly attached.
N.B. Ensure that the batteries are placed with proper polarity.


Rechargeable Li-ion Battery

The Phase One Rechargeable Li-Ion battery Kit for 645DF+ is included with the Phase One 645DF+ camera body as standard. (Part #70513)

Please go to page 112 for more information about setting battery type in custom function 4.

The Value Added kit includes 2 batteries + 1 charger. The Classic kit includes 1 battery + 1 charger.

N.B. The rechargeable Li-ion battery can be used instead of AA batteries with the Phase One 645DF. The uptime of one fully charged Li-ion battery is up to 3 times longer than using standard Alkaline batteries.

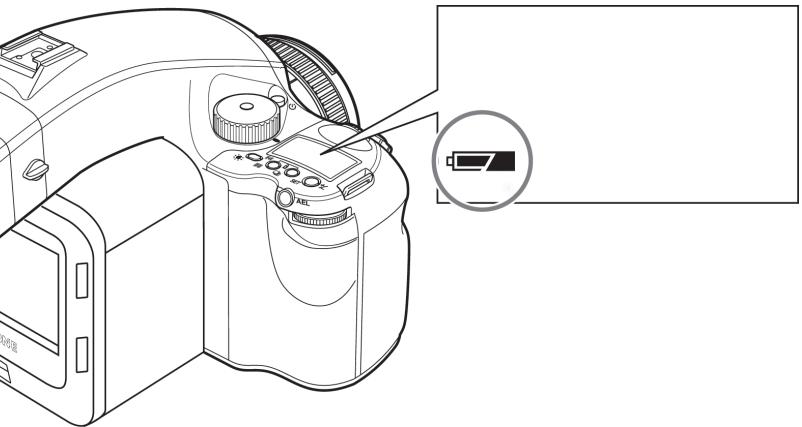

2.6 Sleep Mode

The camera's power is switched on when the shutter release mode selector is set to S, C or M.UP. In order to prevent the camera's batteries from discharging, sleep mode is automatically entered if no operations are performed for a specific period of time while the power is ON (with exposure metering status maintained).

In sleep mode, operating the shutter button or a function setting button restores power ON status.

In sleep mode, the external LCD screens are not active, only the marks shown in the figure are displayed. (These marks appear in program AE mode.)

1. Battery life of the originally supplied batteries is dependent on storage conditions.
2. Blots and fingerprints on battery terminals may cause loose connection and corrosion. Wipe them off before loading the batteries.
3. It is advised to carry spare batteries in remote or foreign locations.
4. Battery performance decreases in low temperatures. Keep them warm when in cold climates or locations. External battery case PE401 is available as an optional accessory.






5. Store the batteries in a cool and dry place, away from direct sunlight.

6. Remove the batteries from the camera body when they will not be used for a long time.

7. Replace the batteries with new ones as soon as they are exhausted. Liquid leakage from the battery may damage the camera.

8. Read the warnings on the batteries for their handling.

NOTE:
For the purpose of the descriptions and explanations provided in these instructions, it is assumed that the camera's power is on.

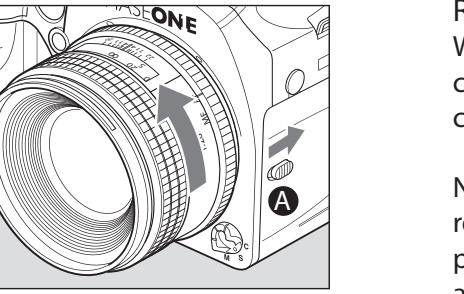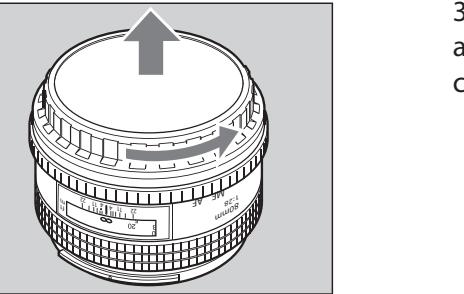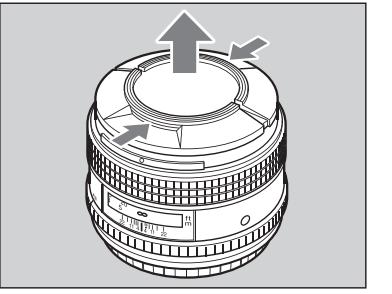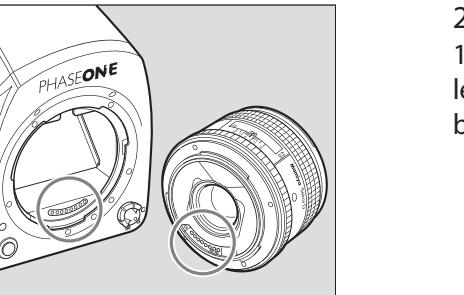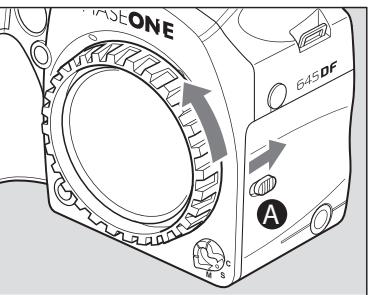

2.7 Attach and Remove a Lens

1. Remove the front body cap in the same way that you would remove a lens; push the lens release button [A] backward and then turn the front body cap or the lens itself counter clockwise and lift out.



2. Align the white alignment dot of the lens [B] (on the shiny flange) with the camera's white dot [C]. Mount the lens and rotate it clockwise until it clicks into place.

3. To remove the front lens cap, squeeze the shiny sections together and lift out. (See image far left). To remove rear lens cap turn it counterclockwise.

Remove a Lens

While sliding the lens release button[A] back, rotate the lens counter clockwise until it stops, and lift it off. After removing the lens from the camera body, protect both ends by attaching the caps.

N.B. Oil, dust, fingerprints or water on the electronic contacts could result in malfunction or corrosion. Wipe such impurities off with a clean piece of cloth. Do not tap the distance ring or other rotating parts when attaching the lens. When installing a lens, do not press the lens release button.

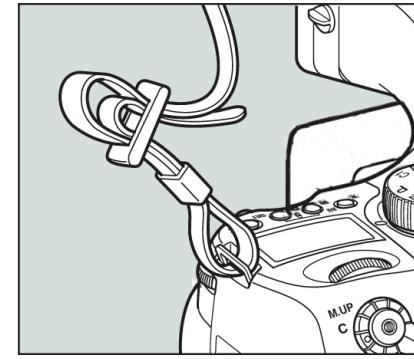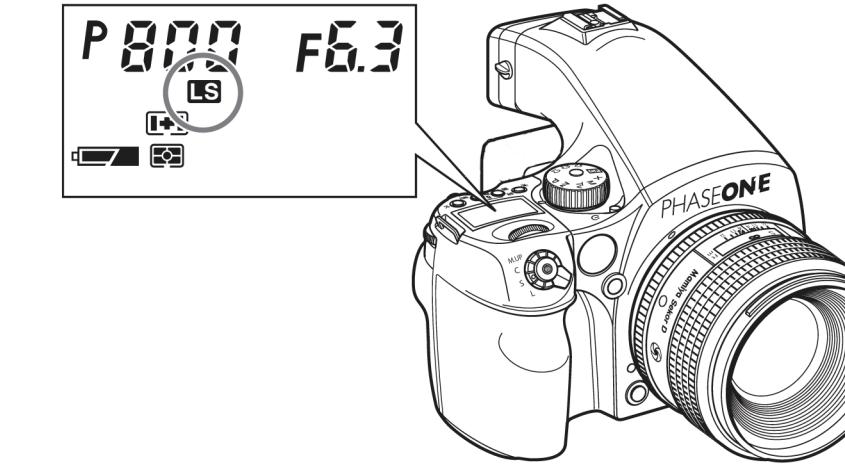

Attach a Leaf Shutter Lens

Leaf shutter lenses are equipped with an internal shutter. Leaf shutter lenses are capable of high shutter speeds up to 1/1600 on IQ Series backs with flash synchronization, which is particularly useful for fill-in flash photography in bright ambient shooting conditions.

When a leaf shutter lens is attached and the leafshutter is used and the letters LS will appear in the main LCD screen.

2.8 Adjusting the Strap

Put the neck strap through the mounts and secure it to the buckle as illustrated. After attaching the strap, pull it and ensure it does not loosen at the buckle.



NOTE:
When transporting the system, it is important to make sure that the mirror is locked up in the shipping position.

To ship the system, first detach the digital back, and then remove the battery from the camera body. Now replace the digital back.

The mirror will stay locked-up in the shipping position, until the battery is re-attached.

2.9 Attaching the IQ2 Back

The IQ back is fully integrated with the camera body and functions as a part of the whole camera system.

Ensure that the Phase One 645DF+ camera mirror is up and the shutter is open when no digital back is attached.





When attaching the IQ back to the camera body the shutter will close and the mirror comes back down.

First remove the cover on the IQ back and 645DF+ camera. Next, slide forward the lever [1] and push in button [2], and ensure that the bottom part of the IQ back is placed correctly in the lower locking mechanism on the back of the camera body before the upper locking mechanism is pressed together. Failure to do this can cause an error with the camera body where the shutter will continuously open and close. If this occurs, remove the IQ back. Make sure the camera body is powered and press button [2] while mounting the digital back.


Please be aware that the shutter should be in the correct starting position (shutter open). If this is not the case, attach and remove the IQ back again to make sure that the camera body gets in the correct starting position.

Remove the IQ back by sliding forward the lever [1], pushing in button [2], and by gently pulling away the top of the back first. Be careful with the contacts and protective glass on the back. Your IQ back should always be protected by its plate when it is not attached to the camera.


2.10 Names of Parts and Functions (Nomenclature)

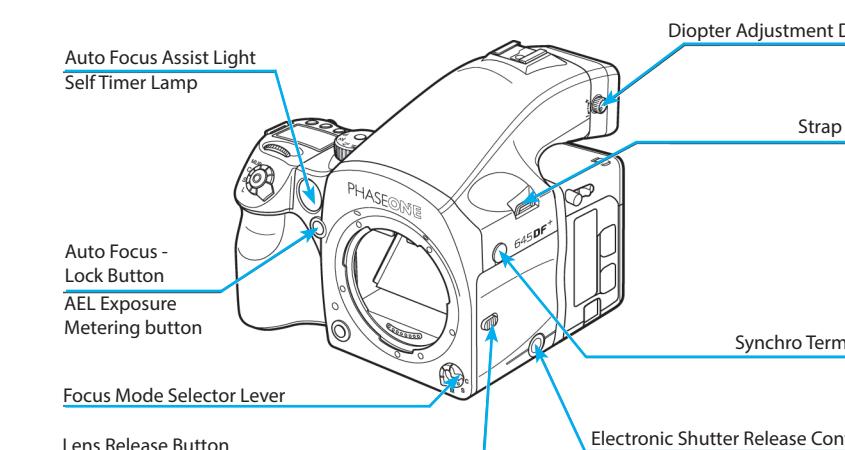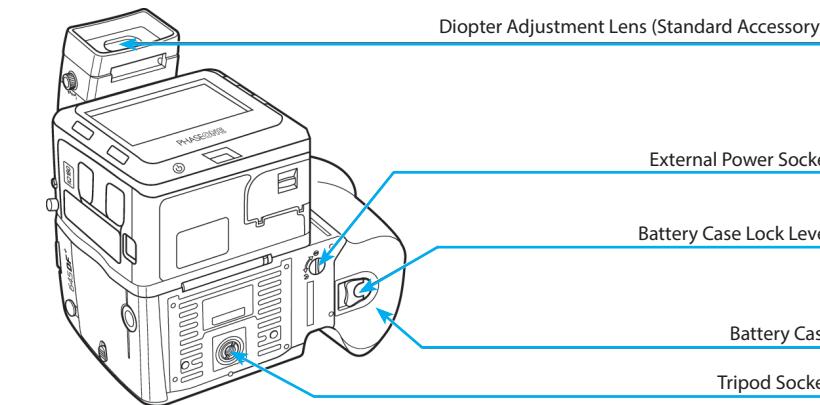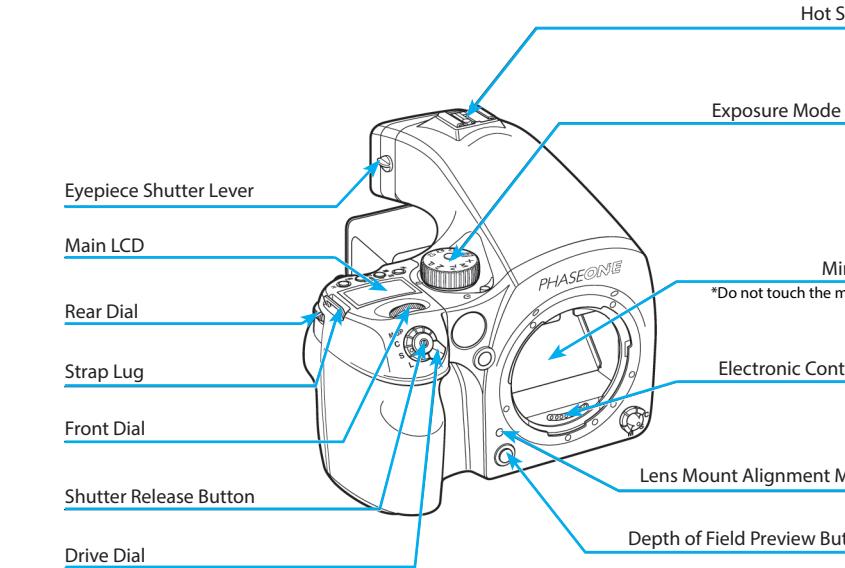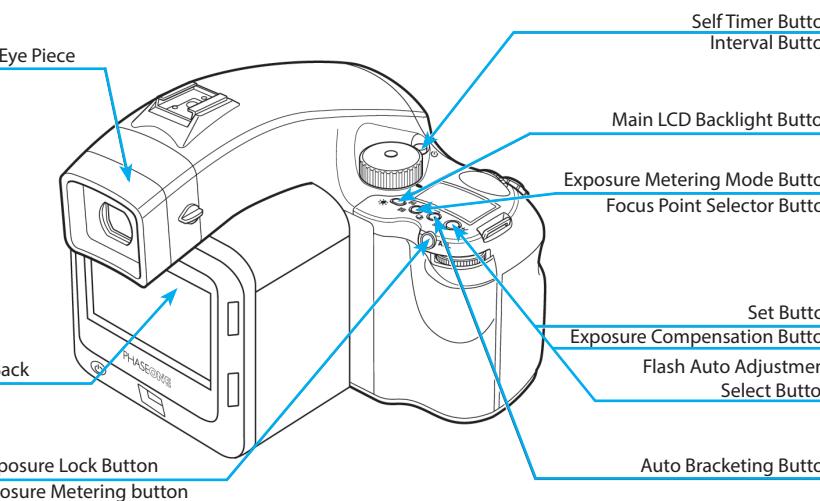

Main LCD

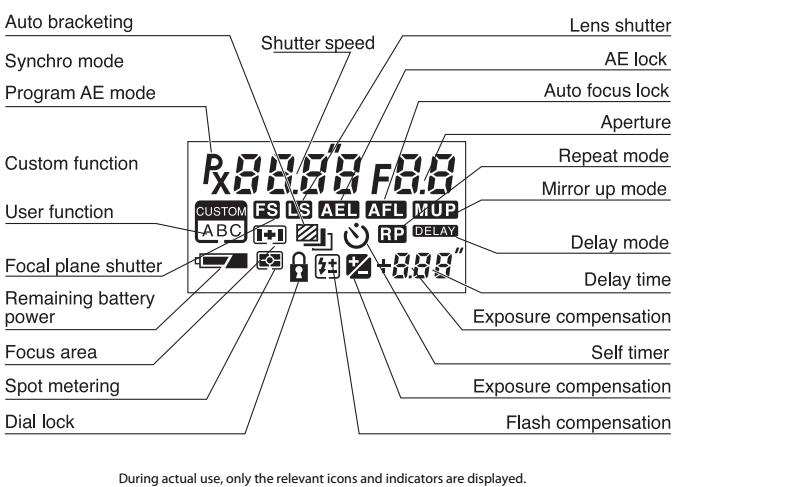

Viewfinder LCD

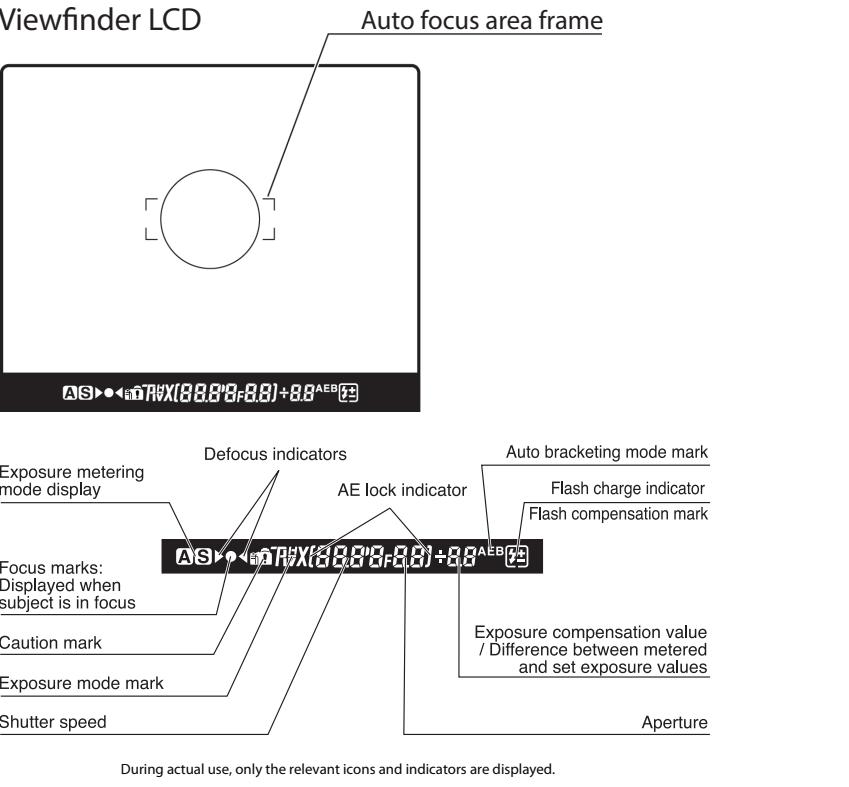

2.11 The Displays

The display on the camera body will provide you with a lot of valuable information. This includes many features and settings including, but not limited to shutter speed, aperture value, exposure program, exposure compensations and metering modes.

Liquid Crystal Display

Due to the limitations of the space and letters, words and letters on the LCD are abbreviated.

Display examples of the main LCD

| | |
|--------|----------------|
| On | → ON |
| Off | → OFF |
| Error | → Error |
| + | → + (Plus) |
| Under | → Under |
| Over | → Over |
| Normal | → Normal |
| Lock | → Lock |
| SET | → Self Timer |
| bulb | → bulb |
| busy | → Busy |
| db | → Digital Back |
| LS | → Lens Shutter |
| CAP | → Capture |
| rP | → Repeat |
| ET/RE | → Time |

Display examples in the custom function mode

| | |
|-------|----------------------|
| SEL | → Selection |
| STEP | → Step |
| Iris | → Iris |
| HOLD | → Hold |
| batt | → battery |
| Sh.no | → Shot No. |
| dF | → Dial function |
| d.AC | → Dial action |
| d.dir | → Dial direction |
| REFL | → AE, AF lock |
| HREFL | → Half press |
| REL | → AE lock |
| RFL | → AF lock |
| OneEP | → One-push exposure |
| RF_L | → AF assist light |
| FLSY | → Flash sync |
| bu | → Buzzer |
| Sh.P | → Shutter in Program |
| Sh | → Shutter in Manual |
| RF_P | → AF Priority |
| RF_F | → AF Fine Tune |

2.12 Displays, Abbreviations and Electronic Dial Operation

Electronic Dial Operation

| | Position | Front dial | Rear dial |
|-------------------------------------|-----------|---|---|
| Exposure mode | P | Program shift (PH↔P↔PL) | |
| | Av | Aperture adjustment | |
| | Tv | Shutter speed adjustment | |
| | M | Shutter speed adjustment | Aperture adjustment |
| | X | Aperture adjustment | Shutter speed adjustment 1/125 to 1/60. |
| Auto-bracketing button | displayed | Turn the auto bracket ON/OFF | The multi-turn auto bracketing repeat setting |
| Flash auto adjustment select button | displayed | Flash metering compensation (when using Metz flash and SCA3952 adaptor) | |

Back Display



The touch screen on the back of the IQ digital back is a multifunctional display, where the menus change depending on the status and choices you make.

In addition to providing menu navigation, the display on the back can work as a preview screen.



2.13 The Buttons on the Back

The IQ is equipped with four external buttons. The buttons will change function to match the menu shown on the screen. Find out more on the IQ menus from page 78.

2.14 LED Lights


IQ Series digital backs feature two main LEDs located below the bottom left corner of the screen.

Green: When capturing an image the green LED will blink rapidly to indicate that the IQ back is busy.

A continuous green light indicates that the backlight of the display is dimmed but the camera is still ready to shoot. (The Display Off Time can be set in the IQ back's Menu mode in the Power Management options).

Red: A red LED indicates that the IQ back is writing to the storage media, and therefore the buffer has not been emptied.

There is an additional red LED indicator located next to the CF card slot (under the cover). It is assigned to indicate CF card activity only. Do not remove a CF card from the card slot when this red LED is on. Removing a CF card whilst the red LED is on can damage the formatting of the card, and images or data might be lost or corrupted.

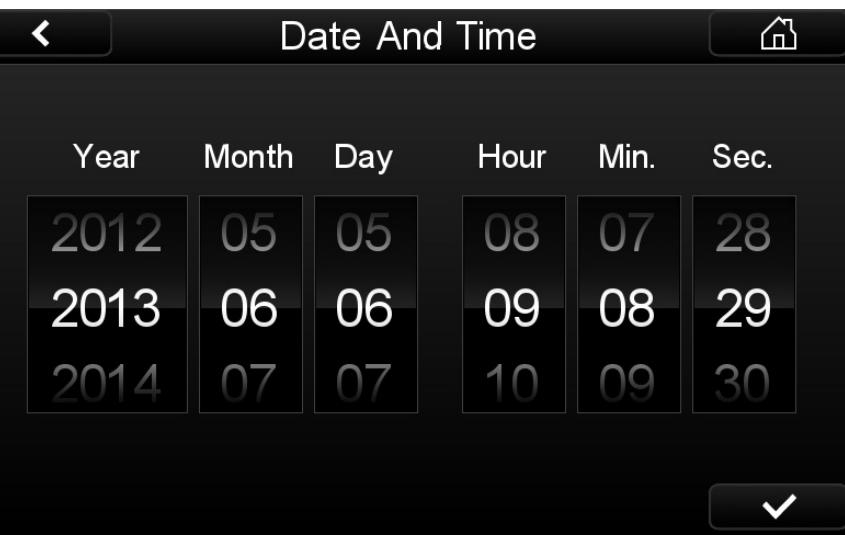


2.15 Setting Date And Time

Date and time parameters are set and controlled via the IQ back's Menu system.



If the IQ back has been without power for a long period of time, it will automatically ask you to set the time and date on the next occasion it is powered up.

Tap the screen and scroll through the numbers to attain the appropriate date and time. Tap the check mark, which will appear in the bottom right hand corner of the screen to confirm your entry.

The time and date is applied to the EXIF data in all files captured with the IQ back.

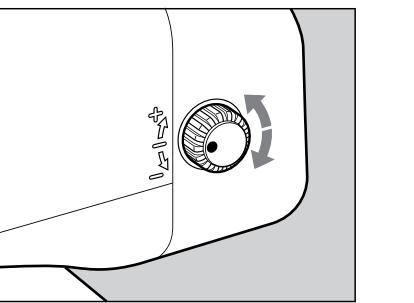

| Diopter correction lens | Range of Adjustment |
|---------------------------|---------------------|
| DE401 (standard) | -2,5 to +2,5 |
| DE402 (farsighted users) | -5,0 to -2,0 |
| DE403 (nearsighted users) | 0 to +3,0 |

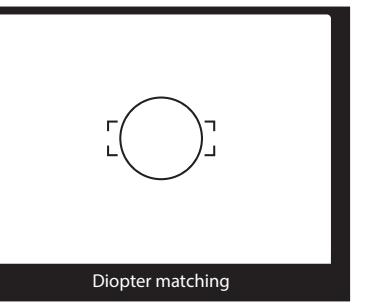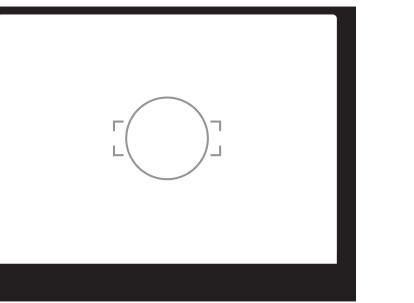

Diopter matching

2.16 Setting Diopter





Look through the viewfinder and make sure that the focus frame (Rectangle with Circle) is in sharp focus. If it is not, turn the diopter adjustment dial in the “-” direction if you are nearsighted or in the “+” direction if you are farsighted. If this is not sufficient you may require an optional diopter correction lens. Check the table for possible diopters.

Point the camera at a bright, plain object such as a white wall when making this adjustment.

NOTE:
If there is dirt or dust on the lens surface, remove it with a blower or sweep it off gently with a lens brush.

If there are fingerprints or dirt on the lens surface, wipe them off with a piece of clean, soft gauze.

Using solvents could discolor the correction lens frame.

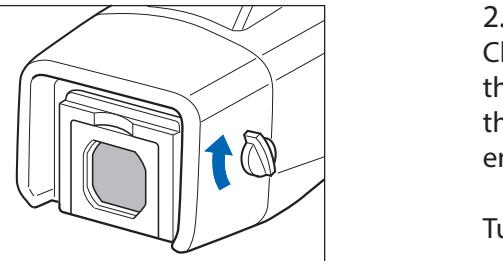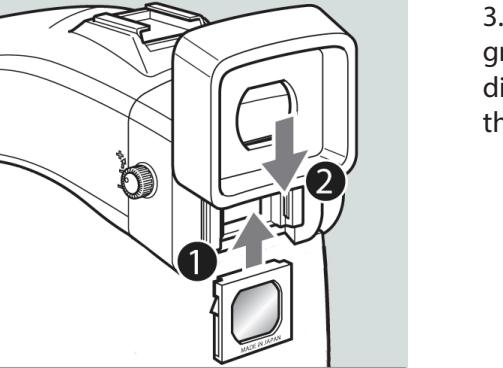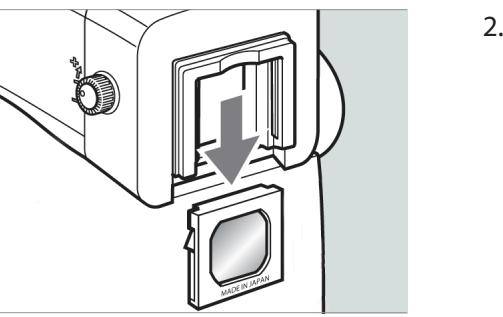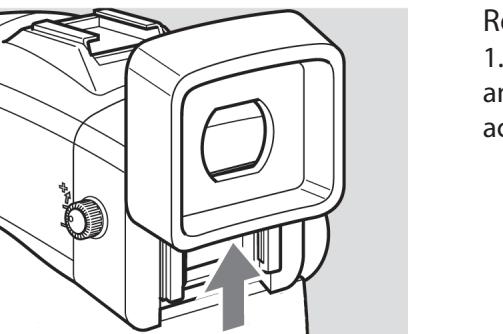

Replacing the Diopter Correction Lens

1. Press the Eyepiece Lock, which is located in a gap between the Eyepiece and the Diopter Correction lens. (Turn the camera upside down to gain easy access to it). Now remove the rubber Eyepiece by sliding it upwards

2. Remove the lens supplied with the finder by pulling it downward.

3. Remove the existing diopter by sliding downwards using the fingernail groove and detach. Insert a new diopter by aligning it to the base of the diopter holder and sliding it upwards into place. Finish by reattaching the rubber eyecup.

2.17 Eyepiece Shutter

Close the eyepiece shutter when there is a strong light source behind the camera or when pressing the shutter release button without looking through the viewfinder. (This prevents exposure error due to light entering from the viewfinder.)

Turn the eyepiece shutter lever in the direction of the arrow.





3.0 Basic Functions

ISO and White Balance

The IQ back's Home Screen enables quick access to the ISO and WB settings by either pressing the adjacent buttons or by tapping the screen directly. Scroll up and down, then select the setting by tapping the screen next to the desired rating so that a green check mark appears. White Balance and ISO settings can also be controlled from Capture One if you are working tethered.

3.1 Setting ISO

The default ISO setting is 50 for all IQ Series models. Remember that the higher the ISO setting, the higher the degree of image noise. The camera system together with Capture One software deliver a powerful noise reduction performance although it is possible to still see some noise at the higher sensitivity settings.

Push the upper right button or tap ISO on the screen on the IQ back's Home Screen. You will be presented with the back's ISO spectrum. Scroll up and down and tap the screen to select the desired setting. A green check mark will appear next to your chosen setting.




Find out more on ISO operation on page 61.

3.2 Setting White Balance

The default ISO setting is Auto that will calculate a White Balance based on the information in the image. Auto WB is appropriate for most applications.

Push the lower right button or tap WB on the Home Screen. You will be presented with the back's White Balance settings. Scroll up and down and tap the screen to select the desired setting. A green check mark will appear next to your chosen setting and you will automatically return to the Home Screen.

Find out more on White Balance operation on page 62.

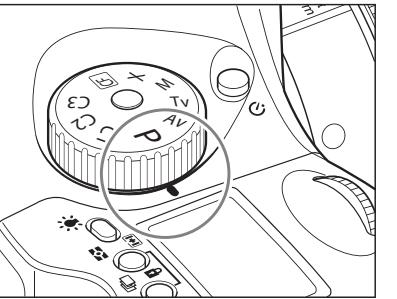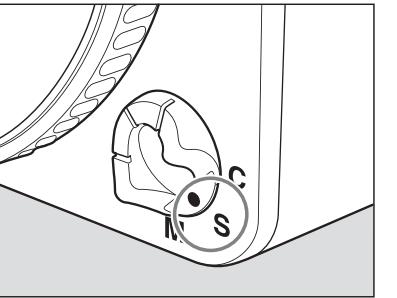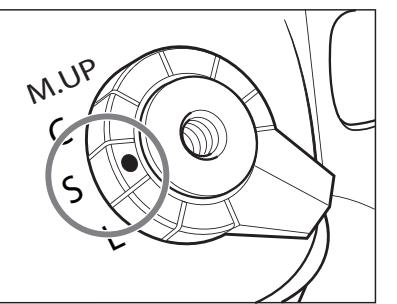

3.3 Getting started: Setting the Shutter Release, Focus, Exposure and Metering modes

- Set the Shutter Release mode selector lever to S (single-frame advance mode).

There are two shutter release (drive) modes: S (single frame advance mode) and C (continuous advance mode). When set to L the power is turned off.

- Set the Focus mode selector lever to S (Single focus mode).

There are three Focus modes: S (single focus mode), C (Continuous focus mode) and M (Manual focus mode). See page 33 for more information.

| Focus Mode | | Focusing |
|------------|-----------------------|--|
| S | Single focus mode | Half-press the shutter release button to focus. When the focus mark lights, the focus is fixed and the shutter can be released. |
| C | Continuous focus mode | The camera keeps focusing continuously while the shutter release button is half-pressed. The shutter can be released regardless of whether or not the focus mark is lit. |
| M | Manual focus mode | Focus manually. |

- Set the exposure mode dial to P (Program auto exposure).

There are four exposure modes:


P (Program Auto Exposure)

Av (Aperture Priority AE)

Tv (Shutter Priority AE)

M (Manual)

N.B. Av stands for Aperture Value but is referred to as Aperture Priority AE. Tv stands for Time Value but is referred to as Shutter Priority AE.

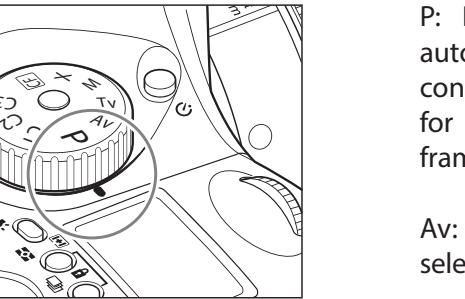

P: Program AE - The aperture and shutter speed are determined automatically for the optimum exposure, according to the ambient light conditions. This auto mode is best suited for general photography or for novice photographers, as it leaves the user free to concentrate on framing and capturing the subject.


Av: Aperture priority AE - Set the desired aperture and the camera selects the correct shutter speed. Use this mode to control depth of field.

Tv: Shutter priority AE - Set the desired shutter speed and the camera selects the correct aperture. Use this mode to stop motion.


M: Manual mode - Set this mode when you want to use special combinations of the aperture and shutter speed.

4. Exposure metering mode is automatically set to average/spot exposure metering before exposure metering is performed.

There are three exposure metering modes: In the A mode the average brightness in the entire frame is measured with emphasis on the center of the frame. The brightness at a specific spot in the center of the frame is metered in the S mode. The A-S mode automatically switches between these two modes depending on the contrasts in the picture.

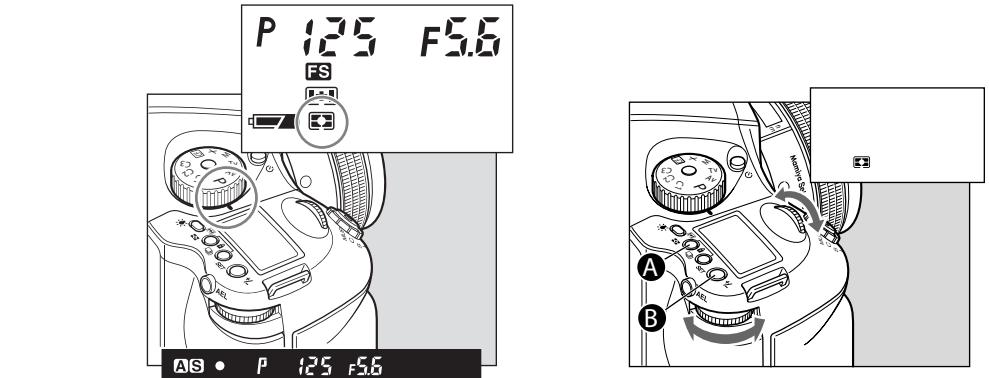

| | |
|--|---|
| Average/spot auto exposure metering | Exposure metering is performed after automatically selecting average/spot exposure metering. Depending on the subject conditions, center-weighted average/spot exposure metering is selected automatically, and the correct exposure is measured. |
| Center-weighted average/spot exposure metering | Spot exposure metering is automatically selected when the brightness of the spot exposure metering range becomes darker than the brightness of the entire screen. If there is very little difference between the spot exposure metering value and center-weighted average exposure metering value, the correct exposure level is obtained as the intermediate value. |
| Center spot exposure metering | The average brightness of the entire screen is measured, emphasizing the center of the screen. |

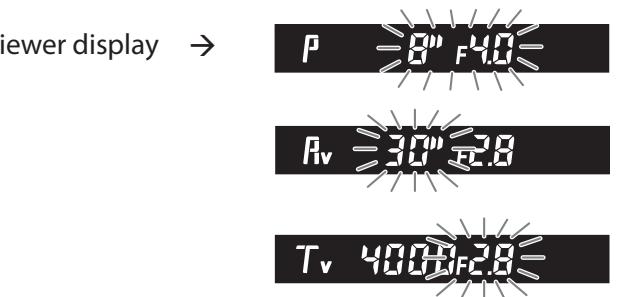

NOTE:
When a polarizing filter is used, ensure that a circular polarizing filter (C-PL) is used. The correct exposure cannot be obtained with a normal (linear) polarizing filter (PL).

3.4 Measuring Light – Exposure Metering

1. Press button [A] to adjust the exposure metering mode. There are three different exposure metering mode options that are displayed sequentially when either the front or rear dial is turned. Select an appropriate exposure mode. Your chosen exposure metering mode is displayed as an icon on the camera's LCD screen.

2. Press the SET button [B] or exposure metering mode button [A] to enter the setting.

Exposure Warnings

Users are warned when shooting subjects that are too bright or too dark with an inappropriate exposure setting. At such times, when the correct exposure cannot be obtained, users will be alerted by the numeric exposure display that will flash on the external LCD or on the display inside the viewfinder.


Warnings that the exposure is outside the metering range

- Program AE (P)
The shutter speed and f-number blink.

- Aperture priority AE (Av)
The shutter speed blinks.

- Shutter priority AE (T_v)
The f-number blinks.

- Manual mode (M)
The exposure metering value difference is displayed.

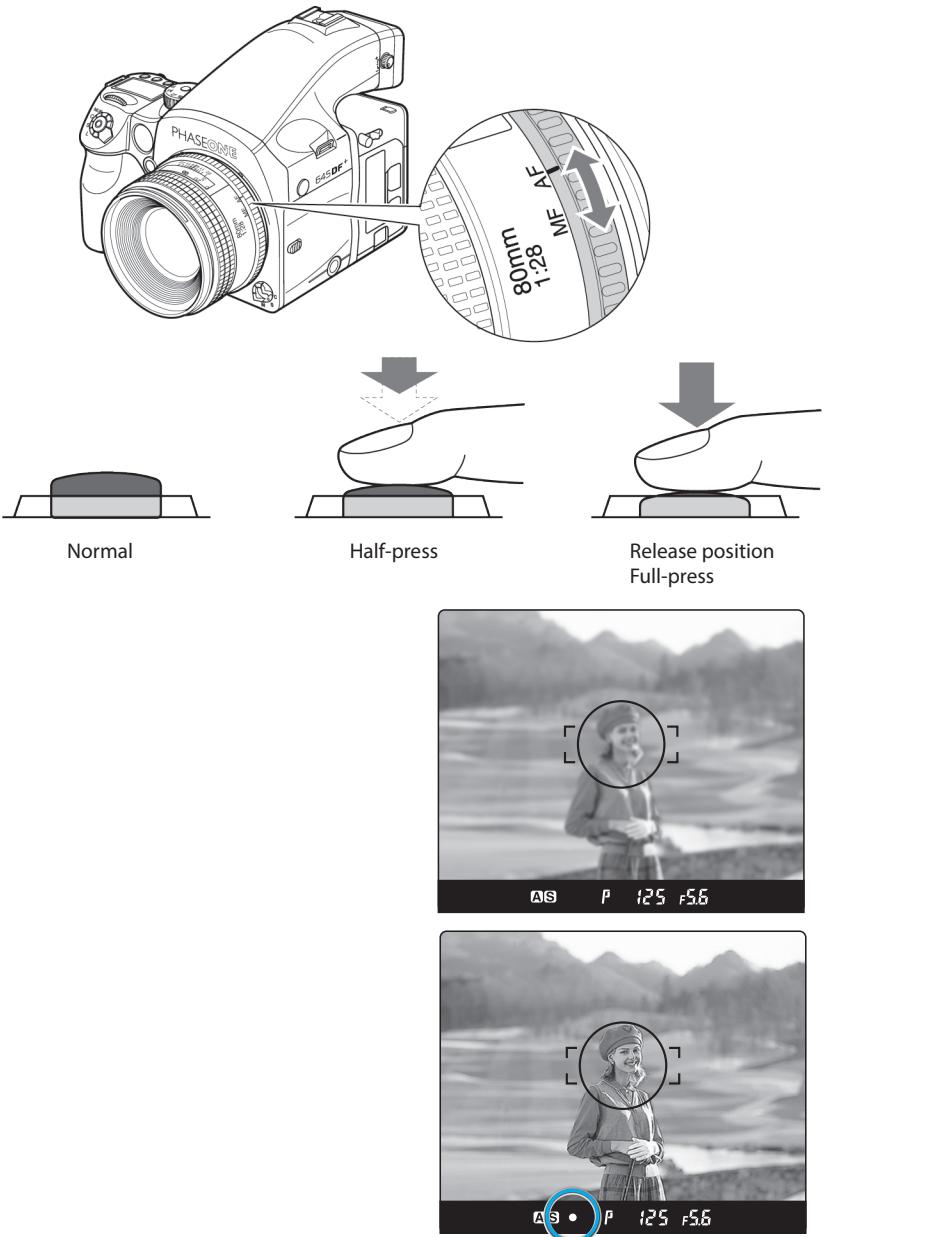

3.5 Autofocus Modes

To use the Auto Focus function, both the camera body and the lens have to be set to their respective Auto Focus modes. Auto Focus does not function when either the camera body or the lens are set to manual focus.


To activate Auto Focus (AF), first select AF on the focusing selector ring on the lens. Next, adjust the Focus Mode Selector Lever to either S (single) or C (continuous) Auto focusing on the camera. The Focus selection ring on the lens can help you to rapidly switch between AF and M, without having to change your grip of the camera.

The shutter release button has a two-step action. When pressed lightly it stops at a certain point. In this manual, this position is called the "half-press" position. When you "half-press" this button, the camera functions are activated. When the shutter button is pressed further down, the shutter is released. This position is called the "full-press" position.

1. Aim the camera so that the subject is within the focus frame.
2. Half-press the shutter release button, and focus will be adjusted automatically in AF mode. As default, you can now re-compose your image without losing the original focus setting, by moving the camera and keeping the shutter release button half-pressed. When the focus mark lights up, the subject is in focus.
3. When the focus mark lights up, press the shutter release button further down to release the shutter. (The focus mark is an illuminated dot (indicated as this • symbol) at the bottom of the viewfinder display. See the focus the illustration circled in blue).

Out of Focus Marks ▶◀


When the picture is not focused the shutter cannot be released when in single focus mode. Either press the shutter release button again to adjust the focus or move the camera to change the position of the focus frame. Lenses without the focus mode selector ring will automatically be set to AF if the camera is set to Auto Focus. Do not touch the focus ring as you may cause internal damage to the camera Auto Focus motor.

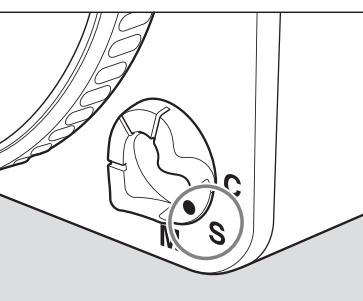

Single Autofocus Mode (S)

This mode uses the focus-priority mechanism. The shutter can be released when the focus mark • in the viewfinder is illuminated. This mode is suited for still subjects. Focus is locked when the focus mark • is illuminated in the viewfinder's LCD.

The shutter cannot be released if the subject is not in focus (if the focus mark • does not illuminate). To take another photo with a different composition, take your finger off the shutter release button then re-press the shutter release button again.

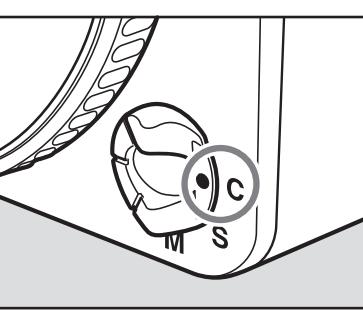

Continuous Autofocus Mode (C)

In this mode shutter release has priority to focusing. The shutter can be released regardless of whether the focus mark • in the viewfinder's display is illuminated. Focus is adjusted continuously while the shutter release button is half-pressed. This mode is suited for moving subjects. Focus is not locked even if the focus mark is lit. The shutter can be released even if the focus mark is not lit.

Lenses with the Focus Mode Selector


The focus modes can be switched between automatic and manual with the selector on the lens when the focus mode selector lever on the camera body is set to S or C.



3.6 Using Focus Lock and Infrared Focusing

Use the focus lock when your intended focus point is not within the focus frame. In such cases where a subject is not located in the center of a frame, use the focus lock function to lock the focus before releasing the shutter.


1. Set the focus mode selector lever to S or C. Put the subject in the focus frame and half press the shutter release button.

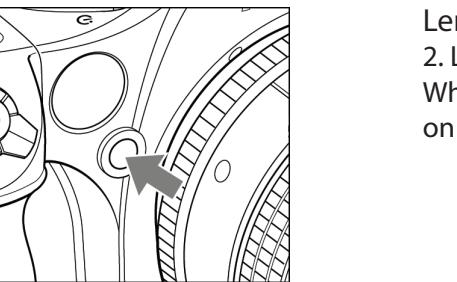

Lenses with the Focus Mode Selector Continued

2. Lock the Focus.


When the focus mark • in the viewfinder LCD is lit, press the AF lock button on the front of the camera to lock the focus.

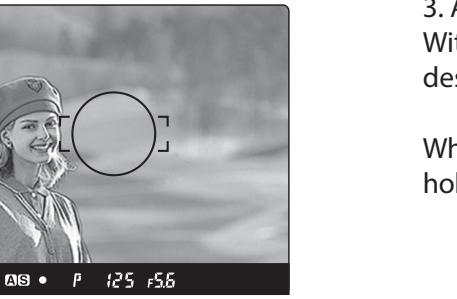

3. Adjust the Composition.

With the shutter release button half-pressed, slide the camera to achieve the desired composition, and release the shutter.

When the focus mode is set at S (single focus mode) and the focus mark • is lit, hold the shutter release button halfway down to lock the focus.


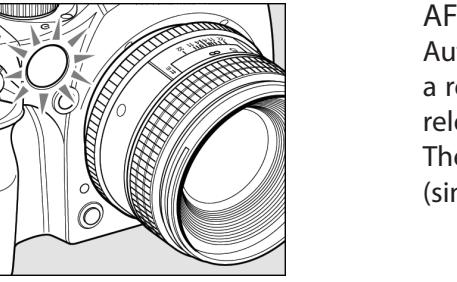


NOTE:

Effective range of the AF assist infrared light is limited. It does not reach distant subjects. - Range: 9m/29.5 ft. (using 80 mm f/2.8 lens)

Use of a lens hood or a bellows lens hood (sold as an optional accessory) may interfere with the assist light. It is advisable to set the focus before mounting the hood.



The AF assist infrared light can be disabled.

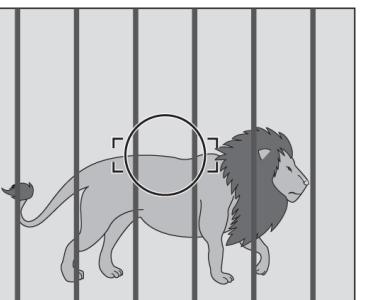
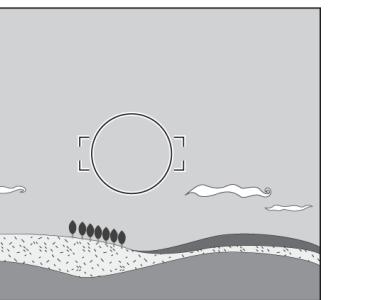


When Auto Focus Cannot Find Focus

The auto focus function requires contrast in the subject. Auto focusing may fail to achieve focus with certain subjects described below. In such cases, either switch to the manual focus mode (and focus manually) or focus on a more contrast appropriate object at the same distance as the object you want to photograph, lock the focus using the focus lock button on the front of the camera body, then take a picture.

- Low-contrast subject (blue skies, white walls and other objects)
- Two or more objects overlapping at different distances within the focus frame (animals in cages, etc.)
- Subjects with continuous repeated patterns (building exteriors, blinds, etc.)
- Extremely backlit reflective subjects (car bodies, water surfaces, etc.)
- Or when the subject is far smaller than the focus frame

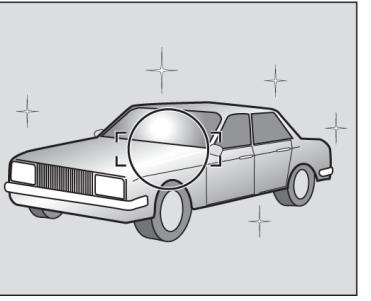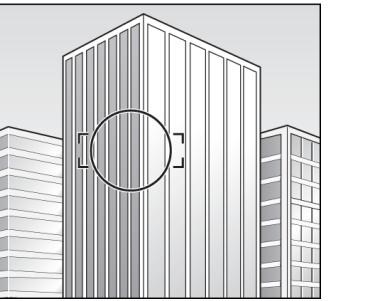

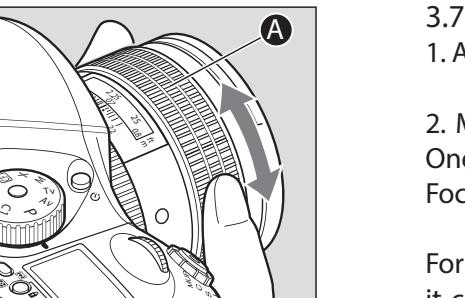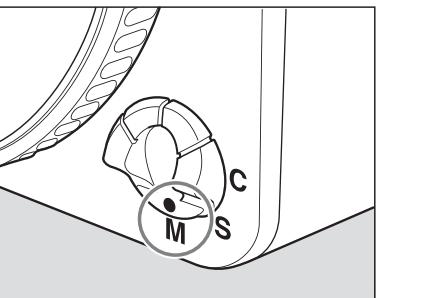

3.7 Manual focus

1. All lenses: Turn the focus mode selector lever to M (manual focus mode).
2. Manual Focus operation for telephoto and zoom lenses: All newer Phase One, Mamiya and Schneider Kreuznach lenses can be switched from Auto Focus to Manual Focus by using the AF ring or slider fitted on the lens.

For lenses with an AF slider, slide the focusing ring on the lens backward until it clicks. When this is done, the Auto Focus inscription on the lens barrel is covered and the lens can then be focused manually. For lenses with an AF ring, simply rotate the AF ring to the MF position to select manual focus.

Adjust the Focus

Turn the lens focusing ring until the subject is in focus. When correct focus has been achieved, the focus mark in the viewfinder will light up.



Turn focus ring clockwise



Turn focus ring counter clockwise

Manual Focusing using the Focus Mark (Focus confirmation method)





Half-press the shutter release button and turn the lens focusing ring to focus on the subject. The focus mark is illuminated in the viewfinder's LCD to signal that a picture is in focus.

If **▶** is lit in the viewfinder's LCD, the camera is focused on a point behind the object.

If **◀** is lit, the camera is focused on a point in front of the object.

- Use the focus mark when taking photos in manual focus mode or when using the M645 manual lens.

- If you adjust focus using the focus mark with an M645 lens, make sure to open the aperture. You can use this function with the lens set to f/5.6 or higher.

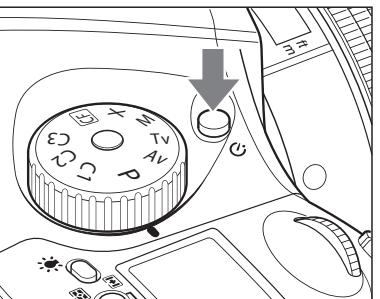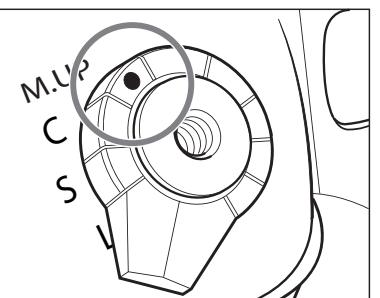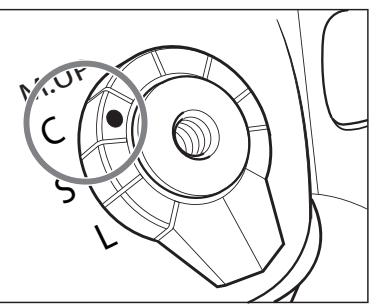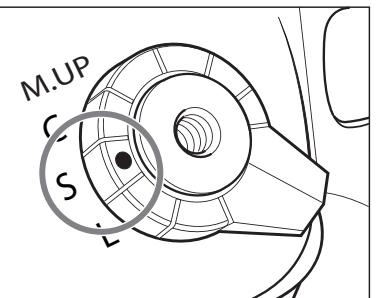

3.8 Drive Dial

Single-Frame Mode

One photograph is taken each time the shutter release button is pressed.

Set the shutter release mode selector to S.

Continuous Mode

Photographs are exposed as long as the shutter release button is pressed.

Set the shutter release mode selector lever to C. Photographs are taken continuously at a rate depending on the buffer speed of the digital back mounted on the camera.

Mirror Up Mode

When the shutter button is pressed, the mirror moves up, and when the shutter button is pressed again, the shutter is tripped and a picture is taken.

Self-Timer Mode

In this mode, the shutter will be released 10 seconds after the shutter release button is pressed.




Activate the self-timer by pressing the **C** button. Next, rotate the front dial so that On is displayed in the camera's LCD and press the shutter release. When the shutter release is pressed, the self timer lamp will blink continuously for 7 seconds, followed by 3 seconds of rapid blinking until the camera releases the shutter.

NOTE:
If a correct exposure cannot be obtained, the shutter speed and aperture value blink. In such cases, the pictures can be taken but they may out too bright or too dark.

If the shutter speed and aperture values blink on the main LCD and in the viewfinder display when the program line is shifted, the proper exposure cannot be achieved. Please select a different Program mode.

When the Program line is shifted, the aperture value changes along with the shutter speed to maintain the proper exposure.

Aperture values and shutter speeds can be set in either 1/3 or 1/2-stop increments (C-01, see page 120)

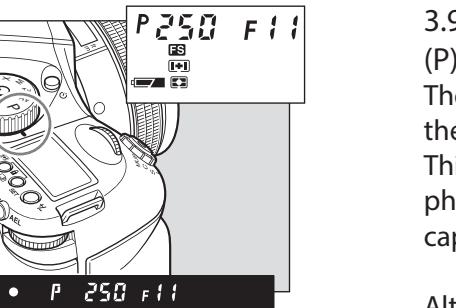



3.9 Exposure Modes (P) Program AE

The aperture and shutter speed are determined automatically for the optimum exposure, according to the ambient light conditions. This auto mode is best suited for general photography or for novice photographers, as it leaves the user free to concentrate on framing and capturing the subject.

Alter the shutter speed and aperture by turning the front and rear dials while the "P" (Program AE) mode is selected.

Program Shift (PH/PL)

The shutter speed and aperture can be altered by turning the front and rear dials while the P (Program AE) mode is selected. In order to avoid blurred images (due to camera shake while releasing the shutter), or to open the aperture, change to PH (high speed). For slower shutter speeds and wider depth of field, change to PL (low speed). This function allows these changes to be made quickly.

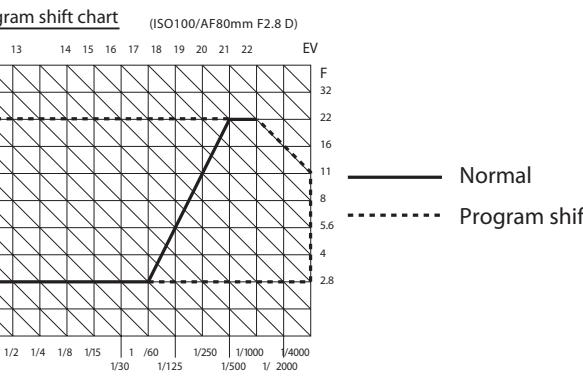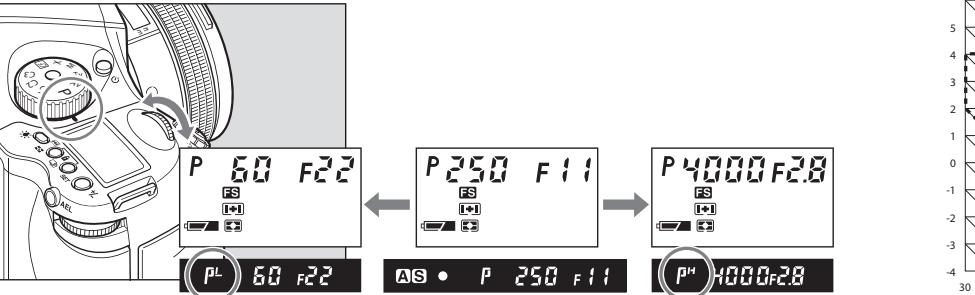



NOTE:
The shutter speed value will blink when the subject is too dark or too bright for a correct exposure. To obtain the correct aperture, adjust the shutter speed value until the aperture value stops blinking and remains lit.

When the exposure compensation is set with the rear dial, the aperture can be selected with the front dial only.

Aperture values can be set in either 1/3 or 1/2-stop increments (C-01, see page 120).

Rotation direction of the dials to change the values can be customised (C-08, see page 120).

The selected aperture value can be locked.

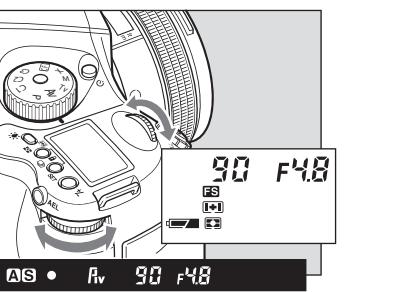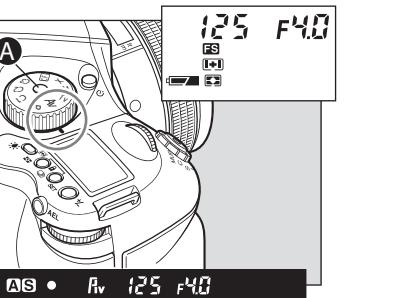



Aperture Priority AE (Av)

Set the desired aperture, and the camera selects the optimum shutter speed accordingly. Use the Av mode to maintain specific control over depth of field,

1. Turn the exposure mode setting dial to "Av" (aperture-priority AE) position.

2. Turn the front or rear dial to set the desired aperture.

- Swap from a leaf shutter lens to focal plane shutter if a shutter speed above 1/1600 second is needed.

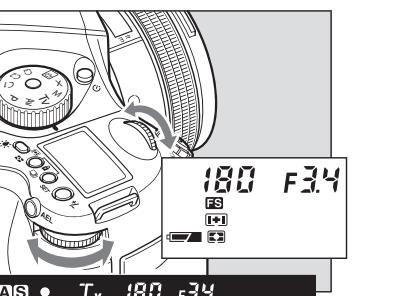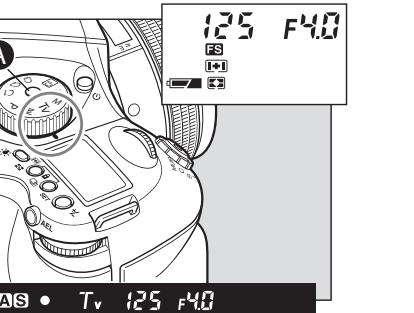

Shutter Priority AE (Tv)

Set the desired shutter speed and the camera selects the optimum aperture accordingly. A fast shutter speed can be used to freeze motion and slow shutter speed can be used to create motion blur.

1. Turn the exposure mode setting dial to "Tv" (shutter-priority AE) position.

2. Turn the front or rear dial to set the desired shutter speed.

- Swap from a leaf shutter lens to focal plane shutter if a shutter speed above 1/1600 second is needed.




NOTE:
When the exposure is compensated in the Manual mode, the difference between the metered value and the compensated value will be displayed on the viewfinder LCD. In the B (Bulb) mode, the difference with the metered value is not displayed.

Increment of the aperture and shutter speed value can be set at either 1/3 or 1/2-stop.

The assignments of the front and rear dials can be swapped.

Rotation direction of the dials to change the values can be altered.

The selected aperture and shutter speed can be locked.

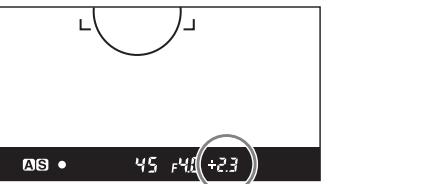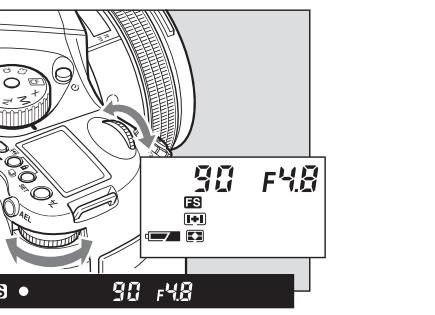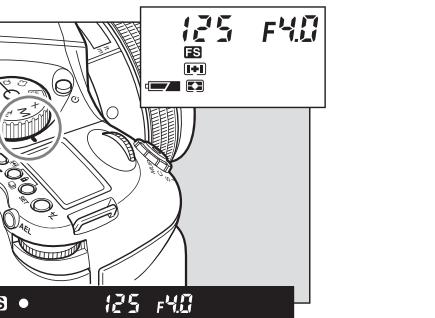

Manual Mode (M)

This mode is used to set both the aperture and shutter speed for total exposure control. Varying shutter speeds can be selected, including "bulb", "time" and manually from 60 mins to 1/4000 sec. Aperture values can be set from maximum to minimum aperture.





1. Turn the exposure mode setting dial to "M" (Manual) position.

2. Turn the rear dial to set the desired aperture.

3. Turn the front dial to set the desired shutter speed.

4. When the shutter release button is half pressed, the difference between the present settings and the metered value is displayed in the viewfinder's LCD panel. The value is displayed in 1/3 stop increments within a range of ± 6 EV.





When the difference between the set value and the metered value is greater than ± 6 EV and the set value is lower than the metered value, the indicator in the viewfinder LCD shows "- u -". Contrarily when the set value is higher than the metered value, the indicator shows "- o -".

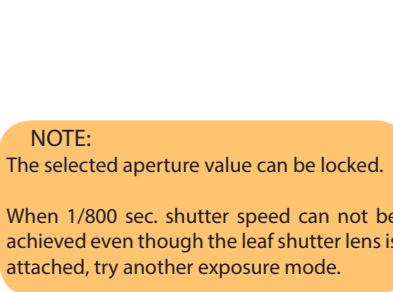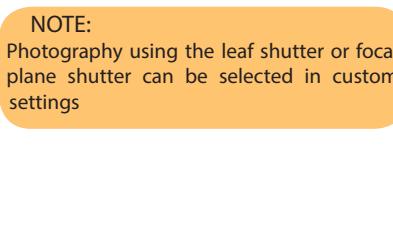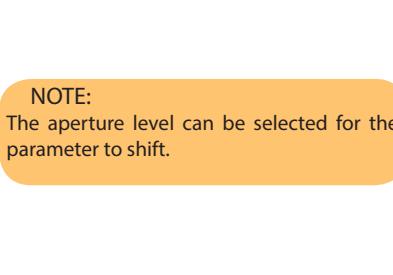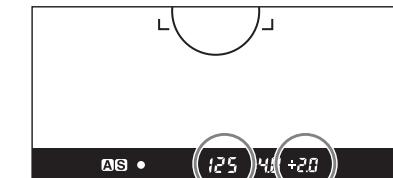

NOTE:
Photography using the leaf shutter or focal plane shutter can be selected in custom settings

NOTE:
The selected aperture value can be locked.

When 1/800 sec. shutter speed can not be achieved even though the leaf shutter lens is attached, try another exposure mode.

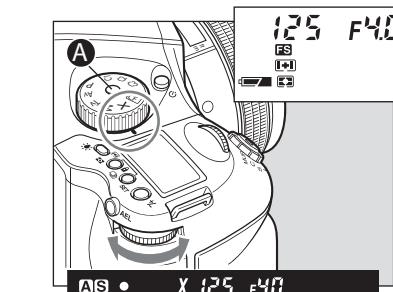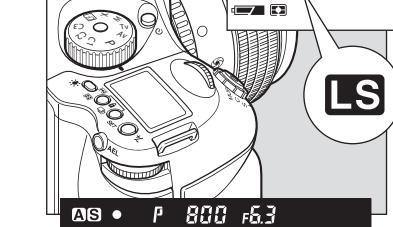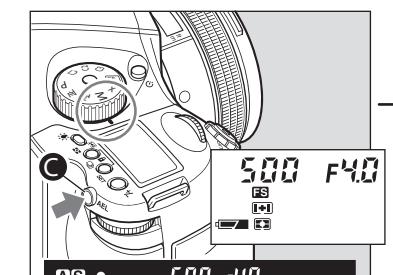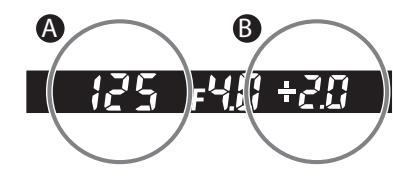

Synchro Mode (X)

Select this mode when a flash is used. Choose "X" and the shutter speed will be fixed at 1/125 second for synchronization.


One-push Shift Function

When the difference between the set value and metered value is displayed on the viewfinder LCD in the Manual "M" mode, press the AEL button for approx. 1 second and the camera will automatically adjust the shutter speed to achieve the correct exposure based on the set aperture value.

3.10 Flash Photography

The Phase One 645DF+ is equipped with a horizontal focal-plane metal shutter and it is also compatible with leaf shutter lenses.

The focal-plane shutter provides higher shutter speeds than that of leaf (central) shutter lenses. Focal-plane shutters allow you to shoot fast enough to freeze moving subject matter. Leaf shutter lenses will allow faster shutter synchronization to flash, making it ideal to freeze subject movement when using strobe lighting.



The focal-plane shutter method allows for shutter speeds of up to 1/4000 sec. When shooting at higher speeds e.g. 1/500 sec. the two shutter blades are moving in parallel creating a small slit allowing a small fraction of light to reach the sensor area of the digital back. When using this type of shutter it is not possible to achieve flash synchronization greater than 1/125 sec.

A leaf shutter will make it possible to achieve faster shutter and flash sync speeds. An IQ Series back can achieve a maximum shutter speed of 1/1600 second. Do not use leaf shutter speeds above 1/1600 sec.

| Exposure Mode | Lens Mode | Shutter speed | | | X-Sync | | |
|---------------|---------------|---------------|-------------|-----------|-----------------|-------------|-----------|
| | | 1/4000-1/1600 | 1/1600-1S | 1S - 30S+ | 1/4000 - 1/1600 | 1/1600 - 1S | 1s - 30S+ |
| Program | Leaf Shutter | — | LS | — | — | LS | — |
| | Focal Shutter | FS | FS | FS | — | 1/90 - 1S | — |
| Tv | Leaf Shutter | — | LS | — | — | LS | — |
| | Focal Shutter | FS | FS | FS | — | 1/90 - 1S | FS |
| Av | Leaf Shutter | — | LS | — | — | LS | — |
| | Focal Shutter | FS | FS | FS | — | 1/90 - 1S | — |
| Manual | Leaf Shutter | — | LS | — | — | LS | — |
| | Focal Shutter | FS | FS | FS | — | 1/90 - 1S | FS |
| X(*) | Leaf Shutter | — | 1/125,90,60 | — | — | 1/125,90,60 | FS |
| | Focal Shutter | — | 1/125,90,60 | — | — | 1/125,90,60 | — |

NOTE:
This camera's synchro contact is an X contact.

Using flashes designed exclusively for other camera manufacturers in the hot shoe may damage the camera's internal mechanisms. In this situation, use an off-camera flash bracket and connect a sync cord to the camera's synchro terminal.

When using flashes with a flash duration of 1/500 sec. or longer, set the shutter speed to 1/30 sec. or less.

1. A grip type flashgun or a strobe (with electric contacts other than X contact) can be operated with the Phase One 645DF+ by connecting a sync cord into the camera's sync terminal. (See the note in the bottom left corner of the page about flash units designed exclusively for other camera makes.)

2. Turn the exposure mode setting dial to "X" (1/125 sec.) or M (manual). When M (manual) is selected, turn the front dial and set the shutter speed to 1/125 sec. or slower.

3. Turn the rear dial to set the aperture, and then press the shutter button to take a picture.


In addition to its standard flash sync system, the Phase One 645DF+ features TTL (through the lens), off the film (OTF) and electronic flash exposure metering.

Metz 3952 functions

| | |
|--|---|
| Charging completed indicator in viewfinder | When charging of the flash is completed, a charging completed flash icon  will illuminate in the viewfinders display panel |
| Automatic setting of flash synchronizing speed | When exposure mode is set at "Av" or "P", the shutter speed will be automatically set to 1/60 to 1/125 sec. when charging of the flash is completed. When exposure mode is at "TV" or "M" and the shutter speed is faster than 1/125 sec., the shutter speed will be automatically set to 1/125 sec. |
| Flash confirmation | The flash charge mark  flashes after the shutter is released to indicate that the flash was emitted properly |
| Auto zoom control | The power zoom reflector is linked to the lens focal length (excluding the Metz 32Z-2) |
| Auto AF assist beam | When the focus mode is set to "S", the autofocus assist beam is emitted automatically in low light. (excluding the Metz 32Z-2) |
| Display of flash range (distance) | Displayed on the flash's liquid crystal display panel. (Metz 32MZ-3 and Metz 32Z-2) |
| Data transfer | The film sensitivity data, exposure compensation data and aperture data are sent from the camera to the flash. |

| Adapter | Type of flash | SCA3952 Module | Converter |
|--------------------------|---------------|----------------|-----------|
| Metz Flash Unit | | | |
| Metz 44 MZ-2 | shoe-mount | x | |
| Metz 54 MZ-3 | shoe-mount | x | |
| Metz 45 CL-3 & 4 Digital | Handle-mount | x | SCA 3045 |
| Metz 60 CT-4 | Handle-mount | x | SCA 3000 |
| Metz 70 MZ-5 & 4 | Handle-mount | x | |

For more info on Metz, contact the local Metz dealer or www.metz.de

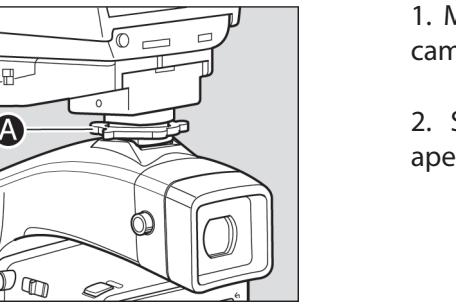

PHASE ONE

Phase One 645DF+ features TTL (Through The Lens), OTF (Off The Film) and electronic flash exposure metering. A flash sensor located inside the camera body reads the flash light reflected off the surface of the CCD at the moment of exposure. The sensor is connected via the Phase One 645DF+'s dedicated hot-shoe to a shoe or handle-mount style Metz flash unit via the Metz SCA 3952 TTL Adapter. Maximum flash speed is 1/125 sec. when the focal plane shutter is used, making daytime synchronization possible.

The ISO of the flash is automatically set through the TTL connection from the camera's film magazine; any adjustment to this is instantly recognized after the setting is locked and the shutter release is half-pressed.

To utilize the TTL flash feature with all TTL-operable Metz flash units, a Metz SCA 3952 module is required. Please see the chart for capability and/or additional adapters that may be necessary.

The resulting flash exposure automation determines correct flash exposure and automatically adjusts the output of the flash. It also automatically corrects for exposure compensation normally required when using filters, close-up bellows or extension tubes.

| Exposure mode | | Shutter speed | Aperture |
|---------------|----------------------|---|-----------------------------|
| P | Program AE | Automatically set by camera to 1/60 sec. when the metered shutter speed is 1/60 or slower, and 1/125 when it is 1/125 sec. or faster. | Automatically set by camera |
| Av | Aperture priority AE | | Any aperture |
| Tv | Shutter priority AE | Automatically set by camera to 1/125 when the set shutter speed is 1/125 sec. or faster. | Automatically set by camera |
| M | Manual mode | | Any aperture |
| X | Synchro mode | 1/125 sec. or via CF | Any aperture |

TTL flash

With TTL flash photography, the reflection of the flash is metered and the intensity of the flash is adjusted automatically, which can mean TTL flash photography may not be suitable for all shooting conditions. In the cases described below, we recommend that you use a flashmeter to check the intensity of the flash or to use a manual flash setting.

Example:

1. When the size of the subject you want to light with the flash is relatively small within the picture
2. When the background behind the subject is extremely bright or when there is a strongly reflective object in the background
3. When the background behind the subject is extremely dark (outdoors at night, etc.)
4. For flash photography with a narrow film latitude








Curtain Syncro

When a moving subject has been shot under this function, the flash of light appears after the moving subject.



Rear curtain sync mode

This function is set by Custom function setting. Go to page 81 for more information.

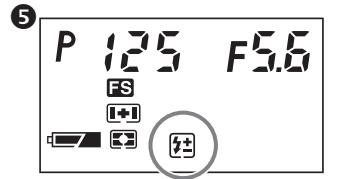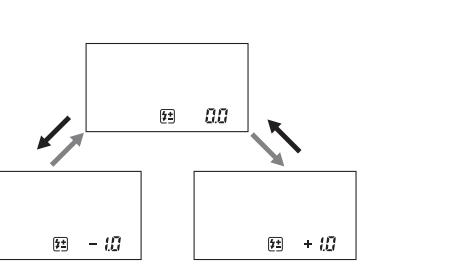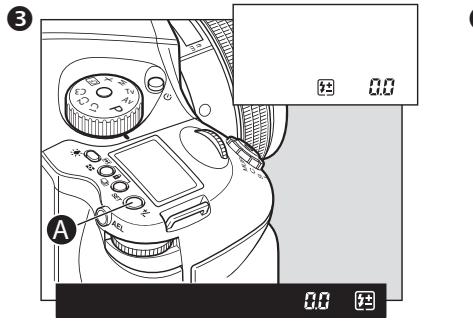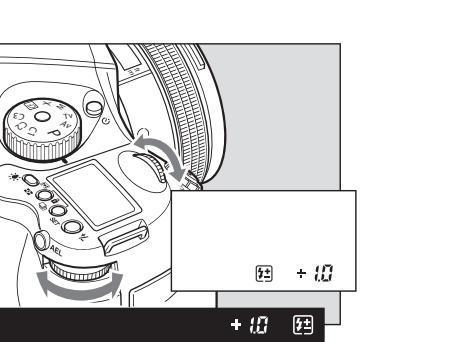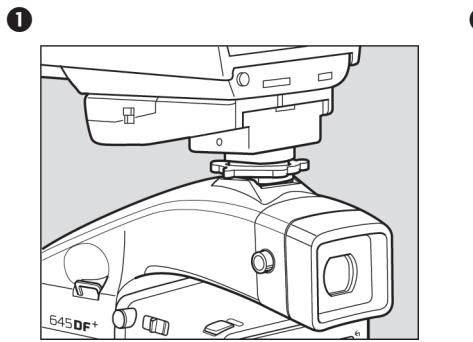

3.11 Flash Compensation Settings

By combining a Metz flash and the SCA3952 adapter, the camera adjusts for flash. It can be adjusted within ± 3 EV in increments of 1/3 steps.

1. Turn on the Power

Install the SCA3952 adapter on the Metz flash, and attach it to the camera. Lock the flash in place using the locking knob on the flash shoe. Turn the shutter release mode selector lever to the S or C position, and turn ON the flash power switch.

2. When the flash charge confirmation lamp lights, press the set button [A].

The icon is displayed on the main LCD panel.

3. Turn the front or rear dial to select the flash compensation value.

External LCD Panel (normal display)


4. When the shutter button is half-pressed, the display appears on the external LCD, and appears on the LCD inside the viewfinder with a + compensation, or appears with a - compensation.

Viewfinder LCD Readouts

- If the flash-charge mark is not displayed, the flash compensation button [A] cannot be used.

- Keep pressing the set button to activate the flash compensation mode. You can check the exposure compensation value.

- If you turn the shutter release mode selector lever to the L (power OFF) position, the compensation value will be cancelled.

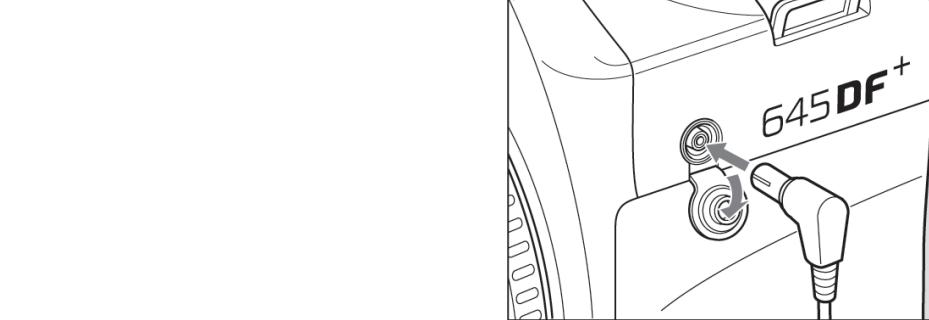

Flash Photography with Electronic Flash Models other than Metz units

1. To use a grip type flashgun or a strobe with other electric contacts than X contact, connect the sync cord to the camera's sync terminal. (See note below about flashes designed exclusively for other makers' cameras.)

2. While pressing the unlock button, turn the exposure mode setting dial and set it to X (1/125 sec.) or M (manual).

When M (manual) is selected, turn the front dial and set the shutter speed 1/60 to 1/125 sec. or slower.

3. Turn the rear dial to set the aperture, then take the picture. (for M, use the rear dial. For X, use the front dial).

This camera's synchro contact is an X contact.

NOTE:
Using flashes designed exclusively for other makers' cameras may damage the camera's internal mechanisms if connected to the camera's hot-shoe. In this situation, use an off-camera flash bracket and connect a sync cord to the camera's synchro terminal.

- When using flashes with a flash duration of 1/500 sec. or longer, set the shutter speed to 1/30 sec. or less.

4.0 Introduction to the IQ2 Series Digital Back

System Overview

The Phase One IQ2 Series Digital Back is designed to fit on the Phase One 645DF+ as well as several other brands or models of medium format cameras.

The IQ2 Series include four different models; the IQ280, IQ260 and the IQ260 Achromatic, and the new IQ250. The backs incorporate 80 and 60-megapixel CCD sensors for the IQ280 and two IQ260 models respectively, and a newly developed 50-megapixel CMOS sensor for the IQ250. They also feature USB3.0 and FireWire 800 connections facilitating the fastest possible tethered image transfers speeds.

All four models have a 3.2 inch touch display that features 1.15 megapixel resolution. The wide format display allows for a full 4:3 aspect ratio VGA resolution image next to histogram, highlight warning, focus mask, File Info, and touch controls. This touch screen display is complemented by Phase One's intuitive 4-button navigation.

Phase One's patent-pending Sensor+ technology, built into the Phase One IQ2 Series models, supports a variety of shooting conditions. Images can be captured at full resolution or, using Sensor+ mode, switch instantly to capture images with 20 megapixels* resolution at 4 times higher sensitivity, up to ISO 3200. Please note the IQ250 does not adopt Sensor+ technology.

The following section deals with generic features that are available in all four IQ2 Series digital back models.

* The IQ280 produces 20 megapixel resolution and both the IQ260 and IQ260 Achromatic produce 15 megapixel resolution when the Sensor + mode is activated.





4.1 Quick Start (shooting untethered)

1. Connect an IQ2 digital back to the camera and install the focusing screen if applicable.
2. Charge the batteries (See page 16) then insert them into the camera.
3. Insert a CompactFlash card into the IQ2 Back.
4. Switch on the power to the back and camera and select a drive mode.
5. Choose an exposure mode.
6. Select a focus mode on the camera body and lens if applicable.
7. Set the date and time. (See page 25).
8. Set the ISO and White Balance. (See page 28).
9. After shooting, transfer images into Capture One software from the CF card using a card reader.
10. Editing images in Capture One and output as required.

4.2 General Hardware Setup

Powering up the IQ2 back

After an IQ2 back is connected to a camera body, insert a battery and it will automatically turn on. The back is switched on/off by pressing the power button located below the IQ2 back display.

ISO Settings



The IQ280 back has an ISO spectrum from ISO 35-800. The IQ260 has a 50-800 spectrum and the Achromatic back has a ISO spectrum from 200-3200. The default ISO setting is 50 for IQ280 and IQ260 models and 200 for the Achromatic. An ISO rating can be selected from the menu system (when untethered) or in the Capture Tool in Capture One Pro software (when tethered). Sensor+ technology, built into the Phase One IQ Series models, expands the ISO range from 140 to 3200 at 20 megapixels resolution for the IQ280. The IQ260 models have a Sensor+ ISO range from 200 to 3200 at 15 megapixels resolution.

Power Management and Shutter Latency

The IQ2 back's CCD needs to be constantly cleared of data from the previous capture before the next exposure can be taken. This process requires some power consumption. The default setting is Normal Latency, which should remain unchanged under all 'normal' shooting scenarios. Only change the setting to Zero Latency if you work on technical cameras, large format cameras or certain manual cameras in special situations.

Double Exposure Protection

It is not possible to accidentally double expose an image by capturing one shot quickly after another when an IQ2 back is used on cameras such as the Phase One 645DF+/DF/AF, Mamiya 645DF/AFDIII, Hasselblad 555 ELD (DIG mode), Hasselblad H or Contax 645. The electronic communication with the body ensures that the IQ2 back is ready before allowing release of the next shot. However, users of other camera bodies that do not use the electronic interface from the IQ2 will have to wait for the ready beep signal before releasing the next shot.

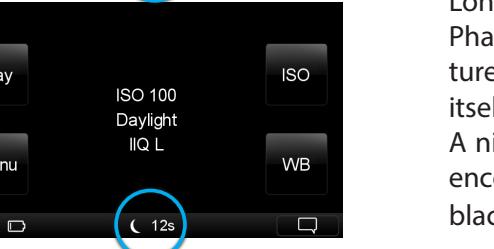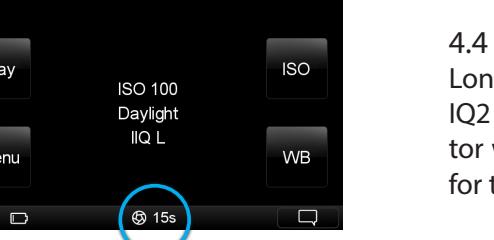

4.3 Indicator Lights

IQ2 Series digital backs feature two main red and green LEDs located below the bottom left corner of the screen. When the IQ2 back is activated, the green and red LEDs will flash shortly and a beep will sound to indicate that it is ready to capture. In general, if the LEDs are not illuminated the camera is ready.

A red indicates that the IQ2 back is writing to the storage media, and therefore the buffer has not been emptied. When capturing an image the green LED will blink rapidly to indicate that the IQ2 back is busy exposing the CCD or moving data from the CCD. A continuous green light indicates that the backlight of the display is dimmed but the camera is still ready to shoot. The IQ2 back also has an orange light to indicate that the battery is charging when the back is connected to a computer via a FireWire or USB connection. (Go to page 90 for more details about charging the battery whilst tethered to a computer).

Additional Red LED

There is an additional red LED indicator located next to the CF card slot (under the cover). It is assigned to indicate CF card activity only. Do not remove a CF card from the card slot when this red LED is on. Removing a CF card whilst the red LED is on can damage the formatting of the card, and images or data might be lost or corrupted.

4.4 Indicators

Long exposure time indicator: An exposure time indicator will appear on the IQ2 screen if the camera is set to expose for more than 2 seconds. The indicator will count the seconds while the shutter is open. This indicator is useful for timing long bulb exposures.

Long exposure black reference: In order to capture noise free long exposures Phase One digital backs needs to capture a black reference after each capture. This black reference requires the same amount of time as the exposure itself.

A night symbol and a counter counting down the time left for black reference capture to complete will appear at the bottom of the screen while the black reference is being captured. This function is performed automatically.



4.5 Tethered and Untethered Operations

Untethered: An IQ2 Series back can be operated as a fully portable battery powered unit. Image files are shot and transferred to a CompactFlash card which is inserted in the CF-card slot on the left side of the camera back.

Tethered: Remember to always keep a battery in the IQ2 back even when shooting tethered to a computer via a FireWire or USB3.0 connection. When operating tethered, image files can be shot to a CompactFlash card or transferred directly to the assigned capture folder in the Capture One application on the computer hard disk. (Go to page 90 for more details about charging the battery whilst tethered to a computer).

Driver Set-up

Find out more on Installation and Activation of software on page 9 and 10 of this User Guide. There is no specific program set-up. Check the Capture One User Guide for recommended hardware. Eventual firmware announcements will be available on our website, and in our newsletters.

Connecting

The maximum length of a compatible FireWire cable is 4.5 meters. Longer cables might require a third party power solution or a FireWire hub. IQ2 Series backs match the FireWire 800 standard.

Plug the FireWire 800 cable into the IQ2 unit and into back of your Mac or Windows PC. (It is not recommended to use a FireWire port on the front of a computer as it can be less stable). Capture One will automatically recognize the IQ2 back and settings shared. (Read more on shooting tethered in the Capture One software manual).


N.B: IQ2 backs are compatible with FireWire 400. Please order a Phase One FireWire 800 to 400 cable 4.5M. Part No: 50300164



Tethered Operations Continued

The display on an IQ2 Series back can be either be turned off while shooting tethered or set to display the images while they are shot, just as if shooting untethered. It is also possible to enlarge a section of an image on the IQ2 screen to help check focus of the current and upcoming captures.

An IQ2 back will default to its untethered mode when the FireWire 800 or USB3.0 cable is removed in its Auto Storage setting. Captured image files will be stored on a CompactFlash card, and the unit's battery will provide power. (The IQ2 back can be made to shoot to either CompactFlash or to a computer, via a FireWire 800 cable. Find out more on the Storage Mode on page 91).

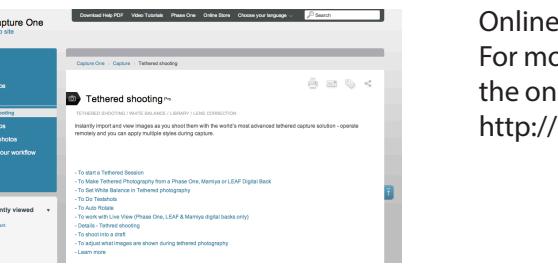

Online Support

For more information on shooting tethered with Capture One please consult the online user guide available in the Capture One Help menu or go direct to <http://help.phaseone.com/en/CO7/Capture/Tethered-Shooting.aspx>



4.6 CompactFlash Card Usage

It is important to follow a few simple guidelines to help avoid loss of data when working with CompactFlash cards, card readers and digital cameras. Phase One recommends that you test-drive all new CompactFlash cards including the one that comes with your IQ back. By performing an initial test to verify that the capture files are stored properly on the card and can be accessed on a computer you will avoid unpleasant surprises on location or when you return from a job. CompactFlash cards are manufactured by other suppliers and Phase One cannot guarantee that the cards are not defective.



Inserting and Ejecting on the IQ2 Back


The CompactFlash card is inserted in the hidden slot located under the cover on the left hand side of the IQ back.

Insert the CompactFlash card with the brand label facing the display end of the digital back as shown in the image.

The cover can be closed when the CompactFlash card is fully inserted.

To eject the card push the small button above the card once, and an ejecting pin will come out. Pushing this pin all the way back in will eject the card.

Microdrives are not recommended for use with IQ backs.

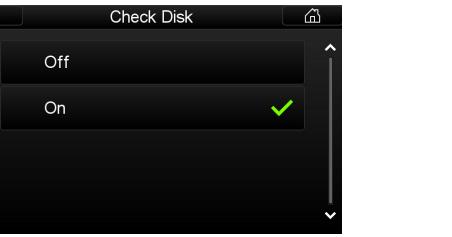

4.7 Secure Storage System (3S)

You can always be sure that your data is safe when working with memory cards in a Phase One IQ2 back. The Phase One Secure Storage System (3S) provides the industry's safest memory card handling. The 3S technology automatically checks your card's file structure every time it is inserted into the IQ2 back. If the disk check function finds any errors, it will prevent usage of the card until these are corrected or the card is formatted.

How does 3S work?

A complete disk check for a valid file structure is performed as soon as a card is inserted into the IQ2 back.

Lower gigabyte capacity cards will load quicker than high capacity versions.

It is not recommended to turn off the Check Disk function. However, if you want to turn it off go to Menu>Check Disk.

Disk Check Summary

3S technology is a safe storage system integrated into the IQ2 back and is much more rugged than anything else seen in the industry. No other digital back or DSLR camera has this level of storage security.

Benefits include:

- No need to format a card on a computer
- Damaged or incorrectly formatted cards will be detected immediately. IQ2 backs also have the ability to reformat and correct these cards.
- Ejecting a card while it is writing a session will not necessarily damage the file structure of the entire CompactFlash card. Only the image being written and the images in the buffer can be damaged.



4.8 Formatting your Memory Card

Most CompactFlash cards are preformatted and ready for use in the IQ backs. However, Phase One recommends that all cards should be formatted in the IQ back to ensure their optimum performance.

Memory card formatting is done in either FAT 16 or FAT 32 depending on card size. (IQ backs support CompactFlash cards formatted in both FAT 16 and FAT 32).

Using CompactFlash Cards in a Card Reader

A card will be mounted as a removable drive on a computer after it has been inserted into the card reader and connected to a Mac or PC. Windows and Mac OS X will have the required drivers for the CF card reader. For information on how to import files to Phase One Capture One, please consult the Capture One online user guide available under Capture One Help in the Help Menu.

Warning!

Ejecting a card or removing the battery while the IQ2 back is still writing (when the red LED is on) will cause images that are not written to the card to be permanently lost or damaged. Do not bend or flex your CompactFlash card. Please keep the card away from moisture, grit and sand. Use the supplied CompactFlash card case as a storage container when not in use.



5.0 Navigating the IQ2 User Interface and Menu System

Home Screen

The IQ2 Home Screen is the first view users will see as soon as the back is switched on. This is the back's default screen and the starting point in which to negotiate the menu system. It enables direct access to the Play mode to view captured images, the Menu to configure the IQ back's setup and ISO sensitivity and White Balance (WB) settings.



The bottom of the Home Screen features an Info Bar that displays a Power Indicator that shows the remaining battery capacity or a FireWire icon if the IQ2 is being used to shoot tethered via a FireWire 800 connection. The Power Indicator will start blinking when it runs low to warn users that the battery needs to be replaced before capturing any more images.

The selected ISO rating, White Balance setting and the IIQ Raw file format are all displayed in the center of Home Screen. A 'S+' icon will appear next to the file format indicator if the Sensor+ function is in use.

Press and hold the top left button to immediately return to the Home Screen regardless of where you are in the menu system.

Context Menu

Press the Context Menu button in the bottom right corner of the Home Screen to quickly access three image review options. Select either the Thumbnail, Tool View or Full Screen mode. Select the key icon to lock the four (external) menu buttons and the touch screen functionality.

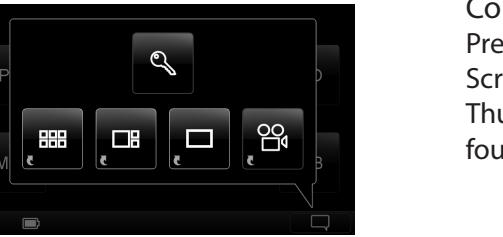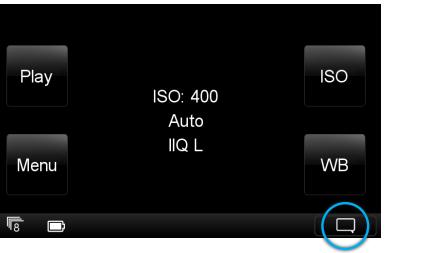

5.1 Menu Buttons

The IQ2 back is equipped with four external buttons. The buttons will change function to match the menu shown on the display.

The four external buttons are assigned to the Play, Menu, ISO and WB options when the IQ2 back is in its default Home Screen position. (See image top left)

The function of the four buttons changes once one of the Menu, ISO and WB options has been selected. In general, the two buttons to the left are used to exit the screen and select a menu option. The two buttons to the right are used to navigate up and down in the menu system.

Press Play on the Home Screen. Here the four buttons take on a different role as the two left buttons are assigned to zoom in and out image files and used to display a thumbnail collection. The two right buttons are assigned to scroll through thumbnails and image files.

Tip: The function of an external button is usually signalled by the icon positioned nearest to it on the screen. (See blue circles on the left picture).

5.2 Shortcuts

Home shortcut: Press and hold the upper left (Exit) button to immediately return to the Home Screen regardless of where you are in the menu system.





Button Lock shortcut: Hold down the upper left (Play) button whilst the Home Screen is displayed and double press the lower right (external) button. The key icon will appear at the bottom of the screen and turn red to confirm that the four (external) menu buttons and the touch screen functionality has been locked. Repeat the procedure to unlock the buttons and screen. (Hold down the Play button and double press the WB button).



5.3 Touch Screen Operation

All four IQ2 models incorporate a 3.2 inch touch screen. The screen lets you zoom, pan and browse through images fast and it is easy to navigate between different menus and features. The IQ2 series backs are designed with invisible controls that are context sensitive and appear only when specific areas of the screen are touched.

One example of this is the unique instant zoom function, which allows you to zoom just by using one finger. Small histograms and highlight warnings can be enlarged to full screen view by simply touching them. Wide format display allows for a full 4:3 aspect ratio VGA resolution image next to histogram, highlight warning, focus mask, EXIF data and touch controls. It is possible to operate the IQ2 back using the touch screen display or the well-known and intuitive 4-button navigation.

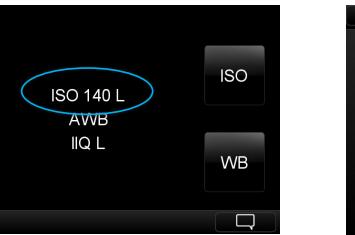

5.4 ISO

Push the top right button or tap ISO on the Home Screen. You will be presented with the back's ISO spectrum. Scroll up and down and tap the screen to select the desired setting. A green check mark will appear next to your chosen setting and you will automatically return to the Home Screen. An ISO rating can also be selected from the Capture One Pro software (when shooting tethered).

The IQ280 back has an ISO spectrum from ISO 35-800. The IQ260 has a 50-800 spectrum and the Achromatic back has a ISO range from 200-3200. The IQ250 has a wider range, at ISO100-6400. The default sensitivity setting is ISO 50 for IQ280 and IQ260 models and ISO100 for the IQ250. The Achromatic has a default of ISO200. Sensor+ technology, built into the Phase One IQ Series models, expands the ISO range from 140 to 3200 at 20 megapixels resolution for the IQ280. The IQ260 models have a Sensor+ ISO range from 200 to 3200 at 15 megapixels resolution.


Long Exposure Mode – IQ260

The Long Exposure Mode is a feature integrated into the IQ260, enabling noise free exposes of up to one hour. The default setting is On. When the mode is Off, the IQ260 will automatically display a dialogbox that suggests using the Long Exposure Mode with exposures longer than than 10 seconds. Long Exposure Mode is marked with an L after ISO in the Home Screen. The Long Exposure Mode has an ISO range from 140 to 800 that can be extended up to ISO3200 in Sensor + mode (IQ260 only).

Precautions on Long Exposure Shoots

1. Close the eyepiece shutter to block any light from entering the viewfinder.
2. When using extreme long exposure more than 5 to 10 minutes outside in daylight, please take relevant precautions, e.g. avoid having camera and digital back in direct sunlight.
3. Cover your entire camera with a Phase One lens wrap or similar light proof material to eliminate stray light.
4. Remember that when you make a long exposure, the digital back will make a black calibration after the capture of the same duration as the exposure.

Find more detailed information - Search for "Long Exposure" on: www.phaseone.com/support

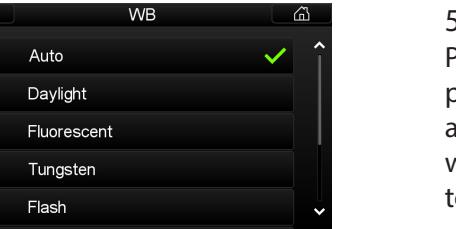


5.5 White Balance

Push the lower right button or tap WB on the Home Screen. You will be presented with the back's White Balance settings. Scroll up and down and tap the screen to select the desired setting. A green check mark will appear next to your chosen setting and you will automatically return to the Home Screen.

The default ISO setting is Auto that will calculate a White Balance based on the information in the image. Auto WB is appropriate for most applications.




A specific light source can also be selected in the WB menu. These include Daylight, Fluorescent, Tungsten and Flash. It is easy to check the WB setting as it is displayed in the center of the Home Screen below the ISO rating.

White Balance can also be set from within Capture One when shooting tethered to a computer. Find out more on tethered operation from page 53.

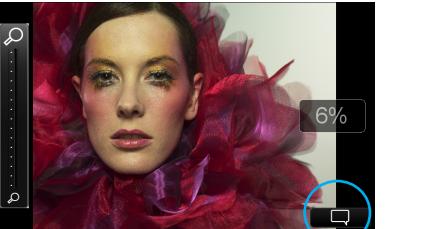

5.6 Custom White Balance


To create a new Custom White Balance, first capture a reference White Balance image. (Try to use a gray card or neutral white surface). Next, select the Context menu and press the White Balance Picker icon. (Ensure that the image is in full screen view)

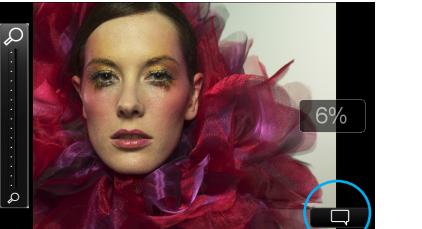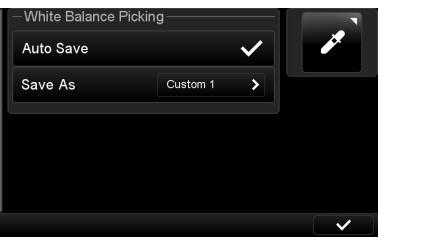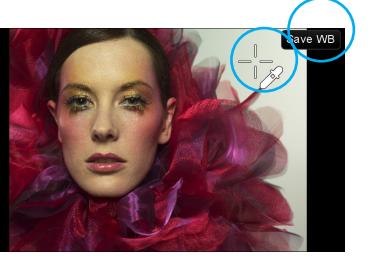


Zoom in and pan to a desired part of the image and then tap on a white/grey area to create a custom WB. A cross-hair icon will appear on the screen. You can continue to pick WB point elsewhere in the image until you are satisfied with the generated WB. The Custom White Balance is now set and all subsequent captures will use this WB setting in Auto Save mode. The picked WB is only applied to the current image if Auto Save mode is deselected.

The IQ Back enables users to create and store up to 3 Custom White Balance settings. To create and store a Custom WB setting go to the Context menu and long press the White Balance Picker icon. Deselect the Auto Save box in the dialog box.

The next time you create a Custom WB setting you will be presented with a Custom 1, Custom 2 or Custom 3 option. Choose a number to save and store the WB setting.

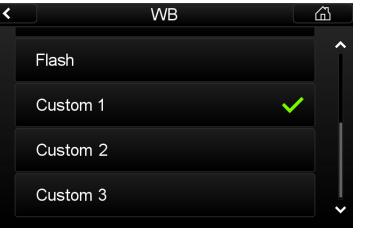

This stored Custom WB settings can be accessed again for future use by scrolling to the bottom of the WB options.

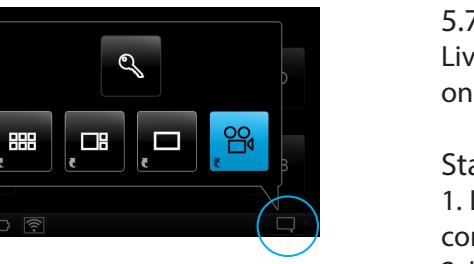

5.7 Live View

Live View on the 645DF+ is supported in Manual or Aperture Priority mode only. Live View in X, Tv and P mode is not supported.


Starting Live View

1. Live View is started from the Contextual menu pop-up in the lower right corner of the IQ2 display
2. In the pop-up, click on the camera icon.

If the IQ2 is attached to a 645DF+ the camera automatically opens the shutter, and live view is displayed on the screen. When you want to capture an image, you have to exit Live view first.

If attached to any other camera, then the shutter has to be manually or electronically opened to get a live view on the screen.

All IQ2 backs support tethered Live View using FireWire 800 or USB3.0, except for the IQ250 which adopts USB2.0 or USB3.0 only.

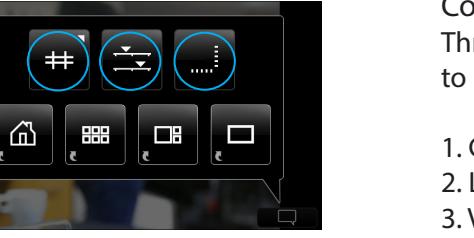


Contextual menu inside Live view

Three buttons are available in the top of the Contextual menu (in order, left to right):



1. Grid
2. Lightness
3. Virtual Horizon

Please see the description of each feature below:

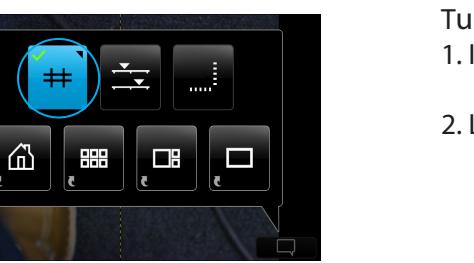


Turn on Grid inside Live view

1. In Live View, select contextual menu pop-up from lower right corner.
2. Long press on the grid button (shown activated, in blue).

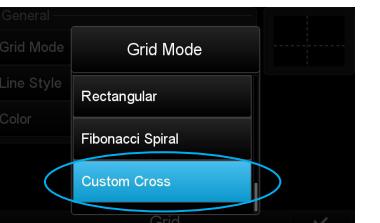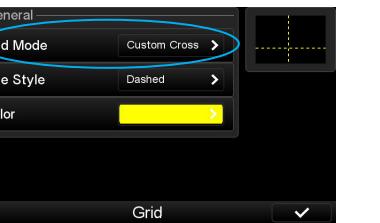

Select the new grid option "Custom Cross"



1. In the Grid Mode dialog scroll down and select "Custom Cross"

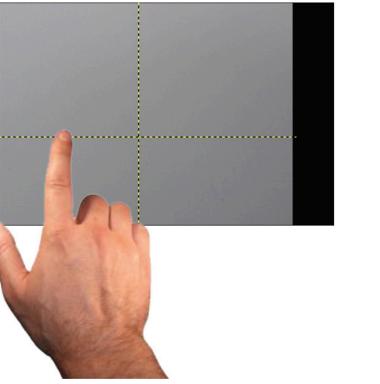

Moving Custom Cross lines

When Custom Cross is chosen, the grid lines can be individually selected and moved around.

1. Press and hold on the grid line you want to move (you will get a confirmation beep).
2. The grid line will flash, indicating that it can be moved around.
3. Alternatively, both grid lines can be selected and moved together. Press and hold the cross-point until both grid lines start to flash. Move the cross-point to the desired position.
4. When you are finished setting the line, tap on another area of the screen and the line locks itself
5. Or, if left without holding, the line will lock itself after a few seconds of inactivity.

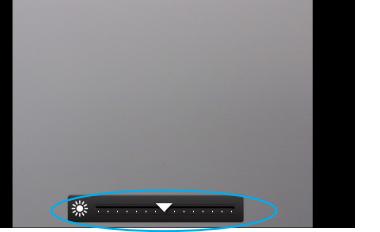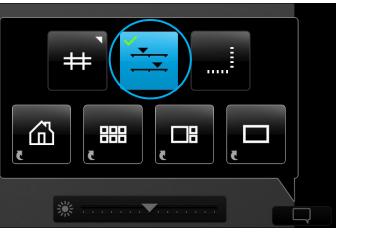


Brightness levels in Live View

The screen's brightness is automatically adjusted to the ambient light levels. Even in low-light conditions, the brightness is modified to a usable level.

Manual adjustment of the brightness level is also supported.

1. From Inside Live view, click on the contextual menu.
2. Click on the top center button in the contextual pop-up.
3. A Brightness slider will show in the bottom of the Live View.
4. The Brightness can be adjusted by moving the indicator mark to the right or to the left on the slider.

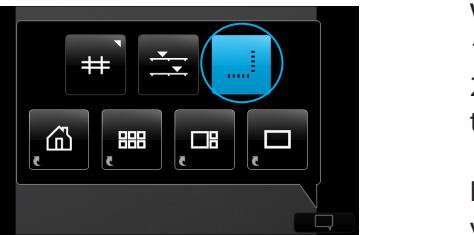

Virtual Horizon Tool in Live View

1. From Inside Live View, click on the contextual menu
2. Click on the top right button in the contextual pop-up. This will bring up two bars, one below the Live View, and one to the right.

Now you can align both roll and pitch using the indication on the bars, and you will get a clear indication when things are level.



Live View Anti-flickering

Depending on where you are located in the world, the power outlets operates at different frequencies. In general it is either 50Hz (EUR) or 60Hz (US and parts of Asia).

To minimize the amount of flickering when using Live View with artificial light, you can setup the screen redraw frequency to either 50Hz or 60Hz. This is setup in the menu "Live View Antiflickering".




6.0 Play Mode

Play mode is used to review captured images. Its touch screen interface makes it easy to delete, zoom, pan and browse through images quickly. Push the upper left (external) button or tap Play on the Home Screen to enter this mode.



Long press the upper left (external) button to exit the Play mode at any time.

6.1 Play Mode Views


There are three Play mode views: Full Screen, Tool View and Thumbnail View.

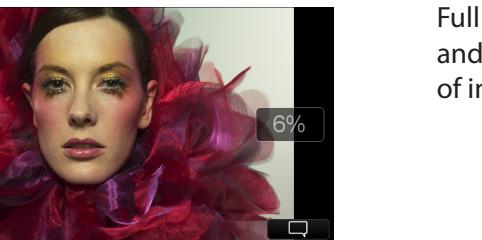

Full Screen displays an image in its entirety. A Zoom Slider, Context menu tool and zoom level percentage will automatically disappear after a few seconds of inactivity.

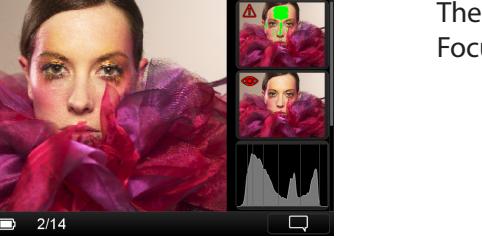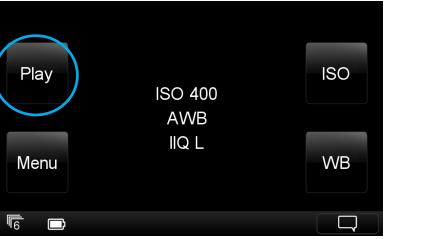

The default Tool View features five tools that include an Exposure Warning, a Focus Mask, an Exposure Histogram, an Alignment tool and File Info.

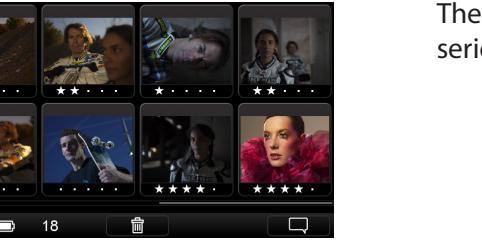


The Thumbnail View displays all images stored on a CompactFlash card in a series of 8 thumbnails.





6.2 Play Mode: Context Menu



Press the Context Menu button in the corner of each Play mode. All Context Menus feature three navigation buttons. Select one of the three bottom items (from left to right) to switch to an alternative view.

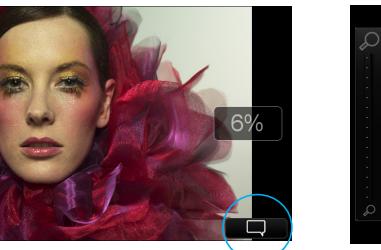


The Full Screen Context Menu features a Delete/Rating, Exposure Warning, Custom White Balance Picker and Grid options. Press and hold these icons (with a white triangle in the corner) to further configure.

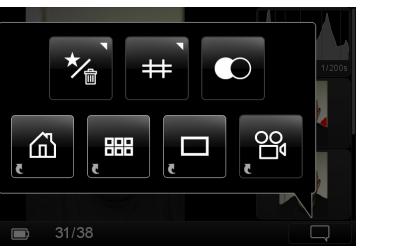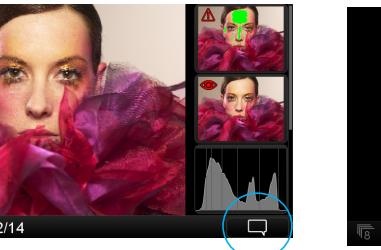

The Tool View Context Menu features a Delete/Rating, Grid and Black and White options.

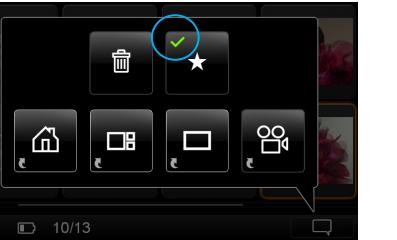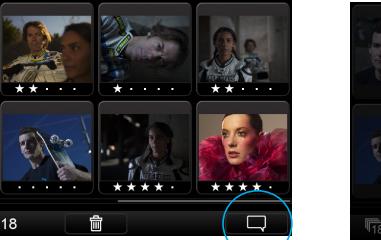

The Thumbnail View features a Delete and a Rating options. A green check mark will indicate that a button has been activated.

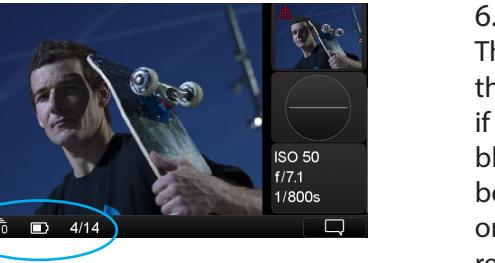

6.3 Info Bar


The bottom of the screen features an Info Bar that displays a Power Indicator that shows the remaining battery capacity and a FireWire or USB3.0 icon if the IQ2 is being used to shoot tethered. The Power Indicator will start blinking when it runs low to warn users that the battery needs to be replaced before capturing any more images. The FireWire or USB3.0 icon will also blink on and off to signify that there is a connection problem when set to their respective storage modes. (See Storage Mode on page 91)

Thumbnail and Tool View also display the current image number and the number of images captured on the media. In this example it shows number 4 out of 14 images.



6.4 Play Mode Navigation

Press the Up and Down (right external) buttons to scroll through captured images in all the Play modes. Press the upper and lower left external buttons to zoom in and out of an image or switch to a different Play mode.

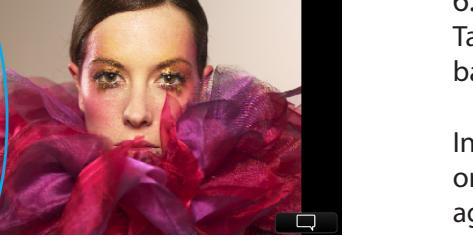


6.5 Zoom

Tap the screen once in the Tool View to see a Full Screen image. The IQ back enables users to zoom into a review image by up to 400%.






Instantly zoom into a specific area at 100% by tapping the screen twice or by pressing the lower left (external) button. Double tap the screen again or press the upper left button to return to the full screen view.

To zoom up to 400%, slide your finger up and down the Zoom Slider on the left side of the screen. Use the Zoom Slider to also return to the Tool and Thumbnail Views by sliding your finger down when a full screen image is displayed.







6.6 Delete and Rating

Choose the top left button in the Context . A grey bar will appear at the bottom of the screen when reviewing in Full Screen or in the Tool View. Tap the dot in the grey bar to select a star rating from 1 to 5. Alternatively, swipe your finger along the bar to choose a star rating. Press the blank grey area on the left of the bar to deselect a star rating to 0 (zero). Ratings will be recognized in Capture One when they are imported from a memory card.



To remove the Delete/Rating icon from view, press the Context menu icon and press the same top left button. Long press the Star/Trash icon in the Context menu to turned off the 'confirm delete' screen.

Star ratings can be seen in the Thumbnail view by pressing the Context menu and selecting the Star button.

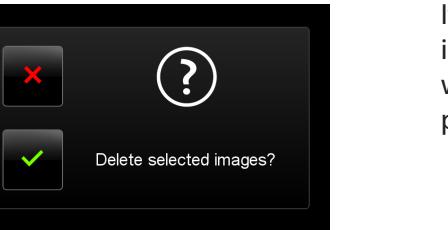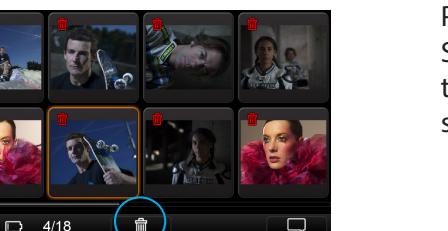
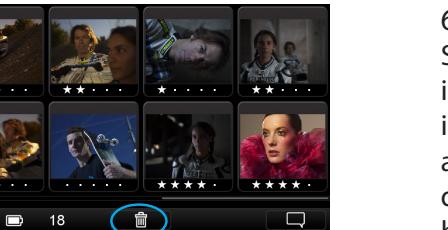
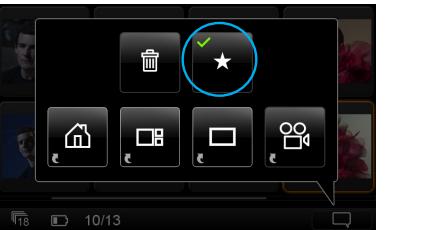


6.7 Delete in Thumbnail View

Select the trash icon to Delete images in the Thumbnail View. A trash icon will appear in the Info Bar at the bottom of the screen. Tap each individual thumbnail that you want to delete. (A small red trash icon will appear in the top left corner of the thumbnail). Confirm that you want to delete the selected thumbnails but tapping the white trash icon at the bottom of the screen.

Press the Context menu once the Delete option has been selected. Select the option below the trash icon to select all images files. (A red trash icon will appear in each thumbnail). Press the option below the star icon to deselect all the images.

If all the selected images have been selected, press the white trash icon at the bottom of the screen. You will be asked to confirm that you want to Delete all the selected images. Press the green check mark to permanently delete or press the red cross to cancel.

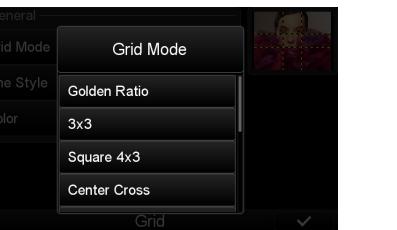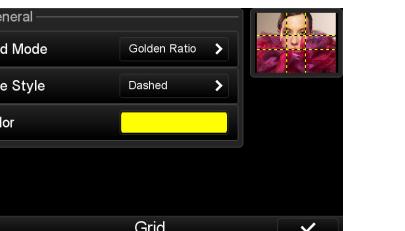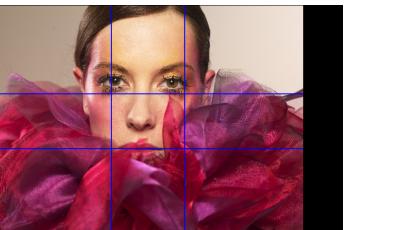

6.8 Grid



Select the Context Menu and choose the (circled) icon to overlay a grid on captured images in Full Screen, Tool View and Play modes. Press the Grid icon in Context Menu again to deactivate the Grid.

Long press the (circled) icon in Context Menu to configure the Grid. It is possible to select a different Grid Mode, Line Style and Color.


The Grid Mode enables users to select one of six options that include a Golden Ratio, 3x3, Square 4x3, Center Cross, Rectangular and Fibonacci Spiral. Scroll down the screen to see the full list and tap the desired option.

The Line Style can be changed from a solid Color to a Dotted or Dashed line.

Change the color of the lines to one of 9 tones to help them stand out against an image.

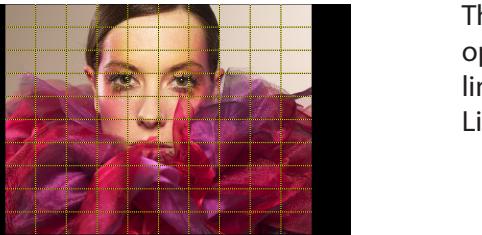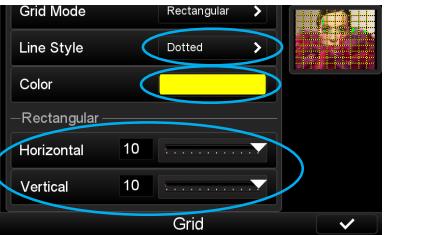



The Grid Mode provides numerous style combinations. The Rectangular option can be configured to display up to 10 horizontal and vertical lines. In this example (left) the Color has been changed to yellow and the Line Style is Dotted.

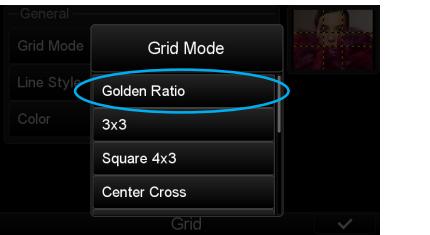


The Golden Ratio grid helps photographers compose images within some classic proportions. This grid lines divide the screen into nine parts using two horizontal and vertical lines. Photographers can position important elements along these lines or at the intersections.



The Fibonacci Spiral option is another classic guide that helps photographers place subject matter within the curved lines.

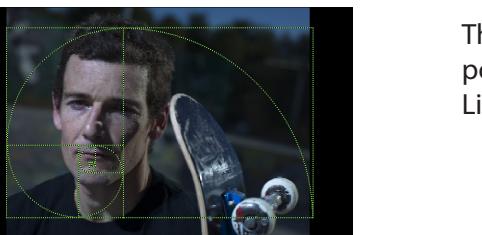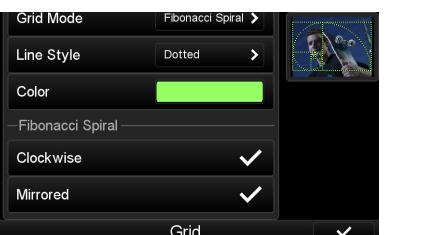

The Fibonacci Spiral option can also be rotated clockwise or Mirrored to help position important elements at the intersections of the lines. The Color and Line Style can also be altered to help them stand out against an image.


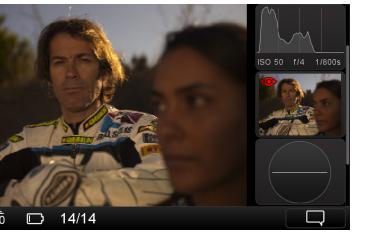


6.9 Tools

Play mode features five Tools to aid the capture and the review of images. The Tools include a Exposure warning, a Focus Mask, a Exposure Histogram, a Alignment tool and File Info. Tap the screen to scroll vertically through the tool selection. Tap the screen on the Alignment tool and Histogram to make them appear full screen. Tap the screen on the Exposure Warning, Focus Mask and File Info to make them overlay captured images. Tap each item again to remove them from the full screen or overlay view.


Configure the Tools

Long press a specific tool to configure a Tool's settings. The sequence of how the Tools appear can be changed by pressing the white arrows.

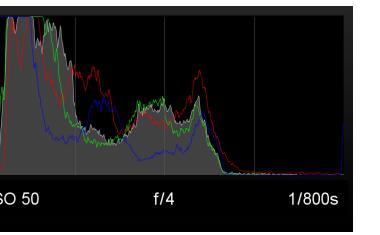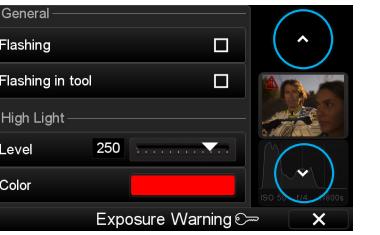


Histogram

Tap the Histogram once to make it appear full screen. The Exif information (ISO, f-stop and shutter speed) of a captured image is displayed below the Histogram. Tap the screen again to return to the Tool view.

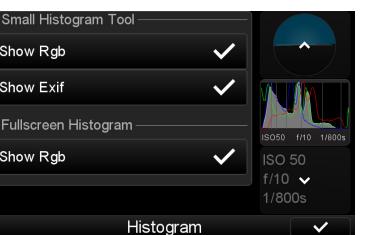

Long press the Histogram to access a dialog box to alter the Tool's settings. User can choose to show or hide the Rgb readout and Exif information.


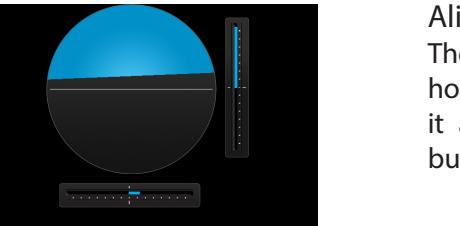


Alignment



The Alignment tool helps keep the attached camera in a perfect horizontal or vertical position. Press the Alignment tool once to make it appear full screen. Tap the screen or press the upper left (external) button once to return to the Tool view.



Long press Alignment tool to access a dialog box to alter the Tool's settings. Users can choose to view an illustrative virtual horizon or swap to see numeric Roll and Pitch Values displayed in the Tool. Tap the Beep On option box to get an audio alert that signals the camera is level.

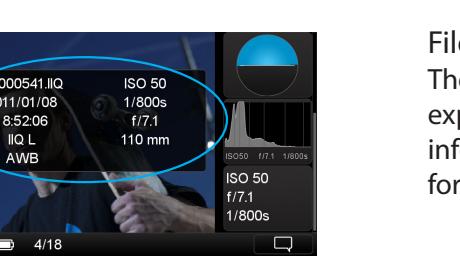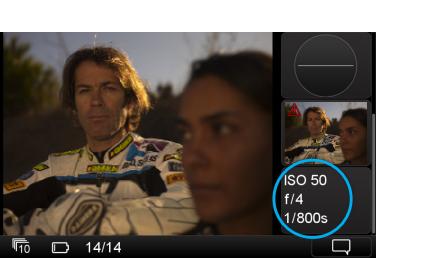

Ensure that the Roll and Pitch offset check mark box is not enabled to revert to the default horizontal or vertical alignment setting.

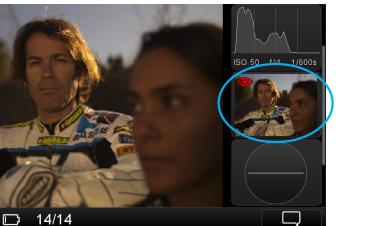



Exposure Warning

The Exposure Warning tool highlights areas of a captured image that are overexposed. Tap the Exposure Warning tool once to display any burned out areas of an image with a (default red) color overlay. Tap the Exposure Warning tool again to remove this overlay from view.




Long press the Exposure Warning to access a dialog box to alter the Tool's settings. Users can choose to set the Exposure Warning to flash on the overlay and on the tool. The Highlight level can be changed to make it more or less sensitive. The color of the warning can also be altered to one of nine tones to help it stand out against a captured image.

The Exposure Warning overlay can seen in a full screen and a zoomed in enlarged view. It will flash to alert users to areas in that may be overexposed. Go back to the Tool view to deactivate the overlay.

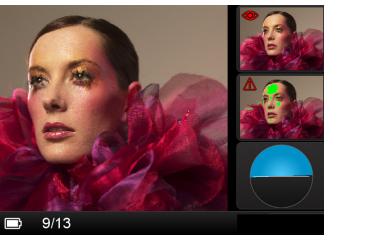

Focus Mask

The Focus Mask highlights areas that are in sharp focus. Tap the Focus Mask tool once to display any areas of sharp focus in an image with a (default green) color overlay. Tap the Exposure Focus Mask tool again to remove this overlay from view.



Long press the Focus Mask to access a dialog box to alter the Tool's settings. Users can choose to set the Focus Mask to flash on the overlay and on the tool. The Focus Mask can be adjusted to increase and decrease the threshold setting for the preferred sharpness. The color of the Mask can also be altered to one of nine tones to help it stand out against a captured image.





7.0 Menu








The Menu can be accessed by either pressing the lower left exterior button or by tapping Menu directly on the Home Screen.

The Menu can be navigated by using the touch screen functionality or by following the Enter, Exit, Up and Down arrows and pressing the corresponding buttons on the IQ2 back.

Long press the upper left (external) button to exit the Menu mode at any time.

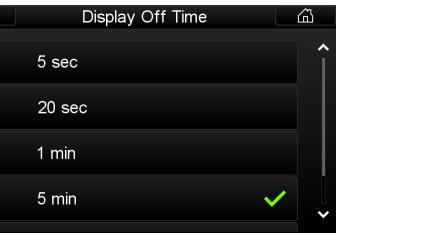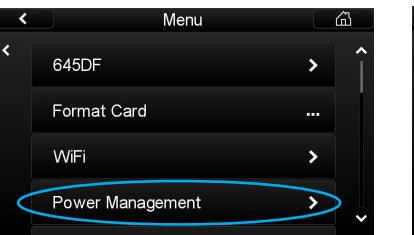

This section will explain the function of each Menu option. All the options in the Menu section have a default setting so that an IQ2 back is ready to use, straight out of the box. But the Menu has numerous options that can be used to configure the setup of the IQ2 back to your specific needs. Some options have submenus that are indicated by another arrow pointing to the right side as shown in the Power Management menu. (Left)

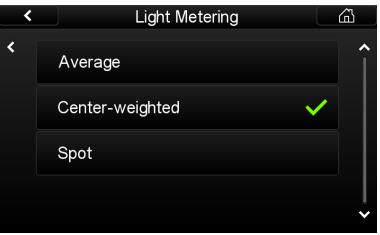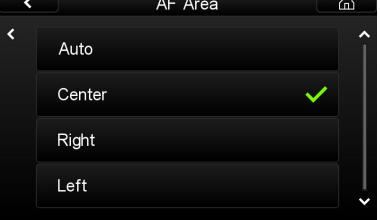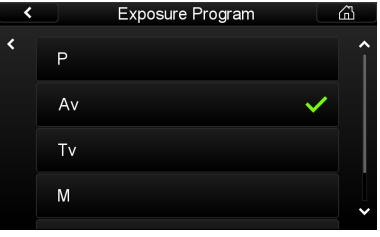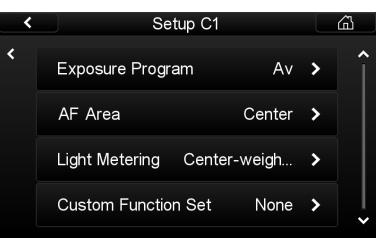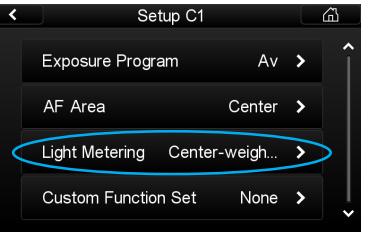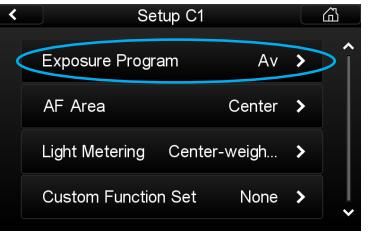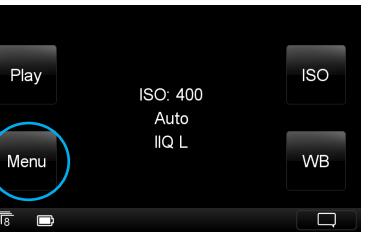

7.1 645DF+ Custom Functionality

When using the IQ back on the 645DF/DF+ camera custom functions are available for setup from the IQ screen. The custom functionality is accessed using Menu > 645 DF. The 645DF/DF+ camera body needs to be switched ON to access this menu.

Go to page 119 for more information about setting up the 645DF/DF+ custom functions from the camera body itself.

7.1.1 Setup C1, C2 or C3

Select Setup C1, C2 or C3 and choose the desired camera exposure, AF and light meter settings as detailed from 3.3 to 3.4.

7.1.2 Exposure Program

Choose either the X-Mode, P (Program), Av (Aperture Value), Tv (Time Value), or M (Manual) Exposure Program that you want to use.

Go to page 38 to find out more about the 645DF+ exposure modes.

7.1.3 AF Area







On the 645DF+ camera there is a single AF point in the center optimized to provide faster and more precise focus performance. This cannot be changed.

The 645DF has three AF points that can be selected individually. The Auto mode (also referred to as Multi Area Focus) will lock on to the object closest to the camera if multiple objects are located within the focus frame.

7.1.4 Light Metering

Select one of the three Light Metering modes.


Go to page 31 to find out more on the 645DF+ Light Metering modes.

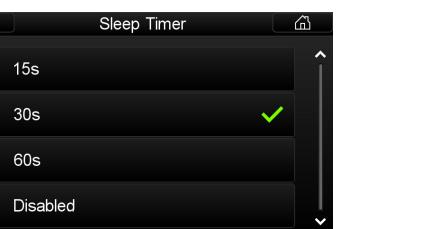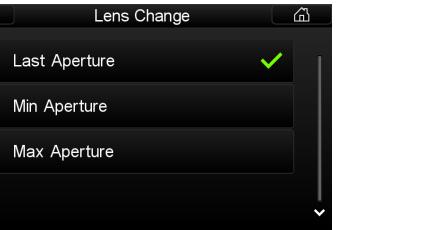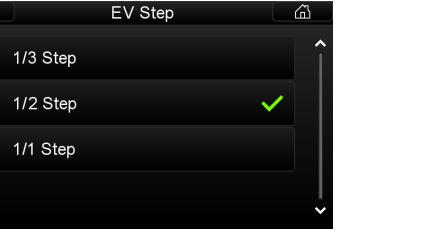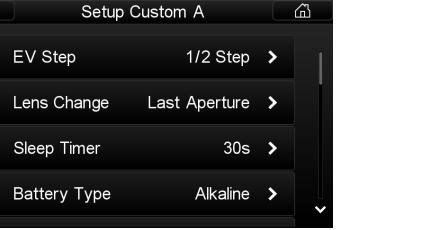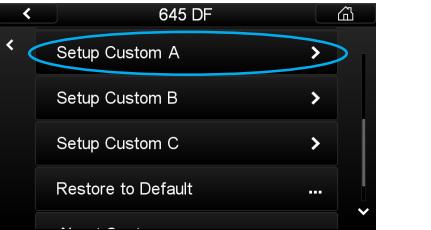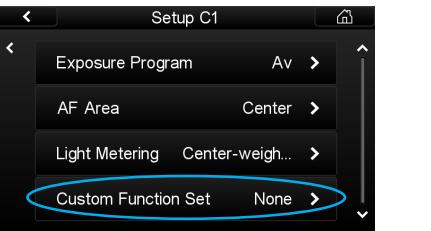

7.1.5 Custom Function Set


Assign the letter A, B or C to the chosen exposure mode settings in the Custom Function Set menu.

N.B. It is possible to see the selected Exposure modes settings from the Setup C1, 2, 3 menu without having to go into the next menu option.

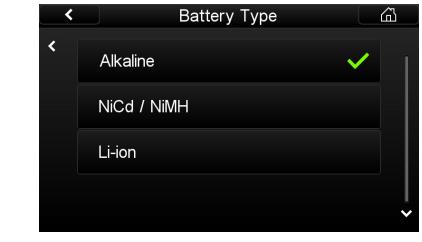


7.1.6 Setup Custom A, B or C

The Setup Custom menu enable users to adjust and select 19 camera parameters to attain a precise custom camera set-up. Select either A, B or C.

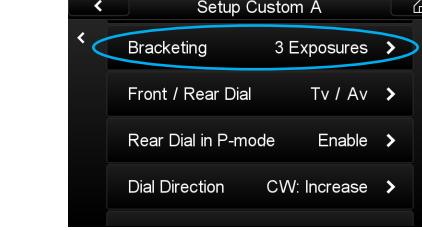



7.1.7 EV Step

Choose the size of increment adjustments concerning the shutter speed, f-number and exposure compensation value. For example, choose 1/1 Step to adjust the aperture value in full f-stop increments as follows: f2.8, f4, 5.6, f8, f11, f16, f22 etc. Alternatively, choose 1/3 Step to change the aperture setting in smaller increments as follows: f2.8, f3.2, f3.5, f4, f4.5, f5, f5.6, f6.3, f7.1, f8, f9, f10, f11, f12, f14, f16 and so on.

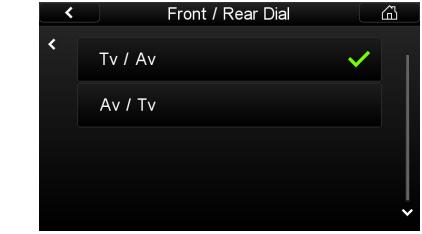


7.1.8 Lens Change

Choose the desired aperture setting option when a lens is changed on the 645DF+ body. The Last Aperture option adjusts the new lens aperture to the same setting as the previously used lens when it was removed. The Min Aperture setting will open the aperture to its fastest setting e.g. f2.8. The Max aperture choice automatically sets the new lens to its smallest setting e.g. f22

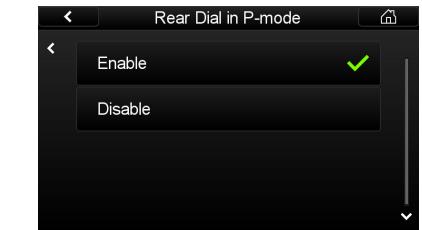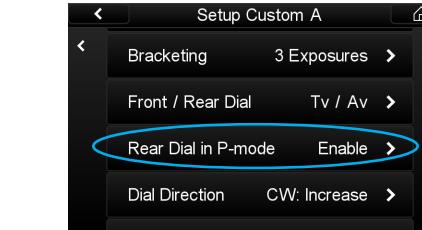

7.1.9 Sleep Timer

The Sleep Timer menu has three settings that will put the camera body into sleep mode after either 15, 30 or 60 seconds of inactivity after the camera power has been switched on (via the Drive Dial). This sleep function helps prolong the camera's battery life. Half or full press the camera's shutter button to wake the camera. Select the Disabled option to ensure the camera remains permanently on while the Drive Dial is set

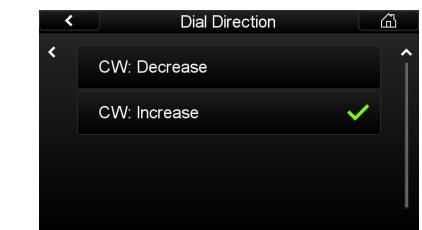

7.1.10 Battery Type

The Phase One 645DF+ can be powered by three different battery types. Select the battery type that you want displayed on the external LCD panel to ensure the remaining battery charge is correctly displayed.

7.1.11 Bracketing

Select 3, 5 or 7 Exposures as the bracketing width for the auto bracketing setting. Bracketing has to be activated via the 645DF+ camera body controls.

Go to page 109 to find out more on Bracketing.

7.1.12 Front / Rear Dial

Interchange the function of the front and rear dials when the 645DF+ camera is used in Manual exposure mode (M). Select Tv / Av to assign the front dial to adjust the shutter speed (Tv = Time value) and the rear dial to the Aperture value (Av). The Av /Tv reverses the aforementioned settings.







7.1.13 Rear Dial in P-mode

Assign which dial is used to alter the shutter and aperture value when shooting in Program (P) exposure mode. Select Enable to use the rear dial in P mode. Select the Disable option to activate the front dial.

Go to page 38 for more information about the Program exposure mode.


7.1.14 Dial Direction

Choose whether the front and rear exposure dials increase or decrease the shutter speed, f-number and exposure compensation when rotated in a clockwise (CW) direction.

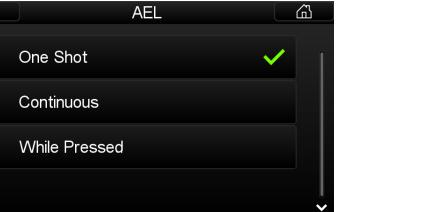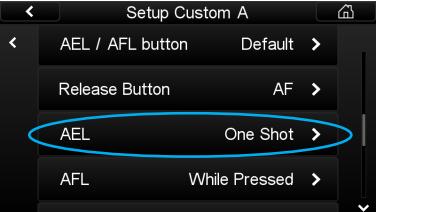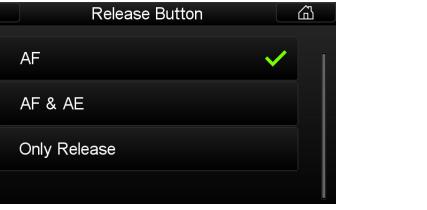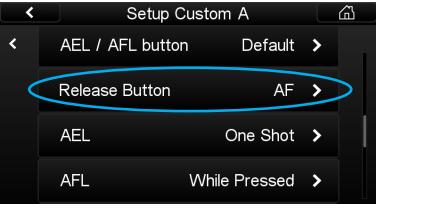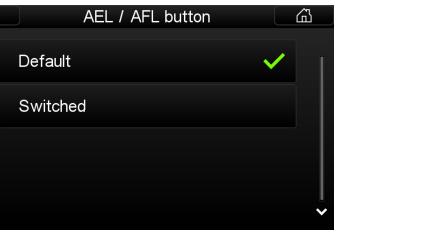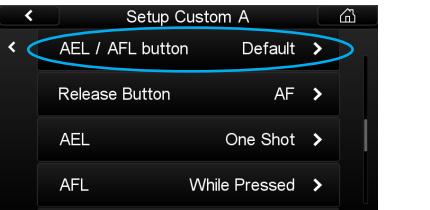

7.1.15 AEL / AFL button

Interchange the operations of the front and rear AEL (Auto Exposure Lock) and AFL (Auto Focus Lock) buttons. Find out the location of these buttons on page 21.

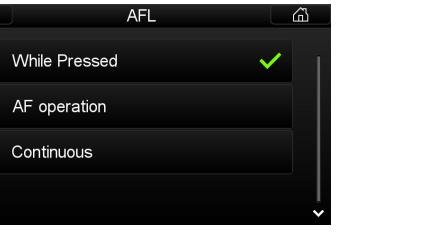



7.1.18 AFL

Set the function of the AF Lock button with one of the following options:

While Pressed: Press the AFL to lock focus once.

AF operation: This activates AF every time the AFL button is pressed. (It performs the same operation as half-pressing shutter button).

Continuous: Locks AF until the AFL button is pressed again.

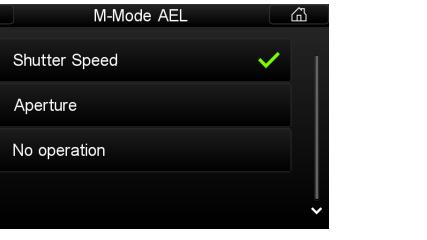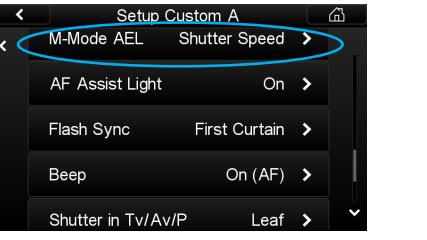



7.1.19 M-Mode AEL

Assign the AEL button to automatically set an aperture or shutter value when using M (manual mode). Ensure that the AEL button is pressed for at least 2 seconds to get an aperture or shutter value. Select one of the following options:

Shutter Speed: A recommended shutter speed will be set when the AEL button is pressed. The aperture setting will remain unchanged.





Aperture: A recommended f-number will be set when the AEL button is pressed. The shutter speed setting will remain unchanged.

No operation: This option will disable the AEL button in Manual (M) mode.

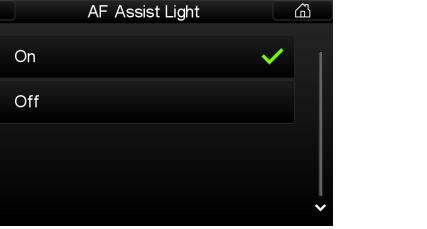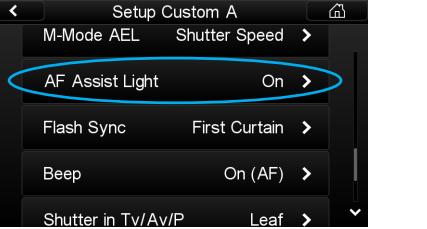



7.1.20 AF Assist Light

The AF Assist Light automatically functions to help the performance of Auto Focus (AF) when shooting in low ambient lighting conditions. The AF Assist Light can be switched off from this menu. (The AF Assist Light is likely to be switched off when a flashgun with its own AF Assist lamp is used with the 645DF+ camera).

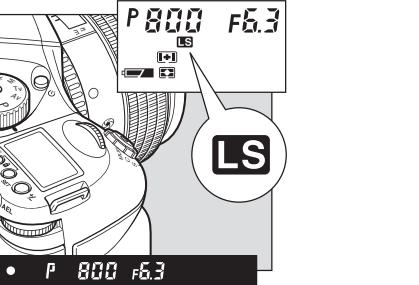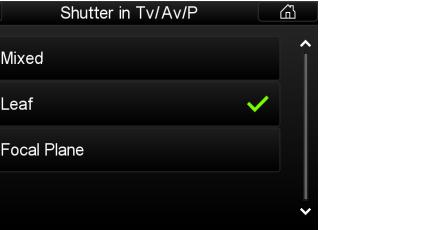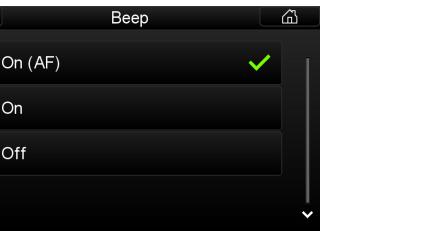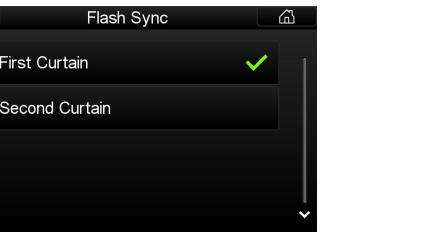

7.1.21 Flash Sync

The Flash Sync (synchronization) can be altered to fire at the beginning (First Curtain) or the end (Second Curtain) of an exposure. The First Curtain mode is the default setting as it is the most commonly used.

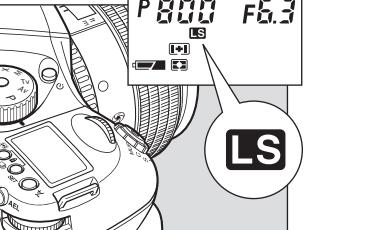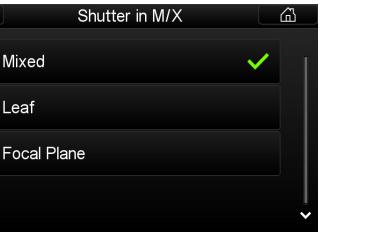

7.1.24 Shutter in M/X


This menu is applicable when a Phase One 645DF+ camera is used in either M or X exposure modes with a leaf shutter lens. Using the X (flash synchronization) mode limits the shutter speed range from 1/60th second to 1/125 second irrespective of the selected (Mixed, Leaf or Focal Plane) mode. Select Manual (M) mode and select one of the following options:

Mixed: The leaf shutter range from 1 second to 1/1600th second are selected. Shutter speeds above and below that range use the focal plane shutter. Flash synchronization is possible on all leaf shutter speeds.

Leaf: Shutter speeds are limited to a leaf shutter range from 1 second to 1/1600th second. Flash synchronization is possible on all shutter speeds.

Focal Plane: Shutter speeds range from 1 minute up to 1/4000th second. Flash synchronization is only possible from 1/60th to 1/125 second. (Depending on the flash being used).

N.B. The LCD screen on the Phase One 645DF+ will either display a LS (Leaf Shutter) or FS (Focal Shutter) icon to correspond to the shutter speed or custom camera setting.



7.1.22 Beep

Choose when an audio beep is sounded from the Phase One 645DF+ camera body. Select one of the following options:

On (AF): A beep is sounded when the Auto Focus is set.

On: A beep is sounded when the Auto Focus is set or when any button is pressed on the 645DF+ camera.

Off: The beep sound is disabled.

7.1.23 Shutter in Tv/Av/P

This menu is only applicable when a Phase One 645DF+ camera is used in either Tv, Av or P exposure modes with a leaf shutter lens. Select one of the following options:

Mixed: The leaf shutter range from 1 second to 1/1600th second are selected. Shutter speeds above and below that range use the focal plane shutter. Flash synchronization is possible on all leaf shutter speeds.

Leaf: Shutter speeds are limited to a leaf shutter range from 1 second to 1/1600th second. Flash synchronization is possible on all shutter speeds.

Focal Plane: Shutter speeds range from 1 minute up to 1/4000th second. Flash synchronization is only possible from 1/60th to 1/125 second. (Depending on the flash being used).



N.B. The LCD screen on the Phase One 645DF+ will either display a LS (Leaf Shutter) or FS (Focal Shutter) icon to correspond to the shutter speed or custom camera setting.

7.1.25 AF priority

Select one of the following AF (Auto Focus) priority options:


Speed: This mode is ideal when capturing moving subject matter.

Accuracy: This is the default setting. It is particularly recommended when the Phase One 645DF+ is used with a lens with a long focal length.

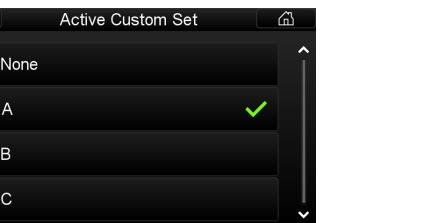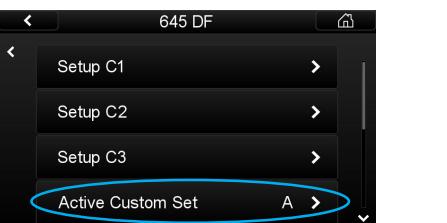



Active Custom Set

the desired Custom Set for use.

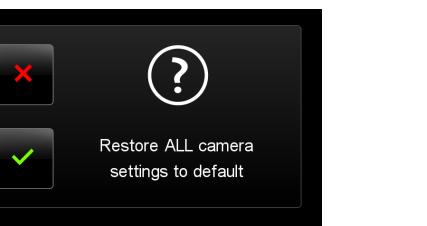



[Restore to Default](#)

Restore to Default to clear and reset all the current custom settings to the default. Warning! This cannot be undone once selected.

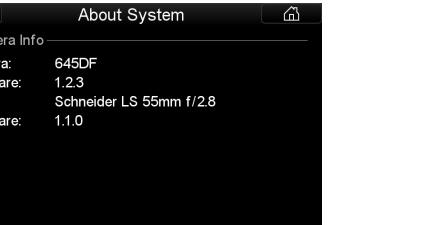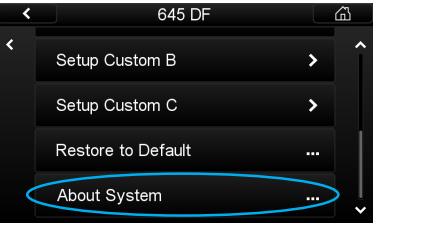



About System

Your screen displays the make and model of the camera and lens being used, the IQ2 back. Remember to check the camera firmware number and download the latest version. Go to www.phaseone.com/downloads to get the latest firmware version for the 645DF+ camera and IQ2 back.

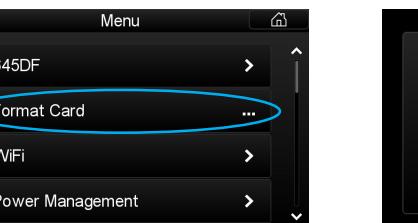

7.2 Format Cards

Select Format Card to erase all data on a memory card. Memory card formatting is done in either FAT 16 or FAT 32 depending on card size. (Older cameras support CompactFlash cards formatted in both FAT 16 and FAT 32).

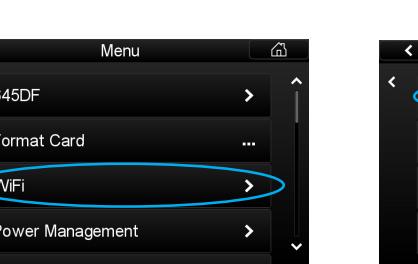

7.3 WiFi

All IQ2 digital backs can connect wirelessly with an iOS device like an iPad or iPhone®. Before you start, download and install Capture Pilot on your iOS device from the Apple App Store.


There are two primary ways to connect your IQ2 digital back to an iOS device direct for a range of up to 8m/25ft or via a router for a range up to 30m/100ft.






Wireless camera operation is available using the optional Camera Control feature. Please note an in-app purchase is required for Capture Control.

Connect directly using Adh

- . Go to Menu>WiFi>Mode and tap the Adhoc option. This will publish network with default name "PhaseOne[serial number]"
 - . From the iPad®/iPhone®: General>WiFi>Connect to network:
PhaseOne[serial number]"
 - . Start Capture Pilot and select the "PhaseOne[serial number]" under Local Servers

L.B In the iPad Wi-Fi settings use the > icon to unfold the network settings of the IQ2 network – then switch on the "Auto-Join" to ensure that the connection will always reconnect if it loses connection.



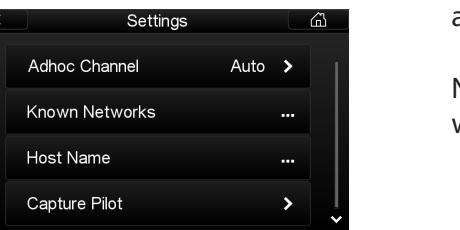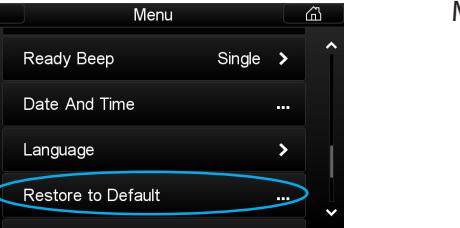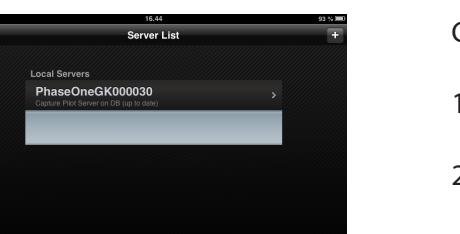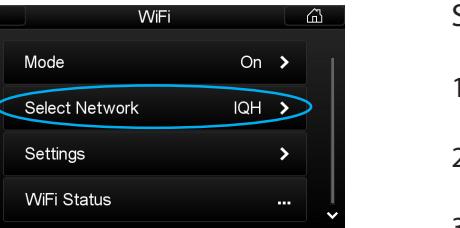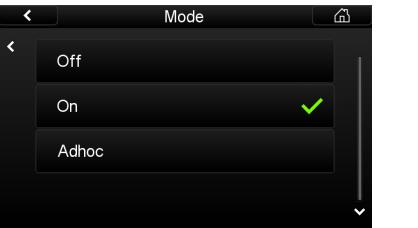

Setting up your IQ2 to connect via Router

1. Turn on WiFi: Menu>WiFi>Mode>On
2. Select network: Menu>WiFi>Select Network
3. Type user name and password as prompted from the network.




Connecting Capture Pilot to your IQ2 when using router:

1. From General>WiFi: Select same network as selected on IQ2
2. Open Capture Pilot.
3. Select "PhaseOne [seial number]" under Local Servers in Capture Pilot

To reset all WiFi settings, including all network settings and pin code use:
Menu>Restore to Default

On the IQ260 you can change the hostname, set a pin code or select a specific network channel under: Menu>WiFi >Settings

N.B. Only basic ASCII (i.e. basic English) characters are supported when working wirelessly with host names, user names and passwords.

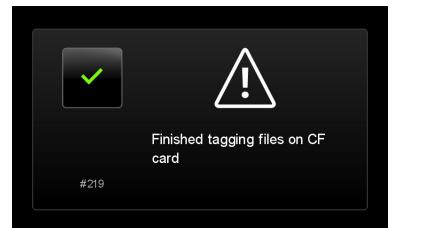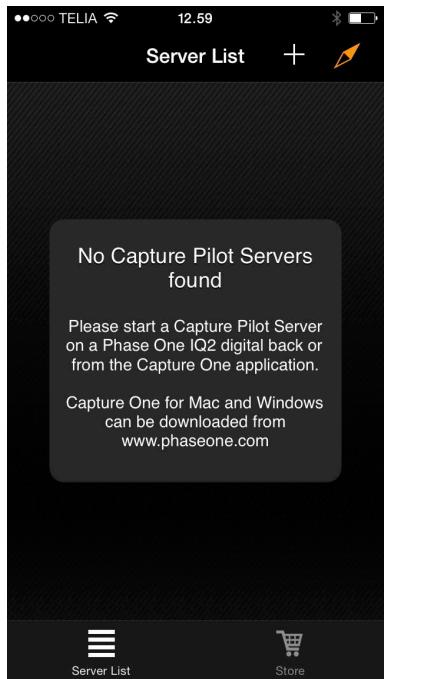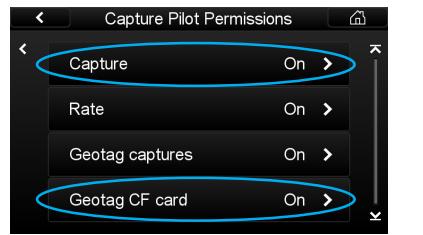

Enabling Location Data in Capture Pilot

Location data is enabled inside the menu WiFi > Setting > Capture Pilot > Capture Pilot Permissions

1. Set the "Geotag captures" to "On", to let the IQ2 back geotag captures when connected wirelessly with Capture Pilot.
2. Set the "Geotag CF card" to "On", to let the IQ2 back geotag images when connecting after a shot or on all cards inserted into the CF slot

Tagging files with location data via Capture Pilot

You do not need to be connected to Capture Pilot while you shoot. With the "Geotag CF card" turned on as described above, Capture Pilot can run in the background on your iPhone/iPad without being connected to the IQ2 back.






To tag the files after the shoot, you then connect the IQ2 back, and all the files on the CF-card are tagged with the corresponding coordinates matched by the shooting time.

To get location data into your files after the shoot do the following.

1. Before Shooting - start Capture Pilot and click on the compass needle in top right corner, so that it is enabled (orange).
2. Now you can just leave it running in the background until after the shoot.
3. Once you connect your IQ2 back to Capture Pilot – the files on the CF-card in the IQ2 back will be tagged.
4. If you have multiple cards that you have captured to, you can just insert the cards one by one. Capture Pilot and the IQ2 back will tag the files for you.


Confirmation that the files on the CF-Card are tagged

You will see this dialog on the IQ2 back when it is finished tagging the files.

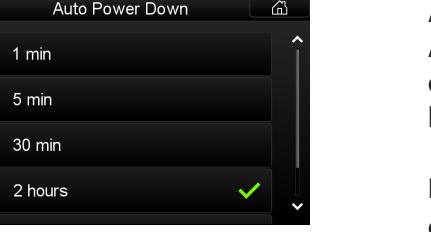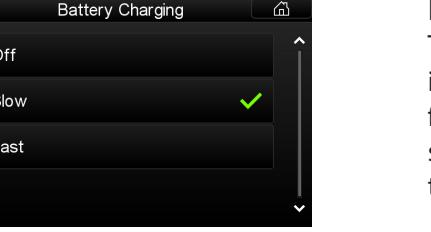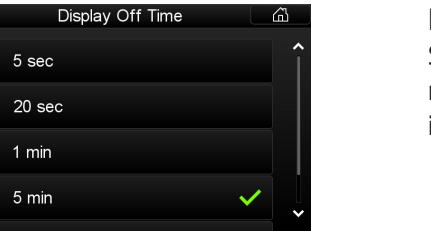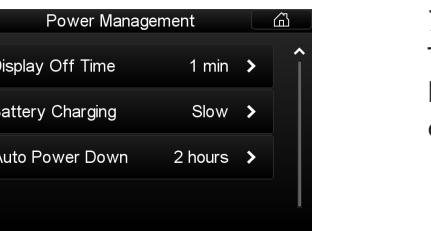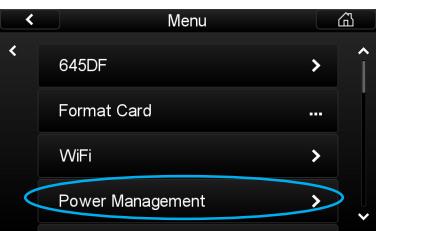

7.4 Power Management

The Power Management menu option has three criteria to help preserve battery life and help keep operating temperatures low when working in hot conditions.

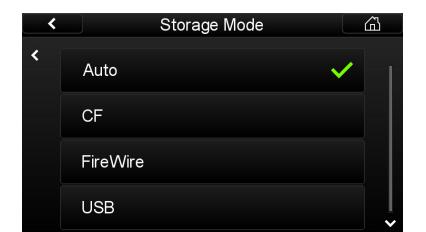

Power-Up and Down from 645DF+

1. Turn on the 645DF+, and the IQ2 back will automatically power up.
2. Turn off power on the 645DF+ and the IQ2 back will power down after 10 seconds, unless it is interrupted manually on the screen or by pushing a button.

This feature is not fail proof, and if operated quickly in sequence, the back may not power on or off properly.

If you want to disable this feature - this can be achieved via the Power Management menu.

Display Off Time

Switch off the IQ's display screen after 5 seconds, 20 seconds, 1 minute, 5 minutes. The display can also be set to remain permanently on while the IQ is in operation with the Always On option.

Battery Charging

The IQ back has an integrated battery charger to ensure that the battery is charged when shooting tethered via a USB or FireWire connection. This function can be switched off or set to Slow or Fast. The Slow and Off settings should be chosen to preserve the battery life of a laptop when shooting tethered.

N.B. The battery will only charge via a USB or FireWire connection when the IQ back is switched on. Please note that most USB ports cannot provide enough power to charge the battery inside the back while working or while in standby, however battery life is prolonged during charging. This is a limitation with the current USB2.0 and USB3.0 technology. If the back is powered off while connected to USB, it will continue to charge. Battery charging is indicated by an orange LED on the rear of the back when it has been turned off.

Auto Power Down

Auto Power Down determines the amount of time before the IQ back shuts down, when there is no activity. Choose 1 minute, 5 minutes, 30 minutes, 2 hours or deactivate this function by selecting Off.

Press the Power button to switch on and restart the IQ back after it has shut down.

7.5 Check Disk









A disk check is performed on every memory card that is inserted into the IQ2 back. Phase One recommends leaving this feature turned on, to maximize data security on the memory cards. This feature can be deactivated in this menu. Read more about the Phase One Secure Storage System (3S) on page 56 of this User Guide.

7.6 Storage Mode

This option allows users to configure how an IQ2 back should store the captures created. Auto is the default storage setting and it will detect and automatically store images files to a memory card if it has been inserted in the IQ2 back.

If the IQ2 back is being used to shoot tethered, it will store image files directly to the computer via the connected USB2.0 or FireWire 800 cable. The USB2.0 or FireWire will have priority if a card is in the IQ2 back at the same time as it is connected by USB2.0 or FireWire to a computer.

N.B. The IQ2 back can be made to shoot to either CompactFlash or to a computer, via a FireWire 800 or USB2.0 or cable, by selecting CF, USB2.0 or FireWire respectively. An Error Message will appear on the IQ2 screen if the IQ2 back is not tethered to a computer and the IQ2 card slot is empty.

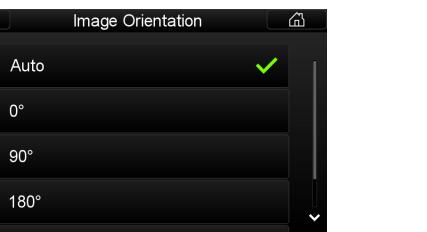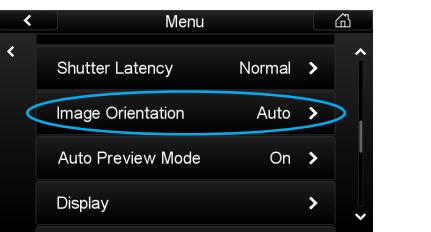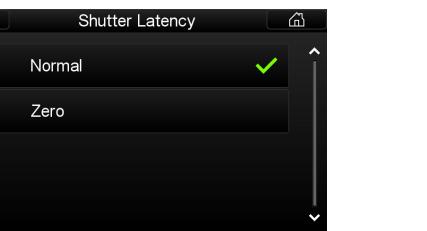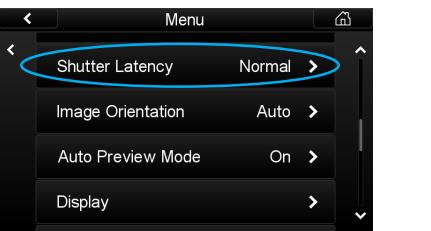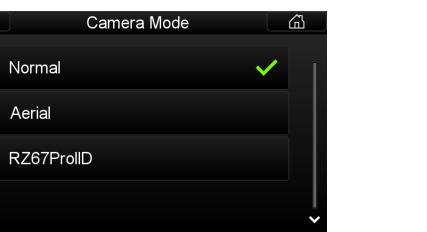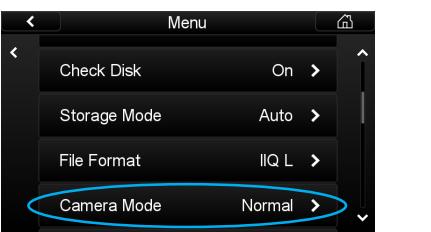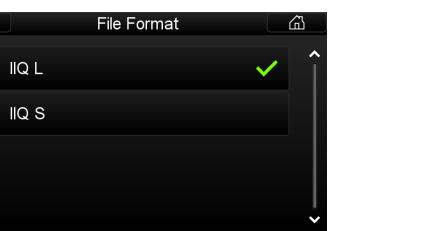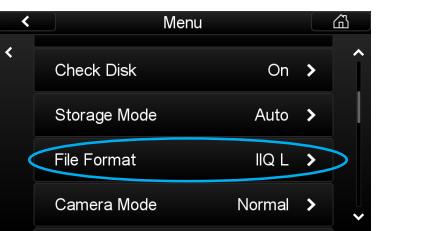

7.7 File Format

An IQ back can save files in two different formats; IIQ Raw L and IIQ Raw S. IIQ stands for Intelligent Image Quality Raw. IIQ L is the default setting and it is a lossless capture format. IIQ S is a smaller file that is not a totally lossless format. The IIQ L is approximately 1/3 file size of a processed TIFF file. IIQ S is approximately 1/5 of a processed TIFF.

7.8 Camera Mode

There are two primary choices in the Camera Mode menu. Mamiya mount IQ backs have three choices. Select one of the following options:

Normal: The recommended default setting.

Aerial: This mode is design for highly specialist purposes only. It is not recommended for use without consultation. Contact your Phase One dealer to find out more about the Aerial mode.

Warning! Images will be degraded in the Aerial mode unless used with specialist hard/software.








RZ67ProIID: This mode is designed to optimize the IQ back's operating performance with the Mamiya RZ67 Pro IID camera body.

7.9 Shutter Latency

The IQ CCD is put to sleep to reduce power consumption when it is not in use. The IQ needs to wake up before shooting and the timing of this wake up signal is referred to as the Latency. The recommended setting is Normal Latency if the IQ is used with the Phase One 645DF+. Only change to Zero Latency if you work on technical, large format cameras or certain manual cameras in special situations. Find out more in the Appendix from page 141.

7.10 Image Orientation

The Image Orientation function sets and stores the orientation of all subsequently captured images. Select 0, 90, 180 or 270 to force the back to mark images as captured with that orientation. The Auto setting uses the back's built in orientation sensor to determine the orientation at the moment of capture. Changing this setting will not affect how captured images are displayed on the LCD.

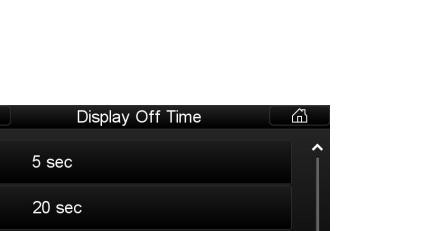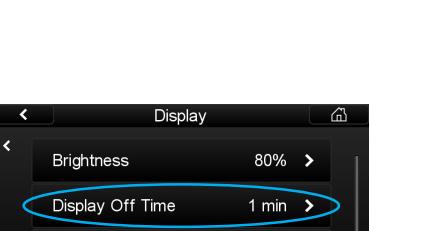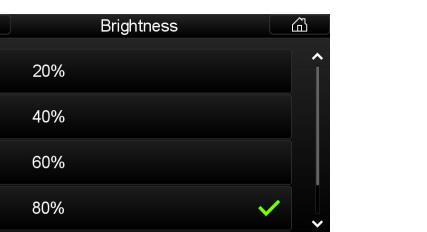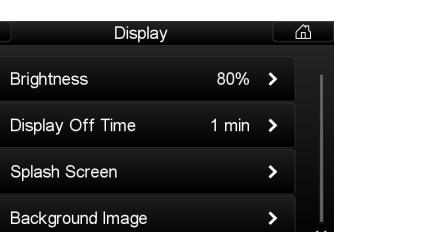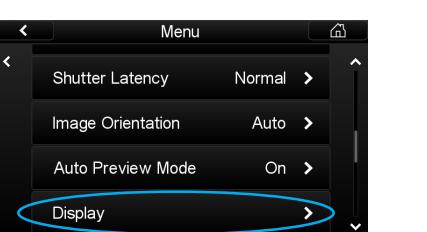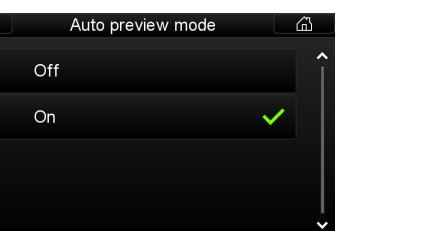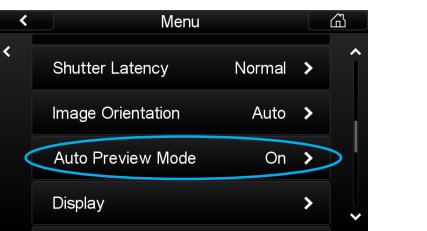

7.11 Auto Preview Mode

The Auto Preview option can be switched On or Off. Select On to revert to a Play mode when shooting. Select Off to remain on the same display.

7.12 Display

The Display menu option has four options: Brightness, Display Off Time, Splash Screen and Background Image. (See below and page 88 for more details).


Brightness

Set the brightness of the preview LCD screen to suit ambient viewing conditions. The default setting is 80% but in bright outdoor illumination this can be increased up to 100%. Users may choose to lower the Brightness when working in low light environments, such as a photographic studio.

Altering the Brightness setting will only affect the brightness of the screen. It will NOT affect the Exposure Warning, Histogram and exposure of a final capture.

Display Off Time






Switch off the IQ's screen after 5 seconds, 20 seconds, 1 minute, 5 minutes. The display can also be set to remain permanently on while the IQ is in operation with the Always On option.

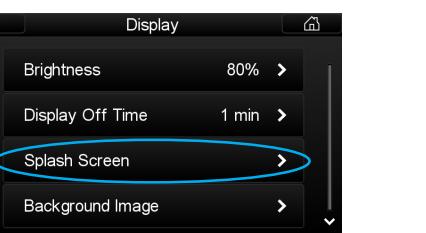


Splash Screen

Follow the proceeding steps to customize the splash screen on the IQ back.

1. Save the image file to a maximum 800 x 480 pixels resolution (landscape format). A smaller file will also be accepted and placed in the center of the screen with the surrounding space filled with black.

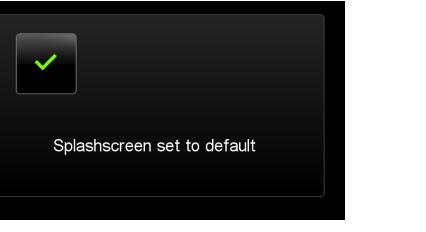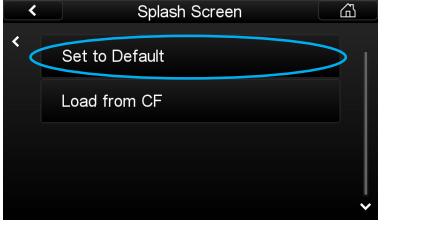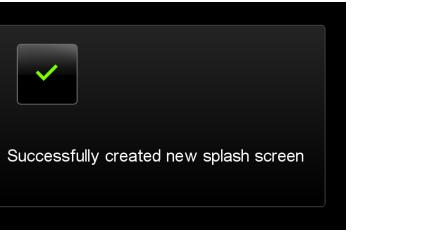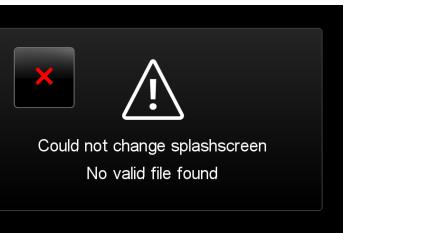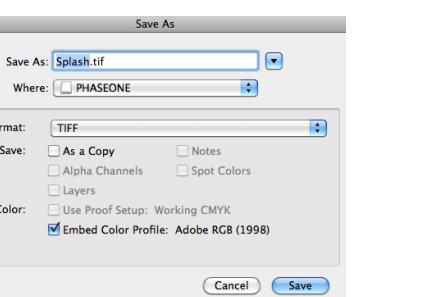







6. Select Set to Default to remove the selected splash screen and return to a blank black splash screen. A confirmation screen will appear stating that a 'Splashescreen set to default'.

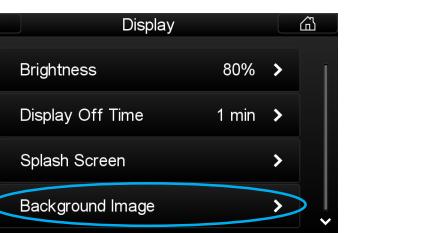



Background Image

Customize the background image on the IQ back Home Screen.

1. Save the image file to a maximum 800 x 480 pixels resolution (landscape format). A smaller file will also be accepted and placed in the center of the screen with the surrounding space filled with black.

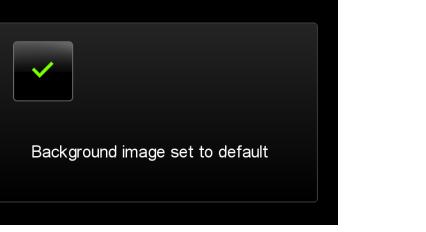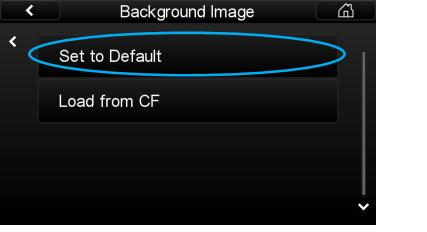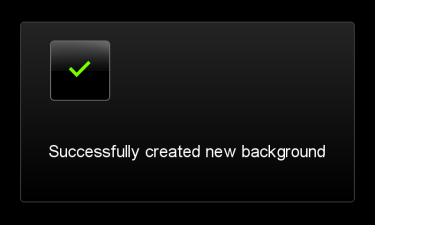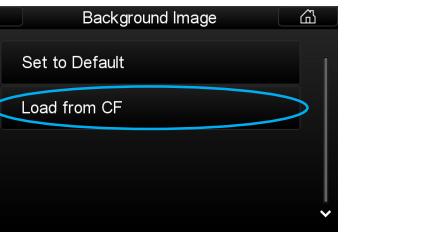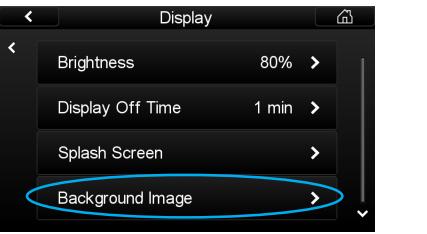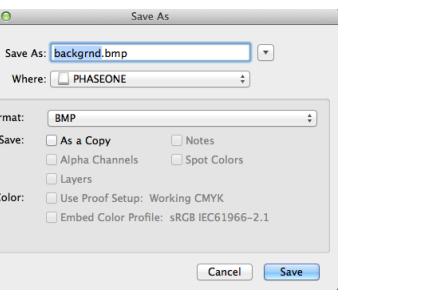

5. Select Set to Default to remove a background image and return to a blank black Home Screen. A confirmation screen will appear stating 'Background image set to default'.

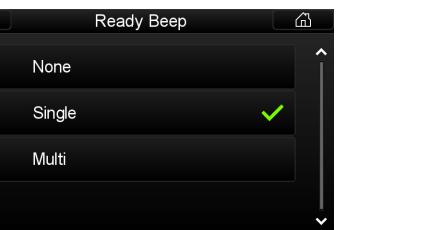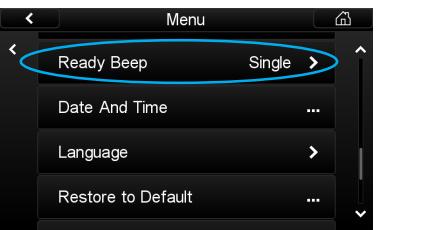

7.13 Ready Beep



The IQ back will emit a small audio beep after every capture is taken. This Ready Beep signals that a capture has been completed, and that the IQ back is ready for next shot.

The Ready Beep can set to either None, Single or Multi. The default setting is Single. Multi is ideal for use in noisy surroundings. None deactivates the audio Beep noise.




7.14 Date and Time

Set the Date and Time to your local time zone. The default Date and Time is GMT+1. Tap the screen and scroll through the numbers to attain the appropriate date and time. Tap the check mark icon, which will appear in the bottom right hand corner of the screen to confirm your entry. The time and date is applied to the EXIF data in all files captured with the IQ back.

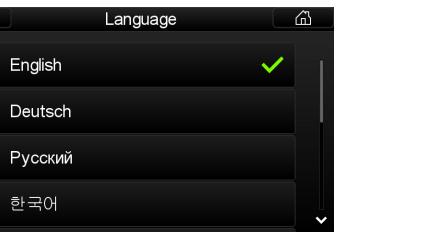
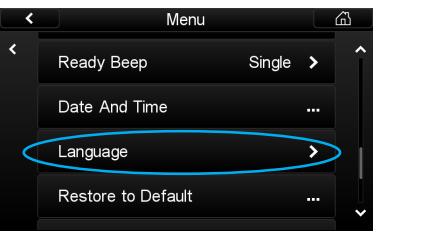


7.15 Language

Is it possible to change the default English language setting for the IQ user interface and menu system to one of nine others including German, French, Swedish, Italian, Spanish, Chinese (simplified), Japanese, Korean and Russian.


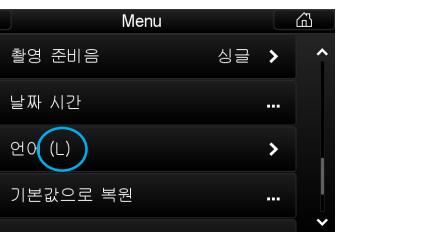


N.B. If a language is selected that is not understandable, select the menu option with the '(L)' to reselect. (See example circled left)

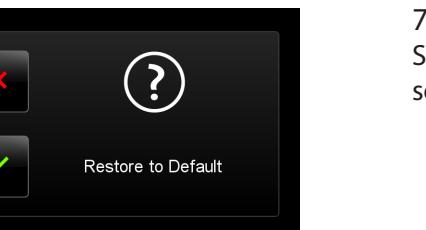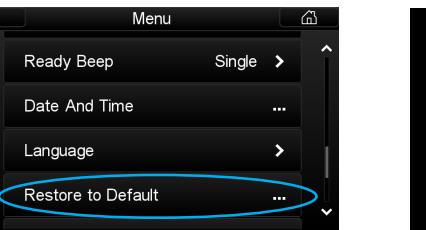



7.16 Restore to Default

Select Restore to Default to restore the IQ unit back to its default factory settings. Caution! All previous settings will be lost.

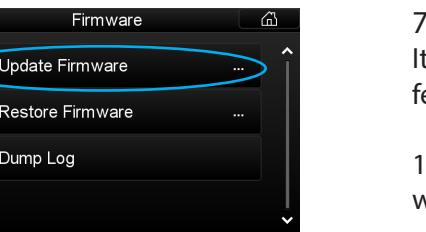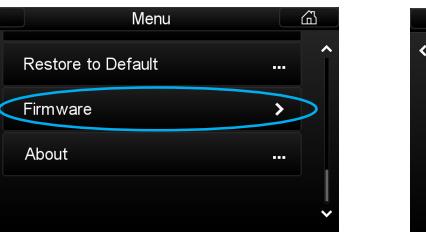

7.17 Firmware

It is important to keep the IQ's firmware up-to-date to ensure you get new features and remove any bugs or errors from previous firmware versions.

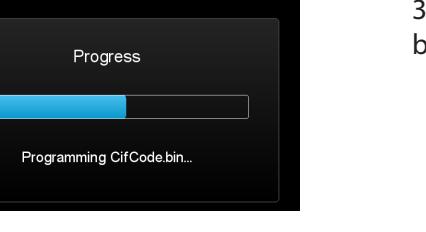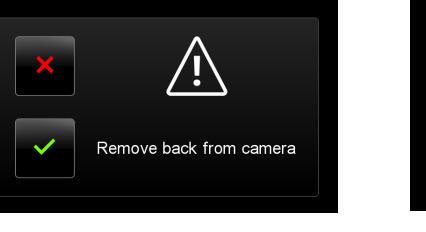









1. Download the latest firmware update from www.phaseone.com/downloads

2. Transfer the firmware (.fwr) file to a CompactFlash card and insert it into the IQ's card slot. Go to Menu > Firmware > Update Firmware. It is not possible to update the firmware unless the digital back battery is fully charged. A warning screen will appear if the battery life is too low. (See far left). Tap the green check mark to install the firmware. (See left).

3. Ensure that the IQ back has been removed from the camera. A progress bar will appear on screen during installation.

4. A confirmation screen will appear once installation is complete. The IQ back will automatically restart itself.

N.B. It is best practice to perform a hard reboot of the digital back after the update is complete by unplugging and reinserting the battery.

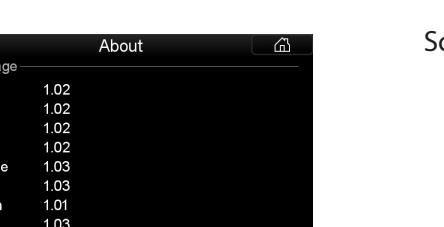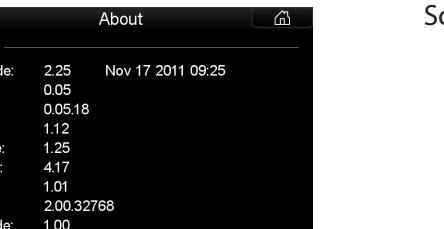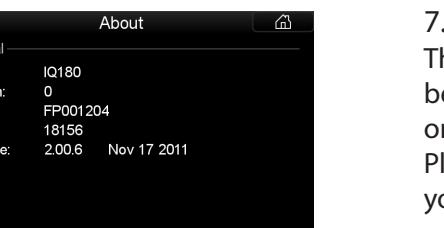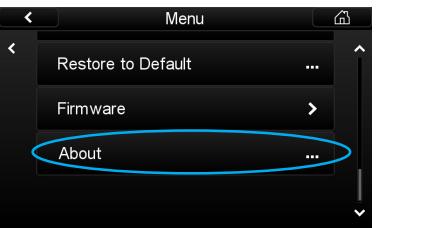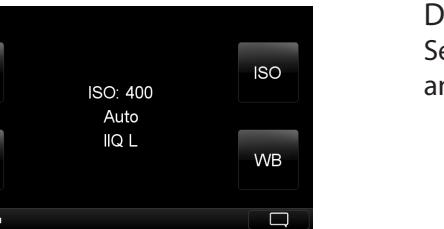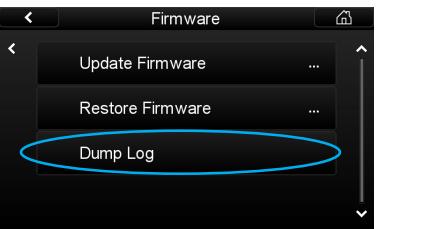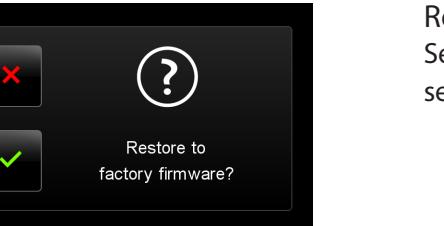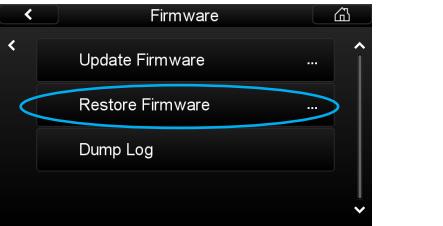

Restore Firmware

Select Restore Firmware to revert to the factory firmware version. (Camera settings are not affected).

Dump Log

Select Dump Log to transfer Log information to a CompactFlash card for analysis.

7.18 About

The About menu displays technical information about the hardware and embedded firmware in the IQ back. This is especially useful if support is needed or if you want to check if Phase One is offering a newer firmware update. Please make a note of the About menu contents (see left) before contacting your dealer or Phase One Support.

Scroll down the screen to reveal Internal technical data.

Scroll to the bottom of the screen to reveal Language version information.



8.0

IQ2 Digital Back Overview



IQ280

The IQ280 is the pinnacle of image quality; it's made for extraordinary captures. It can deliver long exposures of up to one hour and produce highly detailed 60 megapixel captures with outstanding image quality that are virtually noise free.



Sensors

Lens Factor

CCD size effective

Active pixels full resolution

Active pixels Sensor⁺

Pixel size (micron)

Resolution (megapixels)

Light sensitivity (ISO)

Exposure time

Image quality

Capture time (frames per sec.*)

Image buffer

Wireless

Display

| Full res. | Sensor ⁺ | Full res. | Sensor ⁺ | Full res. |
|---|------------------------|---------------------------|---------------------------|---------------------------|
| 5.2 x 5.2 | 10.4 x 10.4 | 6 x 6 | 12 x 12 | 6 x 6 |
| 80 | 20 | 60 | 15 | 60 |
| 35 - 800 | 140 - 3200 | 50 - 800 | 200 - 3200 | 200 - 3200 |
| 1/10,000 sec. - 2 minutes | 1/10,000 sec. - 1 hour | 1/10,000 sec. - 2 minutes | 1/10,000 sec. - 2 minutes | 1/10,000 sec. - 2 minutes |
| 16bit-OptiColor+, 13 f-stops Dynamic Range | | | | 13 f-stops |
| 0.7 | 0.9 | 1.0 | 1.4 | 1.0 |
| 1 GB Advanced high speed RAM | | | | |
| 2.4 Ghz and 5Ghz; range up to 8 meters in Adhoc mode, up to 30 meters with Router. | | | | |
| 3.2" touch screen with 1.15 megapixels, 290 ppi(dpi), 16 million colors, 170° viewing angle | | | | |

*) Maximum expected performance. The actual performance will be dependent on the camera model and on the camera and digital back capture modes.

Content is subject to change without notice

IQ260

The IQ260 goes beyond the norm; it's made for extraordinary captures. It can deliver long exposures of up to one hour and produce highly detailed 60 megapixel captures with outstanding image quality that are virtually noise free.

IQ260 Achromatic

The IQ260 Achromatic offers pure black and white images; no filters or interpolation applied. The 60 megapixel captures are stunning and pin sharp. There are endless opportunities to create very distinct imagery both for artistic and scientific purposes.

8.0

IQ2 Digital Back Overview Continued

**IQ250**

The IQ250 has the widest useable ISO range of any high-end digital back. With a 44 x 33 mm CMOS sensor, it can deliver high quality, low noise captures up to ISO 6400 and long exposures of up to one hour. Unique images may be captured in available light at anytime.

Sensors**Lens Factor**

1.3

CCD size effective

44 x 33 mm

Active pixels full resolution

8280 x 6208

Active pixels Sensor⁺

-

Pixel size (micron)
Full res.
5.3 x 5.3
 Resolution (megapixels)

50

Light sensitivity (ISO)

100 - 6400

Exposure time

1/10,000 sec. - 1 hour

Image quality

14 f-stops

Capture time (frames per sec.*)

1.2

Image buffer

2 GB Advanced high speed RAM

Wireless

2.4 Ghz and 5Ghz**

Display

3.2" touch screen with 1.15 megapixels

^{*)} Maximum expected performance. The actual performance will be dependent on the camera model and on the camera and digital back capture modes.

^{**) Range up to 8 meters in Adhoc mode, up to 30 meters with Router. Content is subject to change without notice}

8.1

IQ280 Digital Back Specifications



- 80 megapixel resolution for extreme detail level
- 645 full-frame CCD
- Built in wireless technology
- Extreme 13 f-stops dynamic range
- 1.15 megapixel resolution 3.2" display with vibrant colors
- Touch screen functionality to pan, browse and zoom up to 400%

IMAGING TECHNOLOGY

| | |
|--------------------|---------------------|
| Sensor | Full frame CCD |
| Lens factor | 1.0 / Full frame |
| Resolution | 80 megapixel |
| Active pixels | 10320 x 7752 pixels |
| CCD size effective | 53.7 mm x 40.4 mm |
| Pixel size | 5.2 x 5.2 micron |
| Image ratio | 4:3 |
| Dynamic range | 13 f-stops |

OPERATING CONDITIONS

| | |
|-------------|-------------------------------|
| Temperature | -10° to 50°C (14° to 122°F) |
| Humidity | 15 to 80% RH (non-condensing) |

COMPUTER MINIMUM REQUIREMENTS

| | |
|-----|--|
| Mac | Fast Intel Core™ 2 Duo or later CPU, 4 GB RAM, Fast HDD; RAID 0 configured systems for max performance, Nvidia 8800 series graphics card or newer |
| PC | Intel® Pentium® 4, 4 GB RAM, 64bit, 10 GB free hard disk space, IEEE 1394 interface, Windows XP®, Service Pack 3 or Windows Vista®, Service Pack 1 |

IQ280 FULL RESOLUTION CAPTURE MODE

| | |
|----------------------|--------------------------------------|
| Resolution | 80 megapixel |
| Pixel size | 5.2 x 5.2 micron |
| RAW file compression | IIQ large: 80 MB IIQ small: 54 MB |
| ISO | 35, 50, 100, 200, 400, 800 |

SENSOR + CAPTURE MODE

| | |
|----------------------|---|
| Resolution | 20 megapixel |
| Pixel size | 10.4 x 10.4 micron |
| RAW file compression | IIQ large: 20 MB IIQ small : 13.5 MB |
| ISO | 140, 200, 400, 800, 1600, 3200 |

OUTPUT FILES (VIA CAPTURE ONE)

| | |
|--------------------|---|
| Color depth | 16 bit per color |
| Image file formats | All output formats of Capture One are possible: TIFF-RGB, TIFF-CMYK, JPEG |
| Color management | RGB, Embedded ICC profile, CMYK |

LCD SCREEN

| | |
|---------------|-----------------------------|
| Size | 3.2" |
| Resolution | 1.15 megapixel touch screen |
| Viewing angle | 170° |

| | |
|----------------|----|
| CERTIFICATIONS | CE |
|----------------|----|

Content is subject to change without notice

8.2

IQ260 Digital Back Specifications



- 60 megapixel full-frame 645 CCD
- Designed for long exposure (up to one hour)
- Built in wireless technology
- Extreme 13 f-stops dynamic range
- 1.15 megapixel resolution 3.2" display with vibrant colors
- Touch screen functionality to pan, browse and zoom up to 400%

IMAGING TECHNOLOGY

| | |
|--------------------|--------------------|
| Sensor | Full frame CCD |
| Lens factor | 1.0 / Full frame |
| Resolution | 60 megapixel |
| Active pixels | 8984 x 6732 pixels |
| CCD size effective | 53.9 mm x 40.4 mm |
| Pixel size | 6 x 6 micron |
| Image ratio | 4:3 |
| Dynamic range | 13 f-stops |

IQ260 FULL RESOLUTION CAPTURE MODE

| | |
|----------------------|--------------------------------------|
| Resolution | 60 megapixel |
| Pixel size | 6 x 6 micron |
| RAW file compression | IIQ large: 60 MB IIQ small: 40 MB |
| ISO | 50, 100, 200, 400, 800 |
| Long exposure ISO | 140, 200, 400, 800 |

SENSOR + CAPTURE MODE

| | |
|----------------------|--------------------------------------|
| Resolution | 15 megapixel |
| Pixel size | 12 x 12 micron |
| RAW file compression | IIQ large: 15 MB IIQ small: 10 MB |
| ISO | 200, 400, 800, 1600, 3200 |

OUTPUT FILES (VIA CAPTURE ONE)

| | |
|--------------------|---|
| Color depth | 16 bit per color |
| Image file formats | All output formats of Capture One are possible: TIFF-RGB, TIFF-CMYK, JPEG |
| Color management | RGB, Embedded ICC profile, CMYK |

LCD SCREEN

| | |
|---------------|-----------------------------|
| Size | 3.2" |
| Resolution | 1.15 megapixel touch screen |
| Viewing angle | 170° |

OPERATING CONDITIONS

| | |
|-------------|-------------------------------|
| Temperature | -10° to 50°C (14° to 122°F) |
| Humidity | 15 to 80% RH (non-condensing) |

COMPUTER MINIMUM REQUIREMENTS

| | |
|-----|--|
| Mac | Fast Intel Core™ 2 Duo or later CPU, 4 GB RAM, Fast HDD; RAID 0 configured systems for max performance, Nvidia 8800 series graphics card or newer |
| PC | Intel® Pentium® 4, 4 GB RAM, 64bit, 10 GB free hard disk space, IEEE 1394 interface, Windows XP®, Service Pack 3 or Windows Vista®, Service Pack 1 |

IQ BACK MOUNTS

| | |
|-------------------|--|
| Phase One/ Mamiya | Phase One 645DF+/AF Mamiya 645DF+/AFDIII |
| Phase One H101 | Hasselblad H1 and H2 |
| Hasselblad V | Hasselblad 555ELD, 553ELX, 503CW and 501CM Via adaptor: Mamiya RZ67 Pro II Mamiya RB67 |
| Contax | Contax 645AF |

WIDE ANGLE & TECHNICAL CAMERAS

| | |
|--------|--|
| 4 x 5" | via FlexAdaptor: Arca Swiss, Cambo, Linhof, Toyo, Sinar, Plaubel, Horserman. |
|--------|--|

STORAGE FILES

Phase Ones IIQ RAW file format speeds up the image capture and file transfer. It increases the storage capacity by turning the full 16 bit image data into a compact RAW file format.
The default IIQ RAW-large format is completely lossless.

SOFTWARE

Capture One 7.1 or later

CERTIFICATIONS

CE

Content is subject to change without notice

8.3

IQ260 Achromatic Digital Back Specifications



- 60 megapixel monochrome full-frame 645 CCD
- Designed for pure Black and White Photography
- Built in wireless technology
- Extreme 13 f-stops dynamic range
- 1.15 megapixel resolution 3.2" display with vibrant colors
- Touch screen functionality to pan, browse and zoom up to 400%

| IMAGING TECHNOLOGY | |
|--------------------|---------------------------|
| Sensor | Full frame Monochrome CCD |
| Lens factor | 1.0 / Full frame |
| Resolution | 60 megapixel |
| Active pixels | 8964 x 6716 pixels |
| CCD size effective | 53.7 mm x 40.3 mm |
| Pixel size | 6 x 6 micron |
| Image ratio | 4:3 |
| Dynamic range | 13 f-stops |

| COMPUTER MINIMUM REQUIREMENTS | |
|-------------------------------|--|
| Mac | Fast Intel Core™ 2 Duo or later CPU, 4 GB RAM, Fast HDD; RAID 0 configured systems for max performance, Nvidia 8800 series graphics card or newer |
| PC | Intel® Pentium® 4, 4 GB RAM, 64bit, 10 GB free hard disk space, IEEE 1394 interface, Windows XP®, Service Pack 3 or Windows Vista®, Service Pack 1 |

| IQ BACK MOUNTS | |
|-------------------|--|
| Phase One/ Mamiya | Phase One 645DF+/AF Mamiya 645DF+/AFDIII |
| Phase One H101 | Hasselblad H1 and H2 |
| Hasselblad V | Hasselblad 555ELD, 553ELX, 503CW and 501CM Via adaptor: Mamiya RZ67 Pro II Mamiya RB67 |
| Contax | Contax 645AF |

| IQ260 ACHROMATIC FULL RESOLUTION CAPTURE MODE | |
|---|--------------------------------------|
| Resolution | 60 megapixel |
| Pixel size | 6 x 6 micron |
| RAW file compression | IIQ large: 60 MB IIQ small: 40 MB |
| ISO | 200, 400, 800, 1600, 3200 |

OUTPUT FILES (VIA CAPTURE ONE)

| | |
|--------------------|---|
| Color depth | 16 bit Monochromatic Black and White |
| Image file formats | All output formats of Capture One are possible: TIFF-RGB, TIFF-CMYK, JPEG |

| STORAGE FILES | |
|----------------------------------|--|
| Phase Ones IIQ RAW file format | speeds up the image capture and file transfer. It increases the storage capacity by turning the full 16 bit image data into a compact RAW file format. The default IIQ RAW-large format is completely lossless. |
| The default IIQ RAW-large format | is completely lossless. |

LCD SCREEN

| | |
|---------------|-----------------------------|
| Size | 3.2" |
| Resolution | 1.15 megapixel touch screen |
| Viewing angle | 170° |

OPERATING CONDITIONS

| | |
|-------------|-------------------------------|
| Temperature | -10° to 50°C (14° to 122°F) |
| Humidity | 15 to 80% RH (non-condensing) |

CERTIFICATIONS

| | |
|----|--|
| CE | |
|----|--|

Content is subject to change without notice



- 50 megapixel CMOS sensor
- Amazing ISO sensitivity (ISO 100 - 6400)
- Designed for long exposure (up to one hour)
- Built in wireless technology
- Extreme 14 f-stops dynamic range
- 1.15 megapixel resolution 3.2" display with vibrant colors
- Touch screen functionality with fluid and responsive live view

| IMAGING TECHNOLOGY | |
|----------------------|--------------------------------------|
| Sensor | CMOS |
| Lens factor | 1.3 |
| Resolution | 50 megapixel |
| Active pixels | 8280 x 6208 pixels |
| CCD size effective | 44 mm x 33 mm |
| Pixel size | 5.3 x 5.3 micron |
| Image ratio | 4:3 |
| Dynamic range | 14 f-stops |
| RAW file compression | IIQ large: 50 MB IIQ small: 33 MB |
| ISO | 100, 200, 400, 800, 1600, 3200, 6400 |

| OPERATING CONDITIONS | |
|-------------------------------|---|
| Temperature | 0° to 40°C (32° to 104°F) |
| Humidity | 15 to 80% RH (non-condensing) |
| COMPUTER MINIMUM REQUIREMENTS | |
| Mac | Intel Core™ 2 Duo or later CPU, 4 GB RAM, 10 GB free hard disk space, Monitor with resolution of 1280 x 800, Mac OS X 10.9.1 or later, 10.8.5, 10.7.5, 10.6.8. |
| PC | Intel Core™ 2 Duo, 4 GB RAM, 64bit, 10 GB free hard disk space, Monitor with resolution of 1280 x 800, IEEE 1394 interface, Windows® 8 64bit, Windows® 7 64bit, Windows Vista® SP2 64bit. |

| IQ BACK MOUNTS | |
|-------------------|---|
| Phase One/ Mamiya | Phase One 645DF+ Mamiya 645DF+ |
| Phase One H101 | Hasselblad H1 and H2 |
| Hasselblad V | Hasselblad 555ELD, 553ELX, 503CW and 501CM Via adaptor: Mamiya RZ67 Pro IID Mamiya RB67 |
| Contax | Contax 645AF |

| WIDE ANGLE & TECHNICAL CAMERAS | |
|--------------------------------|--|
| Via optional adapter for: | Alpa, Arca Swiss, Cambo, Linhof, Toyo, Sinar, Plaubel, Horseman. |
| STORAGE FILES | |

| |
|---|
| Phase Ones IIQ RAW file format speeds up the image capture and file transfer. It increases the storage capacity by turning the full size image data into a compact RAW file format. The default IIQ RAW-large format is completely lossless. |
|---|

| SOFTWARE | |
|--------------------------|--|
| Capture One 7.2 or later | |
| CERTIFICATIONS | |


Content is subject to change without notice

NOTE:
After taking pictures using the Exposure Compensation feature, be sure to return the exposure compensation dial to the 0 position.

The exposure compensation feature is available during AE locked operation.

The width of the exposure compensation step can be changed.

The maximum amount of the compensation can be set either at ± 3 or ± 5 .

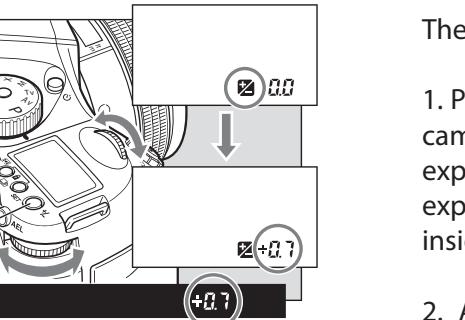

9.0 Advanced 645DF+ Camera Functions

9.1 Exposure Compensation

In situations providing extreme high contrast, the resulting photograph may be under or overexposed. When this occurs, use the Exposure Compensation function. Exposure Compensation can also be used when you want to intentionally create overexposed or underexposed pictures.

N.B. Creating an under or overexposed image can also be effectively achieved with the High Dynamic Range Tool and Exposure Tool in Capture One.

The exposure compensation dial icon:

1. Press the Exposure Compensation button [A] so that icon appears on the camera's top LCD. When the front or rear dial is turned counter-clockwise, the exposure is increased and when it is turned clockwise, it is decreased. The exposure compensation value can be checked on the external LCD or LCD inside the viewfinder.



2. After taking the pictures, press the Exposure Compensation button [A] again to return the exposure compensation value to 0. The exposure compensation value mark on the external LCD is cleared and the exposure compensation function is released.

| Exposure mode | Exposure compensation display | |
|---------------|-------------------------------|--|
| P | Program AE | The set value is displayed |
| Av | Aperture Value Priority | |
| Tv | Time Value Priority | The difference between the metered value and the set Exposure value is displayed |
| M | Manual Mode | |
| X | Sync Mode | Not displayed |

9.2 AE Lock

AE lock function is useful in a number of shooting scenarios but is particularly useful when capturing panoramic images where a consistent exposure is needed to seamlessly stick images together in post production.

The AEL button will lock the Auto-exposure value as the photo is being recomposed.

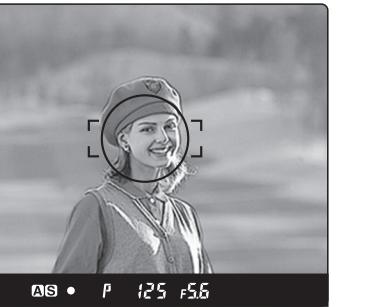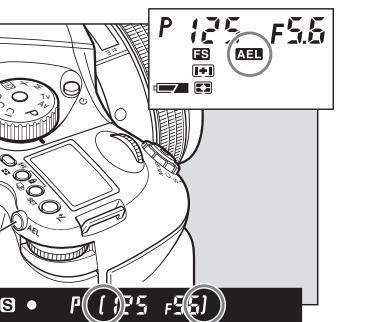



1. Turn the shutter release mode selector lever to S or C.

2. Turn the exposure mode setting dial and select P, Av or Tv.

3. Focus on the subject for metering exposure, and press the AEL button on the rear of the grip. [] Will appear on the viewfinder LCD, indicating that the exposure value is locked.

4. Slide the camera to recompose the shot, and take the picture.

When you press and hold AEL button the over/under exposure value will be shown to the far right in the viewfinder LCD.

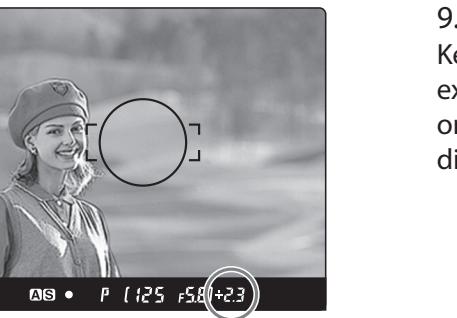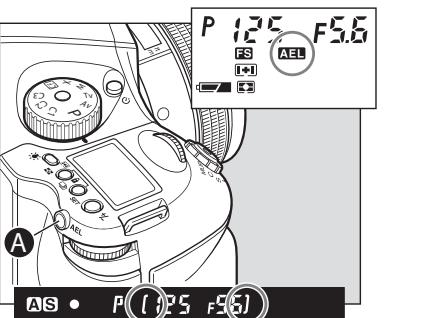

F5.6)-u- **F5.6)-o-**

NOTE:
The way to cancel the AE lock can be changed. [C-11 AEL function lock/unlock mode \[AEL\]](#)

Half-pressing of the shutter release button can activate the AE lock mode. [C-10 Release button \[HALF\]](#)

The assignment of the AEL button and AFL button can be swapped by using [C-09 AEL & AFL button \[AEFL\]](#)

Exposure compensation and auto-bracketing function can be used when the camera is in the AE lock mode in normal operation or with the mirror locked up.

9.3 Metered-Value Difference Indicator





Keep pressing the AEL button [A] and the difference between the metered exposure value and the exposure of the new composition will be displayed on the viewfinder LCD. This function can be used to see if an object of very different brightness levels can be properly photographed.

NOTE:
When you want to cancel the auto-bracketing mode, turn the rear dial to change "On" to "OF"

NOTE:
After multiple turns, the mark [RP] will appear in the main LCD.

Repeat turning will lead to a countdown being displayed on the main LCD and after taking a photo the camera will return to Auto Bracketing mode.

The setting for the Auto Bracketing will be stored by pressing any other button or leaving the camera for 5 seconds.

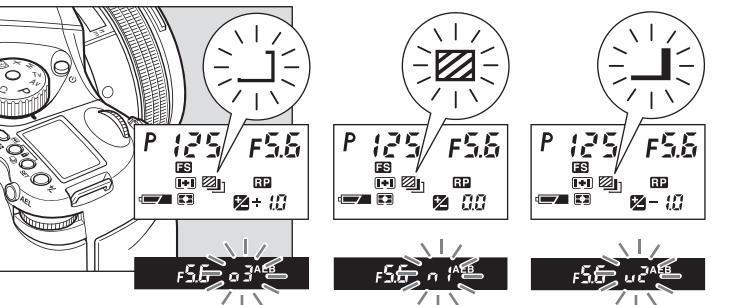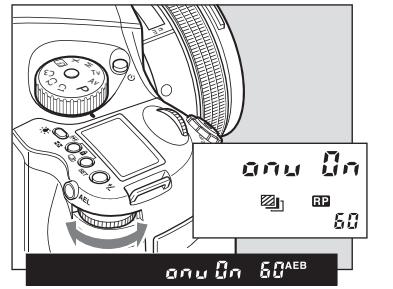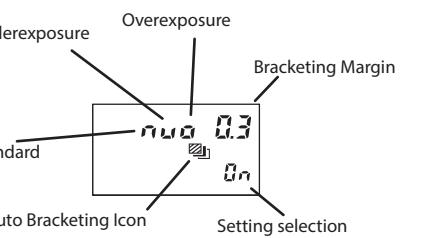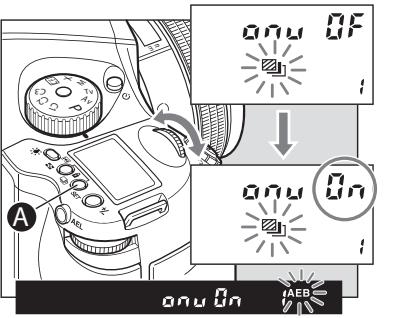

9.4 Auto Bracketing

Auto Bracketing can be used when it is difficult to determine your exposure compensation value. This function automatically captures different exposure variations in succession. The bracketing margin can be selected as desired for shooting in Auto Bracketing mode.

1. Turn the Shutter Release Mode Lever to the S or C position.

When set at the S position, you can shoot a single frame with each full press of the Shutter Release button. In the C mode, the camera takes a series of three frames successively with one press of the shutter release button.

2. Turn on Auto Bracketing by pressing the Auto Bracketing button[A] for approximately one second. The Auto Bracketing icon will blink on the top LCD panel. Turn the front dial (before this indicator times out) and change OF on the display to On.

3. When the shutter button is pressed in Auto Bracketing mode, the auto bracketing mark will blink on the LCD inside the viewfinder. The bracket step width is displayed and the Auto Bracketing icon will also blink.

4. To deactivate the bracketing function, press the Auto Bracketing set button[A], turn the rear dial, set auto bracketing mode to OF, and release.

Then press the Auto Bracketing set button [A] or half-press the shutter button to return to the normal display mode.

AE Settings Under Auto-bracketing Mode

| | Exposure Mode | Setting |
|----|----------------------|----------------------|
| P | Program AE | Shutter speed varies |
| Av | Aperture Priority AE | Shutter speed varies |
| Tv | Shutter Priority AE | Aperture varies |
| M | Manual Mode | Shutter speed varies |
| X | X-sync mode | No setting |

NOTE:
When exposure compensation is initiated by pressing the exposure compensation button, shooting in Auto Bracketing mode is possible using the exposure value to which the exposure compensation value has been added.

Single-Frame Mode (S)

Press the shutter release button for each shot. The camera meters adequate exposure value for each shot and performs Auto Bracketing. The camera stays in the Auto Bracketing mode until you cancel the Auto Bracketing mode manually.

Continuous Mode (C)

By pressing the shutter release button once, the camera takes 3 shots in series. With each full press of the shutter release button, the camera repeats auto-bracketing. The standard (normal) exposure value will be fixed when you take the first frame.

Cancelling Auto Bracketing





When you want to cancel the auto-bracketing mode, turn the rear dial to change "On" to "OF".

NOTE:

Auto bracketing exposures can be made when the auto bracketing mode is set before taking photos with mirror up.

After 10 seconds, mirror up photography will be cancelled

The mirror will return to the original position if the lens is removed from the camera body

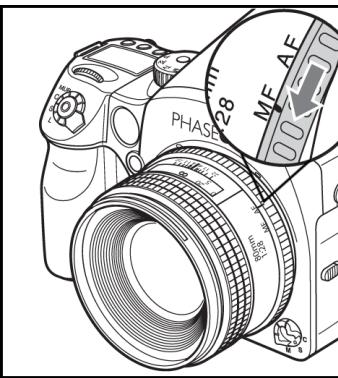

9.5 Taking Photos with the Mirror Up


This function prevents mirror-caused vibrations which may blur an image when shutter speed is slow. A electromagnetic Cable Release RE401 (optional) is recommended to use with the mirror-up function.

1. Set the drive dial to M.UP.
2. Select S (single focus mode) by turning the focus mode selector lever.
3. Turn the exposure dial to P, Av or Tv exposure mode.
4. Ensure the subject is in focus and that composition and exposure have been determined.
5. The mirror moves up when the shutter release button is fully pressed.
6. Press the shutter release button again to take pictures.

In the Manual Mode

Follow steps 1 through 3 of the above auto focusing steps and continue with the steps below.



- 1-3 (reference steps 1-3 in the Mirror Up Autofocus method)
4. Set the focus mode selector lever to M (manual focus mode). Turn the lens-focusing ring to focus.
5. Determine the exposure, focusing and frame structure by pressing the shutter release button halfway while looking into the viewfinder.
6. Lock the mirror up by pressing the shutter release button.
7. Press the shutter release button again to take pictures.

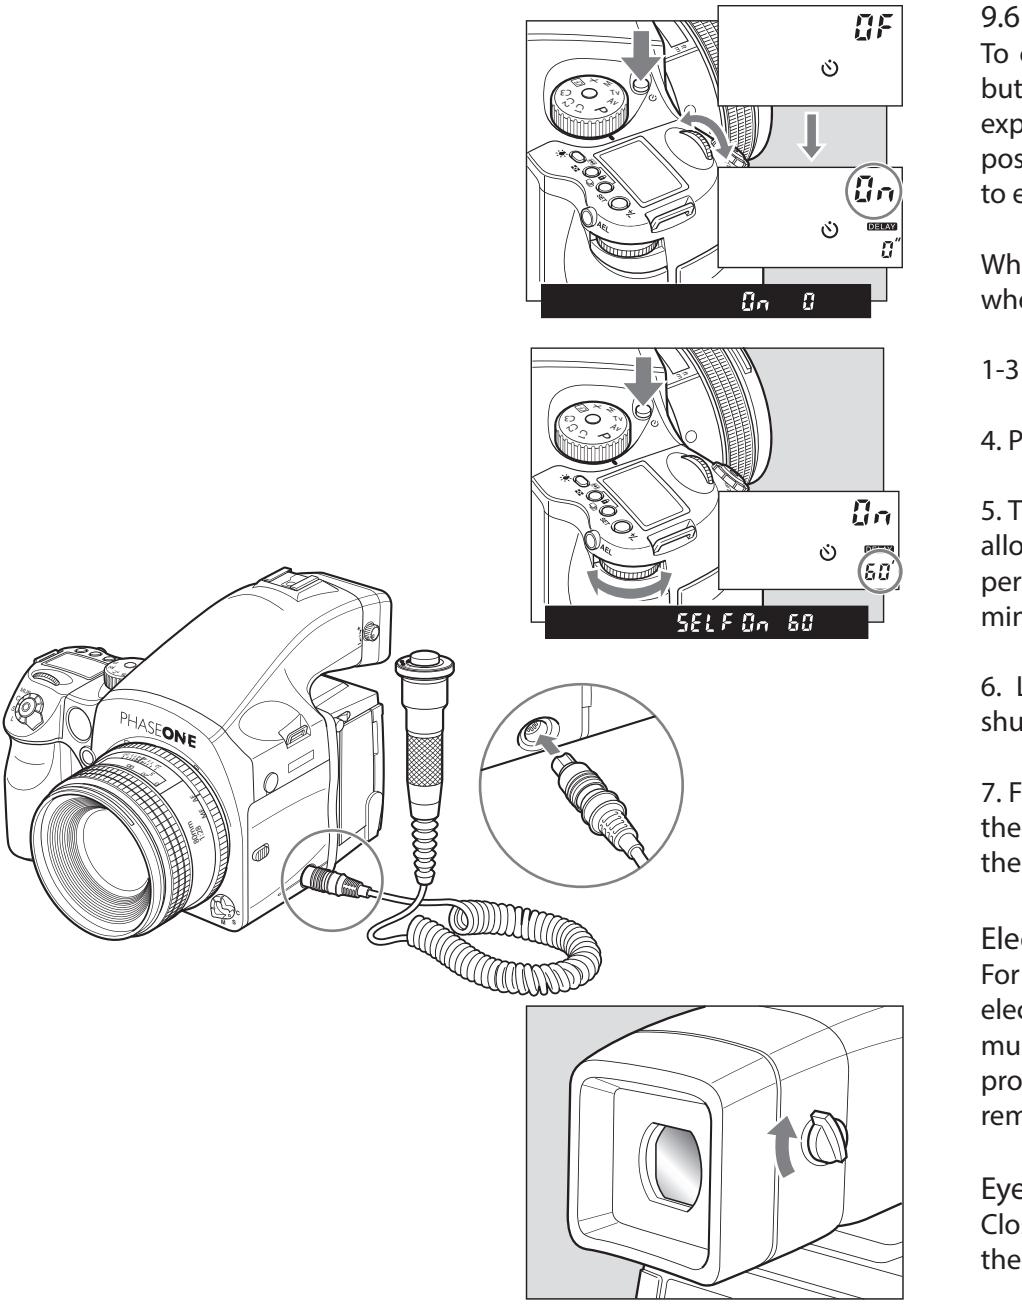

9.6 Mirror Up Delay

To change from the Self-timer to the Mirror Up setting, press the shutter button so the mirror goes into the upright position. Once the set time has expired the shutter will release, and the mirror will return to the lowered position. Separately purchased electronic cable release RE401 can be used to eliminate camera shake.

When using autofocus the operational method is the same as 1 to 3 when using M.UP and autofocus.

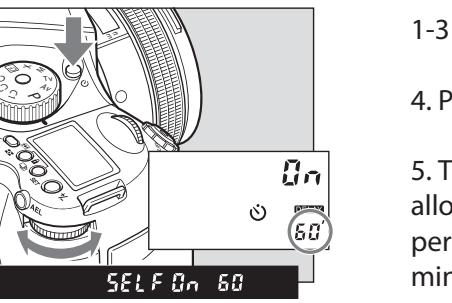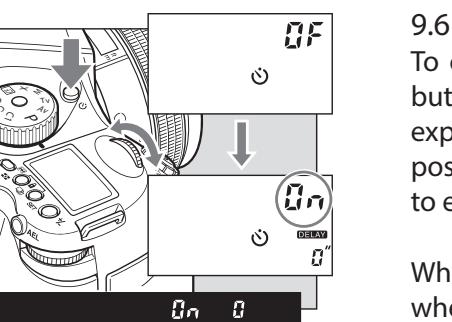

1-3 (reference steps 1-3 in the Mirror Up Autofocus method).

4. Press the Self-timer button and turn the front dial to ON.

5. Turn the rear dial to select the time needed. 0.5/1 seconds to 10 seconds allows for increases by the second, 10 to 90 seconds increases by 10 seconds per turn. For 2 to 10 minutes the value increased by the minute and 10 to 60 minutes increases by 10 minutes per turn.

6. Line up the photograph through the viewfinder and half press the shutter button to ensure the focus and framing is correct.

7. Full-press the shutter button and the mirror will go to the upper position, then after the set time the shutter will release and the mirror will return to the lowered position.



Electronic Shutter Release Contact

For Mirror Up, long exposure, or slow shutter shooting, use the electromagnetic cable release 70258 (1 meter) or 70259 (5 meters). The multi-pin remote terminal on the side of the camera is covered by a cap that protects the contacts when not in use. Please remove cap and insert the remote plug carefully until it 'clicks' into position.

Eyepiece Shutter

Close the eyepiece shutter when there is a strong light source behind the camera.

NOTE:
As the camera is electronically controlled even during exposures, it is recommended to replace batteries before bulb exposure.

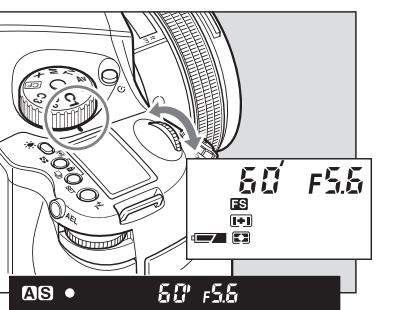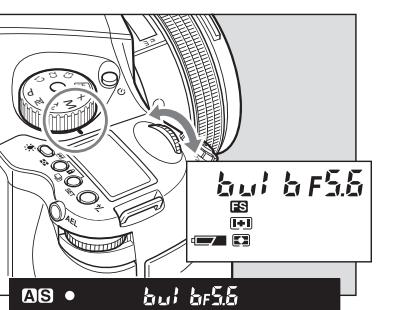


NOTE:
Using "tIME" (Time) setting, the shutter will open and close according to the number of times you press it.

"tIME" (Time) photography is electronically controlled so it is possible that the batteries will drain quickly. In the case, please replace the batteries with new ones.

NOTE:
When releasing the shutter, or pressing the backlight button [A] while the backlight is on, the backlight will go OFF.

Choose the time of display light. C-03
[SleepTimer \[HOLD\]](#)

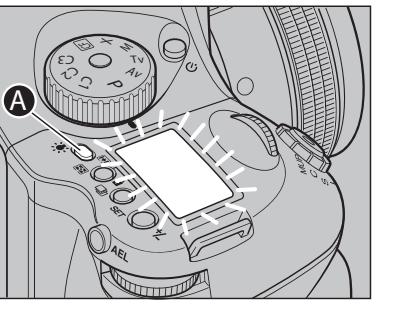

9.7 Bulb Mode & Long Exposure

To make an exposure longer than 30 seconds, adjust the shutter speed to "B" (bulb). In order to prevent camera shake, use the RE401 or RS402 electromagnetic shutter release and tripod.

1. Turn the exposure mode dial to M (manual mode).

2. Turn the front dial to select 'bulb', then turn the rear dial to set the aperture.

3. Determine the composition, focus and then take the picture. The shutter remains open as long as the shutter release button is pressed.

Setting Long Exposures

When photographing under normal conditions, the shutter speed can be adjusted for longer exposures.

Turn the front dial for shooting time settings. New time settings include 1, bulb, tIME (Time), 2, 4, 8, 15, 30, 60.




9.8 Camera Display Light

Press the backlight button [A] ☀ to illuminate the top display panel to use the camera in the dark. The backlight will go on for approximately 20 seconds and turn off unless it is pressed again.

The backlight will be lit for approximately another 10 seconds when operating the camera.

NOTE:
The setting will be stored after one second.
Dial lock can not be set when the exposure mode is P (program AE).

Even while dial lock is set, the front dial or rear dial can still be used to perform the various settings. (Dial lock is temporarily released.)

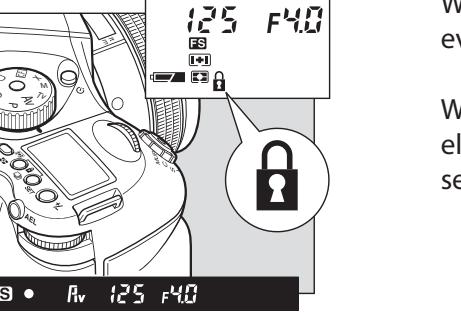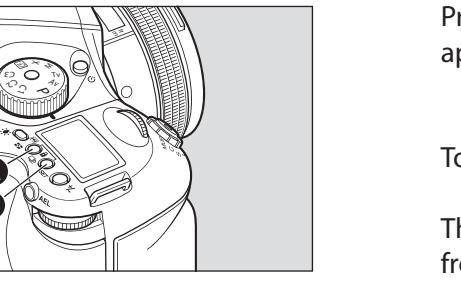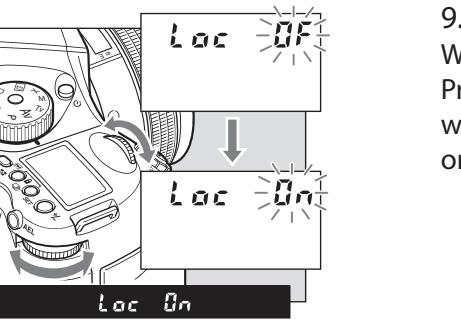

9.9 Front/Rear Dial Lock Mechanisms

When the Electronic Dial Lock is On, all currently set values in Av (Aperture Priority AE), Tv (Shutter Priority AE) and M (Manual mode) cannot be adjusted with the front or rear dials. This prevents accidental change of shutter speed or aperture values.

Press down the two lock buttons [A] and [B] at the same time for approximately one second, until the On indicator blinks.



To release the mode, hold down the same buttons until OF blinks.

The icon is displayed on the main LCD to indicate that operation of the front and rear dials is locked.

When the dial lock is ON, the shutter speed and aperture will not change even if you turn the front or rear dial.

When you activate the electronic dial lock, and then operate the electronic dial, the dial lock indicator on the main panel blinks for three seconds to show that the electronic dial lock is functioning.

NOTE
To release the self timer while it is operating, turn off the power (by setting the drive dial to L)

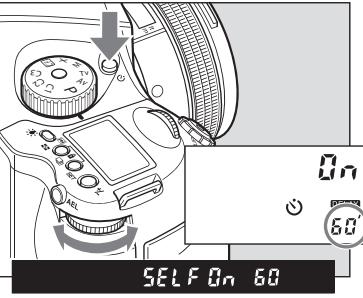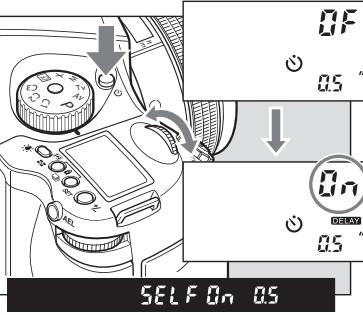

NOTE:
In the Self-timer setting, put the drive dial to M.UP (mirror up) mode. Should you wish to operate with mirror up and delay, simply switch the drive dial to M.UP (mirror up) mode in the Self-timer setting.

9.10 Self-Timer Mode

The default setting for the Self-Timer mode to release the shutter is 10 seconds after the shutter release button is pressed. The self timer lamp flashes slowly for the first 7 seconds, and then flashes quickly for the last 3 seconds before the shutter is released. This function can be used to avoid camera shake, to take group photos or for self-portraiture.

1. Mount the camera on a tripod.
2. Switch the shutter release mode selector to the (self timer mode).
3. Turn the front dial, and set the self-timer mode to ON.
4. Check the view by looking through the viewfinder. Make sure that the focus is correct, press the shutter release button and the shutter will be released after 10 seconds.

Changing the Self-Timer Duration

1. Press the Self-Timer button to activate this function.
2. Turn the rear dial to change the duration of the Self-Timer. 0.5/1 seconds to 10 seconds allows for increases by the second, while 10 to 90 seconds increases by 10 seconds per turn. For 2 to 60 minutes increases by 10 minutes per turn.




Releasing Self-Timer mode

1. Press the Self-Timer button to activate this function.
2. Turn the front dial to "OF"

NOTE:
Repeat turning (according to the number of times) will lead to a countdown appearing in the display.

After setting the interval photography, turn the drive dial to "M.UP" (mirror up mode) and you can operate in mirror up delay mode. While photographing in this setting the "AEL" will be displayed on the main LCD.

When using auto bracketing, the interval function cannot be used at the same time.

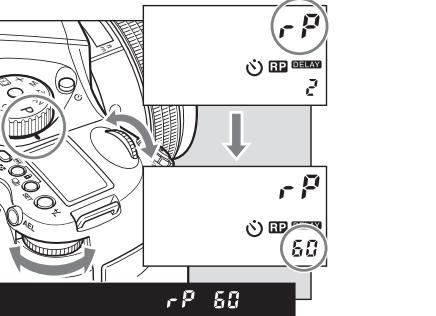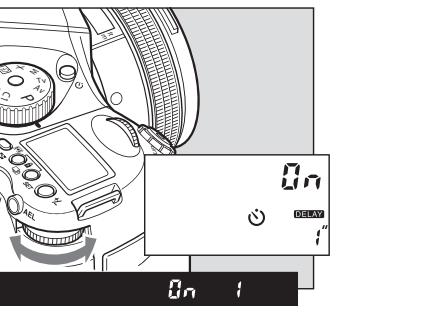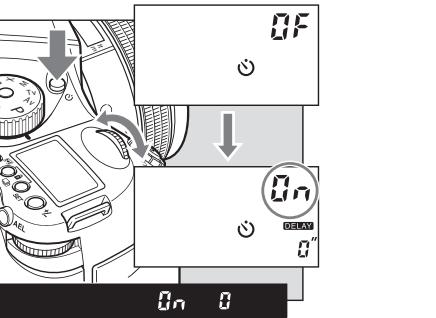


9.11 Interval Photography

Interval photography can be used for a variety of shooting scenarios such as such as to capture cloud movement or a flower coming into bloom.


1. Ensure the camera is firmly secured on a tripod.
2. Press and Self-Timer button twice.
3. Turn the front dial to display interval mode as On.
4. Turn the rear dial to set the interval time. Settings include 0 seconds (no interval time), 1 to 10 seconds (increased by the second), 10 to 90 seconds (increased in units of 10 seconds), 2 to 10 minutes (increased by the minute) or 10 to 60 minutes (increased in units of 10 minutes per turn).
5. Turn the front dial to the repeat mode to select how many shots you want in your interval session, 1-10, or up to 60 in intervals of 10. If you want to make a motion film of your session and need more images, try shooting tethered to a computer and set the interval to ON. The camera will do a shot until you stop the session. Remember to leave enough free hard disk space on your computer.
6. Check the focus and framing in the viewfinder then press the shutter.

Cancelling Interval Mode

1. Press the interval mode button for interval mode.
2. Turn the front dial to "OF"



When the aperture is open (the subject depth is small)

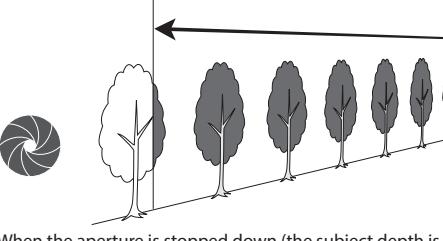


When the aperture is stopped down (the subject depth is large)

9.12 Depth of Field

Depth of field (D.O.F.) is defined as the zone of sharpness before and behind the plane of focus. It depends on distance to subject, focal length of lens, aperture setting and distance the lens is focused at.

In addition to visual observation via the depth of field preview button, the D.O.F. can be determined by using the depth of field scale on each lens. The f/stop numbers appear on both the right and left side of the white index mark in the center of the scale. Simply read the figures which appear above the f/stop numbers on the distance scale of the lens.

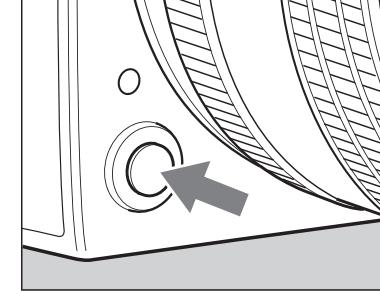

Depth of Field Preview Button



When the preview button is pressed in, the depth of field for the aperture set on the camera can be checked by looking through the viewfinder.

After focusing, press the preview button. The diaphragm will be stopped down to the set aperture.

NOTE:
While operating the preview button, you cannot release the shutter

Web Resources

<http://www.cambridgeincolour.com/tutorials/depth-of-field.htm>
http://en.wikipedia.org/wiki/Depth_of_field

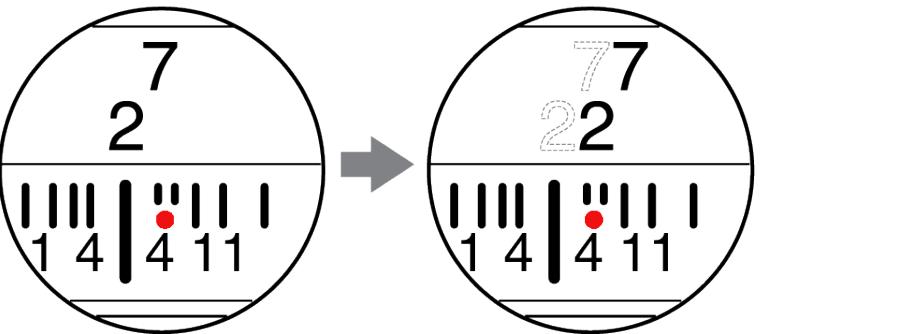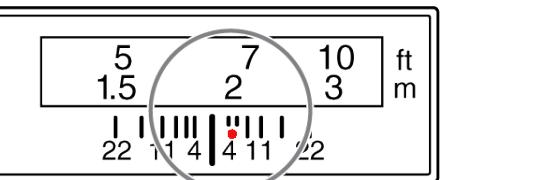

NOTE:
You cannot take photos in AE modes when using an infrared film as the AE is based on visible light.

9.13 Infrared Photography

Infrared Photography is complicated when using digital backs, as the digital back is adjusted to match the viewable light perfectly.



Use a dedicated digital back for infrared photography. The IQ back needs to be adjusted to work properly for infrared photography. DO NOT TRY THIS AT HOME!

- All corrections in this area must be done by Phase One to ensure precision. If you remove the protective glass or make other physical adjustments on the back the warranty will immediately be void.

If you are considering Infrared Photography, please contact your local Phase One dealer for technical advice and pricing.

Infrared light has a slightly different area of sharpness compared to the viewable light so when the distance is set on the lens, you should always manually correct sharpness, to **be aligned with** the red dot.

Do not use your camera's light meter when photographing infrared, as the light meter is aimed towards reading the visible light.

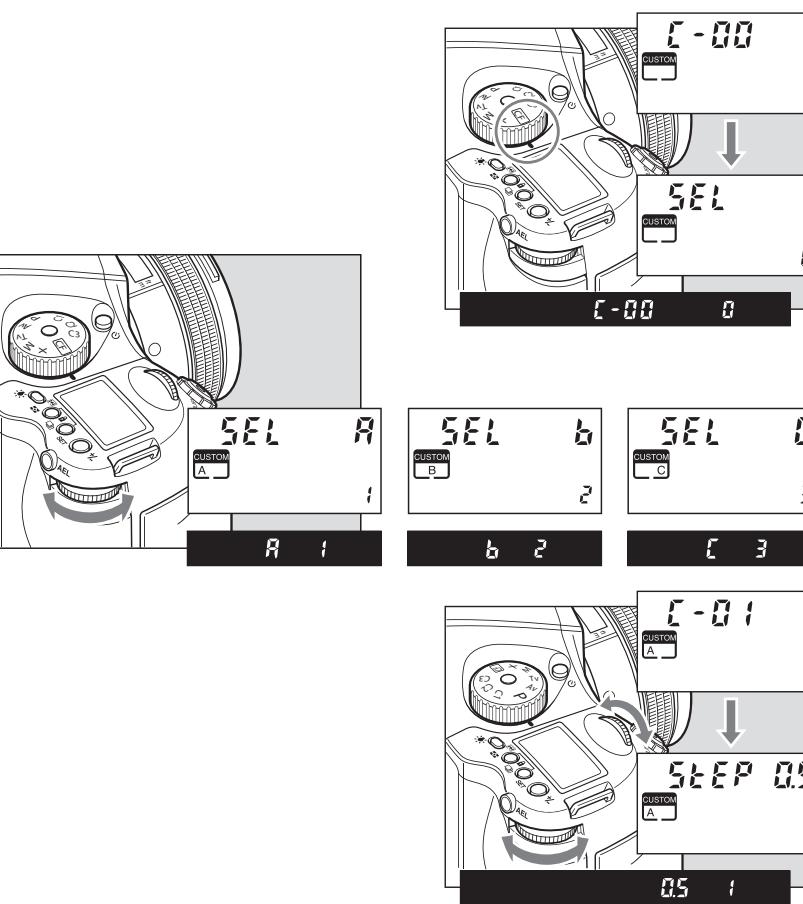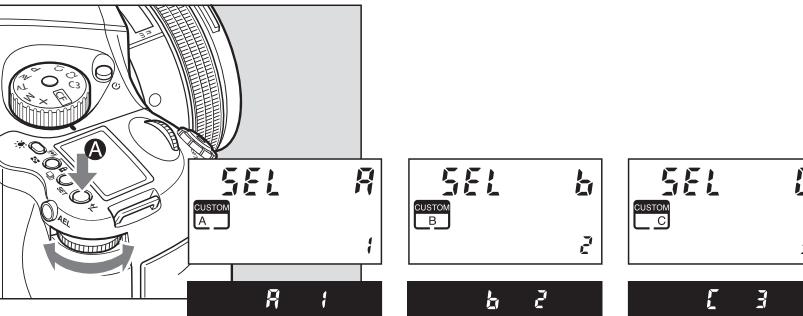

9.14 Custom Function

The custom functions can store separate three different camera set-ups. When at C-00, chose 1 (A), 2 (B), or 3 (C) to store a specific set of user function selections for the group of custom settings from C-01 to C-19.

The C-00 is set to 0 which is the settings used for the default set.

Setting Custom Functions

1. Turn on the power.
Turn the shutter release mode lever to the S or C position.
2. Turn the exposure mode dial to select CF (Custom Function mode).
3. Turn the rear dial to select the settings for user A, B, or C.
4. Turn the front dial to select the item you want to set.

Clear all Custom Functions

Set mode dial button to CF, then press +/- button for 5 seconds, this will reset ALL Custom Functions to the factory default.

Setting Custom Functions to Default

1. By turning the exposure mode dial, CF (custom function mode) can be selected.
2. By turning the rear dial, user A, B or C can be selected.
3. Press and hold down set button (for longer than 1 second) and settings for A,B,C can be initialized, or the settings can be returned to "default".

9.15 Types of Custom Functions

C-00 Custom functions profile [SEL]

0: None (default=0)

1: A

2: B

3: C

When "0" has been selected and set, none of the custom items can be set.

C-01 EV-Steps [StEP]

This function is used to set the size of increments concerning the shutter speed, f-number and exposure compensation value.

0: 0.3 (1/3EV step: default setting)

1: 0.5 (1/2EV step)

2: 1.0 (1EV step)

C-02 Lens change [IrIS]

This function is used to set the f-number display method for the previously used lens when the lenses have been interchanged. The default setting is "0" in which case the f-number of the lens prior to the changeover is displayed.

0: Previous f-number

1: Maximum aperture setting

2: Minimum aperture setting

C-03 Sleeptimer [HOLD]

This function is used to set the time for sleep mode to be established after the camera's power is turned on. The default setting is 15 seconds.

0: 15 seconds

1: 30 seconds

2: 60 seconds

3: Disabled

The batteries will continuously lose power when "On" (no sleep mode) has been set.

C-04 Battery Type [batt]

This function is used to set the batteries used in the camera so that the remaining battery charge will be displayed correctly on the external LCD panel.

0: Alkaline

1: NiCd, NiMH, Li-ion

2: Li-ION (Only for use with Li-Ion battery Kit or Vertical Grip)

C-05 Bracketing [Stno]

Setting bracket's width for auto bracketing setting

0: 3 Exposures

1: 5 Exposures

2: 7 Exposures

C-06 Front/Rear dial [dF]

This function is used to interchange the functions of the front and rear dials in the M (manual mode).

0: Front dial:TV, rear dial: Av [OF]

1: Front dial: AV rear dial: Tv [On]

C-07 Rear dial in P mode [d_AC]

Initializing the P mode on the rear dial then changing the function to the front dial will cancel out P mode function on the rear dial.

0: Enable

1: Disable

C-08 Dial Direction [d_dl]

This function is used to determine the direction in which the electronic dial is to be rotated to increase and decrease shutter speed, the f-number, and exposure compensation.

0: CW: Decrease [OF]

1: CW: Increase [On]

C-09 AEL & AFL button [AEFL]

This function is used to set whether to interchange the operations of the front and rear AEL and AFL buttons.

0: Default setting (front: AFL, rear: AEL) [OF]

1: Switched (front AEL, rear: AFL) [On]

C-10 Release button [HALF]

This function is used to set the AE lock and AF operations when the shutter release button is half-pressed.

0: AF operation (default setting)

1: AF & AE operation

2: Only shutter release

C-11 AEL function lock/unlock mode [AEL]

This function is used to set the method of operating the AEL button to lock AE. At the default setting, when the AEL button is pressed, AE is locked; pressing the button again releases the AE lock. At the "1" setting (released after one shot), after AE lock is set, it is released when the shutter is triggered. At the "2" setting, AE lock is only kept while the AE lock button is being pressed.

0: One shot

1: Continuous

2: While pressed

C-12 AFL [AFL]

This function is used to set the AF lock method when the AFL button is operated. AF >< Lock is activated with one press of the auto-lock button then deactivated with a second press.

0: While pressed (default setting)

1: AF operation

2: Continuous

C-13 M-mode AEL [OnEP]

When using M (manual mode) one push function, the shutter speed or aperture value can be set automatically by pressing AEL button.

0: Shutter speed shift [tv]

1: Aperture value shift [Av]

2: No [no]

C-14 AF assist setting [AF_L]

The AF auxiliary light fires automatically when the subject is too dark to perform AF, but this function can be used to prevent the AF auxiliary light from firing.

0: On [On]

1: Off [OF]

C-15 Flash sync. [FLSY]

When shooting moving subjects with flash you can set the synchronization timing. This allows you to have the flash fire at the beginning of the exposure or at the end of the exposure.

0: First (default setting)

1: Second

C-16 Beep [bu]

When the SET button is pressed a beep sounds

0: ON (AF) (Default setting)

1: ON

2: OFF

C-17 Shutter TV, AV & P [Sh_P]

When using P, Av or Tv mode and the leaf shutter lens is attached but you prefer to use the focal plane shutter.

0: Mixed. Default (Focal Plane shutter operation at < 1S)

1: Leaf shutter

2: Focal plane shutter

C-18 Shutter in M & X [Sh]

When initializing the setting, use of the lens shutter (and its respective ranges) or the focal plane shutter can be chosen when the leaf shutter lens is attached.

0: Mixed. Default (Focal Plane shutter operation at < 1S)

1: Leaf shutter

2: Focal plane shutter

C-19 AF Priority [AF_2]

Accuracy of auto-focusing priority (default setting) or speed priority can be decided. Use the front dial to scroll to Custom function 19 and the rear dial to set AF Priority to one of the following:

00: Speed

01: Accuracy

Please note: On IQ, P 65+ or P 40+ digital backs, this CF function can also be set from within the digital back menu system: Menu > 645DF > Setup Custom A > AF priority

C-20 AF Fine Tune

Use the front dial to scroll to Custom function 20. Use the rear dial to fine-tune the focus point on a subject that is closer or further away from the camera.

50: Neutral factory calibration

Minus: Move AF point closer

Plus: Move AF point further away

C-97 Support for Mamiya ZD backs

This function should ONLY be activated when shooting on a Mamiya ZD back.

0: Default setting NO Mamiya ZD back on the camera body

1: Mamiya ZD back on camera body

C-98 Lens firmware version

The current firmware version can be checked.

C-99 Body firmware version

The current firmware version of the body can be checked.

Liquid Crystal Display

Due to the limitations of the space and letters, words and letters on the LCD are abbreviated.

Display examples of the main LCD


| | |
|------|----------------|
| On | → ON |
| Off | → OFF |
| Err | → Error |
| + | → + (Plus) |
| u | → Under |
| o | → Over |
| n | → Normal |
| Loc | → Lock |
| SELF | → Self Timer |
| bulb | → bulb |
| busy | → Busy |
| db | → Digital Back |
| LS | → Lens Shutter |
| CAP | → Capture |
| RP | → Repeat |
| Time | → Time |
| batt | → battery |

Display examples in the custom function mode

| | |
|-------|----------------------|
| SEL | → Selection |
| STEP | → Step |
| Iris | → Iris |
| HOLD | → Hold |
| batt | → battery |
| Sh.no | → Shot No. |
| dF | → Dial function |
| d.RE | → Dial action |
| d.dir | → Dial direction |
| AEFL | → AE, AF lock |
| HALF | → Half press |
| REL | → AE lock |
| RFL | → AF lock |
| OneP | → One-push exposure |
| RF.L | → AF assist light |
| FLSY | → Flash sync |
| bu | → Buzzer |
| Sh.P | → Shutter in Program |
| Sh. | → Shutter in Manual |
| RF.2 | → AF second mode |

Custom Functions overview

| No. | Item | Initial setting (0) | 1 | 2 | 3 |
|------|---|---|---|--------------------------------------|--------|
| C-00 | Custom Function User | Last used | User A | User B | User C |
| C-01 | Steps of aperture, shutter speed, Exposure compensation | 0.3 1/3 EV step | 0.5 1/2EV step | 1.0 1 EV step | |
| C-02 | Aperture setting after lens change | Previous aperture value | Maximum aperture setting | Minimum aperture setting | |
| C-03 | Time to sleep | 15 sec | 30 sec. | 60 sec. | ON |
| C-04 | Battery type | Alkaline | NiMH or NiCD | Future feature | |
| C-05 | Auto Bracketing steps | 3 | 5 | 7 | |
| C-06 | Front/Rear dial function exchange in manual mode | Front:TV Rear : AV | Front:Av Rear :Tv | | |
| C-07 | Disable Rear dial in P mode | Yes | No | | |
| C-08 | Dial Function direction | No switching | Switched CCW : Increase CW : Decrease | | |
| C-09 | AEL & AFL button exchange | Front: AFL Rear : AEL | Front: AEL Rear : AFL | | |
| C-10 | Shutter half-press function | AF operation | AF operation & AE Lock | OFF (no function) | |
| C-11 | AEL function lock/unlock mode | Continuous | One shot | While the shutter button is pressed | |
| C-12 | AFL lock mode setting | Set with AF lock only | AF operation | Continuous | |
| C-13 | One push function M-Mode | Shutter speed shift | Aperture value shift | Off | |
| C-14 | AF assist beam | Fires | Does not fire | | |
| C-15 | Flash sync. timing | Front Curtain | Rear Curtain | | |
| C-16 | Beep | ON (AF) | ON | OFF | |
| C-17 | Choose shutter function (P, Av or Tv mode) | Mixed. (When inside the range of the leaf shutter lens) | Only Leaf shutter | Only Focal plane shutter | |
| C-18 | Shutter function in Manual mode | Mixed. (When inside the range of the leaf shutter lens) | Only Leaf shutter | Only Focal plane shutter | |
| C-19 | AF Speed | High Speed mode | High accuracy mode | | |
| C-20 | AF Fine Tune | 50: Neutral | Minus. (Move focal point closer) | Plus (Move focal point further away) | |
| C-97 | Mamiya ZD digital back support | NO Mamiya ZD back | Mamiya ZD back | | |
| C-98 | Lens Firmware version | | | | |
| C-99 | Body Firmware version | | | | |

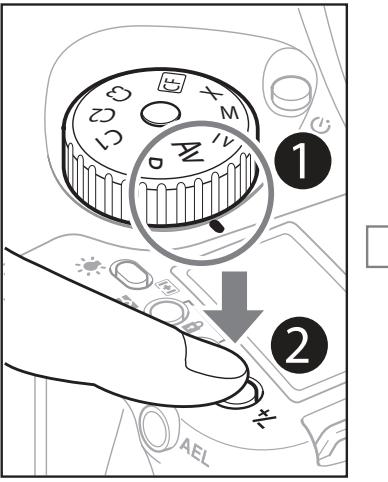

*The illustration shows the exposure mode Av (aperture priority AE) being recorded to C2.

NOTE:
Even when the power is switched off, the mode recorded will still be saved to C mode.

PHASE ONE

9.16 Custom Dial Modes C1, C2 or C3

Mode dial options C1, C2 and C3 can be used to store preferred settings.

These settings can be changed instantly to suit the photographer's needs. Users can change the settings on the camera body or via an IQ back.

Programmable settings are exposure mode, P (program AE), Av (aperture priority AE), Tv (shutter speed priority AE), X (synchro mode), M (manual mode) and spot metering.

Programming the Custom Dial Modes C1, C2 or C3 via the camera body

1. Go to the setting you wish to assign to C1, C2 or C3.
2. After arriving at the setting you wish to assign, hold the SET button down while turning the mode dial to C1, C2 or C3. When you release the SET button, the chosen setting will be programmed to your selection of C1, C2 or C3.

C1, C2 or C3 modes can be changed while photographing. However after taking a photo in a mode other than the modes selected in C1, C2 or C3, when you turn the dial back to a C mode setting the change will not be saved.

9.17 Lenses and Multi Mount

When it comes to lenses, Phase One provides the widest range of possibilities to ensure photographers get the most creative freedom from their Phase One camera.

This chapter looks at some possible lens systems. However, it is worth noting that there are even more applicable lenses available than presented in the upcoming pages. User can find more information from dedicated Phase One dealers on items such as mount-adaptors for example the Phase One Multi-Mount.

N.B. Errors or damage caused by third party products are not covered by the warranty. Please test new products with caution.

9.18 Functions of the Phase One Lens

The Phase One 80mm f/2.8 is a sharp and well tested digital lens. The lens is mounted by aligning the white dot on the lens with the white dot on the camera body. Carefully mount the lens by turning it clockwise, until a click is heard. If you feel resistance or if you hear a scratching-like sound stop and retry – NEVER use force when mounting the lens as it should always slide into place without resistance.

9.19 Function of the Phase One Lens Adaptor

To mount the Phase One Multi-Mount, match the white dot on the camera up with the white dot on the Multi-Mount and turn slowly clockwise. NEVER use force to mount the ring. When the Phase One Multi-Mount is mounted you can fit Carl Zeiss/Hasselblad V and Hasselblad 200series lenses on the camera.



PHASE ONE

9.20 List of Alternative Lenses

Recommended Digital lenses

| Producer | Specs | Limitations | Adaptor/Mount |
|---------------------|---------------|-------------|---------------|
| Mamiya | 28 f.4,5 AFD | | Mamiya 645AFD |
| Mamiya | 75-150 f.4,5 | | Mamiya 645AFD |
| Mamiya | 35 f.3,5 | | Mamiya 645AFD |
| Mamiya | 45 f.2,8 | | Mamiya 645AFD |
| Mamiya | 55 f.2,8 | | Mamiya 645AFD |
| Mamiya | 150 f.3,5 | | Mamiya 645AFD |
| Mamiya | 210 f.4,0 | | Mamiya 645AFD |
| Mamiya | 300 f.4,5 | | Mamiya 645AFD |
| Mamiya | 55-110 f.4,5 | | Mamiya 645AFD |
| Mamiya | 105-210 f.4,5 | | Mamiya 645AFD |
| Schneider Kreutnach | 55 f.2,8 | | Mamiya 645AFD |
| Schneider Kreutnach | 80 f.2,8 | | Mamiya 645AFD |
| Schneider Kreutnach | 110 f.2,8 | | Mamiya 645AFD |

Recommended MF lenses

| Producer | Specs | Limitations | Adaptor/Mount |
|----------|--------------------------|-------------|---------------------|
| Mamiya | A 500 f.4,5 | 1+2 | Mamiya 645 |
| Mamiya | A 300 f.2,8 | 1+2 | Mamiya 645 |
| Mamiya | A 200 f.2,8 | 1+2 | Mamiya 645 |
| Mamiya | 55 | 1+2 | Mamiya 645 |
| Mamiya | 80 f.2,8 N/L | 1+2 | Mamiya 645 |
| Mamiya | 150 f.3,8 N/L | 1+2 | Mamiya 645 |
| Mamiya | 105-210 f.4,5 | 1+2 | Mamiya 645 |
| Mamiya | 500 f.5,6 | 1+2 | Mamiya 645 |
| Mamiya | 55-110 f.4,5 N | 1+2 | Mamiya 645 |
| Mamiya | 150 f.2,8 | 1+2 | Mamiya 645 |
| Mamiya | 300 | 1+2 | Mamiya 645 |
| Mamiya | 24 f.4,0 | 1+2 | Mamiya 645 |
| Mamiya | 35 | 1+2 | Mamiya 645 |
| Mamiya | 150 f.3,5 N | 1+2 | Mamiya 645 |
| Mamiya | 45 | 1+2 | Mamiya 645 |
| Mamiya | 210 N | 1+2 | Mamiya 645 |
| Mamiya | 80 f.1,9 | 1+2 | Mamiya 645 |
| Mamiya | 55 | 1+2 | Mamiya 645 |
| Mamiya | 80 f.2,8 N | 1+2 | Mamiya 645 |
| Hartblei | MCTS-PC 45 f.3,5 | | Mamiya/Pentacon six |
| Hartblei | MC Hartblei 2x converter | | Pentacon six |

Super-rotator tilt/shift

1: Stopped down metering not possible
2: Discontinued
3: Leaf shutter disables, only aperture priority

| Producer | Specs | Limitations | Adaptor/Mount | Notice |
|----------|------------------------------|-------------|---------------|--------|
| Arsat | MC Arsat 30 f.3,5 fisheye | | Pentacon six | |
| Arsat | MC Arsat 45 f.3,5 Wide Angle | | Pentacon six | |
| Arsat | MC PCS Arsat 45 f.3,5 | | Pentacon six | Shift |
| Arsat | MC PCS Arsat 55 f.4,5 | | Pentacon six | Shift |
| Arsat | MC PCS Arsat 65 f.3,5 | | Pentacon six | shift |
| Arsat | MC Arsat 80 f.2,8 | | Pentacon six | shift |
| Arsat | MC Arsat 600 f.8,0 | | Pentacon six | Mirror |

Lenses usable in combination with Phase One Multi-Mount

| | | | |
|------------|---------------|---|--------------|
| Carl Zeiss | CFi 30 f.3,5 | 3 | Hasselblad V |
| Carl Zeiss | CFE 40 f.4,0 | 3 | Hasselblad V |
| Carl Zeiss | CFi 50 f.4,0 | 3 | Hasselblad V |
| Carl Zeiss | CFi 60 f.3,5 | 3 | Hasselblad V |
| Carl Zeiss | CFE 80 f.2,8 | 3 | Hasselblad V |
| Carl Zeiss | CFi 100 f.3,5 | 3 | Hasselblad V |
| Carl Zeiss | CFE 120 f.4,0 | 3 | Hasselblad V |
| Carl Zeiss | CFi 150 f.4,0 | 3 | Hasselblad V |
| Carl Zeiss | CFE 180 f.4,0 | 3 | Hasselblad V |
| Carl Zeiss | CFi 250 f.5,6 | 3 | Hasselblad V |
| Carl Zeiss | CFE 350 f.5,6 | 3 | Hasselblad V |

SA

Special purpose lenses

| | | | |
|-------------|------------------------------|---|--------------|
| MF | Mamiya 120 f.4,0 MACRO | | Mamiya 645MF |
| MF+APO | Mamiya 50 SHIFT | 1 | Mamiya 645MF |
| MF+APO | Mamiya 645 Auto bellows unit | 1 | Mamiya 645 |
| Leafshutter | Mamiya 80 MACRO | 1 | Mamiya 645 |

Other lenses usable in combination with adapter

| | | |
|------------|----|--|
| Hasselblad | 30 | |
| Hasselblad | 40 | |
| Hasselblad | 50 | |

Fisheye

| | | |
|----------|--------------|--|
| Pentacon | flektogon 50 | |
| Arsat | 55mm Shift | |
| Biometar | 80mm | |
| Biometer | 120mm | |
| Sonnar | 180mm | |

Limitation codes:

- 1: Stopped down metering not possible
- 2: Discontinued
- 3: Leaf shutter disables, only aperture priority





NOTE
Since the Focusing Screen's surfaces are soft and easily damaged, handle them carefully.

Never touch the surface with bare fingers. Should dust settle on it, merely blow away by using a blower.

If the Focusing Screen needs cleaning, send it to the nearest authorized Phase One service center.

Do not attempt to clean the surface of the Focusing Screen, as it is very delicate.

Do not touch and damage the mirror in any way.



10.0 Maintenance

The Phase One 645DF+ generally needs very little maintenance. But this is a professional tool and should be treated with care and caution. Always do test shots before a photographic session if the camera for any reason has not been used for a long period of time.

A frequently used product should be inspected periodically at the nearest official Phase One repair center. Do NOT try to repair any camera, lens or back errors or malfunctions – Please consult your local dealer.




10.1 Changing the Focusing Screen

1. Remove the lens.
2. Pull the Focusing Screen Release lever A forward, as illustrated, with tweezers to ease the Focusing Screen down.
3. Remove the Focusing Screen from the Focusing Screen Frame by grasping the tab on the edge of the screen with tweezers as illustrated.
4. When installing the screen, pinch the tab of the screen with tweezers, and place the screen on the screen frame.
5. Push the screen frame up using the tweezers until hearing a clicking sound. The screen is now properly installed. Never press down on other parts as this will affect the focus function.

NOTE:
Make sure to re-install the empty battery case into the body.

The empty battery cassette must be inserted into the body.

The batteries may generate heat if the external battery case is connected to the body while the batteries are loaded on the body.

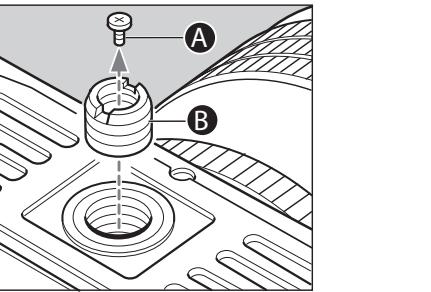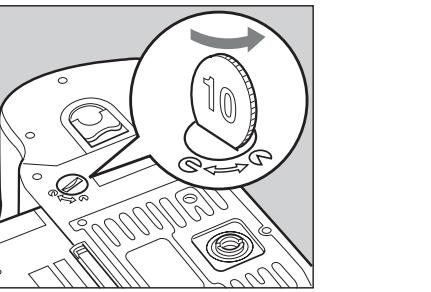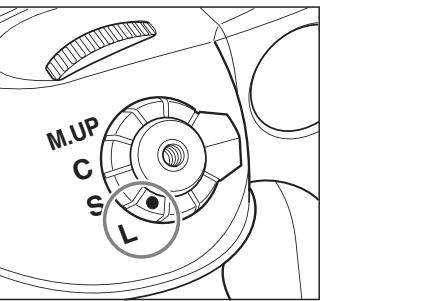

10.2 Battery Socket

Never leave batteries in the socket if the camera or back is not planned to be used for longer periods.

Keep contacts clean and dry at all times.

External Battery Socket

Use an external battery case PE401 when using the camera in cold temperatures where the battery capacity may drop.

1. Turn the shutter release mode selector lever to the L position (power off).
2. Use a coin or similar object to turn and remove the external battery socket cap.
3. Remove the battery case from the camera body
4. Connect the external battery case to the body. Connect the plug of the external battery case in which the batteries are installed, to the external battery socket.
5. Reinstall the original battery case, from which the batteries were removed, in the body. Turn the battery case lock to lock it in the body.

10.3 Tripod/Electronic Shutter Release Contact

Keep all contacts clean and dry at all time.

When using a tripod with 3/8" screw (instead of 1/4" screw) remove the small screw[A] from the tripod screw hole on the bottom of the body using a plus screwdriver, then use a coin to remove the tripod screw adapter bushing[B].

You will find Electronic Shutter Release both on the camera body and on the back. When used, it is recommended to use the shutter release on the back. Keep both contacts dry and clean.

10.4 Camera Display Error-Notification

When Any of These Displays Appear...

| LCD display | | | Causes and remedies | |
|--|--------------------------|--------------|--|--|
| Main LCD panel | Viewfinder LCD read-outs | Magazine LCD | Problems | Remedies |
| | ▶◀ | | * If the camera cannot focus in the AF "S" (Single) mode, you cannot release the shutter. * When an M645 lens is installed and the aperture is less than f/5.6, this indicator appears. | - Try to adjust focus again, or change to the focus lock mode or manual focus mode. - Make the lens aperture faster than f/5.6. |
| batt | ■■ batt | | * This indicator appears when the battery capacity is low. | - Replace with new batteries. |
| -no-db | ■■ -no-db | | * The shutter will not operate when the digital back is not installed onto the camera body. If you try to press the shutter, this indicator appears. | - Install the digital back onto the camera body. |
| CUSTOM | | | * This symbol appears when setting the custom functions but you have not selected user A, B, or C. | - Select a user before changing the custom function settings. |
| | - U - | - O - | * While in manual exposure mode, and when the difference between the set value and metered value exceeds 6EV, this indicator will appear. | - Change aperture or shutter speed. |
| F-- | ■■ - | - | * This will appear when a lens is not installed. * When an M645 lens is installed. | - Install a lens on the camera body. |
| Err-01 Err-02 Err-03 Err-04 Err-05 Err-06 Err-07 | ■■ | | When "Err" appears, some abnormality has been detected in the course of taking photos. | - Replace with new batteries and press the shutter release button. If the "End" indicator still does not disappear, then contact our sales office or service center. |

★ The camera caution mark ■■ will blink if the camera body detects an abnormality.



10.5 Lens Maintenance

Never touch the inner optics of the lens with your fingers. Keep the inner optics perfectly clean with air, a lens brush or the dry cloth delivered with the lens.

Do not touch the contacts. Keep the contacts clean with either a dry cloth or by using a fibreglass brush. Do not use any other tools on the lens.

The lens is not waterproof. It should be immediately dried with a cloth if becomes wet. If it is exposed to salt, moisten a cloth, wring it and carefully clean.



10.6 Back Maintenance

Cleaning the CCD

The Phase One IQ back must have the protection plate fitted when it is not attached to a camera. Dust may accumulate on the IR filter, which will degrade the image quality if not removed. Please follow the directions included in the CCD cleaning kit that came with the IQ back.

10.7 IR Filter on the CCD

The IR filter (Infrared reduction filter) is permanently mounted on top of the CCD. The filter may not be removed for several reasons:

- The focusing of the IQ back camera back will be damaged
- It is only possible to remount the filter without dust getting in between the filter and the CCD if you have access to special clean room facilities
- The Phase One Product Warranty is terminated

10.8

645DF+ Camera Body Specifications



- Open platform for maximum choice and compatibility
- Durable, proven platform for secure operation
- Ergonomic handling and ease of use
- Use Phase One digital lenses, Mamiya AF/AFD lenses or Hasselblad V lenses
- Exposures from 1/4000s to 60 minutes
- Flash synchronization up to 1/1600 sec.

Shutter speed from 1/4000s to 60 minutes, extremely high flash synchronisation up to 1/1600 second to stop action with fast shutter speed or flash.

The mirror and viewfinder of the Phase One 645DF+ camera are almost three times larger than those of 35mm cameras, providing much greater control of focus and composition.

While hosting a complete list of features and custom functions, the Phase One 645DF+ camera is extremely easy to use. All settings important to the exposure are easily controlled by manual dials and soft buttons.

| | |
|--------------------|---|
| Camera type | Modular 645 AF SLR body |
| Lenses | Phase One Digital focal plane lenses, Schneider Kreuznach leaf shutter lenses and Mamiya 645 AFD lenses Compatible with Hasselblad V lenses |
| Backs | Open platform back mount |
| Auto focus | TTL phase-difference AF Focus confirmation in manual mode Infrared AF assists for unfocusing Auto focus lock for swift AF/M shift |
| Shutter | 1/4000s to 60 minutes Up to 120 frames per minute Shutter speed bracketing |
| Flash | Focal plane shutter: Up to 1/125s Leaf shutter lenses: Up to 1/1600s' 1 st and 2 nd curtain flash synchronization X sync terminal and support for TTL flash |
| Light Metering | TTL metering (average, spot and auto) Programmable AEL button Exposure compensation: +/- 5EV |
| Mirror-Up | Electronically-activated by switch on grip |
| Viewfinder | Fixed prism viewfinder Exchangeable diopter from -5 to +3 LCD panel with full exposure information |
| Focusing Screen | Interchangeable focus screens Laser engraved mask for digital back Matte, Grid, Checker, Micropism |
| Selftimer | Self-timer from 2 to 60 sec |
| Remote | Screw-in cable release on shutter button Terminal for electronic triggering devices |
| Stop Down Preview | Stop down button on front of camera |
| Tripod Socket | 1/4 inch and 3/8 inch included |
| Power Requirements | Rechargeable Li-ion battery or 6 AA batteries (standard or rechargeable) External battery pack – 6 AA batteries External AC adapter |
| User configuration | 3 Custom dial modes for capture settings 36 custom settings Customizable dials and buttons |
| Size | W, H, D // 6, 5, 7.2" // 153, 128, 184mm |
| Weight | 35 oz. / 1030g. w/o batteries |

Content is subject to change without notice

10.9 Phase One 645DF+ Housing Specification

Camera type : 6x4.5cm format, electronically controlled focal-plane shutter, TTL multiple mode AE, AF single lens reflex

Actual Image size: 56x41.5 mm

Lens mount : Mamiya 645 AF Mount, compatible with M645 Mount (manual focus confirmation, focus aid, stopped-down exposure metering)

Viewfinder : Fixed prism viewfinder magnification x0.71; built-in diopter adjustment (-2.5 to +0.5, optional diopter correction lenses provide adjustment ranges of -5 to -2 diopter and 0 to +3 diopter); built-in eye-piece shutter

Focusing screen : Interchangeable, Matte (standard), Checker, and Micropism Type C for Non-AF M645 lenses.

Field of view : 94%* of actual image

Viewfinder info : Focus mark, defocus mark, warning mark, aperture value, shutter speed, metering mode (A, S, A/S), exposure compensation value (difference between set value and metered value) and flash ready/OK lamp with TTL Metz connection.

AF method : TTL phase difference detection method; sensor: CCD line sensor (I+I type); operating range: EV0 to EV18 (ISO 100)

Focus area : Displays the focus area in the viewfinder screen

AF assist beam : Activates automatically under low light, low contrast.

Range: 9m (when using AF80mm f/2.8 D lens)

AF lock : By pressing the shutter release button halfway down in the AF-S mode, or by pressing the AFL button.

Exposure modes : Aperture-priority AE, shutter-priority AE, programmed AE (PH, PL setting possible), and manual

AE meteringmode : TTL metering, center-weighted average (AV), spot (S), and variable ratio (A-S auto)

Increments of shutter : Both the shutter speed and the aperture level can be set to 1/3 or speed and aperture 1/2 using the electronic dial lock function

Metering range : EV 2 to EV 19 (with ISO100 and AF80mm f/2.8 D lens)

Exposure compensation : Expandable to ± 5 EV

AE lock : With AEL button; canceled by pressing the button again. When AEL button is pressed, exposure compensation and metering difference is displayed in the viewfinder. (+-6EV, 1/3 steps in M mode).

Shutter : Electronically controlled vertical metal focal-plane shutter. (vertical travel)

Shutter speed : AE 30 to 1/4000 sec. (1/8 step), manual 30 to 1/4000 sec. (1/2 or 1/3 steps), 1 min-60 sec. (1 step), X, bulb (Bulb, electronically controlled), tIME, shutter curtain protection mechanism

Auto bracket shot:Enable with auto bracket button (3 frame shots, 5 frame or 7 frame shot with auto bracketing). Specify 1/3, 1/2, 2/3 or 1EV steps.

Flash synch : X contact point, 1/125 seconds. Synchro speed can be changed away from terminal.

Flash control : TTL direct flash control, supports Metz SCA3002 system (SCA3952 Adapter)

Mirror up shot : Select by pressing the mirror up button.

LCD displays : Program AE mode icon, synchro mode icon, shutter speed, aperture, custom function icon, user function icon, focal plane mode icon, lens shutter mode icon, AE lock icon, auto focus lock icon, mirror up icon, focus area icon, auto bracketing icon, self timer icon, repeat mode icon, delay mode icon, remaining battery power icon, spot metering icon, dial lock icon, flash compensation icon, exposure compensation icon, exposure compensation, delay time.

Sync terminal : X contact (sync speed 1/125 sec.)

Cable release socket : On shutter button

Remote-control terminal : On side of body; electromagnetic cable release RE401 and RS402

Self timer : Self timer intervals can be set from 0.5 to 90 sec.: 0.5-10 sec. by the second, 10 to 90 sec. in 10 sec. units, 2 to 10 mins by the minute and 10 to 6 mins in units of 10 minutes.

Depth-of-field confirmation : Preview Button on body

Custom settings : 19 items


Tripod socket : U 1/4 inch and U 3/8 included

Power requirements : Rechargeable Li-ion battery or 6 AA batteries (alkaline or rechargeable)

External power socket : An external battery case can be connected.

Size & weight : 6 "(W)X5 "(H)X6 "(D) / 153(W)X128(H)X152(D)mm
2.3 pounds / 1,030 g (body only)

* This information is based on a linear (horizontal/vertical) measurement.

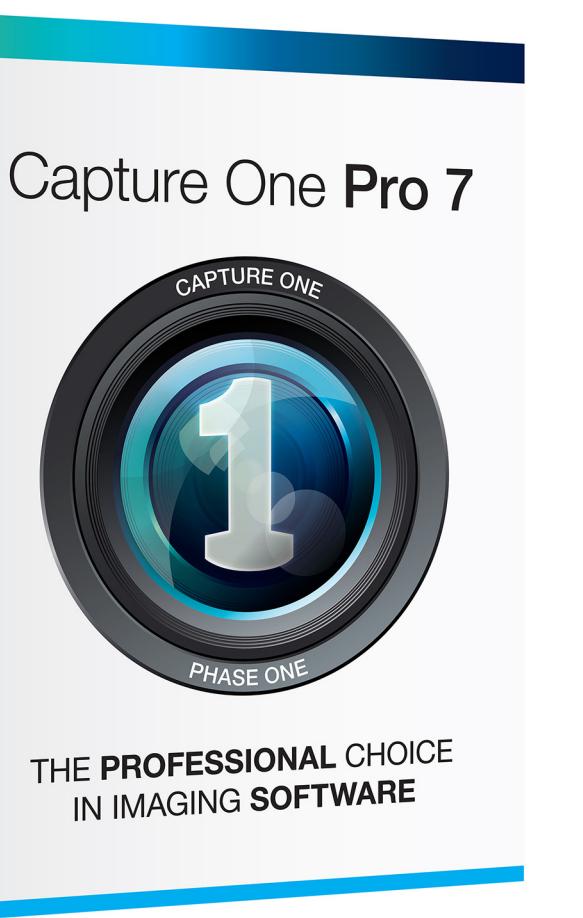

11.0 Software

Capture One Pro is a professional RAW converter and image editing software. It contains all the essential tools and high-end performance in one package to enable you to capture, organize, edit, share and print images in a fast, flexible and efficient workflow.

Please go to <http://help.phaseone.com/en> for further information regarding Capture One. (This online Users Guide can also be found under the Help menu on Windows and Mac). A PDF of the Capture One User Guide can also be found on the USB memory stick that came with your IQ back.

11.1 To Import Images...

1. Go to File and select "Import Images..." The dialog box will open to browse files.
2. Navigate to the applicable folder, card or disk in the Locations tool.
3. Select Capture folder (import location) and type in the job name and Metadata (copyright, caption) if desired.
4. If you want to select a naming format for the imported files, press "Format" in the Naming tool.
5. You can select all or specific images to import.
6. Press "Import All". You can continue working while images are imported in the background.

Inserting a memory card into a card reader will automatically bring up the Import Images dialog window.

Shooting Tethered

Capture One Pro is also used to shoot tethered from an IQ back. Find out more on page 53 or for more information please consult the online User Guide available in the Capture One Help menu or go direct to <http://help.phaseone.com/CO7/Capture/Tethered-Shooting.aspx>



PHASE ONE



12.0 Main Accessories

V-Grip Air vertical grip

The Phase One V-Grip Air is the first vertical grip with an integrated flash trigger that allows sync speeds up to 1/1600s.

The V-Grip Air offers enhanced camera handling to owners of a Phase One 645DF+ camera system through identical controls in portrait orientation. The function buttons are individually programmable to suit the photographer's preferences.

The V-Grip Air adds extra power to the Phase One 645DF+ camera. You can use Phase One rechargeable batteries or common AA-batteries in the V-Grip Air prolonging the shooting time of the camera.

The V-Grip Air features a USB connection which makes firmware updates to the 645DF+ camera very easy.

The integrated L-bracket makes it possible to mount the camera in portrait orientation on a tripod, without changing the center of focus for the lens.

The integrated flash trigger in the V-Grip Air allows the photographer to work with all current Profoto Air flash equipment without the need for additional hardware. Adding a Profoto transceiver, the V-Grip Air allows photographers to trigger virtually all flash equipment available in the market

L-Bracket

The Phase One L-Bracket comes with a genuine hand made and high quality leather hand strap. The strap ensures that the camera can be securely operated without fear of dropping the camera. It provides good support when photographing handheld and also offers a relaxing hold on the hand while resting in-between shoots.



PHASE ONE

L-Bracket Continued

The L-Bracket features an Arca Swiss type quick release mounting on both Portrait and Landscape position. Whether the camera is mounted in vertical or horizontal position the lens center stays in exactly same position. The square Arca Swiss type shoe can be used with all Arca Swiss compatible quick release and screw-on clamps.

For compatibility with Really Right Stuff clamps, Phase One offers an optional accessory "Really Right Stuff compatibility kit".

Part # 71059 L-Bracket with Hand Strap for standalone use on 645AF/DF (included with V-Grip)

Part # 71061 Hand Strap for use if both landscape and portrait handstrap is desired with V-Grip

Part # 71062 Really Right Stuff compatibility kit for L-bracket (Ensures firm connection with an RRS Bracket)

Li-Ion battery for 645DF+

The rechargeable Li-ion battery for the 645DF+ and 645DF camera powers up to 10,000 captures on a single charge, giving you more time to focus on your creativity.

This is more than 3 time the capacity of 6 normal disposable AA batteries. Say good bye to unexpected interruptions in the middle of a shoot, and save the environment with rechargeable Li-ion batteries instead of old Alkaline or Zinc-chloride disposable battery technology.

Short charge time

You can charge this battery in under three hours and enjoy up to 10,000 shots before you need to recharge again.

Works everywhere

The new battery comes with a charger featuring a 100-240 volt universal power adapter, so you can use it virtually everywhere in the world.



Digital back battery

The Hähnel dual battery charger will charge two 7.2V digital back batteries simultaneously with clear numerical indication of percentage charged. The charger comes with an international power outlet adaptor for compatibility with power outlets all around the world.

Part # 70510 Hähnel Twin PRO charger for P+ and IQ

Battery Part # 30900089 Phase One P+ and IQ battery (2900 mAh)



Profoto air transceiver

The Profoto Air Sync Transceiver can be used with the Phase One V-Grip Air to trigger any third party flash system wirelessly.

If you don't have access to the Phase One V-Grip Air you can install one transceiver unit in the camera flash shoe and one at the flash system.

The Profoto Air Transceiver can be setup both as transmitter and as receiver unit. Setting it up as receiver unit makes it possible to trigger the 645DF+/DF camera from another unit that you hold in your hand - for this you will need an optional remote camera trigger cable.

Part # 70263 Profoto Air Sync Transceiver

Part # 50300179 Profoto remote camera trigger cable



Remote release cable

The Phase One Electromagnetic release cable connects to the multi-pin connector on the side of the 645DF+. It lets you trigger the camera electronically from a distance of either 1 meter (3.2 ft) or 5 meter (16.4 ft).

Part # 70258 Electromagnetic release cable 1 m

Part # 70259 Electromagnetic release cable 5 m



Auto extension rings


The Phase One Auto Extension Rings supports all Phase One, Schneider Kreuznach and Mamiya 645 lenses. The electronic contact set ensures auto aperture functionality on appropriately equipped lenses. When attached via an Auto Extension Ring, all lens models are limited to manual focus and focal plane shutter use.

There is practically no light intensity degradation when using the extension rings, and there is no optical dispersion either, as glass elements are not required in the construction.

Part # 70254 Auto Extension Ring No. 1 (11,8 mm)

Part # 70255 Auto Extension Ring No. 2 (23,6 mm)

Part # 70256 Auto Extension Ring No. 3 (35,4 mm)

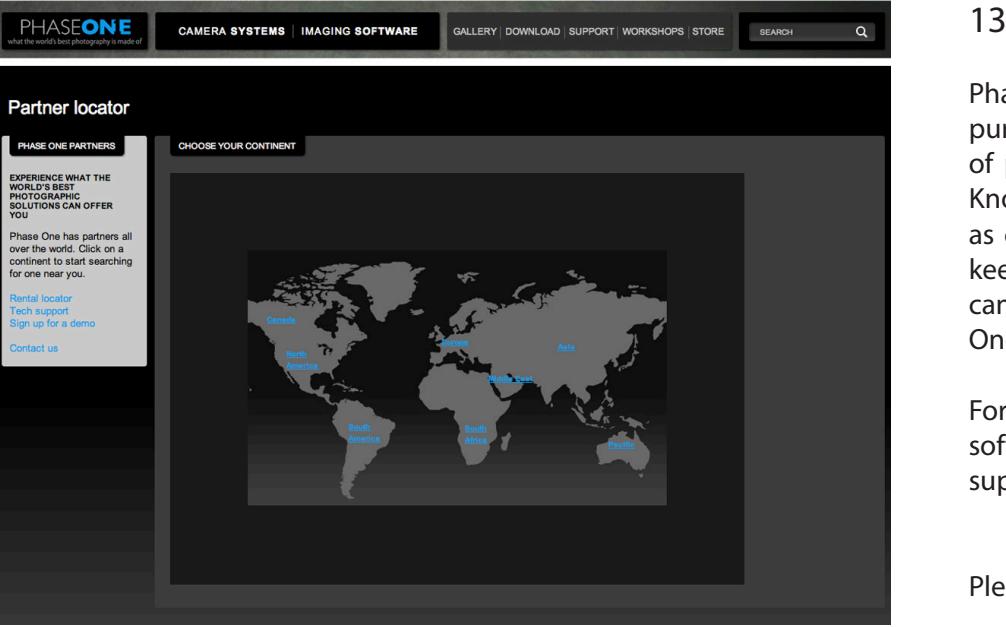

13.0 End User Support Policy

Phase One guarantees World Class Support and Service with every product purchased. Each customer becomes a part of the Phase One community of professional photographers, with completely free access to our online Knowledge Base, Forum and Support area of the Phase One website. As well as contact with a dedicated team of technical support specialists, to help keep your Phase One equipment in perfect working order, every customer can access a wide range of material to help familiarize themselves with Phase One ownership.

For support concerning Phase One equipment, Capture One and Media Pro software, including license and activation issues, please contact technical support through our website. If you are not a registered user, please sign up

Please check www.phaseone.com for the latest updated support policy.


Worldwide Dealer Network

At Phase One we think globally but act locally. Phase One's products are sold through a worldwide network of dedicated and competent local partners to make after-sales support convenient for you.

Phase One's local partners offer first line support to their customers. Many provide additional services such as training, extended warranty agreements, upgrade programs, and many other services that will add value to your Phase One investment. Contact your local Phase One partner to discuss your options. Digital camera back pricing and repairs are also handled locally.

If there is no local partner in your area, then please contact Phase One directly, and we will assist you directly or through one of our partners.

Find your local Phase One partner or take advantage of Phase One's wide range of on-line support tools at <http://support.phaseone.com>

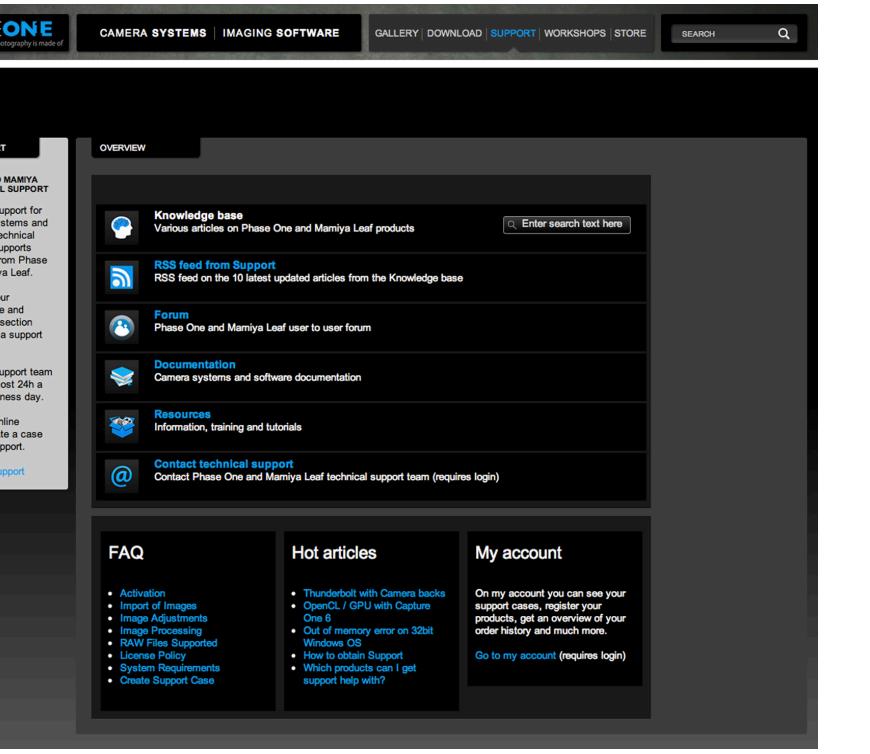

13.1 Web Resources

Phase One offer users a host of online resources including inspire, enthuse and inform. Find detailed information including User Guides and manuals about Capture One or our Digital Backs from www.phaseone.com

Knowledge Base


Phase One's searchable Knowledge Base at <http://support.phaseone.com> provides detailed answers to many users questions. This 'self-service' site is free of charge and available to all Phase One owners.

Capture One On-line Support Forums

Go to Phase One's official support forum to share your experiences and get assistance from other Phase One owners as well as from Phase One's Technical Support team at <http://support.phaseone.com>

Some Phase One partners offer on-line support forums, hosted from their own web pages. Please note that these forums are governed by separate rules. Phase One offers no guarantees and assumes no responsibility or liability with respect to the support provided by our local partners.

Many resources and tutorials are created on voluntary basis, and Phase One is always interested in seeing your videos, reviews, blogs or websites concerning Phase One.

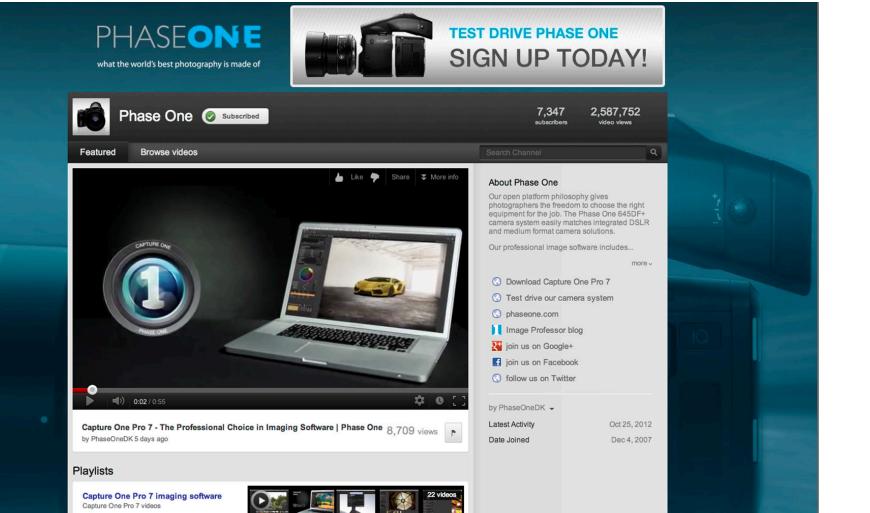

PhaseOneDK Official YouTube Channel

Check out our YouTube channel that provides access to tutorials, showcases, technical videos and more at <http://www.youtube.com/PhaseOneDK>

Twitter, Facebook and Google+

There are plenty of ways to get in touch with Phase One across all the main social media platforms. Find us on Facebook, follow us on Twitter and connect with us on Google+ for the latest product news, promotions and much more.

User Guide: Appendix

14.0 Open Platform – Freedom of Choice

Phase One's Open Platform policy delivers maximum choice and compatibility with a wide range of different camera platforms.

This section covers the IQ back's compatibility with the Hasselblad V and H series, Mamiya RZ67, Phase One 645, Mamiya 645, Contax 645 and View Camera solutions.

Double Exposure Protection

It is not possible to accidentally double expose an image by capturing one shot quickly after another when an IQ back is used on cameras such as the Phase One 645DF+/DF/AF, Mamiya 645DF/AFDIII or Hasselblad 555 ELD (DIG mode). The electronic communication with the body ensures that the IQ back is ready before allowing release of the next shot. However, users of other camera bodies that do not use the electronic interface from the IQ will have to wait for the ready beep signal before releasing the next shot.

Viewfinder Masks

Cameras including the Mamiya RZ67 and Hasselblad V-series need a viewfinder mask as the image area of these models is different to the image sensor size of the three IQ models. Go to page 99 to find out more about the IQ sensors and go to page 168 for the full list of focusing Screens and viewfinder masks.





14.1 IQ2 Back and Phase One 645AF/DF/DF+ and Mamiya 645 AFD

The IQ back is fully integrated with the Phase One and Mamiya 645 camera series and functions as a part of the whole camera system. The IQ back communicates with the cameras through a fast internal electrical computer interface.


Find out more about the Phase One DF+ camera and IQ back from page 12.

14.2 Mounting IQ back on the Phase One 645 AF & Mamiya 645 AFD Series

Ensure that the camera mirror is up and the shutter is open when no digital back is attached. When attaching the IQ back to the camera body the shutter will close and the mirror will come down.

1. Place the bottom of the IQ back in the locking mechanism.
2. Press the button (circled above left) with your thumb and lever the back into place.
3. Release the button to lock into position.

Failure to perform this procedure properly can cause an error with the camera body where the shutter will continuously open and close. If this occurs, remove the IQ back and follow steps 1 to 3 again.

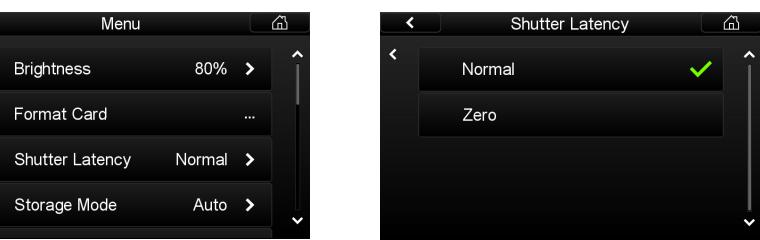

PHASE ONE

14.3 More Details: Phase One and Mamiya 645 Series Cameras

Power Management and Shutter Latency

The IQ CCD is put to sleep to reduce power consumption when it is not in use. The IQ needs to wake up before shooting and the timing of this wake up signal is referred to as the Latency.

The Phase One and Mamiya 645 camera body response time is independent of the shutter latency setting so it is therefore recommended to keep the latency on the Normal (default) setting, as this will ensure a longer battery life.

Studio Flash Sync on the Camera Body

A flash sync lead should be connected to the camera body when using the IQ back on Phase One 645AF or 645DF/DF+, Mamiya AFD or AFDII models.

Always use a flash cable and/or equipment that provides grounding for the flash.

Image Orientation

The CCD in the IQ back is positioned in a landscape orientation. However, the IQ back has an internal sensor that detects when it has been rotated. Thus, when the camera is rotated and an image is captured in portrait position the image will appear correctly oriented on the LCD and in the Capture One application.

Image (left) features the V-Grip Air. Phase One Part # 71507

PHASE ONE

PHASE ONE



Mirror Up

When using mirror up with the Drive Dial in the M.UP position ensure that the Exposure Mode Dial and the focus mode are both in Manual mode (M).

It is not possible for the camera to measure light or focus when the mirror is up. If using the Mamiya 645AFD, please consult the Mamiya 645 Instruction manual to determine how to use the Mirror Up function.



15.0 IQ2 Back for Mamiya RZ67

The IQ backs are compatible with the Mamiya RZ PRO II and PRO IID with the use of an adaptor plate.

The 645DF+ version of an IQ back can be used on a Mamiya RZ PRO IID with a Mamiya RZ PRO IID adaptor plate. (Phase One Part # 70994)


The Hasselblad V version of an IQ back can be used on the older version Mamiya RZ PRO II with a Mamiya RZ Pro II adaptor. (Phase One Part# 70964)

N.B. It is possible to use a Hasselblad V version of an IQ back on the new Mamiya RZ67 PRO IID by getting the back mount plate modified with the following Mamiya service part number: Y22995-RZ.

15.1 Mounting IQ Back on the Mamiya RZ67

1. Place the bottom of the IQ back in the locking mechanism.
2. Press the button at the top of the back with your thumb and lever the back into place.
3. Release the button to lock into position.

N.B. It is important to ensure that the bottom part of the IQ back is attached correctly before the upper locking mechanism is pressed together.

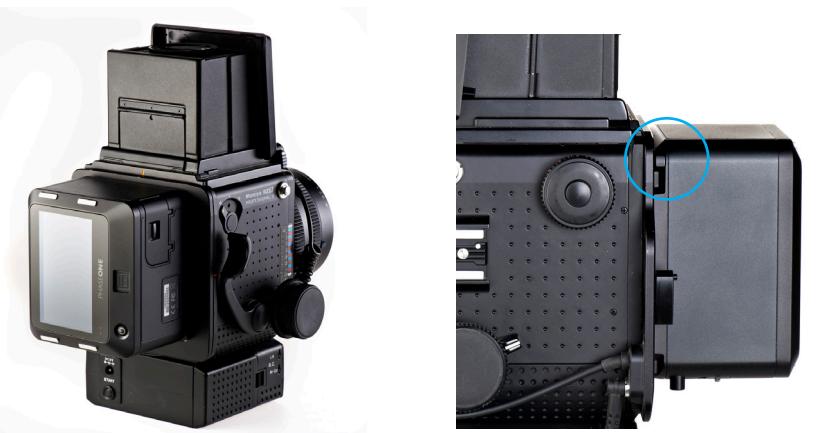

Mounting the IQ Back Vertically

The CCD in the IQ back is positioned in a landscape orientation. However, it is possible to mount the IQ back in an upright orientation to capture images in a portrait format without having to rotate the camera. The IQ back has an internal sensor that detects when it has been rotated so images will appear correctly oriented on the LCD and in the Capture One application.

Mount the IQ back in the portrait position by lining up the adapter mount to the corresponding indentations on the left side of the back. Press the button (circled left) and lever the back into place. Release the button to lock into position.



15.2 Viewfinder Masking

The image area of Mamiya RZ67 at 56x69.5 mm is larger than the size of the three IQ model's sensors so it is necessary to insert a viewfinder mask.

There are two different masks available for the Mamiya RZ67 according to which IQ is being used. (The size IQ280 and IQ260 models CCD is 53.9x40.4 mm while the IQ140's CCD measures 43.9x32.9mm). Please check page 168 for the relevant viewfinder mask.

Insert a Viewfinder Mask

1. Remove the protection tape from the mask.
 2. Dismount the prism/waist-level finder and remove the focus screen.
 3. Place the viewfinder mask in the bracket that holds the focusing screen.
 4. Re-mount the viewfinder focus screen.
 5. Re-attach the prism/waist-level finder.
- N.B. Please check the relevant Mamiya RZ67 manual regarding how to dismount the viewfinder and remove the focus screen.




15.3 More Details: Mamiya RZ67

Mode Selector

The mode selector on the trigger button should be turned to the white dot when used with the IQ back. The selector should be set to the orange dot to avoid draining the small battery when the IQ back is attached to the body and not in use.

Warning: Even if the IQ back is turned off, the battery will drain slowly if the orange dot is not selected

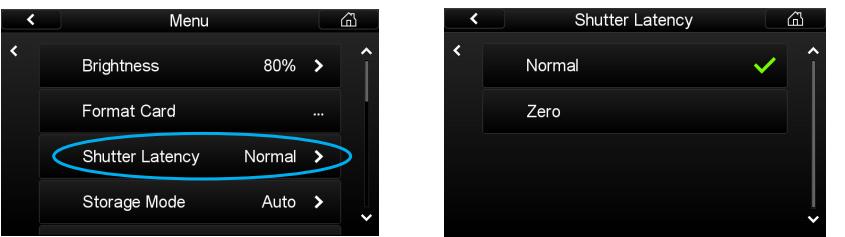

Shutter Latency Setting Mamiya RZ PRO II

An IQ back should be set to Normal Latency when it is used with a Mamiya RZ PRO II.

Shutter Latency Setting Mamiya RZ PRO IID

Select the special Mamiya RZPRO IID camera mode, which available in the Camera mode menu to ensure that the correct latency setting is used.



Studio Flash Sync on the RZ lens

A flash sync lead should be connected to the port on a lens when an IQ back is used on a Mamiya RZ67 PRO IID. On the older PRO II, use the flash sync connector on the Adapter plate. (The flash sync port on the IQ back is for use with Large format cameras where no digital interface is available).

Mirror Up

Mirror up operation is only recommended if using Mamiya's own double cable release.

Double Exposure

Is only possible to get a double exposure when a Hasselblad V mount plate is being used. Avoid a double exposure by waiting for a ready-beep from the IQ back before capturing another image.



16.0 IQ2 Back for Hasselblad V Series

The Phase One IQ back can be mounted on a wide range of Hasselblad cameras including Hasselblad 555 ELD, 553 ELX, 501 CM and 503 CW.

- 16.1 Mounting the IQ Back on a Hasselblad V Series Camera
 1. Place the bottom of the IQ back in the locking mechanism.
 2. Press the button at the top of the back with your thumb and lever the back into place.
 3. Release the button to lock into position.

N.B. It is important to ensure that the bottom part of the IQ back is attached correctly before the upper locking mechanism is pressed together.

Mounting the IQ Back Vertically

The CCD in the IQ back is positioned in a landscape orientation. However, it is possible to mount the IQ back in an upright orientation to capture images in a portrait format without having to rotate the camera. The IQ back has an internal sensor that detects when it has been rotated so images will appear correctly oriented on the LCD and in the Capture One application.

Mount the IQ back in the portrait position by lining up the adapter mount to the corresponding indentations on the left side of the back. Press the lock button (circled left) and lever the back into place. Release the button to lock into position.

Warning! DO NOT MOUNT WHILE IN S OR RS MODE

N.B. The Phase One IQ back should not be mounted while the camera is set to mirror up (S or RS modes). The camera should be set to AS, A or 0 mode. Also ensure that the lens is not jammed when connecting the flash sync cable to the Phase One IQ back.



- 16.2 Mounting a Viewfinder Mask on a Hasselblad V Series Camera

The image area of a Hasselblad V camera body at approx. 6x6cm is a different size to the three IQ model's sensors so it is necessary to insert a viewfinder mask.

There are two different masks available for Hasselblad V series cameras according to which IQ is being used. The size IQ280 and IQ260 models CCD is 53.9x40.4 mm while the IQ140's CCD measures 43.9x32.9mm. Please check page 168 for the relevant viewfinder mask.

Insert a Viewfinder Mask

1. Remove the protection tape from the mask.
2. Dismount the waist-level finder and remove the focus screen.
3. Place the viewfinder mask in the bracket that holds the focusing screen.
4. Re-mount the viewfinder focus screen.
5. Slide the waist-level finder back into place.

N.B. Please check the relevant Hasselblad camera manual instructions before removing the focus screen.



16.3 More Details: Hasselblad V Series

Sync Cable

A sync cable is always connected from the lens to the small connector in the front plate on either the left or right side of the IQ back regardless of which Hasselblad V type camera used.

Flash Lead Connection

A flash cable is always connected to the F-connector on the IQ back with all Hasselblad V series cameras.

Mirror Up and Shutter Latency Setting

Set the Latency to Zero when shooting with a Hasselblad V, 903 CW and 905 CW.

Tethered Capture

Plug a FireWire 800 cable into the IQ back for tethered capture to a computer using Capture One Pro.



16.4 Hasselblad 555 ELD

Ensure that the shutter release on the front of the Hasselblad 555 ELD is in the DIG position when using a Phase One IQ back.

If for any reason you have to use the 555ELD in Film position (E.g. If the DIG is not working) then set the IQ to Zero Latency.



Shutter Latency Setting

The IQ back can be used with both Normal and Zero latency with the Hasselblad 555 ELD.

An IQ back has a default Normal latency setting that helps to save battery life. But users may experience unwanted double exposures when using a two-shot release cable.

Motor Cable on Hasselblad 555 ELD

A motor cable is not required when using an IQ back on a Hasselblad 555 ELD body.

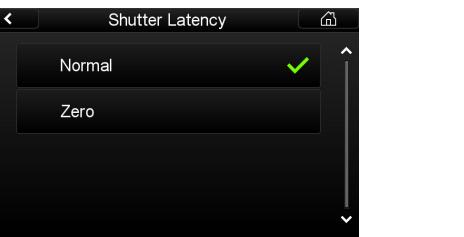



16.5 Hasselblad 553 ELX

When using the IQ back on some Hasselblad motorized bodies (i.e. Hasselblad ELX or Hasselblad ELM series), a motor cable is supplied to enable users to fire the camera shutter from a computer using the Capture One Pro Capture button. (See circled button left).

Cable Connections

The cable is connected between the multi-connector on the IQ back and the DIN connector on the Hasselblad. Ensure that A or AS mode are not used.

WARNING! Please note that the Phase One IQ back should not be mounted while the camera is set to mirror up (S or RS modes). Make sure that the lens is not jammed or locked open on the "B" setting when connecting the flash sync cable to the Phase One IQ back.

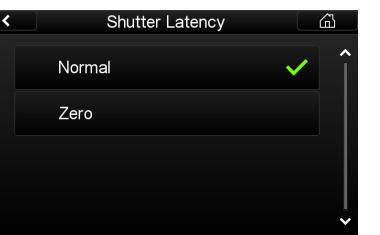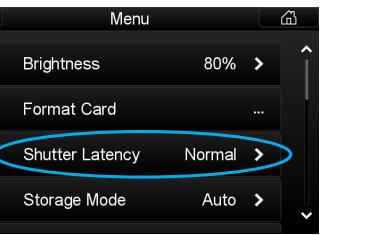

16.6 Hasselblad 501 CM and 503 CW without Winder

The Phase One IQ back can also be used with mechanical Hasselblad cameras such as the 501 CM and 503 CW. These cameras are operated in single shot mode via the shutter release button or a standard cable release.

WARNING! Please note that the Phase One IQ back should not be mounted while the camera is set to mirror up. Also ensure that the lens is not jammed or locked open on the "B" setting when connecting the flash sync cable to the Phase One IQ back.

Shutter Latency Setting

Set the latency setting to Normal on the IQ back while using a mechanical Hasselblad. Set the latency setting to Zero whilst using the Mirror Up function or if you need to rapidly press the shutter button. Precautions must be taken not to trigger the shutter too fast when using Normal latency. If any problems arise, it is recommended that users look at the green LED on the back while slowly pressing the mechanical trigger on the camera body. Users can safely press the button all the way in the moment the LED flashes.

16.7 Hasselblad 503 CW with Winder CW

WARNING! Please note that the Phase One IQ back should not be mounted while the camera is set to mirror up. Make sure that the lens is not jammed or locked open on the "B" setting when connecting the flash sync cable to the Phase One IQ back.

Set the Shutter Latency to Zero when using a 503 CW winder with an IQ back.



16.8 Cables shipped with IQ back for Hasselblad V
Classic and Value Added backs come with all the cables needed for the specific camera platform. A Value Added back also comes with an additional 50300143 cable for use with large format and technical cameras.

Part# 50300145 Motor cable for Hasselblad ELX. (Used for host capture when the IQ back is used on a Hasselblad ELX body).



Part# 50300148 Sync cable short (For use with all Hasselblad medium format bodies)



Part# 50300143 Multi connector to Lens sync (for use with Large format - in two shot mode)

Part# 50300144 This cable is available as a separate purchase only.
From multi connector to mini jack female (for use to adapt older Large format walk-up cables or older Kapture Group one shot adaptor cables to connect to the multiport).



17.0 IQ2 Back for Hasselblad H Series

The Phase One IQ (H-mount) digital back is designed specifically for Hasselblad H1 and H2 cameras.

17.1 Mounting the IQ back on the Hasselblad H1/H2

1. Ensure that the mirror is up and the shutter is open. (This is the default position when no cassette is attached to camera body).

2. Place the bottom of the IQ back in the locking mechanism.

3. Lever the back into place.

4. Do not let go of the back until you hear a clicking noise that signals the back is locked into position. The mirror will come down and shutter will close when IQ back is attached to the camera.

N.B. It is important to ensure that the bottom part of the IQ back is attached correctly before the upper locking mechanism is pressed together.

Removing the IQ back from the Hasselblad H1/H2

1. Rotate and press the silver button (illustrated left) to unlock the back. (Ensure that the back is supported in your hand before pressing this button).

2. Gently lever away the top of the back first. Be careful with the contacts and protective glass on the back.

N.B. Your IQ back should always be protected by its plate when it is not attached to the camera.



17.2 Viewfinder Masking

The image area of the Hasselblad H1/H2 cameras is 56x41.5 mm. A viewfinder mask is only needed for the smaller size of the IQ140 CCD that measures 44x33mm. Viewfinder masking is not necessary for IQ280 and IQ260 models as their light sensitive CCD measures 53.9x40.4 mm.

Please check page 168 for the relevant viewfinder mask.

Insert a Viewfinder Mask

1. Remove the protection tape from the mask.
 2. Dismount the prism/waist-level finder and remove the focus screen.
 3. Place the viewfinder mask in the bracket that holds the focusing screen.
 4. Re-mount the viewfinder focus screen.
 5. Re-attach the prism/waist-level finder.
- N.B. Please check the relevant Hasselblad H-series manual regarding how to dismount the viewfinder and remove the focus screen.




17.3 More Details: Hasselblad H Series

Camera Display

The Hasselblad H1/H2 incorporates a screen that displays information about the camera set-up. It shows the aperture value, AF mode, shutter speed etc.

The Hasselblad H1/H2 will also display some IQ back information on this screen. For example, error messages including "Digital back storage media is full" will be displayed on the screen if the CompactFlash in the IQ back is full to capacity.

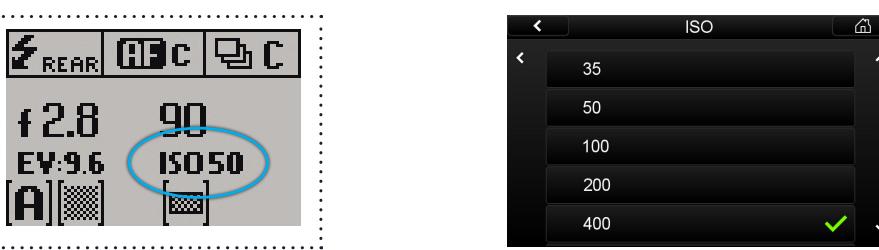

ISO Settings

The ISO value is also displayed on the H1/H2 camera screen. The ISO setting can be adjusted from the camera back or in Capture One software when shooting tethered.

Please consult page 61 of this manual for details on setting the ISO. Go to page 53 for more information about tethered shooting.

Auto Exposure

All the Hasselblad H1/H2 auto exposure modes are fully supported by the IQ back.

Please check the relevant Hasselblad H-series manual for more information on exposure modes.



PHASE ONE

158

Viewfinder Information

The viewfinder information bar is located below the image area within the viewfinder display. It displays the camera's exposure mode and values etc. It also includes a counter with the number of captures remaining on the storage media. (See top bar circled left). '99' is the maximum number displayed. '99' will continue to be displayed if there are more than that remaining on a CompactFlash card. An 'E' indicates that the storage media is full. Users will have to delete some captures or replace the CompactFlash card before continuing. (See bottom bar circled left).

Double Exposure Protection

It is not possible to accidentally double expose an image by capturing one image quickly after another when an IQ back is used on a Hasselblad H1/H2.

N.B. At the end of an exposure, image information has to be moved from the CCD to the processing system. During this short period of time the CCD must be protected from light exposure. The IQ back ensures that the CCD is safely cleared of information by disabling the Hasselblad camera's shutter release during this procedure.

Image Orientation

The CCD in the IQ back is positioned in a landscape orientation. However, the IQ back has an internal sensor that detects when it has been rotated. Thus, when the camera is rotated and an image is captured in portrait position the image will appear correctly oriented on the LCD and in the Capture One application.



Flash Lead Connection

A flash cable is always connected to the Hasselblad H1/H2 camera body.

The flash sync cable must not be connected to the camera back when used on a Hasselblad H1/H2. The flash sync connector on the IQ back is only intended for use with a Phase One FlexAdaptor or other large format adaptors.

17.4 Cables Shipped with IQ back for Hasselblad H

No cables are required to use the IQ back with a Hasselblad H1/H2.

A Value Added IQ back comes with an additional multi-connector to Lens sync cable (part# 50300143) for use with large format cameras in two shot mode.

Part# 50300144 This cable is available as a separate purchase only.

From multi-connector to mini jack female (for use to adapt older Large format wake-up cables or older Kapture Group one shot adaptor cables to connect to the multiport).

PHASE ONE

159



18.0 IQ2 Back for Contax 645

The Phase One IQ (Contax mount) digital back is designed specifically for the Contax 645 camera. The IQ back communicates with the Contax 645 through a fast internal electrical computer interface and utilizes TTL phase difference detection type auto focus system.

18.1 Mounting IQ Back on a Contax 645

1. Place the bottom of the IQ back in the locking mechanism.
2. Press the button at the top of the back with your thumb and lever the back into place.
3. Release the button to secure it into position.
4. Lock the IQ back into place by sliding the switch left towards the release button. (See switch circled below left).

N.B. It is important to ensure that the bottom part of the IQ back is attached correctly before the upper locking mechanism is pressed together.

Removing the IQ back from the Contax 645

1. Slide the locking switch to the right position.
2. Press the button (circled left) to unlock the back. (Ensure that the back is supported in your hand before pressing this button).
3. Gently lever away the top of the back first. Be careful with the contacts and protective glass on the back.

N.B. Your IQ back should always be protected by its plate when it is not attached to the camera.



18.2 Viewfinder Masking

The image area of the Contax 645 camera is 56x41.5 mm. A viewfinder mask is only needed for the smaller size of the IQ140 CCD that measures 44x33mm. Viewfinder masking is not necessary for IQ280 and IQ260 models as their light sensitive CCD measures 53.9x40.4 mm.

Please check page 168 for the relevant viewfinder mask.




18.3 More Details: Contax 645

Exposure Modes

The Contax 645 manual (M) and semi-auto exposure modes (Av, Tv) are fully supported by the IQ back. Please note that Bulb is only supported on Contax/IQ back when used in conjunction with the Live View function. Go to Chapter 21 (from page 169) for more information about Live View.

Please check the relevant Contax 645 manual for more information on exposure modes.

Ensure that exposure times are limited between 1/4000 second and approx. 1 second to obtain the highest possible quality with an IQ back and Contax 645. Please note that it is not possible to expose images longer than 60 seconds with an IQ back.

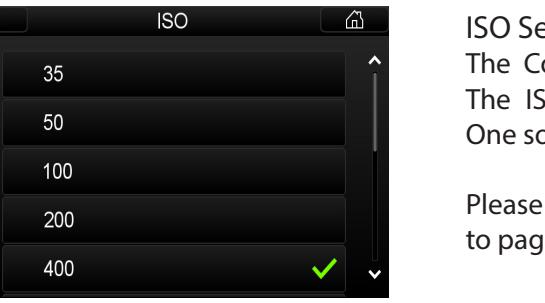

ISO Settings

The Contax 645 exposure modes use the ISO value set in the IQ back. The ISO setting can be adjusted from the camera back or in Capture One software when shooting tethered.

Please consult page 61 of this manual for details on setting the ISO. Go to page 53 for more information about tethered shooting.



Double Exposure Protection

It is not possible to accidentally double expose an image by capturing one image quickly after another when an IQ back is used on a Contax 645 e.g. when using the continuous drive mode.



TTL flash

Using TTL flash with the Contax 645 camera and IQ back will result in a 2 f-stop overexposure. When using TTL flash, the exposure compensation on the flash unit must therefore be set to -2 f-stops. This overexposure happens because the CCD element reflects light differently than film and this cannot be communicated to the Contax.



Image Orientation

The CCD in the IQ back is positioned in a landscape orientation. However, the IQ back has an internal sensor that detects when it has been rotated. Thus, when the camera is rotated and an image is captured in portrait position the image will appear correctly oriented on the LCD and in the Capture One application.



18.4 Flash Lead Connection

A flash cable is always connected to the Contax 645 camera body.

The flash sync cable must not be connected to the camera back when used on a Contax 645. The flash sync connector on the IQ back is only intended for use with a Phase One FlexAdaptor or other large format adaptors.



18.5 Cables Shipped with IQ back for the Contax 645 (Value added system only)

Part# 50300143 Multi-connector to Lens sync (for use with Large format - in two shot mode)



Part# 50300144 This cable is available as a separate purchase only.
From multi-connector to mini jack female (for use to adapt older Large format wake-up cables or older Kapture Group one shot adaptor cables to connect to the multiport).



Part# 50300154 From multi-connector to mini jack on the Contax handgrip (used to enable Host Capture from Computer)

N.B. Operating the camera from the host computer
The supplied release cable must be connected between the multiple-pin connector on the IQ back and the mini-jack connector placed at the bottom of the handgrip on the Contax camera house.



19.0 IQ2 Back for View Cameras

The Phase One IQ back is compatible with most technical view cameras and large format cameras via camera interface adaptors. The IQ back supports most mechanical shutters and some electronic shutters from Horseman, Schneider and other manufacturers.



Phase One Sleeping Architecture

The Phase One Sleeping Architecture has been developed to help produce noise free exposures without the use of active cooling of the CCD. The sleeping architecture ensures minimum heat build up inside the back by putting all the unused circuits to sleep, and only powering the circuits that are actually needed at any given time.



19.1 Using the 2-shot Release

The IQ back can be used with mechanical shutters that can be fired twice within four seconds. The first release of the shutter activates the digital back; the second release is for the exposure. If the time limit of four seconds is exceeded, the camera gives a warning 'beep' followed by a 'two shoot error' warning that will be displayed on the LCD screen.

There are several automatic or semi-automatic two shoot solutions available from third parties manufacturers to use with a mechanical shutter. Please ask your dealer for more information.





19.2 Using the 1-shot Release

The 1-shot release cable is created to simplify your studio workflow.

1. Connect the flash exit (circled left) on the shutter and plug the opposite end to the multi-pin port on the IQ back. (Via Part# 50300144 From multi-connector to mini jack female)
2. Connect a flash sync lead to the port on the IQ back.
3. Close the shutter if necessary.
4. Push the button on the 1-shot release lead to 'wake up' the camera back . (circled left) and take the shot within a few seconds.

N.B. It is not possible to control the exposure or trigger the shutter from Capture One when using a fully manual camera. Only limited EXIF data is recorded when shooting with manual cameras. The IQ back will add a calculated approximate shutter speed but the aperture value will not be recorded.



19.3 Phase One FlexAdaptor

The Phase One FlexAdaptor is available for use with most large format cameras.

The Phase One FlexAdaptor can automatically stitch two or three images together using the Stitch function in Photoshop.






Please see the reference manual that comes with the FlexAdaptor for more details.

19.4 Shutter Latency Settings for the FlexAdaptor and Other Technical Camera Adaptors

The Phase One FlexAdaptor and other technical camera adaptors for the IQ back can be used with both normal and zero shutter latency.

Select the Normal latency setting if the IQ back is used on a camera with a 2-shot release. (See 19.1, page 166)

Please note: The Zero shutter latency setting will increase the power consumption of the IQ back, as it will be constantly prepared for exposure.

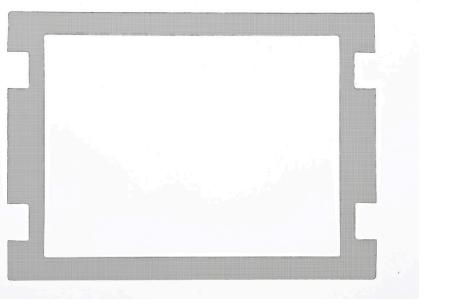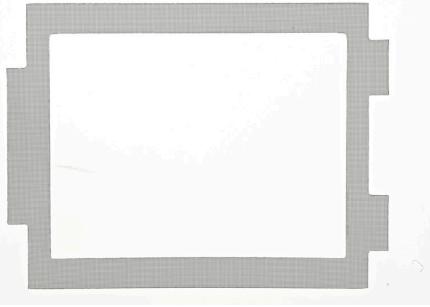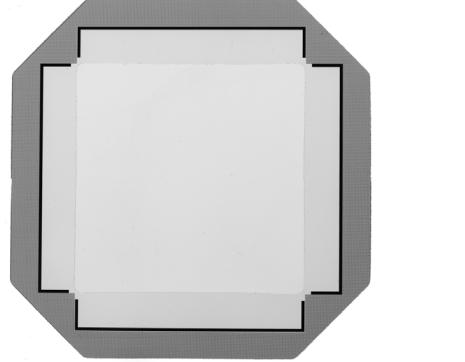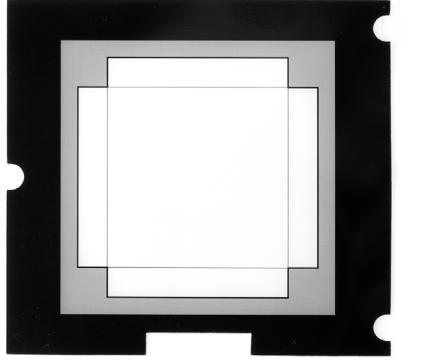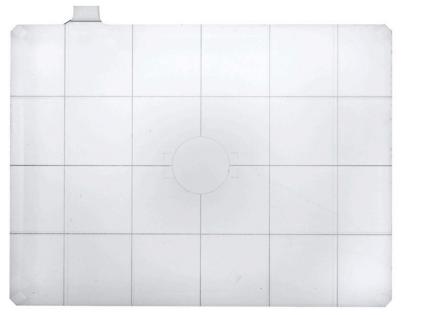

20.0 List of Focusing Screens and Viewfinder Masks

20.1 Full Frame Focusing Screens or with Engraved Masking

Part #

70756

Focusing Screen for Phase One 645 Camera
(Standard Full Frame IQ280/IQ260)

70754

Focusing Screen IQ140 for Phase One 645 Camera

70757

Focusing Screen for Phase One 645 Camera SD402
(Checker Grid)

70758

Focusing Screen for Phase One 645 Camera SA402
(Microprism for non AF lenses)

20.2 Viewfinder Masks

Part #

40101906

Viewfinder Mask for Phase One IQ140 for Hasselblad H1/H2

40101903

Viewfinder Mask for Phase One IQ140 for Phase One/
Mamiya 645 AFD

40101905

Viewfinder Mask for Phase One IQ140 for Contax 645

40101901

Viewfinder Mask for Phase One IQ140 for Hasselblad V

40101929

Viewfinder Mask for Phase One IQ140 for Mamiya RZ

40102056

Viewfinder Mask for Phase One IQ260/IQ280 for Mamiya RZ

0102044

Viewfinder Mask for Phase One IQ260/IQ280 for Hasselblad V



21.0 Live View

The Live View function is intended for use when a camera is mounted on a tripod and the subject is stationary.

Live View is ideal for use with technical view cameras in a studio environment or for architectural photography, where photographers would ordinarily have to rely on an external viewfinder or a separate focusing glass / sliding adaptor.

The Live View function enables photographers to compose an image directly on the high resolution display of the IQ digital back. Focus can be checked by zooming into a subject on the screen by up to 400%.


Please refer to page 64 for more detailed information regarding operation.



21.1 Starting Live View

1. Live View is accessed from the Context Menu (circled left) in the lower right corner.

The Context menu is always visible on the Home screen. Tap the lower right corner of the screen to reveal the icon if it is hidden in some of the Play mode displays.

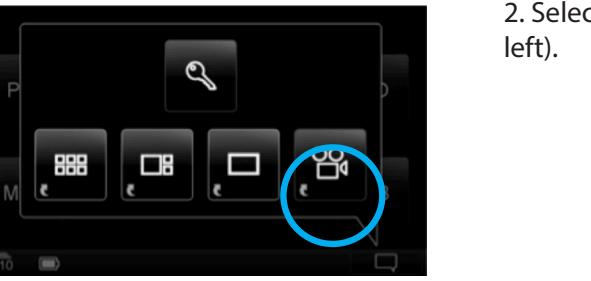

2. Select the Live View (movie camera) icon from the context menu. (Circled left).



3. When Live View is activated ensure that a Live View white balance is applied. Tap the lower right corner of the screen to bring up the context menu and select the White Balance Picker (Circled left).

Go to the next page (p171) for more information about Live View white balance.



21.2 White Balance


1. After selecting the White Balance Picker, tap the screen to select a neutral area to calibrate the Live View.



2. If a precise white point is difficult to achieve in full screen view, slide a finger on the left side of the screen to zoom into to a part of the image that you want to use as white reference.

Exit the White Balance mode by deselecting the picker in the context menu. Alternatively, press and hold the upper left physical button on the IQ back to return to the Home screen.

Go to the next page (p172) to find out more about the zoom function.



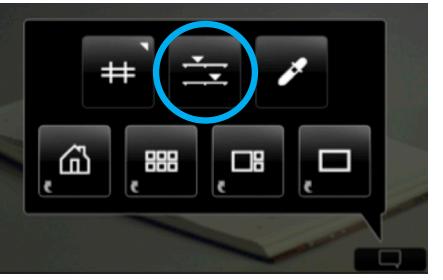


21.3 Quality and Brightness

1. Go to the context menu and select the Live View exposure controls icon (circled left).



2. Two sliders will appear at the bottom of the screen to help users adjust the live view to suit the ambient lighting conditions being used. The top slider is a speed vs. quality slider. Increase the quality by moving slide to the right or achieve a faster frame rate on the left. The lower slider controls the brightness of the Live View.

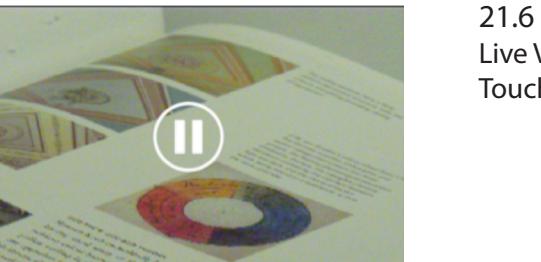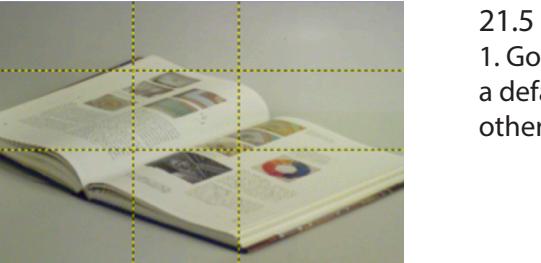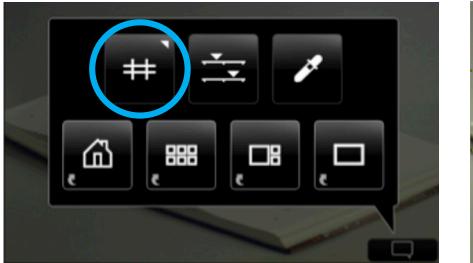

21.4 Zoom

Zoom into the live view by sliding a finger up in the left side of the screen. Double tap on the image to bring up a 100% view. If a zoom is already applied, double tap the screen to return to a full image view.



21.7 Accessories

Live View is easily overexposed in due to the high sensitivity of the IQ CCD sensor and its large size. It is sometimes necessary to take steps to prevent overexposure by either stopping down the aperture or by using a Neutral Density filters (ND filters). ND filters are widely available, and it is even possible to get variable ND filters, that can prove invaluable when working in changeable outdoor ambient light.

Recommended Suppliers

Schneider Optics:

<http://www.schneideroptics.com/filters/index.htm>

Lee Filters:

<http://www.leefilters.com/camera/products/finder/ref:C475674681BB1B/>

Sing Ray Vari ND:

<http://www.singh-ray.com/varind.html>

21.8 Live View Camera Support

The Phase One IQ back Live View function is supported on both medium and large format view cameras. Find out how to operate Live View from the following list of cameras:



Phase One 645AF/645DF/645DF+

1. Activate Live View on the IQ back.
2. Adjust the exposure time dial until the camera display states 'time'.
3. Press the camera shutter button.

Hasselblad H1/ H2

1. Activate Live View on the IQ back.
2. Select the M (Manual) mode.
3. Select the desired aperture value.
4. Set the shutter to 'T mode'.

N.B. It is only possible to change the aperture when the camera body is idle/not exposing. Please exit the T-mode to change aperture.



Hasselblad V

1. Activate Live View on the IQ back.
2. Select B (Bulb) mode.



Mamiya RZ67 Pro II/Pro IID

1. Activate Live View on the IQ back.
2. Select B (Bulb) mode.

N.B. It is only possible to change the aperture when the camera body is idle/not exposing. Please exit the Bulb mode to change aperture.



Contax 645

1. Activate Live View on the IQ back.
2. Select B (Bulb) mode.
3. Select the desired aperture value.

N.B. It is only possible to change the aperture when the camera body is idle/not exposing. Please exit the Bulb mode to change aperture.

Notices

©2014 Phase One A/S. All rights reserved. Made in Denmark.

User guide version: 1.20

IQ2 Back firmware version: 5.11.36

645DF+ firmware: 2.27

Colorspace images created in CROMiX ColorThink.

Photos by:

Jens Honré

Stefan Kapfer

Eugení Pons

Douglas Sonders

Text By:

The dedicated Phase One staff.

On Liability

The information in this User Guide is provided "as is".

Under no circumstances, including negligence, shall Phase One be liable for any incidental, special, direct, indirect or consequential damages arising out of or relating to use of the information provided in this guide with or without the software and/or hardware described in the guide.

Trademarks and Acknowledgements

Capture One and Phase One are either registered trademarks or trademarks of Phase One A/S in the European Union and/or other countries.

All other trademarks are the property of their respective owners.

This product includes DNG technology under license by Adobe Systems Incorporated.

The Phase One IQ digital back firmware includes:

Libjpeg:

=====

This software is based in part on the work of the Independent JPEG Group.

zlib:

=====

Interface of the 'zlib' general purpose compression library
Copyright (C) 1995-2012 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler
jloup@gzip.org madler@alumni.caltech.edu

FCC Regulations:

§ 15.19 (a)(3)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 (b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

§ 15.407 (e)

Operation on the 5.15-5.25 GHz frequency band is restricted to indoor use only. The FCC requires indoor use for the 5.15-5.25 GHz band to reduce the potential for harmful interference to co-channel Mobile Satellite Systems.

§ 2.1093

RF Exposure Information (SAR)

This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government. The exposure standard for wireless devices employs a unit of measurement known as the Specific Absorption Rate (SAR). The SAR limit adopted by the FCC is 1.6W/kg for an uncontrolled environment. Tests for SAR are conducted using standard operating positions accepted by the FCC with the device transmitting at its highest certified power level in all tested frequency bands. The FCC has granted an Equipment Authorization for this device with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines.

Although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value. This is because the device is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output.