


Pr

Features

- Broadband operation 20 - 512MHz
- Output power: 40W CW
- Power gain: ≥ 10 dB
- Rugged push-pull FET
- External bias control
- Rugged construction for extreme environments
- Suitable for most commercial and industrial applications

Absolute Maximum Ratings

Parameter	Rating	Units
Supply Voltage	30	V
Input Power	10	W
Output Power	120	W
Bias Current	3.0	A
Operating Case Temperature	-40 - 100	°C
Storage Temperature	-50 - 100	°C

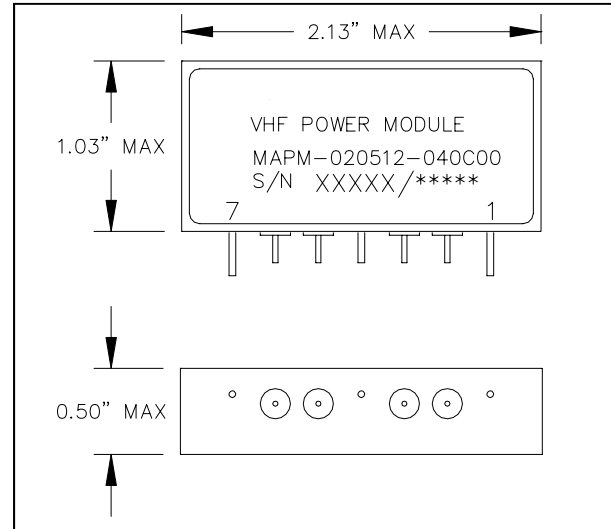

Electrical Specifications: $T_c = 25 \pm 5$ °C

Parameter	Test Conditions	Min	Typ	Max	Units
Output Power (CW)	$V_D = 28$ V, $I_D = 400$ mA	-	40	-	W
Power Gain	$V_D = 28$ V, $I_D = 400$ mA	10	-	15	dB
Efficiency	$V_D = 28$ V, $I_D = 400$ mA, $P_{OUT} = 40$ W	-	37	-	%
Input VSWR	$V_D = 28$ V, $I_D = 400$ mA	-	3:1	-	VSWR
Load Mismatch Tolerance	$V_D = 28$ V, $F = 512$ MHz, $P_{OUT} = 20$ W	-	3:1	-	VSWR
Even Harmonics	$V_D = 28$ V, $I_D = 400$ mA, $P_{OUT} = 20$ W	-	-	-25	dBc
Odd Harmonics	$V_D = 28$ V, $I_D = 400$ mA, $P_{OUT} = 20$ W	-	-	-15	dBc
Spurious Output	$V_D = 28$ V, $I_D = 400$ mA, $P_{OUT} = 20$ W	-	-	-80	dBc

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.



PRELIMINARY: Data Sheets contain information regarding a product M/A-COM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Outline Drawing

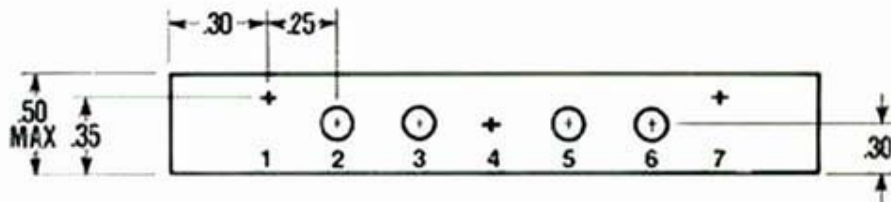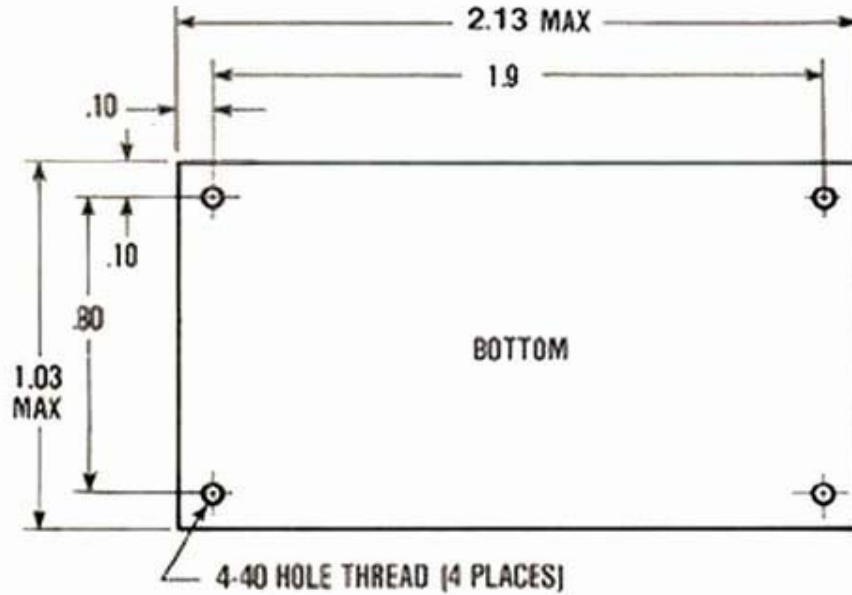

Nickel Plated Aluminum Housing

PIN	FUNCTION
1, 4, 7	GROUND
2	RF INPUT
3	Vbias, 0 to +5V
5	VDC INPUT, 28V NOM.
6	RF OUTPUT