


**Directional Couplers,
Multi-Octave**

**2025 Series
V2**

Features

- Flat Frequency Response
- Frequency Range: 0.5 - 18 GHz
- Multi-Octave Bandwidths
- Temperature Range: -54°C to +125°C
- Meets MIL-E-5400 Environments

Outline Drawing

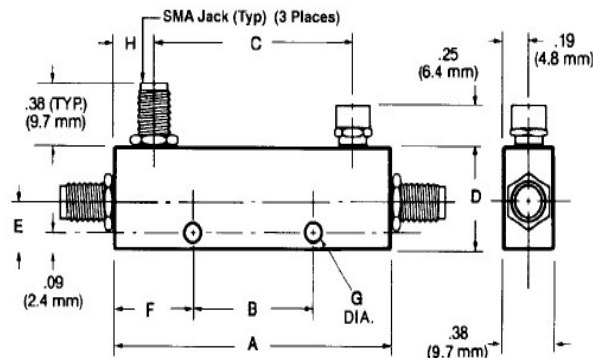

NOTE: All dimensions are ± .020, except mounting hole diameters (± .005) and mounting hole location (± .010).

Specifications

Part Number	Case Style	Freq. Range (GHz)	Coupling (Include. Freq. Sens.(dB)	Freq. Sens. (dB)	Insertion Loss Max (dB)	Direct. Min. (dB)	VSWR Max Prim Line	VSWR Max Sec Line	Power (Input) Avg. In. (w)	Power (Input) Avg. Refl. (W)	Power (Input) Pk. (kW)
2025-6001-06	1	0.5-2.0	6 ± 1.0	±0.4	0.4	18	1.15	1.15	50	4	4
2025-6002-10	1		10 ± 1.0	±0.4	0.35	18	1.15	1.15	50	10	4
2025-6003-16	1		16 ± 1.0*	±0.4	0.3	22	1.15	1.15	50	40	4
2025-6004-20	1		20 ± 1.0	±0.4	0.3	22	1.15	1.15	50	50	4
2025-6005-06	2	1.0-4.0	6 ± 1.0	±0.4	0.35	18	1.20	1.20	50	4	4
2025-6006-10	2		10 ± 1.0	±0.4	0.3	18	1.20	1.20	50	10	4
2025-6007-16	2		16 ± 1.0*	±0.4	0.3	22	1.20	1.20	50	40	4
2025-6008-20	2		20 ± 1.0	±0.4	0.3	22	1.20	1.20	50	50	4
2025-6009-06	3	2.0-8.4	6 ± 1.0	±0.3	0.4	18	1.25	1.25	50	4	4
2025-6010-10	3		10 ± 1.0	±0.3	0.35	18	1.25	1.25	50	10	4
2025-6012-20	3		20 ± 1.0	±0.3	0.35	22	1.25	1.25	50	50	4
									50		4
2025-6013-06	4	4.0-12.4	6 ± 1.0	±0.4	0.5	15	1.30	1.30	50	4	4
2025-6014-10	4		10 ± 1.0	±0.4	0.5	15	1.30	1.30	50	10	4
2025-6015-16	4		16 ± 1.0*	±0.4	0.5	15	1.30	1.30	50	40	4
2025-6016-20	4		20 ± 1.0	±0.4	0.5	15	1.30	1.30	50	50	4
2025-6017-06	5	6.0-18.0	6 ± 1.0	±0.4	0.7	15	1.40	1.40	50	4	4
2025-6018-10	5		10 ± 1.0	±0.4	0.6	16	1.40	1.40	50	10	4
2025-6019-16	5		16 ± 1.0*	±0.4	0.6	16	1.40	1.40	50	40	4
2025-6020-20	5		20 ± 1.0	±0.4	0.6	15	1.40	1.40	50	50	4

Mechanical Specifications

*Reference to output port for use as leveling coupler.

Case Style	A Inch (mm)	B Inch (mm)	C Inch (mm)	D Inch (mm)	E Inch (mm)	F Inch (mm)	G Inch (mm)	H Inch (mm)	Weight oz	Weight g
1	4.92 (125)	3.5 (89)	4.42 (112)	0.60 (15.2)	0.27 (6.73)	0.71 (18.1)	0.143 (3.63)	0.25 (6.4)	2.10	58.8
2	2.66 (67.6)	1.48 (37.6)	2.22 (56.4)	0.60 (15.2)	0.27 (6.73)	0.59 (15)	0.143 (3.63)	0.22 (5.59)	1.26	35.3
3	1.99 (50.5)	0.88 (22.2)	1.44 (36.6)	0.63 (15.9)	0.28 (7.11)	0.56 (14.2)	0.143 (3.63)	0.28 (7.06)	1.05	29.4
4	1.21 (30.7)	0.38 (9.7)	0.69 (17.6)	0.60 (15.2)	0.22 (5.56)	0.42 (10.6)	0.104 (2.64)	0.26 (6.55)	0.74	20.7
5	1.16 (29.5)	0.50 (12.7)	0.65 (16.5)	0.57 (14.4)	0.25 (6.35)	0.33 (8.33)	0.104 (2.64)	0.25 (6.45)	0.69	19.3

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

- **North America** Tel: 800.366.2266 / Fax: 978.366.2266
- **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.