

Mail Bin Type 5000

(Code: G312)

For Machine Code: G071

INSTALLATION GUIDE

Preparation

For a safe operation, read "*Safety Information*" in Maintenance Guide 1.

Install the Interchange Unit before installing the 4-bin Mailbox. The 4-bin Mailbox cannot be installed without the Interchange Unit installed in advance.

CAUTION:

- *The inside of the machine becomes very hot. Do not touch the parts with a label indicating "▲" (means hot surface). Touching "▲" (means hot surface) could result in a burn.*
- *When installing the 4-bin Mailbox, be sure to hold the sides of them. If you hold the bottom, your hands may get caught and injured.*
- *When moving the 4-bin Mailbox, hold the center of both sides, and then lift it slowly. Lifting it carelessly or dropping it may cause an injury.*

Important

- Check the printer nameplate to confirm the model code.
- Since either the Finisher or the 4-bin Mailbox can be installed to the printer, the 4-bin Mailbox cannot be installed if the Finisher is already installed to the printer.

1 Turn off the power switch, and then unplug the power cable.

2 Remove the adhesive tapes.

3 Check the contents.


❖ Screw



❖ Two Screws




❖ Four Output Trays

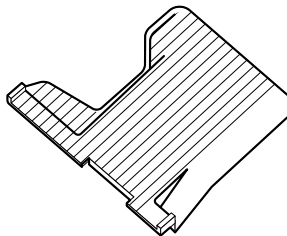

❖ Labels




- 4** Remove the top cover of the Interchange Unit. First, pull up the stopper (①), and then lift the cover (②).

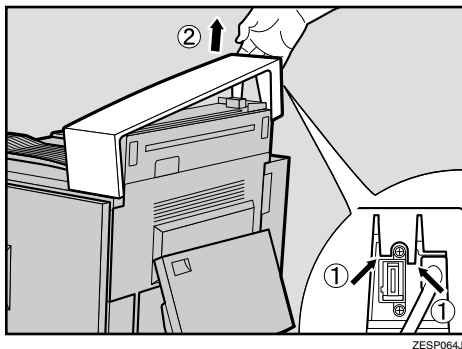


Note

- The removed cover will not be used.

- 5** Hold the 4-bin Mailbox with both hands, and then slowly insert it vertically to the top of the printer.

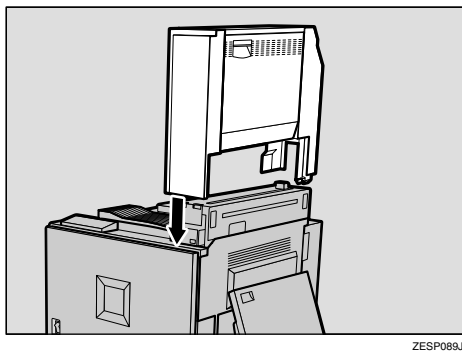


- 6** Open the Bypass Tray.

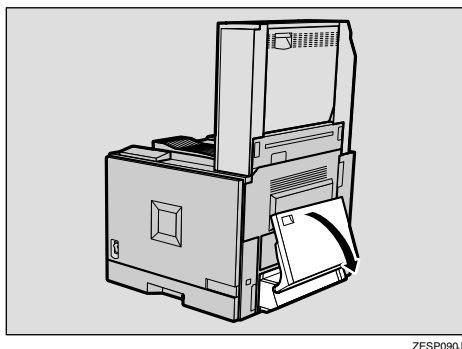


Note

- Remove paper on the Bypass Tray to prevent them from falling.


- 7** If the Duplex Unit is installed, open it by pushing the catch upwards.

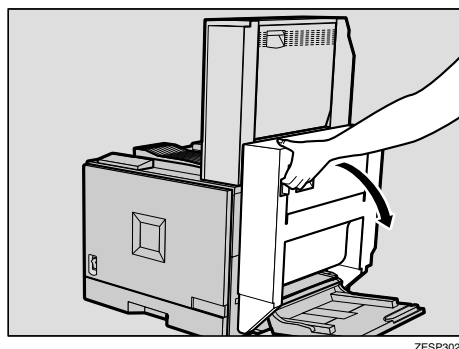


- 8** Open the right cover of the printer by pushing up the handle.

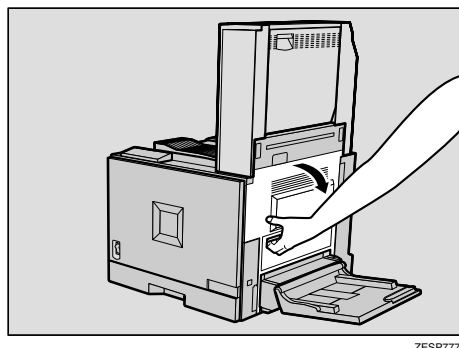

- 9** Open the right cover of the Interchange Unit.

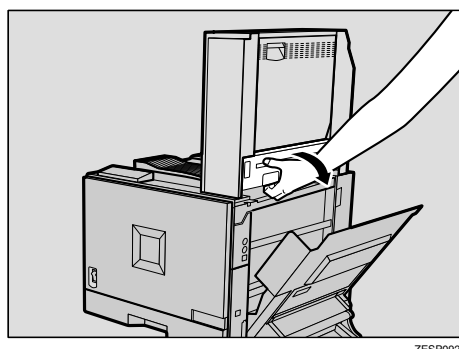

- 10** Fasten the two places with two different kinds of screws as shown in the illustration.

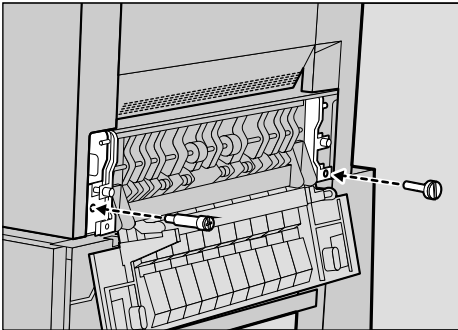


ZESP303J

Use a coin to fasten them tightly.

Note


- There are two kinds of screws supplied.

- 11** Close the right cover of the Interchange Unit.

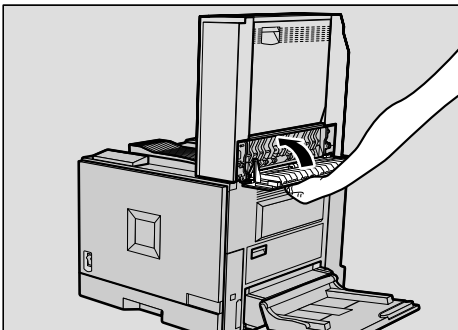

ZESP305J

- 12** Close the right cover of the printer.

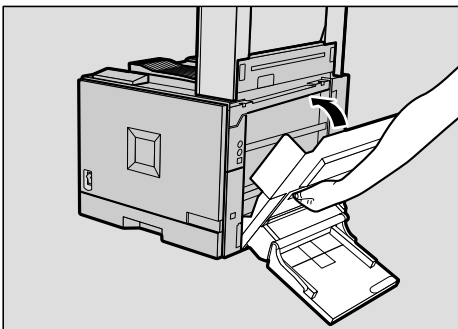


ZESP306J

Note

- Press "PUSH" to close the cover firmly.


- 13** If the Duplex Unit is installed, close it.

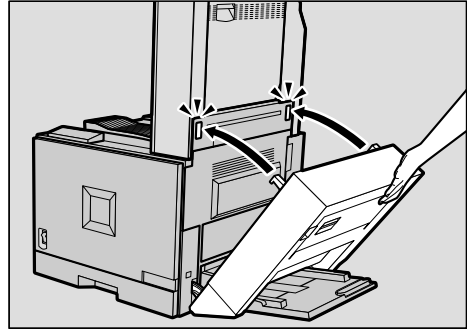

ZESP307J

- 14** Close the Bypass Tray.


- 15** Fasten the position shown in the illustration with the remaining screw.

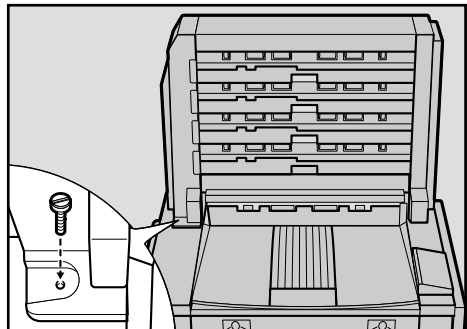

ZESP308J

Use a coin to fasten it firmly.

- 16** Set the four output trays from the bottom.

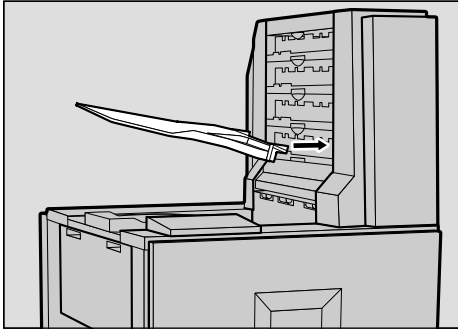

ZESP095J

Note

- Use the supplied labels to assign the trays for individuals or business groups.
- After finishing installation, you can check whether the 4-bin Mailbox is installed properly. Print the configuration page from the "List/Test Print" menu. If it is installed properly, you will see "4-bin Mailbox" under the "Options" list.
- If the 4-bin Mailbox is not installed properly, reinstall from step **1**. If you cannot install it properly even after reinstallation, contact your sales or service representative.

Reference

See "Using the Control Panel" in the Administrator Reference for printing the configuration page.