

E-Series Coupler

40 - 1000 MHz

EMDC-16-2-75

V3.00

Features

- Coupling: +16 dB Typical
- Surface Mount

Specifications @ 25°C

Frequency Range	40 - 1000 MHz	
Coupling	Nominal 16 ±1.1 dB	
Main Line Loss	Typical	Maximum
40 - 400 MHz	0.5 dB	0.8 dB
400 - 500 MHz	0.5 dB	0.8 dB
500 - 1000 MHz	0.6 dB	1.0 dB
Directivity	Typical	Minimum
40 - 400 MHz	19 dB	14 dB
400 - 500 MHz	15 dB	10 dB
500 - 1000 MHz	7 dB	3 dB
Return Loss	Typical	Minimum
I/P	22 dB	18 dB
O/P	19 dB	15 dB
Coupled Port	21 dB	15 dB

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No. EMDC-16-2-75	Packaging Tube
--------------------------	-------------------

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

SM-55

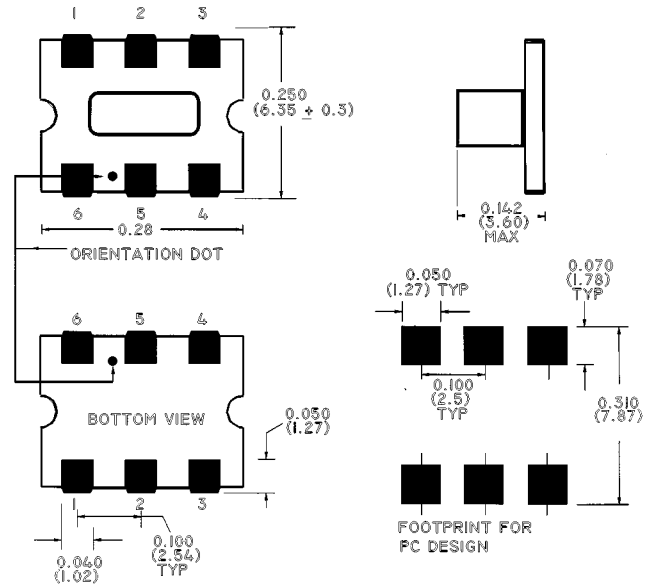

Dimensions in () are in mm.
 Unless Otherwise Noted: .x = ±0.04 (1.00)
 .xx = ±0.02 (0.50)
 .xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin. No.
Input	6
Output	1
Coupled	4
Ground	2,5
External 75 Ohms	3

Specifications Subject to Change Without Notice.

S 1133

M/A-COM, Inc.

1

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020