


**Features**

- 0° - 180° Hybrid with Symmetrical Time Delay Between Ports
- Available in Flatpack and Connectorized Packages
- MIL-STD-202 Screening Available


**Description**

3 dB Hybrids are ideal for dividing a signal into two signals of equal amplitude and a constant 90° or 180° phase differential and for Quadrature combining or performing summation/differential combining.

**C-8-107 (HH-107)**

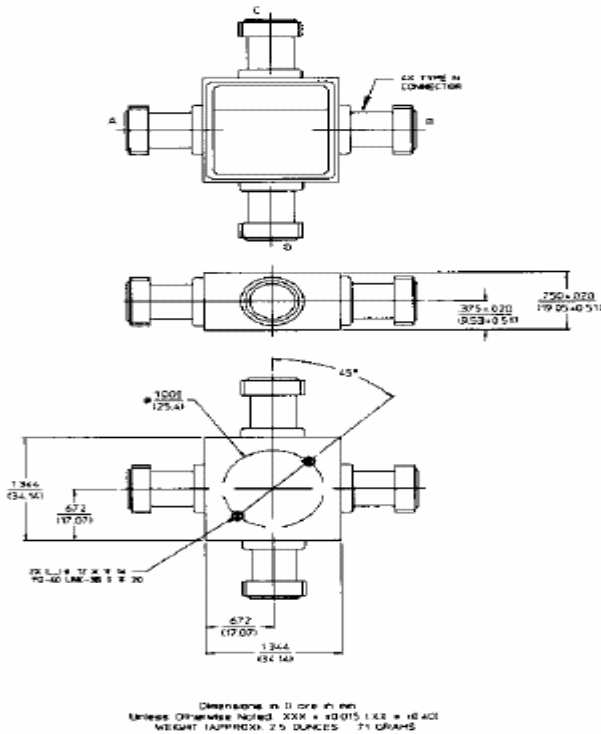


**FP-2 (HH-106)**

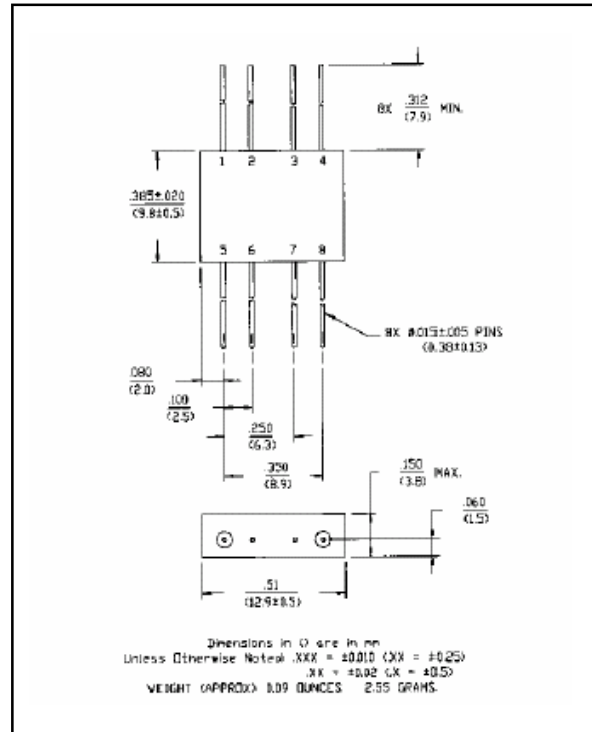

**Pin Configuration (HH-106)**

Pin No.	Function	Pin No.	Function
1	A	5	B
2	GND	6	GND
3	GND	7	GND
4	C	8	D

**Functional Diagram**



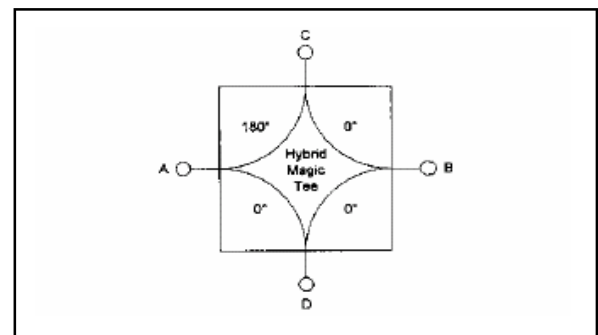


**Electrical Specifications<sup>1</sup>: T<sub>A</sub> = -55°C to +85°C**

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	Less Coupling	2 - 200 MHz	dB	—	—	1.0
Isolation	A - B	2 - 200 MHz	dB	25	—	—
		5 - 50 MHz	dB	30	—	—
	C - D	2 - 200 MHz	dB	30	—	—
		5 - 50 MHz	dB	35	—	—
Amplitude Balance	—	2 - 200 MHz	dB	—	—	0.3
VSWR	—	2 - 200 MHz	Ratio	—	—	1.5:1
		5 - 50 MHz	Ratio	—	—	1.3:1
Phase Balance	—	2 - 200 MHz	°	—	—	3
Impedance	—	2 - 200 MHz	Ohms	—	50	—
Input Power	—	2 - 200 MHz	Watts	—	—	1

1. All specifications apply with 50 ohm source and load impedance.

**Typical Performance Curves**

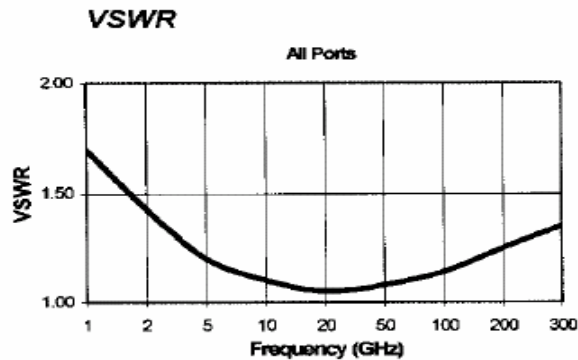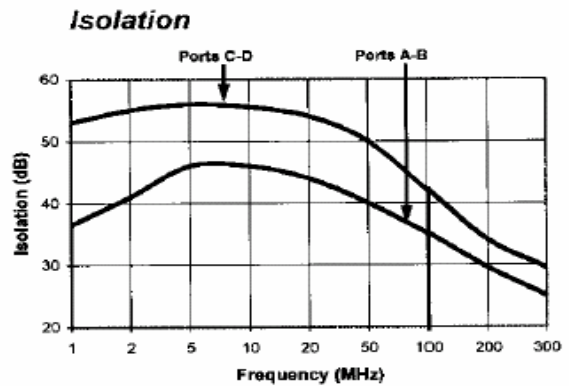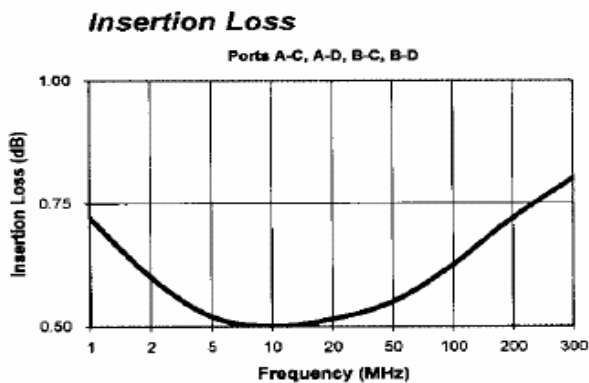

**Ordering Information**

Part Number	Package
HH-106 PIN	FP-2
HH-107 BNC	C-8-107
HH-107 SMA	C-8-107