

Products: SMIQ, AMIQ, FSIQ, FSP, FSU, FSQ, ESPI

# IQWizard

## IQ-Signal Measurement & Conversion

### Application Note

*IQWizard* is a tool for loading IQ signal files in various formats and measuring IQ signals with a FSIQ/FSP/FSU/ESPI spectrum analyzer. The obtained IQ data in memory can be stored in various formats or be transmitted to an AMIQ with WinIQSIM.



## Contents

1	Overview .....	2
2	Software Features.....	2
3	Hardware and Software Requirements.....	3
	Hardware Requirements.....	3
	Software Requirements .....	3
4	Connecting the Computer and Instrument.....	4
	Connecting the instruments .....	4
5	Installing IQWizard.....	4
6	Starting the Software / Measurement .....	5
	Menu .....	6
	File .....	6
	Help.....	6
	Load IQ Data .....	7
	Trace IQ Data .....	13
	FSIQ .....	13
	FSP / FSU / FSQ / ESPI.....	15
	Save IQ Data .....	16
	IQWizard Measurement Example.....	17
7	Additional Information .....	23
8	Ordering information .....	23

## 1 Overview

**IQWIZARD** is a software tool for loading IQ data files in various formats or measuring IQ signals with an **FSIQ** (with B70 option), **FSP**, **FSU**, **FSQ** or **ESPI** analyzer from Rohde & Schwarz. The IQ data may be stored various file formats for further processing with signal analysis, simulation and generation tools such as **MATCAD**, **MATLAB** and **ADS**. IQWizard also offers a TCP/IP interface for transmission of the IQ data to **WINIQSIM**, which can manipulate the data and upload it to an AMIQ.

## 2 Software Features

The software offers:

- IQ trace with FSIQ (with B70), FSP, FSU, FSQ or ESPI analyzer
- TCP/IP interface to WinIQSIM using one or two separate computers
- load and save program and device configuration
- load IQ data in various file formats
- save IQ data in various file formats

### 3 Hardware and Software Requirements

#### Hardware Requirements

The software runs on a PC with

CPU	Pentium 133MHz or better
RAM	64 MBytes or more
MONITOR	VGA color monitor
IEC/IEEE BUS	IEC/IEEE bus interface Rohde & Schwarz IEEE-488.2 bus interface <b>PS-B4</b> , 1006.6207.04, or National Instruments <b>AT-GPIB/TNT</b> or <b>GPIB-PCMCIA</b> card
optional	
LAN INTERFACE	installed with TCP/IP protocol

It supports following instruments named below:

- **FSIQ** (B70 option), **FSP**, **FSU**, **FSQ** or **ESPI** spectrum analyzer.

#### Software Requirements

WINDOWS 9X/NT/2000/XP	Microsoft 32-bit operating system
NI-488.2 v1.6 (or above)	IEC/IEEE - bus driver from National Instruments. See <a href="http://www.natinst.com">http://www.natinst.com</a> for latest revision.
NI-VISA v2.01 (or above)	VISA driver from National Instruments. See <a href="http://www.natinst.com">http://www.natinst.com</a> for latest revision.
optional	
RSIB PASSPORT v1.30 (or above)	VISA device emulation for LAN. See <a href="http://www.rohde-schwarz.com">http://www.rohde-schwarz.com</a> for latest revision.
WINIQSIM v3.50 (or above) optionally	This is a software tool capable of receiving IQ data via TCP/IP software interface and calculating and transferring it to an AMIQ I/Q modulation generator. IQWizard and WinIQ-Sim must run simultaneously to enable data transfer. Download latest WinIQSim version from <a href="http://www.rohde-schwarz.com">http://www.rohde-schwarz.com</a> .

## 4 Connecting the Computer and Instrument

### Connecting the instruments

Connect the computer running *IQWizard* to the analyzer FSIQ (with B70 option), FSP, FSU, FSQ or ESPI.

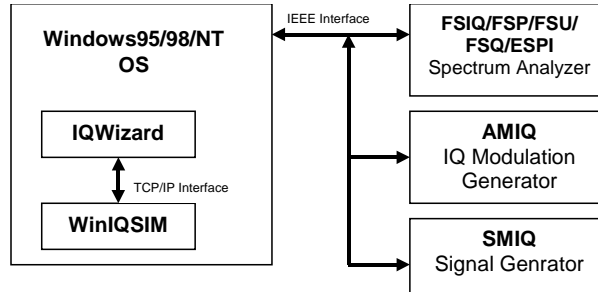


Fig. 1 Connecting Instruments

## 5 Installing IQWizard

You need following installation files on floppy or hard disc.

IQWizard v3.xx.msi	IQWizard installation file
DistFile.cab	

Execute **IQWIZARD v3.xx.MSI** and select the installation directory. A new menu item *IQWizard v3.xx* will be created in **START -> PROGRAM FILES**. The installation directory will contain the files named below:

IQWIZARD.EXE	IQWizard executable
IQWIZARD.CFG	IQWizard configuration file
IQWIZARD.CHM	IQWizard help file
DEMOIQW.CFG	IQWizard demo configuration file
DEMOWIQ.IQS	WinIQSIM demo configuration file
DEMO16BIT.IQS	WinIQSIM conf. file for 16 bit values
DEMOSIG.I	IQSIM (ASCII) demo I-data file
DEMOSIG.Q	IQSIM (ASCII) demo Q-data file
LIBMAT.DLL	MatLab utility DLL
LIBMX.DLL	MatLab utility DLL
LIBMUT.DLL	MatLab utility DLL
RSFUNLIB.DLL	R&S utilities library

## 6 Starting the Software / Measurement

Execute **IQWIZARD.EXE** first. The program will come up with following or similar (depending on **IQWIZARD.CFG** configuration file) start window.

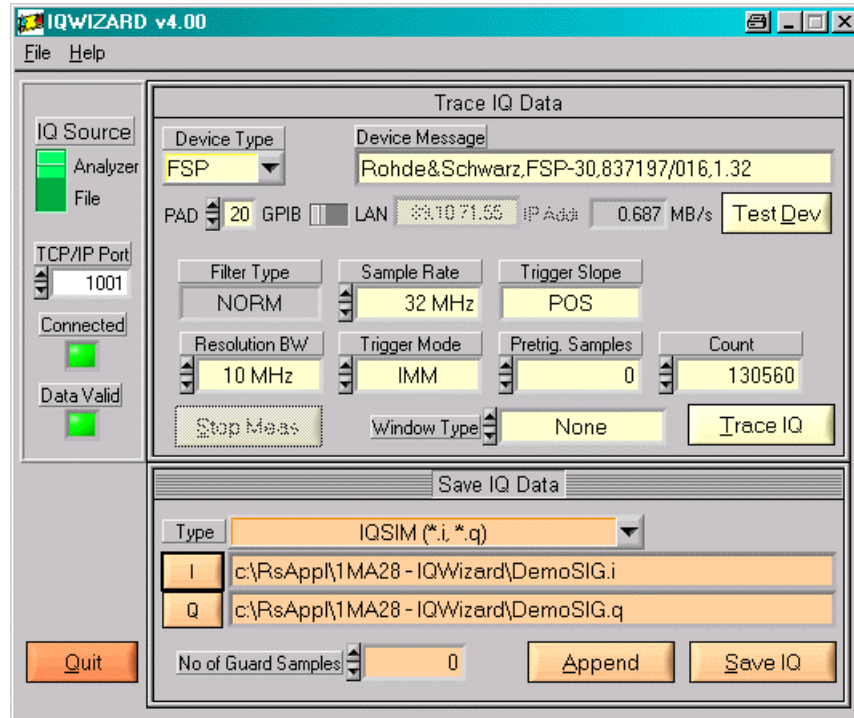


Fig. 2 Main Window

- **IQ SOURCE** – Data can be recorded with an **ANALYZER** (FSIQ with B70 option, FSP or FSU) or can be loaded from a **FILE** with various formats.
- **TCP/IP PORT** – specifies the port number for connecting to WinIQSIM via TCP/IP transfer.
- **CONNECTED** – indicator LED turns green when link to WinIQSIM is active.
- **DATA VALID** – indicator LED turns green when valid IQ data traced from an analyzer or read from a file is stored in memory.

See '*IQWizard Measurement Example*' for a description of setting up *WinIQSIM*.

## **Menu**

### **File**

All program and device specific data may can be loaded / saved from / to a configuration file.



Fig. 3 File Menu

- **LOAD CONFIGURATION** – the default file extension is *\*.cfg*.

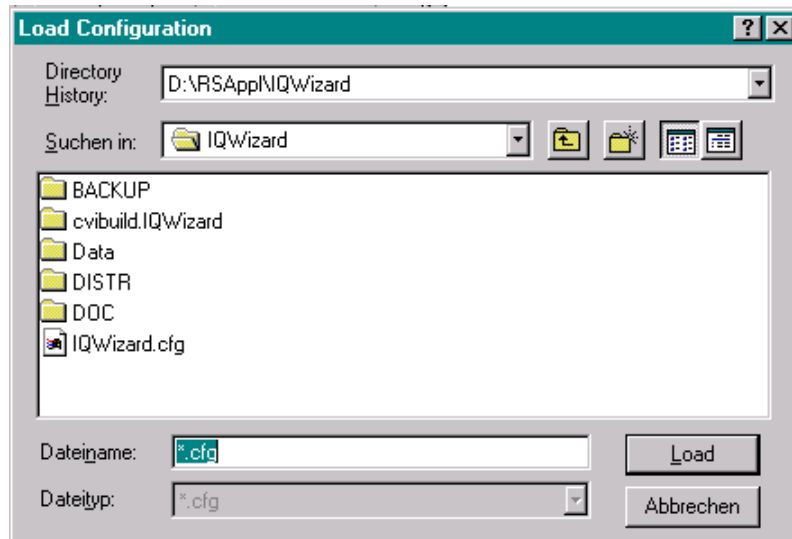


Fig. 4 Load Configuration

- **SAVE CONFIGURATION** – the default file extension is *\*.cfg*. Similar file dialog as *Load Configuration*.

## **Help**

- **HELP** – opens help document.
- **ABOUT** – displays revision and copyright information.

## **Load IQ Data**

This window allows to read IQ data from various input file formats into memory and turns active when *IQ Source* is set to *File*.

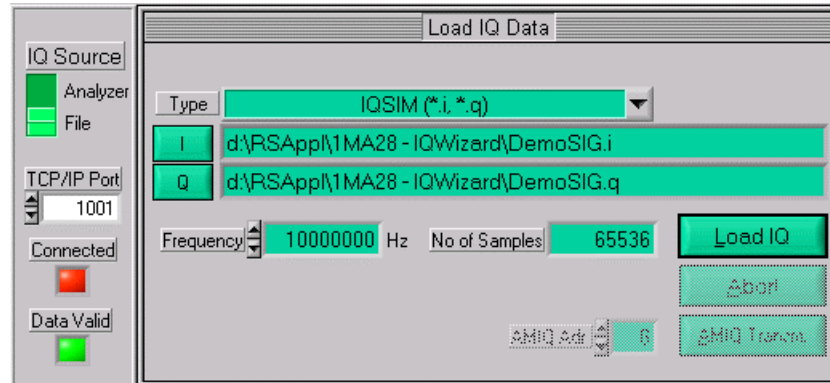


Fig. 5 Load IQ Data

- **TYPE** – specifies file type to load IQ data from. Possible selections see picture below.



Fig. 6 Load IQ File Type

- **WINIQSIM (\*.ibn)** – This is a mixed (I & Q Data) binary file format. \*.ibn files generated with WinIQSIM cannot be loaded into IQWizard because the data is scrambled.



Fig. 7 Scrambled Warning

- **MATLAB SINGLE / IQSIM (\*.i, \*.q)** – these files have following format:

```
1.000000
2.000000
3.000000
....
```

- **MATLAB MIXED (\*.mat)** – binary file format. The file should contain 2 differently named arrays (i.e. "I" and "Q"). Following C - example code shows how to generate the \*.mat file correctly:

```
MATFile *fp;
double Iarr[1024], Qarr[1024];
mxArray *p;

// fill IArr and Qarr with iq data
.....

fp = matOpen (d.INam, "w");
p = mxCreateDoubleMatrix (1, 1024, mxREAL);

memcpy (mxGetPr (p), IArr, 1024 * sizeof (double));
mxSetName (p, "I");
matPutArray (fp, p);

memcpy (mxGetPr (p), QArr, 1024 * sizeof (double));
mxSetName (p, "Q");
matPutArray (fp, p);

mxFree (p);
free (IArr);
free (Qarr);
matClose (fp);
```

- **MATHCAD / COSSAP SINGLE (\*.i, \*.q)** – have a dynamic format; integer, float and exponential format; up to 199 characters per line; comment starts with %.

```
1.0 2 3.0 4e0 5e0 6.00000 % Yeah Yeah 1.3
7.0 8 9.0 1e1 1.10e1 12.00000 % No No 1.7
....
```

- **MATHCAD / COSSAP MIXED (\*.dat)** – same as single, only that consecutive values are an i- and q- pair so the value count must always be even.



- **DADISP SINGLE** (\*.i, \*.q)

```
DATASET i
VERSION NEXT
NUM SIGS 1
STORAGE MODE INTERLACED
SIGNAL i
DATE 11-29-2000
TIME 14:49:26
INTERVAL 1.000000E+02
VERT_UNITS volt
HORZ_UNITS sec
COMMENT
DATA
1.0000000
2.0000000
3.0000000
4.0000000
.....
```

- **DADISP MIXED** (\*.dsp)

```
DATASET i_q
VERSION NEXT
NUM SIGS 2
STORAGE MODE INTERLACED
SIGNAL i, q
DATE 12-27-2000
TIME 14:23:59
INTERVAL 1.000000E-06
VERT_UNITS volt
HORZ_UNITS sec
COMMENT
DATA
0.000000e+00 0.000000e+00
6.278100e-02 0.000000e+00
1.253130e-01 0.000000e+00
1.873750e-01 0.000000e+00
.....
```

- **SPW ASCII SINGLE** (\*.ascsig, \*.ascsig) – uses the extension \*.ascsig for i- and q- data files. It is convenient to place this information in the file name, i.e. circle\_i.ascsig.

```
$SIGNAL_FILE 9
$USER_COMMENT

$COMMON_INFO
SPW Version      = 4.70
System Type     = solaris2
Sampling Frequency = 65536000.0
Starting Time   = 0.0
$DATA_INFO
Number of points = 20480
Signal Type     = Double
$DATA
0.00427246
0.00476074
0.00299072
.....
```

- **SPW ASCII MIXED (\*.ascsig)**

```

$SIGNAL_FILE 9
$USER_COMMENT

$COMMON_INFO
SPW Version      = 4.70
System Type      = solaris2
Sampling Frequency = 65536000.0
Starting Time    = 0
$DATA_INFO
Number of points = 20480
Signal Type      = Double
Complex Format    = Real_Imag
$DATA
0.00427246+j0.06279034
0.00476074-j0.24868988
0.00299072+j0.53582679
.....
    
```

- **SPW BINARY MIXED (\*.sig)**

```

$SIGNAL_FILE 9
$USER_COMMENT

$COMMON_INFO
SPW Version      = 4.70
System Type      = solaris2
Sampling Frequency = 65536000.0
Starting Time    = 0
$DATA_INFO
Number of points = 20480
Signal Type      = Double
Complex Format    = Real_Imag
$DATA
<I0 64-bit REAL><Q0 64-bit REAL><I1 64-bit REAL> <Q1 64-bit
REAL><I2 64-bit REAL><Q2 64-bit REAL><I3 64-bit REAL> <Q3
64-bit REAL>.....
    
```

- **ADS ASCII SINGLE (\*.ascsig, \*.ascsig)** – see ADS single
- **ADS ASCII MIXED (\*.asg)** – see SPW mixed
- **WAV Files (\*.wav)** – binary audio file format. Can be used to store IQ data. IQWizard only accepts **16-BIT STEREO** format.
- **LECROY (\*.trc)** – binary 8 or 16-bit format containing 2 channels generated with LeCroy’s general oscilloscope controlling software **SCOPE EXPLORER™** available at <http://www.lecroy.com>.
- **DAB-K1 (\*.sym)** – binary file format. DAB-K1 is a software for generation of various DAB and DVB signals for spectrum evaluation. DAB-K1 is available at <http://www.rohde-schwarz.com>.
- **UINT16 (\*.i, \*.q)** – 16-Bit format ranging from 1 to 65535 (0 is internally converted to 1). This format especially supports the AMIQ’s digital IQ output (option **AMIQ-B3**). Transmitting this format to an AMIQ requires following WinIQSIM configuration (**DEMO16BIT.IQS**):

IMPORT FILTER FUNCTION	<b>None</b>
AMIQ -> SIGNAL STAT.AND QUANT	Use Peak Value: <b>OFF</b>
	Level: <b>32767.0000</b>
	Resolution: <b>16 Bit</b>
AMIQ TRANSMISSION	Comp.Output Signal for sin(x)/x Dist.: <b>OFF</b>

- **AWG 2000** (\*.wmf, \*.wmf) – format for Tektronix AWG2000 series arbitrary waveform generators containing frequency and amplitude information in the header. The 12 bit I- and Q-values (0...4095) are normalized to  $\pm$  amplitude. Wmf demo files are available at <http://www.tektronix.com>.
- **IQW** (\*.iqw, \*.iqw) – 4-byte binary float format.  
 $NUMBER\ OF\ ELEMENTS = FILESIZE * 4$

When a mixed file type (contains I and Q values) is selected the Q selection button and file name line are dimmed.

- **I** – starts file load popup with predefined extension (see picture below).

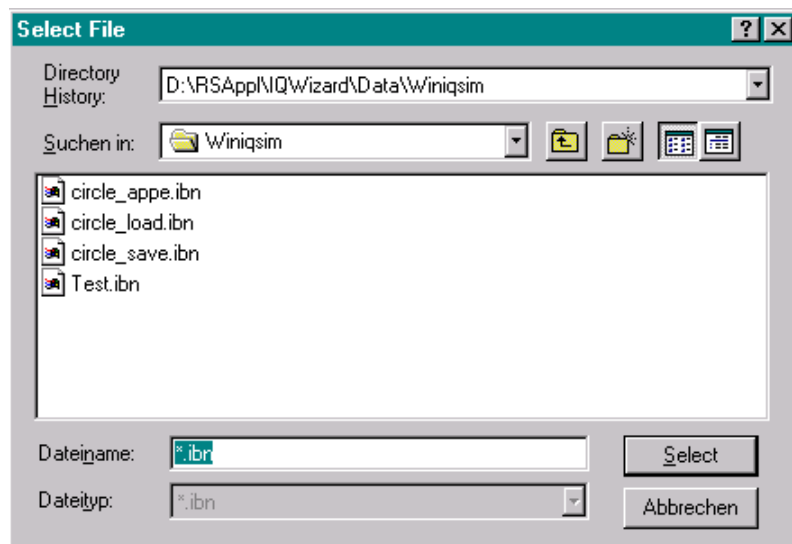


Fig. 8 Select File

- **Q** – same as I.
- **LOAD IQ** – after necessary files have been selected this button is undimmed and by pressing it the IQ data is loaded from file into memory. When successful, the *Data Valid* indicator LED turns green.

*Note:* To avoid an endless loop in case of an incorrect input format for WinIQSIM, SPW and ADS both the Status and Load window allow to abort the load operation with the Abort key, <Alt>A or ESC.

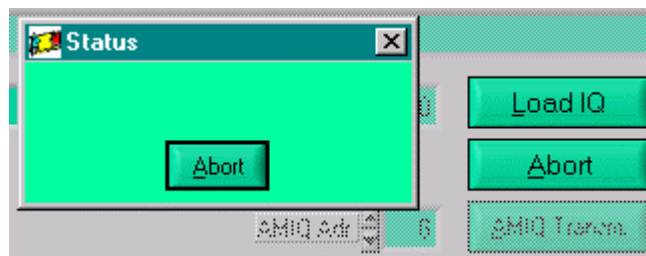


Fig. 9 Abort Load

- **AMIQ ADR.** – AMIQ GPIB address (default 6).
- **AMIQ TRANSMISSION** – transmits 16-bit values directly to an AMIQs digital output and sets sample frequency. All other settings (I/Q output level, filters etc.) can be set with **WINIQSIM**.

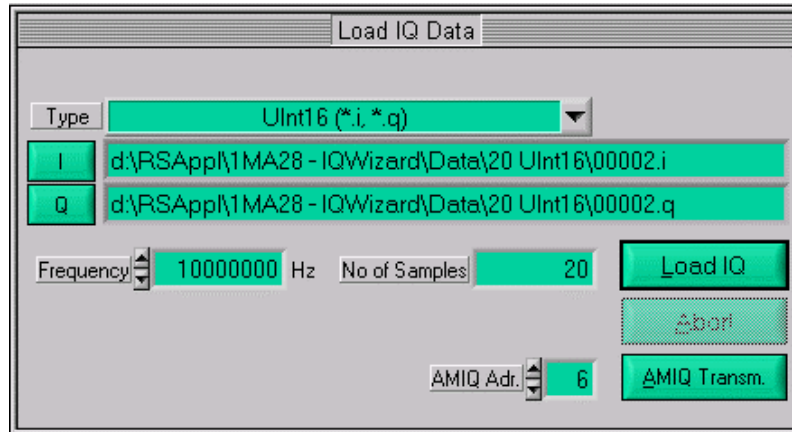


Fig.10 AMIQ Transmission

*Note: AMIQ ADR. and AMIQ Transmission controls are only active (not dimmed) in case the UInt16 (16-bit) format is selected.*

**Trace IQ Data**

IQWizard converts the absolute IQ data provided by the analyzer into relative IQ values corresponding to the analyzer's grid maximum ( $U_{IQpeak} \triangleq 1.00$  at reference level). WinIQSim displays 0dB when the IQ value is equal to the reference level (1.00). Following conversion must be performed manually obtain the absolute level P/dBm.

$$P / dBm = refllevel + 20 * \log\left(\frac{U_{iqpeak}}{1V}\right)$$

Example:

RefLevel = -10dBm

$U_{IQpeak} = 100mV$

$$P = -10dBm + 20 * \log\left(\frac{0.1V}{1V}\right) = -30dBm$$

**FSIQ**

The picture below shows the control window for tracing IQ data with an FSIQ with FSIQ-B70 option. It pops up when **IQ SOURCE** is set to **ANALYZER** and **DEVICE TYPE** is set to **FSIQ**.

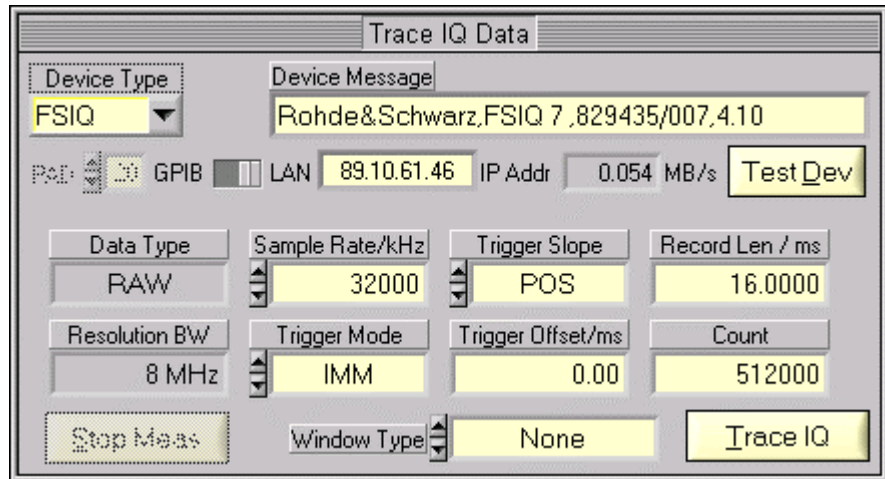


Fig. 11 Trace IQ Data FSIQ

- **DEVICE TYPE** – specifies the analyzer used (FSIQ, FSP, FSU or FSQ).
- **GPIB/LAN** – sets interface type.
- **PAD** – GPIB primary address. Range: 1 to 31.
- **IP ADDR** – LAN TCP/IP address. R&S analyzer default: **89.10.xx.xx** (see operating manual for LAN configuration details).
- **TEST DEVICE** – Resets device and displays device ID in the Device Message box.
- **DATA TYPE** – constantly set to RAW.
- **RESOLUTION BW** – constantly set to 8MHz.
- **SAMPLE RATE** – specifies the rate in which IQ data is sampled simultaneously. Range: 40 kHz to 32 MHz.

- **TRIGGER MODE** – selects trigger source to initiate an IQ trace. Possible selections: IMMEDIATE, EXTERNAL, VIDEO.
- **TRIGGER SLOPE** – selects trigger signal slope of EXTERNAL and VIDEO trigger. Possible selections: POSITIVE, NEGATIVE.
- **TRIGGER OFFSET** – delay between trigger and start of measurement. A negative value means that the first couple of IQ samples have been taken before the trigger event. Range: -590  $\mu$ s to 2.5ms.
- **RECORD LENGTH** – time period of data trace. Range: 1 $\mu$ s to 20.4ms.
- **COUNT** – is limited to 524200 and in case it is exceeded a foldback of the *Record Length* takes place. It is calculated as follows:  
Count = Sample Rate \* Record Length
- **WINDOW TYPE** – a window is used for turning non-periodic signals into periodic ones by setting the beginning and end to zero. See picture below for possible choices.

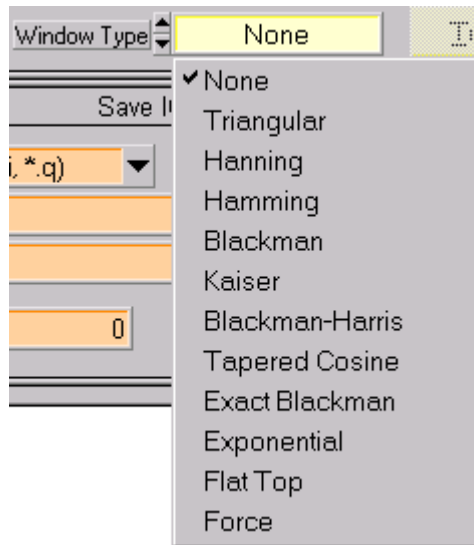


Fig. 12 Window Type

- **TRACE IQ** – starts measurement.

**FSP / FSU / FSQ / ESPI**

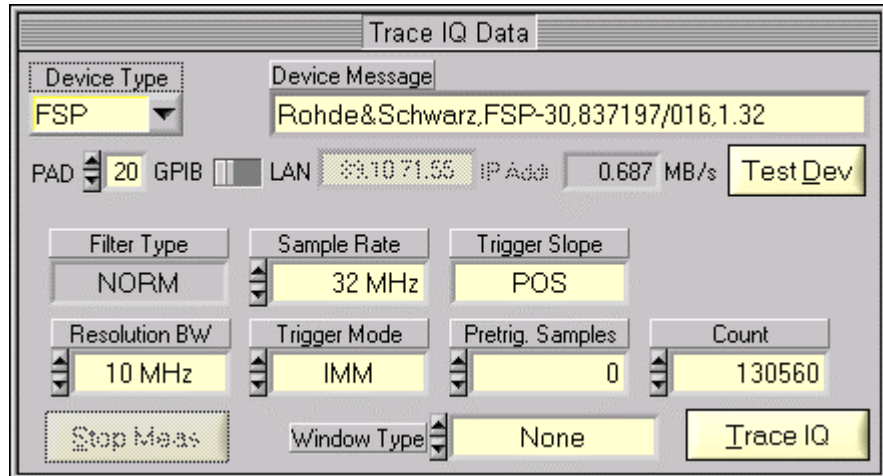


Fig. 13 Trace IQ Data FSP/FSU/FSQ

- **DEVICE TYPE, GPIB/LAN, PAD, IP ADDR, TEST DEVICE, WINDOW TYP, TRACE IQ** see FSIQ.

- **FILTER TYPE** – constantly set to NORM

- **RESOLUTION BANDWIDTH** – Possible selections are 300 kHz, 1 MHz, 3 MHz or 10 MHz for FSP and additionally 20 MHz and 50 MHz for FSU and FSQ.

*Note: In this particular case the Resolution Bandwidth is the maximum traceable bandwidth and not the smallest frequency resolution.*

- **SAMPLE RATE** – possible selections are 15.625 kHz, 31.25 kHz, 62.5 kHz, 125 kHz, 250 kHz, 500 kHz, 1 MHz, 2 MHz, 4 MHz, 8 MHz, 16 MHz or 32 MHz for FSP, FSU and ESPI. The FSQ sample rate ranges from 10 kHz to 81.6 MHz.
- **TRIGGER MODE** – possible selections are IMMEDIATE or EXTERNAL.
- **TRIGGER SLOPE** – constantly set to POSITIVE.
- **PRETRIG. SAMPLES** – number of samples taken before trigger event. Range 0 to 65023.
- **COUNT** – maximum sample count. Range 1 to 130560 ( $2^{17} - 512$ ) for the FSP and ESPI, 1 to 523776 ( $2^{19} - 512$ ) for the FSU. and 1 to 16776704 ( $2^{24} - 512$ ) for the FSQ.

## Save IQ Data

This control windows allows to store IQ data in various file formats.

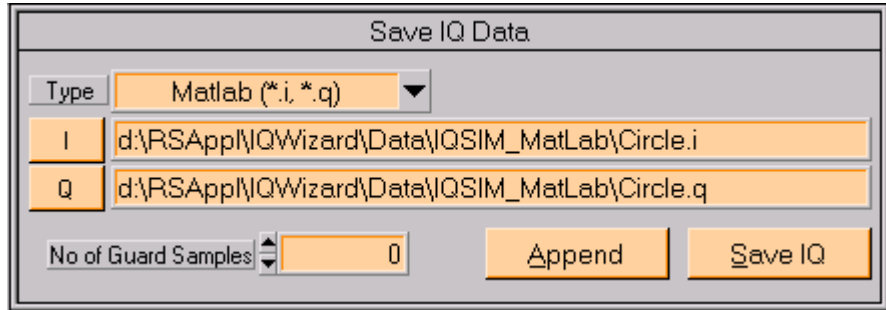


Fig. 14 Save IQ Data

- **TYPE** – select file type (Same as in section *Load IQ Data* except \*.wav, \*.trc and *Uint16* format).
- **I** – select I-, or IQ- (containing both I and Q values) file name.
- **Q** – select Q file name. This control and indicator are dimmed when IQ-file format is selected.
- **SAVE IQ** – save data in memory to specified file
- **APPEND** – append data in memory to data already in the specified file.
- **NO OF GUARD SAMPLES** – number of samples added before data in memory is appended. The last samples are appended in regular order (see picture).

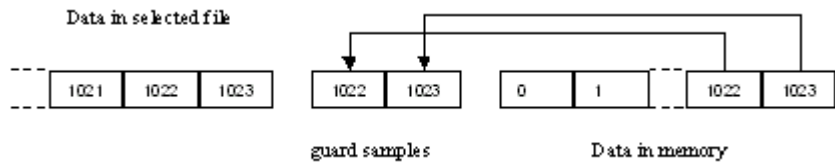


Fig. 15 Guard Samples



## **IQWizard Measurement Example**

The demo configuration should be set up as follows.

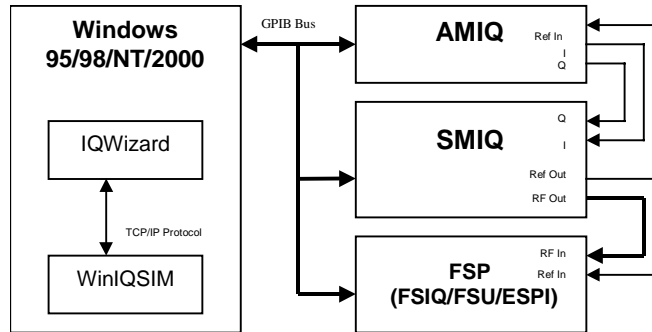


Fig. 16 Demo Hardware Configuration

This example demonstrates how an IQ signal file (**DEMO SIGNAL.I**, **DEMO SIGNAL.Q**) can be loaded with *IQWizard*, transferred to *WinIQSIM* and uploaded to an *AMIQ*. The signal from the *AMIQ* is modulated by an *SMIQ*. The *SMIQ* output is directly connected to an *FSP* analyzer. *WinIQSIM* is set up with the configuration file **DEMO WIQ.IQS** and the analyzer is configured by *IQWizard* directly using **DEMO IQW.CFG**. Data is recorded with the *FSP Trace IQ* function. Transfer the data to *WinIQSIM* again in order to check the traced signal quality.

1. Start **IQWIZARD.EXE** (**IQWIZARD.CFG** is automatically loaded)
2. Load **DEMO SIG.I** and **DEMO SIG.Q**

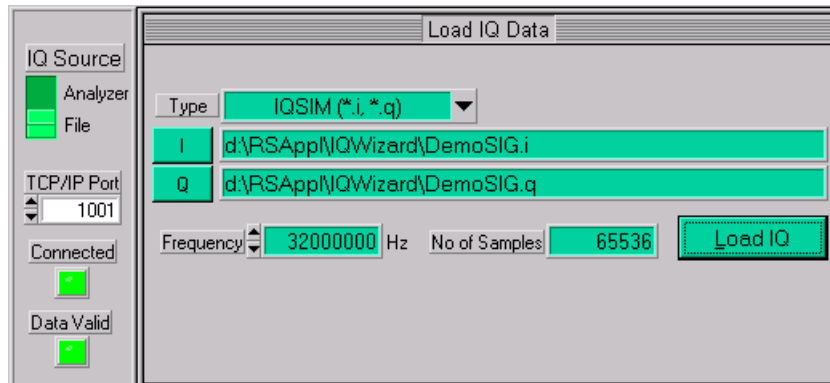


Fig. 17 Demo Load IQ Data

3. Start **WINIQSIM.EXE** and load **DEMOWIQ.IQS** configuration file to set up *Import*, *Filter* and *Graphics* parameters. If the IQWizard *Connected LED* does not turn green simply move mouse cursor in WinIQSIM to the *Import* button, click once and change the TCP/IP port number, if necessary.

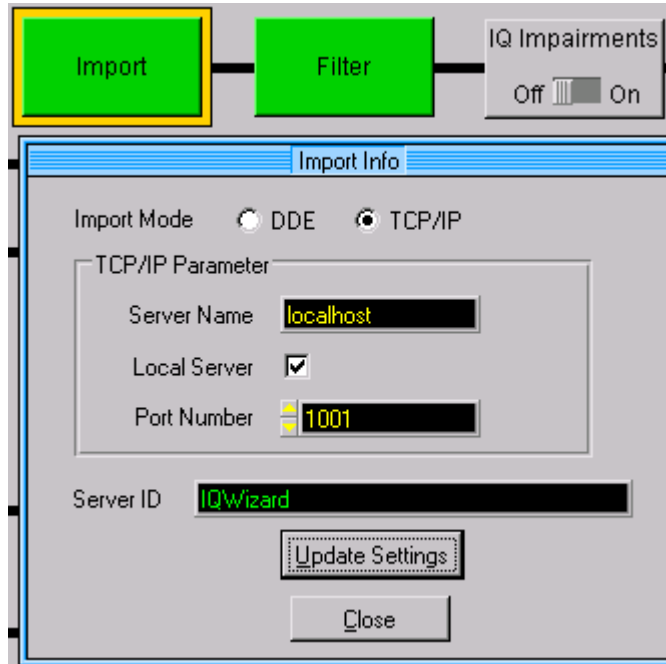


Fig. 18 WinIQSIM Import

4. The Import Filter is set up as follows.

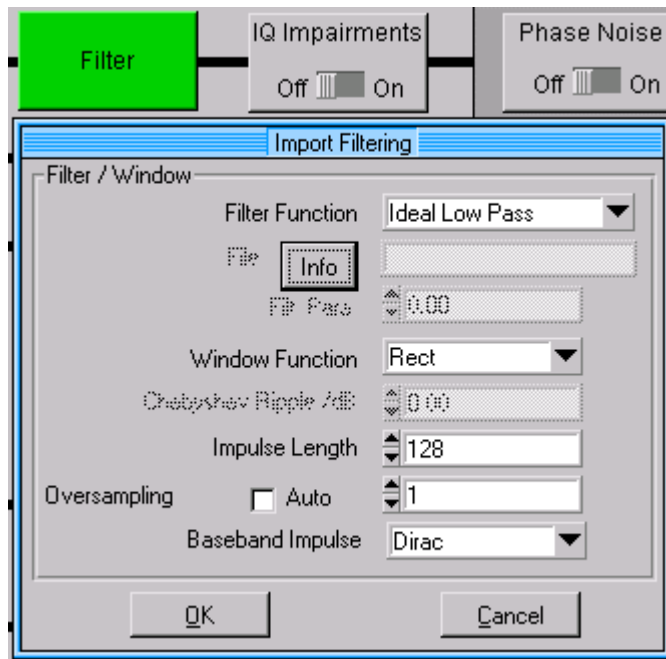


Fig. 19 WinIQSIM Import Filter

- Now click on the WinIQSIM *Graphics* icon to load the IQ data from IQWizard via TCP/IP.

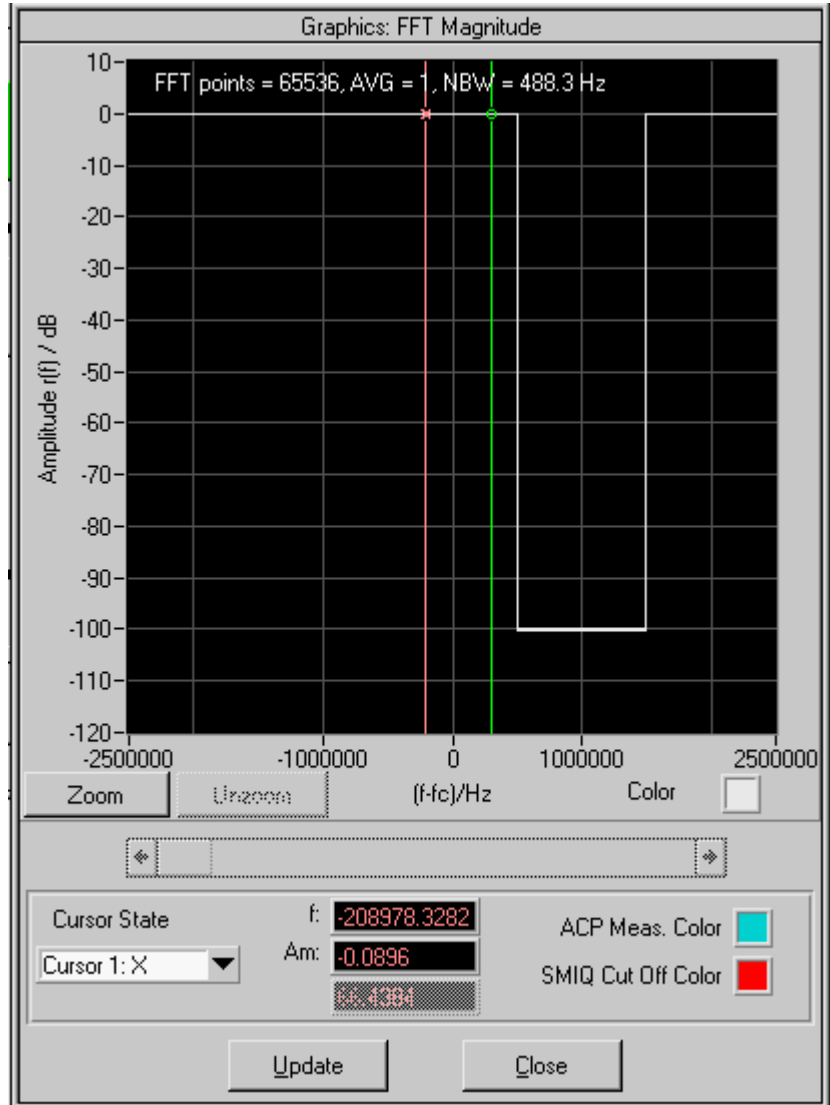


Fig. 20 WinIQSIM Orig. Signal

6. Press the **AMIQ TRANSMISSION -> TRANSMIT** button to transmit the data to the AMIQ. Be sure to check **COMPENSATE OUTPUT SIGNAL FOR SIN(x)/X DISTORTION**.

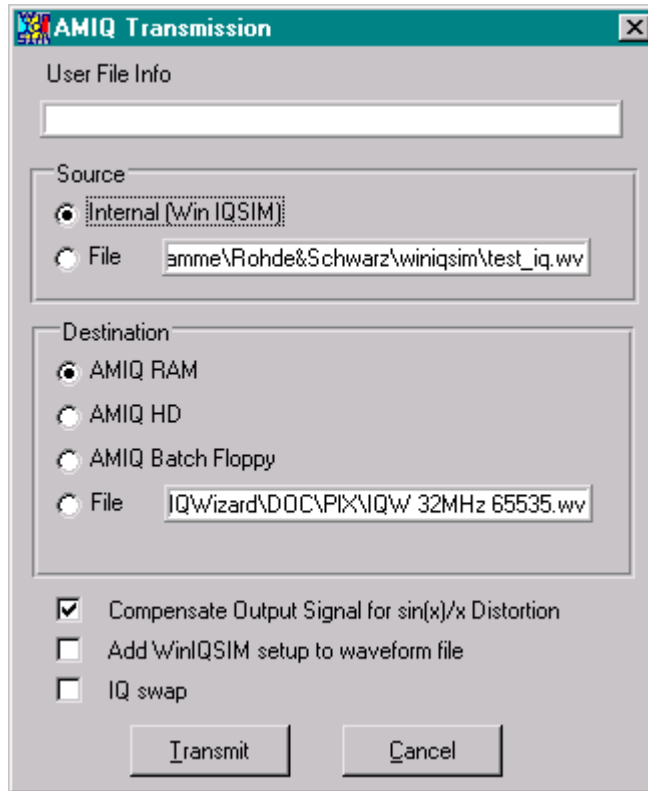


Fig. 21 WinIQSIM AMIQ Transmission

7. Reset the **SMIQ** and set following parameters manually.

FREQUENCY	2 GHz
OUTPUT LEVEL	-20 dBm
VECTOR MODULATION	ON

8. Reset the **FSP** and set following parameters manually. If you wish to store the analyzer trace for further examination press

**TRACE -> COPY TRACE -> 2 -> ENTER**

CENTER FREQUENCY	2 GHz
OUTPUT LEVEL	-20 dBm
RESOLUTION BANDWIDTH	10 kHz
VIDEO BANDWIDTH	AUTO
SWEPTIME	2s
DETECTOR	RMS

- Change the **IQ SOURCE** in IQWIZARD to **ANALYZER**, press the **TRACE IQ** button and wait until the **DATA VALID** indicator turns *green*.

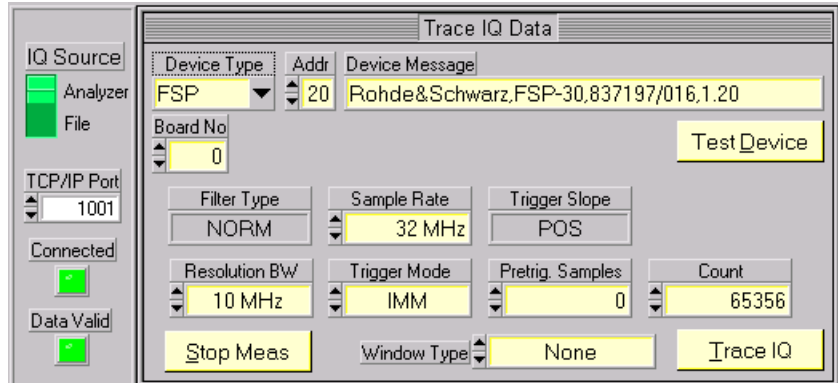


Fig. 22 IQWizard Demo Trace

- Transfer the IQ data from IQWIZARD to by pressing WinIQSIM's **GRAPHICS** menu **UPDATE** button.

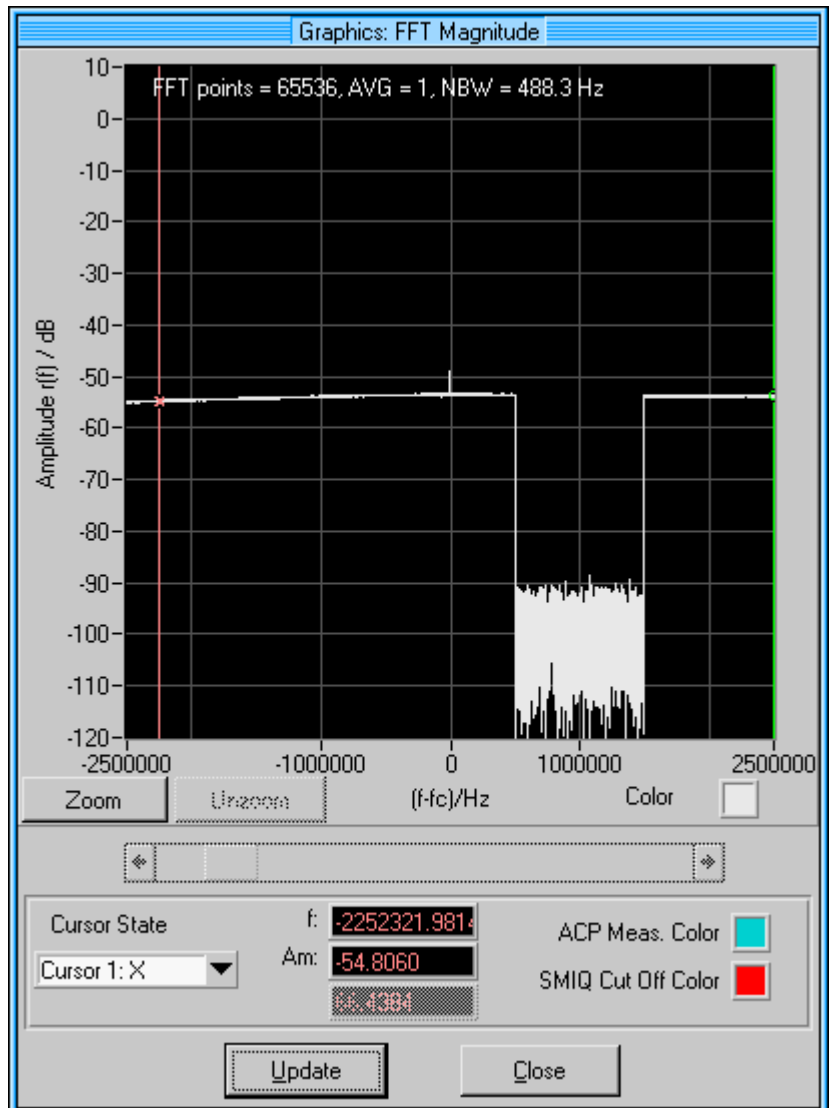


Fig. 23 WinIQSIM Demo Trace

11. Transmit the IQ signal to the AMIQ as described above and you will obtain the following display on the analyzer.

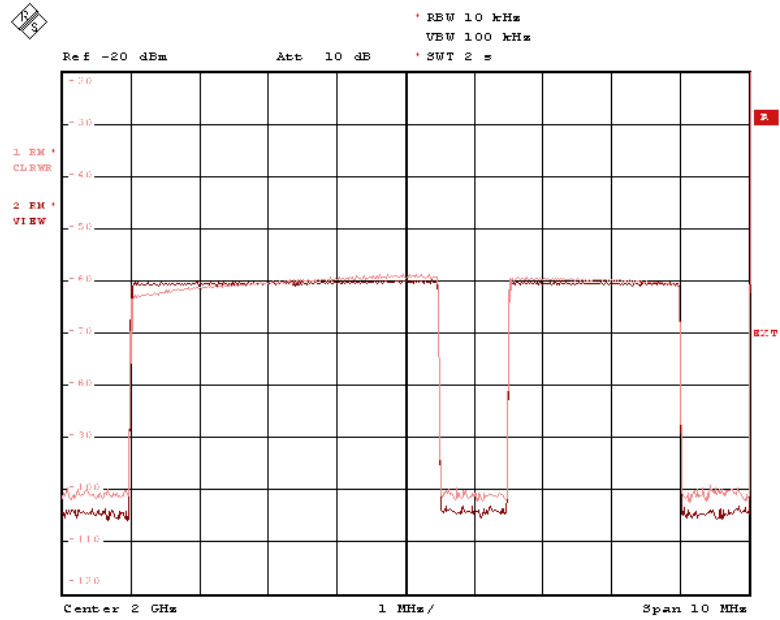


Fig. 24 FSP Demo Trace

## 7 Additional Information

Please contact **TM-APPLICATIONS@RSD.ROHDE-SCHWARZ.COM** for comments and further suggestions.

## 8 Ordering information

<b>IQ Modulator</b>		
AMIQ-03	(4 MSamples)	1110.2003.03
AMIQ-04	(16 MSamples)	1110.2003.04
<b>Vector Signal Generator</b>		
SMIQ02B	(300 kHz to 2.2 GHz)	1125.5555.02
SMIQ03B	(300 kHz to 3.3 GHz)	1125.5555.03
SMIQ04B	(300 kHz to 4.4 GHz)	1125.5555.04
SMIQ06B	(300 kHz to 6.4 GHz)	1125.5555.06
<b>Spectrum Analyzer</b>		
FSIQ3	(20Hz to .3.5GHz)	1119.5005.03
FSIQ7	(20Hz to .7 GHz)	1119.5005.07
FSIQ26	(20Hz to .26 GHz)	1119.6001.26
FSP3	(9 kHz to 3 GHz)	1093.4495.03
FSP7	(9 kHz to 7 GHz)	1093.4495.07
FSP13	(9 kHz to 13 GHz)	1093.4495.13
FSP30	(9 kHz to 30 GHz)	1093.4495.30
FSU3	(20 Hz to 3.6 GHz)	1129.9003.03
FSU8	(20 Hz to 8 GHz)	1129.9003.08
FSU26	(20 Hz to 26.5 GHz)	1129.9003.26
FSQ3	(20 HZ to 3 GHz)	1155.5001.03
FSQ8	(20 HZ to 8 GHz)	1155.5001.08
FSQ26	(20 HZ to 26.5 GHz)	1155.5001.26
ESPI3	(9 kHz to 3 GHz)	1142.8007.03
ESPI7	(9 kHz to 7 GHz)	1142.8007.07
<b>Options</b>		
FSIQ-B70	DSP&IQ Memory Ext. 2x 512k	1119.6747.02

**ROHDE & SCHWARZ**

ROHDE & SCHWARZ GmbH & Co. KG · Mühldorfstraße 15 · D-81671 München · P.O.B 80 14 69 · D-81614 München ·  
Telephone +49 89 4129 -0 · Fax +49 89 4129 - 13777 · Internet: <http://www.rohde-schwarz.com>

*This application note and the supplied programs may only be used subject to the conditions of use set forth in the download area of the Rohde & Schwarz website.*