

Lecture 10

Vector Network Analyzers and Signal Flow Graphs

Sections: 6.7 and 6.11

Homework: From Section 6.13 **Exercises:** 4, 5, 6, 7, 9, 10, 22


Acknowledgement: Some diagrams and photos are from M. Steer's book
"Microwave and RF Design"

Vector Network Analyzers

Agilent 8719ES







R&S®ZVA67 VNA
2 ports, 67 GHz

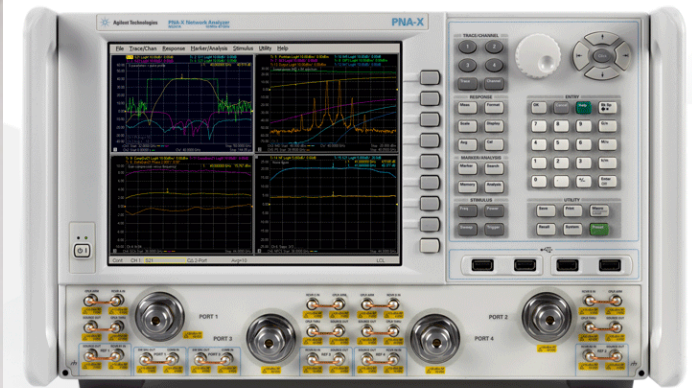


Agilent N5247A PNA-X
VNA, 4 ports, 67 GHz

Vector Network Analyzer and IC Probes

measurements of circuits with non-coaxial connectors (HMIC, MMIC)

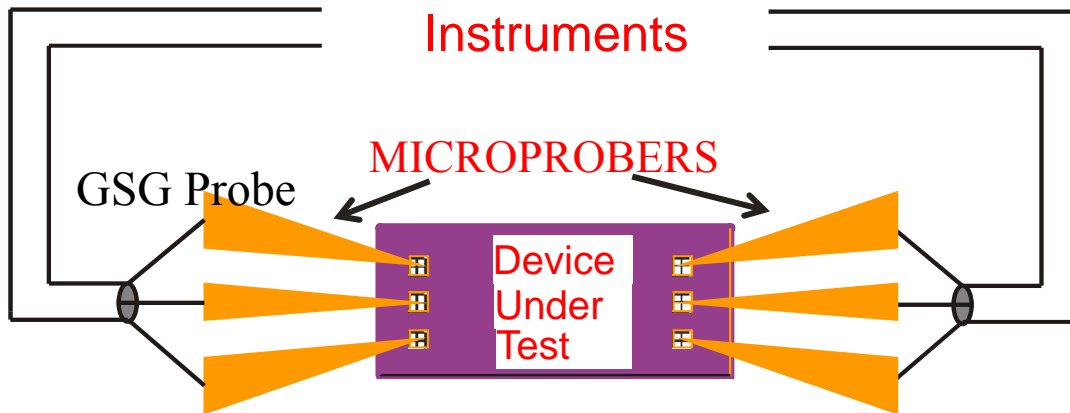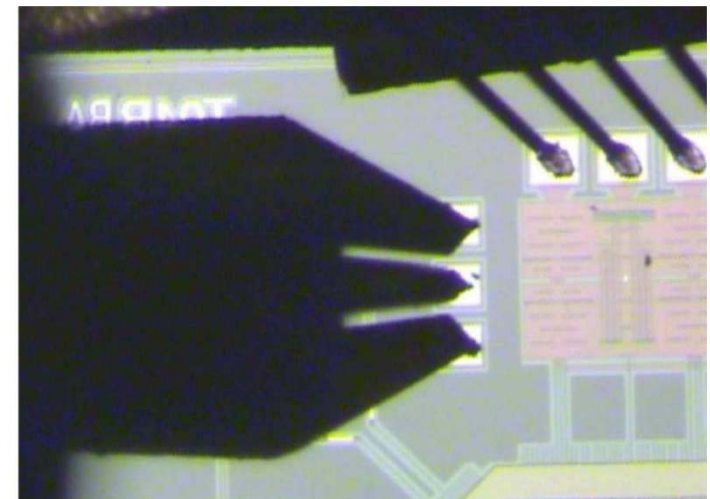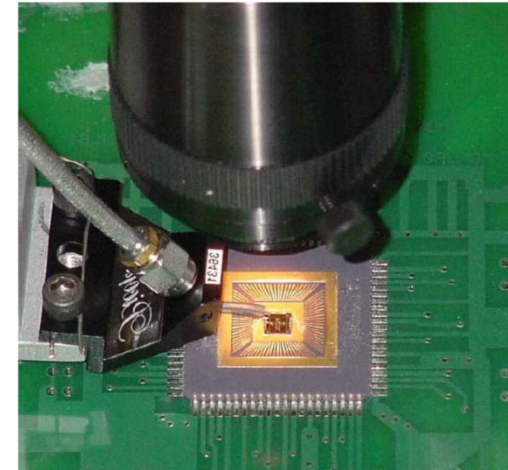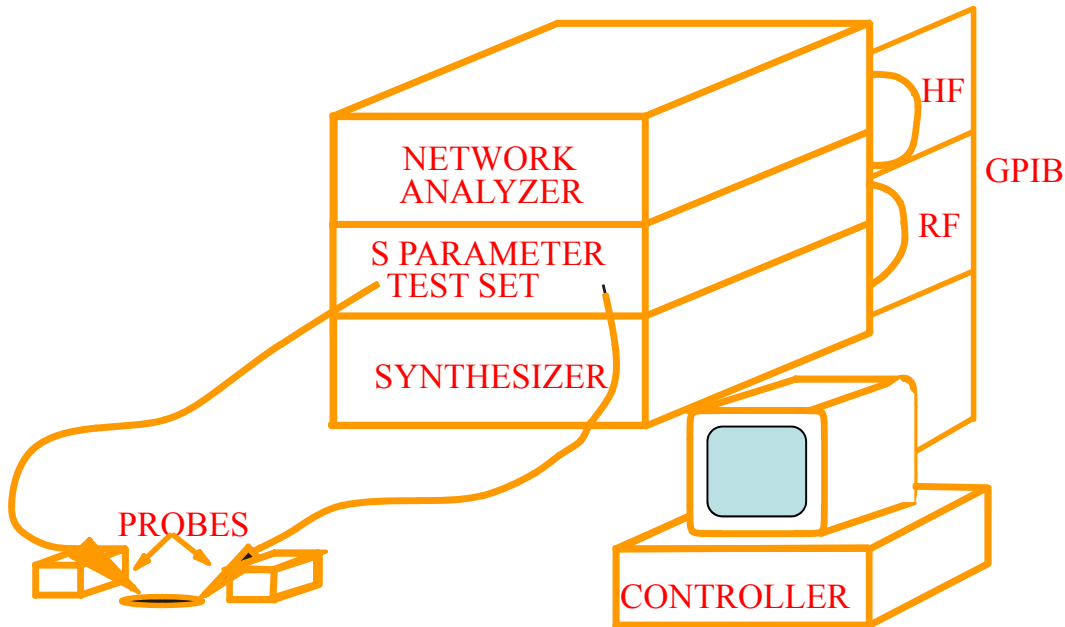


2-Port Vector Network Analyzer: Schematic

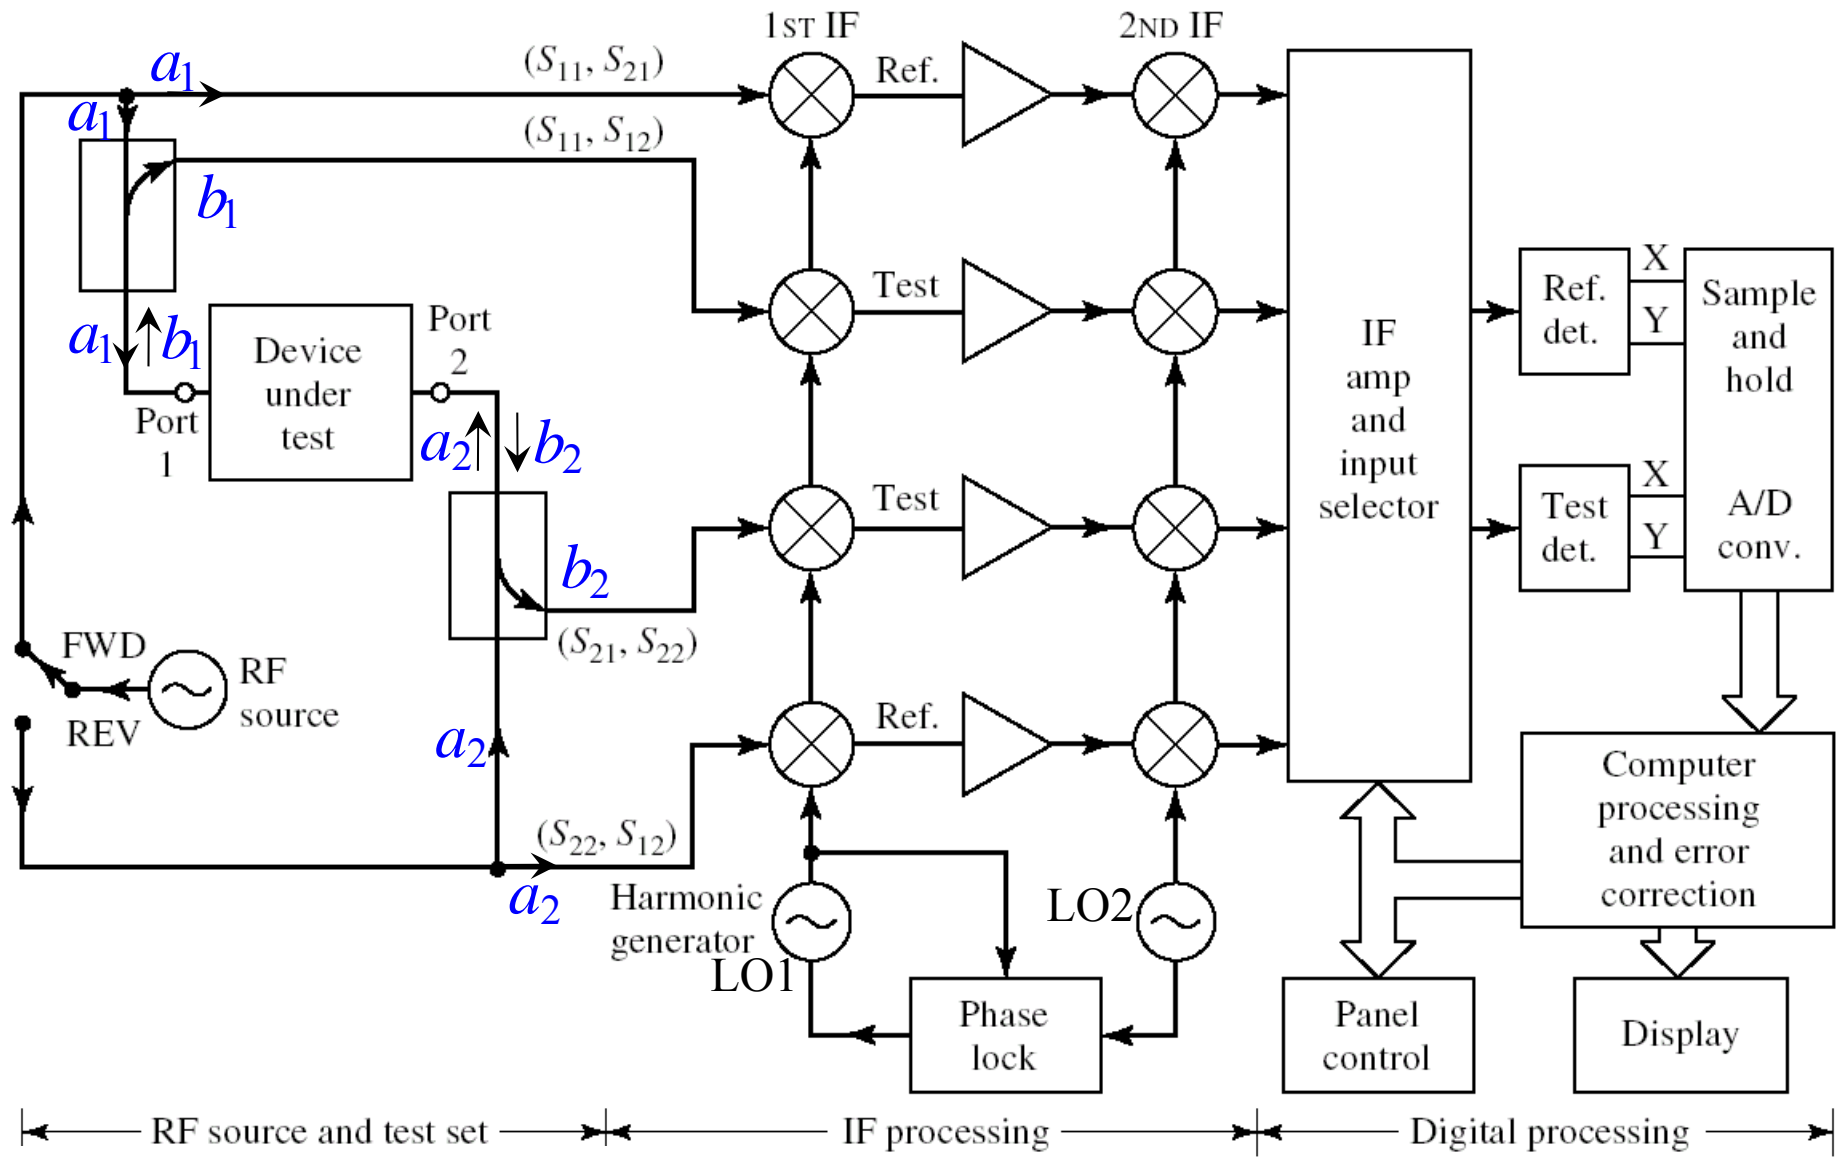


[Pozar, *Microwave Engineering*]

N-Port Vector Network Analyzer: Schematic

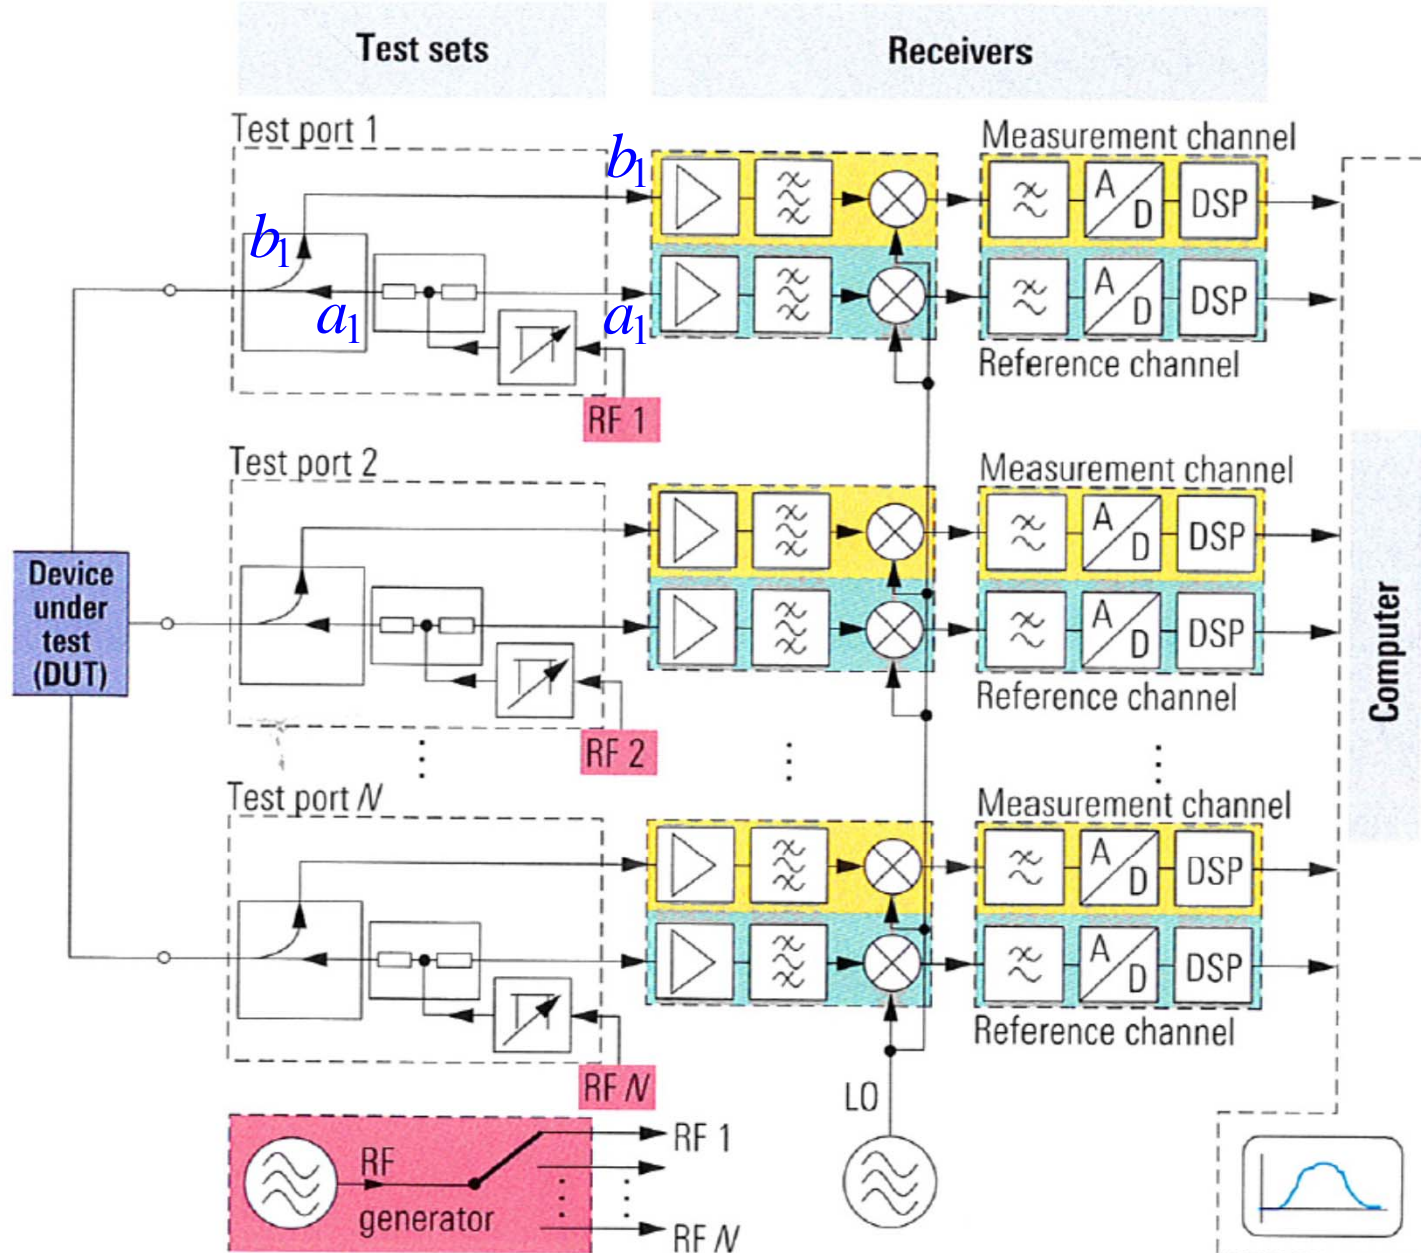

Vector Network Analyzer: Directional Element

reversed directional coupler

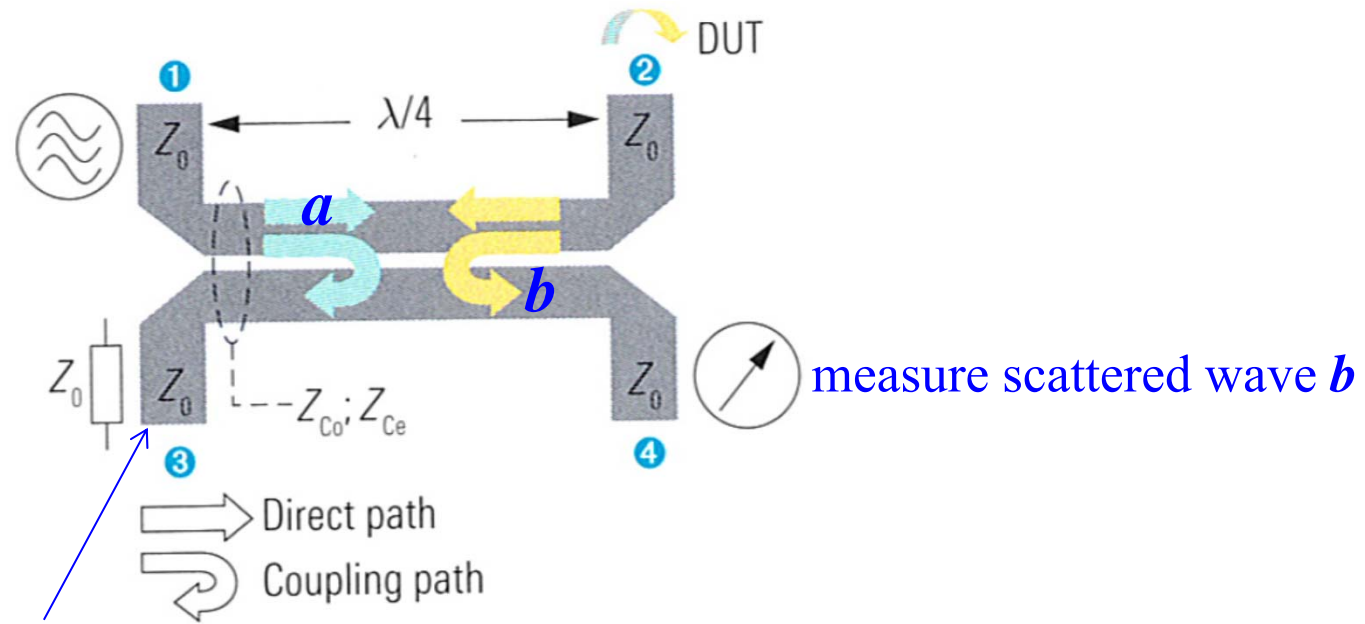

port 3 terminated with a matched load (power is absorbed, not used)

Signal Flow Graphs

- used to analyze microwave circuits in terms of incident and scattered waves
- used to devise calibration techniques for VNA measurements
- components of a signal flow graph


nodes

each port has two nodes, a_k and b_k


branches

- a branch shows the dependency between pairs of nodes
- it has a direction – from input to output



example: 2-port network

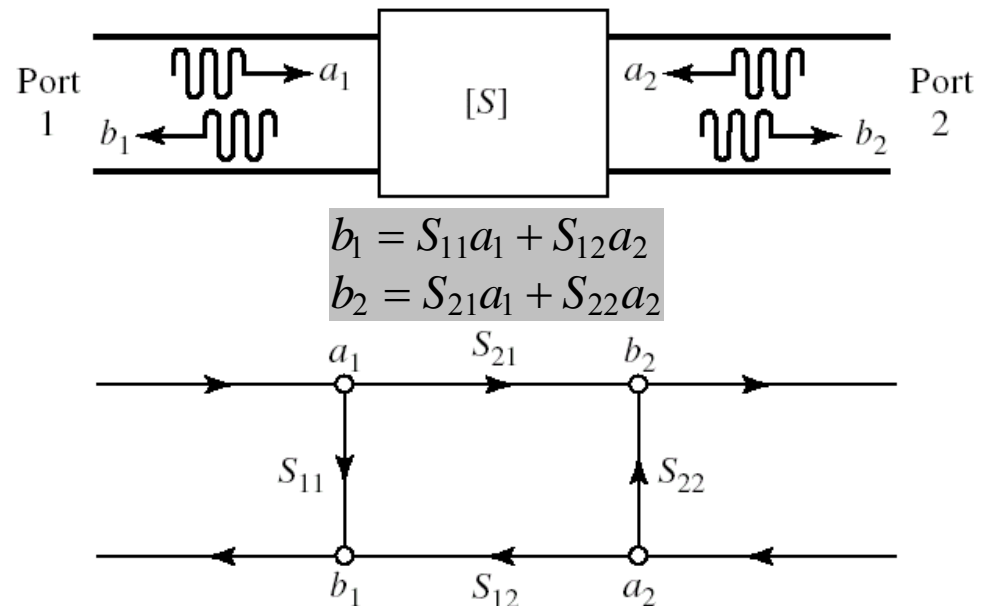

Signal Flow Graphs of Two Basic 1-port Networks

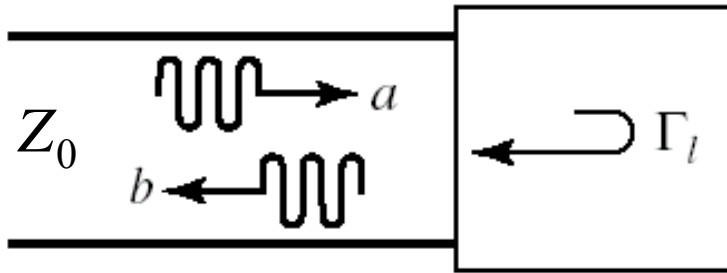


(a) load

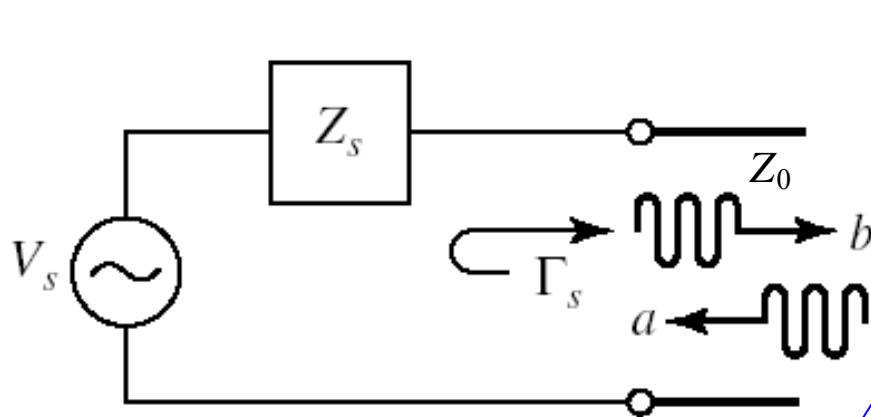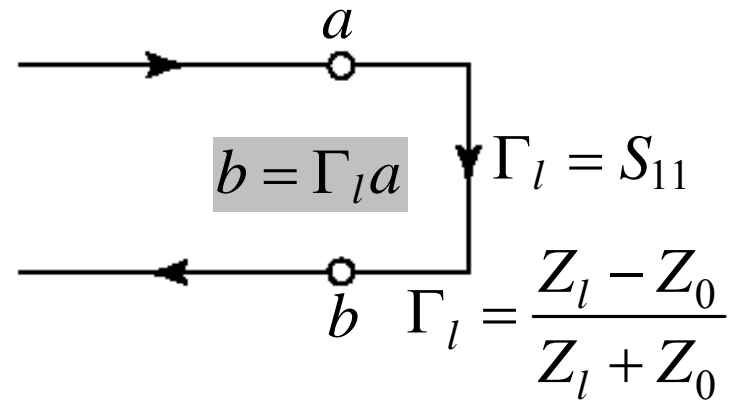



$$V^+ = V_s \cdot \frac{Z_0}{(Z_0 + Z_s)}, \quad b = \frac{V^+}{\sqrt{Z_0}}$$

$$\Gamma_s = \frac{Z_s - Z_0}{Z_s + Z_0}$$

(b) source


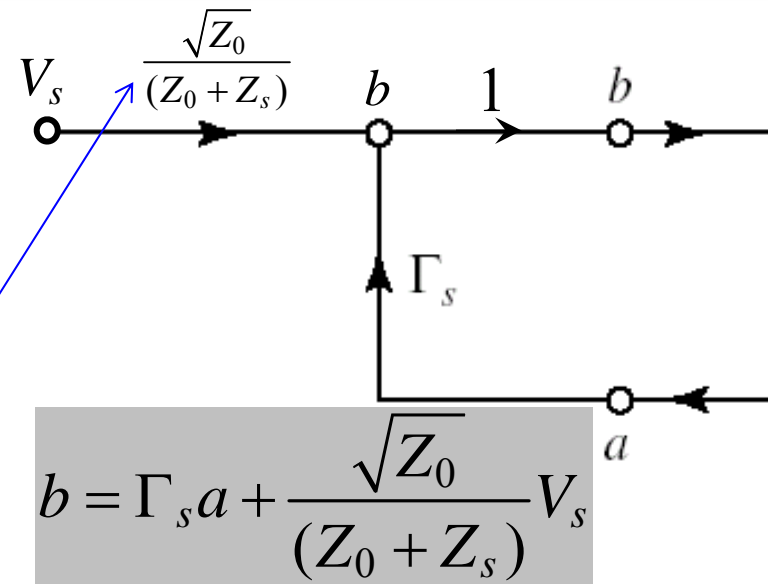


Decomposition Rules of Signal Flow Graphs





(a)

(1) series rule

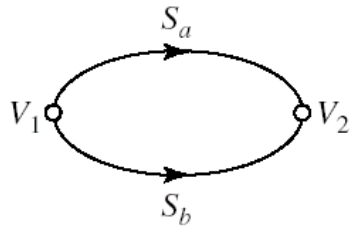



(b)

(2) parallel rule

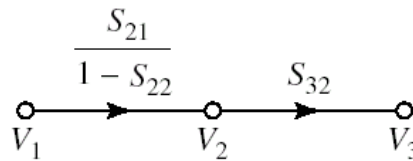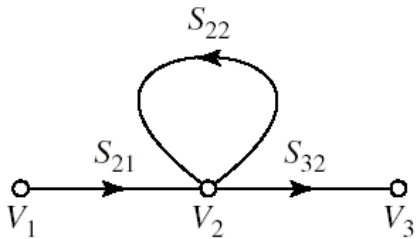

(c)

(3) self-loop rule

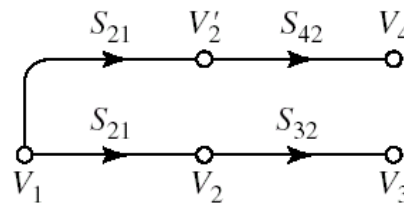
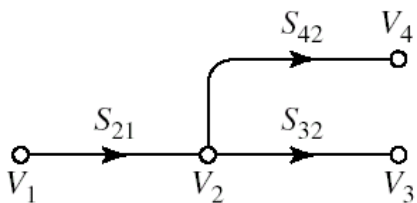


(d)


(4) splitting rule

Signal Flow Graphs: Example


Express the input reflection coefficient Γ of a 2-port network in terms of the reflection at the load Γ_L and its S -parameters.

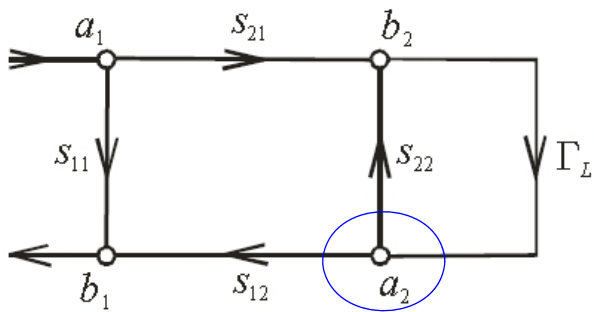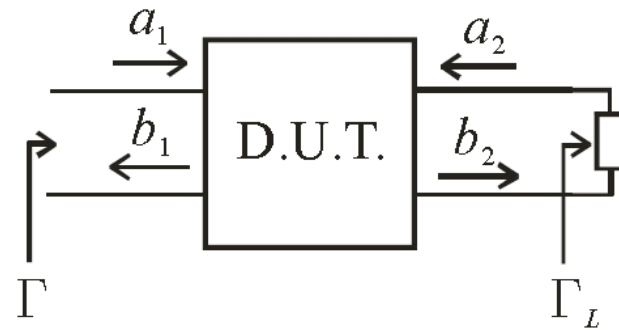

rule #4
at a_2

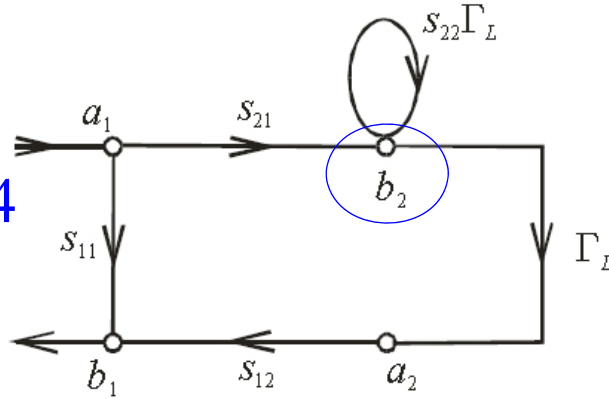


rule #3 at b_2

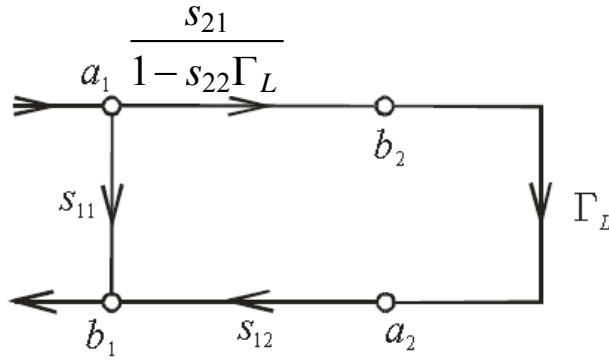

$$\Gamma = \frac{b_1}{a_1} = s_{11} + \frac{s_{12}s_{21}\Gamma_L}{1 - s_{22}\Gamma_L}$$



rule #1

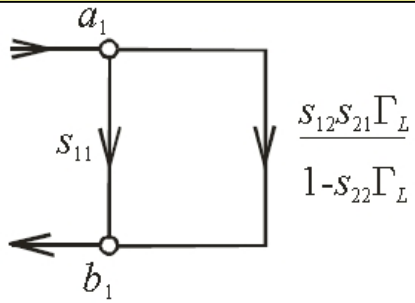


VNA Calibration for 1-port Measurements (3-term Error Model)

- the 3-term error model is known as the OSM (Open-Short-Matched) *cal* technique (*aka* OSL or SOL, Open-Short-Load)
- the *cal* procedure includes 3 measurements performed before the DUT is measured: 1) open circuit, 2) short circuit, 3) matched load
- used when $\Gamma = S_{11}$ of a single-port device is measured
- actual measurements include losses and phase delays in connectors and cables, leakage and parasitics inside the instrument – these are viewed as a 2-port *error box*
- calibration aims at de-embedding these errors from the total measured *S*-parameters

3-term Error Model: Signal-flow Graph

[Rytting, *Network Analyzer Error Models and Calibration Methods*]

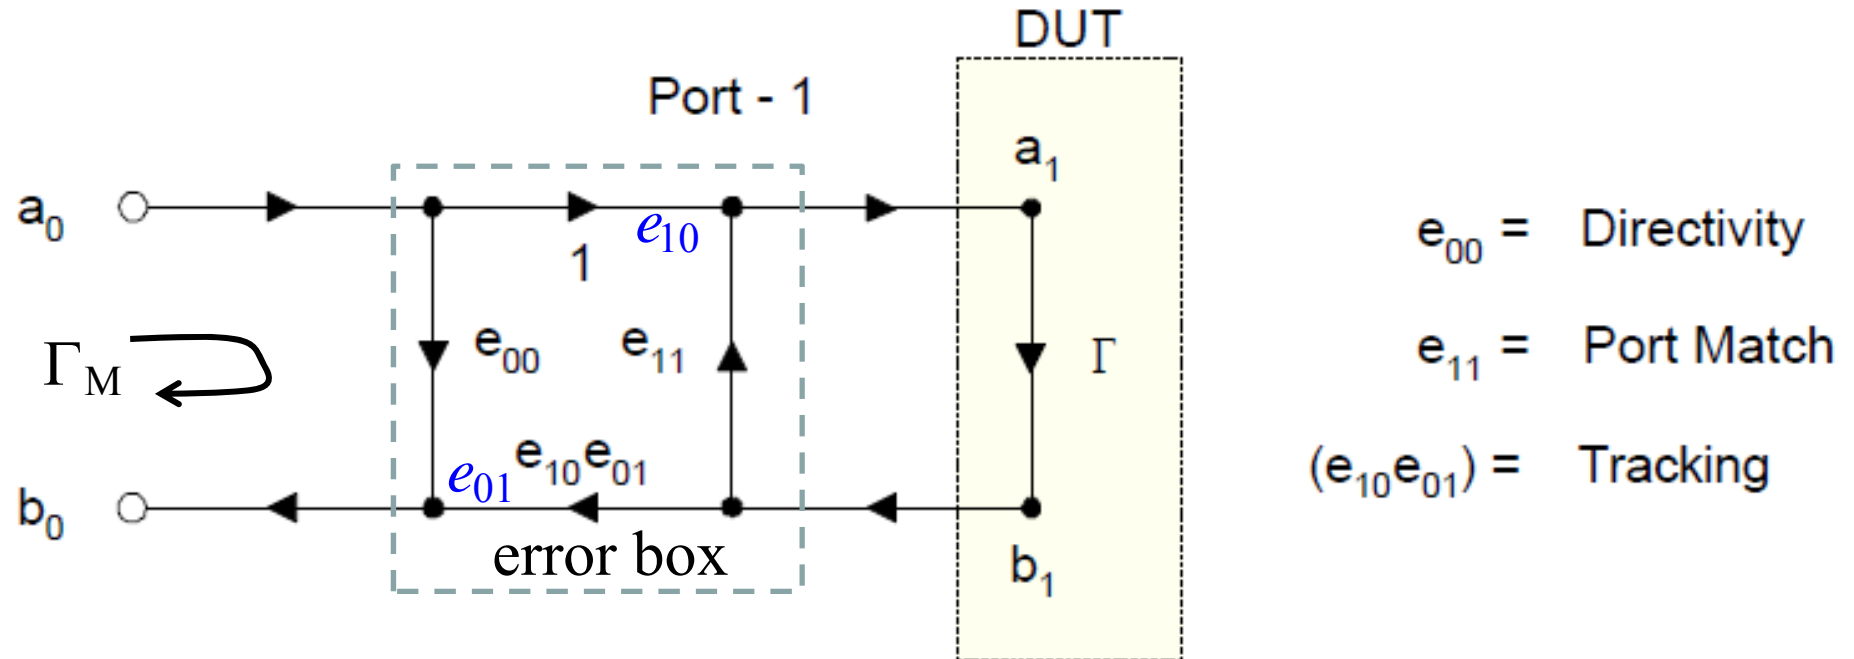

Note: SFG branches without a coefficient have a default coefficient of 1.

S-parameters of the error box contain 3 unknowns

$$S_E = \begin{bmatrix} e_{00} & 1 \\ e_{10}e_{01} & e_{11} \end{bmatrix} \Leftrightarrow S_E = \begin{bmatrix} e_{00} & e_{01} \\ e_{10} & e_{11} \end{bmatrix}$$

3-term Error Model: Error-term Equations

Measured

Actual

$$\Gamma_M = \frac{b_0}{a_0} = \frac{e_{00} - \Delta_e \Gamma}{1 - e_{11} \Gamma}$$



$$\Gamma = \frac{\Gamma_M - e_{00}}{\Gamma_M e_{11} - \Delta_e}$$

$$\Delta_e = e_{00} e_{11} - (e_{10} e_{01})$$



error de-embedding formula (see sl. 10)

Using the result from the example on sl. 10 and the signal flow graph in sl. 12, prove the formula

$$\Gamma_M = \frac{e_{00} - \Delta_e \cdot \Gamma}{1 - e_{11} \Gamma}$$



3-term Error Model

- the 3 calibration measurements with the 3 standard known loads ($\Gamma_1, \Gamma_2, \Gamma_3$) produce 3 equations for the 3 unknown error terms

$$\begin{cases} e_{00} + \Gamma_1 \Gamma_{M1} e_{11} - \Gamma_1 \Delta_e = \Gamma_{M1} \\ e_{00} + \Gamma_2 \Gamma_{M2} e_{11} - \Gamma_2 \Delta_e = \Gamma_{M2} \\ e_{00} + \Gamma_3 \Gamma_{M3} e_{11} - \Gamma_3 \Delta_e = \Gamma_{M3} \end{cases} \text{linear system for } \mathbf{x}^T = [e_{00}, e_{11}, \Delta_e]$$

$$\Rightarrow (e_{00}, e_{11}, \Delta_e) \Rightarrow \Gamma = \frac{\Gamma_M - e_{00}}{\Gamma_M e_{11} - \Delta_e}$$

error de-embedding

- ideally, in the OSM calibration,

$$\begin{aligned} \Gamma_1 &= \Gamma_o = 1 \\ \Gamma_2 &= \Gamma_s = -1 \\ \Gamma_3 &= \Gamma_m = 0 \end{aligned}$$


- for accurate results, one has to know the exact values of Γ_o , Γ_s and Γ_m – use manufacturer's cal kits!

2-port Calibration: Classical 12-term Error Model


[Rytting, *Network Analyzer Error Models and Calibration Methods*]

consists of two models:


- forward (excitation at port 1): models errors in S_{11M} and S_{21M}
- reverse (excitation at port 2): models errors in S_{22M} and S_{12M}

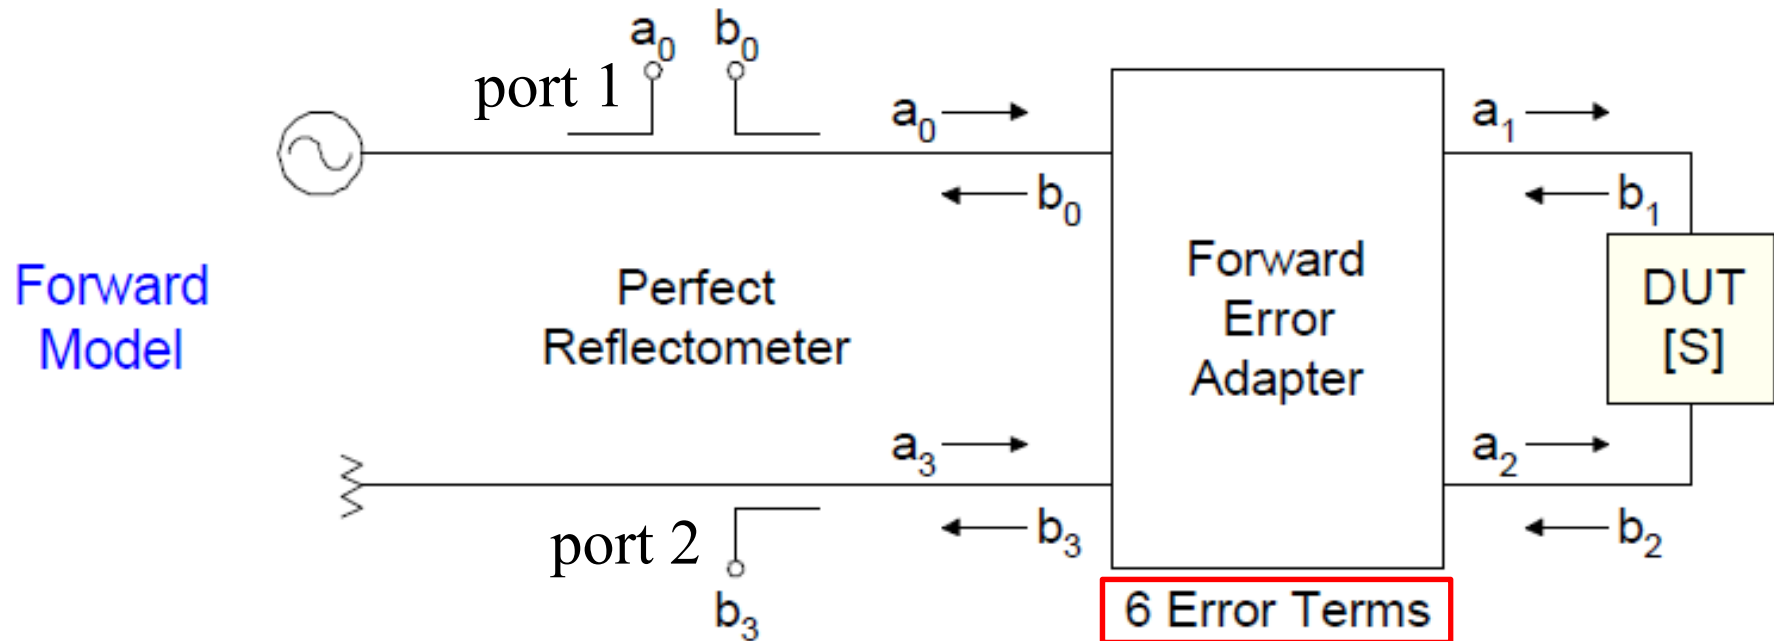

12-term Error Model: Reverse Model

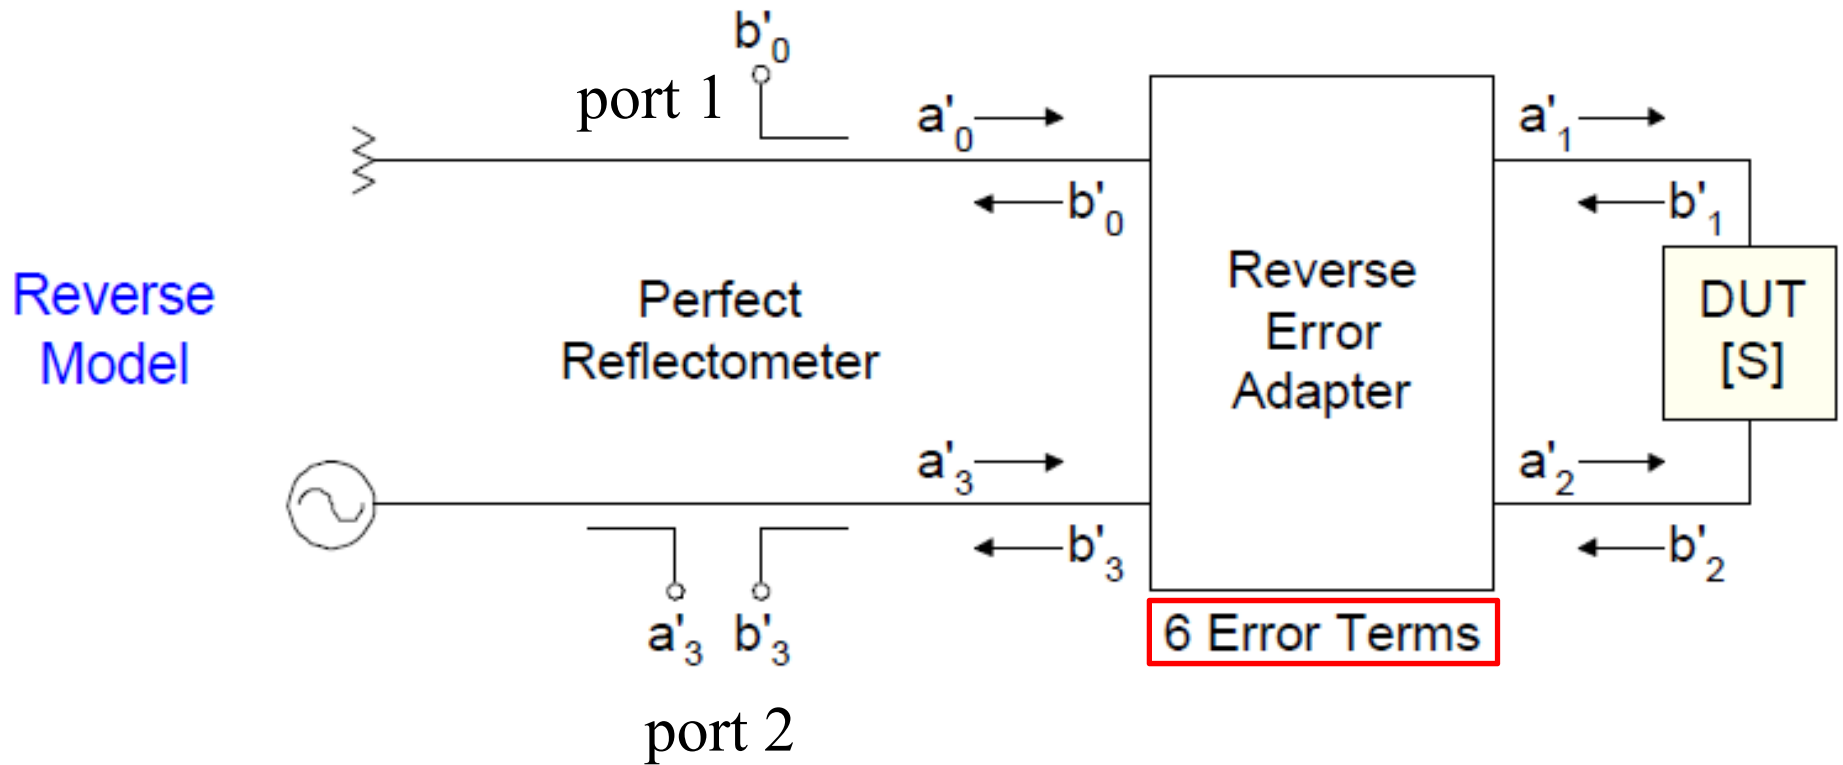

12-term Error Model: Forward-model SFG

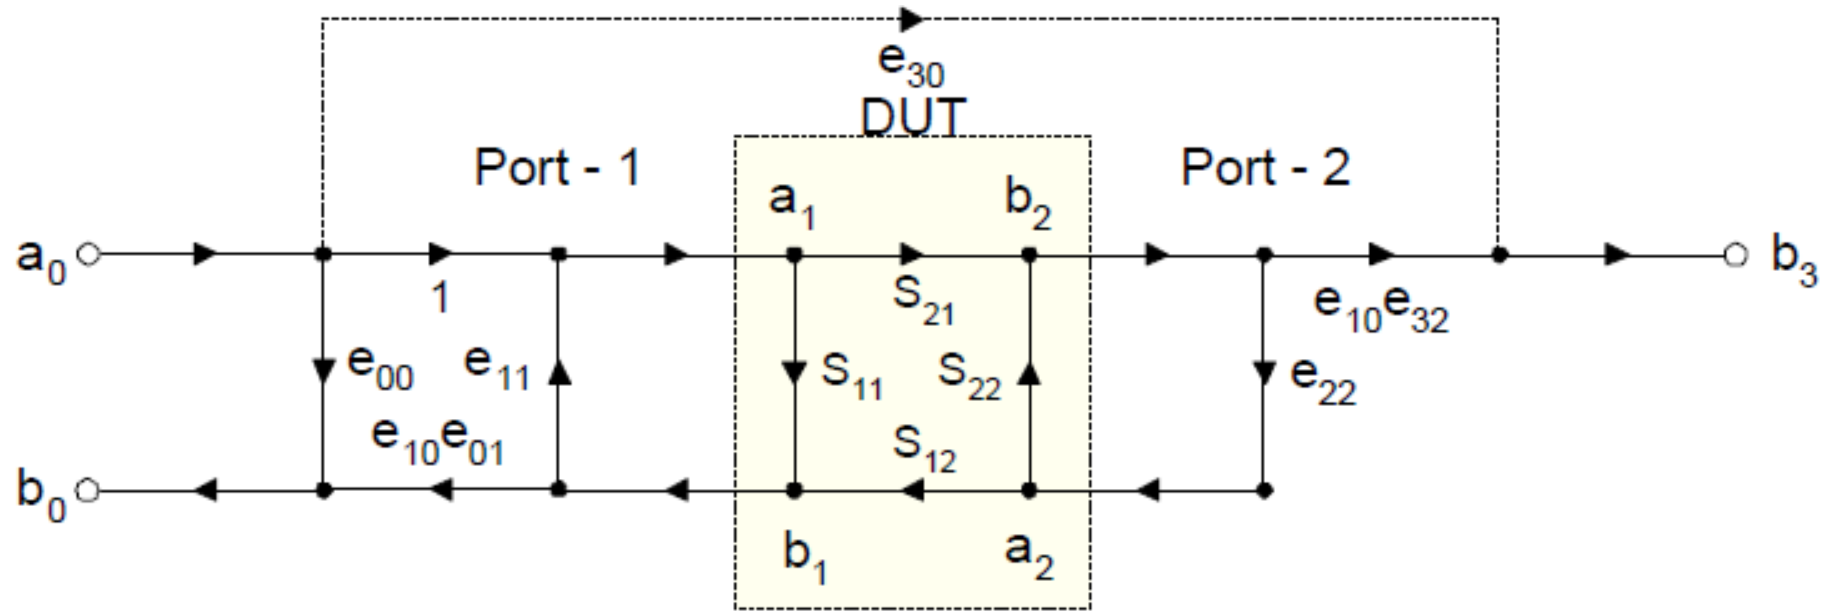

e_{00} = Directivity

e_{11} = Port-1 Match

$(e_{10}e_{01})$ = Reflection Tracking

$(e_{10}e_{32})$ = Transmission Tracking

e_{22} = Port-2 Match

e_{30} = Leakage

$$S_{11M} = \frac{b_0}{a_0} = e_{00} + (e_{10}e_{01}) \frac{S_{11} - e_{22}\Delta_S}{1 - e_{11}S_{11} - e_{22}S_{22} + e_{11}e_{22}\Delta_S}$$

$$S_{21M} = \frac{b_3}{a_0} = e_{30} + (e_{10}e_{32}) \frac{S_{21}}{1 - e_{11}S_{11} - e_{22}S_{22} + e_{11}e_{22}\Delta_S}$$

(*)

$$\Delta_S = S_{11}S_{22} - S_{21}S_{12}$$

12-term Error Model: Forward-model SFG

Using signal-flow graph transformations derive the formulas for S_{11M} and S_{21M} in the previous slide.


$$S_{11M} = \frac{b_0}{a_0} = e_{00} + (e_{10}e_{01}) \frac{S_{11} - e_{22}\Delta_S}{1 - e_{11}S_{11} - e_{22}S_{22} + e_{11}e_{22}\Delta_S}$$
$$S_{21M} = \frac{b_3}{a_0} = e_{30} + (e_{10}e_{32}) \frac{S_{21}}{1 - e_{11}S_{11} - e_{22}S_{22} + e_{11}e_{22}\Delta_S}$$

(*)

$$\Delta_S = S_{11}S_{22} - S_{21}S_{12}$$



12-term Error Model: Reverse-model SFG

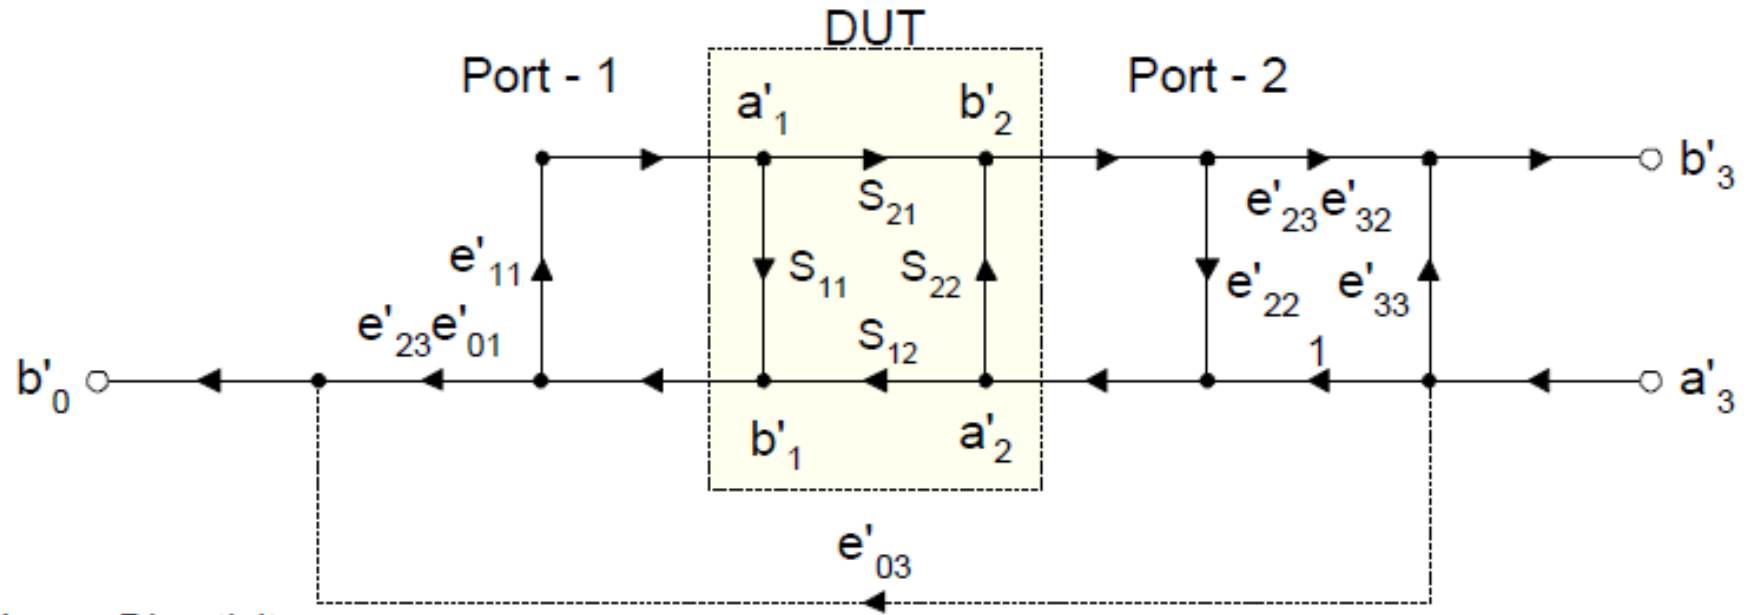

e'_{33} = Directivity

e'_{11} = Port-1 Match

$(e'_{23}e'_{32})$ = Reflection Tracking

$(e'_{23}e'_{01})$ = Transmission Tracking

e'_{22} = Port-2 Match

e'_{03} = Leakage

$$S_{22M} = \frac{b'_3}{a'_3} = e'_{33} + (e'_{23}e'_{32}) \frac{S_{22} - e'_{11} \Delta_S}{1 - e'_{11} S_{11} - e'_{22} S_{22} + e'_{11} e'_{22} \Delta_S}$$

$$S_{12M} = \frac{b'_0}{a'_3} = e'_{03} + (e'_{23}e'_{01}) \frac{S_{12}}{1 - e'_{11} S_{11} - e'_{22} S_{22} + e'_{11} e'_{22} \Delta_S}$$

(**)

$$\Delta_S = S_{11} S_{22} - S_{21} S_{12}$$

12-term Calibration Method

Step 1: Port 1 Calibration using the OSM 1-port procedure.

Obtain e_{11} , e_{00} , and Δ_e , from which $(e_{10}e_{01})$ is obtained.



Step 2: Connect matched loads (Z_0) to both ports (*isolation*). ($S_{21} = 0$)

The measured S_{21M} yields e_{30} directly.

Step 3: Connect ports 1 and 2 directly (*thru*). ($S_{21}=S_{12}=1$, $S_{11}=S_{22}=0$)

Obtain e_{22} and $e_{10} e_{32}$ from eqns. (*) using $S_{21} = S_{12} = 1$, $S_{11} = S_{22} = 0$.

\Rightarrow

$$e_{22} = \frac{S_{11M} - e_{00}}{S_{11M}e_{11} - \Delta_e}$$

$$e_{10}e_{32} = (S_{21M} - e_{30})(1 - e_{11}e_{22})$$

- All 6 error terms of the forward model are now known.
- Same procedure is repeated for port 2.

12-term Calibration Method: Error De-embedding

$$S_{11} = \frac{\left(\frac{S_{11M} - e_{00}}{e_{10} e_{01}} \right) \left[1 + \left(\frac{S_{22M} - e'_{33}}{e'_{23} e'_{32}} \right) e'_{22} \right] - e_{22} \left(\frac{S_{21M} - e_{30}}{e_{10} e_{32}} \right) \left(\frac{S_{12M} - e'_{03}}{e'_{23} e'_{01}} \right)}{D}$$

$$S_{21} = \frac{\left(\frac{S_{21M} - e_{30}}{e_{10} e_{32}} \right) \left[1 + \left(\frac{S_{22M} - e'_{33}}{e'_{23} e'_{32}} \right) (e'_{22} - e_{22}) \right]}{D}$$

$$S_{22} = \frac{\left(\frac{S_{22M} - e'_{33}}{e'_{23} e'_{32}} \right) \left[1 + \left(\frac{S_{11M} - e_{00}}{e_{10} e_{01}} \right) e_{11} \right] - e'_{11} \left(\frac{S_{21M} - e_{30}}{e_{10} e_{32}} \right) \left(\frac{S_{12M} - e'_{03}}{e'_{23} e'_{01}} \right)}{D}$$

$$S_{12} = \frac{\left(\frac{S_{12M} - e'_{03}}{e'_{23} e'_{01}} \right) \left[1 + \left(\frac{S_{11M} - e_{00}}{e_{10} e_{01}} \right) (e_{11} - e'_{11}) \right]}{D}$$

$$D = \left[1 + \left(\frac{S_{11M} - e_{00}}{e_{10} e_{01}} \right) e_{11} \right] \left[1 + \left(\frac{S_{22M} - e'_{33}}{e'_{23} e'_{32}} \right) e'_{22} \right] - \left(\frac{S_{21M} - e_{30}}{e_{10} e_{32}} \right) \left(\frac{S_{12M} - e'_{03}}{e'_{23} e'_{01}} \right) e_{22} e'_{11}$$

2-port Thru-Reflect-Line Calibration

- TRL (Thru-Reflect-Line) calibration is used when classical standards such as open, short and matched load cannot be realized
- TRL is the calibration used when measuring devices with non-coaxial terminations (HMIC and MMIC)
- TRL calibration is based on an 8-term error model
- TRL calibration requires three (2-port) calibration structures


thru: the 2 ports must be connected directly, **sets the reference planes**

reflect: load on each port identical; must have large reflection


line (or *delay*): 2 ports connected with a matched (Z_0) transmission line (TL must represent the IC interconnect for the measured DUT)

Thru, Reflect, and Line Calibration Connections


(a) *thru*

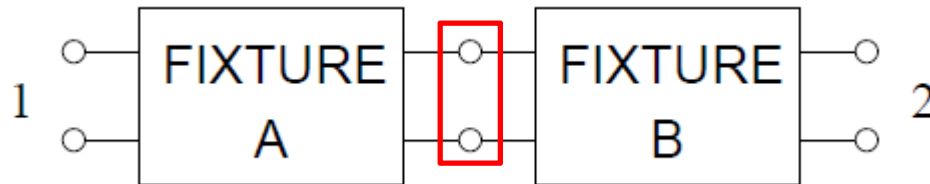



(b) *reflect*

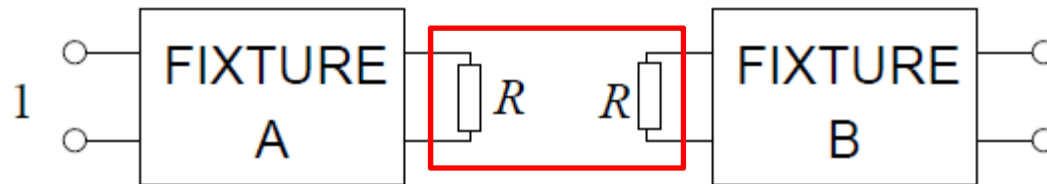

(c) *line*

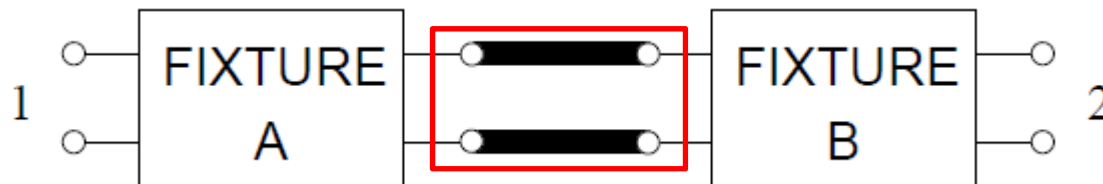


Thru-Reflect-Line Calibration Fixtures

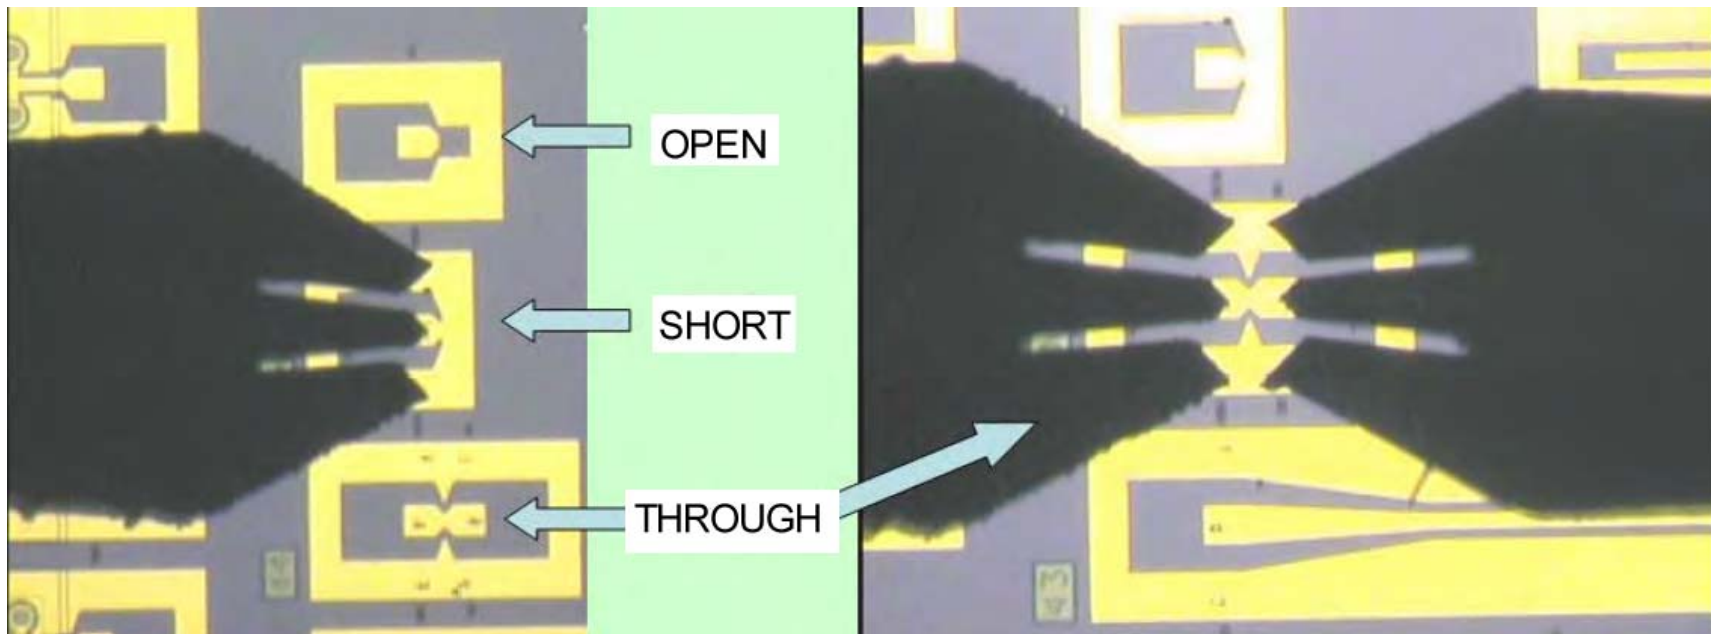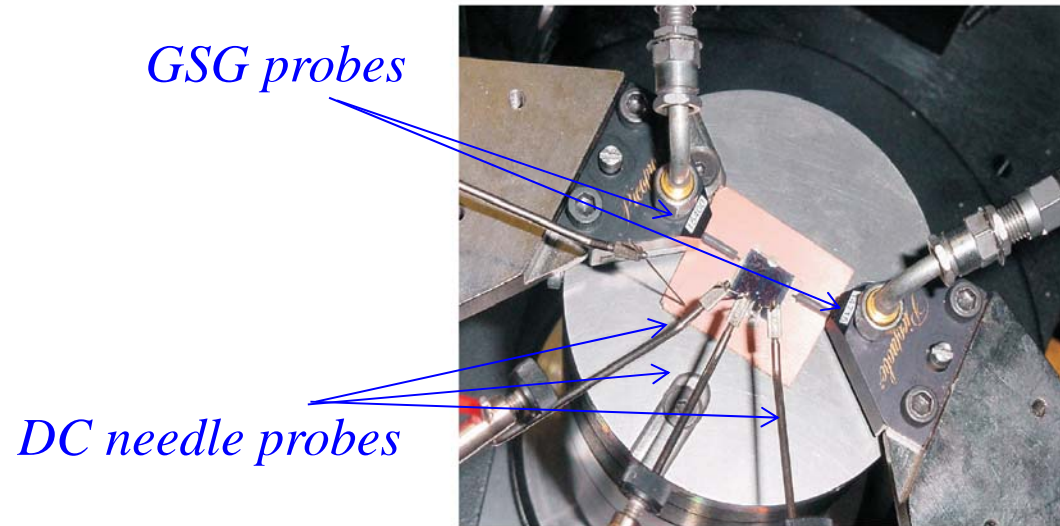


2-port Calibration: 8-term Error Model



[Rytting, *Network Analyzer Error Models and Calibration Methods*]

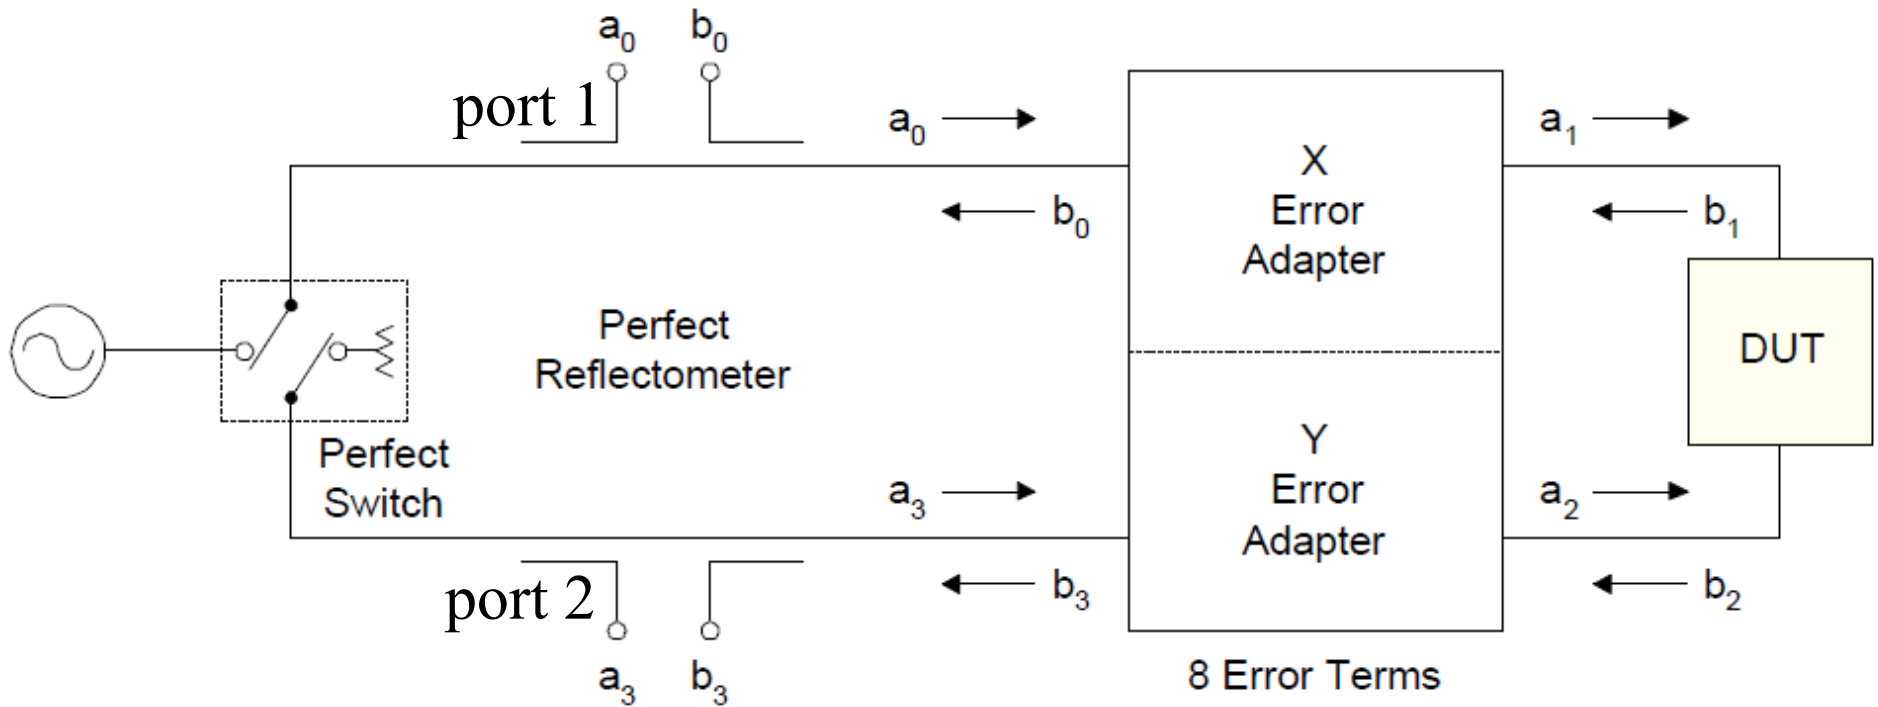



Signal-flow Graph of 8-term Error Model

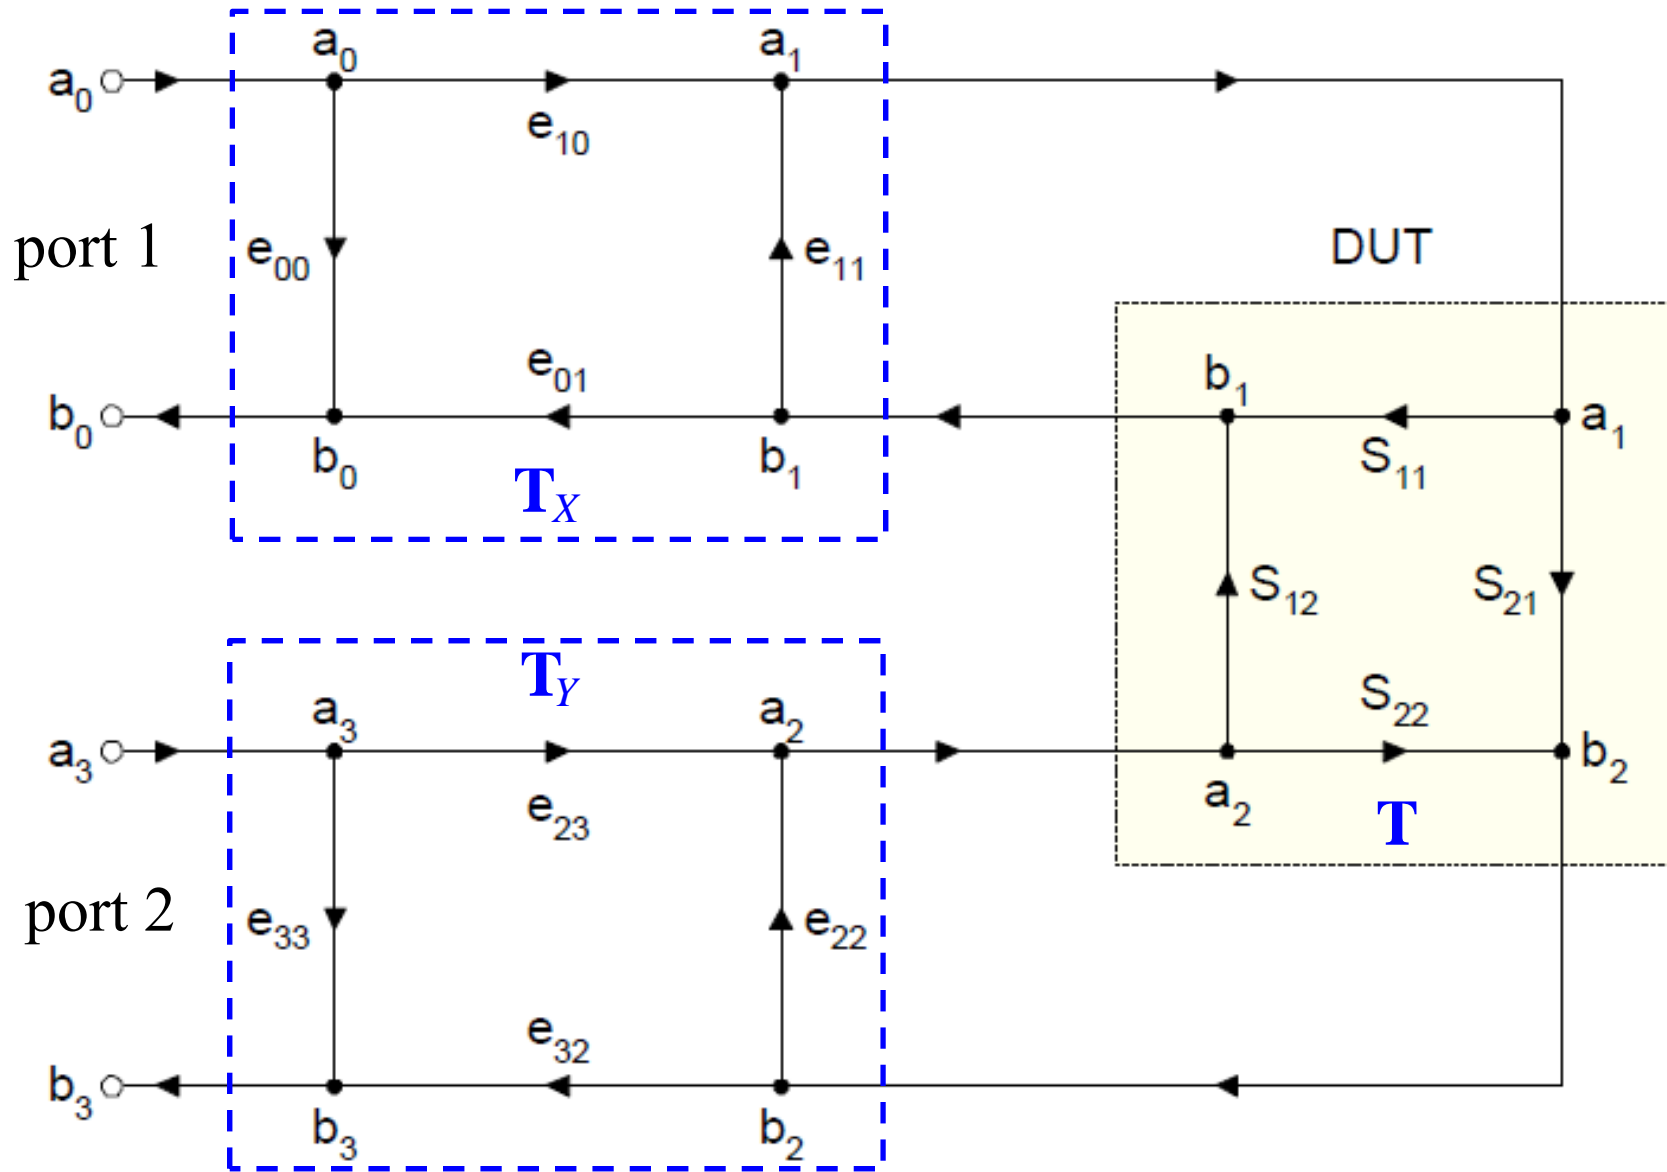

Signal-flow Graphs of the 3 TRL Calibration Measurements

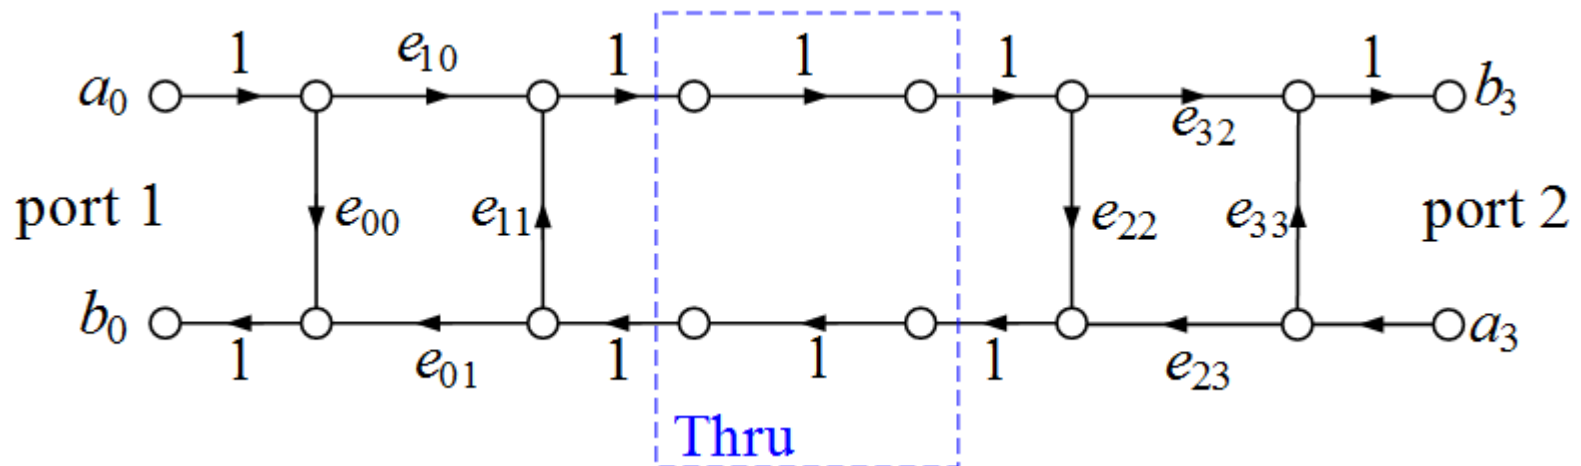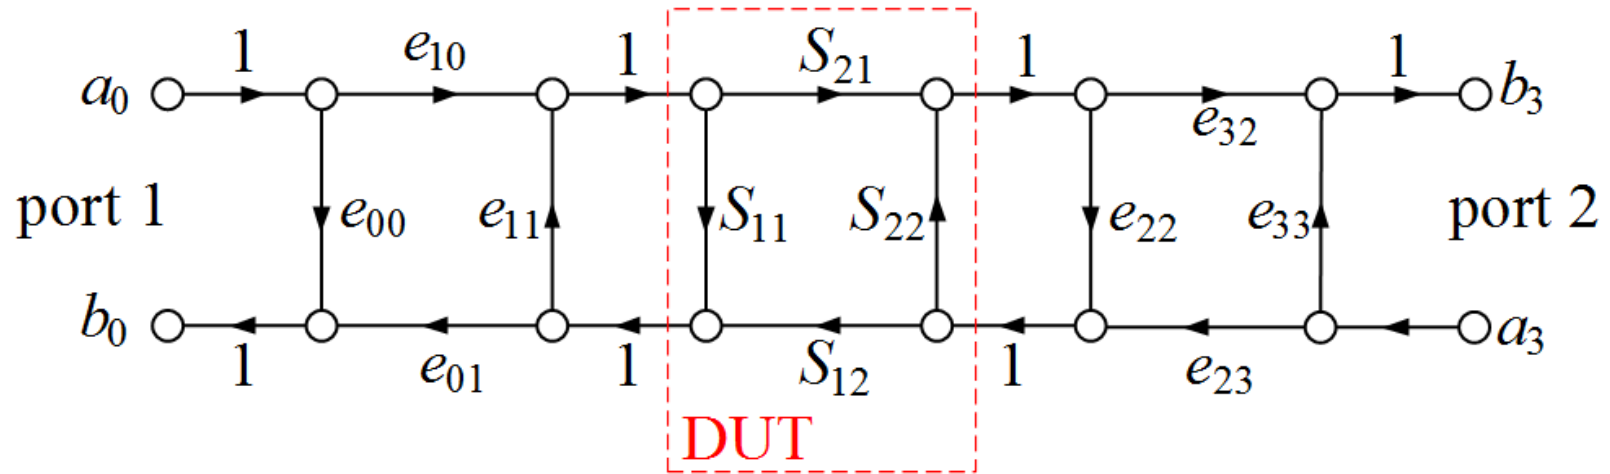

Signal-flow Graphs of the 3 TRL Calibration Measurements (2)

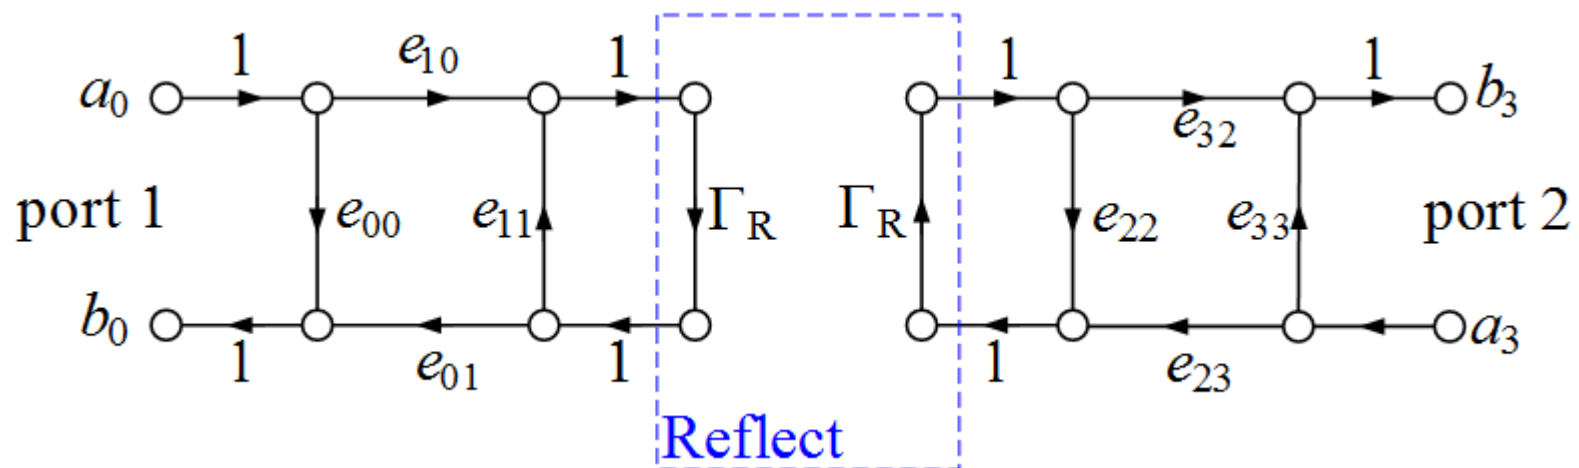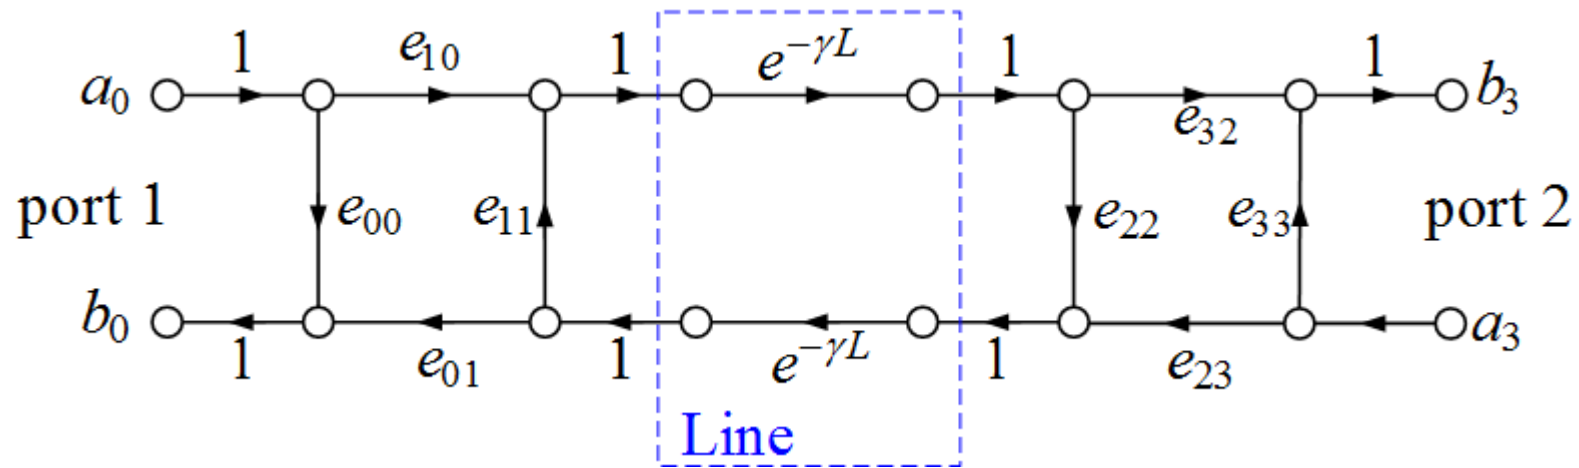


Scattering Transfer (or Cascade) Parameters

- when a network is a cascade of 2-port networks, often the scattering transfer (T -parameters) are used

$$\begin{bmatrix} V_1^- \\ V_1^+ \end{bmatrix} = \begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} \begin{bmatrix} V_2^+ \\ V_2^- \end{bmatrix} \quad \text{or} \quad \begin{bmatrix} b_1 \\ a_1 \end{bmatrix} = \begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} \begin{bmatrix} a_2 \\ b_2 \end{bmatrix}$$

- relation to S -parameters

$$\begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} = S_{21}^{-1} \begin{bmatrix} -\Delta_S & S_{11} \\ -S_{22} & 1 \end{bmatrix}, \quad \Delta_S = S_{11}S_{22} - S_{12}S_{21}$$

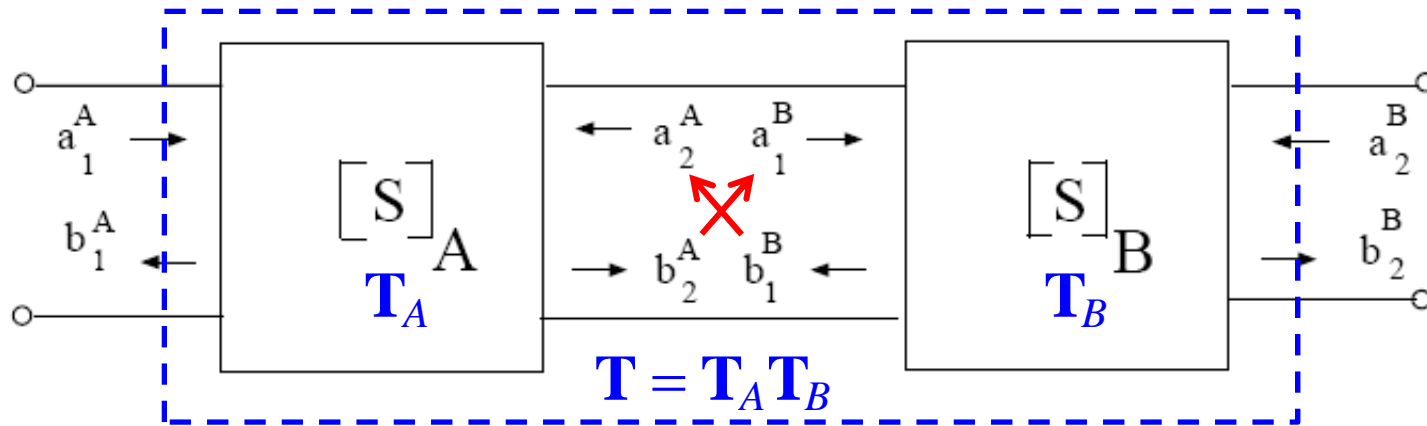

8-term Error Model in Terms of T -parameters for TRL Calibration

MEASURED

$$\mathbf{T}_M = \mathbf{T}_X \mathbf{T} \mathbf{T}_Y$$



ACTUAL

$$\mathbf{T} = \mathbf{T}_X^{-1} \mathbf{T}_M \mathbf{T}_Y^{-1}$$

error de-embedding

$$\mathbf{T} = \frac{1}{S_{21}} \begin{bmatrix} -\Delta_S & S_{11} \\ -S_{22} & 1 \end{bmatrix}$$

$$\mathbf{T}_M = \frac{1}{S_{21M}} \begin{bmatrix} -\Delta_M & S_{11M} \\ -S_{22M} & 1 \end{bmatrix}$$

$$\Delta_S = S_{11} S_{22} - S_{12} S_{21}$$

$$\Delta_M = S_{11M} S_{22M} - S_{12M} S_{21M}$$


$$\mathbf{T}_X = \frac{1}{e_{10}} \begin{bmatrix} -\Delta_X & e_{00} \\ -e_{11} & 1 \end{bmatrix}$$

$$\mathbf{T}_Y = \frac{1}{e_{32}} \begin{bmatrix} -\Delta_Y & e_{22} \\ -e_{33} & 1 \end{bmatrix}$$

$$\Delta_X = e_{00} e_{11} - e_{10} e_{01}$$

$$\Delta_Y = e_{22} e_{33} - e_{32} e_{23}$$

8-term Error Model for TRL Calibration

- the number of unknown error terms is actually 7 in the simple cascaded TRL network (see sl. 26) 

$$\mathbf{T}_M = \frac{1}{\begin{pmatrix} e_{10} & e_{32} \end{pmatrix}} \begin{bmatrix} -\Delta_X & e_{00} \\ -e_{11} & 1 \end{bmatrix} \mathbf{T} \begin{bmatrix} -\Delta_Y & e_{22} \\ -e_{33} & 1 \end{bmatrix} = \frac{1}{\begin{pmatrix} e_{10} & e_{32} \end{pmatrix}} \mathbf{A} \mathbf{T} \mathbf{B}$$

$$\Rightarrow \mathbf{T} = \begin{pmatrix} e_{10} & e_{32} \end{pmatrix} \mathbf{A}^{-1} \mathbf{T}_M \mathbf{B}^{-1}$$

- TRL measurement procedure

(1) $\mathbf{T}_M = \mathbf{T}_X \mathbf{T} \mathbf{T}_Y \rightarrow$ measured with DUT

(2) $\mathbf{T}_{M1} = \mathbf{T}_X \mathbf{T}_{C1} \mathbf{T}_Y \rightarrow$ measured with 2-port cal standard #1

(3) $\mathbf{T}_{M2} = \mathbf{T}_X \mathbf{T}_{C2} \mathbf{T}_Y \rightarrow$ measured with 2-port cal standard #2

(4) $\mathbf{T}_{M3} = \mathbf{T}_X \mathbf{T}_{C3} \mathbf{T}_Y \rightarrow$ measured with 2-port cal standard #3

8-term Error Model for TRL Calibration

- measuring the 3 two-port cal standards yields 12 independent equations while we have only 7 error terms
- thus 5 parameters of the 3 cal standards need not be known and can be determined from the calibration measurements
- which 5 parameters are chosen for which cal standards is important in order to reduce errors and avoid singular matrices
 - cal standard #1 \mathbf{T}_{C1} must be completely known – **thru**
 - cal standard #2 \mathbf{T}_{C2} can have 2 unknown transmission terms – **line**
 - cal standard #3 \mathbf{T}_{C3} can have 3 unknowns; if its reflection coefficients satisfy $S_{11} = S_{22}$ (it is best if $S_{11} = S_{22}$ are large!) then its 3 coefficients can be unknown – **reflect**

VNA Calibration – Summary

- errors are introduced when measuring a device due to parasitic coupling, leakage and imperfect connections
- these errors must be de-embedded from the overall measured S -parameters
- the de-embedding relies on the measurement of known or partially known cal standards – calibration measurements, which precede the measurement of the DUT
- 1-port calibration uses the 3-term error model and the OSM method
- 2-port calibration may use 12-term or 8-term error models
- the 12-term error model requires OSM at each port, isolation, and thru measurements
- the 8-term error model with the TRL technique is widely used for non-coaxial devices
- there exists also a 16-term error model, many other cal techniques