



## Signal Analyzer R&S FSIQ

Analysis in frequency, time and modulation domain in one box

- ◆ Spectrum analysis with ultrawide dynamic range for sophisticated ACPR measurements  
NF = 18 dB/TOI = +20 dBm  
(R&S FSIQ7)
- ◆ Integrated vector signal analyzer for universal analysis of digital and analog modulated signals BPSK to 16QAM, (G)MSK, AM, FM,  $\phi$ M
- ◆ Vector signal analyzer for WCDMA/3GPP
- ◆ Symbol rate up to 6.4 Msymbol/s
- ◆ High-speed synthesizer with 5 ms sweep time for FULL SPAN (R&S FSIQ 3/7)
- ◆ High display update rate up to 25 sweeps/s
- ◆ Large colour display with high resolution (24 cm/9.5" TFT)
- ◆ 75 dB ACPR for WCDMA
- ◆ 82 dB ACPR in alternate channel for WCDMA
- ◆ True RMS detector for precise and repeatable measurements of any signal type



**ROHDE & SCHWARZ**

# R&S FSIQ – the signal analyzer for the 3rd mobile radio generation

## Features in brief

- ◆ 3 models and frequency ranges  
R&S FSIQ3: 20 Hz to 3.5 GHz  
R&S FSIQ7: 20 Hz to 7 GHz  
R&S FSIQ26: 20 Hz to 26.5 GHz
- ◆ Resolution bandwidth 1 Hz to 10 MHz in 1/2/3/5 steps
- ◆ 5-pole resolution filters with high selectivity
- ◆ FFT filter with 1 Hz to 1 kHz RBW for fast measurements
- ◆ Displayed average noise floor –150 dBm typ. in 10 Hz bandwidth
- ◆ Third-order intercept +20 dBm with R&S FSIQ 7, +22 dBm with R&S FSIQ26
- ◆ Phase noise –150 dBc(1/Hz) at 5 MHz offset
- ◆ 75 dB ACPR dynamic range for WCDMA (4.096 MHz integration BW)
- ◆ Total level uncertainty <1 dB up to 2.2 GHz, <1.5 dB up to 7 GHz
- ◆ RMS detector for high-precision power measurements irrespective of waveform
- ◆ Fast spectrum analysis with 5 ms sweep time for full span (R&S FSIQ3/7)
- ◆ Fast time domain analysis with 1  $\mu$ s zero span sweep time
- ◆ Integrated broadband vector signal analyzer for all main mobile radio standards and modulation modes with versatile result display: I and Q signal, magnitude and phase, vector and constellation diagrams, spread sheets with numeric evaluation of modulation errors and demodulated bit sequence

## R&S FSIQ – the one-box solution in signal analysis

The R&S FSIQ provides in a single unit comprehensive and easy-to-use measurement functions in the

- ◆ frequency domain
- ◆ time domain
- ◆ modulation domain


### Frequency domain


In the frequency domain, the R&S FSIQ measures intermodulation and harmonics with great accuracy. The high 3rd-order intercept point in conjunction with the extremely low noise floor yields an intermodulation-free dynamic range of >110 dB and ensures reliable performance of even sophisticated measurements. The excellent dynamic range and the optimized phase noise values make the R&S FSIQ an ideal tool for ACPR (adjacent-channel power ratio) measurements in all mobile radio systems and in

particular for WCDMA. The maximum ACPR value for WCDMA in 4.096 MHz bandwidth is 75 dB and is already attained at –12 dBm input level.

The RMS detector available for all bandwidths up to 10 MHz is the ideal tool for precise power measurements whatever

the waveform. Channel power and adjacent-channel power can accurately be measured and displayed irrespective of any signal statistics. Measurement challenges such as repeatability of power measurement of modulated signals (e.g. CDMA) can thus be eliminated.

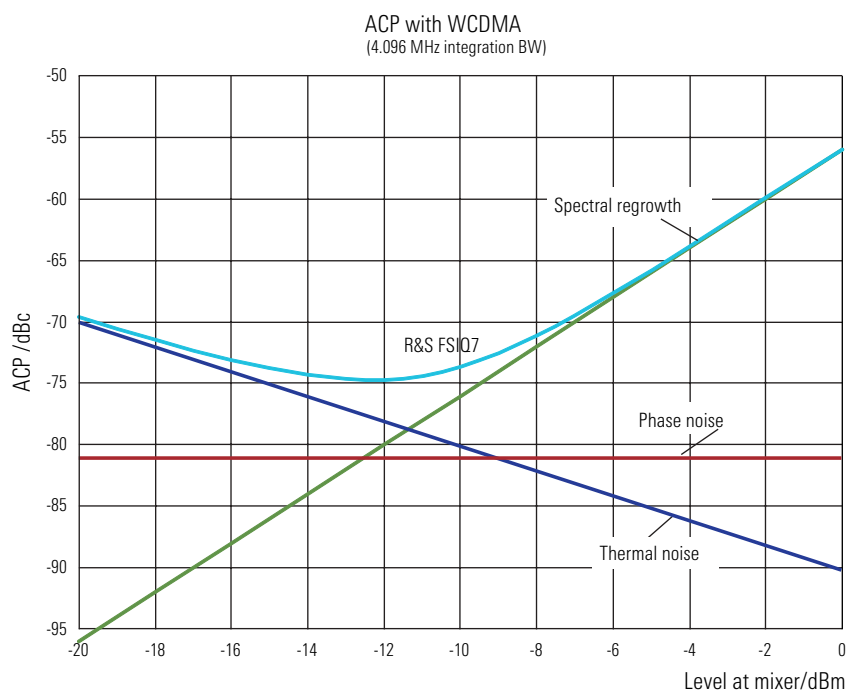

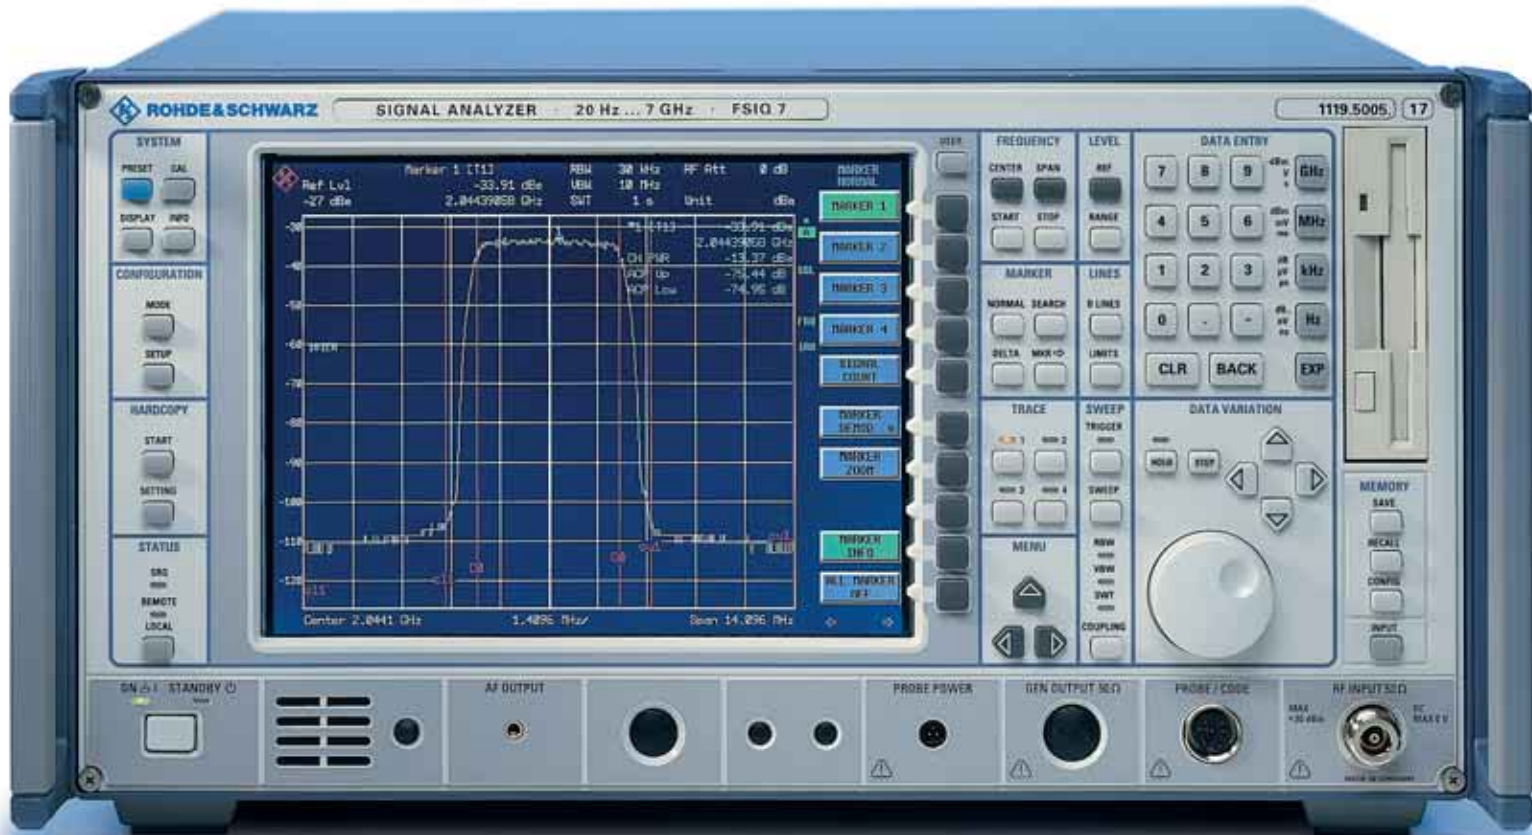

### Time domain

In the time domain, the R&S FSQ features all modern capabilities of burst analysis in TDMA systems; gate functions, trigger delay and integrated RF trigger in conjunction with a short sweep time of 1  $\mu$ s ensure precise measurement of the timing characteristics of all main mobile radio systems.

Thanks to the wide range of bandwidths available up to 10 MHz the effect of the measuring instrument becomes negligible, in particular in the case of measurements on broadband systems.

Various marker functions in conjunction with editable gated sweeps allow RMS, average and peak measurements to be carried out over any selectable time.

### Modulation domain



In the modulation domain, the integrated vector signal analyzer provides diverse measurements on signals with digital or analog modulation. The variety of settings that can be called simply at a key-stroke covers 18 mobile radio standards from GSM, NADC, IS95 through to WCDMA. These convenient presets make it superfluous for the user to spend valuable time in looking up specifications and go towards enhancing the measurement reliability.

Display of the results caters to practically each and every need: in addition to vector and constellation diagrams, I/Q signal and eye/trellis diagrams, tables with modulation errors including the demodulated bit sequence are particularly useful. EVM (error vector magnitude), phase and frequency error, waveform factor and I/Q offset are output as numeric values, with RMS and peak value being shown separately.

Besides the mobile radio standards, the R&S FSQ can also be used as a general-purpose measurement demodulator for non-standard modulation methods. The list of the 13 digital demodulators available ranges from BPSK, QPSK and (G)MSK through to 16QAM. With a symbol rate selectable up to 6.4 Msymbol/s and cosine and root-cosine filters adjustable in 0.01 step width, configuration of customized systems is no problem.

The analog demodulators using digital technique throughout feature longterm and temperature-independent measurements, e.g. of transmitter transients, or convenient measurement of incidental phase modulation (AM to  $\phi$ M conversion) e.g. on travelling wave tubes.

# R&S FSIQ – the signal analyzer for the 3rd mobile radio generation

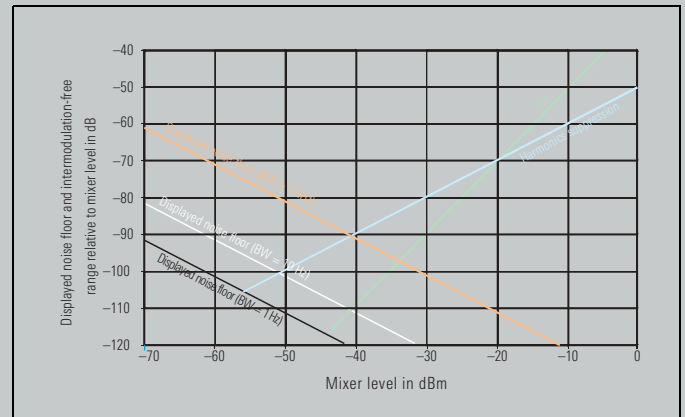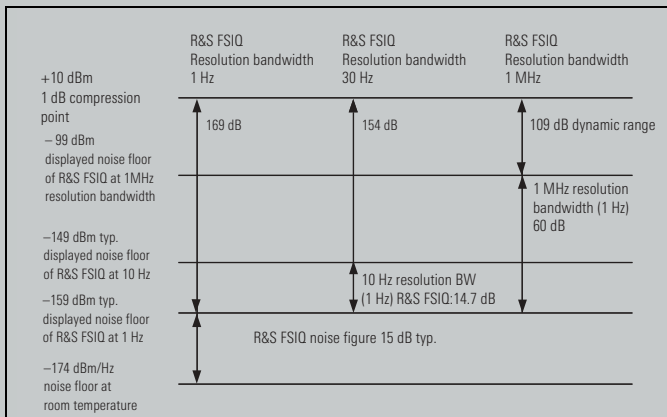

*Dynamic range, noise, and 1 dB compression point of Signal Analyzer R&S FSIQ*

*Dynamic range, noise, 3rd-order intercept point*

## High measurement speed for use in development and production

- ◆ The minimum sweep time for FULL SPAN is 5 ms (R&S FSIQ 3/7). The sweep is synthesizer-controlled for all frequency settings, thus providing high frequency accuracy of the displayed spectra
- ◆ The shortest sweep time in ZERO SPAN mode is 100 ns/div which is ideal for high-resolution time measurements on burst edges
- ◆ Up to 25 sweeps/s is an optimal prerequisite for applications in production or fast alignments
- ◆ High throughput on GPIB interface saves time and costs in production

## Versatile test routines – convenient measurements

The R&S FSIQ excels in its wide variety of sophisticated test routines and evaluation tools which considerably enhance measurement reliability and speed:


- ◆ Automatic measurement of channel power, adjacent-channel power ratio (ACPR) and occupied bandwidth with free choice of channel bandwidths and detector to be used. For the ACPR measurement the availability of an RMS detector is of vital importance especially with modern WCDMA systems
- ◆ Marker functions for direct measurement of:
  - phase noise
  - C/N, C/N<sub>0</sub>
  - PEAK/NEXT PEAK (LEFT/RIGHT)/MIN/NEXT MIN, etc
  - bandwidth and shape factor

- ◆ Frequency counter with selectable resolution
- ◆ Up to four simultaneously active traces
- ◆ Split screen with independent measurement windows: time domain analysis/frequency analysis, frequency analysis/modulation analysis, etc
- ◆ Level, frequency and threshold lines as well as user-definable limit lines with pass/fail check
- ◆ Comprehensive documentation of results with hardcopy output on a wide variety of printers or as WMF or BMP files
- ◆ High-contrast 24 cm (9.5") TFT colour display with VGA resolution and user-friendly display of all important instrument settings for reliable and strain-free work




# Applications


## Mobile radio – digital and analog

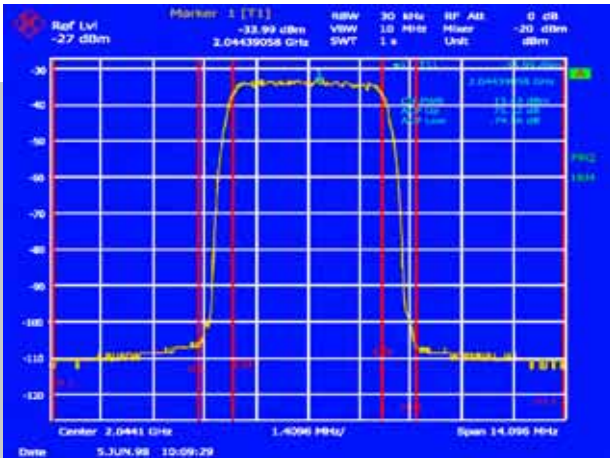


1

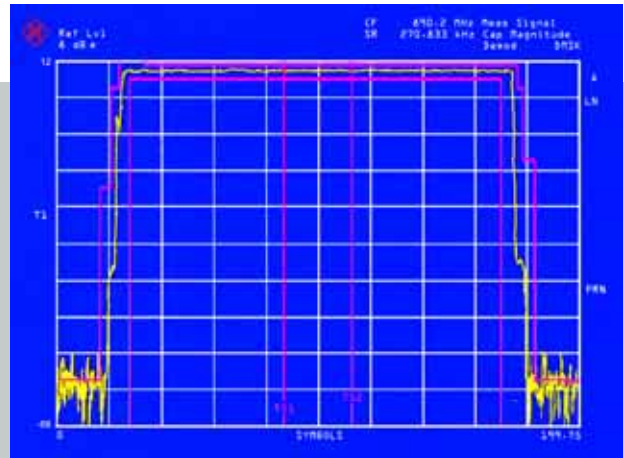

3

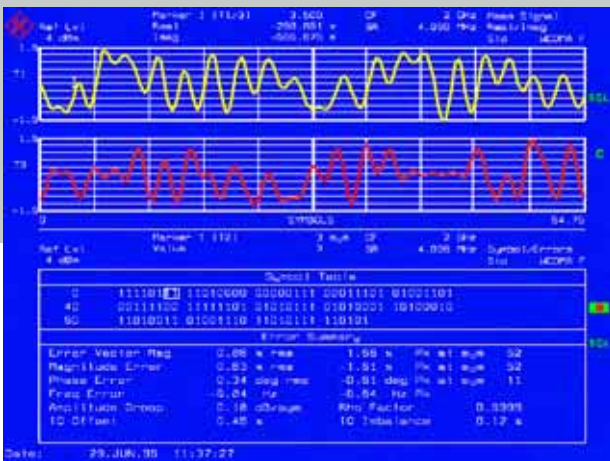

2

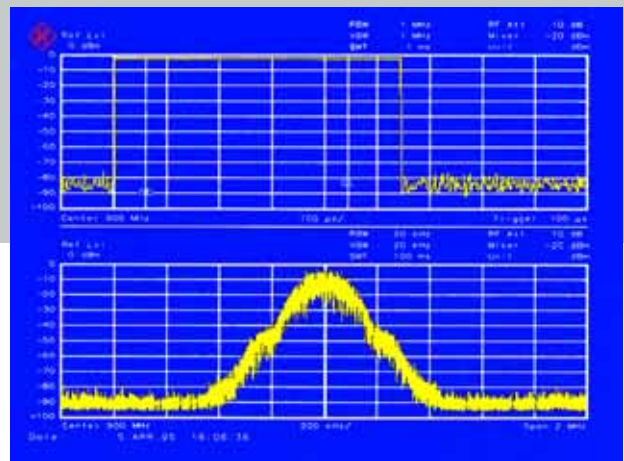

4

### WCDMA (1, 2)

Modern broadband communication systems place extremely stringent requirements on the spectral purity of all components. Phase noise, intermodulation and spurious suppression all play a role in the measurement of ACPR (adjacent-channel power ratio). The most stringent requirements are normally placed on the component characteristics. The R&S FSIQ is the ideal choice for this measurement; without any additional facility such as preselection it is able to attain an ACPR value of 75 dB at the optimum mixer level and power integration over 4.096 MHz (1). This excellent value is already attained at a mixer level of -12 dBm which means an additional benefit in component testing.

The integrated vector signal analyzer provides high-accuracy offline demodulation of the WCDMA signal so that signal distortion caused by the device under test can quickly and reliably be measured. The I and Q signal characteristics can precisely be measured with the aid of the marker functions (2 above). The numeric error table (2 below) shows all main modulation errors such as EVM or I/Q offset, with the demodulated bit sequence being displayed in addition. Coupled marker functions allow the I/Q signals to be allocated to the demodulated dibits (2).

### Power ramp measurement (3)

To perform power ramp measurements (power time template) on TDMA systems such as GSM or NADC in line with standards, reference must be made to syn-

chronization sequences in order to establish a precise time reference (3). The R&S FSIQ supports this task with a wide variety of already programmed as well as user-editable bit sequences.

### GATED SWEEP (4)

The GATED SWEEP function in the frequency domain is indispensable for the analysis of TDMA systems. The modulation spectrum (4) of burst signals can be measured without any interference being caused by switching the RF carrier on and off. Imbalance of the modulator under test or spurious emissions can quickly and reliably be determined.




5


**5 GAP SWEEP: simultaneous measurement of pulse rise and fall time with high time resolution**

**6 Measurement of transmitter transients with an FM squelch of -30 dB**

**7 Measurement of incidental frequency/phase modulation or AM/φM conversion with simultaneous display of AM and FM component**

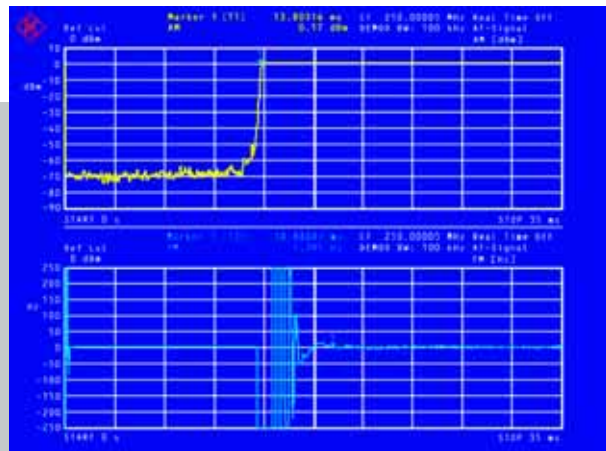

6

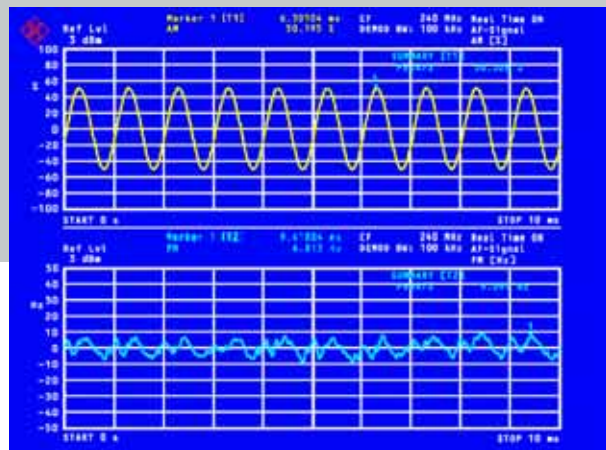

7

### GAP SWEEP (5): simultaneous measurement of pulse rise and fall time

The fast sweep time of 100 ns/div as well as the GAP SWEEP and pretrigger functions of the Signal Analyzer R&S FSIQ are the prerequisites for simultaneous measurement of the rise and fall time of an RF pulse with high time resolution. The center of the pulse, which is of no interest, is blanked. Even with a resolution bandwidth of 1 MHz the R&S FSIQ features a dynamic range of over 80 dB thanks to the high 1 dB compression point of +10 dBm.

### Transmitter transients (6)

Simultaneous measurement of transmitter frequency and level transients is effectively supported by DC-coupled demodulators and selectable high resolution of the vertical axes (in this example 100 Hz/div). The SPLIT SCREEN mode detects level and deviation in separate windows with independently selectable parameters. Video trigger, trigger delay, pretrigger and squelch level can be adjusted for noise suppression in the absence of a signal level.

### Measurement of incidental phase modulation, AM/φM conversion (7)

In many transmission systems, components such as amplifiers or modulators are operated close to saturation to improve their efficiency. The AM/φM conversion thus occurring causes errors in particular in digital phase-modulated systems.

The low incidental inherent modulation residues allow the AM/φM conversion to be measured up to high frequencies (e.g. 26.5 GHz with the R&S FSIQ26). The R&S FSIQ simultaneously displays the AM component (7 above) and the resulting FM or φM component (7 below). An AM signal with very low incidental FM/φM can be generated by means of I/Q modulation of the Tracking Generators R&S FSE-B9/-B11.

| Designation                                    | Type   | Use  | Functions   |
|--|--|--|---|
| Noise Measurement <sup>1)</sup> software       | R&S FS-K3  | Noise figure measurements  | Measurement of noise figure and temperature to Y-factor method<br>Measurements on frequency-converting DUTs<br>Frequency range same as basic unit, starting from 100 kHz<br>Editor for ENR tables<br>Runs on the internal controller (option) or on an external PC under Windows98/NT |
| Phase Noise Measurement Software <sup>1)</sup> | R&S FS-K4  | Phase noise measurements   | Easy-to-use phase noise measurements<br>Measurement of residual FM and $\phi$ M<br>Logarithmic plot over 8 decades<br>Runs on the internal controller (option) or on an external PC under Windows98/NT  |
| Application Firmware <sup>1)</sup>             | R&S FSE-K10, Mobile R&S FSE-K11, BTS   | Mobile radio transmitter measurements to GSM standards 11.10 and 11.20 | Power ramp and power template<br>Spectrum due to modulation and due to transients<br>Spurious emissions<br>Mean carrier power measurement<br>Phase/frequency error (with option R&S FSE-B7)   |
| Application Firmware <sup>1)2)</sup>           | R&S FSE-K20, Mobile R&S FSE-K21, BTS   | EDGE capability added to Application Firmware R&S FSE-K10/-K11         | Modulation accuracy measurement including <ul style="list-style-type: none"> <li>- EVM measurement using weighting filter to ETSI</li> <li>- 95:th percentile measurement</li> <li>- Measurement of origin offset suppression</li> </ul> Limit lines for EDGE according to ETSI 05.05 |
| Application Firmware <sup>1)3)</sup>           | R&S FSE-K30, Mobile R&S FSE-K31, BTS   | 850 MHz extension for R&S FSE-K10/-K11 and R&S FSE-K20/-K21            | Extension of frequency range for the GSM/EDGE 850 MHz band  |
| Application Firmware <sup>1)</sup>             | FSIQ-K71 <sup>4)</sup> , BTS   | cdmaOne BTS code domain power measurements                             | Measurement of <ul style="list-style-type: none"> <li>- code domain power</li> <li>- timing/phase offset</li> <li>- pilot channel power</li> </ul>  |
| Application Firmware <sup>1)</sup>             | FSIQ-K72 <sup>4)</sup> , BTS FSIQ-K73 <sup>4)</sup> , Mobile (User Equipment UE) | 3GPP/FDD transmitter measurements according to TS 25.141 and TS 34.121 | Measurement of <ul style="list-style-type: none"> <li>- code domain power</li> <li>- EVM</li> <li>- peak code domain power</li> <li>- OBW</li> <li>- ACLR</li> <li>- spectrum emission mask</li> <li>- CCDF</li> </ul>  |

1) See separate data sheets.

2) R&S FSE-K10/-K11 required.

3) R&S FSE-K10/-K11 required, for EDGE R&S FSE-K20/-K21 is additionally necessary.

4) R&S FSIQ-B70 required.

## Quality management at Rohde & Schwarz

Lasting customer satisfaction is our primary objective. The quality management system of Rohde & Schwarz meets the requirements of ISO 9001 and encompasses virtually all fields of activity of the company.

Certified Quality System  
**ISO 9001**  
DQS REG. NO 1954

Certified Environmental System  
**ISO 14001**  
REG. NO 1954




Rear view of R&S FSIQ

## Specifications

|   | R&S FSIQ3  | R&S FSIQ7            | R&S FSIQ26            |
|---|--|----------------------|-----------------------|
| Specifications apply under the following conditions:<br>30 minutes warmup time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and total calibration performed.<br>Data without tolerances: typical values only. Data designated "nominal" apply to design parameters and are not tested. |  |                      |                       |
| <b>Frequency</b>  |  |                      |                       |
| Frequency range   | 20 Hz to 3.5 GHz   | 20 Hz to 7 GHz       | 20 Hz to 26.5 GHz     |
| Frequency resolution  | 0.01 Hz  |                      |                       |
| <b>Reference frequency, internal nominal</b>  |  |                      |                       |
| Aging per day <sup>1)</sup>   | $1 \times 10^{-9}$   |                      |                       |
| Aging per year <sup>1)</sup>  | $2 \times 10^{-7}$   |                      |                       |
| Temperature drift (0°C to +50°C)  | $8 \times 10^{-8}$   |                      |                       |
| Total error (per year)  | $2.5 \times 10^{-7}$   |                      |                       |
| External reference frequency  | 10 MHz or n x 1 MHz, n = 1 to 16   |                      |                       |
| Frequency display   | with marker or frequency counter   |                      |                       |
| Resolution  | 0.1 Hz to 10 kHz (dependent on span)   |                      |                       |
| Error limit (sweep time >3 x auto sweep time)   | $\pm(\text{marker frequency} \times \text{reference error} + 0.5\% \times \text{span} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} \text{ (last digit)})$ |                      |                       |
| Frequency counter resolution  | 0.1 Hz to 10 kHz (selectable)  |                      |                       |
| Count accuracy (S/N >25 dB)   | $\pm(\text{frequency} \times \text{reference error} + \frac{1}{2} \text{ (last digit)})$   |                      |                       |
| Display range for frequency axis  | 0 Hz, 10 Hz to 3.5 GHz   | 0 Hz, 10 Hz to 7 GHz | 0 Hz, 10 Hz to 27 GHz |
| Resolution/error limit of display range   | 0.1 Hz/1%  |                      |                       |
| <b>Display range with digital demodulation</b>  |  |                      |                       |
| Number of displayed symbols   |  |                      |                       |
| Symbol rate $\leq 1$ MHz  | max. 1600 symbols (4 points per symbol)  |                      |                       |
| Symbol rate > 1 MHz to <3.2 MHz   | $\frac{1}{2} \times \text{symbol rate} / \text{MHz} \times 1000$ symbols in steps of 100 symbols   |                      |                       |
| Symbol rate $\geq 3.2$ MHz  | max. 1600 symbols (4 points per symbol)  |                      |                       |
| Display range with analog demodulation  | $3500 / (\text{demodulation bandwidth} / \text{Hz})$ s   |                      |                       |
| <b>Spectral purity (dBc(1Hz))</b> SSB phase noise, $f \leq 500$ MHz, for carrier offset >1 MHz see diagram below  |  |                      |                       |
| Carrier offset 100 Hz   | < -87  | < -81                | < -81                 |
| 1 kHz   | < -107   | < -100               | < -100                |
| 10 kHz  | < -120   | < -114               | < -114                |
| 100 kHz <sup>2)</sup>   | < -119   | < -113               | < -113                |
| 1 MHz <sup>2)</sup>   | < -138   | < -132               | < -132                |
| <b>Sweep</b>  |  |                      |                       |
| Display range 0 Hz  | 1 ms to 2500 s in 5% steps   |                      |                       |
| Display range $\geq 10$ Hz  | 5 ms to 16000 s in steps $\leq 10\%$   |                      |                       |
| Error limit   | <1%  |                      |                       |
| Sampling rate   | 50 ns (20 MHz A/D converter)   |                      |                       |
| Number of pixels (x axis)   | 500  |                      |                       |
| Time measurement  | with marker and cursor lines (resolution 50 ns)  |                      |                       |

**SSB phase noise of the R&S FSIQ models**

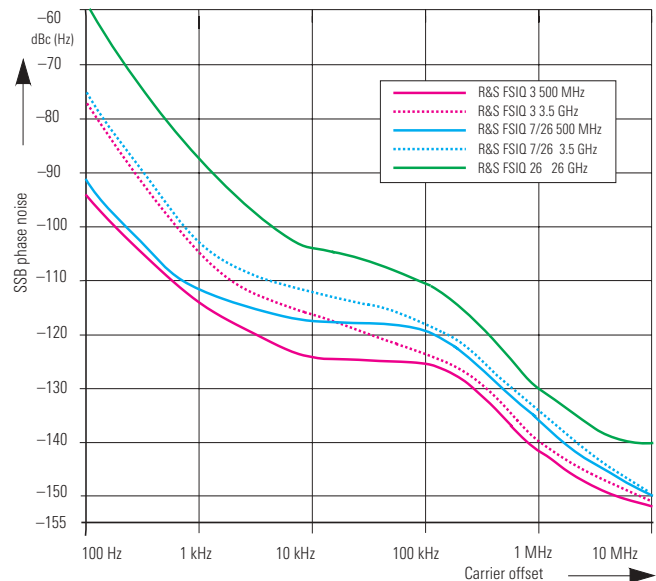



|   | R&S FSIQ3  | R&S FSIQ7  | R&S FSIQ26  |
|---|--|--|---|
| <b>Resolution bandwidths with spectrum display</b>  |  |  |   |
| <b>Analog filters</b>   |  |  |   |
| 3 dB bandwidths   | 1 Hz to 10 MHz in 1/2/3/5 steps  |  |   |
| Bandwidth error limit   |  |  |   |
| ≤3 MHz  | <10%   |  |   |
| 5 MHz   | <15%   |  |   |
| 10 MHz  | +25%, -10%   |  |   |
| Shape factor 60 dB:3 dB   |  |  |   |
| <1 kHz  | <6   |  |   |
| 1 kHz to 2 MHz  | <12  |  |   |
| >2 MHz  | <7   |  |   |
| Video bandwidths  | 1 Hz to 10 MHz in 1/2/3/5 steps  |  |   |
| <b>FFT filters</b>  |  |  |   |
| 3 dB bandwidths   | 1 Hz to 1 kHz in 1/2/3/5 steps   |  |   |
| Bandwidth error limit   | 2%, nominal  |  |   |
| Shape factor 60 dB:3 dB   | 2.5 nominal  |  |   |
| Display range for frequency axis  | min. 25 x RBW, max. 100000 x RBW or 2 MHz (whichever is lower)                   |  |   |
| Additional level error limit (ref. to RBW = 5 kHz)  | <1 dB  |  |   |
| Max. display range  | 100 dB   |  |   |
| Inherent spurious response  | <-100 dBm  |  |   |
| <b>Level</b>  |  |  |   |
| Display range   | displayed noise floor to 30 dBm  |  |   |
| <b>Maximum input level</b>  |  |  |   |
| RF attenuation 0 dB   |  |  |   |
| DC voltage  | 0 V  |  |   |
| CW RF power   | 20 dBm (=100 mW)   |  |   |
| Pulse spectral density  | 97 dB $\mu$ V/MHz  |  |   |
| RF attenuation ≥10 dB   |  |  |   |
| DC voltage  | 0 V  |  |   |
| CW RF power   | 30 dBm (= 1 W)   |  |   |
| Max. pulse voltage  | 150 V  |  |   |
| Max. pulse energy (10 ms)   | 1 mWs  | 0.5 mWs  |   |
| 1 dB compression of input mixer (0 dB RF attenuation)   | +10 dBm nominal  |  |   |
| Intermodulation   |  |  |   |
| 3rd-order Intercept (TOI)<br>Intermodulation-free dynamic range, level 2 x -30 dBm,<br>$\Delta f > 5 \times$ RBW or 10 kHz, whichever is greater                  | >64 dBc for f >100 MHz<br>(TOI >12 dBm, 18 dBm typ.)                             | >70 dBc for f >150 MHz<br>(TOI >15 dBm, 20 dBm typ.)                         | >74 dBc for f >150 MHz<br>(TOI >17 dBm, 22 dBm typ.)<br>>60 dBc for f >7 GHz<br>(TOI >10 dBm) |
| Second harmonic intercept point (SHI)   | >25 dBm, >40 dBm typ.<br>for f <50 MHz<br>>45 dBm, >50 dBm typ.<br>for f >50 MHz | >25 dBm, >35 dBm typ. for f <150 MHz<br>>40 dBm, >45 dBm typ. for f >150 MHz |   |
| <b>Displayed average noise level (DANL) (0 dB RF attenuation, RBW 10 Hz, VBW 1 Hz, 20 averages, trace average, span 0 Hz, termination 50 <math>\Omega</math>)</b> |  |  |   |
| Frequency   | 20 Hz  | <-80 dBm   | <-74 dBm  |
|   | 1 kHz  | <-110 dBm  | <-104 dBm   |
|   | 10 kHz   | <-125 dBm  | <-119 dBm   |
|   | 100 kHz  | <-135 dBm  | <-129 dBm   |
|   | 1 MHz  | <-145 dBm, -150 dBm typ.   | <-142 dBm, -145 dBm typ.  |
|   | 10 MHz to 6 GHz  | <-145 dBm, -150 dBm typ.   | <-142 dBm, -147 dBm typ.   <-138 dBm, -140 dBm typ.   |
|   | 6 GHz to 7 GHz   | -  | <-139 dBm   <-135 dBm, -138 dBm typ.  |
|   | 7 GHz to 18 GHz  | -  | -   <-138 dBm, -140 dBm typ.  |
|   | 18 GHz to 26.5 GHz   | -  | -   <-135 dBm, -138 dBm typ.  |
| <b>Maximum dynamic range</b><br>1 dB compression to DANL (RBW 1Hz)  | 170 dB   | 165 dB   |   |
| <b>Immunity to interference</b>   |  |  |   |
| Image rejection   | >80 dB, >90 dB typ.  |  |   |
| Intermediate frequency  | >100 dB  | >75 dB   |   |

|  | R&S FSIQ3  | R&S FSIQ7   | R&S FSIQ26             |
|--|--|---|------------------------|
| <b>Spurious response (f &gt; 1 MHz, without input signal, 0 dB attenuation)</b>  |  |   |                        |
| Span < 30 MHz  |  | < -110 dBm  |                        |
| Span ≥ 30 MHz  |  | < -100 dBm  |                        |
| f <sub>in</sub> = 25.175 MHz, 25.060 MHz   |  | < -100 dBm  |                        |
| f <sub>in</sub> = 60 MHz, 5.7172 GHz   | –  |   | < -100 dBm             |
| f <sub>in</sub> = 14.1894 GHz, 15.6722 GHz (span > 10 MHz)   |  | –   | < -90 dBm              |
| Other interfering signals (mixer level < 10 dBm)   | < -80 dB   |   | < -75 dB               |
| <b>Level display (spectrum mode)</b>   |  |   |                        |
| Result display   | 500 x 400 pixel (one diagram), max. 2 diagrams with independent settings   |   |                        |
| Log level axis   | 10 dB to 200 dB, in steps of 10 dB   |   |                        |
| Linear level axis  | 10% of reference level per level division, 10 divisions or logarithmic scaling   |   |                        |
| Trace  | max. 4 per diagram (with two diagrams on screen, max. 2 per diagram)   |   |                        |
| Trace detector   | Max Peak, Min Peak, Auto Peak (Normal), Sample, RMS, Average   |   |                        |
| Trace functions  | Clear/Write, Max Hold, Min Hold, Average   |   |                        |
| <b>Setting range of reference level</b>  |  |   |                        |
| Logarithmic level display  | -130 dBm to 30 dBm, in steps of 0.1 dB   |   |                        |
| Linear level display   | 7.0 nV to 7.07 V, in steps of 1%   |   |                        |
| Units of level axis  | dBm, dBμV, dBmV, dBpW (log level display); V, A, W, dBμA (linear level display)  |   |                        |
| <b>Level measurement error limit (-40 dBm, RF attenuation 20 dB, ref. level -15 dBm, RBW 5 kHz)</b>  |  | The values are valid for bandwidths from 10 Hz to 30 kHz and 100 kHz to 10 MHz        |                        |
| Absolute error limit at 120 MHz  |  | < 0.3 dB  |                        |
| <b>Frequency response (10 dB RF atten.)</b>  |  |   |                        |
| < 2.2 GHz  |  | < 0.5 dB  |                        |
| 2.2 GHz to 3.5/7 GHz   |  | < 1 dB  |                        |
| 7 GHz to 18 GHz  |  | –   | < 2 dB <sup>3)</sup>   |
| 18 GHz to 26.5 GHz   |  | –   | < 2.5 dB <sup>3)</sup> |
| Attenuator switching error limit   |  | < 0.3 dB  |                        |
| Error of reference level setting   |  | < 0.2 dB, typ. 0.1 dB   |                        |
| <b>Display nonlinearity</b>  |  |   |                        |
| <b>Log level display</b>   |  |   |                        |
| 0 dB to -70 dB   |  | < 0.2 dB (RBW ≤ 30 kHz), < 0.3 dB (RBW ≥ 100 kHz)                                     |                        |
| -70 dB to -95 dB   |  | < 1 dB (RBW ≤ 30 kHz)   |                        |
| <b>Linear level display</b>  |  |   |                        |
| 5% of reference level  |  |   |                        |
| <b>Bandwidth switching error limit</b>   |  |   |                        |
| 1 Hz to 30 kHz/100 kHz to 500 kHz  |  | < 0.2 dB  |                        |
| 1 MHz to 10 MHz  |  | < 0.3 dB  |                        |
| <b>Total measurement error limit</b>   |  |   |                        |
| (Temperature range 20 °C to 30 °C, RBW 5 kHz to 30 kHz/300 kHz/1 MHz, stop frequency ≤ 2.2 GHz, signal level 0 dB to 70 dB below reference level, sweep time ≥ 3x auto sweep time) |  |   |                        |
| 10 MHz to 2.2 GHz  |  | ≤ 0.5 dB (with 10 dB RF attenuation), ≤ 0.6 (with 20 dB, 30 dB, 40 dB RF attenuation) |                        |
| (0 dB to -50 dB, span/RBW < 100) 95% confidence level  |  |   |                        |
| < 2.2 GHz  |  | < 1 dB  |                        |
| 2.2 GHz to 3.5/7 GHz   |  | < 1.5 dB  |                        |
| 7 GHz to 18 GHz  |  | –   | < 2.5 dB <sup>3)</sup> |
| 18 GHz to 26.5 GHz   |  | –   | < 3 dB <sup>3)</sup>   |
| <b>Measurement of digital modulation signals</b>   |  |   |                        |
| Modulation formats   | BPSK, QPSK, offset QPSK, DQPSK, π/4-DQPSK, 8PSK, D8PSK, 3π/8-8PSK, 16QAM<br>MSK, GMSK, 2FSK, 2GFSK, 4FSK, 4GFSK                            |   |                        |
| Selectable standards   | WCDMA, 3GPP, IS95 CDMA Forward/Reverse, GSM, EDGE, NADC, TETRA, PDC, PHS,<br>CDPD, DECT, PWT, APC025, CT2, ERMES, FLEX, MODACOM, TFTS      |   |                        |
| <b>Filtering</b>   |  |   |                        |
| Setting range α/B x T  | raised cosine, square root raised cosine, Gaussian<br>0.14 to 1 in steps of 0.01 (PSK > 1 MHz)<br>0.14 to 1 in steps of 0.01 (FSK > 2 MHz) |   |                        |

|   | R&S FSIQ3  | R&S FSIQ7             | R&S FSIQ26 |
|---|--|-----------------------|------------|
| Filters to specific standards   |  |                       |            |
| FLEX  | Bessel B x T = 1.22 and 2.44   |                       |            |
| ERMES   | Bessel B x T = 1.25  |                       |            |
| CDMA (IS95)   | forward and reverse channel  |                       |            |
| APCO25 FM   |  |                       |            |
| EDGE  | 90 kHz root raised cosine (specific to EDGE standard)  |                       |            |
| <b>Measurements (except FSK)</b>  |  |                       |            |
|   | I and Q signals (filtered, synchronized to frequency and symbol clock)<br>I and Q reference signals (calculated from demodulated bits)<br>I and Q error (magnitude and phase), error vector<br>bit stream/modulation error (symbols demodulated at ideal decision points and table of all modulation errors) |                       |            |
| <b>Measurements with FSK</b>  |  |                       |            |
|   | frequency demodulated signals (filtered, synchronized to symbol clock)<br>FSK reference signal (calculated from demodulated data)<br>FSK error signal<br>data/bit stream/modulation error (symbols demodulated at ideal decision points and table of all modulation errors)                                  |                       |            |
| <b>Display modes (except FSK)</b>   |  |                       |            |
|   | constellation diagram, vector diagram<br>in-phase and/or quadrature signal<br>magnitude and phase (level)<br>eye diagram, trellis diagram<br>error vector magnitude (EVM) in %, magnitude error, phase/frequency error,<br>in-phase and quadrature error signals   |                       |            |
| Numerical error limit read-out (*rms and peak value)  | error vector magnitude*, magnitude error*, phase error*, frequency error, I/Q offset, I/Q imbalance, amplitude droop, ρ factor   |                       |            |
| <b>Display modes with FSK</b>   |  |                       |            |
|   | magnitude (level), frequency deviation, eye diagram (frequency signal), frequency deviation error, magnitude error   |                       |            |
| Numerical error limit read-out (*rms and peak value)  | deviation error*, magnitude error, FSK frequency deviation, frequency error, FSK reference deviation   |                       |            |
| <b>Symbol rate</b>  | 320 Hz to 6.4 MHz (symbol rate x (1+ α)) < 8 MHz   |                       |            |
| Samples/symbol <sup>4)</sup>  |  |                       |            |
| Symbol rate ≤200 kHz  | 1, 2, 4, 8, 16   |                       |            |
| 200 kHz <symbol rate ≤400 kHz   | 1, 2, 4, 8   |                       |            |
| Symbol rate >400 kHz  | 1, 2, 4  |                       |            |
| Synchronization   | internal to symbol clock and frequency/phase   |                       |            |
| Memory depth  |  |                       |            |
| IS95 CDMA Forward /Reverse, DECT  | 600 symbols  |                       |            |
| WCDMA, 3GPP, GSM, EDGE, PDC, NADC, TETS, CT2, ERMES, MODACOM, Flex, APCO25, CDPD                    | 1600 symbols   |                       |            |
| <b>Level measurements with digital demodulation</b>   |  |                       |            |
| Peak power range  | -60 dBm to +30 dBm   |                       |            |
| <b>Absolute level error limit</b>   |  |                       |            |
| Mean power (0 dB to 10 dB below reference level)  |  |                       |            |
| f ≤2.2 GHz  | <1 dB  |                       |            |
| 2.2 GHz to 7 GHz  | <1.5 dB  |                       |            |
| 7 GHz to 18 GHz   | -  | <2.5 dB <sup>3)</sup> |            |
| 18 GHz to 26.5 GHz  | -  | <3 dB <sup>3)</sup>   |            |
| <b>Relative level error limit</b>   |  |                       |            |
| Mean power (0 dB to 10 dB below reference level)  |  |                       |            |
| 10 dB to 50 dB below reference level  | (0.0325/dB – 0.125) dB   |                       |            |
| <b>Dynamic range for burst measurement</b>  |  |                       |            |
| (mean power, ref. level ≥ -10 dBm, peak power = ref. level +1 dB, low noise mode, points/symbol <4) | WCDMA 60 dB<br>GSM 74 dB<br>NADC 78 dB<br>TETRA 79 dB  |                       |            |
| <b>Time reference (nominal)</b>   |  |                       |            |
| without clock synchronization   |  |                       |            |
| MSK/GMSK modulation   | <1/(2 x symbol rate x points/symbol)   |                       |            |
| PSK/QAM/FSK modulation  | <1/(2 x symbol rate)   |                       |            |

|   | R&S FSIQ3   | R&S FSIQ7 | R&S FSIQ26  |
|---|---|-----------|---|
| with clock synchronization  | <0.001 x 1/(symbol rate)  |           |   |
| <b>Residual error limit in modulation measurements</b>  | (data valid for level from reference level to reference level – 6 dB, S/N >60 dB, $\alpha$ /BT = 0.3 to 0.7, number of demodulated symbols >100, averaging $\geq 10$ , analog bandwidth >10 x symbol rate, input frequency >15 x symbol rate, local suppression at 0 Hz input frequency)                          |           |   |
| <b>General modulation modes (except FSK)</b>  |   |           |   |
| Error vector magnitude (EVM) and magnitude error (f <1 GHz) <sup>4)</sup>   |   |           |   |
| Symbol rate $\leq 30$ kHz   | 0.5% rms  |           | 0.7% rms  |
| Symbol rate 30 kHz to 300 kHz   | 1% rms  |           | 1.4% rms  |
| Symbol rate 300 kHz to 1 MHz  | 2% rms  |           | 2.8% rms  |
| Symbol rate 1 MHz to 4.2 MHz  | 2% rms  |           | 2% rms  |
| Symbol rate 4.2 MHz to 6.4 MHz  | 2.4% rms  |           | 2.4% rms  |
| Phase error (f <1 GHz) <sup>5)</sup>  |   |           |   |
| Symbol rate $\leq 30$ kHz   | 0.3° rms  |           | 0.4° rms  |
| Symbol rate 30 kHz to 300 kHz   | 0.5° rms  |           | 0.7° rms  |
| Symbol rate 300 kHz to 1 MHz  | 1.5° rms  |           | 2° rms  |
| Symbol rate 1 MHz to 4.2 MHz  | 1.5° rms  |           | 2° rms  |
| Symbol rate 4.2 MHz to 6.4 MHz  | 2° rms  |           | 2.8° rms  |
| Frequency error   | $\pm$ (symbol rate $\times 5 \times 10^{-6}$ + 0.1 Hz + reference error $\times$ carrier frequency)   |           |   |
| I/Q offset error  | 0.2% (–54 dB)   |           |   |
| Errors with modulation standards  |   |           |   |
| GSM, DCS1800, PCS1900   | phase error $\leq 0.5^\circ$ rms, <1.5° peak typ.   |           |   |
| NADC, CDPD  | EVM $\leq 0.5\%$ rms, <1.5% peak typ.   |           |   |
| TETRA, PDC, PHS   | EVM $\leq 0.7\%$ rms, <2% peak typ.   |           |   |
| PWT   | EVM $\leq 1\%$ rms, <3% peak typ.   |           |   |
| IS95 CDMA, forward/reverse channel  | $\rho$ factor $\geq 0.9995$   |           |   |
| WCDMA   | EVM $\leq 1.8\%$ rms, <5% peak typ.   |           |   |
| <b>General FSK modulation modes (input level <math>\geq 10</math> dBm, low-noise mode, f<math>\leq 1</math> GHz)</b>                |   |           |   |
| Symbol rate < 300 kHz<br>Deviation error limit<br>FSK deviation<br>Magnitude error<br>Frequency offset                              | 1.5% rms + $x_{dev}$ <sup>4) 6)</sup><br>1.5% of reference deviation <sup>4)</sup><br>1% rms<br>0.5% of reference deviation + error of ref. frequency <sup>4)</sup>   |           | 2% rms + $x_{dev}$ <sup>5) 6)</sup><br>2% of reference deviation <sup>5)</sup><br>1.4% rms<br>0.7% of reference deviation + error of ref. frequency <sup>5)</sup>     |
| Symbol rate 300 kHz to 2 MHz<br>Deviation error limit<br>FSK deviation<br>Magnitude error<br>Frequency offset                       | 2% rms + $x_{dev}$ <sup>4) 6)</sup><br>2% of reference deviation <sup>4)</sup><br>2% rms<br>0.5% of reference deviation + error of ref. frequency <sup>4)</sup>   |           | 2.8% rms + $x_{dev}$ <sup>5) 6)</sup><br>2.8% of reference deviation <sup>5)</sup><br>2.8% rms<br>0.7% of reference deviation + error of ref. frequency <sup>5)</sup> |
| Symbol rate > 2 MHz (within 8 MHz demodulation BW)<br>Deviation error limit<br>FSK deviation<br>Magnitude error<br>Frequency offset | 4% rms + $x_{dev}$ <sup>4) 6)</sup><br>4% of reference deviation <sup>4)</sup><br>2% rms<br>0.5% of reference deviation + error of reference frequency  |           | 5.6% rms + $x_{dev}$ <sup>5) 6)</sup><br>5.6% of reference deviation <sup>5)</sup><br>2.8% rms<br>0.7% of reference deviation + error of reference frequency          |
| FSK standards   | input level $\geq 10$ dBm, low-noise mode, all standards, except ERMES;<br>FLEX: 4 points/symbol, ERMES and FLEX: 16 points/symbol  |           |   |
| DECT  | $\leq 2\%$ rms, <6% peak typ.   |           |   |
| MODACOM, CT2  | $\leq 1.5\%$ rms, typ. <3% peak typ.  |           |   |
| ERMES, FLEX   | $\leq 2\%$ rms, typ. <6% peak typ.  |           |   |
| <b>Measurement of analog modulation signals</b>   |   |           |   |
| Demodulation bandwidth  |   |           |   |
| Realtime demodulation   | 5 kHz to 200 kHz in steps of 1,2,3,5  |           |   |
| Offline demodulation  | 5 kHz to 5 MHz in steps of 1,2,3,5  |           |   |
| Demodulation length (max. sweep time)   | 3500/(demod. bandwidth/Hz) s  |           |   |
| Read-out  | trace with AF signal, carrier power (AM DC-coupled), or modulation summary (table) with numerical display of: peak and rms values of modulation depths or deviations of main demodulation; SINAD value 1 kHz (only with realtime demodulation); AF frequency; carrier power; peak values of incidental modulation |           |   |



|  | R&S FSIQ3  | R&S FSIQ7                                 | R&S FSIQ26 |
|--|--|---|------------|
| The following specifications are valid for demodulation bandwidth $\leq 2$ MHz, resolution bandwidth $\geq 5$ x demodulation bandwidth, RF input level $\leq -10$ dBm, reference level setting = peak input level + 0 dB to +6 dB. |  |   |            |
| <b>Amplitude demodulation</b>  |  |   |            |
| Range  | up to 100%   |   |            |
| AF   |  |   |            |
| Offline demodulation   | 0.001 to 0.2 x demod. BW   |   |            |
| Realtime demodulation  | 30 Hz to 0.2 x demod. BW, max. 20 kHz  |   |            |
| Error  | $\leq 5\%$ of result + residual AM   |   |            |
| Distortion (realtime demodulation)   |  |   |            |
| SINAD 1 kHz with $m = 80\%$ , LP 3 kHz   | $>46$ dB   |   |            |
| Residual AM  |  |   |            |
| Demod. BW $\leq 100$ kHz   | 0.2% rms   |   |            |
| Demod. BW $>100$ kHz   | $0.2\% + \sqrt{\text{demodulation bandwidth}/100\text{kHz}}$ rms   |   |            |
| Incidental AM with FM  | $\leq 2\%$ + residual AM<br>( $\Delta f = 0.2$ x demod. BW, $f_{\text{mod}} = 1$ kHz, $10$ kHz $\leq$ demod. BW $\leq 200$ kHz, lowpass 5% of demod. BW or 3 kHz, center frequency tuning) |   |            |
| <b>Frequency demodulation</b>  |  |   |            |
| Deviation range  | max. 0.4 x demod. BW   |   |            |
| AF   |  |   |            |
| Offline demodulation   | DC/0.001 to 0.2 x demod. BW  |   |            |
| Realtime demodulation  | DC/30 Hz to 0.2 x demod. BW, max. 20 kHz   |   |            |
| Error (AF up to 0.1 x demod. BW)   | $\leq 5\%$ of result + residual FM   |   |            |
| Distortion (realtime demodulation) RF $\leq 1$ GHz, demod. BW $\geq 10$ kHz, SINAD 1 kHz with $\Delta f = 0.2$ x demod. BW, LP 3 kHz   | $>50$ dB   |   |            |
| Residual FM (demod. BW $\leq 200$ kHz, lowpass 5% of demod. BW or 3 kHz, rms)  |  |   |            |
| $f < 1$ GHz  | $\leq 10$ Hz   | $\leq 20$ Hz                              |            |
| $f \geq 1$ GHz   | $\leq 10$ Hz x $\sqrt{f/1\text{GHz}}$  | $\leq 20$ Hz x $\sqrt{f/1\text{GHz}}$     |            |
| Incidental FM with AM (demod. BW $\leq 200$ kHz, $m = 50\%$ , $f_{\text{mod}} = 1$ kHz, lowpass 5% of demodulation BW or 3 kHz)  |  |   |            |
| $f \leq 100$ MHz   | $\leq 50$ Hz + residual FM   | $\leq 100$ Hz + residual FM               |            |
| $f \geq 100$ MHz   | $\leq 50$ Hz x $f/100$ MHz + residual FM   | $\leq 100$ Hz x $f/100$ MHz + residual FM |            |
| <b>Phase demodulation</b>  |  |   |            |
| Deviation range  | up to 10 rad   |   |            |
| AF   |  |   |            |
| Offline demodulation   | DC/ 0.001 x demod. BW to 0.1 x demod. BW, max. 0.4 x demod. BW)/(phase deviation/rad)<br>smaller limit value applies   |   |            |
| Realtime demodulation  | 200 Hz to 15 kHz, max. 0.1 x demod. BW, max. 0.4 x demod. BW,<br>max. 0.4 x demod. BW/(phase deviation/rad), smaller limit value applies   |   |            |
| Error  | $\leq 5\%$ of result + residual $\phi M$   |   |            |
| Distortion <sup>4)</sup> (realtime demod.) RF $\leq 1$ GHz, demod. BW $\geq 10$ kHz, SINAD 1 kHz with phase deviation/rad = 0.2 x demod. BW/1 kHz, HP 300 Hz, LP 3 kHz   | $>50$ dB   |   |            |
| Residual $\phi M$  |  |   |            |
| Demod. BW $\leq 200$ kHz, offline demodulation, lowpass 5% of demod. BW, rms $f < 100$ MHz   | $\leq 0.03$ rad  | $\leq 0.03$ rad                           |            |
| $f > 100$ MHz  | $\leq 0.03$ rad x $f/100$ MHz  | $\leq 0.06$ rad x $f/100$ MHz             |            |
| Realtime demodulation (HP 300 Hz, LP 3 kHz, rms)   |  |   |            |
| $f < 1$ GHz  | $\leq 0.01$ rad  | $\leq 0.02$ rad                           |            |
| $f > 1$ GHz  | $\leq 0.01$ rad x $\sqrt{f/1\text{GHz}}$   | $\leq 0.02$ rad x $\sqrt{f/1\text{GHz}}$  |            |
| Incidental $jM$ with AM demod. BW $\leq 200$ kHz, $m = 50\%$ , $f_{\text{mod}} = 1$ kHz, lowpass 5% of demod. BW or 3 kHz  | $\leq 0.05$ rad + residual $\phi M$  |   |            |
| <b>Measurement of unmodulated carrier power</b>  |  |   |            |
| Measurement error limit, (ref. level to ref. level $-30$ dB)   | 1.5 dB   |   |            |
| <b>SINAD measurements</b>  |  |   |            |
| Realtime demodulation, AF = 1 kHz $\pm 4 \times 10^{-4}$ x demod. BW   |  |   |            |
| Error with 6 dB to 54 dB SINAD   | $\pm 1$ dB + error due to demodulator SINAD  |   |            |

|   | R&S FSIQ3   | R&S FSIQ7      | R&S FSIQ26   |
|---|---|----------------|--|
| <b>Display of AF frequencies</b>                                |   |                |  |
| Range   |   |                |  |
| Offline demodulation  | 0.001 to 0.3 x demod. BW  |                |  |
| Realtime demodulation   | 30 Hz to 0.3 x demod. BW, max. 20 kHz   |                |  |
| Resolution  | 1 mHz to 1 Hz   |                |  |
| Error (S/N ≥40 dB)  | 1 x 10 <sup>-6</sup> x demod. BW + error of reference frequency +1 mHz ±1 digit |                |  |
| <b>AF filters</b>   |   |                |  |
| Realtime demodulation   |   |                |  |
| Lowpass   | 3 kHz, 15 kHz (Butterworth, 12 dB/oct.)   |                |  |
| Highpass  | 30 Hz, 300 Hz (6 dB/oct.)   |                |  |
| Weighting filters   | CCITT P.53, C message   |                |  |
| Offline demodulation  |   |                |  |
| Lowpass   | 5%, 10%, 25% of demod. BW (12 dB/oct.)  |                |  |
| <b>Audio demodulation</b>                                       |   |                |  |
| Modulation modes  | AM and FM   |                |  |
| Audio output  | speaker and phone jack  |                |  |
| Marker stop time in spectrum mode                               | 100 ms to 60 s  |                |  |
| <b>Trigger functions</b>  |   |                |  |
| Trigger   |   |                |  |
| Span ≥10 Hz   | free run, line, video, RF level, external                                       |                |  |
| Span = 0 Hz   | plus pretrigger, posttrigger, trigger delay                                     |                |  |
| with digital demodulation                                       | plus burst trigger and synchronization to bit sequence (max. 32 symbols)        |                |  |
| with analog demodulation  | plus trigger to demodulated AF  |                |  |
| Delayed sweep   |   |                |  |
| Trigger source  | calculated  |                |  |
| Delay time  | 100 ns to 10 s, resolution min. 1 μs or 1% of delay time                        |                |  |
| Error of delay time   | ±(1 μs + (0.05% x delay time))  |                |  |
| Delayed sweep time  | 2 μs to 1000 s  |                |  |
| Gated sweep   |   |                |  |
| Trigger source  | external, RF level  |                |  |
| Gate delay  | 1 μs to 100 s   |                |  |
| Gate length   | 1 μs to 100 s, resolution min. 1 μs or 1% of gate length                        |                |  |
| Error of gate length  | ±(1 μs + (0.05% x gate length))   |                |  |
| Gap sweep (span = 0 Hz)   |   |                |  |
| Trigger source  | free run, line, video, RF level, external                                       |                |  |
| Pretrigger  | 1 μs to 100 s, resolution 50 ns, dependent on sweep time                        |                |  |
| Trigger to gap time   | 1 μs to 100 s, resolution 50 ns, dependent on sweep time                        |                |  |
| Gap length  | 1 μs to 100 s, resolution 50 ns   |                |  |
| Inputs and outputs (front panel)                                |   |                |  |
| RF input  | N female, 50 Ω  | N female, 50 Ω | adapter system, 50 Ω,<br>N male and female<br>3.5 mm male and female |
| <b>VSWR (RF attenuation ≥10 dB)</b>                             |   |                |  |
| f <3.5 GHz  | <1.5  |                |  |
| f <7 GHz  | –   | <2.0           |  |
| f <26.5 GHz   | –   | <3             |  |
| Attenuator  | 0 dB to 70 dB, selectable in 10 dB steps  |                |  |
| Probe power supply  | +15 V DC, –12.6 V DC and ground, max. 150 mA                                    |                |  |
| Supply and coding connector for antennas,<br>etc (antenna code) | 12-pin Tuchel   |                |  |
| Supply voltages   | ±10 V, max. 100 mA, ground  |                |  |
| AF output   | Z <sub>out</sub> = 10 Ω, jack plug  |                |  |
| Open-circuit voltage  | adjustable up to 1.5 V  |                |  |

|  | R&S FSIQ3   | R&S FSIQ7 | R&S FSIQ26      |
|--|---|-----------|-----------------|
| <b>Inputs &amp; outputs (rear panel)</b> |   |           |                 |
| IF 21.4 MHz                              | $Z_{out} = 50 \Omega$ , BNC female, bandwidth >1 kHz or resolution bandwidth                                    |           |                 |
| Level                                    | 0 dBm at reference level, mixer level >-60 dBm  |           |                 |
| Video output                             | $Z_{out} = 50 \Omega$ , BNC female  |           |                 |
| Voltage (RBW $\geq$ 1 kHz)               | 0 V to 1 V, full scale (open-circuit voltage); log scaling  |           |                 |
| <b>Reference frequency</b>               |   |           |                 |
| Output, usable as input                  | BNC female  |           |                 |
| Output frequency                         | 10 MHz  |           |                 |
| Level                                    | 10 dBm nominal  |           |                 |
| Input                                    | 1 MHz to 16 MHz, integer MHz  |           |                 |
| Required level                           | >0 dBm from 50 $\Omega$   |           |                 |
| <b>Other data</b>                        |   |           |                 |
| Sweep output                             | BNC female, 0 V to +10 V, proportional to displayed frequency   |           |                 |
| Power supply connector for noise source  | BNC female, 0 V and 28 V, switched  |           |                 |
| External trigger/gate input              | BNC female, >10 k $\Omega$  |           |                 |
| Voltage                                  | -5 V to +5 V, adjustable  |           |                 |
| GPIB remote control                      | interface to IEC 60625 (IEEE 488.2)   |           |                 |
| Command set                              | SCPI 1994.0   |           |                 |
| Connector                                | 24-pin Amphenol female  |           |                 |
| Interface functions                      | SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C11  |           |                 |
| Serial interface                         | RS-232-C (COM1 and COM2), 9-pin female connectors   |           |                 |
| Mouse interface                          | PS/2 compatible   |           |                 |
| Printer interface                        | parallel (Centronics compatible) or serial (RS-232-C)   |           |                 |
| Keyboard connector                       | 5-pin DIN female for MF2 keyboard   |           |                 |
| User interface                           | 25-pin Canon female   |           |                 |
| Connector for external monitor (VGA)     | 15-pin female   |           |                 |
| <b>General data</b>                      |   |           |                 |
| Display                                  | 24 cm TFT colour display (9.5")   |           |                 |
| Resolution                               | 640 x 480 pixels (VGA resolution)   |           |                 |
| Mass memory                              | 1.44 Mbyte 3½" floppy disk drive, hard disk   |           |                 |
| <b>Operating temperature range</b>       |   |           |                 |
| Nominal temperature range                | +5°C to +40°C   |           |                 |
| Limit temperature range                  | 0°C to +50°C  |           |                 |
| Storage temperature range                | -40°C to +70°C  |           |                 |
| Humidity                                 | +40°C at 95% relative humidity (IEC 60068)  |           |                 |
| <b>Mechanical stress</b>                 |   |           |                 |
| Sinusoidal vibration                     | 5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; to IEC 600686, IEC 601010, MIL-T-28800D, class 5 |           |                 |
| Random vibration                         | 10 Hz to 300 Hz, acceleration 1.2 g rms   |           |                 |
| Shock                                    | 40 g shock spectrum, to MIL-STD-810D and MIL-T-28800D, classes 3 and 5  |           |                 |
| Recommended calibration interval         | 1 year (2 years for operation with external reference)  |           |                 |
| RFI suppression                          | to EMC directive of EU (89/336/EEC) and German EMC legislation  |           |                 |
| <b>Power supply</b>                      |   |           |                 |
| AC supply                                | 200 V to 240 V: 50 Hz to 60 Hz, 100 V to 120 V: 50 Hz to 400 Hz, protection class I to VDE 411                  |           |                 |
| Power consumption                        | 195 VA  | 210 VA    | 245 VA          |
| Safety                                   | to EN 61010-1, UL 3111-1, CDA C22.2 No. 1010-1, IEC 601010  |           |                 |
| Test mark                                | VDE, GS, UL, cUL  |           |                 |
| Dimensions in mm (W x H x D)             | 435 x 236 x 460   |           | 435 x 236 x 570 |
| Weight                                   | 24 kg   | 24.5 kg   | 26.5 kg         |

<sup>1)</sup> After 30 days of operation.

<sup>2)</sup> Valid for span >100 kHz.

<sup>3)</sup> For frequencies >7 GHz: error limit after calling peaking function. For sweep times <10 ms/GHz: additional error 1.5 dB.

<sup>4)</sup> For frequencies >1 GHz the specified values have to be multiplied by  $10^{0.552 \times \lg(f/\text{GHz} / 1 \text{ GHz})}$ .

<sup>5)</sup> For frequencies >1 GHz the specified values have to be multiplied by  $10^{0.354 \times \lg(f/\text{GHz} / 1 \text{ GHz})}$ .

<sup>6)</sup>  $\chi_{dev} = 2 \times 10^{-4} \times f_{\text{Symb}} \times (\text{points per symbol}) \text{ Hz}$ .

## Specifications of options

| Option  |   |
|---|---|
| <b>1 dB Input Attenuator R&amp;S FSE-B13</b>  |   |
| Frequency range   | 0 Hz to 7 GHz (stop frequency $\leq 7$ GHz) |
| Setting range of RF attenuation   | 0 dB to 70 dB                               |
| Step width  | 1 dB  |
| Additional attenuation error limit  | <0.1 dB                                     |
| <b>External Mixer Output R&amp;S FSE-B21</b>  |   |
| LO output /IF input (front)   | SMA connector female, 50 $\Omega$           |
| LO signal   | 7.5 GHz to 15.2 GHz                         |
| Level   | +15.5 dBm $\pm 3$ dB                        |
| IF signal   | 741.4 MHz                                   |
| Full-scale level  | -20 dBm                                     |
| IF input (front)  | SMA connector female, 50 $\Omega$           |
| IF signal   | 741.4 MHz                                   |
| Full-scale level  | -20 dBm                                     |
| Level measurement error limit at IF inputs<br>(IF level -30 dBm, reference level -20 dBm, RBW 30 kHz) | <1 dB                                       |

## Ordering information

| Order designation   | Type            | Order No.    |
|---|-----------------|--------------|
| Signal Analyzer 20 Hz to 3.5 GHz                            | R&S FSIQ 3      | 1119.5005.13 |
| Signal Analyzer 20 Hz to 7 GHz                              | R&S FSIQ 7      | 1119.5005.17 |
| Signal Analyzer 20 Hz to 26.5 GHz                           | R&S FSIQ 26     | 1119.6001.27 |
| <b>Accessories supplied</b>                                 |                 |              |
| Keyboard, mouse, power cable, operating manual, spare fuses | R&S FSIQ 3/7/26 |              |
| <b>Only R&amp;S FSIQ 26</b>                                 |                 |              |
| Test-port adapter N female                                  |                 | 1021.0512.00 |
| 3.5 mm female   |                 | 1021.0535.00 |

## Options

| Order designation   | Type                      | Order No.    |
|---|---------------------------|--------------|
| <b>Hardware</b>   |                           |              |
| 7 GHz Frequency Extension for R&S FSIQ 3                      | R&S FSE-B2                | 1073.5044.02 |
| Tracking Generator 3.5 GHz for R&S FSIQ 3                     | R&S FSE-B8 <sup>1)</sup>  | 1066.4469.02 |
| Tracking Generator 3.5 GHz with I/Q Modulator for R&S FSIQ 3  | R&S FSE-B9 <sup>1)</sup>  | 1066.4617.02 |
| Tracking Generator 7 GHz for R&S FSIQ 7/26                    | R&S FSE-B10 <sup>1)</sup> | 1066.4769.02 |
| Tracking Generator 7 GHz with I/Q Modulator for R&S FSIQ 7/26 | R&S FSE-B11 <sup>1)</sup> | 1066.4917.02 |
| Switchable Attenuator for Tracking Generator                  | R&S FSE-B12 <sup>2)</sup> | 1066.5065.02 |
| 1 dB Attenuator   | R&S FSE-B13 <sup>2)</sup> | 1119.6499.02 |
| Ethernet Interface, 15-contact AUI connector                  | R&S FSE-B16               | 1073.5973.02 |
| Ethernet Interface, Thin-wire BNC connector                   | R&S FSE-B16               | 1073.5973.03 |
| Ethernet Interface, RJ45 (twisted pair)                       | R&S FSE-B16               | 1073.5973.04 |
| 2nd IEC/IEEE Bus Interface                                    | R&S FSE-B17               | 1066.4017.02 |
| Removable Harddisk  | R&S FSE-B18 <sup>3)</sup> | 1088.6993.02 |
| 2nd Hard Disk for R&S FSE-B18                                 | R&S FSE-B19               | 1088.7248.02 |
| External Mixer Input/Output for R&S FSIQ 26                   | R&S FSE-B21               | 1084.7243.02 |
| DSP and I/Q Memory Extension 2 x 512 k                        | R&S FSIQ-B70              | 1119.6747.02 |
| Harmonic Mixer 40 GHz to 60 GHz                               | R&S FS-Z60 <sup>1)</sup>  | 1089.0799.02 |
| Harmonic Mixer 50 GHz to 75 GHz                               | R&S FS-Z75 <sup>1)</sup>  | 1089.0847.02 |
| Harmonic Mixer 60 GHz to 90GHz                                | R&S FS-Z90 <sup>1)</sup>  | 1089.0899.02 |
| Harmonic Mixer 75 GHz to 110 GHz                              | R&S FS-Z110 <sup>1)</sup> | 1089.0947.02 |



| Order designation  | Type                         | Order No.    |
|--|------------------------------|--------------|
| <b>Software</b>  |                              |              |
| Noise Measurement Software   | R&S FS-K3 <sup>1)</sup>      | 1057.3028.02 |
| Phase Noise Measurement Software                                   | R&S FS-K4 <sup>1)</sup>      | 1108.0088.02 |
| GSM Application Firmware, Mobile                                   | R&S FSE-K10 <sup>1)</sup>    | 1057.3092.02 |
| GSM Application Firmware, BTS                                      | R&S FSE-K11 <sup>1)</sup>    | 1057.3392.02 |
| EDGE Application Firmware Extension, Mobile                        | R&S FSE-K20 <sup>1)4)</sup>  | 1106.4086.02 |
| EDGE Application Firmware Extension, BTS                           | R&S FSE-K21 <sup>1)5)</sup>  | 1106.4186.02 |
| 850 MHz Application Firmware Extension, GSM mobile test            | R&S FSE-K30 <sup>6)</sup>    | 1140.5098.02 |
| 850 MHz Application Firmware Extension, GSM BTS test               | R&S FSE-K31 <sup>7)</sup>    | 1140.5198.02 |
| Application Firmware for cdmaOne BTS code domain power measurement | R&S FSIQ-K71 <sup>1)8)</sup> | 1126.4498.02 |
| WCDMA/3GPP Application Firmware, BTS                               | R&S FSIQ-K72 <sup>1)8)</sup> | 1126.4746.02 |
| WCDMA/3GPP Application Firmware, Mobile (UE)                       | R&S FSIQ-K73 <sup>1)8)</sup> | 1153.1009.02 |

- 1) See separate data sheets.  
2) R&S FSE-B12 and R&S FSE-B13 cannot be installed simultaneously.  
3) Cannot be retrofitted, factory fitted only.  
4) R&S FSE-K10 required.  
5) R&S FSE-K11 required.  
6) R&S FSE-K10 required, for EDGE R&S FSE-K20 is additionally necessary.  
7) R&S FSE-K11 required, for EDGE R&S FSE-K21 is additionally necessary.  
8) R&S FSIQ-B70 required. Additional modifications may be required if the R&S FSIQ-B70 is retrofitted.

## Recommended extras

| Order designation   | Type        | Order No.                           |
|---|-------------|-------------------------------------|
| <b>Service Kit</b>  |             |                                     |
| Service Kit   | R&S FSE-Z1  | 1066.3862.02                        |
| DC Block, 5 MHz to 7 GHz, N connector                       | R&S FSE-Z3  | 4010.3895.00                        |
| DC Block 10 kHz to 18 GHz, N connector                      | R&S FSE-Z4  | 1084.7443.02                        |
| Microwave Measurement Cable and Adapter Set for R&S FSIQ 26 | R&S FSE-Z15 | 1046.2002.02                        |
| Headphones  | –           | 0708.9010.00                        |
| IEC/IEEE Bus Cable, 1 m                                     | R&S PCK     | 0292.2013.10                        |
| IEC/IEEE Bus Cable, 2 m                                     | R&S PCK     | 0292.2013.20                        |
| 19" Rack Adapter with front handles                         | R&S ZZA-95  | 0396.4911.00                        |
| Probe Power Connectors 3-contact                            | –           | 1065.9480.00                        |
| <b>Matching Pads, 75 Ω</b>                                  |             |                                     |
| L Section   | R&S RAM     | 0358.5414.02                        |
| Series Resistor, 25 Ω                                       | R&S RAZ     | 0358.5714.02                        |
| SWR Bridge, 5 MHz to 3000 MHz                               | R&S ZRB2    | 0373.9017.52                        |
| SWR Bridge, 40 kHz to 4 GHz                                 | R&S ZRC     | 1039.9492.52                        |
| <b>High-Power Attenuators, 100 W</b>                        |             |                                     |
| 3/6/10/20/30 dB   | R&S RBU 100 | 1073.8820.XX (XX = 03/06/10/20/ 30) |
| <b>High-Power Attenuators, 50 W</b>                         |             |                                     |
| 3/6/10/20/30 dB   | R&S RBU 50  | 1073.8895.XX (XX = 03/06/10/20/ 30) |
| Preamplifier, 20 MHz to 1000 MHz                            | R&S ESV-Z3  | 0397.7014.52                        |
| <b>For R&amp;S FSIQ 26 only:</b>                            |             |                                     |
| Test-Port Adapter, N male                                   | –           | 1021.0541.00                        |
| Test-Port Adapter, 3.5 mm male                              | –           | 1021.0529.00                        |



**ROHDE & SCHWARZ**

ROHDE & SCHWARZ GmbH & Co. KG · Mühlendorfstraße 15 · 81671 München · Germany · P.O.B. 801469 · 81614 München · Germany · Telephone +49 89 4129-0  
www.rohde-schwarz.com · Customer Support: Tel. +49 1805124242, Fax +49 89 4129-13777, E-mail: CustomerSupport@rohde-schwarz.com