

Handheld Spectrum Analyzer R&S® FSH

R&S® FSH 3 100 kHz to 3 GHz
R&S® FSH 6 100 kHz to 6 GHz



First Edition May 2004


 **ROHDE & SCHWARZ**

Spectrum analysis – anywhere, anytime

The R&S®FSH is the ideal spectrum analyzer for rapid, high-precision, cost-effective signal investigations. It provides a large number of measurement functions and so can handle anything from the installation or maintenance of a mobile radio base station up to on-site fault location in RF cables as well as development and service – an extensive range of applications.



*Power measurement with the
Power Sensor R&S®FSH-Z1*

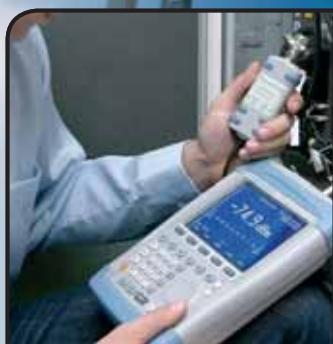

Handy, robust and portable

The R&S®FSH has been designed as a robust, portable spectrum analyzer that can be used in the field.

Robust edge protection, stable carrying handle
Easy operation
Four hours operating time on battery power
Storage of up to 100 traces and setups
Easy data transfer to PC
High measurement accuracy
Best RF characteristics in this class


The R&S®FSH can, of course, also be used on the lab bench. The R&S®FSH has an adjustable, fold-out stand to position the instrument to an optimal display viewing angle.



Im robusten Aluminiumkoffer kann der R&S®FSH zusammen mit dem Zubehör sicher und kompakt untergebracht und transportiert werden





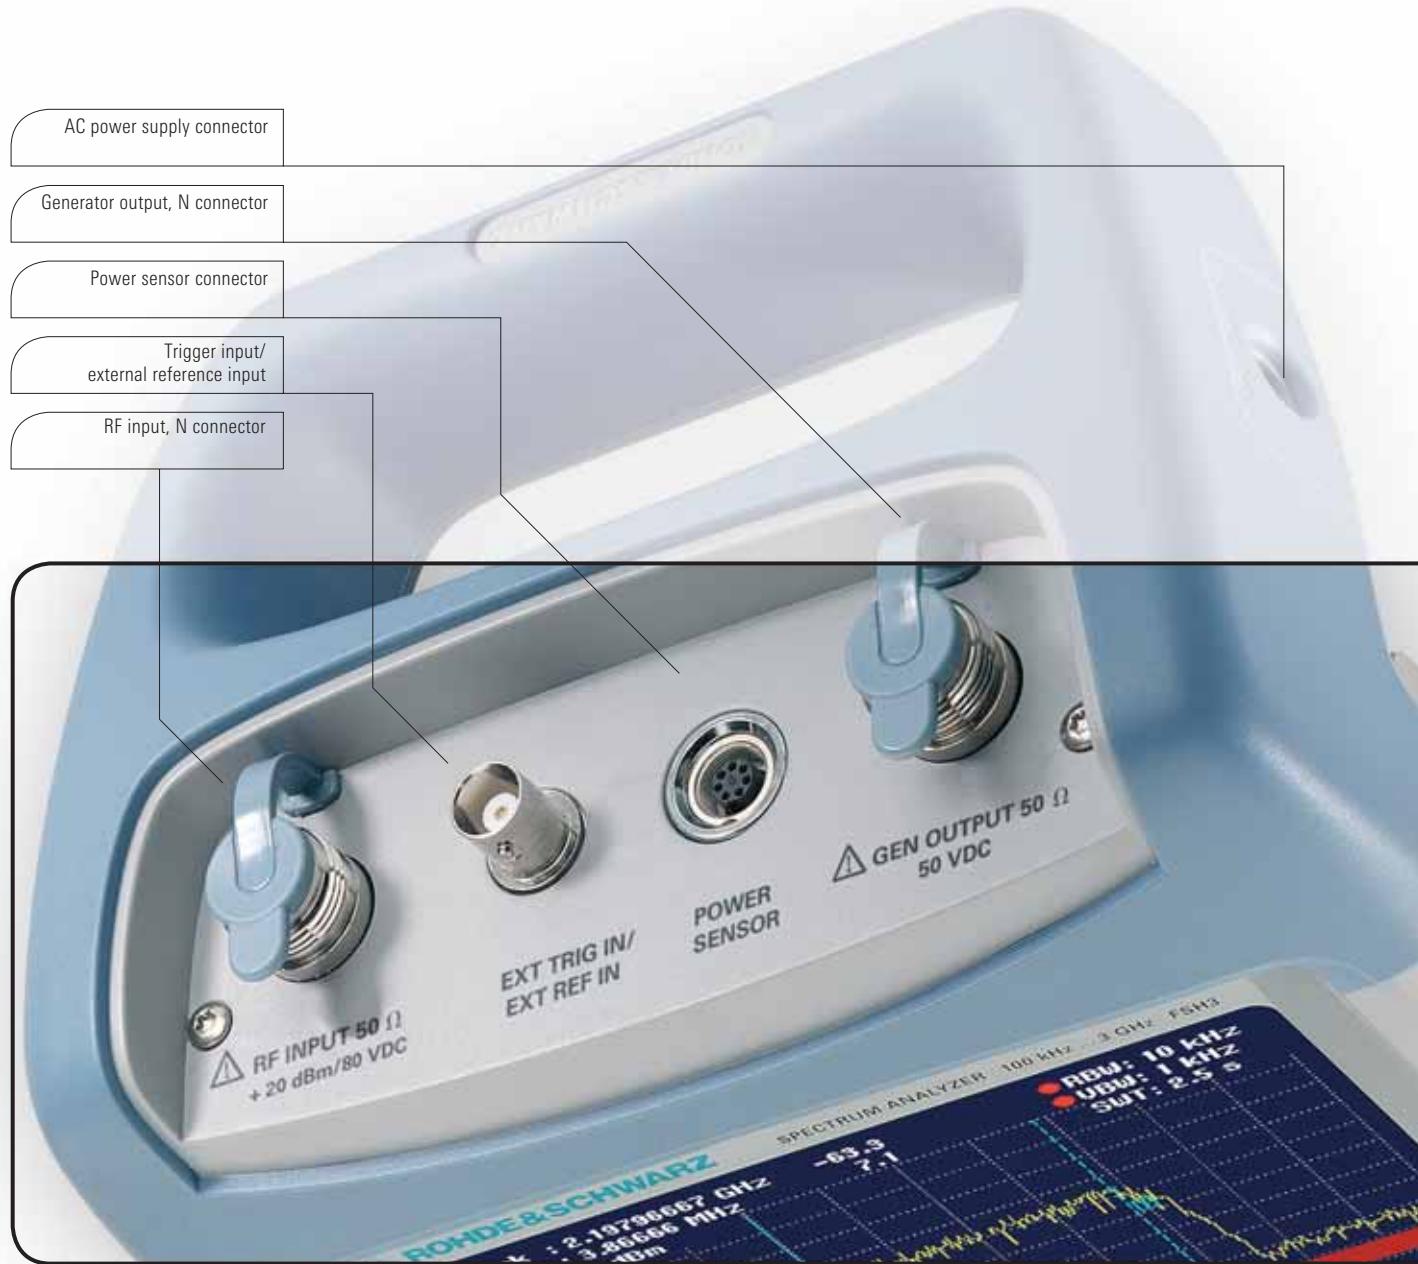


Data in brief

Headphones connector

	R&S®FSH 3	R&S®FSH 6
Frequency range	100 kHz to 3 GHz	100 kHz to 6 GHz
Resolution bandwidths	1 kHz to 1 MHz (model .13) 100 Hz to 1 MHz (models .03 and .23)	100 Hz to 1 MHz
Video bandwidths	10 Hz to 1 MHz	
Displayed average noise level	typ. -114 dBm (1 kHz) (model .13) typ. -135 dBm (100 Hz) (models .03 and .23)	typ. -135 dBm (100 Hz)
TOI	typ. 13 dBm	
SSB phase noise	<-100 dBc (1 Hz) at 100 kHz from carrier	
Detectors	sample, max/min peak, auto peak, RMS	
Level measurement uncertainty	<1.5 dB, typ. 0.5 dB	
Reference level	-80 dBm bis +20 dBm	
Dimensions	170 mm × 120 mm × 270 mm	
Weight	2.5 kg	

R&S®FSH – options and applications

Der R&S®FSH ist in den Varianten mit 3 GHz oder 6 GHz, mit oder ohne internen Mitlaufgenerator lieferbar. Der Mitlaufgenerator erweitert das Einsatzgebiet des R&S®FSH auf Kabelfehlstellenortung (DTF = Distance-to-Fault), skalare und vektorielle Netzwerkanalyse, sowie 1-Tor-Kabeldämpfungsmessung. Nahezu alle Modelle sind standardmäßig mit einem schaltbaren Vorverstärker ausgestattet und damit zur Messung sehr kleiner Signale geeignet. Für hochgenaue Abschlussleistungsmessungen bis 8 GHz bzw. 18 GHz, sowie zur Durchgangsleistungsmessung bis 4 GHz stehen Leistungsmessköpfe als Zubehör zur Verfügung. Mögliche Konfigurationen für verschiedene Anwendungsgebiete und eine Modellübersicht zeigen nachfolgende Tabellen.

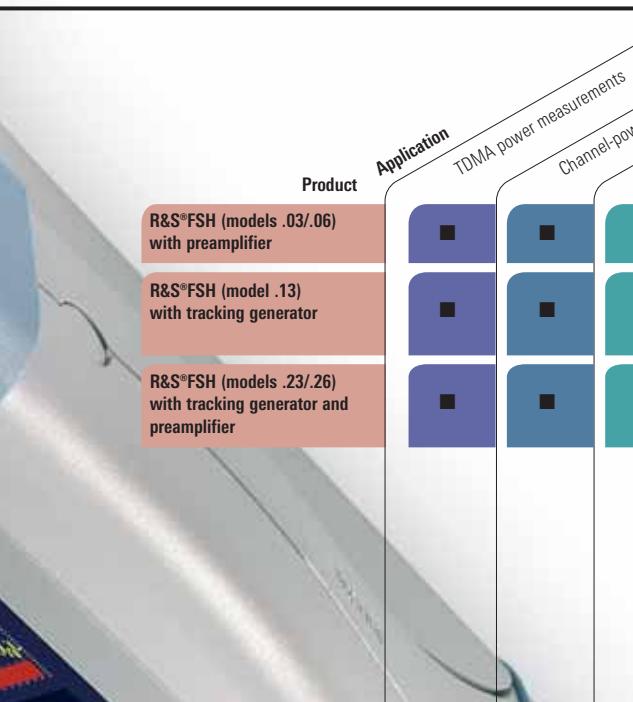

Product	Application											
	TDMA power measurements	Channel-power measurements	Field-strength measurements	Receiver mode	Power measurements up to 8 GHz/18 GHz	Directional power measurements up to 4 GHz	Measurements on cables (distance-to-fault)	Scalar transmission measurements	Vector transmission measurements ¹⁾	Scalar reflection measurements	Vector reflection measurements ¹⁾	Remote control via RS-232-C interface
R&S®FSH (models .03/.06) with preamplifier	■	■	■	+R&S® FSH-K3	+R&S® FSH-Z1/-Z18	+R&S® FSH-Z44	-	-	+R&S® FSH-K1	-	-	
R&S®FSH (model .13) with tracking generator	■	■	■	+R&S® FSH-K3	+R&S® FSH-Z1/-Z18	+R&S® FSH-Z44	+R&S® FSH-Z2 +R&S® FSH-B1	-	+R&S® FSH-K1	+R&S® FSH-Z2 +R&S® FSH-K2	+R&S® FSH-Z2 +R&S® FSH-K2	
R&S®FSH (models .23/.26) with tracking generator and preamplifier	■	■	■	+R&S® FSH-K3	+R&S® FSH-Z1/-Z18	+R&S® FSH-Z44	+R&S® FSH-Z2 +R&S® FSH-B1	-	+R&S® FSH-K1	+R&S® FSH-Z2 +R&S® FSH-K2	+R&S® FSH-Z2 +R&S® FSH-K2	


¹⁾ R&S®FSH-K2 required
■ Standard on the R&S®FSH
- Not available

R&S®FSH – models

	Frequency range	Tracking generator	Output power tracking generator	Preamplifier	Resolution bandwidth
R&S®FSH3 model .03	100 kHz to 3 GHz	-	-	■	100 Hz to 1 MHz
R&S®FSH3 model .13	100 kHz to 3 GHz	■	-20 dBm	-	1 kHz to 1 MHz
R&S®FSH3 model .23	100 kHz to 3 GHz	■	-20 dBm/0 dBm selectable	■	100 Hz to 1 MHz
R&S®FSH6 model .06	100 kHz to 6 GHz	-	-	■	100 Hz to 1 MHz
R&S®FSH6 model .26	100 kHz to 6 GHz	■	-10 dBm (f < 3 GHz) -20 dBm (f > 3 GHz)	■	100 Hz to 1 MHz



TDMA power measurements

By means of the TDMA POWER function, the R&S®FSH performs time-domain power measurements within a timeslot of TDMA (time division multiple access) methods. All the settings required for the GSM and EDGE standards are predefined on the R&S®FSH to make these measurements easier for the user.

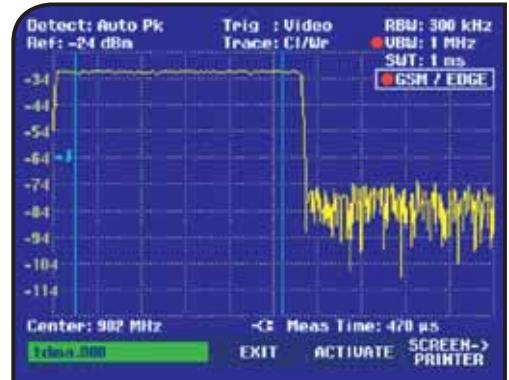

Channel-power measurements

The R&S®FSH determines the power of a definable transmission channel by means of the channel-power measurement function. A channel-power measurement for the digital mobile radio standards 3GPP WCDMA, cdmaOne and cdma2000 1x is performed at a keystroke with all the correct instrument settings.

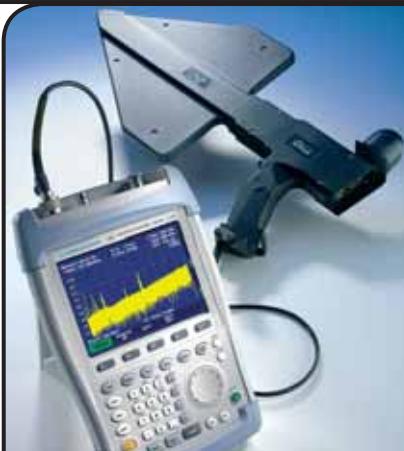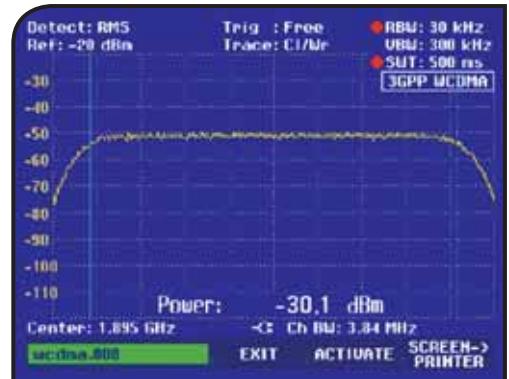


Field-strength measurements

When measuring electric field strength, the R&S®FSH takes into account the specific antenna factors of the connected antenna. Field strength is displayed directly in dB μ V/m. In addition, frequency-dependent loss or gain of, for example, a cable or an amplifier can be corrected. For quick and easy result analysis, the R&S®FSH provides two user-definable limit lines with automatic limit monitoring.

R&S®FSH with Active Directional Antenna R&S®HE200 (optional accessory)


Empfänger-Modus

Mit der Option R&S®FSH-K3 kann der R&S®FSH als Empfänger für Monitoring- und Precompliance-EMV-Anwendungen betrieben werden. Die Messung erfolgt auf einer vorgegebenen Frequenz mit wählbarer Messzeit. Im Scan-Modus misst der R&S®FSH nacheinander die Pegel auf verschiedenen, in einer Kanaltabelle definierten Frequenzen. Die Kanaltabellen werden mit der Software R&S®FSHView erstellt und in den R&S®FSH geladen. Für einige TV-Sender und Mobilfunkstandards sind die Tabellen vordefiniert. Zusätzlich stehen für Störemissionsmessungen die CISPR-Bandbreiten 200 Hz, 9 kHz, 120 kHz und 1 MHz zur Verfügung. Als Detektoren bietet der R&S®FSH Peak, Average, RMS und Quasi-Peak an.

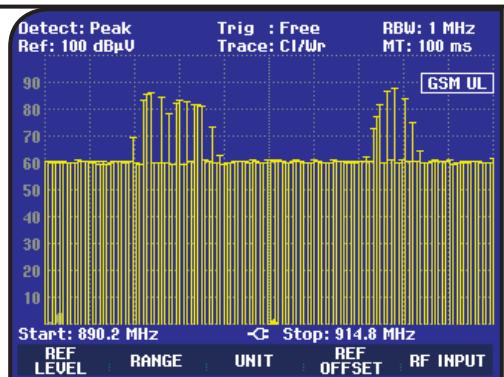

Power measurements

The Power Sensors R&S®FSH-Z1 and R&S®FSH-Z18 expand the R&S®FSH to a high-precision RF power meter up to 8 GHz and 18 GHz respectively. As with thermal sensors, the true RMS value of the measured signal is obtained over the entire measurement range of –67 dBm to +23 dBm irrespective of the signal waveform. In particular with modulated signals, additional measurement errors can thus be prevented, and handling becomes easy.

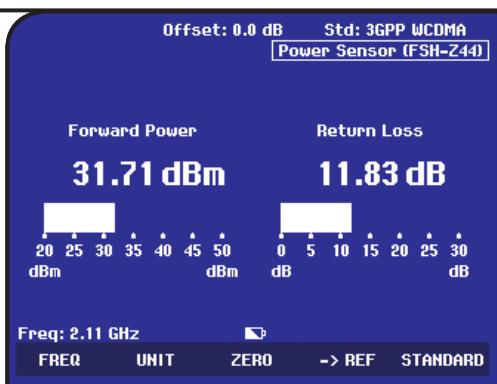


Directional power measurements

The Directional Power Sensor R&S®FSH-Z44 turns the R&S®FSH into a full-featured directional power meter between 200 kHz and 4 GHz. With this added functionality, it is simultaneously possible to measure output power and the matching of transmitter system antennas under operating conditions. The directional power sensor measures power up to 120 W and as a rule eliminates the need for any extra attenuators. It is compatible with the common standards GSM/EDGE, 3GPP WCDMA, cdmaOne, cdma2000 1x, DVB-T and DAB.

Measurements on cables (distance-to-fault)


For rapid and accurate determination of the distance to any faults in an RF cable. Distance-to-fault measurements using the VSWR Bridge R&S®FSH-Z2 give an immediate overview of the state of the device under test (return loss and distance, see figure). The marker-zoom function allows detailed analysis of faults with a resolution of up to 1024 pixels.

Only applies to the R&S®FSH with tracking generator, Order No. 1145.5850.13 or 1145.5850.23, with installed options R&S®FSH-B1 (distance-to-fault measurement) and R&S®FSH-Z2 (VSWR bridge and power divider)

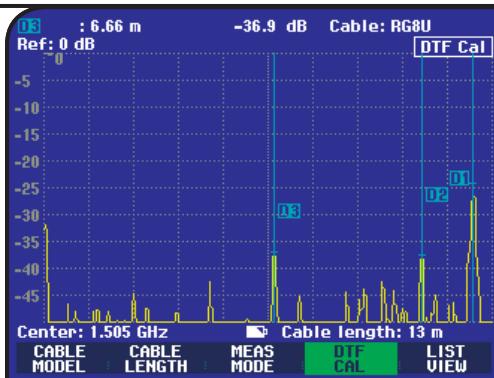

Scalar transmission and reflection measurements with VSWR bridge (R&S®FSH-Z2 as accessory)

The R&S®FSH with built-in tracking generator rapidly determines the transmission characteristics of cables, filters, amplifiers, etc., with a minimum of effort. When the VSWR Bridge R&S®FSH-Z2 (40 MHz to 3 GHz) is installed, the R&S®FSH can also determine the matching (return loss or VSWR) of an antenna, for example. The bridge is screwed directly onto the R&S®FSH's RF input and tracking generator output without involving cumbersome, extra cabling.

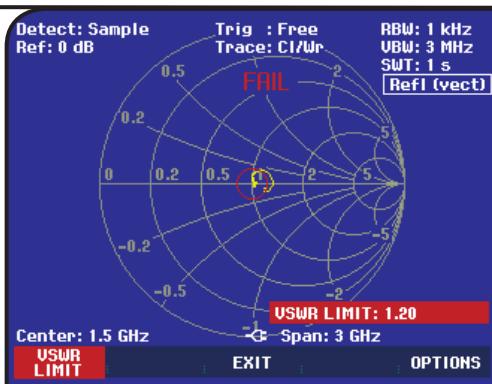


Vector transmission and reflection measurements

Compared to scalar measurements, the optional R&S®FSH-K2 vector measurement significantly increases measurement accuracy and dynamic range for transmission and reflection measurements. This is possible because the receive signal is analyzed with respect to magnitude and phase. After calibration, complex correction of the system errors can be effected by the R&S®FSH. Zur detaillierten Untersuchung der Anpassungsverhältnisse von z.B. einer Antenne wird Betrag und Phase in einem Smith-Diagramm dargestellt. Eine frei definierbare Grenzwertlinie hilft bei der Beurteilung der Messergebnisse.

I-Tor-Kabeldämpfungsmessung


Der R&S®FSH mit Mitlaufgenerator und VSWR-Messbrücke kann die Kabeldämpfung von bereits installierten langen Kabeln ohne großen Aufwand bestimmen. Ein Kabelende wird an die VSWR-Messbrücke angeschlossen, das andere Kabelende wird entweder mit einem Kurzschluss abgeschlossen oder einfach offen gelassen. Der errechnete Wert der Kabeldämpfung repräsentiert den Mittelwert innerhalb des dargestellten Frequenzbereichs. Die Dämpfung bei bestimmten Frequenzen wird per Marker ermittelt. Die 1-Tor Kabeldämpfungsmessung wird mit der Option R&S®FSH-K2 aktiviert.

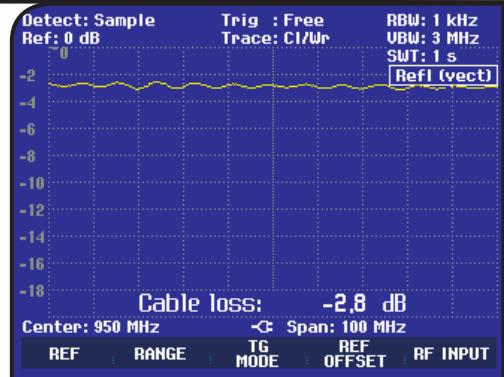


R&S®FSH with Directional Power Sensor
R&S®FSH-Z44



Data transfer between R&S®FSH and PC
(interface cables and software are supplied with the instrument)

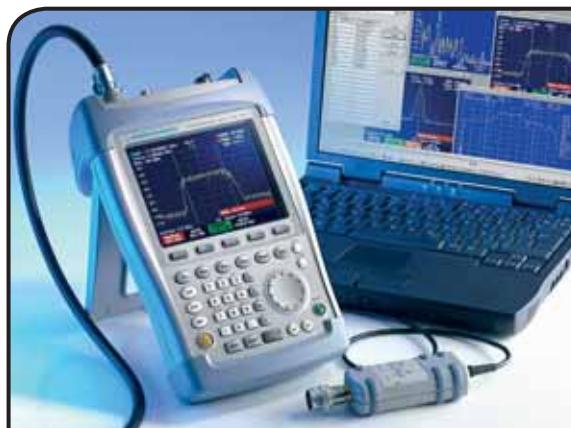


R&S®FSH with VSWR Bridge and
Power Divider R&S®FSH-Z2

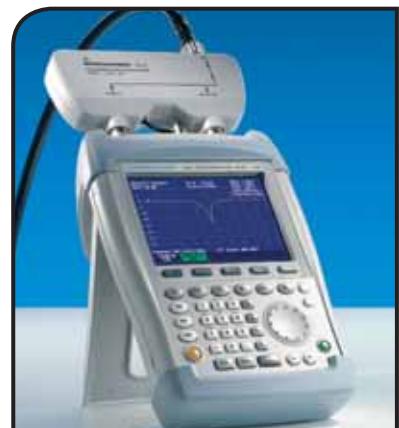

Control Software R&S®FSH View

The powerful software package for documenting your measurements is supplied with every R&S®FSH.

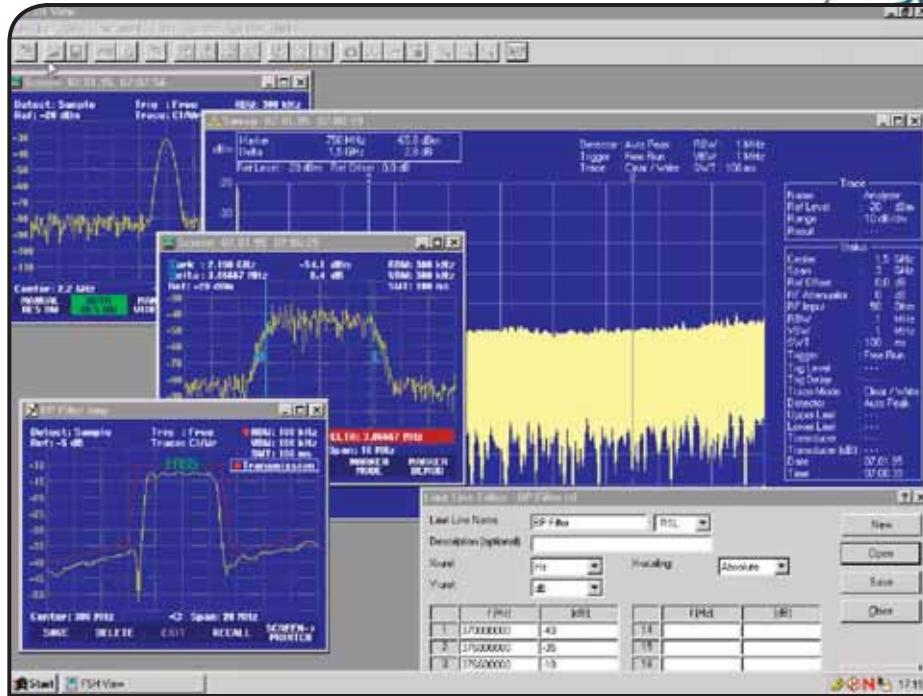

Features:

- Runs under Windows 98/ME/NT/2000/XP
- Rapid and simple transfer of measurement data from the R&S®FSH to a PC and vice versa
- Data export in ASCII or MS Excel format
- Printout of all relevant data via Windows (screenshot of the R&S®FSH display for documentation)
- Graphics data stored in standard formats (.bmp, .pcx, .png, .wmf)
- Permanent and continuous transfer of sweeps to the PC; facilities for subsequent analysis (markers, zoom, etc)
- **Nur durch die Größe der Festplatte des steuernden PCs** limited memory capacity for traces and other measurement information; comparison of new and old measurements
- Automatische Speicherung der Messergebnisse in einstellbaren Intervallen
- Generation of cable data with a built-in cable editor; downloading to the R&S®FSH for distance-to-fault measurements
- Editor for the generation of limit lines, transducer factors and correction factors for external attenuators or amplifiers
- Erzeugung von Kanallisten und Upload zum R&S®FSH für den Empfänger-Modus (R&S®FSH-K3)
- Macro function for Word for fast and easy documentation of measurement results
- Connection between PC and R&S®FSH via interference-free, RS-232-C optical interface

Specifications

Specifications are valid under the following conditions: 15 minutes warm-up time at ambient temperature, specified environmental conditions met and calibration cycle adhered to. Data without tolerances: typical values. Data designated as "nominal": design parameters, i. e. not tested.

	SW	TRACE	MEAS	MARKER	PRINT		
	R&S®FSH		R&S®FSH				
Frequency							
Frequency range	100 kHz to 3 GHz				100 kHz to 6 GHz		
Reference frequency							
Aging	1 ppm/year						
Temperature drift	0 °C to 30 °C 30 °C to 50 °C	2 ppm in addition 2 ppm/10 °C					
Frequency counter							
Resolution	1 Hz						
	SIN > 25 dB		\pm (Frequency \times Reference frequency uncertainty)				
Frequency span	0 Hz, 10 kHz to 3 GHz		0 Hz, 10 kHz to 6 GHz				
Spectral purity							
SSB phase noise	f = 500 MHz, 20 °C to 30 °C						
30 kHz from carrier	<85 dBc (1 Hz)						
100 kHz from carrier	<100 dBc (1 Hz)						
1 MHz from carrier	<120 dBc (1 Hz)						
Sweep time	span = 0 Hz	1 ms to 100 s					
	span > 0 Hz	20 ms to 1000 s, min. 20 ms/600 MHz					
Bandwidths							
Resolution bandwidths (-3 dB)	1145.5850.13	1, 3, 10, 30, 100, 200, 300 kHz, 1 MHz					
	1145.5850.03/.23, 1145.5850.06/.26	in addition 100 Hz, 300 Hz					
Tolerance	\leq 300 kHz	\pm 5 %, nominal					
	1 MHz	\pm 10 %, nominal					
Resolution bandwidths (-6 dB)	with option R&S®FSH-K3 installed	in addition 200 Hz, 9 kHz, 120 kHz					
Video bandwidths	10 Hz to 1 MHz in 1, 3 steps						

		R&S®FSH3	R&S®FSH6
Amplitude			
Display range		average noise level displayed to +20 dBm	
Maximum permissible DC voltage at RF input (does not correspond to test voltage)		50 V/80 V ¹⁾	
Maximum power		20 dBm, 30 dBm (1 W) for max. 3 minutes	
Intermodulation-free dynamic range	third-order IM products, 2 × -20 dBm, reference level = -10 dBm	66 dB (+13 dBm third-order intercept, TOI)	
Displayed average noise level 10 MHz to 3 GHz 3 GHz to 5 GHz 5 GHz to 6 GHz	resolution bandwidth 1 kHz, video bandwidth 10 Hz, reference level ≤ -30 dBm	<-105 dBm, typ. -114 dBm – –	<-105 dBm, typ. -112 dBm <-105 dBm, typ. -110 dBm <-96 dBm, typ. -102 dBm
with preamplifier 10 MHz to 2.5 GHz 2.5 to 3 GHz 3 GHz to 5 GHz 5 GHz to 6 GHz	only models 1145.5850.03 ²⁾ , 1145.5850.23, 1145.5850.06 and 1145.5850.26	<-120 dBm, typ. -125 dBm <-115 dBm, typ. -120 dBm – –	<-120 dBm, typ. -125 dBm <-115 dBm, typ. -120 dBm <-115 dBm, typ. -120 dBm <-105 dBm, typ. -110 dBm
Inherent spurious	reference level ≤ -20 dBm, f > 30 MHz, RBW ≤ 100 kHz	<-80 dBm	<-80 dBm
Input-related spurious Carrier offset > 1 MHz 2nd harmonic Signal frequency -2.0156 GHz	mixer level -40 dBm up to 3 GHz 3 GHz to 6 GHz signal frequencies 2 GHz to 3.2 GHz	<-70 dBc (nominal) – typ. <-60 dBc typ. <-55 dBc	<-70 dBc (nominal) <-64 dBc (nominal) typ. <-60 dBc typ. <-55 dBc
Level display			
Reference level		-80 dBm to +20 dBm in steps of 1 dB	
Display range		100 dB, 50 dB, 20 dB, 10 dB, linear	
Display units Logarithmic Linear		dBm, dB μ V, dBmV with transducer also dB μ V/m and dB μ A/m μ V, mV, V, nW, μ W, mW, W with transducer also V/m, mV/m and μ V/m	
Traces		1 trace and 1 memory trace	
Detectors		auto peak, maximum peak, minimum peak, sample, rms	
	with option R&S®FSH-K2 installed	in addition average and quasi-peak	
Level measurement error	frequency > 1 MHz, at reference level down to 50 dB, 20 °C to 30 °C	<1.5 dB, typ. 0.5 dB	


¹⁾ 80 V valid as of serial number 100900 (model 1145.5850.03) or 101600 (model 1145.5850.13); model 1145.5850.23 all serial numbers.

²⁾ As of serial number 100900 and firmware version 6.0 or higher.


		R&S®FSH3	R&S®FSH6	
Marker				
Number of markers or delta markers				
Marker functions		max. 6		
Marker displays		peak, next peak, minimum, center = marker frequency, reference level = marker level, all markers to peak		
Trigger		normal (level), noise marker, frequency counter (count)		
Audio demodulation		free run, video, external		
Inputs				
RF input		N female		
Input impedance		50 Ω		
VSWR	10 MHz to 3 GHz 10 MHz to 6 GHz	typ. 1.5 –	– typ. 1.5	
Trigger/external reference input		BNC female, selectable		
Trigger voltage		TTL		
Reference frequency		10 MHz		
Required level	from 50 Ω	10 dBm		
Outputs				
AF output		3.5 mm mini jack		
Output impedance Open-circuit voltage		100 Ω adjustable up to 1.5 V		
Tracking generator	only models 145.5850.13, 1145.5850.23 and 1145.5850.26			
Frequency range		5 MHz to 3 GHz	5 MHz to 6 GHz	
Output level	model 1145.5850.13 model 1145.5850.23 model 1145.5850.26 f < 3 GHz f > 3 GHz	–20 dBm (nominal) 0 dBm/-20 dBm, selectable	–10 dBm (nominal) –20 dBm (nominal)	
Output impedance		50 Ω, nominal		
Interfaces				
RS-232-C optical interface				
Baud rate		1200, 2400, 9600, 19200, 38400, 57600, 115200 baud		
Power sensor		7-contact female (type Binder 712)		

		R&S®FSH 3	R&S®FSH 6
Accessories			
Power Sensors R&S FSH-Z1 and R&S FSH-Z18			
Frequency range			
R&S FSH-Z1		10 MHz to 8 GHz	
R&S FSH-Z18		10 MHz to 18 GHz	
VSWR 10 MHz to 30 MHz 30 MHz to 2.4 GHz 2.4 GHz to 8 GHz 8 GHz to 18 GHz		<1.15	
		<1.13	
		<1.20	
		<1.25	
Maximum input power	average power peak power (<10 µs, 1 % duty cycle)	400 mW (+26 dBm) 1 W (+30 dBm)	
Measurement range		200 pW to 200 mW (-67 dBm to +23 dBm)	
Signal weighting		average power	
Effect of harmonics Effect of modulation		<0.5 % (0.02 dB) at harmonic ratio of 20 dBc <1.5 % (0.07 dB) for continuous digital modulation	
Absolute measurement uncertainty	sine signals, no zero offset		
10 MHz to 8 GHz	15 °C to 35 °C 0 °C to 50 °C	<2.5 % (0.11 dB) <4.5 % (0.19 dB)	
8 GHz to 18 GHz	15 °C to 35 °C 0 °C to 50 °C	<3.5 % (0.15 dB) <5.2 % (0.22 dB)	
Zero offset after zeroing		<150 pW	
Dimensions		48 mm x 31 mm x 170 mm, connecting cable 1.5 m	
Weight		<0.3 kg	
Directional Power Sensor R&S FSH-Z44			
Frequency range		200 MHz to 4 GHz	
Power measurement range		30 mW to 120 W (300 W with unmodulated envelope)	
VSWR referenced to 50 Ω 200 MHz to 3 GHz 3 GHz to 4 GHz		<1.07 <1.12	
Power-handling capacity	depending on temperature and matching (see diagram below)	120 W to 1000 W	
Insertion loss 200 MHz to 1.5 GHz 1.5 GHz to 4 GHz		<0.06 dB <0.09 dB	
Directivity 200 MHz to 3 GHz 3 GHz to 4 GHz		>30 dB >26 dB	
Signal weighting		average power	
Measurement uncertainty	sine signals, 18 °C to 28 °C, no zero offset		
200 MHz to 300 MHz 300 MHz to 4 GHz		4 % of measured value (0.17 dB) 3.2 % of measured value (0.14 dB)	

		R&S®FSH3	R&S®FSH6	
Zero offset	after zeroing	± 4 mW		
Range of typical measurement error with modulation	if standard is selected on R&S FSH3	0 % of measured value (0 dB) ±3 % of measured value (±0.13 dB) ±1 % of measured value (±0.04 dB) ±2 % of measured value (±0.09 dB) ±2 % of measured value (±0.09 dB) ±2 % of measured value (±0.09 dB)		
Temperature coefficient		0.40 %/K (0.017 dB/K) 0.25 %/K (0.011 dB/K)		
Matching measurement range		0 dB to 23 dB 0 dB to 20 dB		
VSWR		>1.15 >1.22		
Minimum forward power	specs met from 0.2 W	0.03 W		

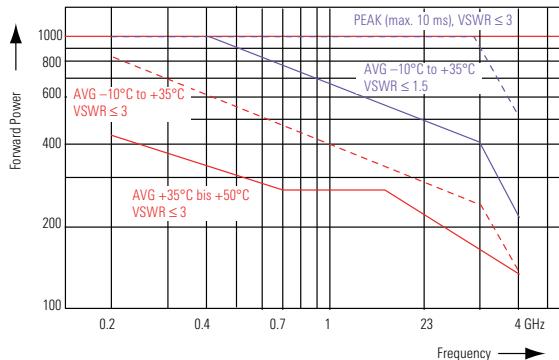

Power-handling capacity

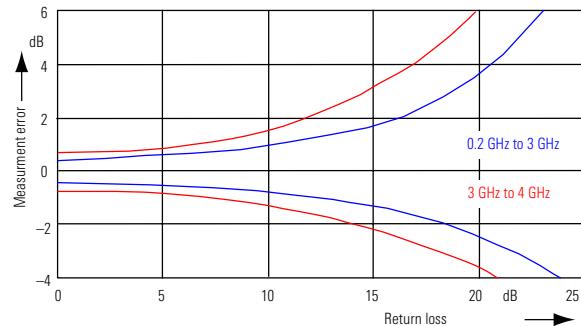


Limits of measurement error for matching measurements


Dimensions	120 mm x 95 mm x 39 mm, connecting cable 1.5 m	
Weight	0.65 kg	

R&S®FSH3			R&S®FSH6
VSWR Bridge and Power Divider R&S FSH-Z2			
Frequency range		10 MHz to 3 GHz	
Impedance		50 Ω	
VSWR bridge			
Directivity 10 MHz to 1 GHz		typ. 30 dB	
1 GHz to 3 GHz		typ. 25 dB	
Directivity, corrected 10 MHz to 3 GHz	option R&S FSH-K2	typ. 43 dB	
Return loss at test port		typ. 20 dB	
Return loss, corrected	option R&S FSH-K2	typ. 35 dB	
Insertion loss		typ. 9 dB	
Power divider			
Return loss at test port		typ. 20 dB	
Connectors			
Generator input/RF output		N male	
Test port		N female	
Control interface		7-contact connector (type Binder)	
Calibration standards			
Short/open		N male	
50 Ω load		N male	
Impedance		50 Ω	
Return loss	up to 3 GHz	>43 dB	
Power-handling capacity		1 W	
General data			
Power consumption		500 mW (nominal)	
Dimensions (W x H x D)		169 mm x 116 mm x 30 mm	
Weight		485 g	
Distance-to-Fault Measurement R&S FSH-B1 (only model 1145.5850.13, 1145.5850.23 or 1145.5850.26)			
Display		301 pixels	
Maximum resolution, distance to fault	maximum zoom	cable length/1023 pixels	
Display range Return loss VSWR	with option R&S®FSH-K2	10, 5, 2, 1 dB/div, linear 1-2 and 1-6 in addition 1-1.2 and 1-1.5	
Cable length	depending on cable attenuation	3 m to max. 1000 m	
Maximum permissible spurious signal		1st mixer 1 dB compression point typ. +10 dBm IF overload at reference level typ. +8 dB	

		R&S®FSH3	R&S®FSH6	
Transmission measurements (only with R&S FSH3 models 1145.5850.13, 1145.5850.23 and R&S FSH6 model 1145.5850.26)				
Frequency range		5 MHz to 3 GHz	5 MHz to 6 GHz	
Dynamic range				
10 MHz to 2.2 GHz	scalar mode vector mode, option R&S®FSH-K2	typ. 60 dB typ. 80 dB	typ. 80 dB typ. 90 dB	
2.2 GHz to 3 GHz	scalar mode vector mode, option R&S FSH-K2	typ. 50 dB typ. 65 dB	typ. 70 dB typ. 85 dB	
3 GHz to 5 GHz	scalar mode vector mode, option R&S®FSH-K2		typ. 40 dB typ. 55 dB	
5 to 6 GHz	scalar mode vector mode, option R&S®FSH-K2		typ. 35 dB typ. 50 dB	
Reflection measurements (only with R&S®FSH3 model 1145.5850.13 or 1145.5850.23, R&S®FSH6 model 1145.5850.26 and R&S®FSH-Z2)				
Frequency range		10 MHz to 3 GHz	10 MHz to 3 GHz	
Display range of return loss		10, 20, 50, 100 dB, selectable		
VSWR display range		1-2 and 1-6, selectable, with option R&S®FSH-K2 also 1-1.2 and 1-1.5		
Measurement uncertainty		see diagram		

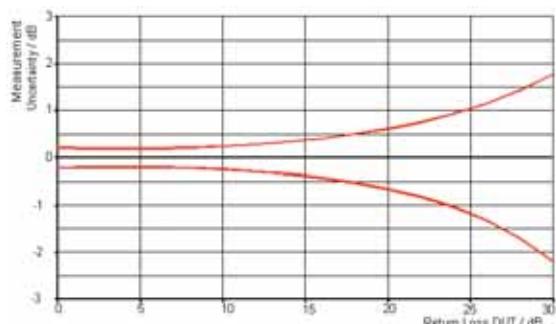

Measurement uncertainty with vector measurements,
(option R&S®FSH-K2)

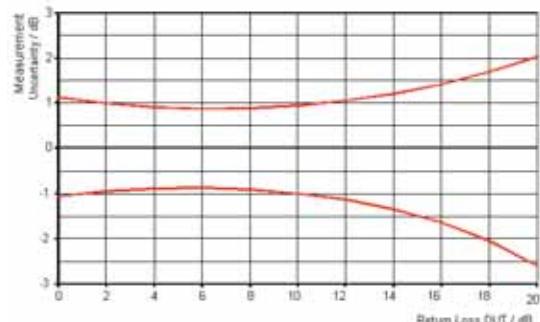

Measurement uncertainty with scalar measurements

General data		
Display	14 cm (5.7") LC color display	
Resolution	320 x 240 pixels	
Memory	CMOS RAM	
Settings and traces	100	
Environmental conditions		
Temperature		
Operating temperature range R&S®FSH3 powered from internal battery	0 °C to 50 °C	
R&S®FSH3 powered from AC power supply	0 °C to 40 °C	
Storage temperature range	−20 °C to +60 °C	
Battery charging mode	0 °C to 40 °C	
Climatic conditions		
Relative humidity	95 % at 40 °C (EN 60068)	
IP class of protection	51	
Mechanical resistance		
Vibration, sinusoidal	complies with EN 60068-2-1, EN 61010-1 5 Hz to 55 Hz: max 2 g, 55 Hz to 150 Hz: 0.5 g constant, 12 minutes per axis	
Vibration, random	complies with EN 60068-2-64, 10 Hz to 500 Hz, 1.9 g rms, 30 minutes per axis	
Shock	complies with EN 60068-2-27, 40 g shock spectrum	
RFI suppression	complies with EMC directive of EU (89/336/EEC) and German EMC legislation	
Immunity to radiated interference Level display for 10 V/m (ref. level ≤ -10 dBm)	10 V/m	
Input frequency	<-75 dBm (nominal)	
IF	<-85 dBm (nominal)	
Other frequencies	< displayed noise level	
Power supply		
AC supply	plug-in AC power supply (R&S®FSH-Z33) 100 V AC to 240 V AC, 50 Hz to 60 Hz, 400 mA	
External DC voltage	15 V to 20 V	
Internal battery	NiMH battery, type Fluke BP190 (R&S FSH-Z32)	
Battery voltage	6 V to 9 V	
Operating time with fully-charged battery	4 h with tracking generator off, 3 h with tracking generator on	
Battery charging time	4 h with instrument off	
Lifetime	300 to 500 charging cycles	
Power consumption	typ. 7 W	
Safety	complies with EN 61010-1, UL 3111-1, CSA C22.2 No. 1010-1	
Test mark	VDE, GS, CSA, CSA-NRTL	
Dimensions (W x H x D)	170 mm x 120 mm x 270 mm	
Weight	2.5 kg	

Accessories and ordering information



Ordering information

	Designation	Order No.
Handheld Spectrum Analyzer, 100 kHz to 3 GHz	R&S®FSH3	1145.5850.03
Handheld Spectrum Analyzer, 100 kHz to 3 GHz, with tracking generator	R&S®FSH3	1145.5850.13
Handheld Spectrum Analyzer, 100 kHz to 3 GHz, with tracking generator and preamplifier	R&S®FSH3	1145.5850.23
Handheld Spectrum Analyzer, 100 kHz to 6 GHz, with preamplifier	R&S®FSH3	1145.5850.06
Handheld Spectrum Analyzer, 100 kHz to 6 GHz, with tracking generator and preamplifier	R&S®FSH3	1145.5850.26

Accessories supplied


external power supply, battery pack (built-in), RS-232-C optical cable, headphones, Quick Start manual, CD-ROM with Control Software R&S®FSH View and documentation

Options

	Designation	Order No.
Distance-to-Fault Measurement (includes 1 m cable, R&S®FSH-Z2 required)	R&S®FSH-B1	1145.5750.02
Remote Control via RS-232-C	R&S®FSH-K1	1157.3458.02
Vector Transmission and Reflection Measurements	R&S®FSH-K2	1157.3387.02
Receiver Mode	R&S®FSH-K3	1157.3429.02

Optional accessories

	Designation	Order No.
Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
VSWR Bridge and Power Divider, 10 MHz to 3 GHz (open, short, 50 Ω load)	R&S®FSH-Z2	1145.5767.02
Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
50/75 Ω Matching Pad, 0 MHz to 2700 MHz	R&S®RAZ	0358.5714.02
Spare RF Cable (1 m), connectors N male/N female for R&S®FSH-B1	R&S®FSH-Z20	1145.5867.02
12 V Car Adapter	R&S®FSH-Z21	1145.5873.02
Serial/Parallel Converter	R&S®FSH-Z22	1145.5880.02
Carrying Bag	R&S®FSH-Z25	1145.5896.02
Hardcase	R&S®FSH-Z26	1300.7627.00
Combined Short/Open and 50 Ω Load for VSWR and DTF calibration	R&S®FSH-Z29	1300.7504.02
Spare Short/Open Standard for R&S®FSH-Z2 for VSWR calibration	R&S®FSH-Z30	1145.5773.02
Spare 50 Ω Load Standard for R&S®FSH-Z2 for VSWR and DTF calibration	R&S®FSH-Z31	1145.5780.02
Spare Battery Pack	R&S®FSH-Z32	1145.5796.02
Spare AC Power Supply	R&S®FSH-Z33	1145.5809.02
Spare RS-232-C Optical Cable	R&S®FSH-Z34	1145.5815.02
Spare CD-ROM with Control Software R&S®FSH View and documentation	R&S®FSH-Z35	1145.5821.02
Spare Headphones	R&S®FSH-Z36	1145.5838.02

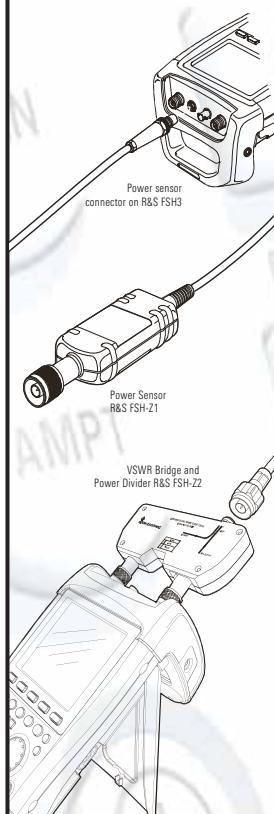



www.rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG · Trade names are trademarks of the owners · Printed in Germany (Pe as)
PD 0758.1593.32 · R&S®FSH · Version 01.00 · May 2004 · Data without tolerance limits is not binding · Subject to change