

E-Series 2-Way 0° Power Divider
5 – 750 MHz

ESML-2-7
V4


Features

- 2-Way
- 0°
- Surface Mount
- Tape and reel packaging available

Description

M/A-COM's ESML-2-7 is a 2 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Parts are packaged in tape & reel.

SM - 24 Package

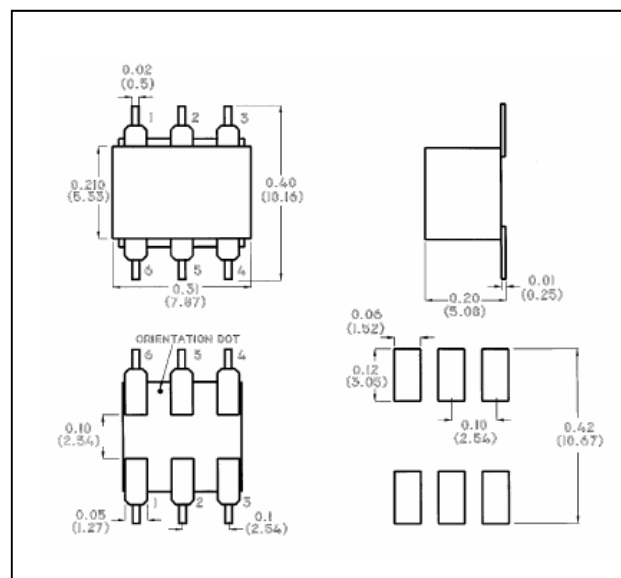

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	5 - 750	MHz	—	—	—
Insertion Loss	$F_L - f_U$	5 - 750	dB	—	0.5	1.0
Isolation	$F_L - f_U$	5 - 750	dB	17	27	—
Amplitude Unbalance	$F_L - f_U$	5 - 750	dB	—	—	1.0
Phase Unbalance	$F_L - f_U$	5 - 750	Degrees	—	—	3
Return Loss	Input Output	5 - 750	dB	17	21	—
		5 - 750	dB	21	18	—

Ordering Information

Part Number	Package
ESML-2-7TR	Tape and Reel (500 piece Reel)

1

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

E-Series 2-Way 0° Power Divider
5 – 750 MHz

ESML-2-7
V4

Absolute Maximum Ratings ¹

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temperature (10 Sec)	260°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Pin Configuration

Pin No.	Function
1	Ground
2	Not Connected
3	Port 2
4	Port 1
5	Not Connected
6	Input