

Version
02.00Mai
2004

Signalanalysator R&S®FSQ

Signalanalyse mit der Dynamik eines High-End-Spektrumanalysators und einer Demodulationsbandbreite bis 120 MHz

- ◆ Bis 3,6 GHz, 8 GHz, 26,5 GHz und 40 GHz
- ◆ 28 MHz Demodulationsbandbreite
- ◆ 60/120 MHz Demodulationsbandbreite optional
- ◆ 16-Msample I- und Q-Speicher
- ◆ I/Q-Daten-Extraktion für z.B. MCPA-Abgleich
- ◆ Spektrum- und Code-Domain-Messungen für
 - 3GPP FDD/HSDPA
 - cdma2000
 - cdma2000 1xEV-DV
 - cdma2000 1xEV-DO
 - TD-SCDMA
- ◆ Spektrum und Modulationsmessungen für
 - GSM/EDGE
 - Bluetooth®
 - WLAN
- ◆ Allgemeine Vektorsignalanalyse
- ◆ Dynamik eines High-End-Spektrumanalysators
 - IP3: typ.+25 dBm
 - 1-dB-Kompression: +13 dBm
 - 84 dB ACLR/3GPP mit Rauschkorrektur
- ◆ Vielseitige Auflösefilter-Charakteristik: Gauß-, FFT-, Kanalfilter, RRC-Filter
- ◆ Komplette Detektorausstattung



ROHDE & SCHWARZ

Zukunftssichere Performance und Bandbreite

Spektrum- und Signalanalyse in einem Gerät

Zukünftige Übertragungsverfahren im Mobilfunk und verwandten Anwendungsgebieten erfordern immer größere Übertragungsbandbreiten für den zunehmenden Datendurchsatz. Daneben werden schon heute oft mehrere Träger einer GSM- oder 3GPP-Basisstation in gemeinsamen Leistungsendstufen verstärkt. Das reduziert den Aufwand und die Kosten, vergrößert aber die zu übertragende Bandbreite. In beiden Fällen werden für Entwicklung und Fertigung Analysebandbreiten benötigt, die über die heutiger Spektrumanalysatoren hinausgehen, bei gleichzeitig hohen Anforderungen an den Dynamikbereich.

Der R&S®FSQ verbindet die herausragenden Spektrumanalysatoreigenschaften und -funktionen des R&S®FSU mit einer auf 28 MHz erweiterten Demodulations- und Analysebandbreite. Damit ist der R&S®FSQ für Anwendungen in Entwicklung und Fertigung von beispielsweise:

- ◆ Wireless LAN (WLAN)
- ◆ 3GPP und GSM-MCPA

bestens ausgestattet.

Mit Applikationsfirmware wie

- ◆ R&S®FS-K5, GSM/EDGE
- ◆ R&S®FS-K72/-K73, 3GPP FDD
- ◆ R&S®FS-K74, HSDPA
- ◆ R&S®FS-K82/-K83/-K84/-K85, cdma2000
- ◆ R&S®FS-K76/-K77, TD-SCDMA

unterstützt der R&S®FSQ zusätzlich Messaufgaben bei 2G-, 2,5G- und 3G-Mobilfunksystemen. Die optionale Erweiterung der I/Q-Demodulationsbandbreite auf 60/120 MHz bereitet den R&S®FSQ bereits heute auf zukünftige Verfahren mit hohem Bandbreitenbedarf vor.

Das Bedienkonzept des R&S®FSQ ist mit dem der Spektrumanalysatoren R&S®FSU und R&S®FSP identisch, einschließlich der GPIB/IEC-Bus-Befehle. Damit bilden diese Geräte eine durchgängige Plattform für unterschiedlichste Anwendungen.

Die R&S®FSQ-Familie

R&S®FSQ 3	20 Hz bis 3,6 GHz
R&S®FSQ 8	20 Hz bis 8 GHz
R&S®FSQ 26	20 Hz bis 26 GHz
R&S®FSQ 40	20 Hz bis 40 GHz

R&S®FSQ – Weltmeister in der Disziplin Spektrumanalyse

Der R&S®FSQ hat die herausragenden HF-Eigenschaften des Spektrumanalysators R&S®FSU

- ◆ 84 dB ACLR bei 3GPP mit Rauschkorrektur
- ◆ 77 dB ACLR bei 3GPP-Mehrträger-signalen (4 benachbarte Träger)
- ◆ IP3 >+20 dBm, typ. +25 dBm
- ◆ 1-dB-Kompressionspunkt +13 dBm
- ◆ Eigenrauschen –158 dBm (1 Hz Bandbreite)
- ◆ Phasenrauschen –160 dBc (1 Hz) in 10 MHz Trägerabstand
- ◆ Phasenrauschen –123 dBc (1 Hz) in 10 kHz Trägerabstand

Damit bietet der R&S®FSQ neben den breitbandigen Demodulationsmöglichkeiten die Dynamik, die für Mehrträgermessungen oder die Messung von Nebenaussendungen an Basisstationen (BTS) erforderlich ist.

Funktionsumfang


Der R&S®FSQ ist mit seinem großen Funktionsumfang auf dem Spektrumanalysatormarkt nahezu ungeschlagen: alle wichtigen Funktionen sind schon im Grundgerät enthalten.

Hochselektive digitale Filter von 10 Hz bis 100 Hz
Schnelle FFT-Filter von 1 Hz bis 30 kHz
Kanalfilter 100 Hz bis 5 MHz
RRC-Filter
1 Hz bis 50 MHz Auflösebandbreite
QP-Detektor & EMI-Bandbreiten 200 Hz, 9 kHz, 120 kHz
2,5 ms Sweep-Zeit im Frequenzbereich
1 µs Sweep-Zeit im Zeitbereich
Messpunktanzahl/Trace wählbar von 155 bis 30001
Zeitselektive Spektrumanalyse mit Gating
GPIB-Schnittstelle, IEEE 488.2
RS-232-C Serial-Interface, 9-polig Sub-D
VGA-Ausgang, 15-polig Sub-D
PC-kompatible Screen-Shots auf Diskette oder Festplatte
Messgeschwindigkeit manuell bis 80 Messungen/s
Messgeschwindigkeit GPIB bis 50/70 Messungen/s
SCPI-kompatibler GPIB-Befehlssatz
R&S®FSE/R&S®FSIQ-kompatibler GPIB-Befehlssatz
Fast ACP-Messung im Zeitbereich
Statistische Messfunktionen CCDF
RMS-Detektor mit 100 dB Dynamikbereich
Transducer-Faktor zur Korrektur von Antennen- oder Kabelfrequenzgängen
2 Jahre Kalibrierintervall
3 Jahre Gewährleistung ¹⁾
Externe Referenz von 1 MHz bis 20 MHz in 1-Hz-Schritten
LAN-Schnittstelle 100BaseT
16-Msample I- und Q-Speicher

¹⁾ Ausgenommen Verschleißteile (z. B. Eichleitung).

Kurzdaten

	R&S® FSQ 3	R&S® FSQ 8	R&S® FSQ 26	R&S® FSQ 40
Frequenzbereich	20 Hz bis 3,6 GHz	20 Hz bis 8 GHz	20 Hz bis 26,5 GHz	20 Hz bis 40 GHz
Referenzfrequenz	Alterung 1×10^{-7} /Jahr, mit Option R&S®FSU-B4: 2×10^{-8}			
Spektrale Reinheit				
Phasenrauschen	typ. -123 dBc (1 Hz) in 10 kHz Trägerabstand			
Störhub	1 Hz			
Sweep-Zeit				
Span >10 Hz	2,5 ms bis 16000 s			
Span 0 Hz (Zero Span)	1 μ s bis 16000 s			
Auflösebandbreiten	10 Hz bis 50 MHz, FFT-Filter: 1 Hz bis 30 kHz, Kanalfilter, EMI-Bandbreiten			
Videobandbreiten	1 Hz bis 10 MHz			
Anzeigebereich	Eigenrauschanzeige bis +30 dBm			
Eigenrauschanzeige (10 Hz RBW)				
1 GHz	typ. -148 dBm	typ. -145 dBm	typ. -146 dBm	typ. -145 dBm
7 GHz	–	typ. -144 dBm	typ. -145 dBm	typ. -143 dBm
13 GHz	–	–	typ. -141 dBm,	typ. -141 dBm,
26 GHz	–	–	typ. -136 dBm	typ. -137 dBm
40 GHz	–	–	–	typ. -131 dBm
Eigenrauschanzeige mit eingeschaltetem Vorverstärker (R&S®FSU-B25), 1 GHz, 10 Hz RBW	-152 dBm	-152 dBm	-152 dBm	-152 dBm
Eigenrauschanzeige mit eingeschaltetem Vorverstärker (R&S®FSU-B23), 26 GHz, 10 Hz RBW	–	–	-140 dBm	–
Trace-Detektoren	Max Peak, Min Peak, Auto Peak, Sample, RMS, Average, Quasi Peak			
Gesamtmessunsicherheit, $f < 3,6$ GHz	0,3 dB			
Linearität der Anzeige	0,1 dB (0 dB bis -70 dB)			

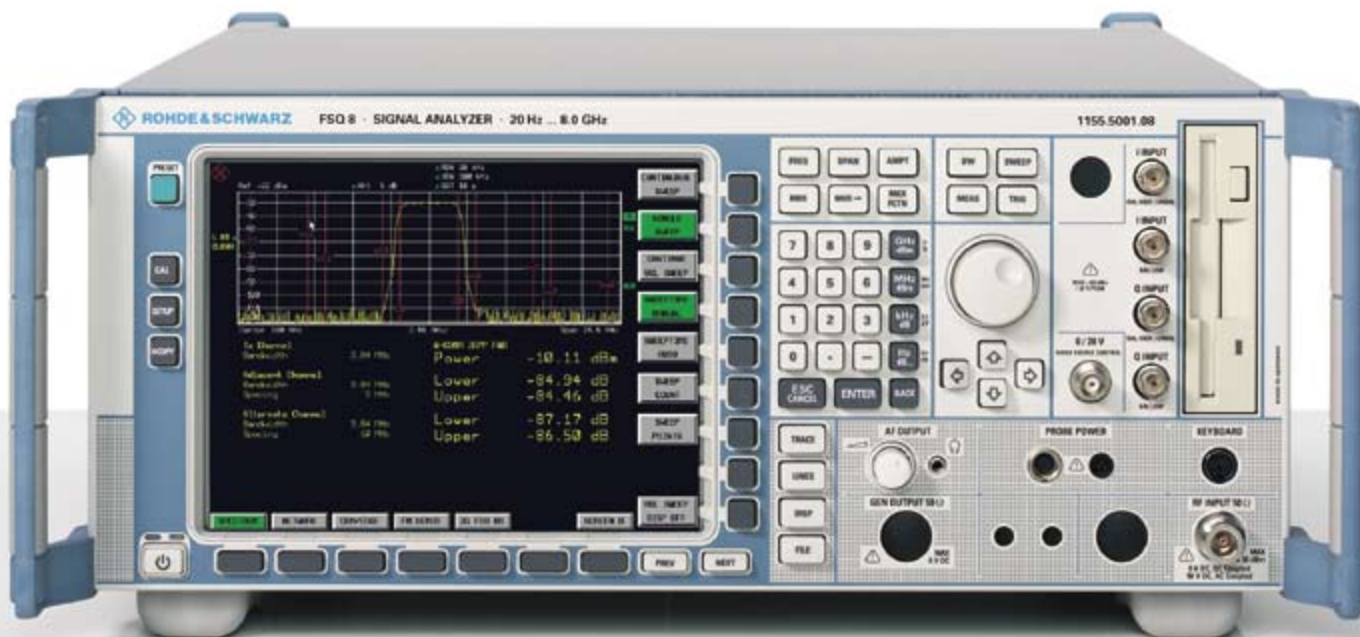


Zukunftssichere Performance und Bandbreite

Signalanalysator mit bis zu 120 MHz Bandbreite


– Daten, die für sich sprechen

Der R&S®FSQ verfügt über ein neu entwickeltes digitales Back-End, das von den Fortschritten der ADC- und ASIC-Entwicklung profitiert hat. Zeitaufwändige Auswerte-Algorithmen sind direkt in Hardware realisierbar – eine Voraussetzung für schnelle Messungen und hohe Genauigkeit.

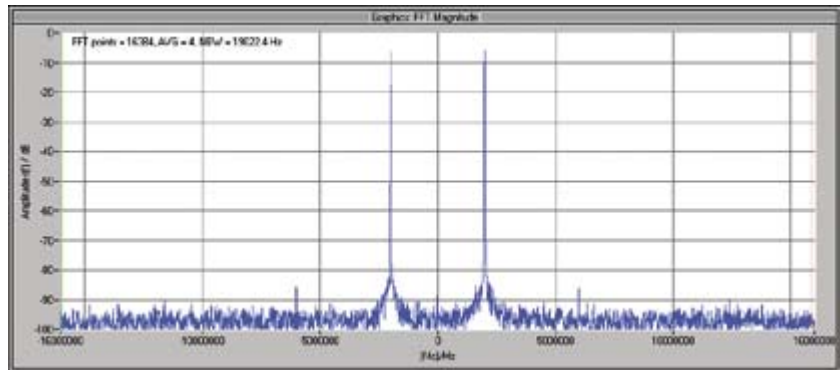

Intermodulationsverzerrungen der I/Q-Daten: Bei Verstärkermessungen ist der verzerrungsfreie Übertragungsbereich besonders wichtig; das Bild zeigt das Intermodulationsverhalten der I/Q-Daten bei einem Zwei-Ton-Signal


	Standard	mit R&S®FSQ-B72
Demodulationsbandbreite $f < 3,6$ GHz $f > 3,6$ GHz	28 MHz	60 MHz 120 MHz
ADC-Auflösung	14 bit	8 bit
Abtastrate, einstellbar	10 kHz bis 81,6 MHz	81,6 MHz bis 326,4 MHz
Third-order-intermodulation	80 dB	typ. 58 dB

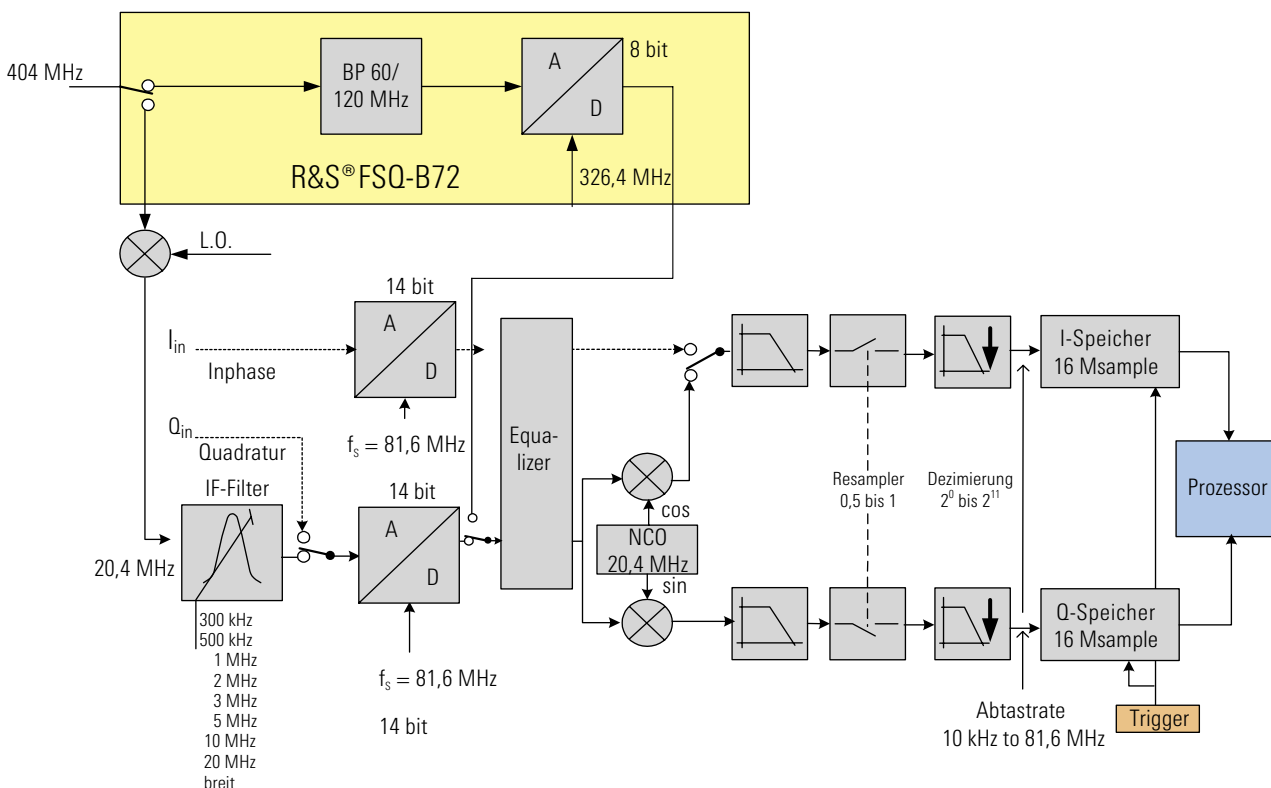


Prinzipieller Aufbau des Vektorsignalanalyseteils im R&S®FSQ

Der R&S®FSQ bestimmt die linearen Verzerrungen im HF- und ZF-Pfad mit einer eingebauten Kalibrierquelle und korrigiert diese on-line durch ein Kompensationsfilter. Im Mikrowellenbereich bei Trägerfrequenzen höher als 3,6 GHz kann darüber hinaus das Bandbreitenbegrenzende YIG-Filter ausgeschaltet werden. Dadurch wird sichergestellt, dass selbst kleinste Modulationsfehler mit niedriger Messunsicherheit gemessen werden.

Die I/Q-Daten können über die IEC-Bus-Schnittstelle oder die serienmäßig eingebaute LAN-Schnittstelle an einen Steuerrechner übertragen und dort für weitere Analysen in Programme wie MatLab importiert werden.

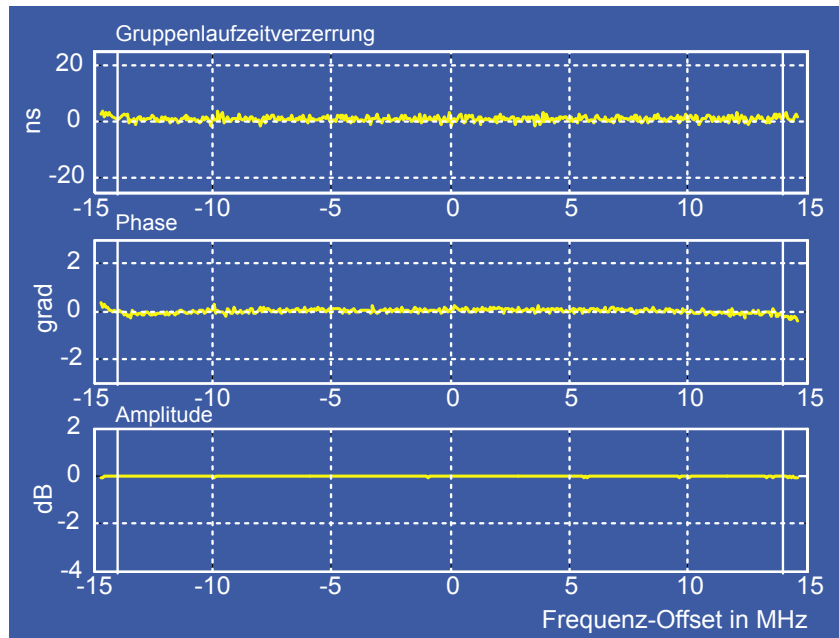

Frequenzgang und Gruppenlaufverzerrungen am Beispiel des 50-MHz-Auflösefilters

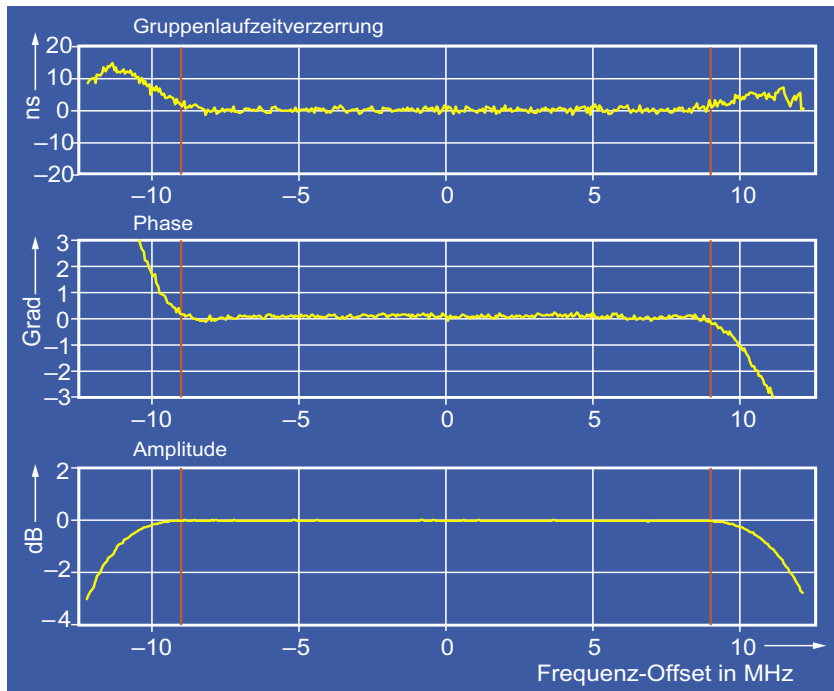

Frequenzgang und Gruppenlaufverzerrungen am Beispiel des 20-MHz-Auflösefilters

Kürzere Entwicklungszeiten durch Funktionsvielfalt, ...

Die Messaufgaben in der Produktentwicklung sind vielfältig. Sie erfordern einen großen Funktionsumfang, wie auch beste Performance auf allen Gebieten, beides bietet der R&S®FSQ.

Umfangreiche Detektorauswahl (Bild 1) zur Anpassung an unterschiedlichste Signaltypen:


- ◆ RMS
- ◆ Auto Peak
- ◆ Max Peak
- ◆ Min Peak
- ◆ Sample
- ◆ Average
- ◆ Quasi Peak (QPK)

Die vielseitigste Auflösungfilter-Charakteristik mit dem weitesten Bandbreitenbereich eines Spektrumanalysators:

- ◆ Standardauflösefilter von 10 Hz bis 50 MHz in 1-, 2-, 3-, 5-er-Schritten
- ◆ FFT-Filter von 1 Hz bis 30 kHz
- ◆ 32 Kanalfilter mit Bandbreiten von 100 Hz bis 5 MHz
- ◆ RRC-Filter für NADC, TETRA und 3GPP
- ◆ EMI-Filter 200 Hz, 9 kHz, 120 kHz

Umfangreiche Auswertemöglichkeiten:

- ◆ Time Domain Power, kombiniert mit den Kanal- oder RRC-Filtern machen aus dem R&S®FSQ einen echten Kanalleistungsmesser (Bild 2)
- ◆ IP3-Marker (Bild 3)
- ◆ Noise-/Phase-Noise-Marker
- ◆ Vielseitige Kanal-/Nachbarkanalleistungsmessfunktion mit großer Auswahl an Standards und freier Konfigurierbarkeit (Bild 4)
- ◆ Split-Screen-Betrieb mit unterschiedlichen Einstellungen
- ◆ CCDF-Messfunktion
- ◆ Peaklist-Marker zur schnellen Suche aller Peaks innerhalb des eingestellten Frequenzbereiches (Spurious-Suche)
- ◆ Multicarrier Kanal-/Nachbarkanalleistungsmessfunktion

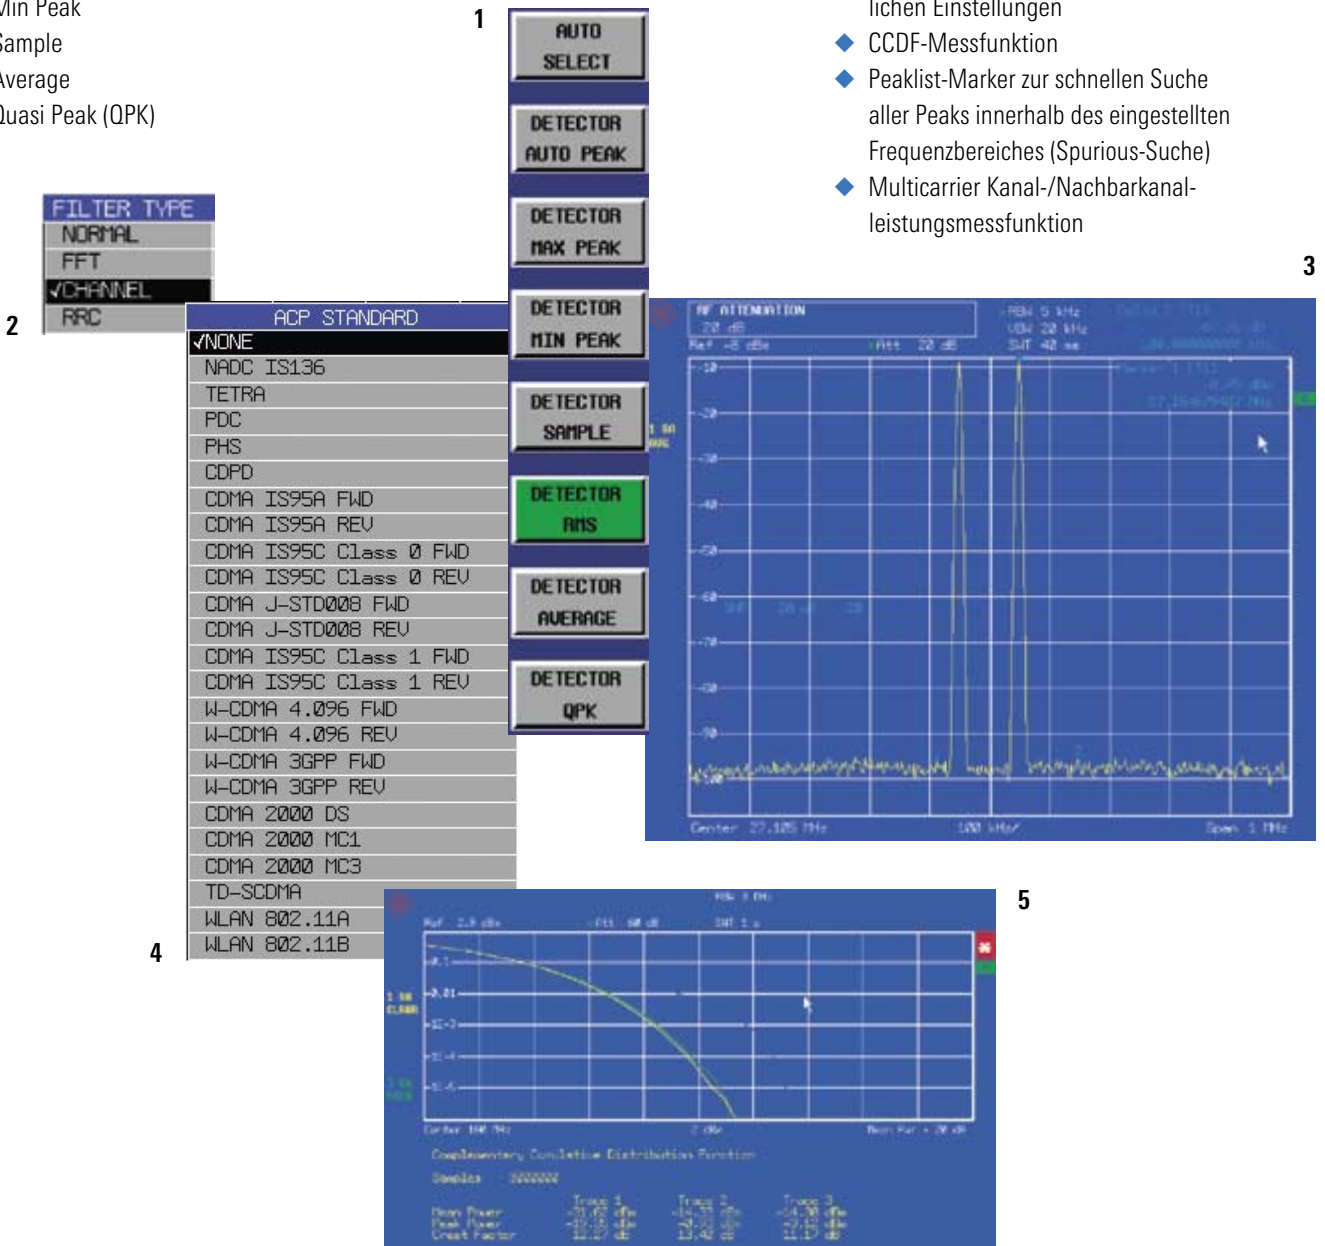



... Dynamik und zukunftsichere Performance

Ob in der Synthesizerentwicklung oder beim Design von Frontends, zusätzliche Applikationen machen den R&S®FSQ noch vielseitiger bei einfacher Handhabung.

Die Phasenrauschmesssoftware **R&S®FS-K4** automatisiert nicht nur die Messung über einen kompletten Offset-Frequenzbereich, sondern errechnet aus dem Verlauf des Phasenrauschens auch den Störhub. Zusammen mit dem sehr niedrigen Eigenphasenrauschen des R&S®FSQ erübrigt sich in vielen Fällen die Anschaffung eines eigenen und meist umständlich zu bedienenden Phasenrauschmesssystems.


Mit der Applikationsfirmware **R&S®FS-K30** wird aus dem R&S®FSQ ein Rauschzahlmessplatz. Verstärker oder umsetzende Messobjekte können im gesamten Frequenzbereich des R&S®FSQ einfach vermessen und optimal dokumentiert werden. Die hohe Linearität und die genauen Leistungsmessroutinen sorgen für genaue und wiederholbare Messergebnisse – ein separater Rauschzahlmesser wird damit überflüssig.

Phasenrauschmessung mit der Messsoftware R&S®FS-K4

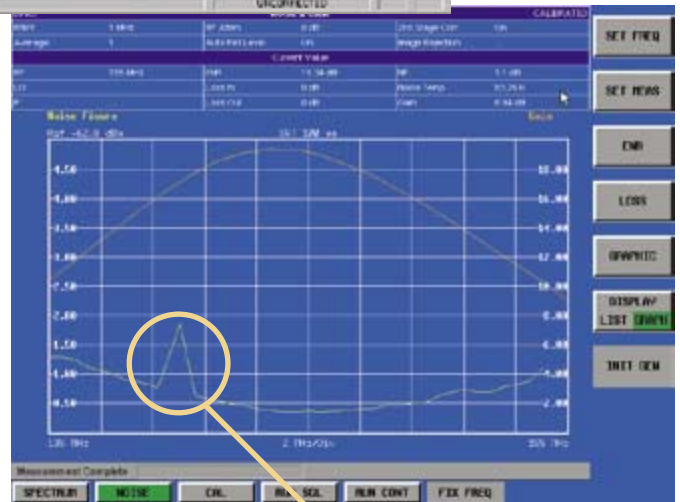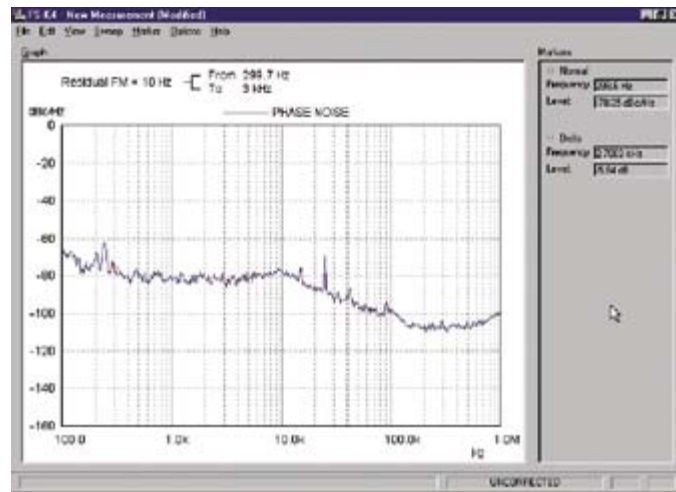

Rauschzahlmessung mit der Applikationsfirmware R&S®FS-K30

Schnelle und einfache Analyse von Störungen. Mit der Spektrumanalysator-Grundfunktion kann die Ursache – ob Eigenschwingung oder Einstrahlung – ohne zusätzliche Messmittel gefunden werden

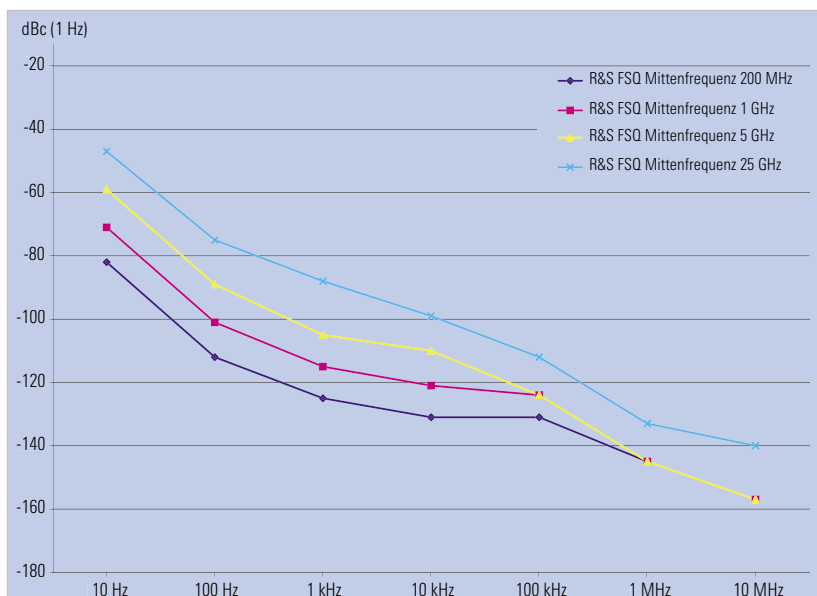


Phasenrauschen des R&S®FSQ bei verschiedenen Mittenfrequenzen

Kürzere Entwicklungszeiten durch Funktionsvielfalt, ...

Messung des Frequenzhubs nach dem Einschwingen


Die Option **R&S® FS-K7** ergänzt den R&S®FSQ um einen universellen Messdemodulator für analoge Modulation AM, FM und ϕ M. Damit kann neben dem Frequenzhub z. B. auch das Frequenzeinschwingen von Oszillatoren bestimmt werden. Die Analyse des demodulierten Signals ist mit FFT möglich. Zusätzlich werden noch THD und SINAD gemessen.

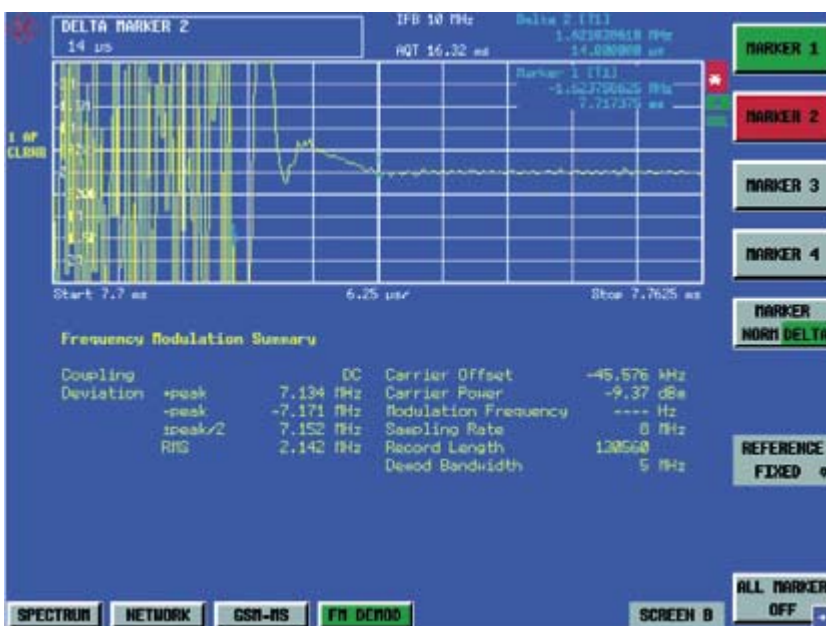

Software-Optionen und Funktionserweiterungen für allgemeine Anwendungen

R&S®FS-K4	Phasenrauschmessungen (Windows-Software)
R&S®FS-K7	AM/FM/ ϕ M-Messdemodulator mit Messung der Modulationsfrequenz, THD, SINAD, Spektrum (FFT) des demodulierten Signals
R&S®FS-K9	Messungen mit Leistungsmesskopf (unterstützt R&S®NRP-Z11/-Z21 mit R&S®NRP-Z4-USB-Adapter)
R&S®FS-K30	Rauschzahlmessungen (Applikationsfirmware) fernsteuerbar
R&S®FSQ-K70	Allgemeine Vektorsignalanalyse, FSK, MSK, BPSK, bis 256 QAM, Symbolraten bis 25 Msymbol/s (bis zu 81,6 Msymbol/s mit R&S®FSQ-B72)

... Dynamik und zukunftssichere Performance

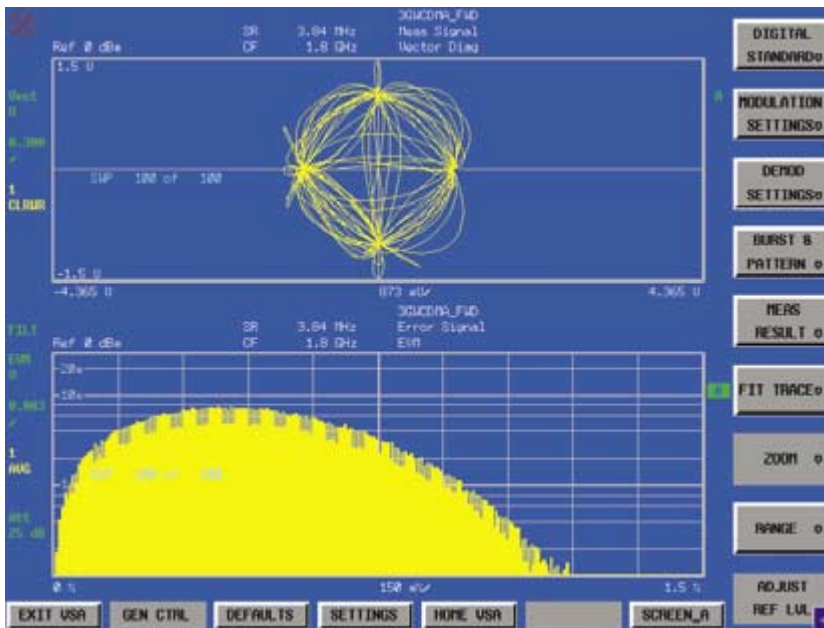

Komfortable Analyse mit dem Vektordiagramm. Der obere Teil des Bildschirms zeigt das gesamte Konstellationsdiagramm, der untere Teil die Wahrscheinlichkeitsverteilung des Vektorfehlers.

Universelle Analyse von digitalen Funksignalen


Die Option Allgemeine Vektorsignalanalyse **R&S®FSQ-K70** erweitert den R&S®FSQ um universelle Demodulations- und Analysefunktionen für digitale Funksignale bis auf Bitstromebene.

Unterstützte Mobilfunkstandards

- ◆ GSM und EDGE
- ◆ WCDMA-QPSK
- ◆ cdma2000-QPSK
- ◆ Bluetooth®
- ◆ TETRA
- ◆ PDC
- ◆ PHS
- ◆ DECT
- ◆ NADC

Unterstützte digitale Modulationsverfahren

- ◆ BPSK, QPSK, OQPSK
- ◆ $\pi/4$ DQPSK
- ◆ 8PSK, D8PSK, $3\pi/8$ 8PSK
- ◆ (G)MSK
- ◆ 2, 4, (G)FSK
- ◆ 16, 32, 64, 128, 256 (D)QAM

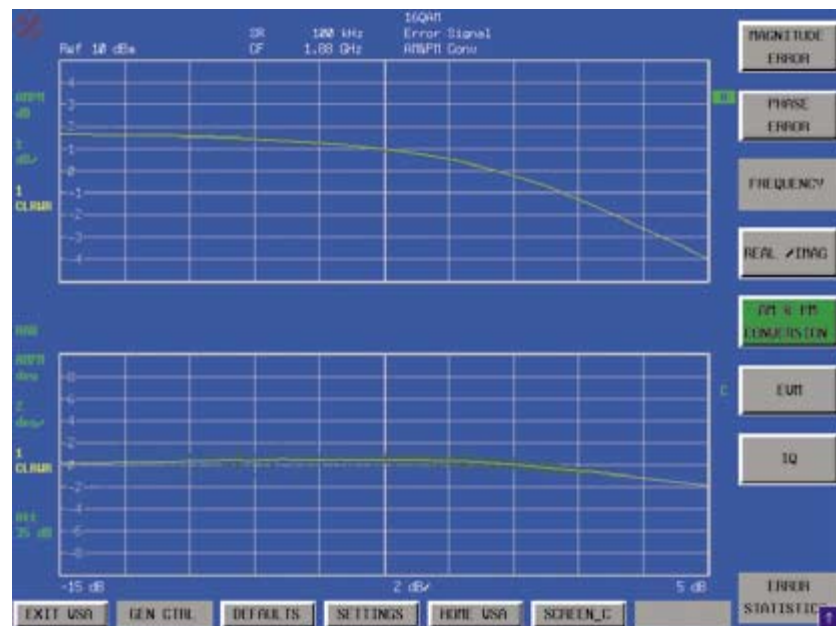

Beispiel einer AM/AM und AM/AM-Verzerrung mit 16QAM-Signal. Das Bild zeigt die AM/AM- und die AM/AM-Konversionskurve des gleichen Signals.

Optimale Ergebnisdarstellung

- ◆ Inphase- und Quadratursignale über der Zeit
- ◆ Betrag und Phase über der Zeit
- ◆ Augendiagramm
- ◆ Vektordiagramm
- ◆ Konstellationsdiagramm
- ◆ Tabelle mit Modulationsfehlern
- ◆ Demodulierter Bitstrom

- ◆ Statistische Auswertung der Modulationsparameter
- ◆ Verstärkerverzerrungsmessungen

Symbolrate 25 Msymbol/s

- ◆ mit R&S®FSQ-B72 81,6 Msymbol/s

I/Q-Demodulationsbandbreite 28 MHz

- ◆ mit R&S®FSQ-B72 60 MHz bzw. 120 MHz


Von GSM zu UMTS ...

Von GSM zu UMTS – zukunftsicher für die 3. Mobilfunkgeneration


In Verbindung mit dem hohen Dynamikbereich ist der R&S®FSQ das optimale Hilfsmittel, um Basisstationen zu entwickeln und zu testen. Serienmäßige Eigenschaften wie eine Messunsicherheit von <0,3 dB, Gated-Sweep-Funktion oder der IF-Power-Trigger unterstreichen dies.

Schon im Grundgerät sind darüber hinaus die Funktionen und Eigenschaften enthalten, die für Entwicklung, Verifikation und Fertigung von Mobilfunksystemen der 3. Generation notwendig sind:

- ◆ RMS-Detektor, den es bei Analysatoren von Rohde & Schwarz seit Jahren serienmäßig gibt und der genaue Leistungsmessung unabhängig von der Signalform ermöglicht. RMS-Leistungsmessung ist in den meisten Messungen gemäß 3GPP-Spezifikationen vorgeschrieben
- ◆ ACP-Messfunktion für 3GPP mit RRC-Filter mit 3,84 MHz Bandbreite zur normgerechten Nachbarkanalleistungsmessung, mit einer Eigengrenze bei 77 dB bzw. 84 dB
- ◆ Dedizierte CCDF-Messfunktion, die die Wahrscheinlichkeit misst, mit der die momentane Leistung eines Signals die mittlere Leistung überschreitet. CCDF-Messung ist ein unverzichtbares Hilfsmittel zur Ermittlung der optimalen Sendeleistung bei CDMA-Signalen unter der Annahme, dass Clipping in bekannten kurzen Zeitintervallen tolerierbar ist

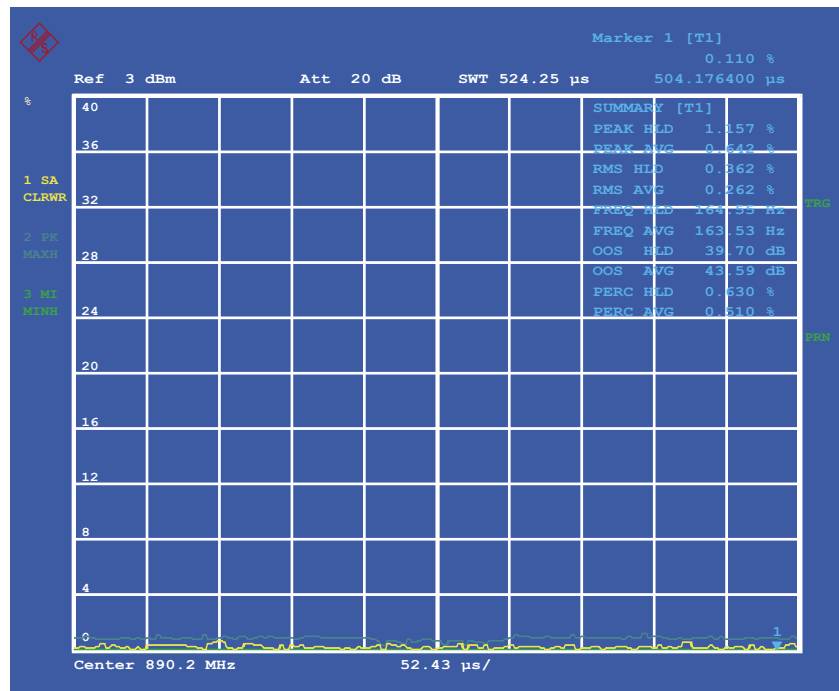


Messung von Modulation Accuracy an einem EDGE-Burst

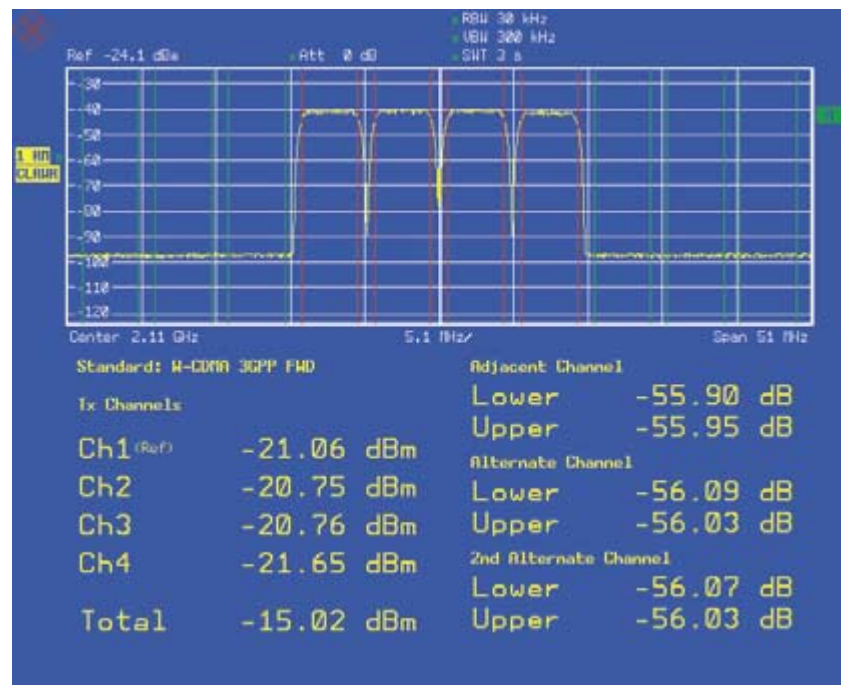

ACP Messung mit 4 Kanälen

Mit der GSM/EDGE-Applikationsfirmware **R&S®FS-K5** bietet der R&S®FSQ alle notwendigen Funktionen, um HF- und Modulationsmessungen an GSM-Systemen durchzuführen – EDGE, die Generation 2.5, ist in der Option R&S®FS-K5 bereits enthalten.


- ◆ Phasen-/Frequenzfehler für GSM
- ◆ Modulationsgenauigkeit für EDGE mit:
 - EVM und ETSI-konformen Bewertungsfiltren
 - OOS
 - 95th percentile
 - Power vs. Time mit Synchronisation zur Midamble
 - Modulationsspektrum
 - Transientenspektrum

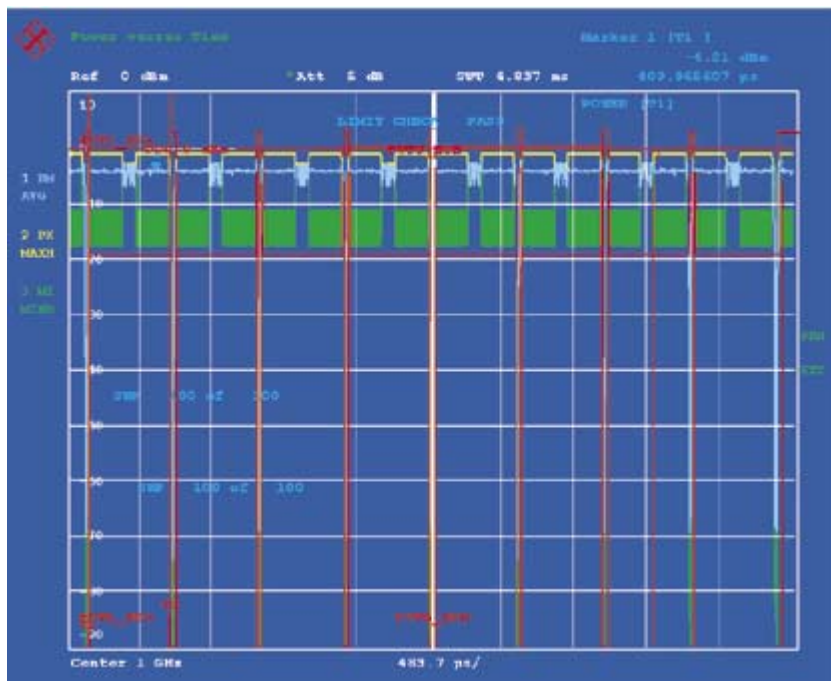

Gleichzeitige Messung von Power versus Time an einem EDGE-Signal mit acht Slots

Messungen an Bluetooth®-Signalen (R&S®FS-K8)

- ◆ Messfunktionserweiterung gemäß *Bluetooth*-HF-Test-Spezifikation (*Bluetooth* SIG) Rev. 0.91.
- ◆ Messfunktionen
 - Ausgangsleistung
 - Nachbarkanalleistung (ACP)
 - Modulationseigenschaften
 - Initial Carrier Frequency Tolerance (ICTF)
 - Trägerfrequenzabweichung
- ◆ Gleichzeitige Darstellung von Messkurven und allen numerischen Messergebnissen
- ◆ Automatische Grenzwertüberwachung
- ◆ Ideal für Produktion und Entwicklung von *Bluetooth*-Modulen

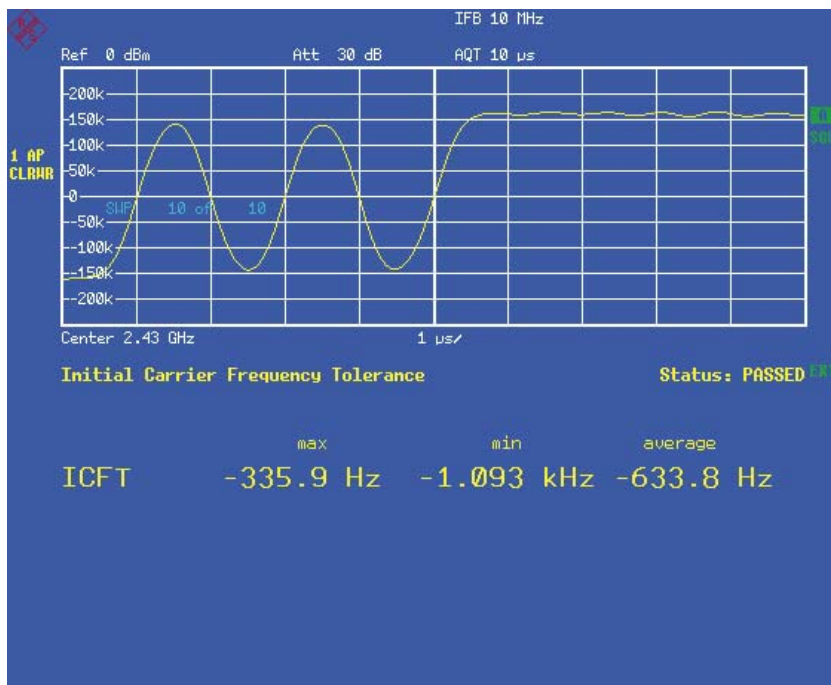


Messung der Initial Carrier Frequency Tolerance an einem Bluetooth-Signal mit R&S®FS-K8

Die Bluetooth-Wortmarke und -Logos sind Eigentum von Bluetooth SIG, Inc., und ihre Verwendung ist für Rohde & Schwarz lizenziert.

... zukunftssicher für die 3. Mobilfunkgeneration

Normgerechte 3GPP-Modulations- und Code-Domain-Power-Messungen

- ◆ Erweiterung um Messfunktionen gemäß 3GPP-Spezifikationen für den FDD- und TDD-LCR-Modus
- ◆ Hohe Messgeschwindigkeit von 4 s/Messung für 3 GPP-BTS-Signale
- ◆ Code Domain Power und CPICH-Leistung
- ◆ Code Domain Power und rho (CDMA2000/3GPP2)
- ◆ EVM und PCDE
- ◆ Code Domain Power vs. Slot
- ◆ EVM/Code-Kanal
- ◆ Spectrum Emission Mask
- ◆ Constellation (Symbol, Composite)

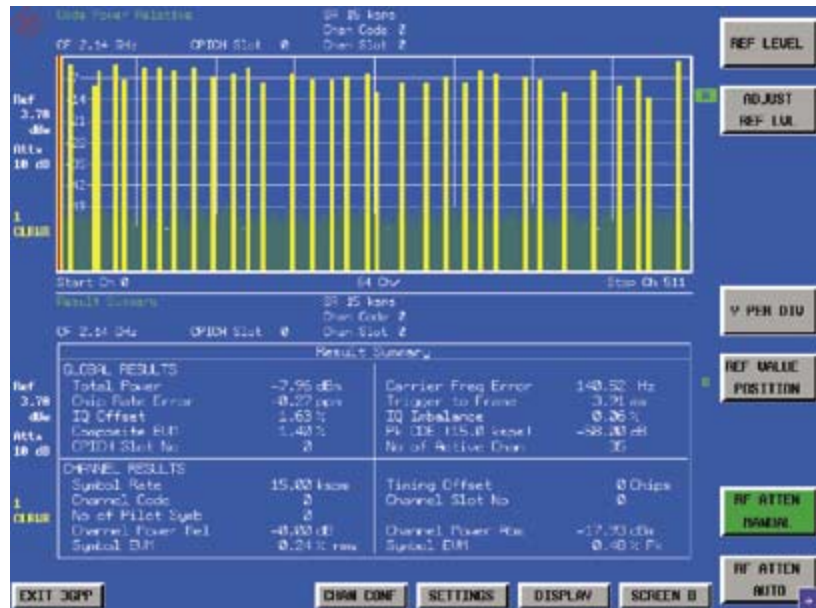


WCDMA-Code-Domain-Power-Messung mit R&S® FSQ und R&S® FS-K72

Firmware-Optionen für Mobilfunkanwendungen

Typ	Bezeichnung und Anwendung
R&S®FS-K5	Modulations- und Spektrummessungen an GSM/EDGE-Basisstations- und Mobile-Signalen
R&S®FS-K8	Sendermessungen gemäß <i>Bluetooth</i> -Standard
R&S®FS-K9	Messungen mit Leistungsmesskopf (unterstützt R&S®NRP-Z11/-Z21 mit R&S®NRP-Z4-USB-Adapter)
R&S®FS-K30	Rauschzahlmessungen (Applikationsfirmware) wie R&S®FS-K3, aber zusätzlich fernsteuerbar
R&S®FS-K72	Modulations- und Code-Domain-Power-Messungen nach 3 GPP TS 24.141 an Basisstationssignalen (NodeB)
R&S®FS-K73	Modulations- und Code-Domain-Power-Messungen nach 3 GPP TS 25.121 an Mobilstationssignalen (UE)
R&S®FS-K74	HSDPA-Erweiterung für R&S®FS-K72
R&S®FS-K76	Modulations- und Code Domain Power Messungen an TD-SCDMA Basisstationssignalen
R&S®FS-K77	Modulations- und Code Domain Power Messungen an TD-SCDMA Mobilstationssignalen (UE)
R&S®FS-K82	Modulations- und Code-Domain-Power-Messungen an Basisstationssignalen nach CDMA2000/3 GPP2 (auch für Messungen an IS-95/cdmaOne Signalen einsetzbar)
R&S®FS-K83	Modulations- und Code-Domain-Power-Messungen an CDMA2000/1xEV-DO Mobilstationssignalen (UE)
R&S®FS-K84	Modulations- und Code-Domain-Power-Messungen an Basisstationssignalen nach 1xEV-DO
R&S®FS-K85	Modulations- und Code Domain Power Messungen an Mobilstationssignalen nach cdma2000-1xEV-DO (UE)
R&S®FSQ-K91	Modulations- und Spektrummessungen an WLAN-Signalen nach 802.11 a/b/g/j

WLAN-Messungen

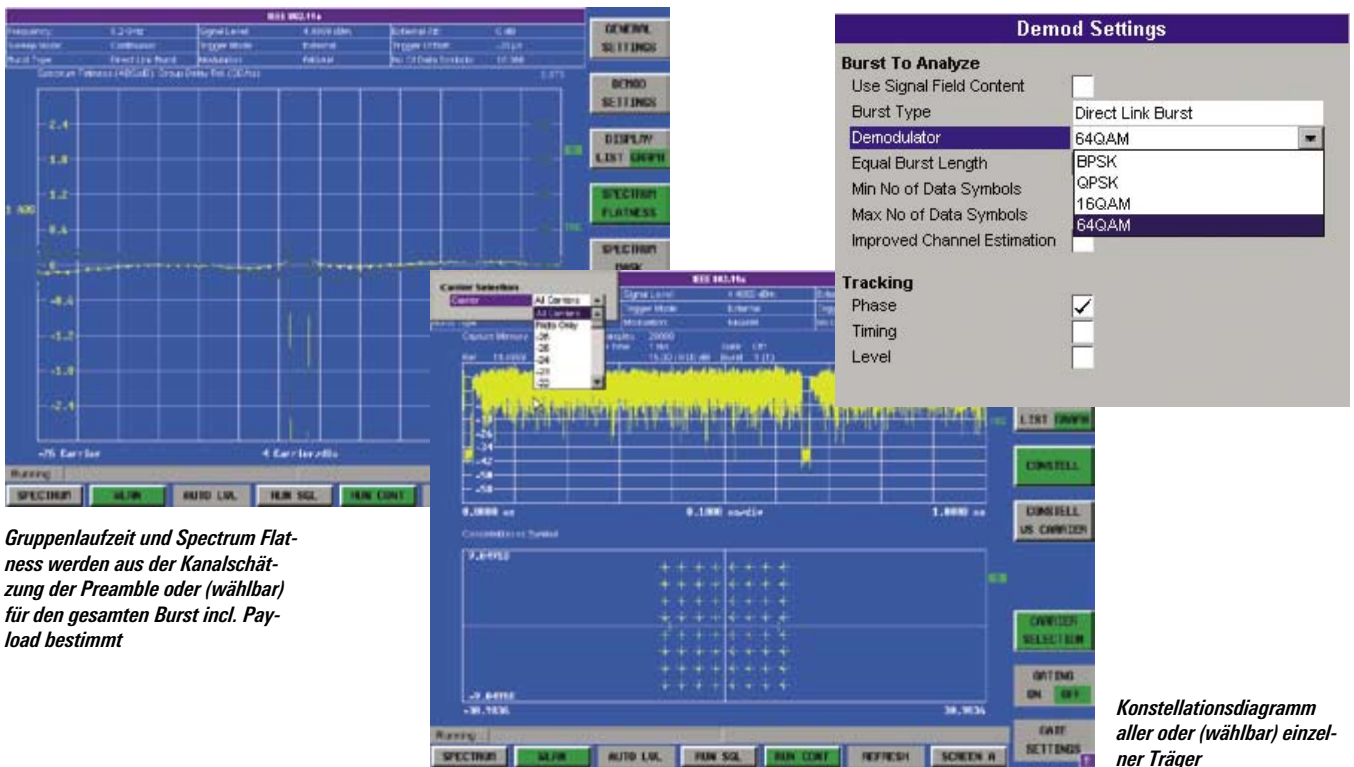

Gruppenlaufzeit und Spectrum Flatness werden aus der Kanalschätzung der Preamble oder (wählbar) für den gesamten Burst incl. Payload bestimmt

Konstellationsdiagramm aller oder (wählbar) einzelner Träger

ODFM (802.11a/g/j)	DSSS (802.11b)
Modulationsformate	
ODFM mit BPSK, QPSK, 16QAM, 64QAM	DBPSK, DQPSK, CCK, short PLCP, long PLCP
Modulationsmessungen	
Konstellationsdiagramm	Konstellationsdiagramm
Konstellationsdiagramm pro OFDM-Träger	–
I/Q-Offset und I/Q-Imbalance	I/Q-Offset und I/Q-Imbalance
Träger- und Symbolfrequenzfehler	Träger- und Symbolfrequenzfehler
Modulationsfehler (EVM) pro OFDM-Träger oder -Symbol	Modulationsfehler (EVM)
Amplitudengang und Gruppenlaufzeitverzerrung (Spectral Flatness)	–
Amplitudenstatistik (CCDF) und Crest-Faktor	CCDF und Crest-Faktor
Spektrumsmaske (Transmit spectrum mask)	Spektrumsmaske (IEEE und ETSI)
FFT, auch über einen ausgewählten Teil des Signals wie z.B Preamble	FFT
Payload-Bitinformation	Payload-Bitinformation Header
Aufzeichnungslänge einstellbar bis 50 ms	Aufzeichnungslänge einstellbar bis 50 ms
Trigger	
Free Run	Free Run
extern	extern
IF Power	IF Power
Typische Eigenfehler für 802.11a-Messungen	Typische Eigenfehler für 802.11b-Messungen
EVM –45 dB	EVM 0,7% (RF = 2,4 GHz)
Spectral flatness 0,5 dB	–

Die Applikationsfirmware R&S® FSQ-K91 erweitert den R&S® FSQ um Modulations- und Spektrumsmessungen an WLAN-Signalen nach den 802.11 a/b/g/j

Im Netz

Vielseitige Dokumentations- und Vernetzungsmöglichkeiten

Das serienmäßig eingebaute Disketten-Laufwerk ermöglicht, Messergebnisse einfach in die Dokumentation einzubinden – den Bildschirminhalt als BMP- oder WMF-Datei zu speichern und in die Textverarbeitung zu importieren. Um die Trace-Daten weiterzuverarbeiten, werden diese als ASCII-Dateien (CSV-Format) gespeichert, die nicht nur die Trace-Daten, sondern auch die wichtigsten Geräteeinstellungen dokumentieren.


Moderne Vernetzung

Die serienmäßig enthaltene LAN-Schnittstelle eröffnet vielseitige Möglichkeiten durch Vernetzung:

- ◆ Standard-Netzwerk (Ethernet 10/100 BaseT)
- ◆ Mit WindowsXP (embedded) als Betriebssystem lässt sich der R&S®FSQ wie ein Netzwerkarbeitsplatz konfigurieren. Drucken auf einem zentralen Netzwerkdrucker oder Speichern von Ergebnisdateien auf einem zentralen Server lassen sich damit einfach realisieren. Der R&S®FSQ kann optimal in die Arbeitsumgebung eingebunden werden

- ◆ Screenshots können direkt in MS Word oder mit einem MS Excel-Makro in die Dokumentationsprogramme eingebunden werden; so lassen sich schnell aussagekräftige Datenblätter von Produkten oder Unterlagen zur Qualitätssicherung erstellen

Die Fernsteuerung über ein Ethernet-Netzwerk ist noch einfacher, die spezielle RSIB-Software verbindet Ihre Anwendung mit dem TCP/IP-Protokoll und wird verwendet wie ein IEC-Bus-Treiber. Die RSIB-Software ist für Windows und UNIX erhältlich. Der R&S®FSQ lässt sich damit wie vom IEC/IEEE-Bus gewohnt über LAN programmieren.

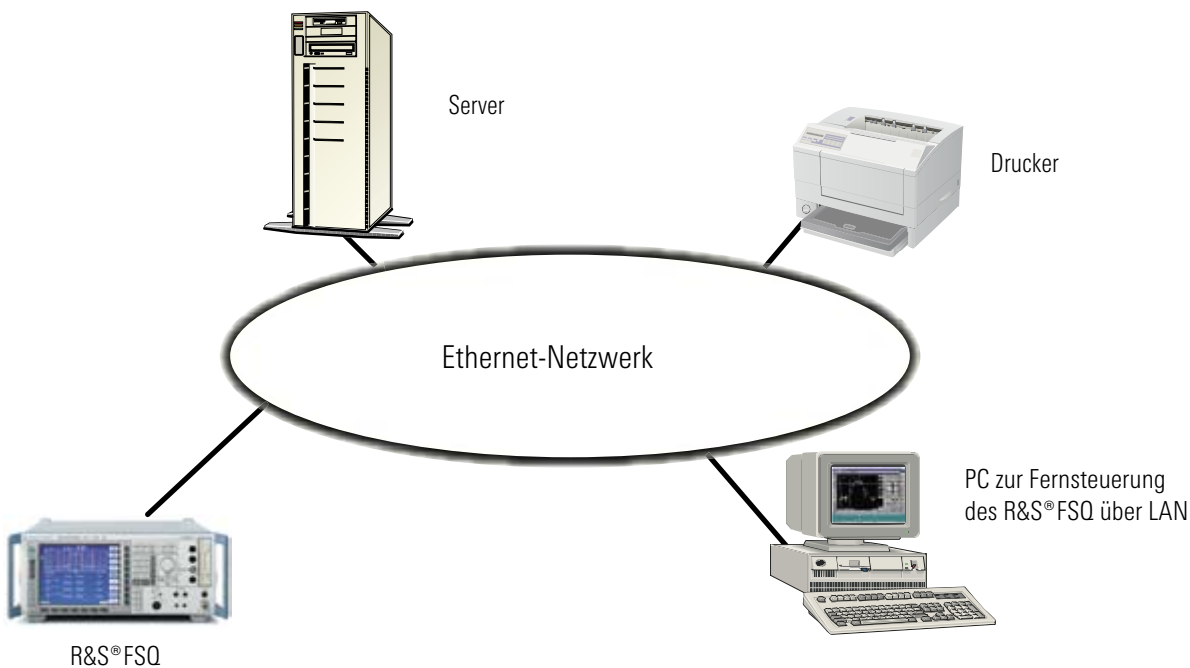

Der R&S®FSQ im Netz

Bestellangaben

Bestellbezeichnung	Typ	Bestell-Nummer
Signalanalysator 20 Hz bis 3,6 GHz	R&S®FSQ 3	1155.5001.03
Signalanalysator 20 Hz bis 8 GHz	R&S®FSQ 8	1155.5001.08
Signalanalysator 20 Hz bis 26,5 GHz	R&S®FSQ 26	1155.5001.26
Signalanalysator 20 Hz bis 40 GHz	R&S®FSQ 40	1155.5001.40

Optionen


Bestellbezeichnung	Typ	Bestell-Nummer
Hochgenaue Frequenzreferenz	R&S®FSU-B4	1144.9000.02
Mitlaufgenerator 100 kHz bis 3,6 GHz, I/Q-modulierbar, für alle R&S®FSU-Modelle	R&S®FSU-B9	1142.8994.02
Externe Generatorsteuerung	R&S®FSP-B10	1129.7246.02
Eichleitung zum Mitlaufgenerator R&S®FSU-B9	R&S®FSU-B12	1142.9349.02
Wechselfestplatte	R&S®FSU-B18	1145.0242.05
Zweite Festplatte zur Option Wechselfestplatte	R&S®FSU-B19	1145.0394.05
LO/IF-Schnittstellen für externe Mixer	R&S®FSU-B21	1157.1090.02
Vorverstärker 3,6 GHz bis 26 GHz für R&S®FSQ	R&S®FSQ-B23	1157.0907.03
Elektronische Eichleitung, 0 dB bis 30 dB und 20-dB-Vorverstärker	R&S®FSU-B25	1144.9298.02
I/Q-Basisbandeingänge	R&S®FSQ-B71	1157.0113.02
I/Q-Bandbreitenerweiterung auf 60 MHz/120 MHz	R&S®FSQ-B72	1157.0336.02



Technische Daten siehe PD 0758.0945.21
und unter www.rohde-schwarz.com
(Suchbegriff: FSQ)



ROHDE & SCHWARZ

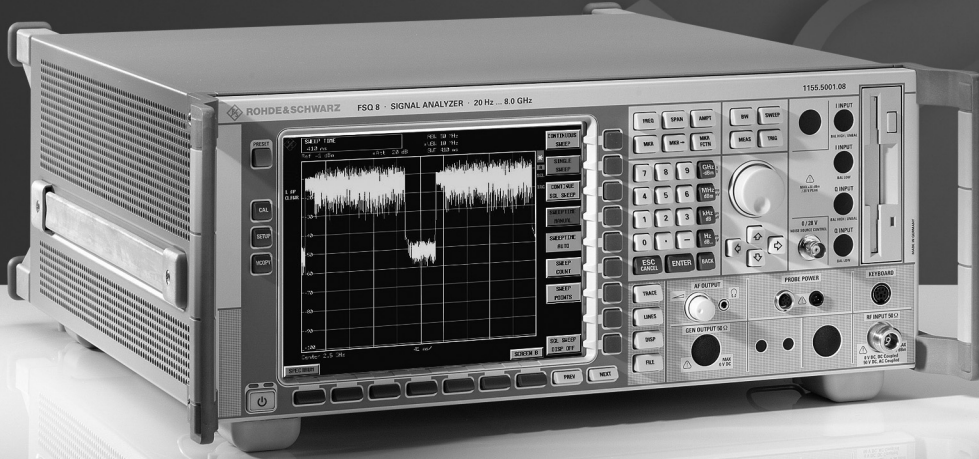

ROHDE & SCHWARZ

Contents

SPECIFICATIONS.....	3
FREQUENCY	3
SWEEP	4
RESOLUTION BANDWIDTHS	4
LEVEL.....	5
I/Q DATA.....	8
AUDIO DEMODULATION.....	9
TRIGGER FUNCTIONS.....	9
INPUTS AND OUTPUTS (FRONT PANEL).....	9
INPUTS AND OUTPUTS (REAR PANEL).....	10
GENERAL SPECIFICATIONS	11
TRACKING GENERATOR R&S FSU-B9, ATTENUATOR R&S FSU-B12 FOR TRACKING GENERATOR	12
<i>Inputs and outputs (front panel).....</i>	13
RF PREAMPLIFIER R&S FSQ-B23 (FOR R&S FSQ26 ONLY, REQUIRES OPTION R&S FSU-B25).....	14
ELECTRONIC ATTENUATOR R&S FSU-B25.....	15
I/Q BASEBAND INPUTS R&S FSQ-B71	16
<i>Frequency.....</i>	16
<i>Spectral purity.....</i>	16
<i>Amplitude.....</i>	16
<i>Dynamic range</i>	17
<i>Phase.....</i>	17
<i>Input ports.....</i>	17
I/Q BANDWIDTH EXTENSION R&S FSQ-B72	18
<i>Frequency.....</i>	18
<i>Level</i>	18
<i>Dynamic.....</i>	19
<i>General data.....</i>	19
ORDERING INFORMATION.....	20
OPTIONS.....	20
RECOMMENDED EXTRAS.....	21

Specifications

Specifications are valid under the following conditions:

30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and total calibration performed. Data without tolerances: typical values only. Data designated 'nominal' applies to design parameters and is not tested.


Frequency

Frequency range	R&S FSQ3:	DC coupled	20 Hz to 3.6 GHz
		AC coupled	1 MHz to 3.6 GHz
	R&S FSQ8:	DC coupled	20 Hz to 8 GHz
		AC coupled	1 MHz to 8 GHz
	R&S FSQ26:	DC coupled	20 Hz to 26.5 GHz
		AC coupled	10 MHz to 26.5 GHz
	R&S FSQ40:	DC coupled	20 Hz to 40 GHz
Frequency resolution			0.01 Hz

Reference frequency, internal, nominal	standard OCXO	
Aging per day	after 30 days of continuous operation	1×10^{-9}
Aging per year	after 30 days of continuous operation	1×10^{-7}
Temperature drift	+5 °C to +45 °C	8×10^{-8}
Total error	per year	1.8×10^{-7}
Reference frequency, internal, nominal	Option R&S FSU-B4	
Aging per day	after 30 days of continuous operation	2×10^{-10}
Aging per year	after 30 days of continuous operation	3×10^{-8}
Temperature drift	+5 °C to +45 °C	1×10^{-9}
Total error	per year	5×10^{-8}
External reference frequency		1 MHz to 20 MHz, 1 Hz steps

Frequency display		with marker or frequency counter
Marker resolution		span/624
Maximum deviation	sweep time >3 x auto sweep time	$\pm(\text{marker frequency} \times \text{reference error} + 0.5\% \times \text{span} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} \text{ (last digit)})$
Frequency counter resolution	selectable	0.1 Hz to 10 kHz
Count accuracy	S/N >25 dB	$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2} \text{ (last digit)})$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		1%

Spectral purity, SSB phase noise	f = 640 MHz	
Residual FM	nominal, RBW 10 kHz, RMS	<1 Hz
Carrier offset	10 Hz	-73 dBc (1 Hz), nominal
	10 Hz with option R&S FSU-B4 fitted	-86 dBc (1 Hz), nominal
	100 Hz	<-94 dBc (1 Hz), typ. -100 dBc (1 Hz)
	1 kHz	<-112 dBc (1 Hz), typ. -116 dBc (1 Hz)
	10 kHz	<-120 dBc (1 Hz), typ. -123 dBc (1 Hz)
	100 kHz	<-120 dBc (1 Hz), typ. -123 dBc (1 Hz)
	1 MHz	<-138 dBc (1 Hz), typ. -144 dBc (1 Hz)
	10 MHz	typ. -160 dBc (1 Hz)

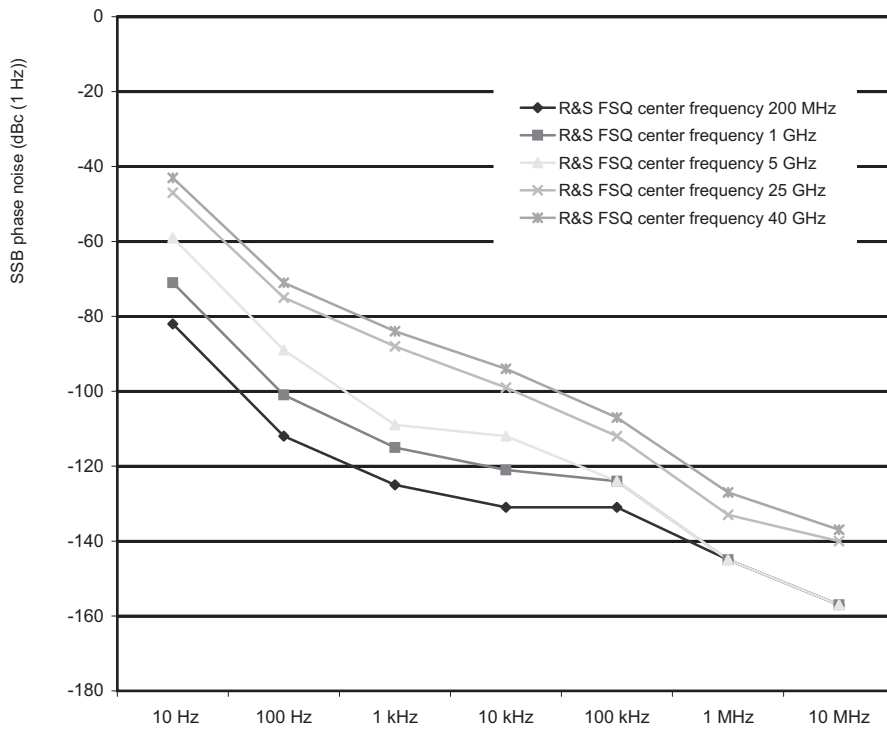

Sweep

Sweep time	time sweep, span = 0 Hz	1 s to 16000 s in 5% steps
	frequency sweep, span 10 Hz	2.5 ms to 16000 s in steps 10%
Max. deviation of sweep time		3%
Measurement in time domain		with marker and cursor lines (resolution 31.25 ns)

Resolution bandwidths

Sweep filters		
3 dB bandwidths		10 Hz to 20 MHz in 1/2/3/5 sequence, 50 MHz
Bandwidth uncertainty		
	10 Hz to 100 kHz (digital)	<3%
	200 kHz to 5 MHz (analog)	<10%
	10 MHz	-30% to +10%
	20 MHz	-20% to +20%
	50 MHz, f < 3.6 GHz	-20% to +20%
	50 MHz, f > 3.6 GHz	-30% to +100%
Shape factor 60 dB:3 dB		
	100 kHz	<6
	200 kHz to 2 MHz	<12
	3 MHz to 10 MHz	<7
	20 MHz, 50 MHz	<6, nominal

FFT filters		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		5%, nominal
Shape factor 60 dB:3 dB		<3, nominal

EMI filters		
6 dB bandwidths		200 Hz, 9 kHz, 120 kHz
Bandwidth uncertainty		3%, nominal
Shape factor 60 dB:3 dB		<6, nominal

Channel filters		
Bandwidths		100, 200, 300, 500 Hz, 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz, 1, 1.2288, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5 MHz
Shape factor 60 dB:3 dB		<2, nominal
Bandwidth uncertainty		2%, nominal

Video bandwidths		1 Hz to 10 MHz in 1/2/3/5 sequence
------------------	--	------------------------------------

Level

Display range		displayed noise floor to +30 dBm
---------------	--	----------------------------------

Maximum input level		
DC voltage	RF input AC coupled RF input DC coupled	50 V 0 V
CW RF power	RF attenuation 0 dB RF attenuation 10 dB	20 dBm (= 0.1 W) 30 dBm (= 1 W)
Pulse spectral density		97 dB V/MHz
Max. pulse voltage	RF attenuation 10 dB	150 V
Max. pulse energy	RF attenuation 10 dB, 10 s	1 mWs

Intermodulation		
1 dB compression of input mixer	0 dB RF attenuation ≤ 3.6 GHz > 3.6 GHz R&S FSQ8 R&S FSQ26, R&S FSQ40	+13 dBm, nominal +10 dBm, nominal +7 dBm, nominal
Third-order intercept point (TOI)	level 2×-10 dBm, $f > 5 \times$ RBW or 10 kHz, whichever is larger R&S FSQ3: 10 MHz $\leq f < 300$ MHz 300 MHz $\leq f \leq 3.6$ GHz R&S FSQ8: 10 MHz $\leq f < 300$ MHz 300 MHz $\leq f \leq 3.6$ GHz 3.6 GHz $\leq f \leq 8$ GHz R&S FSQ26: 10 MHz $\leq f < 300$ MHz 300 MHz $\leq f < 3.6$ GHz 3.6 GHz $\leq f < 26.5$ GHz R&S FSQ40: 10 MHz $\leq f < 300$ MHz 300 MHz $\leq f < 3.6$ GHz 26.5 GHz $\leq f \leq 40$ GHz	 >17 dBm, typ. 20 dBm >19 dBm, typ. 25 dBm >17 dBm, typ. 20 dBm >20 dBm, typ. 25 dBm >19 dBm, typ. 23 dBm >17 dBm, typ. 20 dBm >22 dBm, typ. 27 dBm >12 dBm, typ. 15 dBm >17 dBm, typ. 20 dBm >20 dBm, typ. 25 dBm >12 dBm, typ. 15 dBm
Second harmonic intercept (SHI)	$f < 100$ MHz 100 MHz $< f \leq 400$ MHz 400 MHz $< f \leq 500$ MHz 500 MHz $< f \leq 1$ GHz 1 GHz $< f \leq 1.8$ GHz > 1.8 GHz	>35 dBm >45 dBm, typ. 55 dBm >52 dBm, typ. 60 dBm >45 dBm, typ. 55 dBm >35 dBm 80 dBm, nominal

Displayed average noise level		
	0 dB RF attenuation, termination 50 Ω RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, trace average, sweep count = 20, mean marker, normalized to 10 Hz RBW	
	20 Hz 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz 10 MHz	<-80 dBm <-100 dBm <-110 dBm <-120 dBm <-126 dBm <-136 dBm <-143 dBm
	R&S FSQ3	
	20 MHz $\leq f < 2.0$ GHz 2.0 GHz $\leq f \leq 3.0$ GHz 3.0 GHz $\leq f \leq 3.6$ GHz	<-145 dBm, typ. -148 dBm <-143 dBm, typ. -147 dBm <-142 dBm, typ. -147 dBm
	R&S FSQ8	
	20 MHz $\leq f < 2.0$ GHz 2 GHz $\leq f \leq 3.0$ GHz 3 GHz $\leq f \leq 3.6$ GHz 3.6 GHz $\leq f < 7$ GHz 7 GHz $\leq f < 8$ GHz	<-145 dBm, typ. -148 dBm <-143 dBm, typ. -147 dBm <-142 dBm, typ. -146 dBm <-140 dBm, typ. -142 dBm <-139 dBm, typ. -142 dBm
	R&S FSQ26	
	20 MHz $\leq f < 2$ GHz 2 GHz $\leq f < 3.6$ GHz 3.6 GHz $\leq f < 8$ GHz 8 GHz $\leq f < 13$ GHz 13 GHz $\leq f < 18$ GHz 18 GHz $\leq f < 22$ GHz 22 GHz $\leq f < 26.5$ GHz	<-142 dBm, typ. -146 dBm <-140 dBm, typ. -143 dBm <-141 dBm, typ. -145 dBm <-139 dBm, typ. -143 dBm <-137 dBm, typ. -141 dBm <-135 dBm, typ. -138 dBm <-133 dBm, typ. -136 dBm
	R&S FSQ40	
	20 MHz $\leq f < 2$ GHz 2 GHz $\leq f < 8$ GHz 8 GHz $\leq f < 18$ GHz 18 GHz $\leq f < 22$ GHz 22 GHz $\leq f < 26.5$ GHz 26.5 GHz $\leq f < 40$ GHz	<-142 dBm, typ. -146 dBm <-140 dBm, typ. -143 dBm <-138 dBm, typ. -141 dBm <-135 dBm, typ. -138 dBm <-133 dBm, typ. -136 dBm <-125 dBm, typ. -128 dBm

Maximum dynamic range		
1 dB compression to DANL (1 Hz)		170 dB

Immunity to interference		
Image frequency	$f \leq 3.6$ GHz $f > 3.6$ GHz	>90 dB, typ. >110 dB >70 dB, typ. >100 dB
Intermediate frequency	$f \leq 3.6$ GHz 3.6 GHz $< f \leq 4.2$ GHz $f > 4.2$ GHz	>90 dB, typ. >110 dB typ. 70 dB >70 dB, typ. >90 dB
Spurious response	$f > 1$ MHz, without input signal, 0 dB RF attenuation	<-103 dBm
Other interfering signals	$\Delta f > 100$ kHz mixer level <-10 dBm, $f \leq 2.3$ GHz mixer level <-35 dBm, 2.3 GHz $< f < 4$ GHz mixer level <-10 dBm 4 GHz $\leq f < 8$ GHz 8 GHz $\leq f < 16$ GHz 16 GHz $\leq f < 26$ GHz 26.5 GHz $\leq f < 40$ GHz	<-80 dBc <-70 dBc <-70 dBc <-70 dBc <-64 dBc <-58 dBc <-52 dBc

Level display		
Screen		625 × 500 pixel (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10% of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	1 measurement diagram 2 measurement diagrams	3 6
Trace detector		Max Peak, Min Peak, Auto Peak (Normal), Sample, RMS, Average, Quasi Peak
Number of measurement points	default value range	625 155 to 10001 in steps of about a factor of 2
Trace functions		Clear/Write, Max Hold, Min Hold, Average
Trace update rate	local measurement, display update rate, 625 points, zero span remote measurement, display off: zero span/sweep time 1 ms span = 10 MHz, sweep time 2.5 ms	80 per second 70 per second 50 per second
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1%
Units of level axis	logarithmic level display linear level display	dBm, dBμV, dBmV, dBμA, dBpW μV, mV, μA, mA, pW, nW

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	<0.2 dB ($\sigma = 0.07$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥ 10 dB, +20 °C to +30 °C 10 MHz $\leq f < 3.6$ GHz 3.6 GHz $\leq f < 8$ GHz, span < 1 GHz 8 GHz $\leq f < 22$ GHz, span < 1 GHz 22 GHz $\leq f < 26.5$ GHz, span < 1 GHz 26.5 GHz $\leq f < 40$ GHz, span < 1 GHz $f \geq 3.6$ GHz, span ≥ 1 GHz +5 °C to +45 °C 10 MHz $\leq f < 3.6$ GHz 3.6 GHz $\leq f < 26.5$ GHz $f \geq 26.5$ GHz	<0.3 dB ($\sigma = 0.1$ dB) <1.5 dB ($\sigma = 0.5$ dB) <2 dB ($\sigma = 0.7$ dB) <2.5 dB ($\sigma = 0.8$ dB) <2.5 dB ($\sigma = 0.8$ dB) add 0.5 dB to above values <0.6 dB ($\sigma = 0.2$ dB) add 0.5 dB to above values add 1.0 dB to above values
Attenuator switching uncertainty	f = 128 MHz 0 dB to 70 dB, referenced to 10 dB attenuation	<0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting	RF attenuation 10 dB, referenced to -10 dBm reference level setting	<0.15 dB ($\sigma = 0.05$ dB)

Display non linearity		
	+20 °C to +30 °C, mixer level ≤ -10 dBm)	
Logarithmic level display	RBW ≤ 100 kHz or channel filters, S/N >20 dB 0 dB to -70 dB -70 dB to -90 dB	<0.1 dB ($\sigma = 0.03$ dB) <0.3 dB ($\sigma = 0.1$ dB)
	200 kHz \leq RBW ≤ 10 MHz, S/N >16 dB 0 dB to -50 dB -50 dB to -70 dB	<0.2 dB ($\sigma = 0.07$ dB) <0.5 dB ($\sigma = 0.17$ dB)
	RBW >10 MHz, S/N >16 dB 0 dB to -50 dB	<0.5 dB ($\sigma = 0.17$ dB)
Linear level display		5% of reference level
Bandwidth switching error	referenced to RBW = 10 kHz 1 Hz to 100 kHz 200 kHz to 3 MHz 5 MHz to 50 MHz FFT filter 1 Hz to 3 kHz	<0.1 dB ($\sigma = 0.03$ dB) <0.2 dB ($\sigma = 0.07$ dB) <0.5 dB ($\sigma = 0.15$ dB) <0.2 dB ($\sigma = 0.07$ dB)

Total measurement uncertainty		
	0 dB to -70 dB, S/N >20 dB, span/RBW <100, 95% confidence level, 20 °C to 30 °C, mixer level ≤ -10 dBm	
	f < 3.6 GHz, RBW ≤ 100 kHz	0.3 dB
	f < 3.6 GHz, RBW > 100 kHz	0.5 dB
	3.6 GHz ≤ f < 8 GHz	2.0 dB
	8 GHz ≤ f < 18 GHz	2.5 dB
	18 GHz ≤ f < 26.5 GHz	3.0 dB
	26.5 GHz ≤ f < 40 GHz	3.0 dB

I/Q data

General		
Interface		GPIB or LAN interface
Sampling rate		Programmable: 10 kHz to 81.6 MHz in 0.1 Hz steps
ADC resolution		14 bit
I/Q memory		16 Msamples each for I and Q data

RF path		
Max. information bandwidth		28 MHz
Harmonic distortion	full-scale input signal	typ.<-70 dBc
Third order distortion	two input tones 6 dB below full scale	typ.<-80 dBc
LO feedthrough	$f_{I/Q} = 81.6 \text{ MHz} - f_{\text{center}}$; mixer level = -10 dBm	typ.<-65 dBfs
Aliased DC offset	$f_{I/Q} = 20.4 \text{ MHz}$; within ±10 K temperature change after I/Q or total calibration	typ.<-65 dBfs

Frequency response		
	within 2/3 RBW; RBW = 3, 5, 10, 20, 50 MHz	
	f ≤ 3.6 GHz	typ.0.3 dB
	f > 3.6 GHz, YIG filter off	typ.0.5 dB

Deviation from linear phase		
	within 2/3 RBW; RBW = 3, 5, 10, 20, 50 MHz	
	f ≤ 3.6 GHz	typ.1°
	f > 3.6 GHz, YIG filter off	typ.2°

Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

Trigger functions

Trigger		
Trigger source		free run, video, external, IF level (mixer level 10 dBm to -50 dBm)
Trigger offset	span 10 Hz	125 ns to 100 s, resolution 125 ns min. (or 1% of offset)
	span = 0 Hz	± (125 ns to 100 s), resolution 125 ns min., dependent on sweep time
Max. deviation of trigger offset		± (31.25 ns + (0.1% × trigger offset))
Gated sweep		
Gate source		external, IF level, video
Gate delay		1 s to 100 s
Gate length		125 ns to 100 s, resolution min. 125 ns or 1% of gate length
Max. deviation of gate length		(31.25 ns + (0.05% × gate length))

Inputs and outputs (front panel)

RF input		
Impedance		50
Connector	R&S FSQ3, R&S FSQ8 R&S FSQ26 R&S FSQ40	N female, testport adapter APC 3.5 mm/N female, testport adapter 2.92 mm (K)/N female
VSWR	RF attenuation ≥10 dB, DC coupled f < 3.6 GHz R&S FSQ8: 3.6 GHz ≤ f < 8 GHz R&S FSQ26, R&S FSQ40: 3.6 GHz ≤ f < 18 GHz 18 GHz ≤ f < 26.5 GHz 26.5 GHz ≤ f < 40 GHz	<1.5 <2 <1.8 <2.0 <2.5
	RF attenuation <10 dB or AC coupling	typ. 1.5
Setting range of attenuator		0 dB to 75 dB, in 5 dB steps

Probe power supply		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA, nominal

Power supply for antennas etc		
Supply voltages		5-pin connector 10 V and ground, max. 100 mA, nominal

Keyboard connector		
		PS/2 female for MF-2 keyboard
AF output		
Connector		3.5 mm mini jack
Output impedance		10 Ω
Open-circuit voltage		up to 1.5 V, adjustable
Power supply for noise source		
Output voltage		BNC female 0 V and 28 V, switchable, nominal

Inputs and outputs (rear panel)

IF 20.4 MHz		BNC female
Impedance		50 Ω
Bandwidth	RBW \leq 30 kHz	1.67 \times resolution bandwidth, min. 2.6 kHz
	RBW = 50 kHz, 100 kHz	400 kHz
	200 kHz \leq RBW \leq 10 MHz	equal to resolution bandwidth
Level	RBW \leq 100 kHz, FFT filter, mixer level $>$ -70 dBm	-20 dBm at reference level
	RBW = 200 kHz to 10 MHz, mixer level $>$ -50 dBm	0 dBm at reference level
IF 404.4 MHz	active only if RBW $>$ 10 MHz	BNC female
Impedance		50 Ω
Bandwidth	RBW $>$ 10 MHz	equal to resolution bandwidth
Level	mixer level \leq 0 dBm	mixer level typ. -10 dB
Video output		BNC female
Impedance		50 Ω
Output voltage	RBW \geq 200 kHz, logarithmic scaling, full scale	0 V to 1 V (EMF)
Reference output		BNC female
Impedance		50 Ω
Output frequency		10 MHz
Level		$>$ 0 dBm, nominal
Reference Input		BNC female
Impedance		50 Ω
Input frequency range		1 MHz \leq f_{in} \leq 20 MHz, in 1 Hz steps
Required level		$>$ 0 dBm from 50 Ω
Sweep output		BNC female
Output voltage		0 V to 5 V, proportional to displayed frequency
External trigger/gate input		BNC female
Trigger voltage		1.4 V (TTL)
Input impedance		\geq 10 k Ω
IEC/IEEE bus control		interface to IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0 or HP8566 compatible
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1,DT1, C0
LAN interface		10/100 BaseT, RJ45
USB interface		type A plug, version 1.1
Serial interface		RS-232-C (COM), 9-pin female connectors
Printer interface		parallel (Centronics compatible)
Mouse interface		PS/2 compatible
Connector for external monitor (VGA)		15-pin sub-D

General specifications

Display		21 cm LC TFT colour display (8.4")
Resolution		800 × 600 pixel (SVGA resolution)
Pixel failure rate		$<1 \times 10^{-5}$

Mass memory		
Mass memory		1.44 Mbyte 3 ½" disk drive, hard disk, USB flash disk (not supplied)
Data storage		>500 instrument settings and traces

Temperature		
Temperature	operating temperature range permissible temperature range storage temperature range	+5° C to +40 °C +0° C to +50 °C –40°C to +70 °C
Climatic loading		+40 °C at 95% relative humidity (DIN EN 60068-2-30: 2000-02)

Mechanical resistance		
	sinusoidal vibration	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; meets DIN EN 60068-2-6: 1996-05, DIN EN 60068-2-30: 2000-02, DIN EN 61010-1, MIL-T-28800D, class 5
	random vibration	10 Hz to 100 Hz, acceleration 1 g (rms)
	shock	40 g shock spectrum, meets MIL-STD-810C and MIL-T-28800D, classes 3 and 5
Recommended calibration interval	operation with external reference operation with internal reference	2 years 1 year
RFI suppression		meets EMC directive of EU (89/336/EEC) and German EMC legislation

Power supply		
AC supply		100 V to 240 V, 3.1 A to 1.3 A; 50 Hz to 400 Hz, class of protection I to VDE 411
Power consumption	R&S FSQ3, R&S FSQ8 R&S FSQ26, R&S FSQ40	typ. 130 VA typ. 150 VA
Safety		meets EN 61010-1, UL 3111-1, CSA C22.2 No. 1010-1, IEC 1010-1
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D in mm	435 × 192 × 460
Weight	R&S FSQ3 R&S FSQ8 R&S FSQ26 R&S FSQ40	14.6 kg 15.4 kg 16.5 kg 16.8 kg

Tracking Generator R&S FSU-B9, Attenuator R&S FSU-B12 for Tracking Generator

Unless specified otherwise, specifications not valid for frequency range from $-3 \times \text{RBW}$ to $+3 \times \text{RBW}$, however at least not valid from -100 kHz to $+100 \text{ kHz}$. Maximum output level $+5 \text{ dBm}$ (peak modulation in the case of amplitude-modulated signals).

Frequency		
Frequency range		100 kHz to 3.6 GHz
Resolution		1 Hz
Frequency offset		
Setting range		200 MHz
Resolution		1 Hz

Spectral purity		
SSB phase noise	f = 500 MHz, carrier offset 10 kHz normal mode with frequency offset with FM modulation on	typ. -120 dBc (1 Hz) typ. -110 dBc (1 Hz) typ. -110 dBc (1 Hz)

Level		
Level setting range	with option R&S FSU-B12	-30 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB -100 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB

Max. deviation of output level		
Absolute	f = 128 MHz, output level -20 dBm to 0 dBm	$<1 \text{ dB}$ (= 0.34 dB)
Frequency response	referenced to level at 128 MHz, sweep time $>100 \text{ ms}$, $+5 \text{ }^\circ\text{C}$ to $+45 \text{ }^\circ\text{C}$	
	output level -20 dBm to 0 dBm , 100 kHz to 3.6 GHz output level -30 dBm to -20 dBm , f = 100 kHz to 3.6 GHz additional deviation with R&S FSU-B12, 100 kHz to 3.6 GHz	$<3 \text{ dB}$, typ. 1.9 dB 3 dB $<1 \text{ dB}$

Dynamic range		
Attenuation measurement range	RBW = 1 kHz, f > 10 MHz	100 dB
Harmonics	output level -10 dBm	typ. -30 dBc
Spurious, nonharmonics	output level 0 dBm	typ. -30 dBc

Modulation		
Modulation format	external	I/Q, AM, FM
Input Voltage	full scale AM, FM, V_{pp} I/Q	1 V $\sqrt{U_i^2 + U_q^2}$ 0.5 V
AM	$f_{\text{Center}} > f_{\text{Mod}}$, span = 0 Hz	
Modulation depth		0% to 99%
Modulation frequency response	0 Hz to 5 MHz 0 Hz to 30 MHz	1 dB 3 dB
FM	$f_{\text{Center}} > f_{\text{Mod}}$, span = 0 Hz	
Frequency deviation		full range: 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Modulation frequency range	deviation = 10 MHz deviation $\leq 1 \text{ MHz}$	0 Hz to 1 kHz 0 Hz to 100 kHz
Modulation frequency response	0 kHz to 100 kHz	1 dB
I/Q modulation	$f_{\text{Center}} > f_{\text{Mod}}$, span = 0 Hz	
Modulation frequency response	0 Hz to 5 MHz 0 Hz to 30 MHz	1 dB 3 dB
Modulation deviation of tracking generator	I/Q modulation, typical values, baseband signals generated by the R&S AMIQ	
EVM	NADC/TETRA/PDC	
	RMS	2%
	peak	4%

	PHS	
	RMS	2%
	peak	5%
Phase error	GSM/DCS1800/PCS1900	
	RMS	1.5°
	peak	5°
Rho factor	IS-95 CDMA	0.997

Inputs and outputs (front panel)		
RF output		N female, 50
VSWR	100 kHz f 2 GHz	1.2
	2 GHz f 3.6 GHz	1.5

Inputs and outputs (rear panel)		
TG I/AM IN		BNC female
Impedance		50
Input voltage	V_{pp}	1 V
TG Q/FM IN		BNC female
Impedance		50 ,
Input voltage	V_{pp}	1 V

LO signal		
Frequency range		7.0 GHz to 15.5 GHz
Level	+20 °C to +30 °C	+15.0 dBm 1 dB
	+5 °C to +45 °C	+15.0 dBm 3 dB

IF input		
IF frequency		404.4 MHz
Full scale level	2-port mixer (LO output / IF input, front panel)	-20 dBm
	3-port mixer (IF input, front panel)	-20 dBm
Level uncertainty	IF input level -30 dBm, RBW 30 kHz, 2-port mixer, LO output / IF input (front panel)	<1 dB
	+20 °C to +30 °C	<3 dB
	+5 °C to +45 °C	<3 dB
	3-port mixer, IF input (front panel)	<1 dB
	+20 °C to +30 °C	<3 dB
	+5 °C to +45 °C	<3 dB

Inputs and outputs (front panel)

Option R&S FSU-B21		
LO output/IF input		SMA-female, 50 Ω
IF input		SMA-female, 50 Ω

RF Preamplifier R&S FSQ-B23 (for R&S FSQ26 only, requires option R&S FSU-B25)

Level measurement uncertainty		
Frequency response	preamplifier = on 3.6 GHz to 8 GHz 8 GHz to 22 GHz 22 GHz to 26.5 GHz	<2.0 dB ($\sigma = 0.7$ dB) <2.5 dB ($\sigma = 0.8$ dB) <3.0 dB ($\sigma = 1$ dB)

Displayed average noise level		
	0 dB RF attenuation, termination 50 Ω RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, trace average, sweep count = 20, mean marker, normalized to 10 Hz RBW	
	preamplifier = off	
	3.6 GHz to 8 GHz 8 GHz to 26.5 GHz	R&S FSQ26 specifications + 2 dB R&S FSQ26 specifications + 3 dB
	preamplifier = on	
	3.6 GHz to 8 GHz	<-152 dBm, typ. -155 dBm
	8 GHz to 13 GHz	<-149 dBm, typ. -152 dBm
	13 GHz to 18 GHz	<-147 dBm, typ. -150 dBm
	18 GHz to 22 GHz	<-144 dBm, typ. -149 dBm
	22 GHz to 26.5 GHz	<-140 dBm, typ. -145 dBm

Electronic Attenuator R&S FSU-B25

Frequency		
Frequency range	R&S FSQ3	10 MHz to 3.6 GHz
	R&S FSQ8	10 MHz to 8 GHz
	R&S FSQ26	10 MHz to 3.6 GHz
	R&S FSQ40	10 MHz to 3.6 GHz

Setting range		
Electronic attenuator		0 dB to 30 dB, in 5 dB steps
Preamplifier		20 dB, switchable

Level measurement uncertainty		
Frequency response	with preamplifier or electronic attenuator	
	10 MHz to 50 MHz	<1 dB (= 0.34 dB)
	50 MHz to 3.6 GHz	<0.6 dB (= 0.2 dB)
	3.6 MHz to 8 GHz	<2.0 dB (= 0.7 dB)
Reference error	at 128 MHz, RBW 100 kHz, reference level -30 dBm, RF attenuation 10 dB	
	electronic attenuator	<0.3 dB (= 0.1 dB)
	preamplifier	<0.3 dB (= 0.1 dB)

Displayed average noise level		
	0 dB RF attenuation, termination 50 Ω RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, trace average, sweep count = 20, mean marker, normalized to 10 Hz RBW	
	preamplifier on	
	R&S FSQ3, R&S FSQ8, R&S FSQ26	
	10 MHz to 2.0 GHz	<-152 dBm
	2.0 GHz to 3.6 GHz	<-150 dBm
	R&S FSQ8	
	3.6 GHz to 8 GHz	<-147 dBm
	R&S FSQ40	
	10 MHz to 40 MHz	<-150 dBm
	40 MHz to 2 GHz	<-152 dBm
	2 GHz to 3.6 GHz	<-150 dBm
	with the R&S FSU-B25 built in, the average noise level values displayed by the base units degrade by (R&S FSU-B25 off):	
	20 Hz to 3.6 GHz	1 dB
	R&S FSQ8, 3.6 GHz to 8 GHz	2 dB
	preamplifier off, electronic attenuator 0 dB	
	20 Hz to 3.6 GHz	typ. 2.5 dB
	R&S FSQ8, 3.6 GHz to 8 GHz	typ. 3.5 dB

Intermodulation		
Third-order intercept point (TOI)	electronic attenuator on, f >5 x RBW or 10 kHz	
	10 MHz to 300 MHz	>17 dBm
	300 MHz to 3.6 GHz	>20 dBm
	3.6 GHz to 8 GHz	>18 dBm

I/Q Baseband Inputs R&S FSQ-B71

I/Q baseband inputs for unbalanced and balanced signals. Input impedance selectable 50 Ω / 1 M Ω . All data specified with 1 M Ω input impedance setting apply to 50 Ω source impedance. Specifications are guaranteed under the following conditions: 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and baseband calibration performed. Data without tolerances: typical values only. Data designated "nominal" apply to design parameters and are not tested.

Frequency

Sampling		
ADC sampling rate		81.6 MHz
ADC resolution		14 Bit
Frequency range		
Useful bandwidth with specified frequency response	f_s = output data rate f_s = 40.8 MHz to 81.6 MHz $f_s > 20.4$ MHz to < 40.8 MHz $f_s = 10$ kHz to 20.4 MHz	DC to $0.441 \times f_s$ DC to $0.34 \times f_s$ DC to $0.40 \times f_s$

Spectral purity

Phase noise at $f_{in} = 20$ MHz	1 kHz offset	typ. -135 dBc/Hz
----------------------------------	--------------	------------------

Amplitude

Maximum safe input level		
	50 Ω , power from 50 Ω source	+30 dBm (1 Watt)
	1 M Ω , peak voltage	± 5 V
Input level range (full scale)		
	with balanced setting: differential voltage	
	50 Ω	± 31.6 mV to ± 5.62 V (5 dB steps)
	1 M Ω	± 31.6 mV to ± 1.78 V (5 dB steps)
Max. common mode input voltage		
	50 Ω	$\pm 2 \times$ range, max. ± 5 V
	1 M Ω , any range	-2.5 V to +3.5 V
Level uncertainty		
Level uncertainty	at 1 MHz (full scale)	<0.25 dB
	I/Q imbalance at 1 MHz	<0.1 dB
Frequency response		
	50 Ω , $f_s = 81.6$ MHz	
	DC to 30 MHz, filter on	<0.3 dB
	DC to 36 MHz, filter off	<0.3 dB
	I/Q imbalance, DC to 30 MHz, filter on	<0.15 dB
	I/Q imbalance, DC to 36 MHz, filter off	<0.15 dB
Frequency response		
	1 M Ω	
	DC to 10 MHz	<0.30 dB
	I/Q imbalance, DC to 10 MHz	<0.15 dB
Amplitude linearity		
	0 dB to -90 dB with dither on	typ. 0.1 dB
I/Q offset		
	50 Ω balanced setting	<0.15 % of range ± 0.2 mV
	50 Ω unbalanced setting	<2 mV
	1 M Ω	<2 mV

Dynamic range

Noise level		
Signal to noise ratio	range = 1 V, signal level equal to range	typ. 143 dBc (1 Hz)
Noise floor	range = 31.6 mV, RMS voltage in 1 Hz bandwidth	
	50 Ω , unbalanced setting	typ. <4 nV
	50 Ω , balanced setting	typ. <6 nV
	1 M Ω , unbalanced setting	typ. <16 nV
	1 M Ω , balanced setting	typ. <16 nV
Spurious & harmonics		
	Single signal, level equal to range 50 Ω : DC to 36 MHz 1 M Ω : DC to 10 MHz, range ≤ 1 V	typ. -60 dBc
Intermodulation distortion 2nd order and 3rd order		
	Two signals, level equal to range -6 dB	
	50 Ω : DC to 20 MHz	typ. -75 dBc
	50 Ω : 20 MHz to 36 MHz	typ. -70 dBc
	1 M Ω : DC to 10 MHz, range ≤ 1 V	typ. -75 dBc
Image rejection	aliasing into useful bandwidth from single out of band signal equal to range	typ. -75 dB
I/Q crosstalk	DC to 36 MHz	typ. -70 dB

Phase

Group delay variation versus frequency		
	aliasing filter on, DC to 30 MHz	typ. 1 ns
	aliasing filter off, DC to 36 MHz	typ. 1 ns
Differential phase between I and Q		
	DC to 10 MHz	typ. 1°
	aliasing filter on, >10 MHz to 30 MHz	typ. 2°
	aliasing filter off, >10 MHz to 36 MHz	typ. 2°

Input ports

Channels		2 (I & Q)
Connector	each channel balanced or unbalanced	4 \times BNC female
Input impedance		
	unbalanced setting common mode	50 Ω / 1 M Ω nominal
	balanced setting common mode differential	50 Ω / 1 M Ω nominal 100 Ω / 2 M Ω nominal
Return loss	50 Ω input impedance	
	DC to 10 MHz	typ. 30 dB
	>10 MHz to 36 MHz	typ. 20 dB
Input capacitance	with 1 M Ω input impedance setting, common mode	typ. 9 pF

I/Q Bandwidth Extension R&S FSQ-B72

Frequency

RF Frequency range	R&S FSQ3	40 MHz to 3.6 GHz
	R&S FSQ8	40 MHz to 8 GHz
	R&S FSQ26	40 MHz to 26.5 GHz
	R&S FSQ40	40 MHz to 40 GHz

Useful bandwidth Bandwidth with equalized frequency response as specified below	f_s = output sampling rate ≤ 3.6 GHz 20.4 MHz < $f_s \leq 81.6$ MHz 81.6 MHz < $f_s < 163.2$ MHz 163.2 MHz $\leq f_s \leq 326.4$ MHz	0.8 $\times f_s$, max. 60 MHz 0.68 $\times f_s$, max. 60 MHz 60 MHz
	>3.6 GHz 20.4 MHz < $f_s \leq 81.6$ MHz 81.6 MHz < $f_s < 163.2$ MHz 163.2 MHz $\leq f_s \leq 326.4$ MHz	0.8 $\times f_s$ 0.68 $\times f_s$ 120 MHz

Frequency response	within useful bandwidth, referenced to center frequency RF attenuation ≥ 10 dB, mixer level ≤ -10 dBm +20 °C to +30 °C	
---------------------------	--	--

Amplitude flatness	20 °C to 30 °C ≤ 3.6 GHz	± 25 MHz ± 30 MHz	<0.3 dB <0.6 dB
	>3.6 GHz		<0.6 dB
	5 °C to 45 °C ≤ 3.6 GHz	± 25 MHz ± 30 MHz	<0.4 dB <0.8 dB
	>3.6 GHz		<1 dB

Deviation from linear phase	20 °C to 30 °C ≤ 3.6 GHz	± 25 MHz ± 30 MHz	$\pm 2^\circ$ typ. $\pm 3^\circ$ typ. $\pm 3^\circ$ typ..
	>3.6 GHz		
	5 °C to 45 °C ≤ 3.6 GHz	± 25 MHz ± 30 MHz	$\pm 3^\circ$ typ. $\pm 4^\circ$ typ. $\pm 4^\circ$ typ.
	>3.6 GHz		

Output sampling rate	min. max.	>20.4 MHz 326.4 MHz
-----------------------------	--------------	------------------------


ADC sampling rate		326.4 MHz
--------------------------	--	-----------

Level

Level uncertainty	at center frequency, RF attenuation ≥ 10 dB, mixer level ≤ -10 dBm signal level = reference level	
	20 °C to 30 °C ≤ 3.6 GHz 3.6 GHz to 8 GHz 8 GHz to 26.5 GHz 26.5 GHz to 40 GHz	<0.8 dB <1.5 dB <2.5 dB <2.5 dB
	5 °C to 45 °C ≤ 3.6 GHz 3.6 GHz to 8 GHz 8 GHz to 26.5 GHz 26.5 GHz to 40 GHz	<1.2 dB <2.0 dB <3.0 dB <3.5 dB
Level nonlinearity	0 dB to -50 dB dither on	<0.2 dB/10 dB

Dynamic

Spurious response		
Without input signal	0 dB RF attenuation	<-80 dBm, typ. -100 dBm
With full scale input signal	mixer level ≤ -10 dBm	<-50 dBc, typ. -58 dBc
Third order intermodulation	two signals, level equal to reference level -6 dB mixer level ≤ -20 dBm (each signal)	<-50 dBc, typ. -58 dBc,
Rejection of out of band signals	≤ 3.6 GHz > 3.6 GHz up to ± 750 MHz offset > ± 750 MHz offset	typ. 100 dB typ. 60 dB typ. 0 dB
Signal to noise ratio	mixer level ≥ -20 dBm signal level equal to reference level	>125 dBc (1 Hz), typ. 128 dBc (1 Hz)
Noise floor	RF attenuator 0 dB, reference level ≤ -30 dBm R&S FSQ3/R&S FSQ8 1 GHz R&S FSQ8 5 GHz R&S FSQ26/R&S FSQ40 1 GHz R&S FSQ26/R&S FSQ40 5 GHz	<-153 dBm (1 Hz) <-148 dBm (1 Hz) <-150 dBm (1 Hz) <-150 dBm (1 Hz)

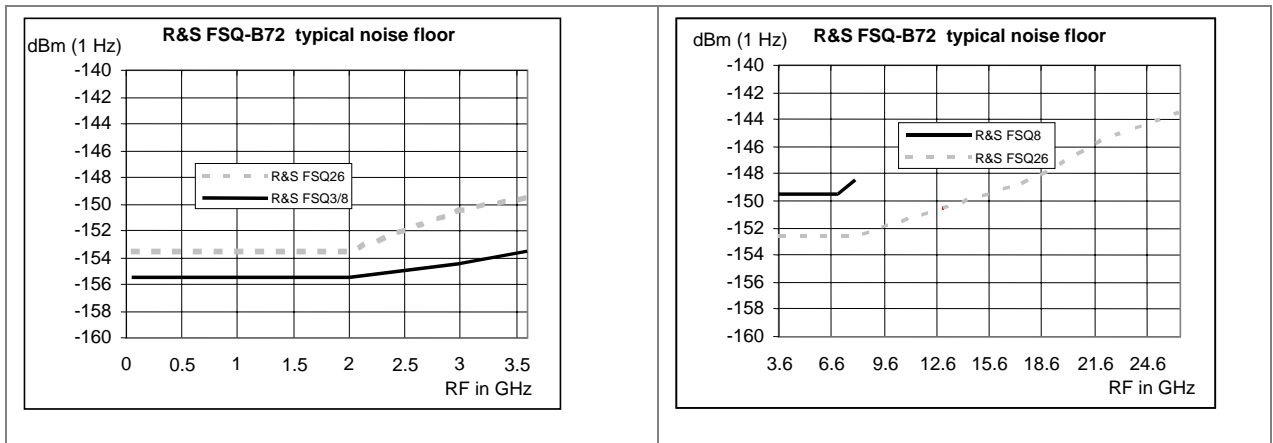

Susceptibility to radiated emission	relative to full scale, RF attenuation 0 dB, reference level ≤ -10 dBm, field strengths 10 V/m IF frequency band 348 MHz to 468 MHz image frequency 837.6 MHz to 957.6 MHz other frequencies	typ. <-55 dB typ. <-60 dB typ. <-75 dB
--	--	--

General data

Interface		GPIB or LAN interface
I/Q memory		16 Msample each for I and Q data
Sampling rate		programmable >20.4 MHz to 326.4 MHz in 0.1 Hz steps
ADC resolution		8 bit
IF pre-filter 3 dB bandwidth	≤ 3.6 GHz	typ. 55 MHz
	>3.6 GHz YIG filter switched off	typ. 125 MHz

Ordering information


Order designation	Type	Order No.
Signal Analyzer 20 Hz to 3.6 GHz	R&S FSQ3	1155.5001.03
Signal Analyzer 20 Hz to 8 GHz	R&S FSQ8	1155.5001.08
Signal Analyzer 20 Hz to 26.5 GHz	R&S FSQ26	1155.5001.26
Signal Analyzer 20 Hz to 40 GHz	R&S FSQ40	1155.5001.40
Accessories supplied		
Power cable, operating manual, service manual, R&S FSQ26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector R&S FSQ40: test port adapter with K female (10366.4790.00) and N female (1036.4777.00) connector		

Options

Order designation	Type	Order No.	Retrofittable	Remarks
Options				
OCXO, low aging/improved phase noise at 10 Hz carrier offset	R&S FSU-B4	1144.9000.02	yes	
Tracking Generator, 9 kHz to 3.6 GHz	R&S FSU-B9	1142.8994.02	yes	
External Generator Control	R&S FSP-B10	1129.7246.02	yes	
Output Attenuator, 0 dB to 70 dB, for R&S FSU-B9	R&S FSU-B12	1142.9349.02	yes	requires R&S FSU-B9
Removable Hard Disk	R&S FSQ-B18	1145.0242.05	no	
Second Hard Disk for R&S FSQ-B18	R&S FSQ-B19	1145.0394.05		requires R&S FSU-B18
LO/IF ports for external mixers	R&S FSU-B21	1157.1090.02	yes	only for R&S FSQ26 and R&S FSQ40
20 dB Preamplifier, 3.6 GHz to 26.5 GHz, for R&S FSQ26	R&S FSQ-B23		no	only for R&S FSQ26, requires R&S FSU-B25
Electronic Attenuator, 0 dB to 30 dB, and 20 dB Preamplifier (3.6 GHz)	R&S FSU-B25	1044.9298.02	yes	
Analog Baseband Inputs	R&S FSQ-B71	1157.0113.03	yes	
I/Q Bandwidth Extension	R&S FSQ-B72	1157.0336.02	no	
Firmware/Software				
Noise Measurement Software	R&S FS-K3	1057.3028.02		preamplifier (e.g. R&S FSU-B25) recommended
Phase Noise Measurement Software	R&S FS-K4	1108.0088.02		
GSM/EDGE Application Firmware	R&S FS-K5	1141.1496.02		
FM Measurement Demodulator	R&S FS-K7	1141.1796.02		
Bluetooth Application Firmware	R&S FS-K8	1157.2568.02		
Power Sensor Measurements	R&S FS-K9	1157.3006.02		
Application firmware for Noise Figure and Gain Measurements	R&S FS-K30	1300.6508.02		preamplifier (e.g. R&S FSU-B25) recommended
3GPP BTS/Node B FDD Application Firmware	R&S FS-K72	1154.7000.02		
3GPP UE FDD Application Firmware	R&S FS-K73	1154.7252.02		
3 GPP HSDPA BTS Application Firmware	R&S FS-K74	1300.7156.02		requires R&S FS-K72
3 GPP TD-SCDMA BTS Application Firmware	R&S FS-K76	1300.7291.02		
3 GPP TD-SCDMA UE Application Firmware	R&S FS-K77	1300.8100.02		
CDMA2000 BTS Application Firmware	R&S FS-K82	1157.2316.02		
CDMA2000 MS Application Firmware	R&S FS-K83	1157.2416.02		
CDMA2000 1xEV-DO BTS Application Firmware	R&S FS-K84	1157.2851.02		
cdma2000 1xEV-DO MS Application Firmware	R&S FS-K85	1300.6689.02		
Vector Signal Analysis	R&S FSQ-K70	1161.8038.02		
WLAN 802.11a Application Firmware	R&S FSQ-K90	1157.3064.02		
WLAN 802.11a/b/g/j Application Firmware	R&S FSQ-K91	1157.3129.02		
Upgrade from R&S FSQ-K90 to R&S FSQ-K91	R&S FSQ-K90U	1300.8000.02		

Recommended extras

Order designation	Type	Order No.
Headphones		0708.9010.00
US Keyboard with trackball	R&S PSP-Z2	1091.4100.02
IEC/IEEE Bus Cable, 1 m	R&S PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S PCK	0292.2013.20
19" Rack Adapter	R&S ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with 19" Adapter R&S ZZA-411)	R&S ZZA-T45	1109.3774.00
Matching pads, 50/75		
L Section, matching at both ends	R&S RAM	0358.5414.02
Series Resistor, 25 Ω , matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S RAZ	0358.5714.02
SWR Bridges, 50		
SWR Bridge, 5 MHz to 3 GHz	R&S ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S ZRC	1039.9492.5X
High power attenuators		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S RDL50	1035.1700.52
Connectors and cables		
Probe power connector, 3 pin		1065.9480.02
DC blocks		
DC Block, 10 kHz to 18 GHz (Type N)	R&S FSE-Z4	1084.7443.02
External harmonic mixers (for R&S FSQ26, R&S FSQ40 with option R&S FSU-B21)		
Harmonic Mixer 40 GHz to 60 GHz	R&S FS-Z60	1089.0799.02
Harmonic Mixer 50 GHz to 75 GHz	R&S FS-Z75	1089.0847.02
Harmonic Mixer 60 GHz to 90 GHz	R&S FS-Z90	1089.0899.02
Harmonic Mixer 90 GHz to 110 GHz	R&S FS-Z110	1089.0976.02
For R&S FSQ26 only:		
Test port adapter N male for R&S FSU26		1021.0541.00
Test port adapter 3.5 mm male for R&S FSU26		1021.0529.00
Microwave Measurement Cable with test port adapter set N male and 3.5 mm male for R&S FSU26	R&S FSE-Z15	1046.2002.02
For R&S FSQ40 only:		
Test port adapter N male for R&S FSQ40		1036.4783.00
Test port adapter K male for R&S FSQ40		1036.4802.00
Test port adapter 2.4 mm female for R&S FSQ40	R&S FSE-Z5	1088.1627.02

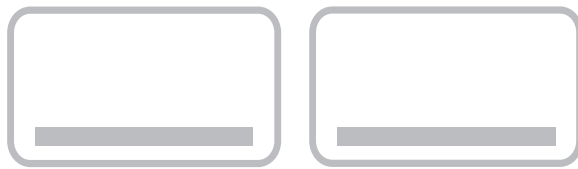

ROHDE & SCHWARZ