


## E-Series 2-Way 0° Power Divider 5 - 1000 MHz




### Features

- 2 Way
- 0 Degree
- Surface Mount
- 75 Ohm



### SM-44 Package

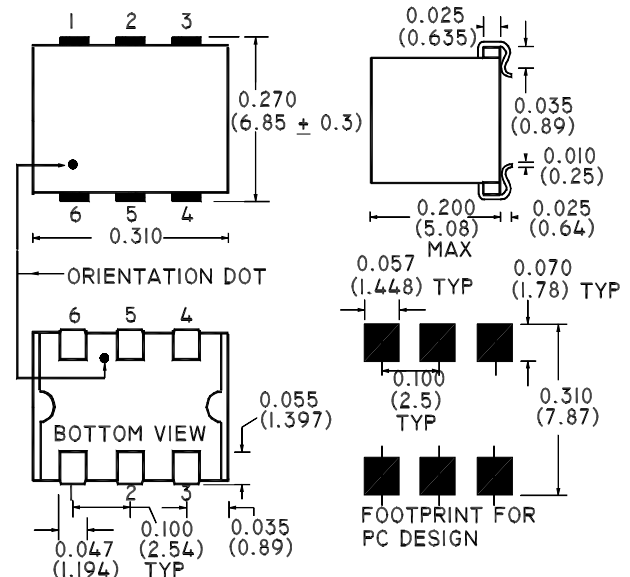

### Description

M/A-COM's ESSMJ-2-12-75 is a 2 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume CATV applications.

### Electrical Specifications @25 °C

Parameter	Units	Typical	Minimum	Maximum
Frequency Range	5 - 1000	MHz	—	—
Insertion Loss	5 - 500 MHz	dB	0.4	0.6
	500 - 1000 MHz	dB	0.5	1.2
Isolation	5 - 600 MHz	dB	35	20
	600 - 1000 MHz	dB	30	17.5
Amplitude Unbalance	5 - 600 MHz	dB	—	0.2
	600 - 1000 MHz	dB	—	0.5
Phase Unbalance	5 - 100 MHz	°	—	1.5°
	100 - 500 MHz	°	—	3.5°
	500 - 1000 MHz	°	—	4.0°
Output Return Loss	5 - 40 MHz	dB	20	12
	40 - 1000 MHz	dB	25	20
Input Return Loss	5 - 40 MHz	dB	20	13.5
	40 - 500 MHz	dB	24	20
	500 - 860 MHz	dB	21	17
	860 - 1000 MHz	dB	19	14
Insertion Loss Flatness	dB	—	—	0.9

Please Note that the photograph above indicates package shape only, unit may be wired differently.


V2.00 S 1226 E



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

AMP and Connecting at a Higher Level are trademarks.  
Specifications subject to change without notice.



**Absolute Maximum Ratings**


Parameter	Absolute Maximum
RF Power	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 Sec)	260°C
Storage Temperature	-55°C to 100°C
Operating Temperature	-25°C to 85°C

**Functional Configuration**


Function	Pin No.
Not Connected	2,5
External 75 Ohms	—
Ground	1
Case Ground	—
Input	6
Port 1	4
Port 2	3

**Typical Performance @ +25°C**


**Insertion Loss**

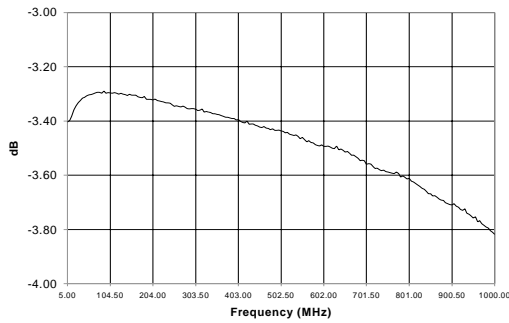


**Isolation**

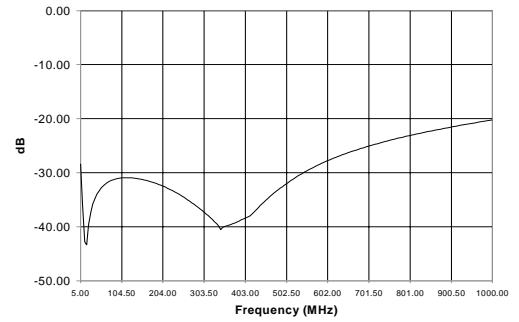


**Amplitude Unbalance**

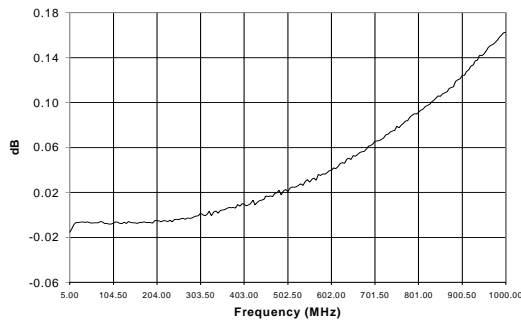


**Phase Unbalance**

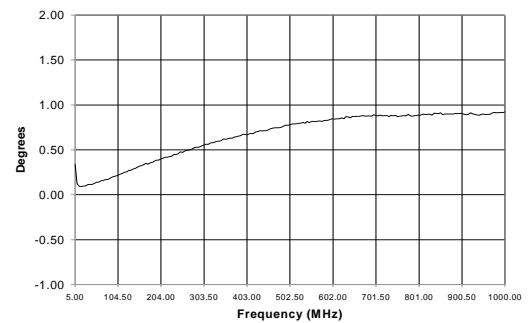

**Output Return Loss**

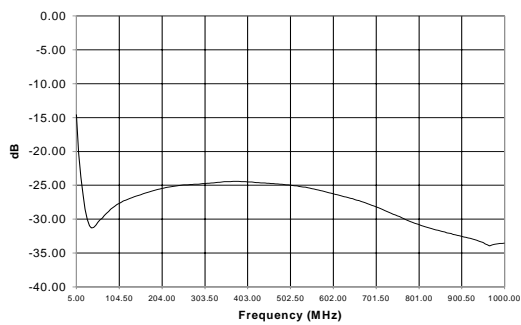

**Input Return Loss**

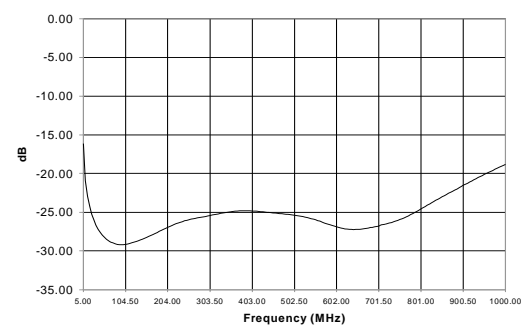

V2.00 S 1226 E



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

AMP and Connecting at a Higher Level are trademarks. Specifications subject to change without notice.

