


R&S®FSQ

Signal Analyzer

Specifications

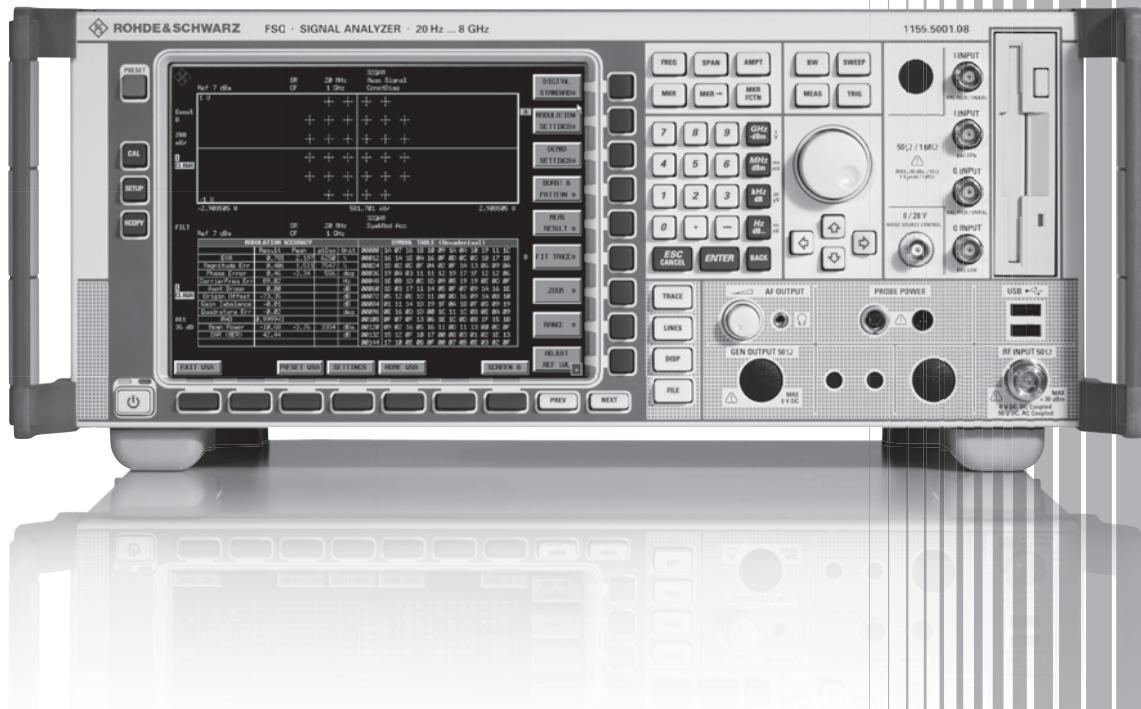

75 Years of
Driving Innovation

 **ROHDE & SCHWARZ**

CONTENTS

Specifications.....	3
Frequency	3
Sweep	4
Resolution bandwidths.....	4
Level	5
I/Q data	9
Audio demodulation	9
Trigger functions	9
Inputs and outputs (front panel).....	10
Inputs and outputs (rear panel).....	11
General data	12
R&S®FSU-B9 tracking generator, R&S®FSU-B12 step attenuator for tracking generator	13
R&S®FSQ-B17 digital baseband interface	15
Input and Output (rear panel)	15
R&S®FSU-B21 LO/IF ports for external mixers (for R&S®FSQ26 and R&S®FSQ40 only)	16
R&S®FSQ-B23 RF preamplifier (for R&S®FSQ26 only, requires R&S®FSU-B25 option)	16
R&S®FSU-B24 preamplifier (for R&S®FSQ26 and R&S®FSQ40 only)	17
R&S®FSU-B25 electronic attenuator.....	19
R&S®FSQ-B71 I/Q baseband inputs.....	20
Frequency	20
Spectral purity	20
Amplitude	20
Dynamic range	21
Phase	21
Input ports	21
R&S®FSQ-B72 I/Q bandwidth extension	22
Frequency	22
Level.....	22
Dynamic	23
General data.....	24
Ordering information	25
Options.....	25
Recommended extras.....	27

Specifications

Specifications are valid under the following conditions:

30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and total calibration performed. Data without tolerances: typical values only. Data designated 'nominal' applies to design parameters and is not tested.

Frequency


Frequency range	R&S®FSQ3:	DC coupled	20 Hz to 3.6 GHz
		AC coupled	1 MHz to 3.6 GHz
	R&S®FSQ8:	DC coupled	20 Hz to 8 GHz
		AC coupled	1 MHz to 8 GHz
	R&S®FSQ26:	DC coupled	20 Hz to 26.5 GHz
		AC coupled	10 MHz to 26.5 GHz
	R&S®FSQ40:	DC coupled	20 Hz to 40 GHz
Frequency resolution			0.01 Hz

Reference frequency, internal, nominal		
Aging per day	after 30 days of continuous operation	1×10^{-9}
Aging per year	after 30 days of continuous operation	1×10^{-7}
Temperature drift	+5 °C to +45 °C	8×10^{-8}
Total error	per year	1.8×10^{-7}
Reference frequency, internal, nominal		
Aging per day	after 30 days of continuous operation	2×10^{-10}
Aging per year	after 30 days of continuous operation	3×10^{-8}
Temperature drift	+5 °C to +45 °C	1×10^{-9}
Total error	per year	5×10^{-8}
External reference frequency		1 MHz to 20 MHz, 1 Hz steps

Frequency display		with marker or frequency counter
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span} / (\text{sweep points} - 1)) + 1\text{Hz})$
Marker tuning frequency stepsize	default	span / 624
	marker stepsize = sweep points	span / (sweep points - 1)
Frequency counter resolution	selectable	0.1 Hz to 10 kHz
Count accuracy	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2} (\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		1 %

Spectral purity, SSB phase noise (1 Hz)	f = 640 MHz	
Residual FM	RBW 10 kHz, RMS	<1 Hz, nominal
Carrier offset	10 Hz	<-73 dBc, nominal
	10 Hz with option R&S®FSU-B4 fitted	<-86 dBc, nominal
	100 Hz	<-98 dBc ¹ , <-90 dBc, typ. -104 dBc ¹
	1 kHz	<-116 dBc ¹ , <-112 dBc, typ. -124 dBc ¹
	10 kHz	<-128 dBc ¹ , <-120 dBc, typ. -133 dBc ¹
	100 kHz	<-128 dBc ¹ , <-120 dBc, typ. -133 dBc ¹
	1 MHz	<-140 dBc ¹ , <-138 dBc, typ. -146 dBc ¹
	10 MHz	typ. -160 dBc

¹ Valid as of serial number >200000

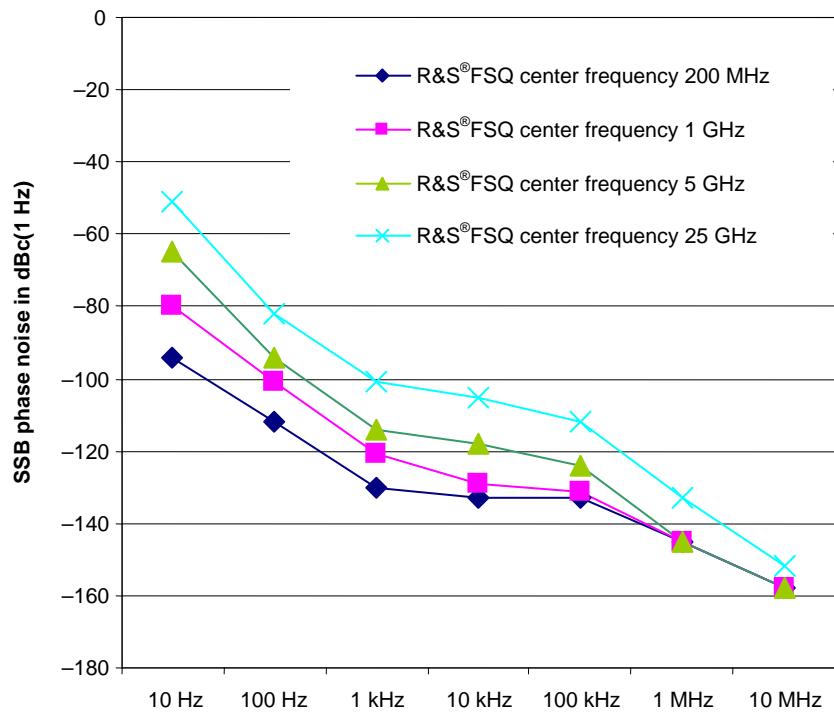

Sweep

Sweep time	time sweep, span = 0 Hz frequency sweep, span ≥ 10 Hz	1 μ s to 16000 s in 5 % steps 2.5 ms to 16000 s in steps ≤ 10 %
Max. deviation of sweep time		3 %
Measurement in time domain		with marker and cursor lines (resolution 31.25 ns)

Resolution bandwidths

Sweep filters		
3 dB bandwidths		10 Hz to 20 MHz in 1/2/3/5 sequence, 50 MHz
Bandwidth uncertainty	10 Hz to 100 kHz (digital) 200 kHz to 5 MHz (analog) 10 MHz 20 MHz 50 MHz, $f \leq 3.6$ GHz 50 MHz, $f > 3.6$ GHz	<3 % <10 % -30 % to +10 % -20 % to +20 % -20 % to +20 % -30 % to +100 %
Shape factor 60 dB:3 dB	≤ 100 kHz 200 kHz to 2 MHz 3 MHz to 10 MHz 20 MHz, 50 MHz	<6 <12 <7 <6, nominal

FFT filters		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		<5 %, nominal
Shape factor 60 dB:3 dB		<3, nominal

EMI filters		
6 dB bandwidths		200 Hz, 9 kHz, 120 kHz
Bandwidth uncertainty		<3 %, nominal
Shape factor 60 dB:3 dB		<6, nominal

Channel filters		
Bandwidths		100, 200, 300, 500 Hz, 1, 1.5, 2, 2.4, 2.7, 3, 3.4, 4, 4.5, 5, 6, 8.5, 9, 10, 12.5, 14, 15, 16, 18 (RRC), 20, 21, 24.3 (RRC), 25, 30, 50, 100, 150, 192, 200, 300, 500 kHz, 1, 1.2288, 1.28 (RRC), 1.5, 2, 3, 3.84 (RRC), 4.096 (RRC), 5 MHz
Shape factor 60 dB:3 dB		<2, nominal
Bandwidth uncertainty		<2 %, nominal
Video bandwidths	1 Hz to 30 MHz in 1/2/3/5 sequence	

Level

Display range		displayed noise floor to +30 dBm
Maximum input level		
DC voltage	RF input AC coupled	50 V
	RF input DC coupled	0 V
CW RF power	RF attenuation 0 dB	20 dBm (= 0.1 W)
	RF attenuation ≥10 dB	30 dBm (= 1 W)
Pulse spectral density		97 dBμV/MHz
Max. pulse voltage	RF attenuation ≥10 dB	150 V
Max. pulse energy	RF attenuation ≥10 dB, 10 μs	1 mWs

Intermodulation		
1 dB compression of input mixer	0 dB RF attenuation	
	≤3.6 GHz	+13 dBm, nominal
	>3.6 GHz	
	R&S®FSQ8	+10 dBm, nominal
	R&S®FSQ26, R&S®FSQ40	+7 dBm, nominal
Third-order intercept point (TOI)	level 2 × -10 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger	
	R&S®FSQ3	
	10 MHz ≤ f _{in} < 300 MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} ≤ 3.6 GHz	>19 dBm, typ. 25 dBm
	R&S®FSQ8	
	10 MHz ≤ f _{in} < 300 MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} ≤ 3.6 GHz	>20 dBm, typ. 25 dBm
	3.6 GHz ≤ f _{in} ≤ 8 GHz	>19 dBm, typ. 23 dBm
	R&S®FSQ26	
	10 MHz ≤ f _{in} < 300 MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} < 3.6 GHz	>22 dBm, typ. 27 dBm
	3.6 GHz ≤ f _{in} < 26.5 GHz	>12 dBm, typ. 15 dBm
	R&S®FSQ40	
	10 MHz ≤ f _{in} < 300 MHz	>17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} < 3.6 GHz	>20 dBm, typ. 25 dBm
	26.5 GHz ≤ f _{in} ≤ 40 GHz	>12 dBm, typ. 15 dBm
Second harmonic intercept (SHI)	f _{in} < 100 MHz	>35 dBm
	100 MHz < f _{in} ≤ 400 MHz	>45 dBm, typ. 55 dBm
	400 MHz < f _{in} ≤ 500 MHz	>52 dBm, typ. 60 dBm
	500 MHz < f _{in} ≤ 1 GHz	>45 dBm, typ. 55 dBm
	1 GHz < f _{in} ≤ 1.8 GHz	>35 dBm
	f _{in} > 1.8 GHz	>80 dBm, nominal

Displayed average noise level	
	0 dB RF attenuation, termination 50Ω , log. scaling, normalized to 1 Hz RBW; YIG filter = ON or OFF $f < 10 \text{ kHz}$: 10 Hz FFT Filter, trace average, sweep count = 20, $f \geq 10 \text{ kHz}$: RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker
20 Hz	<-90 dBm
100 Hz	<-110 dBm
1 kHz	<-120 dBm
10 kHz	<-130 dBm
100 kHz	<-136 dBm
1 MHz	<-146 dBm
10 MHz	<-153 dBm
R&S®FSQ3	
20 MHz $\leq f < 2.0 \text{ GHz}$	<-155 dBm, typ. -158 dBm
2.0 GHz $\leq f \leq 3.0 \text{ GHz}$	<-153 dBm, typ. -157 dBm
3.0 GHz $\leq f \leq 3.6 \text{ GHz}$	<-152 dBm, typ. -157 dBm
R&S®FSQ8	
20 MHz $\leq f < 2.0 \text{ GHz}$	<-155 dBm, typ. -158 dBm
2 GHz $\leq f \leq 3.0 \text{ GHz}$	<-153 dBm, typ. -157 dBm
3 GHz $\leq f \leq 3.6 \text{ GHz}$	<-152 dBm, typ. -156 dBm
3.6 GHz $\leq f < 7 \text{ GHz}$	<-150 dBm, typ. -152 dBm
7 GHz $\leq f < 8 \text{ GHz}$	<-149 dBm, typ. -152 dBm
R&S®FSQ26	
20 MHz $\leq f < 2 \text{ GHz}$	<-152 dBm, typ. -156 dBm
2 GHz $\leq f < 3.6 \text{ GHz}$	<-150 dBm, typ. -153 dBm
3.6 GHz $\leq f < 8 \text{ GHz}$	<-151 dBm, typ. -155 dBm
8 GHz $\leq f < 13 \text{ GHz}$	<-149 dBm, typ. -153 dBm
13 GHz $\leq f < 18 \text{ GHz}$	<-147 dBm, typ. -151 dBm
18 GHz $\leq f < 22 \text{ GHz}$	<-145 dBm, typ. -148 dBm
22 GHz $\leq f < 26.5 \text{ GHz}$	<-143 dBm, typ. -146 dBm
R&S®FSQ40	
20 MHz $\leq f < 2 \text{ GHz}$	<-152 dBm, typ. -156 dBm
2 GHz $\leq f < 8 \text{ GHz}$	<-150 dBm, typ. -153 dBm
8 GHz $\leq f < 18 \text{ GHz}$	<-148 dBm, typ. -151 dBm
18 GHz $\leq f < 22 \text{ GHz}$	<-145 dBm, typ. -148 dBm
22 GHz $\leq f < 26.5 \text{ GHz}$	<-143 dBm, typ. -146 dBm
26.5 GHz $\leq f < 40 \text{ GHz}$	<-135 dBm, typ. -138 dBm

Immunity to interference		
Image frequency	$f \leq 3.6 \text{ GHz}$	>90 dB suppression, typ. >110 dB
	$3.6 \text{ GHz} < f \leq 26.5 \text{ GHz}$	>70 dB suppression, typ. >100 dB
	$f > 26.5 \text{ GHz}$	typ. >70 dB suppression
	$f = \text{receive frequency}$	
Intermediate frequency	$f \leq 3.6 \text{ GHz}$	>90 dB suppression, typ. >110 dB
	$3.6 \text{ GHz} < f \leq 4.2 \text{ GHz}$	typ. 70 dB suppression
	$f > 4.2 \text{ GHz}$	>70 dB suppression, typ. >90 dB
	$f = \text{receive frequency}$	
Spurious response	$f > 1 \text{ MHz}$, without input signal, 0 dB RF attenuation	<-103 dBm
Other interfering signals	$\Delta f > 100 \text{ kHz}$	
	mixer level $<-10 \text{ dBm}$, $f_{in} \leq 2.3 \text{ GHz}$	<-80 dBc
	mixer level $<-35 \text{ dBm}$, $2.3 \text{ GHz} < f_{in} < 4 \text{ GHz}$	<-70 dBc
	mixer level $<-10 \text{ dBm}$	
	$4 \text{ GHz} \leq f < 8 \text{ GHz}$	<-70 dBc
	$8 \text{ GHz} \leq f < 16 \text{ GHz}$	<-64 dBc
	$16 \text{ GHz} \leq f < 26 \text{ GHz}$	<-58 dBc
	$26.5 \text{ GHz} \leq f < 40 \text{ GHz}$	<-52 dBc
	$f = \text{receive frequency}$	

Level display		
Screen		625 × 500 pixel (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	1 measurement diagram	3
	2 measurement diagrams	6
Trace detector		Max Peak, Min Peak, Auto Peak (Normal), Sample, RMS, Average, Quasi Peak
Number of measurement points	default value	625
	range	155 to 30001 in steps of about a factor of 2
Trace functions		clear/write, Max Hold, Min Hold, average
Trace update rate	local measurement, display update rate, 625 points, zero span	80/s
	remote measurement, display off: zero span/sweep time 1 ms	70/s
	span = 10 MHz, sweep time 2.5 ms	50/s
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1 %
Units of level axis	logarithmic level display	dBm, dBµV, dBmV, dBµA, dBpW
	linear level display	µV, mV, µA, mA, pW, nW

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	<0.2 dB ($\sigma = 0.07$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥ 10 dB, YIG filter = ON, +20 °C to +30 °C	
	10 MHz ≤ f < 3.6 GHz	<0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz ≤ f < 8 GHz, span < 1 GHz	<1.5 dB ($\sigma = 0.5$ dB)
	8 GHz ≤ f < 22 GHz, span < 1 GHz	<2 dB ($\sigma = 0.7$ dB)
	22 GHz ≤ f < 40 GHz, span < 1 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, YIG filter = ON, +5 °C to +45 °C	
	10 MHz ≤ f < 3.6 GHz	<0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz ≤ f < 26.5 GHz	add 0.5 dB to above values
	f ≥ 26.5 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB or f ≥ 3.6 GHz, span ≥ 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, YIG filter = OFF, +20 °C to +30 °C	
	3.6 GHz ≤ f < 8 GHz	< 1 dB ($\sigma = 0.3$ dB)
	8 GHz ≤ f < 40 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	RF attenuation > 40 dB	add 0.5 dB to above values
	DC coupling, RF attenuation ≥ 10 dB, YIG filter = OFF, +5 °C to +45 °C	
	3.6 GHz ≤ f < 26.5 GHz	add 0.5 dB to above values
	f ≥ 26.5 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB	add 0.5 dB to above values
Attenuator switching uncertainty	f = 128 MHz 0 dB to 70 dB, referenced to 10 dB attenuation	<0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting	RF attenuation 10 dB, referenced to -10 dBm reference level setting	<0.15 dB ($\sigma = 0.05$ dB)

Display non linearity	+20 °C to +30 °C, mixer level ≤–10 dBm	
Logarithmic level display	RBW ≤ 100 kHz or channel filters, S/N > 20 dB	
	0 dB to –70 dB	<0.1 dB ($\sigma = 0.03$ dB)
	–70 dB to –90 dB	<0.3 dB ($\sigma = 0.1$ dB)
	200 kHz ≤ RBW ≤ 10 MHz, S/N > 16 dB	
	0 dB to –50 dB	<0.2 dB ($\sigma = 0.07$ dB)
	–50 dB to –70 dB	<0.5 dB ($\sigma = 0.17$ dB)
	RBW > 10 MHz, S/N > 16 dB	
	0 dB to –50 dB	<0.5 dB ($\sigma = 0.17$ dB)
Linear level display	5 % of reference level	

Total measurement uncertainty	signal level 0 dB to –70 dB below reference level, S/N > 20 dB, 10 dB ≤ RF attenuation ≤ 40 dB, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C, mixer level ≤ –10 dBm, YIG filter = ON	
	f < 3.6 GHz, RBW ≤ 100 kHz	0.3 dB
	f < 3.6 GHz, RBW > 100 kHz	0.5 dB
	3.6 GHz ≤ f < 8 GHz	1.2 dB
	8 GHz ≤ f < 22 GHz	1.5 dB
	22 GHz ≤ f < 40 GHz	1.8 dB
	signal level 0 dB to –70 dB below reference level, S/N > 20 dB, 10 dB ≤ RF attenuation ≤ 40 dB, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C, mixer level ≤ –10 dBm, YIG filter = OFF	
	3.6 GHz ≤ f < 8 GHz	0.9 dB
	8 GHz ≤ f < 40 GHz	1.2 dB

I/Q data

General		
Interface		GPIB or LAN interface
Sampling rate		programmable: 10 kHz to 81.6 MHz in 0.1 Hz steps
ADC resolution		14 bit
I/Q memory	standard	16 Msample each for I and Q data
	option R&S®FSQ-B100	235 Msample
	option R&S®FSQ-B100 and R&S®FSQ-B102	705 Msample

RF path		
Max. information bandwidth		28 MHz
Spurious	full-scale input signal	typ.<-70 dBc
Third order distortion	two tones -6 dBfs each	typ.<-80 dBc
LO feedthrough	$f_{I/Q} = 81.6 \text{ MHz} - f_{\text{center}}$ mixer level = -10 dBm	typ.<-65 dBfs
Aliased DC offset	$f_{I/Q} = 20.4 \text{ MHz}$; within $\pm 10 \text{ K}$ temperature change after I/Q or total calibration	typ.<-65 dBfs

Frequency response		
Equalized bandwidth	RBW setting	equalized bandwidth
	3 MHz	2 MHz
	5 MHz	3 MHz
	10 MHz	7 MHz
	20 MHz	17 MHz
	50 MHz	28 MHz
Amplitude flatness	within equalized bandwidth	
	$f \leq 3.6 \text{ GHz}$	typ.0.3 dB
	$f > 3.6 \text{ GHz}$, YIG filter off	typ.0.5 dB
Deviation from linear phase	within equalized bandwidth	
	$f \leq 3.6 \text{ GHz}$	typ. 1°
	$f > 3.6 \text{ GHz}$, YIG filter off	typ. 2°

Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

Trigger functions

Trigger		
Trigger source		free run, video, external, IF level (mixer level 10 dBm to -50 dBm)
Trigger offset	span $\geq 10 \text{ Hz}$	125 ns to 100 s, resolution 125 ns min. (or 1 % of offset)
	span = 0 Hz	$\pm(125 \text{ ns to } 100 \text{ s})$, resolution 125 ns min., dependent on sweep time
Max. deviation of trigger offset		$\pm(31.25 \text{ ns} + (0.1 \% \times \text{trigger offset}))$
Gated sweep		
Gate source		external, IF level, video
Gate delay		1 μs to 100 s
Gate length		125 ns to 100 s, resolution min. 125 ns or 1 % of gate length
Max. deviation of gate length		$\pm(31.25 \text{ ns} + (0.05 \% \times \text{gate length}))$

Inputs and outputs (front panel)

RF input		
Impedance		50 Ω
Connector	R&S®FSQ3, R&S®FSQ8	N female
	R&S®FSQ26	testport adapter APC 3.5 mm/N female
	R&S®FSQ40	testport adapter 2.92 mm (K)/N female
VSWR	RF attenuation ≥ 10 dB, DC coupled f < 3.6 GHz	<1.5
	R&S®FSQ8: 3.6 GHz ≤ f < 8 GHz	<2
	R&S®FSQ26, R&S®FSQ40: 3.6 GHz ≤ f < 18 GHz	<1.8
	18 GHz ≤ f < 26.5 GHz	<2.0
	26.5 GHz ≤ f < 40 GHz	<2.5
	RF attenuation <10 dB or AC coupled	1.5, typical
Setting range of attenuator		0 dB to 75 dB, in 5 dB steps

Probe power supply		
Supply voltages		+15 V DC, -12.6 V DC and ground, max. 150 mA, nominal

Power supply for antennas etc		5-pin connector
Supply voltages		±10 V and ground, max. 100 mA, nominal
Power supply for noise source		BNC female
Output voltage		0 V and 28 V, switchable, nominal

USB interface	type A plug, version 2.0
Connector	3.5 mm mini jack
Output impedance	10 Ω
Open-circuit voltage	up to 1.5 V, adjustable

Inputs and outputs (rear panel)

IF 20.4 MHz		BNC female
Impedance		50 Ω
Bandwidth	RBW ≤ 30 kHz RBW = 50 kHz, 100 kHz 200 kHz ≤ RBW ≤ 10 MHz	1.67 × resolution bandwidth, min. 2.6 kHz 400 kHz equal to resolution bandwidth
Level	RBW ≤ 100 kHz, FFT filter, mixer level >−70 dBm RBW = 200 kHz to 10 MHz, mixer level >−50 dBm	−20 dBm at reference level 0 dBm at reference level
IF 404.4 MHz	active only if RBW >10 MHz	BNC female
Impedance		50 Ω
Bandwidth	RBW >10 MHz	equal to resolution bandwidth
Level	mixer level ≤ 0 dBm	mixer level typ. −10 dB
Video output		BNC female
Impedance		50 Ω
Output voltage	RBW ≥ 200 kHz, logarithmic scaling, full scale	0 V to 1 V
Reference output		BNC female
Impedance		50 Ω
Output frequency	internal reference external reference	10 MHz same as reference input signal
Level		>0 dBm, nominal
Reference Input		BNC female
Impedance		50 Ω
Input frequency range		1 MHz ≤ f _{in} ≤ 20 MHz, in 1 Hz steps
Required level		>0 dBm from 50 Ω
Sweep output		BNC female
Output voltage		0 V to 5 V, proportional to displayed frequency
External trigger/gate input		BNC female
Trigger voltage		0.5 V to 3.5 V
Input impedance		≥10 kΩ
IEC/IEEE bus control		interface to IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0 or HP8566 compatible
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0
LAN interface		10/100 BaseT, RJ-45
USB interface	upper connector lower connector	type A plug, version 1.1 type A plug, version 2.0
Serial interface		RS-232-C (COM), 9-pin female connectors
Printer interface		parallel (Centronics compatible)
Mouse interface		PS/2 compatible
Connector for external monitor (VGA)		15-pin D-sub

General data

Display	21 cm LC TFT color display (8.4")
Resolution	800 × 600 pixel (SVGA resolution)
Pixel failure rate	<1 × 10 ⁻⁵

Mass memory		
Mass memory	1.44 Mbyte 3 ½" disk drive, hard disk, USB flash disk (not supplied)	
Data storage		>500 instrument settings and traces

Temperature		
Temperature	operating temperature range permissible temperature range storage temperature range	+5 °C to +40 °C +0 °C to +50 °C −40 °C to +70 °C
Climatic loading		+40 °C at 95 % relative humidity (DIN EN 60068-2-30: 2000-02)

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with DIN EN 60068-2-6: 1996-05, DIN EN 60068-2-30: 2000-02, DIN EN 61010-1, MIL-T-28800D, class 5
	random	10 Hz to 100 Hz, acceleration 1 g (rms)
Shock		40 g shock spectrum, in line with MIL-STD-810C and MIL-T- 28800D, classes 3 and 5
Recommended calibration interval	operation with external reference operation with internal reference	2 years 1 year
RFI suppression		in line with European EMC Directive 89/336/EEC and EMC Directive 2004/108/EC including: IEC/EN 61326 class B (emission), (with R&S®FSQ-B17 option installed: class A) CISPR 11/EN 55011/ group 1 class B (emission), (with R&S®FSQ-B17 option installed: class A) IEC/EN 61326 table A.1 (immunity, industrial)

Power supply		
AC supply		100 V to 240 V, 3.1 A to 1.3 A; 50 Hz to 400 Hz, class of protection I to VDE 411
Power consumption	R&S®FSQ3, R&S®FSQ8	typ. 130 VA
	R&S®FSQ26, R&S®FSQ40	typ. 150 VA
Safety		in line with EN 61010-1, UL 3111-1, CSA C22.2 No. 1010-1, IEC 1010-1
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D	435 mm × 192 mm × 460 mm (17,13 in × 7,56 in × 18,11 in)
Weight Net, w/o options, nominal	R&S®FSQ3	14.6 kg (32.2 lb)
	R&S®FSQ8	15.4 kg (33.95 lb)
	R&S®FSQ26	16.5 kg (36.4 lb)
	R&S®FSQ40	16.8 kg (37.0 lb)

R&S®FSU-B9 tracking generator, R&S®FSU-B12 step attenuator for tracking generator

Unless specified otherwise, specifications not valid for frequency range from $-3 \times \text{RBW}$ to $+3 \times \text{RBW}$, however at least not valid from -100 kHz to $+100 \text{ kHz}$. Maximum output level $+5 \text{ dBm}$ (peak modulation in the case of amplitude-modulated signals).

Frequency		
Frequency range		100 kHz to 3.6 GHz
Resolution		1 Hz
Frequency offset		
Setting range		$\pm 200 \text{ MHz}$
Resolution		1 Hz

Spectral purity		
SSB phase noise	$f = 500 \text{ MHz}$, carrier offset 10 kHz	
	normal mode	typ. -120 dBc (1 Hz)
	with frequency offset	typ. -110 dBc (1 Hz)
	with FM modulation on	typ. -110 dBc (1 Hz)

Level		
Level setting range		-30 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB
	with option R&S®FSU-B12	-100 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB

Max. deviation of output level		
Absolute	$f = 128 \text{ MHz}$, output level -20 dBm to 0 dBm	<1 dB ($\sigma = 0.34 \text{ dB}$)
Frequency response	referenced to level at 128 MHz , sweep time $>100 \text{ ms}$, $+5 \text{ }^\circ\text{C}$ to $+45 \text{ }^\circ\text{C}$	
	output level -20 dBm to 0 dBm , 100 kHz to 3.6 GHz	<3 dB, typ. 1.9 dB
	output level -30 dBm to -20 dBm , $f = 100 \text{ kHz}$ to 3.6 GHz	3 dB
	additional deviation with R&S®FSU-B12, 100 kHz to 3.6 GHz	<1 dB

Dynamic range		
Attenuation measurement range	$\text{RBW} = 1 \text{ kHz}$, $f > 10 \text{ MHz}$	100 dB
Harmonics	output level -10 dBm	typ. -30 dBc
Spurious, nonharmonics	output level 0 dBm	typ. -30 dBc

Level sweep		
Level range		0 dBm to -25 dBm
Max. deviation of output level	$f = 100 \text{ kHz}$ to 2 GHz	
	output level 0 dBm to -5 dBm	<1.5 dB
	output level -5 dBm to -15 dBm	<2 dB
	output level -15 dBm to -25 dBm	<3 dB
	$f = 2 \text{ GHz}$ to 3 GHz	
	output level 0 dBm to -25 dBm	<3 dB

Modulation		
Modulation format	external	I/Q, AM, FM
Input voltage	full scale	
	AM, FM, V_{pp}	1 V
AM	I/Q	$\sqrt{U_i^2 + U_q^2} = 0.5 \text{ V}$
	$f_{center} > f_{mod}, \text{span} = 0 \text{ Hz}$	
Modulation depth		0 % to 99 %
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
FM	$f_{center} > f_{mod}, \text{span} = 0 \text{ Hz}$	
Frequency deviation		full range: 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Modulation frequency range	deviation = 10 MHz	0 Hz to 1 kHz
	deviation $\leq 1 \text{ MHz}$	0 Hz to 100 kHz
Modulation frequency response	0 kHz to 100 kHz	1 dB
I/Q modulation	$f_{center} > f_{mod}, \text{span} = 0 \text{ Hz}$	
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB

Modulation deviation of tracking generator	I/Q modulation, typical values, baseband signals generated by the R&S®AMIQ	
EVM	NADC/TETRA/PDC	
	RMS	2 %
	peak	4 %
	PHS	
	RMS	2 %
	peak	5 %
Phase error	GSM/DCS1800/PCS1900	
	RMS	1.5°
	peak	5°
Rho factor	IS-95 CDMA	0.997

Inputs and outputs (front panel)		
RF output		N female, 50 Ω
VSWR	100 kHz $\leq f \leq 2 \text{ GHz}$	1.2
	2 GHz $\leq f \leq 3.6 \text{ GHz}$	1.5

Inputs and outputs (rear panel)		
TG I/AM IN		BNC female
Impedance		50 Ω
Input voltage	V_{pp}	1 V
TG Q/FM IN		BNC female
Impedance		50 Ω
Input voltage	V_{pp}	1 V

R&S®FSQ-B17 digital baseband interface

The R&S®FSQ-B17 option gives access to the digital baseband signals of the R&S®FSQ.

The input signals are digitized analog baseband signals, which are fed into the signal processing unit of the R&S®FSQ. The digital baseband data are applied to the I/Q DATA IN connector of the R&S®FSQ-B17 option.

The output signals are either down converted analog signals from the RF input, or digitized analog baseband input signals coming from the R&S®FSQ-B17 option. The digital baseband data (I/Q data) are accessible online at the I/Q DATA OUT connector of the R&S®FSQ-B17 option. The sampling rate is programmable within the limits defined by the resampling and decimation capabilities of the R&S®FSQ.

I/Q Data input		
Resolution	for each, I-data and Q-data	20 bits
Clock rate		66 MHz to 90 MHz
Transfer rate	transfer rate ≤ clock rate	max. 81.6 MHz
Sample rate of payload		100 Hz to 4 GHz
Data format	channel link serializer input	48 bit wide bus multiplexed to 8 lines
I/Q Data output		
Resolution	for each, I-data and Q-data	20 bits
Clock rate		81.6 MHz
Sample rate (= transfer rate)	measurement via RF input	10 kHz to 81.6 MHz
	measurement via analog baseband input (Option R&S®FSQ-B17)	10 kHz to 40.8 MHz
Data format	channel link serializer output	48 bit wide bus multiplexed to 8 lines

Input and Output (rear panel)

IQ Data IN		
Connector		26 pin female Mini-D-Ribbon connector
Data lines	number of data lines (differential lines)	8
	bit rate (on each data line)	396 MHz to 540 MHz
	level	LVDS
Clock	clock rate	66 MHz to 90 MHz
	level	LVDS
IQ Data OUT		
Connector		26 pin female Mini-D-Ribbon connector
Data lines	number of data lines (differential lines)	8
	bit rate (on each data line)	489.6 MHz
	level	LVDS
Clock	clock rate	81.6 MHz
	level	LVDS

RFI suppression		immunity for industrial environment; class A emissions ²
-----------------	--	------------------------------------------------------------------------

² Note regarding the use of the instrument with the R&S®FSQ-B17 option installed:

The instrument complies with the emission requirements stipulated by EN 55011 class A. This means that the instrument is suitable for use in industrial environments. In accordance with EN 61000-6-4, operation is not covered in residential, commercial, and business areas nor in small-size companies. The instrument must not be operated in residential, commercial, and business areas nor in small-size companies, unless additional measures are taken to ensure that EN 61000-6-3 is met.

R&S®FSU-B21 LO/IF ports for external mixers (for R&S®FSQ26 and R&S®FSQ40 only)

LO signal		
Frequency range		7.0 GHz to 15.5 GHz
Level	+20 °C to +30 °C	+15.5 dBm ±1 dB
	+5 °C to +40 °C	+15.5 dBm ±3 dB

IF input		
IF frequency		404.4 MHz
Full scale level	2-port mixer (LO output/IF input, front panel)	-20 dBm
	3-port mixer (IF input, front panel)	-20 dBm
Level uncertainty	IF input level -30 dBm, RBW 30 kHz, 2-port mixer, LO output/IF input (front panel)	
	+20 °C to +30 °C	<1 dB
	+5 °C to +40 °C	<3 dB
	3-port mixer, IF input (front panel)	
	+20 °C to +30 °C	<1 dB
	+5 °C to +40 °C	<3 dB

Inputs and outputs (front panel)		
LO output/IF input		SMA-female, 50 Ω
IF input		SMA-female, 50 Ω

R&S®FSQ-B23 RF preamplifier (for R&S®FSQ26 only, requires R&S®FSU-B25 option)

Level measurement uncertainty		
Frequency response	preamplifier = ON, YIG filter = ON or OFF	
	3.6 GHz to 8 GHz	<2.0 dB ($\sigma = 0.7$ dB)
	8 GHz to 22 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	22 GHz to 26.5 GHz	<3.0 dB ($\sigma = 1$ dB)

Displayed average noise level		
	0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker	
	preamplifier = OFF, YIG filter = ON or OFF	
	3.6 GHz to 8 GHz	R&S®FSQ26 specifications + 2 dB
	8 GHz to 26.5 GHz	R&S®FSQ26 specifications + 3 dB
	preamplifier = ON, YIG filter = ON	
	3.6 GHz to 8 GHz	<-162 dBm, typ. -165 dBm
	8 GHz to 13 GHz	<-159 dBm, typ. -162 dBm
	13 GHz to 18 GHz	<-157 dBm, typ. -160 dBm
	18 GHz to 22 GHz	<-154 dBm, typ. -159 dBm
	22 GHz to 26.5 GHz	<-150 dBm, typ. -155 dBm
	preamplifier = ON, YIG filter = OFF	specifications with YIG filter = OFF + 2 dB, nominal

R&S®FSU-B24 preamplifier (for R&S®FSQ26 and R&S®FSQ40 only)

Frequency range	R&S®FSQ 26	100 kHz to 26.6 GHz
	R&S®FSQ 40	100 kHz to 40 GHz
Nominal gain		30 dB

Displayed average noise level (DANL)	
	0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, YIG filter = ON or OFF, preamplifier = OFF $f < 10 \text{ kHz}$: RBW = 10 Hz FFT filter, trace average, sweep count = 20, $f \geq 10 \text{ kHz}$: RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
20 Hz	<-90 dBm
100 Hz	<-110 dBm
1 kHz	<-120 dBm
10 kHz	<-130 dBm
100 kHz	<-130 dBm
1 MHz	<-140 dBm
10 MHz	<-150 dBm
20 MHz $\leq f < 2 \text{ GHz}$	<-151 dBm, typ. -154 dBm
2 GHz $\leq f < 3.6 \text{ GHz}$	<-149 dBm, typ. -152 dBm
3.6 GHz $\leq f < 8 \text{ GHz}$	<-147 dBm, typ. -150 dBm
8 GHz $\leq f < 13 \text{ GHz}$	<-145 dBm, typ. -148 dBm
13 GHz $\leq f < 18 \text{ GHz}$	<-144 dBm, typ. -147 dBm
18 GHz $\leq f < 22 \text{ GHz}$	<-142 dBm, typ. -145 dBm
22 GHz $\leq f < 26.5 \text{ GHz}$	<-138 dBm, typ. -141 dBm
26.5 GHz $\leq f < 32 \text{ GHz}$	<-131 dBm, typ. -134 dBm
32 GHz $\leq f \leq 40 \text{ GHz}$	<-129 dBm, typ. -132 dBm
	0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, YIG filter = ON, preamplifier = ON RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
100 kHz	<-140 dBm
1 MHz	<-150 dBm
10 MHz	<-161 dBm
20 MHz $\leq f < 2 \text{ GHz}$	<-163 dBm, typ. -166 dBm
2 GHz $\leq f < 3.6 \text{ GHz}$	<-161 dBm, typ. -164 dBm
3.6 GHz $\leq f < 26.5 \text{ GHz}$	<-162 dBm, typ. -165 dBm
26.5 GHz $\leq f < 32 \text{ GHz}$	<-160 dBm, typ. -162 dBm
32 GHz $\leq f \leq 40 \text{ GHz}$	<-158 dBm, typ. -161 dBm
	0 dB RF attenuation, termination 50 Ω, log. scaling, normalized to 1 Hz RBW, YIG filter = OFF, preamplifier = ON RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
100 kHz	<-140 dBm
1 MHz	<-150 dBm
10 MHz	<-161 dBm
20 MHz $\leq f < 2 \text{ GHz}$	<-163 dBm, typ. -166 dBm
2 GHz $\leq f < 3.6 \text{ GHz}$	<-161 dBm, typ. -164 dBm
3.6 GHz $\leq f < 22 \text{ GHz}$	<-160 dBm, typ. -163 dBm
22 GHz $\leq f < 26.5 \text{ GHz}$	<-157 dBm, typ. -160 dBm
26.5 GHz $\leq f < 32 \text{ GHz}$	<-156 dBm, typ. -159 dBm
32 GHz $\leq f \leq 40 \text{ GHz}$	<-153 dBm, typ. -156 dBm

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level -30 dBm, reference level -30 dBm, RF attenuation 10 dB	
	preamplifier = OFF	<0.2 dB ($\sigma = 0.07$ dB)
	preamplifier = ON	<0.3 dB ($\sigma = 0.1$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation \geq 10 dB, YIG filter = ON, preamplifier = OFF, +20 °C to +30 °C	
	20 Hz \leq f < 10 MHz	<0.5 dB ($\sigma = 0.16$ dB)
	10 MHz \leq f < 3.6 GHz	<0.3 dB ($\sigma = 0.1$ dB)
	3.6 GHz \leq f < 8 GHz, span < 1 GHz	<1.5 dB ($\sigma = 0.5$ dB)
	8 GHz \leq f < 22 GHz, span < 1 GHz	<2.0 dB ($\sigma = 0.7$ dB)
	22 GHz \leq f < 40 GHz, span < 1 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	RF attenuation > 40 dB or f \geq 3.6 GHz, span \geq 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG filter = ON, preamplifier = OFF, +5 °C to +45 °C	
	20 Hz \leq f < 3.6 GHz	<0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz \leq f < 26.5 GHz	add 0.5 dB to above values
	26.5 GHz \leq f \leq 40 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB or f \geq 3.6 GHz, span \geq 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG-Filter = ON, preamplifier = ON, +20 °C to +30 °C	
	100 kHz \leq f < 10 MHz	<0.8 dB ($\sigma = 0.27$ dB)
	10 MHz \leq f < 3.6 GHz	<0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz \leq f < 8 GHz, span < 1 GHz	<2.0 dB ($\sigma = 0.7$ dB)
	8 GHz \leq f < 22 GHz, span < 1 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	22 GHz \leq f < 40 GHz, span < 1 GHz	<3.0 dB ($\sigma = 1$ dB)
	RF attenuation > 40 dB or f \geq 3.6 GHz, span \geq 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG filter = ON, preamplifier = ON, +5 °C to +45 °C	
	100 kHz \leq f < 10 MHz	<1.0 dB ($\sigma = 0.3$ dB)
	10 MHz \leq f < 3.6 GHz	<0.8 dB ($\sigma = 0.27$ dB)
	3.6 GHz \leq f < 26.5 GHz	add 0.5 dB to above values
	26.5 GHz \leq f \leq 40 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB or f \geq 3.6 GHz, span \geq 1 GHz	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG filter = OFF, preamplifier = OFF, +20 °C to +30 °C	
	3.6 GHz \leq f < 8 GHz	<1.0 dB ($\sigma = 0.3$ dB)
	8 GHz \leq f < 40 GHz	<1.5 dB ($\sigma = 0.5$ dB)
	RF attenuation > 40 dB	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG filter = OFF, preamplifier = OFF, +5 °C to +45 °C	
	3.6 GHz \leq f < 26.5 GHz	add 0.5 dB to above values
	26.5 GHz \leq f \leq 40 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG-Filter = OFF, preamplifier = ON, +20 °C to +30 °C	
	3.6 GHz \leq f < 8 GHz	<1.5 dB ($\sigma = 0.5$ dB)
	8 GHz \leq f < 22 GHz	<2.0 dB ($\sigma = 0.7$ dB)
	22 GHz \leq f < 40 GHz	<2.5 dB ($\sigma = 0.8$ dB)
	RF attenuation > 40 dB	add 0.5 dB to above values
	DC coupling, RF attenuation \geq 10 dB, YIG filter = OFF, preamplifier = ON, +5 °C to +45 °C	
	3.6 GHz \leq f < 26.5 GHz	add 0.5 dB to above values
	26.5 GHz \leq f \leq 40 GHz	add 1.0 dB to above values
	RF attenuation > 40 dB	add 0.5 dB to above values

Intermodulation		
Second harmonic intercept (SHI)	f _{in} > 1.8 GHz	>65 dBm, nominal

R&S®FSU-B25 electronic attenuator

Frequency		
Frequency range	R&S®FSQ3	100 kHz ³ , 10 MHz to 3.6 GHz
	R&S®FSQ8	100 kHz ³ , 10 MHz to 8 GHz
	R&S®FSQ26	100 kHz ³ , 10 MHz to 3.6 GHz
	R&S®FSQ40	100 kHz ³ , 10 MHz to 3.6 GHz
Setting range		
Electronic attenuator		0 dB to 30 dB, in 5 dB steps
Preamplifier		20 dB, switchable
Level measurement uncertainty		
Frequency response	with preamplifier or electronic attenuator	
	10 MHz to 50 MHz	<1 dB ($\sigma = 0.34$ dB)
	50 MHz to 3.6 GHz	<0.6 dB ($\sigma = 0.2$ dB)
	3.6 MHz to 8 GHz	<2.0 dB ($\sigma = 0.7$ dB)
Reference error	at 128 MHz, RBW \leq 100 kHz, reference level -30 dBm, RF attenuation 10 dB	
	electronic attenuator	<0.3 dB ($\sigma = 0.1$ dB)
	preamplifier	<0.3 dB ($\sigma = 0.1$ dB)
Displayed average noise level		
R&S®FSQ3, R&S®FSQ8, R&S®FSQ26	0 dB RF attenuation, termination 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 3 kHz, zero span, sweep time 50 ms, sample detector, trace average, sweep count = 20, mean marker	
	preamplifier = ON	
	10 MHz to 2.0 GHz	<-162 dBm
	2.0 GHz to 3.6 GHz	<-160 dBm
	R&S®FSQ8	
	3.6 GHz to 8 GHz	<-157 dBm
	R&S®FSQ40	
	10 MHz to 40 MHz	<-160 dBm
	40 MHz to 2 GHz	<-162 dBm
	2 GHz to 3.6 GHz	<-160 dBm
	with the R&S®FSU-B25 option built in, the average noise level values displayed by the base units degrade by:	
	preamplifier = OFF, electronic attenuator = OFF	
R&S®FSQ8	20 Hz to 3.6 GHz	1 dB
	3.6 GHz to 8 GHz	2 dB
	preamplifier = OFF, electronic attenuator 0 dB	
	20 Hz to 3.6 GHz	typ. 2.5 dB
	R&S®FSQ8	
	3.6 GHz to 8 GHz	typ. 3.5 dB
Intermodulation		
Third-order intercept point (TOI)	electronic attenuator = ON, $\Delta f > 5 \times$ RBW or 10 kHz	
	10 MHz to 300 MHz	>17 dBm
	300 MHz to 3.6 GHz	>20 dBm
	3.6 GHz to 8 GHz	>18 dBm

³ Valid as of electronic attenuator board stock number 1137.0724.02 (see instrument hardware info).

R&S®FSQ-B71 I/Q baseband inputs

I/Q baseband inputs for unbalanced and balanced signals. Input impedance selectable 50Ω / $1 M\Omega$. All data specified with $1 M\Omega$ input impedance setting apply to 50Ω source impedance. Specifications are valid under the following conditions:
 30 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to, and baseband calibration performed. Data without tolerances: typical values only. Data designated "nominal" apply to design parameters and are not tested.

Frequency

Sampling		
ADC sampling rate		81.6 MHz
ADC resolution		14 bit
Frequency range		
Useful bandwidth with specified frequency response	$f_s = \text{output data rate}$ $f_s = 40.8 \text{ MHz to } 81.6 \text{ MHz}$ $f_s > 20.4 \text{ MHz to } <40.8 \text{ MHz}$ $f_s = 10 \text{ kHz to } 20.4 \text{ MHz}$	DC to $0.441 \times f_s$ DC to $0.34 \times f_s$ DC to $0.40 \times f_s$

Spectral purity

Phase noise at $f_{in} = 20 \text{ MHz}$	1 kHz offset	typ. -135 dBc (1 Hz)
------------------------------------------	--------------	--------------------------------

Amplitude

Maximum safe input level		
	50Ω , power from 50Ω source	+30 dBm (1 W)
	$1 M\Omega$, peak voltage	$\pm 5 \text{ V}$
Input level range (full scale)		
	with balanced setting: differential voltage	
	50Ω	$\pm 31.6 \text{ mV to } \pm 5.62 \text{ V (5 dB steps)}$
	$1 M\Omega$	$\pm 31.6 \text{ mV to } \pm 1.78 \text{ V (5 dB steps)}$
Max. common mode input voltage		
	50Ω	$\pm 2 \times \text{range, max. } \pm 5 \text{ V}$
	$1 M\Omega$, any range	$-2.5 \text{ V to } +3.5 \text{ V}$
Level uncertainty		
Level uncertainty	at 1 MHz (full scale)	<0.25 dB
	I/Q imbalance at 1 MHz	<0.1 dB
Frequency response		
	$50 \Omega, f_s = 81.6 \text{ MHz}$	
	DC to 30 MHz, filter on	<0.3 dB
	DC to 36 MHz, filter off	<0.3 dB
	I/Q imbalance, DC to 30 MHz, filter on	<0.15 dB
	I/Q imbalance, DC to 36 MHz, filter off	<0.15 dB
Frequency response		
	$1 M\Omega$	
	DC to 10 MHz	<0.30 dB
	I/Q imbalance, DC to 10 MHz	<0.15 dB
Amplitude linearity		
Amplitude linearity	0 dB to -90 dB with dither on	typ. signal analyzer 0.1 dB
I/Q offset		
	50Ω balanced setting	<0.15 % of range $\pm 0.2 \text{ mV}$
	50Ω unbalanced setting	<2 mV
	$1 M\Omega$	<2 mV

Dynamic range

Noise level		
Signal to noise ratio	range = 1 V, signal level equal to range	typ. 143 dBc (1 Hz)
Noise floor	range = 31.6 mV, RMS voltage in 1 Hz bandwidth	
	50 Ω, unbalanced setting	typ. <4 nV
	50 Ω, balanced setting	typ. <6 nV
	1 MΩ, unbalanced setting	typ. <16 nV
	1 MΩ, balanced setting	typ. <16 nV
Spurious and harmonics	single signal, level equal to range 50 Ω: DC to 36 MHz 1 MΩ: DC to 10 MHz, range ≤ 1 V	typ. -60 dBc
Intermodulation distortion 2nd and 3rd order	two signals, level equal to range -6 dB 50 Ω: DC to 20 MHz 50 Ω: 20 MHz to 36 MHz 1 MΩ: DC to 10 MHz, range ≤ 1 V	typ. -75 dBc typ. -70 dBc typ. -75 dBc
Image rejection	aliasing into useful bandwidth from single out of band signal equal to range	typ. -75 dB
I/Q crosstalk	DC to 36 MHz	typ. -70 dB

Phase

Group delay variation versus frequency	aliasing filter on, DC to 30 MHz	typ. 1 ns
	aliasing filter off, DC to 36 MHz	typ. 1 ns
Differential phase between I and Q	DC to 10 MHz	typ. 1°
	aliasing filter on, >10 MHz to 30 MHz	typ. 2°
	aliasing filter off, >10 MHz to 36 MHz	typ. 2°

Input ports

Channels		2 (I & Q)
Connector	each channel balanced or unbalanced	4 × BNC female
Input impedance	unbalanced setting	
	common mode	50 Ω/1 MΩ nominal
	balanced setting	
	common mode	50 Ω/1 MΩ nominal
	differential	100 Ω/2 MΩ nominal
Return loss	50 Ω input impedance	
	DC to 10 MHz	typ. 30 dB
	>10 MHz to 36 MHz	typ. 20 dB
Input capacitance	with 1 MΩ input impedance setting, common mode	typ. 9 pF

R&S®FSQ-B72 I/Q bandwidth extension

Activation of the 120 MHz I/Q bandwidth extension R&S®FSQ-B72 depends on the selected sampling rate.

It is active for sampling rates > 81.6 MHz. For sampling rates up to 81.6 MHz (max demodulation bandwidth 28 MHz) the standard I/Q path is used and the IQ data specifications of the basic unit apply. For sampling rates between 20.4 MHz and 81.6 MHz the 120 MHz bandwidth extension can be selected alternatively.

Frequency

RF Frequency range	R&S®FSQ3	40 MHz ⁴ to 3.6 GHz
	R&S®FSQ8	40 MHz ⁴ to 8 GHz
	R&S®FSQ26	40 MHz ⁴ to 26.5 GHz
	R&S®FSQ40	40 MHz ⁴ to 40 GHz

Useful bandwidth	20.4 MHz < f _s ≤ 81.6 MHz	0.8 × f _s
Bandwidth with equalized frequency response as specified below	81.6 MHz < f _s < 163.2 MHz	0.68 × f _s
	163.2 MHz ≤ f _s ≤ 326.4 MHz	120 MHz
	f _s = output sampling rate	

Frequency response	within useful bandwidth, referenced to center frequency RF attenuation ≥ 10 dB, mixer level ≤ -10 dBm	
---------------------------	-------------------------------------------------------------------------------------------------------	--

Amplitude flatness	+20 °C to +30 °C	
	≤ 3.6 GHz ±40 MHz	< 0.3 dB
	±60 MHz	< 0.6 dB
	> 3.6 GHz to 26.5 GHz	< 0.6 dB
	> 26.5 GHz	typ. 0.6 dB
	+5 °C to +45 °C	
	≤ 3.6 GHz ±40 MHz	< 0.4 dB
	±60 MHz	< 0.8 dB
	> 3.6 GHz to 26.5 GHz	< 1 dB
	> 26.5 GHz	typ. 1 dB

Deviation from linear phase	+20 °C to +30 °C	
	≤ 3.6 GHz ±40 MHz	typ. ±2°
	±60 MHz	typ. ±3°
	> 3.6 GHz to 26.5 GHz	typ. ±3°
	+5 °C to +45 °C	
	≤ 3.6 GHz ±40 MHz	typ. ±3°
	±60 MHz	typ. ±4°
	> 3.6 GHz to 26.5 GHz	typ. ±4°

Output sampling rate	min.	> 20.4 MHz
	max.	326.4 MHz

ADC sampling rate	326.4 MHz	
--------------------------	-----------	--

Level

Level uncertainty	at center frequency, RF attenuation ≥ 10 dB, mixer level ≤ 0 dBm signal level = reference level	
	+20 °C to +30 °C	
	≤ 3.6 GHz	< 0.8 dB
	3.6 GHz to 8 GHz	< 1.5 dB
	8 GHz to 26.5 GHz	< 2.5 dB
	26.5 GHz to 40 GHz	< 2.5 dB
	+5 °C to +45 °C	
	≤ 3.6 GHz	< 1.2 dB
	3.6 GHz to 8 GHz	< 2.0 dB
	8 GHz to 26.5 GHz	< 3.0 dB
	26.5 GHz to 40 GHz	< 3.5 dB

Level nonlinearity	0 dB to -70 dB, dither on	< 0.15 dB
---------------------------	---------------------------	-----------

⁴ With center frequency < 120 MHz specifications apply for: reference level ≥ 0 dBm and RF attenuation / dB ≤ reference level / dBm

Dynamic


Spurious response		
Without input signal (I/Q offset not included)	0 dB RF attenuation, reference level -20 dBm	
	80 MHz $\leq f \leq$ 3345 MHz	<-95 dBm
	3345 MHz $< f <$ 3470 MHz	<-75 dBm
	3470 MHz $\leq f \leq$ 3600 MHz	<-95 dBm
	$f > 3600$ MHz	<-80 dBm
With full scale input signal (I/Q offset not included)	mixer level ≤ -10 dBm center frequency ≥ 120 MHz	<-60 dBc, typ. -70 dBc
I/Q offset	mixer level > -20 dBm	<-70 dBfs
IF rejection	IF frequency range 408 MHz ± 60 MHz	
	center frequency ≤ 400 MHz	>40 dB
	center frequency > 400 MHz	>70 dB

Third order intermodulation	two signals, -6 dBfs each mixer level (each signal)	<-60 dBc, typ. -68 dBc
	≤ 3.6 GHz	≤ -20 dBm
	> 3.6 GHz	≤ -25 dBm

Rejection of out of band signals	≤ 3.6 GHz	typ. 60 dB
	> 3.6 GHz up to ± 750 MHz offset	typ. 60 dB
	$> \pm 750$ MHz offset	0 dB nominal

Signal to noise ratio	mixer level = 0 dBm	
	≤ 26.5 GHz	>135 dBfs (1 Hz)
	26.5 GHz to 40 GHz	>130 dBfs (1 Hz)

Noise floor	RF attenuation 0 dB, reference level ≤ -20 dBm		
	R&S®FSQ3/R&S®FSQ8	1 GHz	<-150 dBm (1 Hz)
	R&S®FSQ8	5 GHz	<-147 dBm (1 Hz)
	R&S®FSQ26/R&S®FSQ40	1 GHz	<-148 dBm (1 Hz)
	R&S®FSQ26/R&S®FSQ40	5 GHz	<-149 dBm (1 Hz)
	R&S®FSQ26/R&S®FSQ40	13 GHz	<-146 dBm (1 Hz)
	R&S®FSQ26/R&S®FSQ40	22 GHz	<-142 dBm (1 Hz)

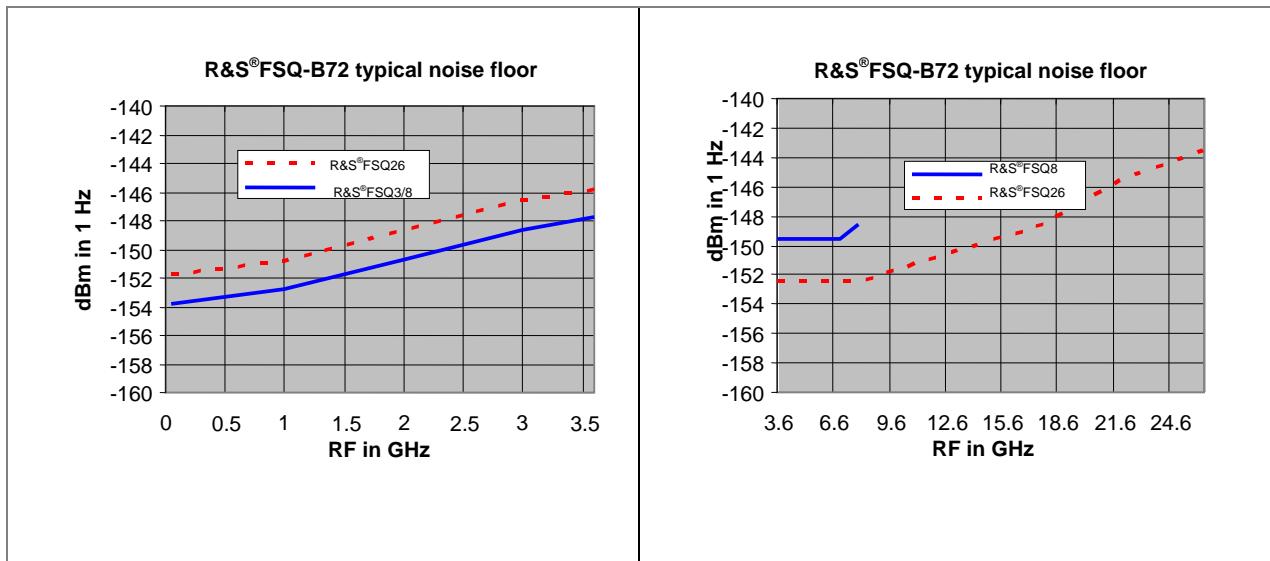

Susceptibility to radiated emission	relative to full scale, RF attenuation 0 dB, reference level ≤ -10 dBm, field strengths 10 V/m
	IF frequency band 348 MHz to 468 MHz typ. <-55 dB
	image frequency 837.6 MHz to 957.6 MHz typ. <-60 dB
	other frequencies typ. <-75 dB

General data

Interface	GPIB or LAN interface	
I/Q memory	standard	16 Msample each for I and Q data
	option R&S®FSQ-B100	235 Msample
	option R&S®FSQ-B100 and R&S®FSQ-B102	705 Msample
Sampling rate		programmable >20.4 MHz to 326.4 MHz in 0.1 Hz steps
IF pre-filter 3 dB bandwidth	≤3.6 GHz	typ. 125 MHz
	>3.6 GHz, YIG filter switched off	typ. 125 MHz

Ordering information

Designation	Type	Order No.
Signal Analyzer 20 Hz to 3.6 GHz	R&S®FSQ3	1155.5001.03
Signal Analyzer 20 Hz to 8 GHz	R&S®FSQ8	1155.5001.08
Signal Analyzer 20 Hz to 26.5 GHz	R&S®FSQ26	1155.5001.26
Signal Analyzer 20 Hz to 40 GHz	R&S®FSQ40	1155.5001.40
Accessories supplied		
Power cable, printed quick start guide, CD-ROM (with operating manual and service manual)		
R&S®FSQ26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector		
R&S®FSQ40: test port adapter with K female (10366.4790.00) and N female (1036.4777.00) connector		

Options

Designation	Type	Order No.	Retrofittable	Remarks
Options				
OCXO, low aging/improved phase noise at 10 Hz carrier offset	R&S®FSU-B4	1144.9000.02	yes	
Tracking Generator, 100 kHz to 3.6 GHz	R&S®FSU-B9	1142.8994.02	yes	
External Generator Control	R&S®FSP-B10	1129.7246.03	yes	excludes R&S®FSQ-B100
Output Attenuator, 0 dB to 70 dB, for R&S®FSU-B9	R&S®FSU-B12	1142.9349.02	yes	requires R&S®FSU-B9
Removable Hard Disk	R&S®FSQ-B18	1303.0400.03	no	
Digital Baseband Interface	R&S®FSQ-B17	1163.0063.02	no	
Second Hard Disk for R&S®FSQ-B18	R&S®FSQ-B19	1303.0600.03		requires R&S®FSU-B18
LO/IF ports for external mixers	R&S®FSU-B21	1157.1090.03	yes	only for R&S®FSQ26 and R&S®FSQ40
20 dB Preamplifier, 3.6 GHz to 26.5 GHz, for R&S®FSQ26	R&S®FSQ-B23	1157.0907.03	no	only for R&S®FSQ26, requires R&S®FSU-B25
30 dB Preamplifier, 100 kHz to 50 GHz	R&S®FSU-B24	1157.2100.50	yes	only for R&S®FSQ26 and R&S®FSQ40
Electronic Attenuator, 0 dB to 30 dB, and 20 dB Preamplifier (3.6 GHz)	R&S®FSU-B25	1144.9298.02	yes	
Analog Baseband Inputs	R&S®FSQ-B71	1157.0113.03	yes	
I/Q Bandwidth Extension	R&S®FSQ-B72	1157.0336.12	no	
I/Q memory extension to 235 Msample	R&S®FSQ-B100	1169.5244.02	no	excludes R&S®FSP-B10
IQ memory extension from 235 Msample to 705 Msample	R&S®FSQ-B102	1169.5444.04	no	requires R&S®FSQ-B100

Designation	Type	Order No.	Retrofittable	Remarks
Firmware/Software				
GSM/EDGE Application Firmware	R&S®FS-K5	1141.1496.02		
FM Measurement Demodulator	R&S®FS-K7	1141.1796.02		
Bluetooth® Application Firmware	R&S®FS-K8	1157.2568.02		
Power Sensor Measurements	R&S®FS-K9	1157.3006.02		
Application Firmware for Noise Figure and Gain Measurements	R&S®FS-K30	1300.6508.02		preamplifier recommended (e.g. R&S®FSU-B25)
Application Firmware for Phase Noise Measurement	R&S®FS-K40	1161.8138.02		
3GPP BTS/Node B FDD Application Firmware	R&S®FS-K72	1154.7000.02		
3GPP UE FDD Application Firmware	R&S®FS-K73	1154.7252.02		
3GPP HSDPA BTS Application Firmware	R&S®FS-K74	1300.7156.02		requires R&S®FS-K72
3GPP TD-SCDMA BTS Application Firmware	R&S®FS-K76	1300.7291.02		
3GPP TD-SCDMA UE Application Firmware	R&S®FS-K77	1300.8100.02		
CDMA2000®/IS-95 (cdmaOne)/1xEV-DV BTS Application Firmware	R&S®FS-K82	1157.2316.02		
CDMA2000®/1xEV-DV MS Application Firmware	R&S®FS-K83	1157.2416.02		
CDMA2000®/1xEV-DO BTS Application Firmware	R&S®FS-K84	1157.2851.02		
CDMA2000®/1xEV-DO MS Application Firmware	R&S®FS-K85	1300.6689.02		
Vector Signal Analysis	R&S®FSQ-K70	1161.8038.02		
WLAN 802.11a Application Firmware	R&S®FSQ-K90	1157.3064.02		
WLAN 802.11a/b/g/j Application Firmware	R&S®FSQ-K91	1157.3129.02		
Upgrade from R&S®FSQ-K90 to R&S®FSQ-K91	R&S®FSQ-K90U	1300.8000.02		
WiMAX 802.16-2004 OFDM Application Firmware	R&S®FSQ-K92	1300.7410.02		
WiMAX 802.16e, WiBro Application Firmware	R&S®FSQ-K93	1300.8600.02		
Upgrade from R&S®FSQ-K92 to R&S®FSQ-K93	R&S®FSQ-K92U	1300.8500.02		
Generic OFDM Application Software	R&S®FSQ-K96	1308.9570.02		Windows based software, external PC required
EUTRA/LTE uplink Application Software	R&S®FSQ-K100	1308.5244.02		Windows based software, external PC required
EUTRA/LTE downlink Application Software	R&S®FSQ-K101	1308.9058.02		Windows based software, external PC required

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Rohde&Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA -USA).

Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with 19" Adapter R&S®ZZA-411)	R&S®ZZA-T45	1109.3774.00
Matching pads, 50/75 Ω		
L Section, matching at both ends	R&S®RAM	0358.5414.02
Series Resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
SWR Bridges, 50 Ω		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
High power attenuators		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
Probe power connector, 3 pin		1065.9480.00
Cable for connecting digital baseband interfaces	R&S®SMU-Z6	1415.0201.02
DC blocks		
DC Block, 10 kHz to 18 GHz (Type N)	R&S®FSE-Z4	1084.7443.02
External harmonic mixers (for R&S®FSQ26, R&S®FSQ40 with option R&S®FSU-B21)		
Harmonic Mixer 40 GHz to 60 GHz	R&S®FS-Z60	1089.0799.02
Harmonic Mixer 50 GHz to 75 GHz	R&S®FS-Z75	1089.0847.02
Harmonic Mixer 60 GHz to 90 GHz	R&S®FS-Z90	1089.0899.02
Harmonic Mixer 75 GHz to 110 GHz	R&S®FS-Z110	1089.0976.04
For R&S®FSQ26 only:		
Test port adapter N male		1021.0541.00
Test port adapter 3.5 mm male		1021.0529.00
Microwave Measurement Cable with test port adapter set N male and 3.5 mm male	R&S®FSE-Z15	1046.2002.02
For R&S®FSQ40 only:		
Test port adapter N male		1036.4783.00
Test port adapter K male		1036.4802.00
Test port adapter 2.4 mm female	R&S®FSE-Z5	1088.1627.02

Service you can rely on

- | In 70 countries
- | Person-to-person
- | Customized and flexible
- | Quality with a warranty
- | No hidden terms

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Regional contact

Europe, Africa, Middle East

+49 1805 12 42 42* or +49 89 4129 137 74

customersupport@rohde-schwarz.com

North America

1-888-TEST-RSA (1-888-837-8772)

customer.support@rsa.rohde-schwarz.com

Latin America

+1-410-910-7988

customersupport.la@rohde-schwarz.com

Asia/Pacific

+65 65 13 04 88

customersupport.asia@rohde-schwarz.com

Certified Quality System
ISO 9001
DQS REG. NO 1954 QM

Certified Environmental System
ISO 14001
DQS REG. NO 1954 UM

For product brochure,
see PD 0758.0945.12
and www.rohde-schwarz.com

Rohde & Schwarz GmbH & Co. KG

Mühldorfstraße 15 | 81671 München

Phone +498941290 | Fax +4989412912164

www.rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners | Printed in Germany (as)

PD 0758.0945.22 | Version 09.00 | July 2008 | R&S®FSQ

Data without tolerance limits is not binding | Subject to change

*0.14 €/min within German wireline network; rates may vary in other networks (wireline and mobile) and countries.